

Page No.: 1 of 22

Antenna Test Report

Report No.: TEOT2311000686EP

Applicant Name: Askey Computer Corporation Manufacturer Name: Askey Computer Corporation

Product Name: 5G NR Sub 6 WiFi 7 Router Model No.: ASK-NCM1100

Measurements performed at SGS Taiwan Ltd.
NeiHu District, Taiwan

Issued Date: December 19, 2023

	Name	Date & Signature		
Prepared by:	Walter Lin Engineer	December 19, 2023		
Approved by:	Eason Chou Supervisor	Lasar Chon December 19, 2023		

Distribution				

prosecuted to the fullest extent of the law.



Page No.: 2 of 22

Revision Version

ite vibion v el blom			
Report Number	Revision	Date	Memo
TEOT2311000686EP	00	2023/12/19	Initial creation of test report.
		l	ı

This test report contains a reference to the previous version test report that it replaces.



Page No.: 3 of 22

Measurement System Information

General Information

Testing Condition:

Temperature: 25±3°C

Humidity: <80%


Measurement Facility:

Measurement Chamber: ETS-Lindgren 3D fully anechoic chamber and its measuring system (AMS-8500)

Base Station Simulator: Agilent E5515C

ETS-Lindgren EMCO-2090 Auxiliary Ports RF Relay Switches

Spectrum Analyzer: Agilent N9010A Network Analyzer: Agilent E5071C

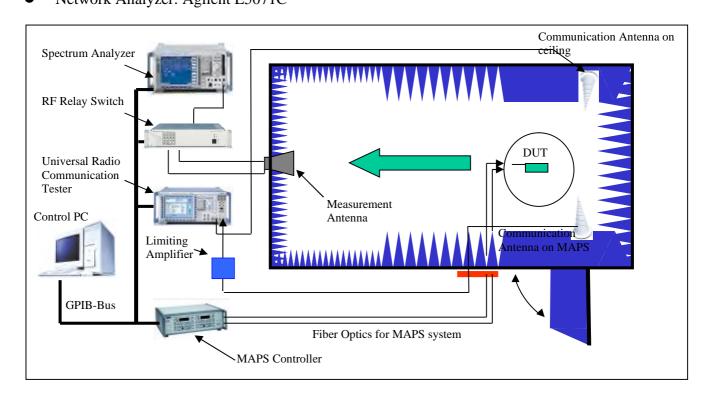




Page No.: 4 of 22

Measurements are performed in an ETS-Lindgren AMS-8500 3D fully anechoic test system. The test system includes a high-performance RF-shielded, rectangular anechoic chamber, a Multi-Axis Positioning System (MAPS), and EMQuestTMEMQ-100 data acquisition and analysis software. The geometry of the setup is specified below for reference.


Typical Setup for ETS-Lindgren AMS-8500:

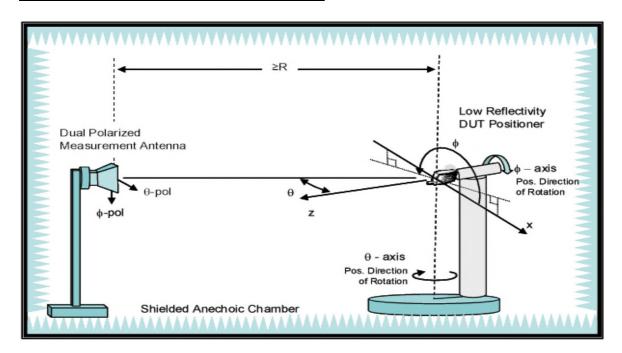

Instruments View



Inside View

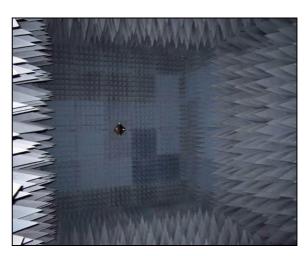

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803\ t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page No.: 5 of 22

Testing Laboratory: Identification of the Responsible Test Laboratory.

OTA Laboratory:

SGS Taiwan Ltd. Wireless Laboratory

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City,

Taiwan 24803.

Telephone: +886 2 2299 3279 Fax: +886 2 2298 0488

Internet: http://www.tw.sgs.com

Testing Location:

1F, No. 8, Alley 15, Lane 120, Sec. 1, NeiHu Road, NeiHu District, Taipei City 114,

Taiwan 11446.

Details of Applicant:

Applicant's name:	Askey Computer Corporation
Applicant's address:	10F, No. 119, Jiankang Rd., Zhonghe Dist., New
	Taipei City, Taiwan
Contact person:	Jack Po
Telephone:	+886 2 2228 7588 ext. 18734
Fax:	N/A
E-mail:	jackpo@askey.com

Details of Manufacturer:

Manufacturer's name:	Askey Computer Corporation
Manufacturer's address:	10F, No. 119, Jiankang Rd., Zhonghe Dist., New
	Taipei City, Taiwan
Contact person:	Jack Po
Telephone:	+886 2 2228 7588 ext. 18734
Fax:	N/A
E-mail:	jackpo@askey.com



Page No.: 6 of 22

Device Description:	Location information notification device
Device Manufacturer:	Askey Computer Corporation
Device Model:	ASK-NCM1100
Hardware Version:	Rev4
Software Version:	SDK 2.0.6
Frequency Range:	2402MHz ~ 7115 MHz
Antenna Type:	Embedded Antenna

Duration of Tests:

Sample Receive Date:	2023-11-07
Test Starting Date:	2023-11-08
Test Ending Date:	2023-11-08
Report Issued Date:	2023-12-19

Photographs of EUT:

Front View Back View



Page No.: 7 of 22

List of Equipment

Equipment Summary Sheet

Equipment Description	Manufacturer	Identification no.	Current calibration date	Next calibration date	
Network analyzer	Agilent	E5071C	2023/05/10	2024/05/09	
Measurement software	ETS-Lindgren	EMQuest 1.14	N/A	N/A	
Multi axis positioning system(MAPSTM)	ETS-Lindgren	EMCO 2115	N/A	N/A	
Multi axis positioning system(MAPSTM)	ETS-Lindgren	EMCO 2110	N/A	N/A	
MAPSTM controller	ETS-Lindgren	EMCO 2090	N/A	N/A	
Fully anechoic test system	ETS-Lindgren	AMS-8500	2023/03/03	2024/03/02	
Horn antenna	ETS-Lindgren	3164-10	2023/03/03	2024/03/02	

Reference Measurement Procedure

The reference measurement procedure is described in SGS Working Instruction WI-TESP-EO-101 to 108 for OTA service. Measurements are made by placing the probe in contact with the sample and measuring the admittance or reflection coefficient with respect to the open-circuit end, using a network analyzer or equivalent instrumentation.



Page No.: 8 of 22

Antenna Gain and Efficiency

Ant 21				
Frequency (MHz)	5955	6475	6695	7115
Point Values				
Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-2.42	-2.51	-2.10	-2.75
Peak EIRP (dBm)	4.53	3.57	4.28	2.53
Directivity (dBi)	6.96	6.09	6.38	5.28
Efficiency (dB)	-2.42	-2.51	-2.10	-2.75
Efficiency (%)	57.25	56.08	61.73	53.06
Gain (dBi)	4.53	3.57	4.28	2.53
NHPRP ±Pi/4 (dBm)	-3.29	-3.49	-3.07	-3.81
NHPRP ±Pi/6 (dBm)	-4.32	-4.58	-4.16	-4.99
NHPRP ±Pi/8 (dBm)	-5.26	-5.48	-5.09	-5.89
Upper Hem. PRP (dBm)	-4.57	-4.62	-4.46	-5.29
Lower Hem. PRP (dBm)	-6.52	-6.66	-5.87	-6.30

Ant 22				
Frequency (MHz)	5955	6475	6695	7115
Point Values				
Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-2.13	-2.54	-2.04	-2.63
Peak EIRP (dBm)	5.74	4.54	4.65	3.36
Directivity (dBi)	7.87	7.08	6.69	5.98
Efficiency (dB)	-2.13	-2.54	-2.04	-2.63
Efficiency (%)	61.23	55.71	62.52	54.63
Gain (dBi)	5.74	4.54	4.65	3.36
NHPRP ±Pi/4 (dBm)	-2.98	-3.33	-2.98	-3.52
NHPRP ±Pi/6 (dBm)	-4.27	-4.59	-4.28	-4.67
NHPRP ±Pi/8 (dBm)	-5.40	-5.73	-5.39	-5.75
Upper Hem. PRP (dBm)	-4.42	-4.86	-4.48	-5.11
Lower Hem. PRP (dBm)	-6.01	-6.38	-5.71	-6.23

Ant 23				
Frequency (MHz)	5955	6475	6695	7115
Point Values				
Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-2.21	-2.90	-2.58	-3.06
Peak EIRP (dBm)	5.01	3.40	3.39	3.91
Directivity (dBi)	7.22	6.30	5.97	6.97
Efficiency (dB)	-2.21	-2.90	-2.58	-3.06
Efficiency (%)	60.09	51.27	55.15	49.41
Gain (dBi)	5.01	3.40	3.39	3.91
NHPRP ±Pi/4 (dBm)	-3.41	-4.00	-3.76	-4.03
NHPRP ±Pi/6 (dBm)	-4.59	-5.22	-5.12	-5.24
NHPRP ±Pi/8 (dBm)	-5.52	-6.20	-6.12	-6.33
Upper Hem. PRP (dBm)	-4.48	-5.14	-4.92	-5.82
Lower Hem. PRP (dBm)	-6.11	-6.85	-6.39	-6.34

Ant 24				
Frequency (MHz)	5955	6475	6695	7115
Point Values				
Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-2.98	-3.16	-2.24	-3.25
Peak EIRP (dBm)	4.13	4.08	4.26	5.52
Directivity (dBi)	7.10	7.24	6.50	8.77
Efficiency (dB)	-2.98	-3.16	-2.24	-3.25
Efficiency (%)	50.40	48.30	59.72	47.34
Gain (dBi)	4.13	4.08	4.26	5.52
NHPRP ±Pi/4 (dBm)	-3.86	-3.98	-3.09	-4.06
NHPRP ±Pi/6 (dBm)	-5.03	-5.05	-4.20	-4.95
NHPRP ±Pi/8 (dBm)	-6.03	-6.03	-5.23	-5.79
Upper Hem. PRP (dBm)	-5.52	-5.98	-5.21	-6.53
Lower Hem. PRP (dBm)	-8.51	-6.37	-5.28	-6.00



Page No.: 9 of 22

Ant 25(RX only)				
Frequency (MHz)	5955	6475	6695	7115
Point Values				
Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-2.63	-3.28	-2.63	-3.36
Peak EIRP (dBm)	2.88	3.50	4.86	3.15
Directivity (dBi)	5.50	6.78	7.49	6.51
Efficiency (dB)	-2.63	-3.28	-2.63	-3.36
Efficiency (%)	54.64	47.01	54.58	46.15
Gain (dBi)	2.88	3.50	4.86	3.15
NHPRP ±Pi/4 (dBm)	-3.82	-4.26	-3.48	-4.37
NHPRP ±Pi/6 (dBm)	-5.30	-5.68	-4.71	-5.61
NHPRP ±Pi/8 (dBm)	-6.48	-6.84	-5.78	-6.69
Upper Hem. PRP (dBm)	-5.11	-5.73	-5.22	-5.80
Lower Hem. PRP (dBm)	-6.23	-6.93	-6.11	-7.02

Ant 11							
Frequency (MHz)	2412	2437	2462	5180	5320	5500	5825
Point Values							
Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-2.43	-1.79	-1.36	-2.86	-3.04	-2.90	-4.21
Peak EIRP (dBm)	1.94	2.33	2.66	3.12	4.73	2.94	1.09
Directivity (dBi)	4.37	4.12	4.02	5.97	7.77	5.84	5.30
Efficiency (dB)	-2.43	-1.79	-1.38	-2.86	-3.04	-2.90	-4.21
Efficiency (%)	57.16	66.29	73.10	51.80	49.66	51.26	37.92
Gain (dBi)	1.94	2.33	2.66	3.12	4.73	2.94	1.09
NHPRP ±Pi/4 (dBm)	-3.11	-2.43	-2.02	-3.72	-3.96	-4.12	-5.42
NHPRP ±Pi/6 (dBm)	-4.14	-3.46	-3.02	-4.79	-4.96	-5.21	-6.70
NHPRP ±Pi/8 (dBm)	-5.08	-4.40	-3.96	-5.77	-5.94	-6.12	-7.77
Upper Hem. PRP (dBm)	-5.62	-5.04	-4.52	-5.72	-6.09	-5.80	-7.06
Lower Hem. PRP (dBm)	-5.27	-4.58	-4.22	-6.02	-6.01	-6.03	-7.38

Ant 12							
Frequency (MHz)	2412	2437	2462	5180	5320	5500	5825
Point Values							
Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-2.56	-1.92	-1.37	-2.73	-2.97	-2.91	-3.21
Peak EIRP (dBm)	3.65	4.14	4.49	3.69	3.33	3.35	3.51
Directivity (dBi)	6.21	6.06	5.86	6.42	6.30	6.26	6.72
Efficiency (dB)	-2.56	-1.92	-1.37	-2.73	-2.97	-2.91	-3.21
Efficiency (%)	55.41	64.27	73.02	53.33	50.47	51.11	47.78
Gain (dBi)	3.65	4.14	4.49	3.69	3.33	3.35	3.51
NHPRP ±Pi/4 (dBm)	-3.36	-2.72	-2.16	-3.75	-3.97	-3.84	-4.04
NHPRP ±Pi/6 (dBm)	-4.33	-3.70	-3.20	-4.96	-5.07	-4.83	-5.19
NHPRP ±Pi/8 (dBm)	-5.21	-4.59	-4.12	-5.96	-5.99	-5.70	-6.25
Upper Hem. PRP (dBm)	-5.99	-5.25	-4.46	-5.63	-5.90	-5.83	-6.33
Lower Hem. PRP (dBm)	-5.19	-4.63	-4.30	-5.86	-6.06	-6.03	-6.11

Ant 13							
Frequency (MHz)	2412	2437	2462	5180	5320	5500	5825
Point Values							
Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-2.16	-1.50	-1.09	-2.69	-2.94	-2.91	-3.30
Peak EIRP (dBm)	2.39	2.25	3.49	2.82	3.32	2.19	2.38
Directivity (dBi)	4.54	3.75	4.58	5.51	6.26	5.10	5.67
Efficiency (dB)	-2.16	-1.50	-1.09	-2.69	-2.94	-2.91	-3.30
Efficiency (%)	60.84	70.80	77.85	53.78	50.78	51.17	46.75
Gain (dBi)	2.39	2.25	3.49	2.82	3.32	2.19	2.38
NHPRP ±Pi/4 (dBm)	-2.92	-2.24	-1.83	-3.85	-4.23	-4.01	-4.38
NHPRP ±Pi/6 (dBm)	-4.01	-3.32	-2.92	-5.06	-5.37	-5.22	-5.62
NHPRP ±Pi/8 (dBm)	-4.98	-4.28	-3.89	-6.07	-6.25	-6.17	-6.62
Upper Hem. PRP (dBm)	-5.83	-5.22	-4.76	-6.03	-6.09	-6.41	-6.38
Lower Hem. PRP (dBm)	-4.59	-3.90	-3.52	-5.40	-5.82	-5.48	-8.25



Page No.: 10 of 22

Ant 14							
Frequency (MHz)	2412	2437	2462	5180	5320	5500	5825
Point Values							
Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-2.50	-1.92	-1.32	-2.63	-2.94	-2.63	-3.64
Peak EIRP (dBm)	2.04	2.52	3.24	4.06	3.43	2.98	2.89
Directivity (dBi)	4.54	4.43	4.56	6.69	6.37	5.60	6.54
Efficiency (dB)	-2.50	-1.92	-1.32	-2.63	-2.94	-2.63	-3.64
Efficiency (%)	56.22	64.34	73.85	54.55	50.85	54.63	43.21
Gain (dBi)	2.04	2.52	3.24	4.06	3.43	2.98	2.89
NHPRP ±Pi/4 (dBm)	-3.29	-2.67	-2.06	-3.82	-3.97	-3.67	-4.60
NHPRP ±Pi/6 (dBm)	-4.44	-3.82	-3.26	-5.23	-5.35	-5.01	-5.90
NHPRP ±Pi/8 (dBm)	-5.43	-4.82	-4.32	-6.31	-6.48	-6.11	-7.06
Upper Hem. PRP (dBm)	-5.42	-4.97	-4.40	-6.42	-6.79	-6.39	-7.11
Lower Hem. PRP (dBm)	-5.61	-4.88	-4.26	-4.99	-5.24	-5.00	-6.24

Ant 15(DFS)(RX only)							
Frequency (MHz)	2412	2437	2462	5180	5320	5500	5825
Point Values							
Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-2.10	-1.60	-1.09	-2.05	-2.32	-2.03	-2.13
Peak EIRP (dBm)	3.92	4.40	5.06	6.90	7.66	7.44	6.47
Directivity (dBi)	6.02	6.00	6.15	8.95	9.97	9.47	8.60
Efficiency (dB)	-2.10	-1.60	-1.09	-2.05	-2.32	-2.03	-2.13
Efficiency (%)	61.65	69.21	77.82	62.37	58.68	62.70	61.30
Gain (dBi)	3.92	4.40	5.06	6.90	7.66	7.44	6.47
NHPRP ±Pi/4 (dBm)	-2.99	-2.50	-2.01	-2.97	-3.28	-2.98	-3.06
NHPRP ±Pi/6 (dBm)	-4.21	-3.76	-3.32	-4.00	-4.36	-4.10	-4.32
NHPRP ±Pi/8 (dBm)	-5.27	-4.83	-4.41	-4.92	-5.27	-5.10	-5.40
Upper Hem. PRP (dBm)	-5.71	-5.15	-4.61	-4.44	-4.81	-4.75	-4.73
Lower Hem. PRP (dBm)	-4.58	-4.12	-3.64	-5.78	-5.91	-5.35	-5.58

Ant BT			
Frequency (MHz)	2402	2441	2480
Point Values			
Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-3.82	-3.24	-2.06
Peak EIRP (dBm)	3.71	4.40	5.55
Directivity (dBi)	7.53	7.64	7.61
Efficiency (dB)	-3.82	-3.24	-2.06
Efficiency (%)	41.53	47.44	62.17
Gain (dBi)	3.71	4.40	5.55
NHPRP ±Pi/4 (dBm)	-4.42	-3.88	-2.74
NHPRP ±Pi/6 (dBm)	-5.60	-5.07	-3.92
NHPRP ±Pi/8 (dBm)	-6.68	-6.14	-4.98
Upper Hem. PRP (dBm)	-7.01	-6.52	-5.42
Lower Hem. PRP (dBm)	-6.65	-5.99	-4.76



Page No.: 11 of 22





Page No.: 12 of 22

Antenna 3D Plot Matrix

All plots in this section show the total EIRP (EIRP θ + EIRP ϕ) with the +x-axis pointing out of the page, +y-axis pointing top of the page, and +z-axis pointing left of the page.

Ant 21

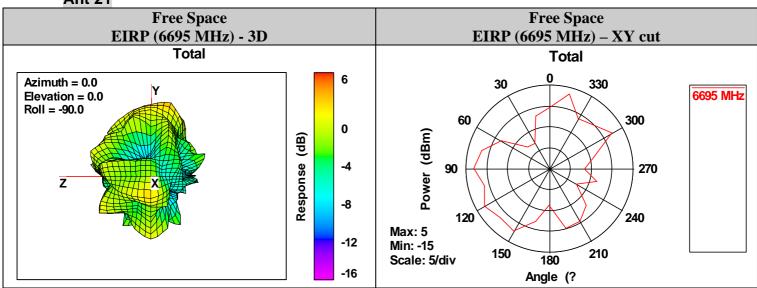


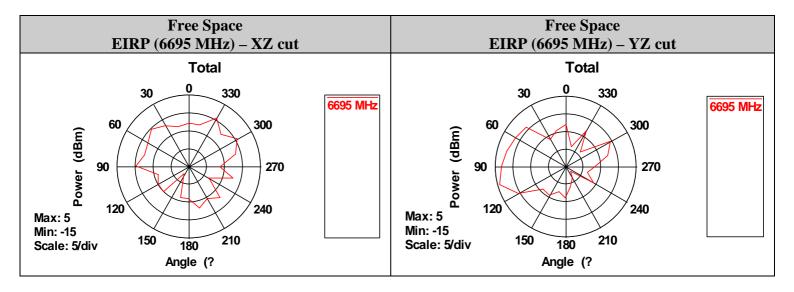




Page No.: 13 of 22

Ant 22

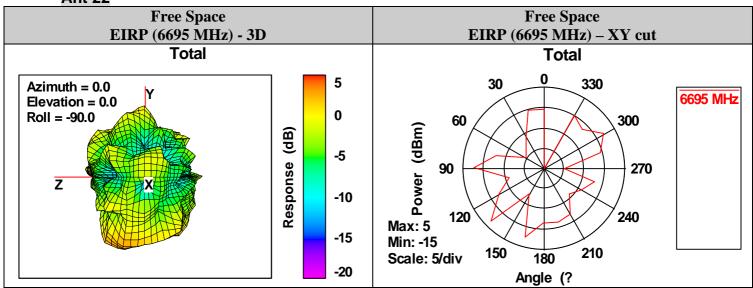

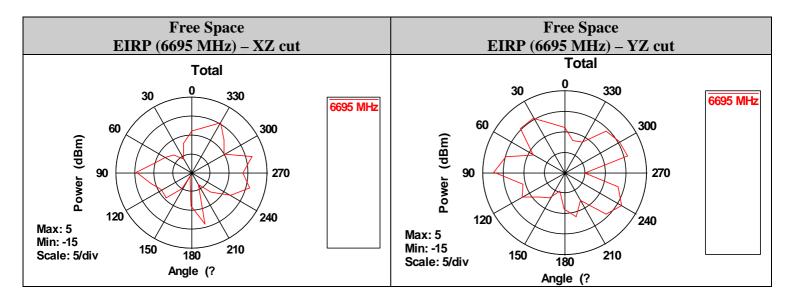





Ant 23

Report No.: TEOT2311000686EP

Page No.: 14 of 22

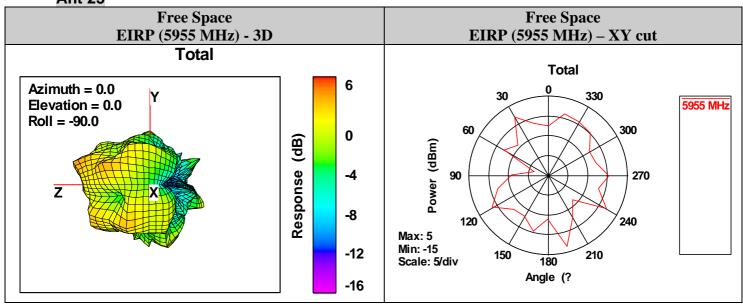

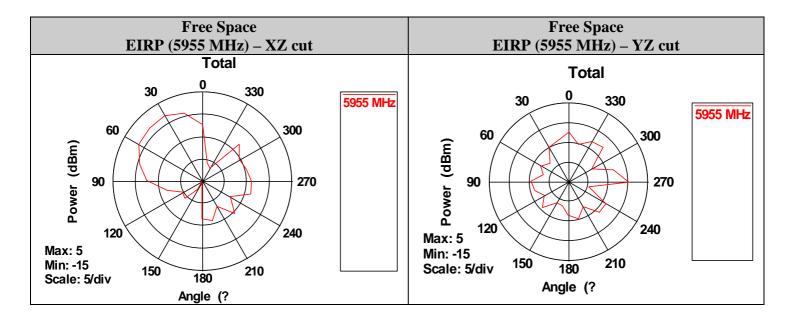





Ant 24

Report No.: TEOT2311000686EP


Page No.: 15 of 22

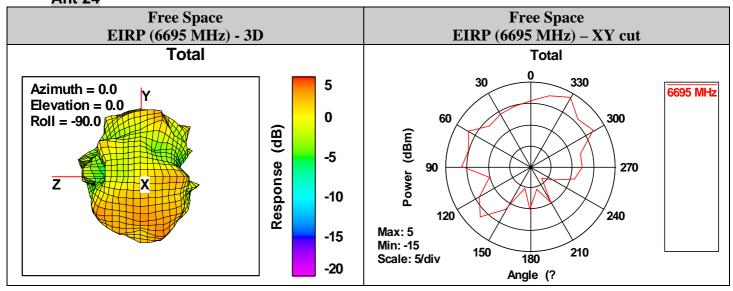


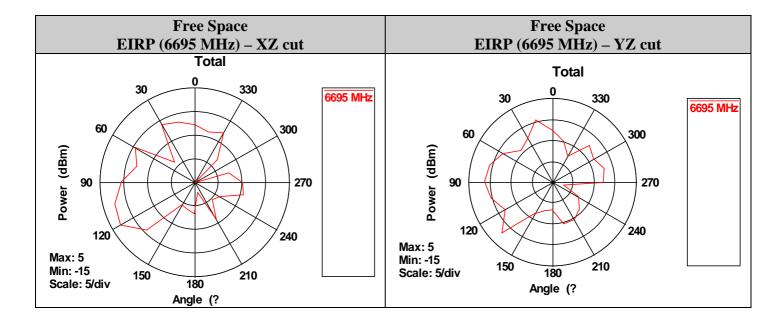




Page No.: 16 of 22

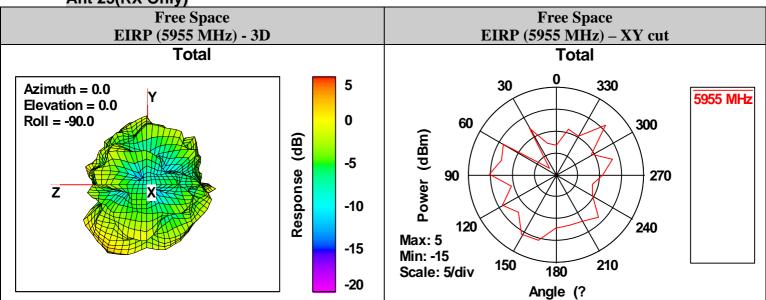


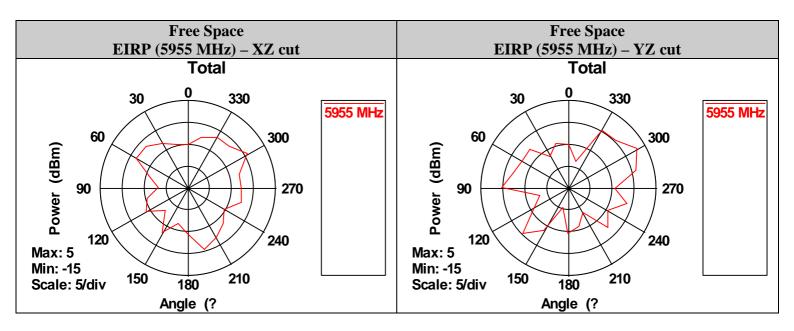




Page No.: 17 of 22

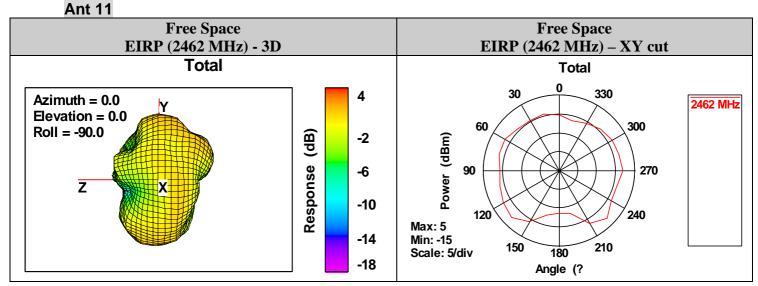


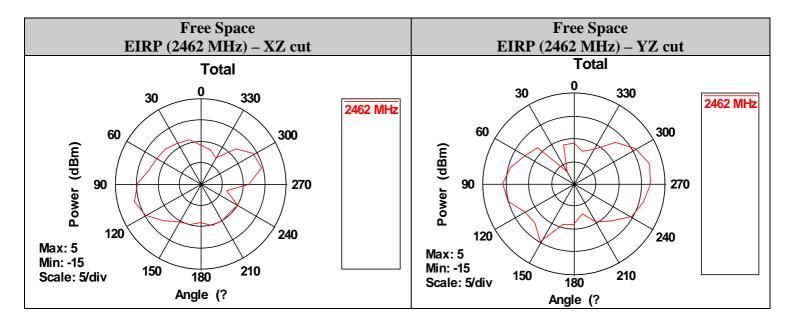



Page No.: 18 of 22

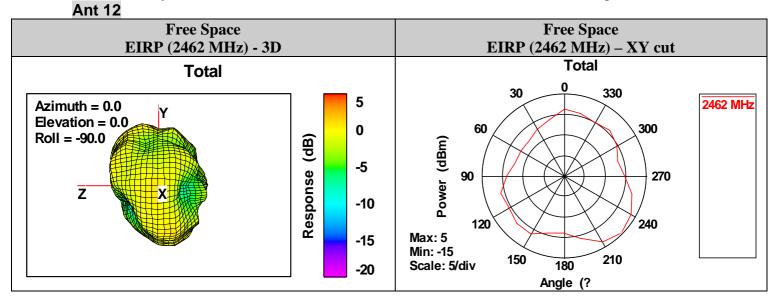

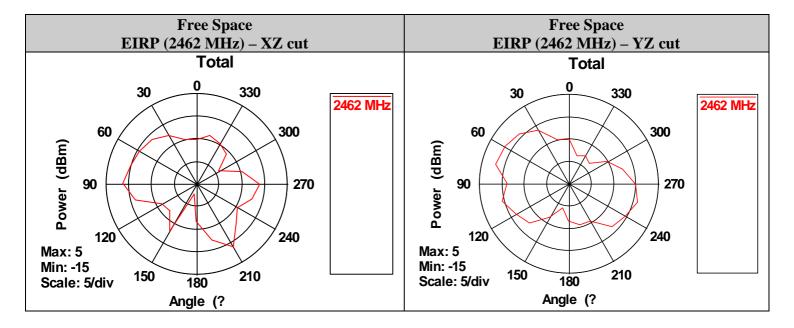





Ant 13

Report No.: TEOT2311000686EP

Page No.: 19 of 22

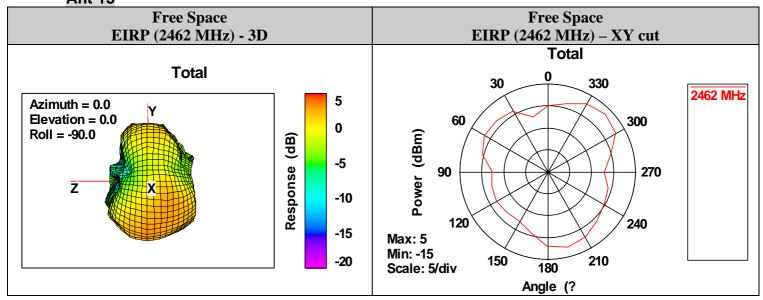

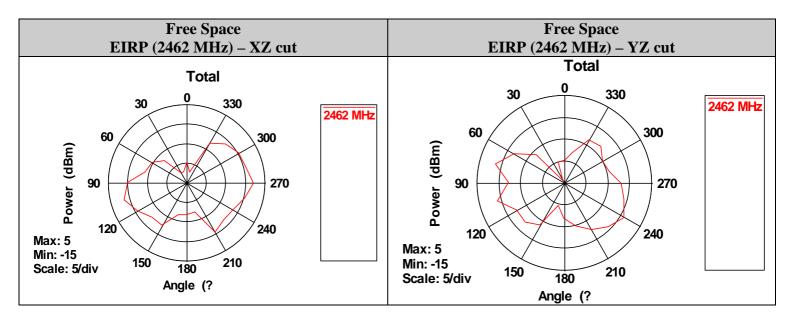





Ant 14

Report No.: TEOT2311000686EP

Page No.: 20 of 22

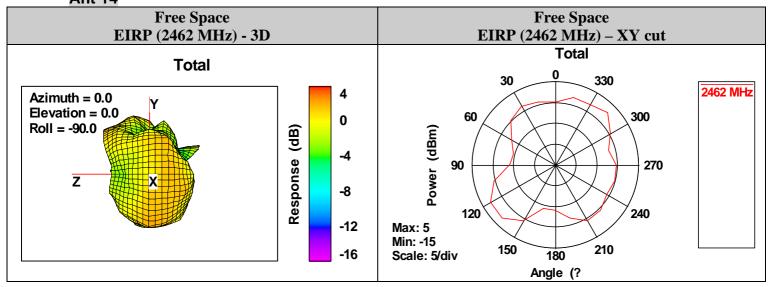


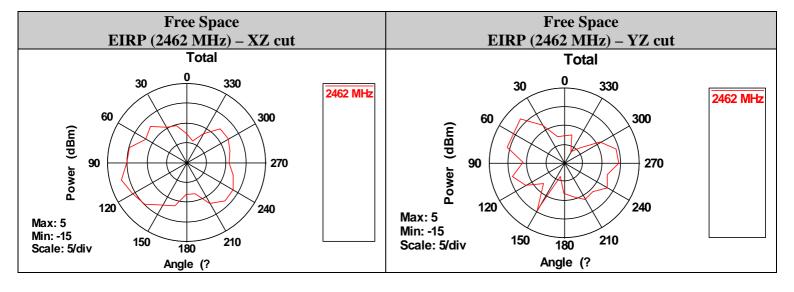




Page No.: 21 of 22



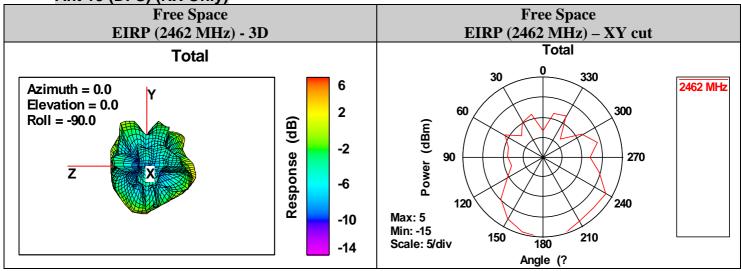


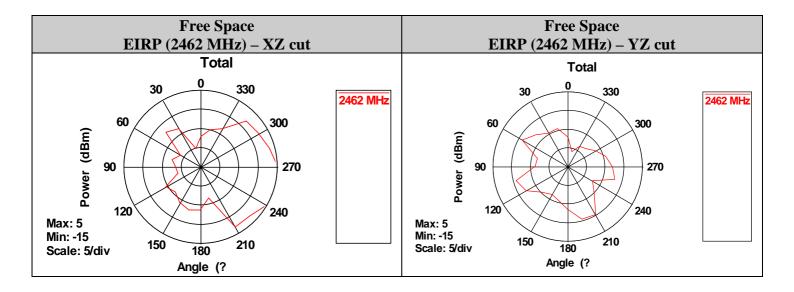




Page No.: 22 of 22

Ant BT

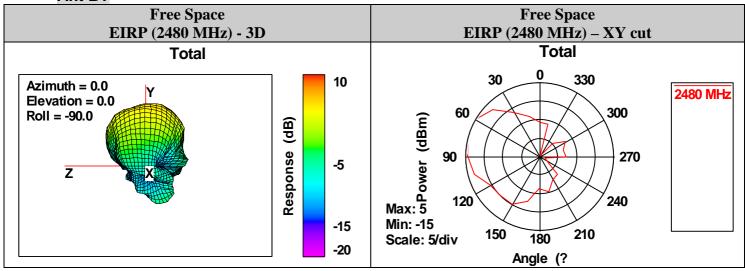

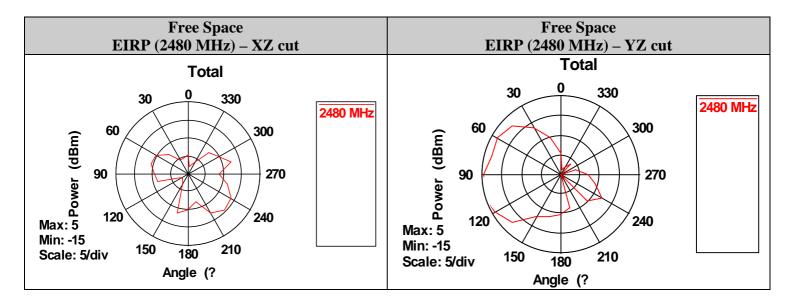

End of Report