



## Antenna Spec

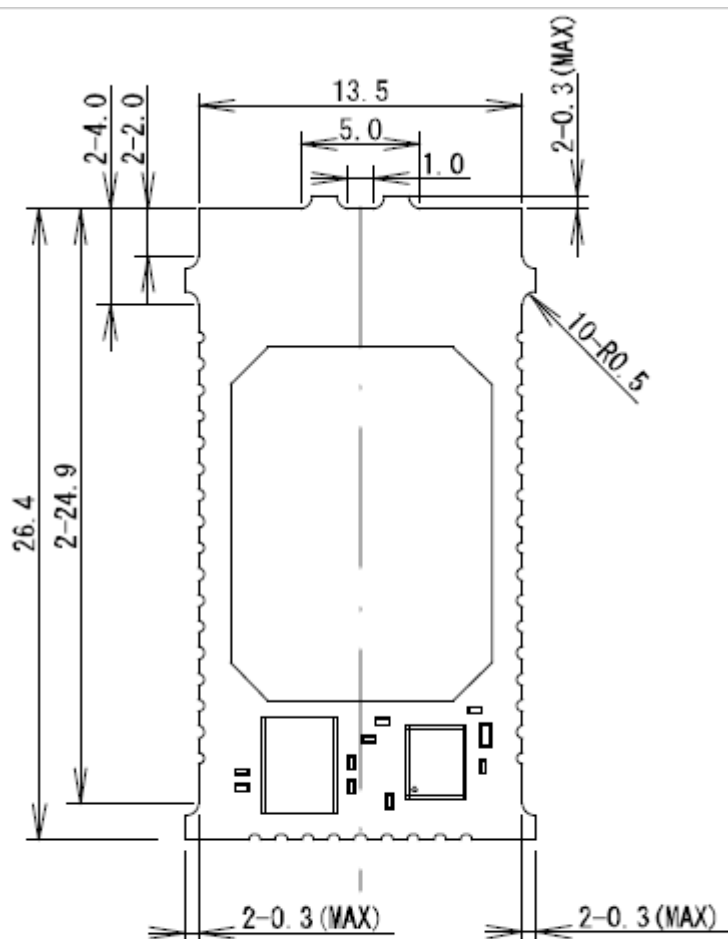

<Top View / Top 面視>

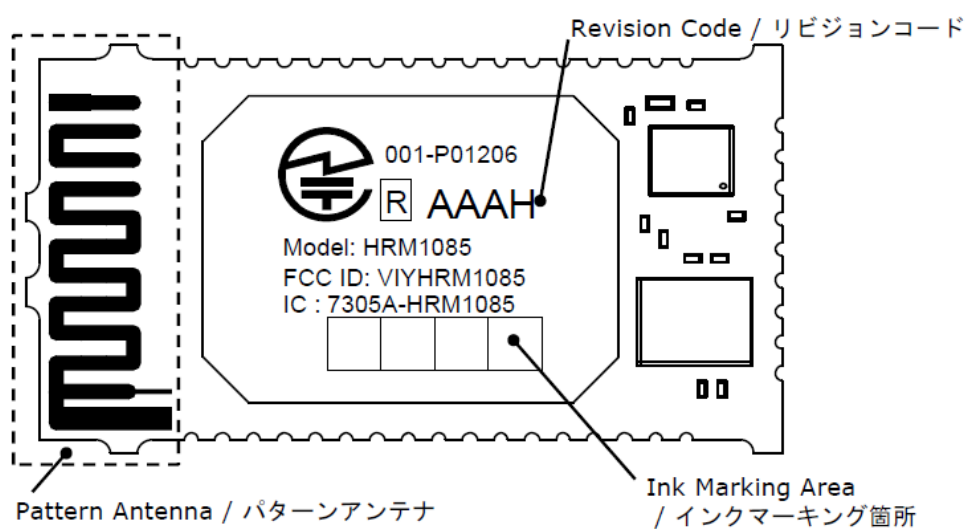

Test Site: BTL Inc.

| Frequency (MHz) | Efficiency (%) | Gain (dBi) |
|-----------------|----------------|------------|
| 2400            | 12.64          | -0.37      |
| 2410            | 13.40          | 0.02       |
| 2420            | 12.06          | -0.37      |
| 2430            | 12.93          | -0.09      |
| 2440            | 14.41          | 0.24       |
| 2450            | 14.66          | 0.32       |
| 2460            | 17.37          | 1.03       |
| 2470            | 17.98          | 1.24       |
| 2480            | 16.36          | 0.86       |
| 2490            | 19.33          | 1.63       |
| 2500            | 22.46          | 1.50       |

Total

