



Nemko Test Report: 4L0613RUS1Rev3

Applicant: Motion Computing, Inc.
8601 RR 2222 Bldg 2
Building 1, Suite 250
Austin, TX 78730

Equipment Under Test: LE1600 Series, Model T004
(E.U.T.)

In Accordance With: **FCC Part 15, Subpart C, 15.247**
Digital Transmission System Transceiver

Tested By: Nemko Dallas Inc.
802 N. Kealy
Lewisville, Texas 75057-3136

Authorized By: 
Tom Tidwell, Frontline Group Manager

Date: March 13, 2006

Table of Contents

Section 1.	Summary of Test Results	3
Section 2.	Equipment Under Test (E.U.T.)	5
Section 3.	Powerline Conducted Emissions	7
Section 4.	Occupied Bandwidth	11
Section 5.	Maximum Peak Output Power	21
Section 6.	RF Exposure	22
Section 7	Spurious Emissions at Antenna Terminals	23
Section 8.	Radiated Emissions	28
Section 9.	Peak Power Spectral Density	33
Section 10.	Receiver Spurious Emissions.....	43
Section 10.	Test Equipment List.....	47
ANNEX A - TEST DETAILS		48
ANNEX B - TEST DIAGRAMS.....		59

EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

Section 1. Summary of Test Results

Manufacturer: Motion Computing, Inc.

Model No.: T004

Serial No.: None

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.247 for Direct Sequence Spread Spectrum devices. Radiated tests were conducted in accordance with ANSI C63.4-2001. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.



New Submission



Production Unit



Class II Permissive Change



Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE. NONE
See "Summary of Test Data".



NVLAP LAB CODE: 100426-0

Nemko Dallas Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Dallas Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

Summary Of Test Data

NAME OF TEST	PARA. NO.	RESULT
Powerline Conducted Emissions	15.207(a)	Complies
Minimum 6 dB Bandwidth	15.247(a)(2)	Complies
Channel Separation	15.247(a)(1)	Complies
Pseudorandom Hopping Algorithm	15.247(a)(1)	Complies
Time of Occupancy	15.247(a)(1)(ii)	Complies
20 dB Occupied Bandwidth	15.247(a)(1)	Complies
Maximum Peak Power Output	15.247(b)(1)	Complies
Spurious Emissions (Antenna Conducted)	15.247(c)	Complies
Spurious Emissions (Restricted Bands)	15.247(c)	Complies
Peak Power Spectral Density	15.247(d)	Complies

Footnotes:

EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

Section 2. Equipment Under Test (E.U.T.)

General Equipment Information

Frequency Band:

- ☐ 902 – 928 MHz
☒ 2400 – 2483.5 MHz
☒ 5725 – 5850 MHz

Channel Spacing:

5 MHz


User Frequency Adjustment:

Software controlled

Description of EUT

The T004 is a portable computer platform based on ultra-portable tablet PC technology utilizing Microsoft's Tablet version of Windows XP. The PC is compatible with 802.11a, b and g technologies.

The PC also has Bluetooth capability.

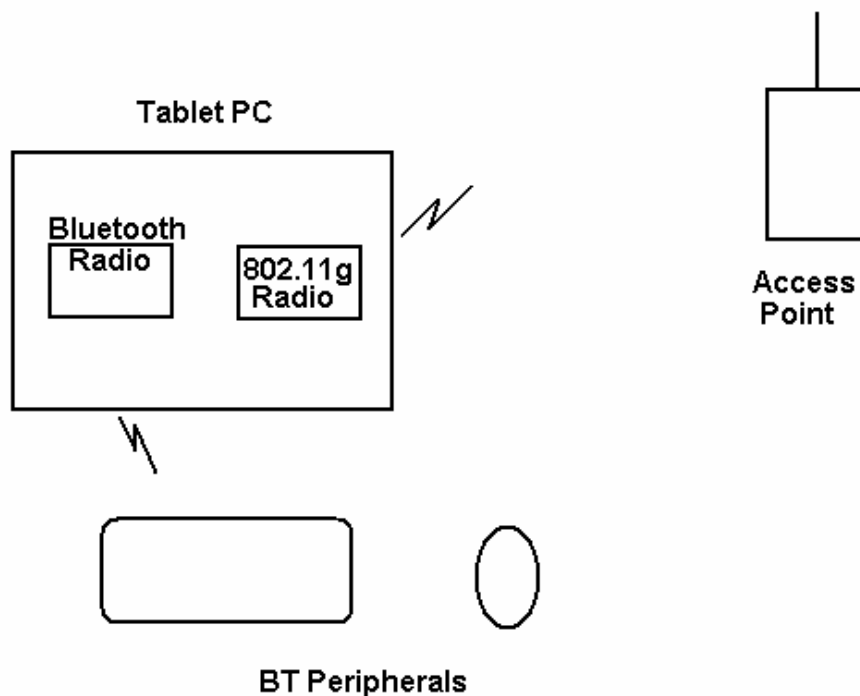System Diagram

EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

Section 3. Powerline Conducted Emissions

NAME OF TEST: Powerline Conducted Emissions	PARA. NO.: 15.207(a)
TESTED BY: Kevin Rose	DATE: 12/20/04


Test Results: Complies.


Measurement Data: See attached plots.

Measurement Uncertainty: +/- 1.7 dB

NOTE: The device was tested with both radio modules transmitting simultaneously (Bluetooth and WiLAN).

Test Data – Powerline Conducted Emissions

		Dallas Headquarters: 802 N. Kealy Lewisville, TX 75057 Tel: (972) 436-9600 Fax: (972) 436-2667									
Conducted Emissions Powerline Voltage Measurement											
Complete	<u>X</u>	Job # : <u>4L0613e</u>	Test # : <u>CEPV-01</u>								
Preliminary	<u> </u>	Page <u>1</u>	of <u>2</u>								
Client Name : <u>Motion Computing Inc.</u>											
EUT Name : <u>LE1600 Series</u>											
EUT Model # : <u>T004</u>											
EUT Part # : <u>EDX20</u>											
EUT Serial # : <u>56</u>											
EUT Config. : <u>transmitting max power and DVD operating</u>											
Specification : <u>FCC B</u>		Reference : <u>EN 55022 Class B</u>									
Transducer # : <u>969</u>	Temp. (deg. C) : <u>20</u>	Date : <u>12/20/04</u>									
HP Filter # : <u>1433</u>	Humidity (%) : <u>19</u>	Time : <u>10:26</u>									
Cable 1 # : <u>1998</u>	EUT Voltage : <u>120</u>	Staff : <u>KEVIN ROSE</u>									
Cable 2 # : <u>1129</u>	EUT Frequency : <u>60</u>	Location : <u>ROOM 2</u>									
Detector 1 # : <u>718</u>	Peak Bandwidth: <u>10 kHz</u>	Photo ID: <u>4L0613E CEPV-01</u>									
Detector 2 # : <u>966</u>	QP Bandwidth <u>10 kHz</u>										
Limiter # : <u> </u>	Avg. Bandwidth <u>10 kHz</u>										
Meas. Freq. (MHz)	EUT Test Point	Detector Type (P,QP,A)	Limit Type (QP,A)	Meter Reading (dBuV)	Path Loss (dB)	Transducer Factor (dB)	Corrected Reading (dBuV)	Spec.limit (dBuV)	CR/SL Diff. (dB)	Pass Fail	Comment
0.1527	Neutral	A	A	47.0	0	0	47.0	65.85	55.852	-8.9	Pass
0.1527	Neutral	QP	QP	56.8	0	0	56.8	65.85	55.852	-9.1	Pass
0.2298	Neutral	A	A	36.0	0	0	36.0	62.46	52.457	-16.5	Pass
0.2298	Neutral	QP	QP	45.2	0	0	45.2	62.46	52.457	-17.3	Pass
0.4568	Neutral	A	A	32.5	0	0	32.5	56.75	46.751	-14.3	Pass
0.4568	Neutral	QP	QP	36.2	0	0	36.2	56.75	46.751	-20.6	Pass

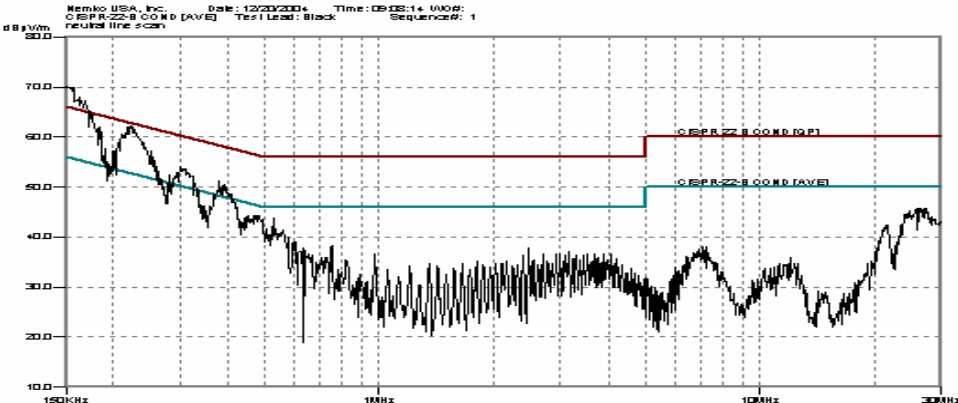

Nemko USA, Inc. Date: 12/20/2004 Time: 09:05:14 WOB: 0519022-B COMB (AVE) Test Lead: Black Sequence#: 1
dBuV/m
80.0
70.0
60.0
50.0
40.0
30.0
20.0
10.0
150kHz 1MHz 10MHz 30MHz
CEPV-22-B COMB (QP)
CEPV-22-B COMB (AVE)

..EMCShare\AUTOMATED\DATASHTS\CEPV_Voltage Rev C.xls Document Control #EMC DS EM COND VOLT

Test Data – Powerline Conducted Emissions



NEMKO Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Conducted Emissions
Powerline Voltage Measurement


Complete X
Preliminary

Job # : 4L0613e Test # : CEPV-01
Page 2 of 2

Client Name : Motion Computing Inc.
EUT Name : LE1600 Series
EUT Model # : T004
EUT Part # : EDX20
EUT Serial # : 56
EUT Config : transmitting max power and DVD operating

Specification : FCC B Reference : EN 55022 Class B

Meas. Freq. (MHz)	EUT Test Point	Detector Type (P,QP, A)	Limit Type (QP, A)	Meter Reading (dBuV)	Path Loss (dB)	Transducer Factor (dB)	Corrected Reading (dBuV)	Spec.limit (dBuV)		CR/SL Diff. (dB)	Pass Fail Unc.	Comment
								Q.P.	Avg.			
0.1527	Hot	A	A	46.0	0.0	0.0	46.0	65.85	55.852	-9.9	Pass	
0.1527	Hot	QP	QP	57.2	0.0	0.0	57.2	65.85	55.852	-8.7	Pass	
0.2298	Hot	A	A	38.0	0.0	0.0	38.0	62.46	52.457	-14.5	Pass	
0.2298	Hot	QP	QP	47.0	0.0	0.0	47.0	62.46	52.457	-15.5	Pass	
0.4568	Hot	A	A	25.6	0.0	0.0	25.6	56.75	46.751	-21.2	Pass	
0.4568	Hot	QP	QP	35.2	0.0	0.0	35.2	56.75	46.751	-21.6	Pass	

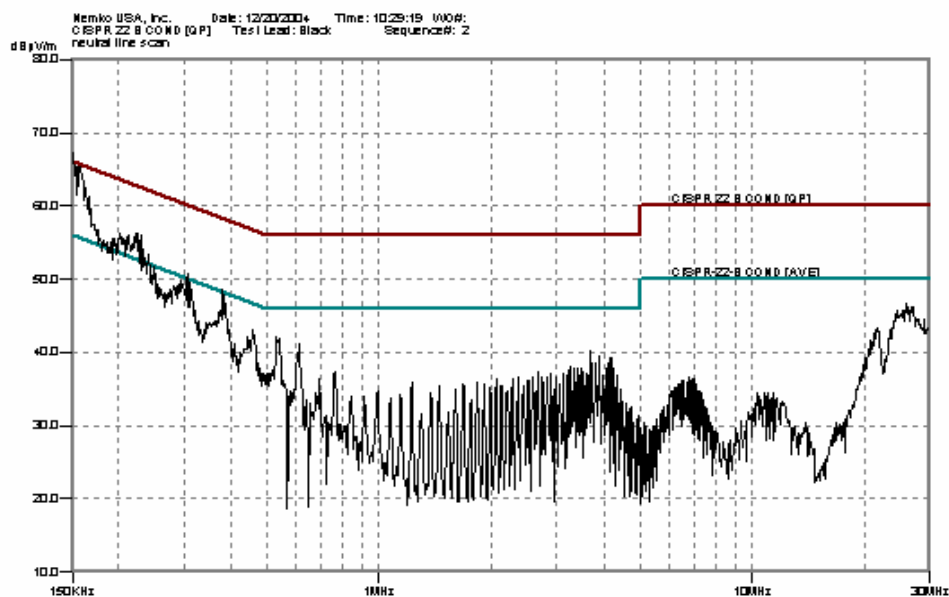

..\\EMCShare\\AUTOMATE\\DATASHTS\\CEP_Voltage Rev C.xls Document Control #EMC DS EM COND VOLT

Photos – Powerline Conducted Emissions

Front



Side



EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

Section 4. Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 15.247(a)(2)
TESTED BY: David Light	DATE: 12/21/04

Test Results: Complies.

802.11g

Measurement Data: See 6 dB BW plot

Measured 6 dB bandwidth: 16.5 MHz
Channel Separation: 5 MHz

802.11b

Measurement Data: See 6 dB BW plot

Measured 6 dB bandwidth: 10 MHz
Channel Separation: 5 MHz

802.11a

Measurement Data: See 6 dB BW plot

Measured 6 dB bandwidth: 16.5 MHz
Channel Separation: 5 MHz

EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

802.11g




Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot		Occupied Bandwidth	
Page 1 of 4		Date: 12/21/2004	
Job No.:	4L0613	Temperature(°C):	22
Specification:	15.247	Relative Humidity(%):	45
Tested By:	David Light	E.U.T.: TABLET PC	
Configuration:	TX W/ TX UTILITY SET TO 25 POWER		
Sample Number:	1		
Location:	AC 3	RBW:	100 kHz
Detector Type:	Peak	VBW:	100 kHz
Test Equipment Used			
Antenna:	1304	Directional Coupler:	
Pre-Amp:		Cable #1:	1484
Filter:		Cable #2:	1485
Receiver:	1464	Cable #3:	
Attenuator #1:		Cable #4:	
Attenuator #2:		Mixer:	
Additional equipment used:			
Measurement Uncertainty:	+/-1.7 dB		

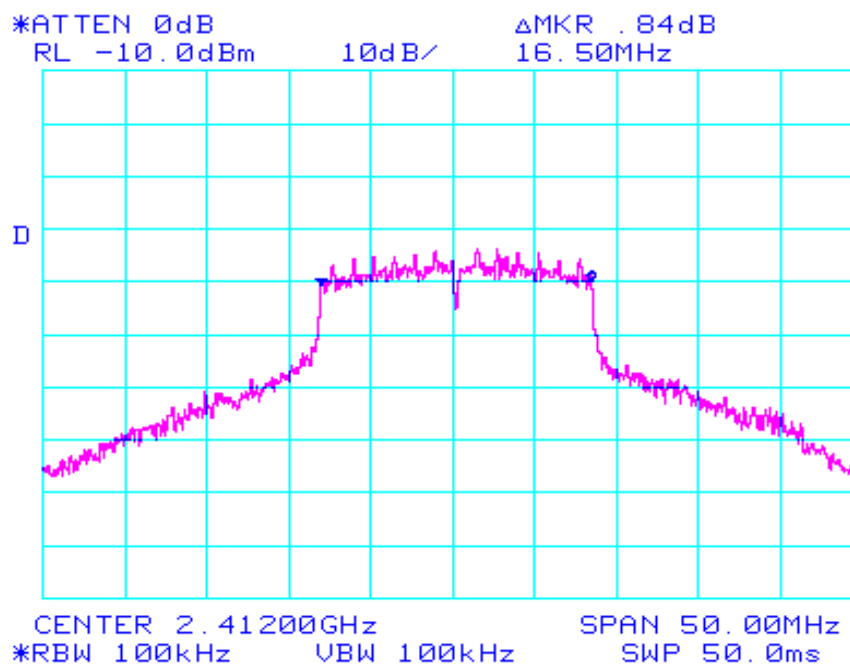

Notes: Channel 1
802.11g @ 54 Mbps

EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3


802.11g



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

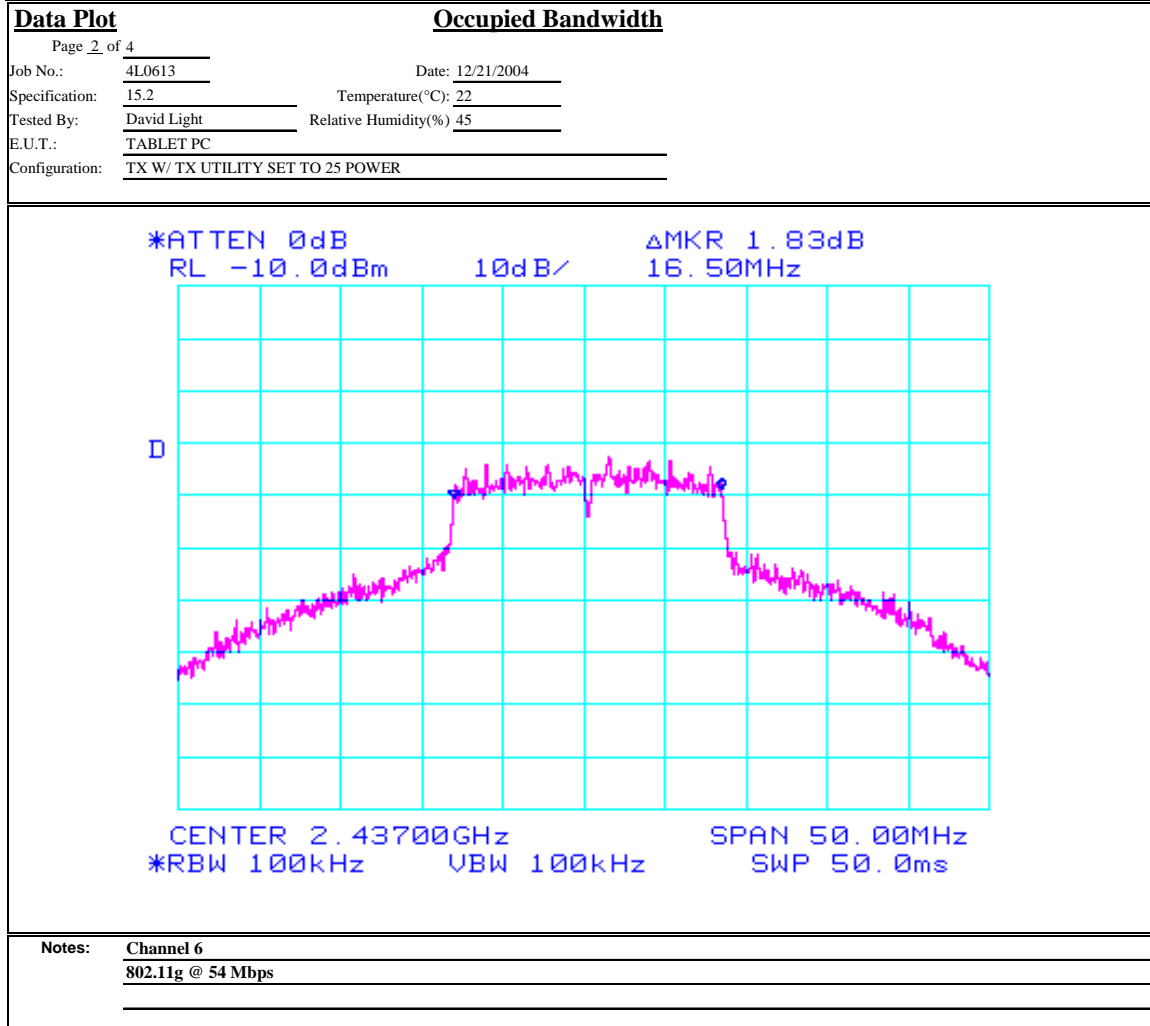


EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

802.11g

**Dallas Headquarters:**

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

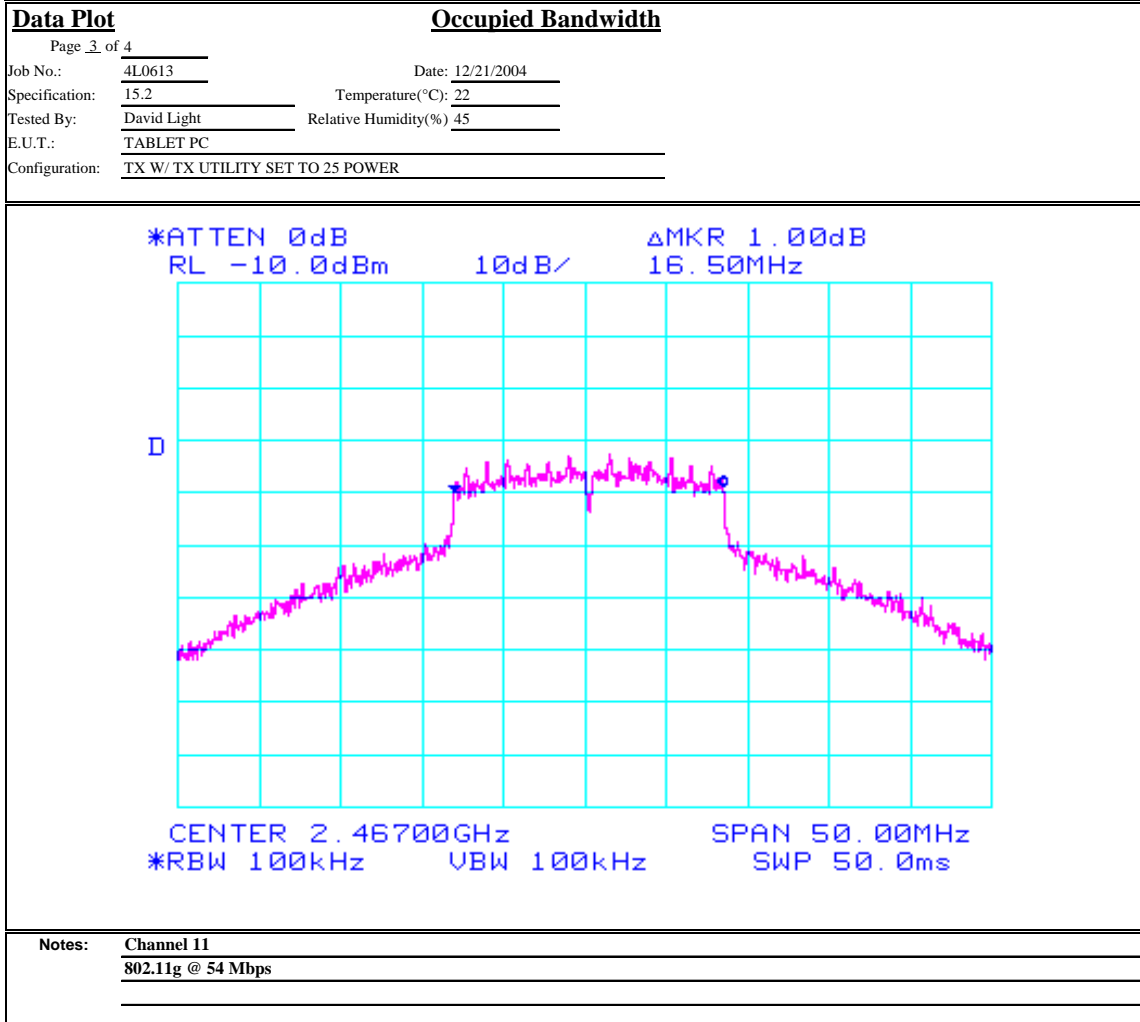

EQUIPMENT: LE 1600 Series, Model T004

TEST REPORT NO.: 4L0613RUS1Rev3

802.11b



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot


Occupied Bandwidth

Page 1 of 4
Job No.: 4L0613 Date: 12/21/2004
Specification: 15.247 Temperature(°C): 22
Tested By: David Light Relative Humidity(%): 45
E.U.T.: TABLET PC
Configuration: TX UPRIGHT - TX POWER SET TO 25 IN TEST UTILITY
Sample Number: 1
Location: AC 3 RBW: 100 kHz
Detector Type: Peak VBW: 100 kHz

Complete X
Preliminary: _____

Test Equipment Used

Antenna: 1304 Directional Coupler: _____
Pre-Amp: _____ Cable #1: 1484
Filter: _____ Cable #2: 1485
Receiver: 1464 Cable #3: _____
Attenuator #1: _____ Cable #4: _____
Attenuator #2: _____ Mixer: _____
Additional equipment used: _____
Measurement Uncertainty: +/-1.7 dB

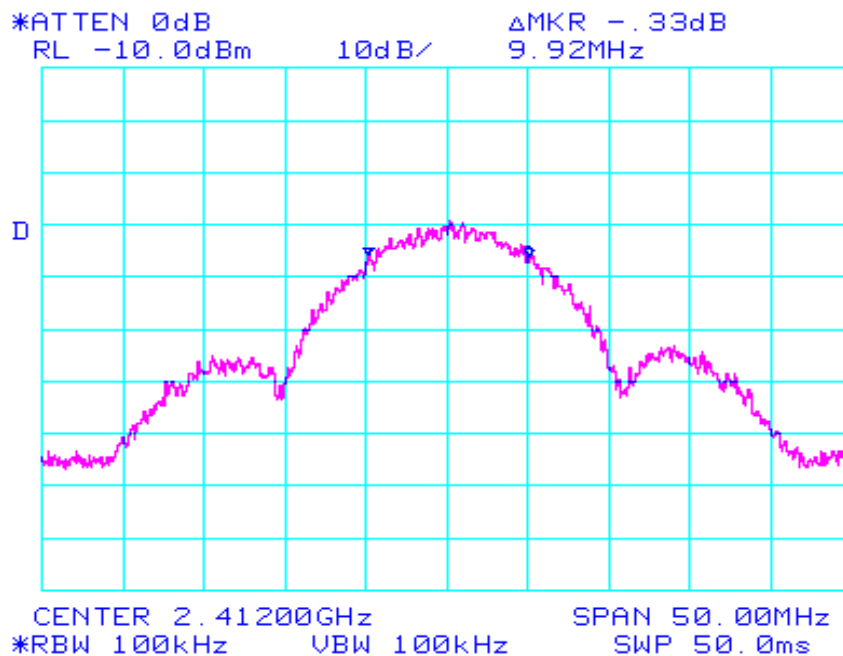

Notes: Channel 1
802.11b @ 11 Mbps


EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

802.11b

**Dallas Headquarters:**

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

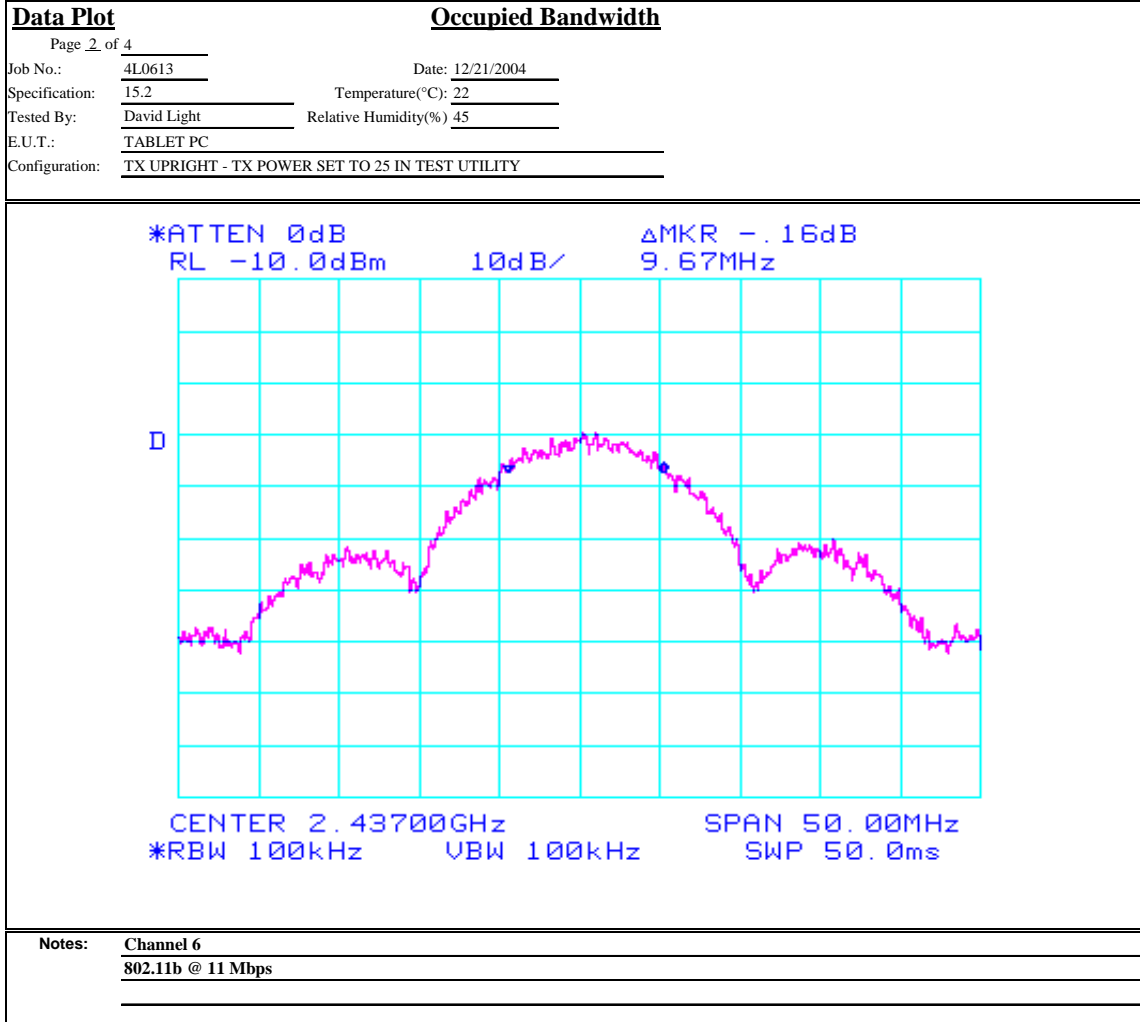


EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

802.11b

**Dallas Headquarters:**

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

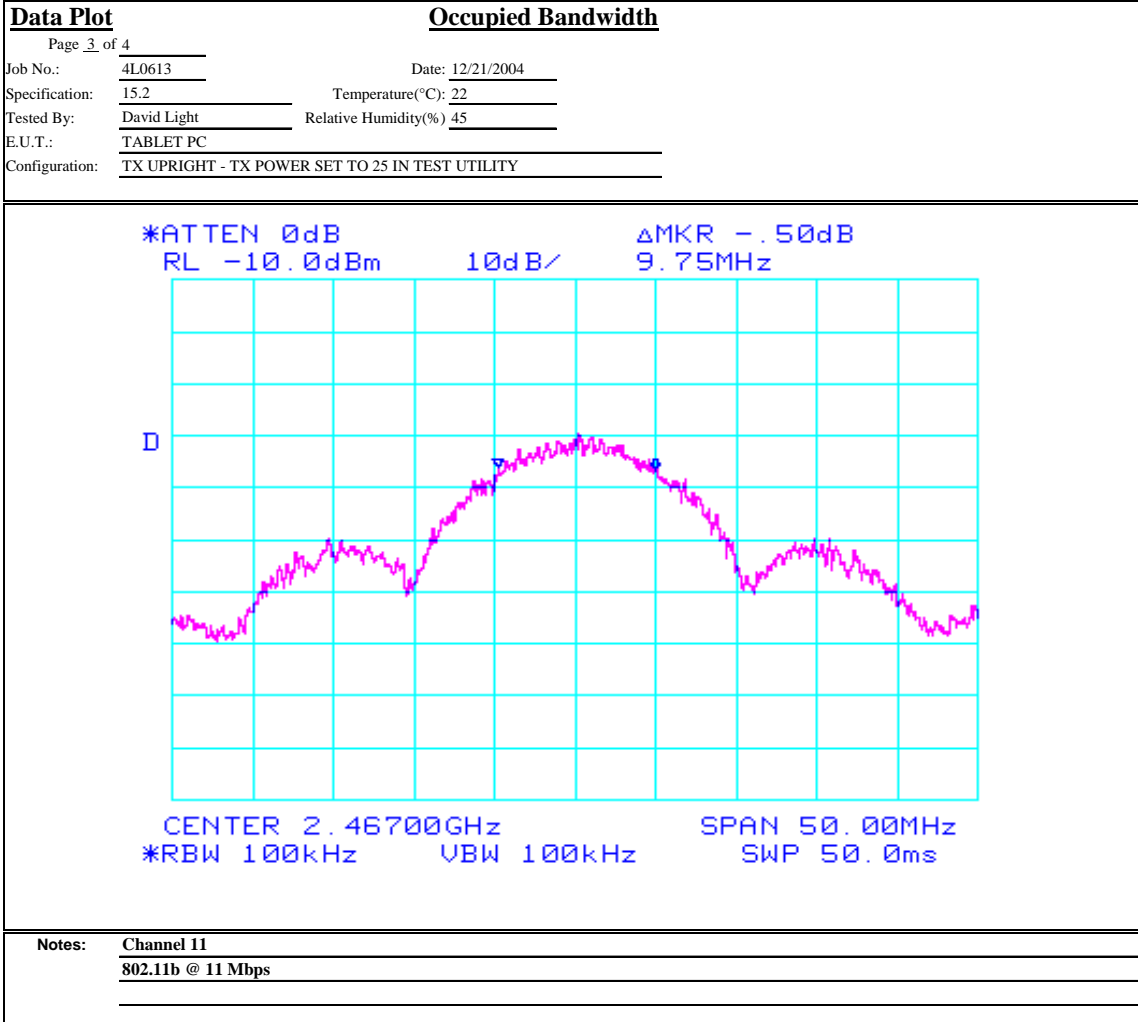

EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

802.11a



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot


Spurious Emissions at Antenna Terminals

Page 1 of 4

Job No.: 4L0613 Date: 12/21/2004 Complete ☒ X
Specification: 15.247 Temperature(°C): 22 Preliminary: ☐
Tested By: David Light Relative Humidity(%): 45
E.U.T.: TABLET PC
Configuration: TX UPRIGHT - POWER SET TO 25 USING TEST UTILITY
Sample Number: _____
Location: Lab 1 RBW: 100 kHz
Detector Type: Peak VBW: 100 kHz

Test Equipment Used

Antenna: 1304 Directional Coupler: _____
Pre-Amp: _____ Cable #1: 1484
Filter: _____ Cable #2: 1485
Receiver: 1464 Cable #3: _____
Attenuator #1: _____ Cable #4: _____
Attenuator #2: _____ Mixer: _____
Additional equipment used: _____
Measurement Uncertainty: +/-1.7 dB

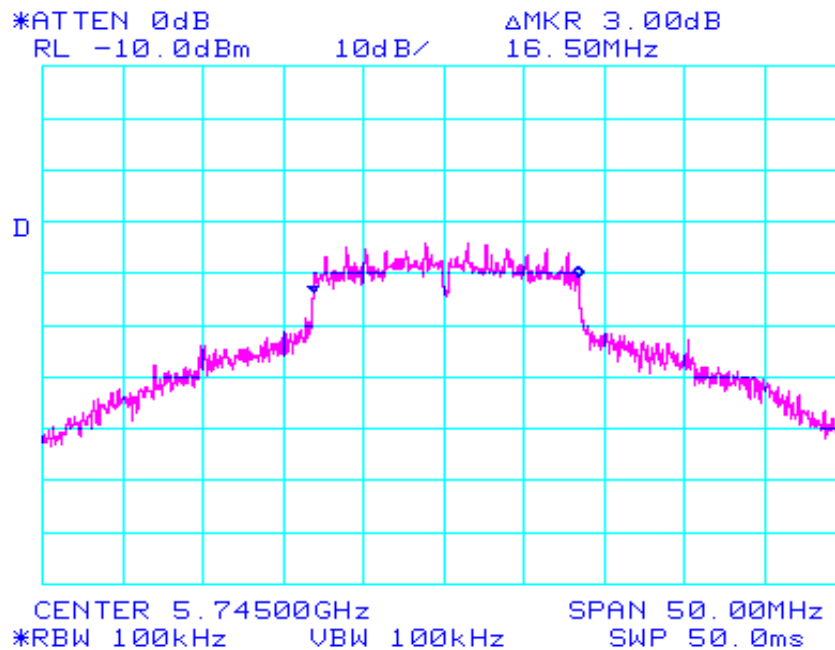

Notes: Lowest Channel
802.11a @ 54 Mbps


EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

802.11a

**Dallas Headquarters:**

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

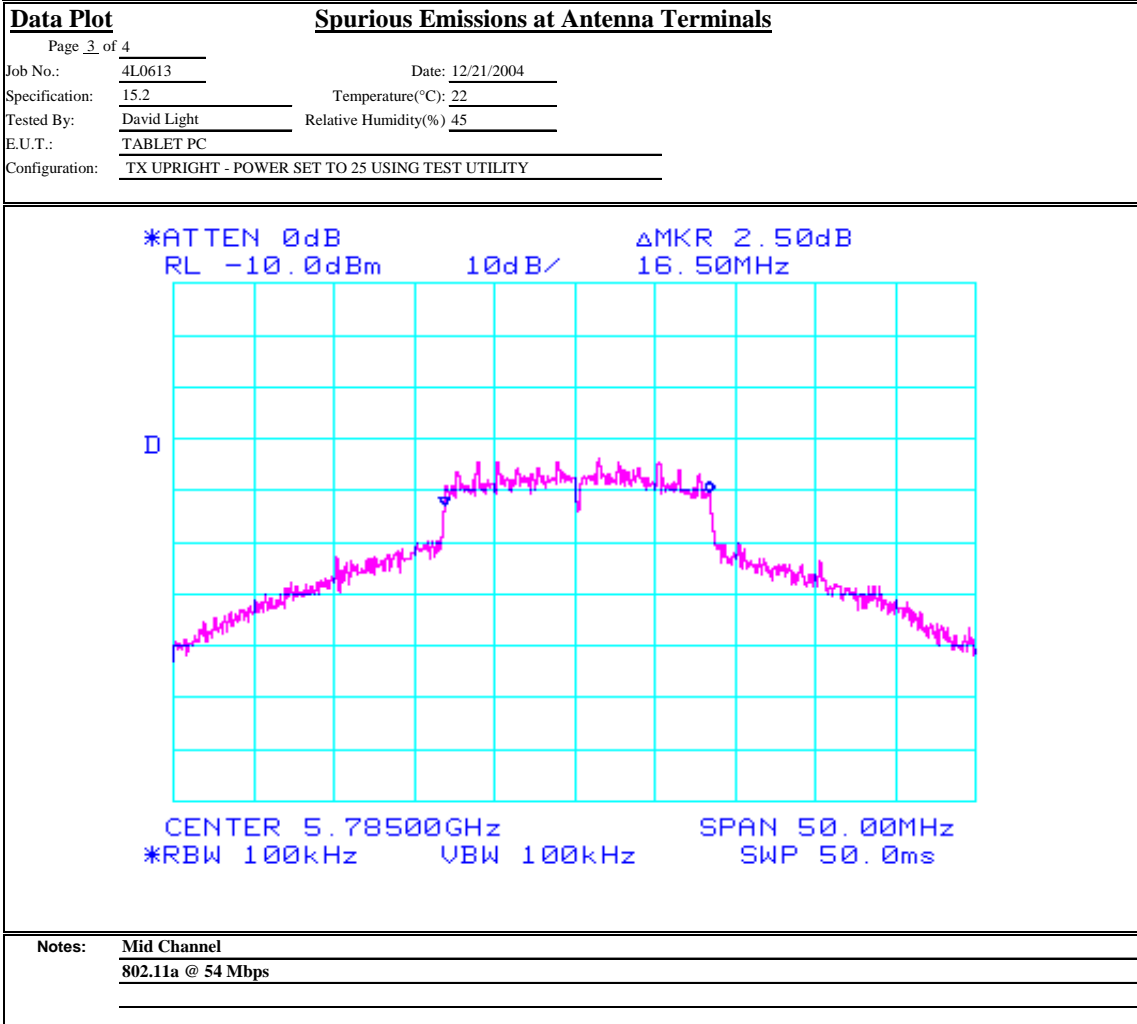

EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

802.11a

**Dallas Headquarters:**

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot

Page 4 of 4

Job No.: 4L0613

Date: 12/21/2004

Specification: 15.2


Temperature(°C): 22

Tested By: David Light

Relative Humidity(%) 45

E.U.T.: TABLET PC

Configuration: TX UPRIGHT - POWER SET TO 25 USING TEST UTILITY

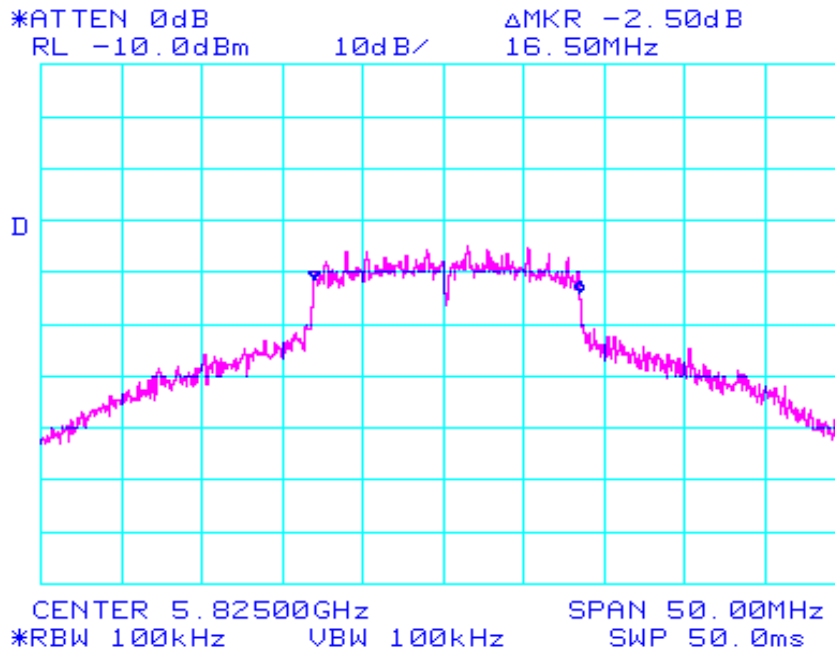Spurious Emissions at Antenna Terminals

Notes: Highest Channel
802.11a @ 54 Mbps

EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

Section 5. Maximum Peak Output Power

NAME OF TEST: Maximum Peak Output power	PARA. NO.: 15.247(b)(1)
TESTED BY: Abe Cox	DATE: 1/16/06

Test Results: Complies.

Measurement Data: Refer to Table Below

Frequency (MHz)	Mode	Peak Power (dBm)	Peak Power (mW)	Antenna Gain (dBi)
2412	802.11b	16.8	47.86	0
2437	802.11b	17.05	50.7	0
2462	802.11b	17.27	53.33	0
2412	802.11g	15.45	35.08	0
2437	802.11g	15.11	32.43	0
2462	802.11g	14.98	31.48	0
5745	802.11a	13.63	23.07	1
5785	802.11a	13.57	22.75	1
5825	802.11a	13.27	21.23	1

The measurement was repeated at +/- 15% of nominal supply voltage with no variation noted in rf power output.

EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

Section 6. RF Exposure

NAME OF TEST: RF Exposure	PARA. NO.: 15.247(b)(4)
TESTED BY:	DATE:

Test Results: [Please refer to SAR report for body SAR results.](#)

Measurement Data:

EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

Section 7 Spurious Emissions at Antenna Terminals

NAME OF TEST: Spurious Emissions at Antenna Terminals	PARA. NO.: 15.247 (c)
TESTED BY: David Light	DATE: 1/5/05

Test Results: Complies.

Measurement Data: See attached plots.

The spectrum was thoroughly searched from 30 MHz to 40 GHz in all modes on three channels. There were no emissions detected within 20 dB of the specification limit of -20 dBc in any 100 kHz bandwidth. Plots are presented to demonstrate compliance at the band edges.

Test Equipment: 1464-1626-1470-988-989


EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

Test Data – Spurious Emissions at Antenna Terminals

802.11a

**Dallas Headquarters:**

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

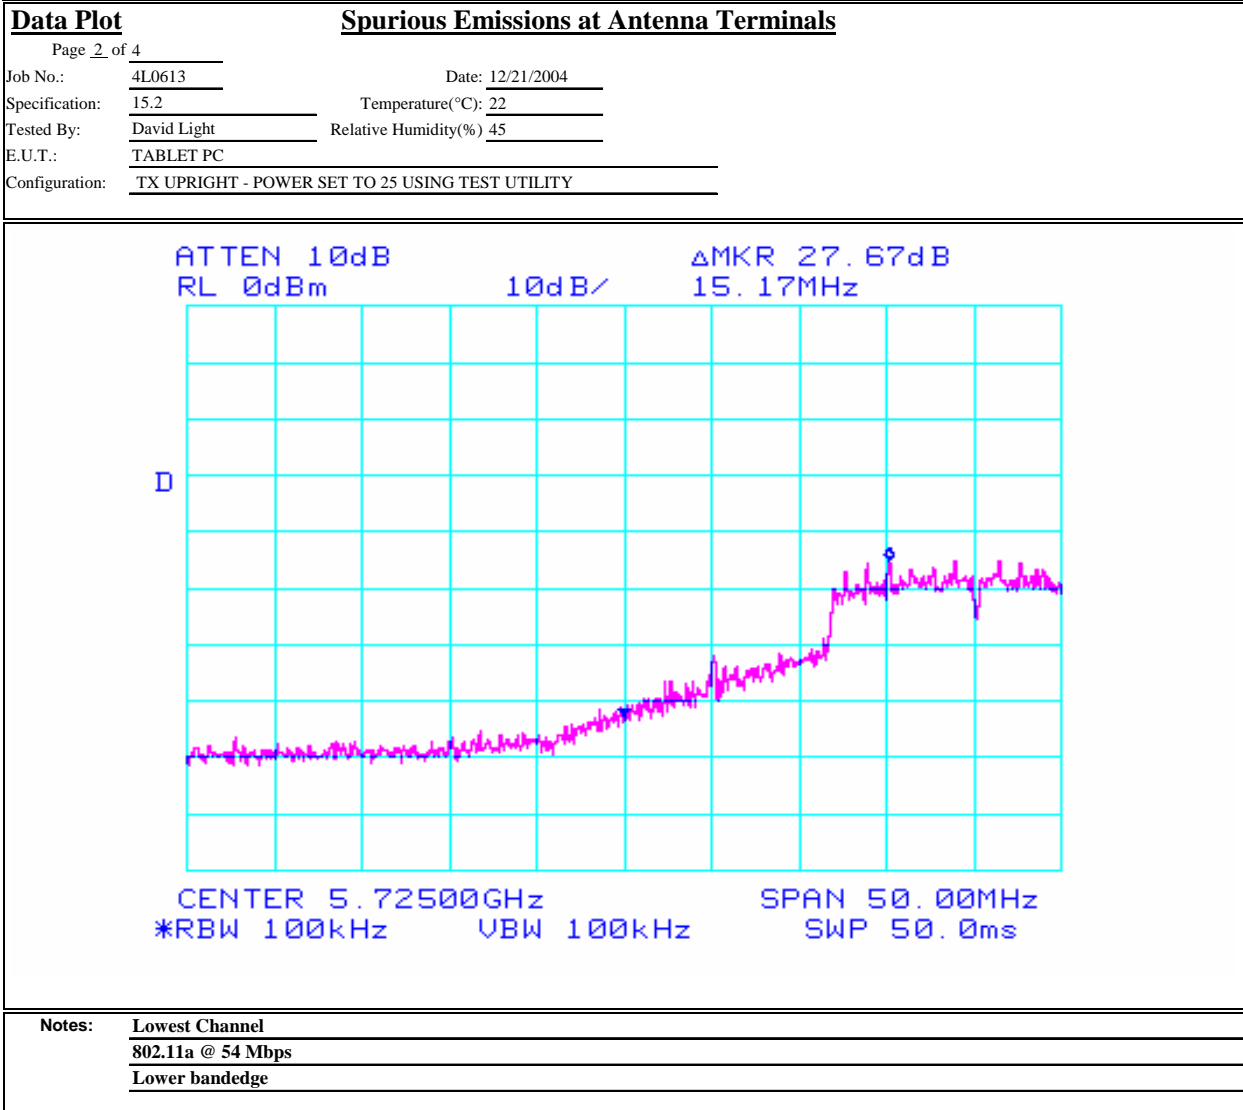Nemko Dallas, Inc.

EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

Test Data – Spurious Emissions at Antenna Terminals


802.11a

**Dallas Headquarters:**

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.**Data Plot****Spurious Emissions at Antenna Terminals**

Page 5 of 4
Job No.: 4L0613 Date: 12/21/2004
Specification: 15.2 Temperature(°C): 22
Tested By: David Light Relative Humidity(%) 45
E.U.T.: TABLET PC
Configuration: TX UPRIGHT - POWER SET TO 25 USING TEST UTILITY

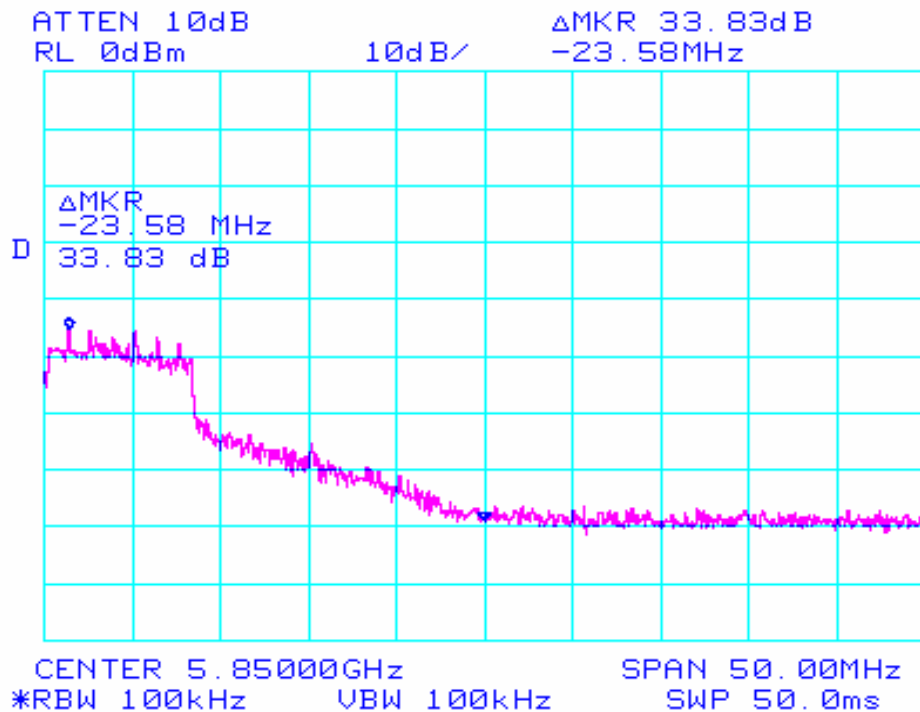

Notes: Highest Channel
Upper bandedge

EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

Test Data – Spurious Emissions at Antenna Terminals

802.11b

**Dallas Headquarters:**

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.**Data Plot**

Page 4 of 4

Job No.: 4L0613

Date: 12/21/2004

Specification: 15.2


Temperature(°C): 22

Tested By: David Light

Relative Humidity(%) 45

E.U.T.: TABLET PC

Configuration: TX UPRIGHT - TX POWER SET TO 25 IN TEST UTILITY

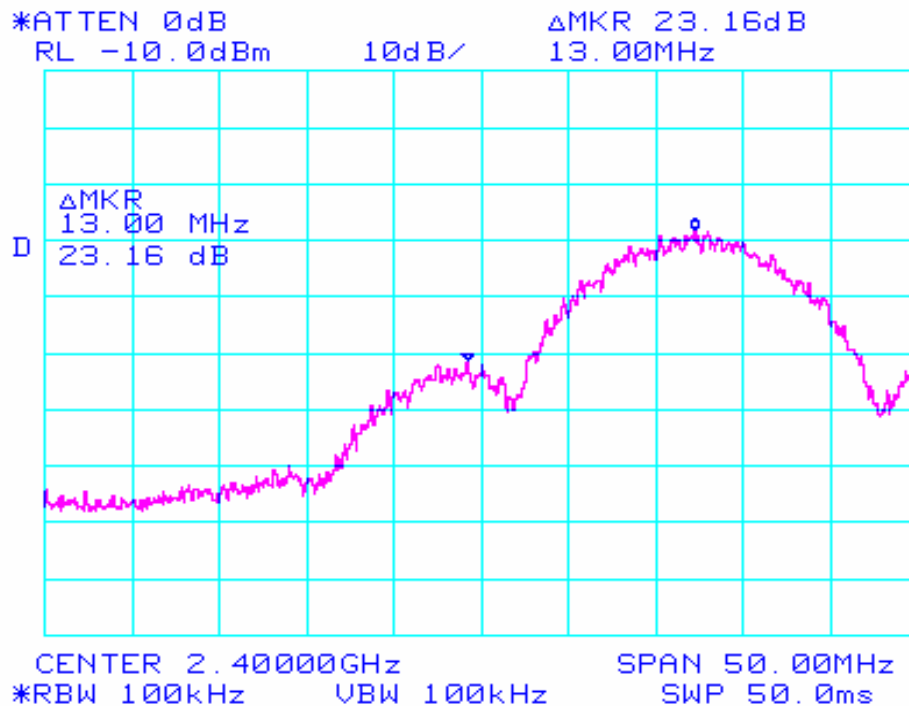Occupied Bandwidth

Notes: Lower bandedge
Channel 1
802.11b @ 11 Mbps

EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

Test Data – Spurious Emissions at Antenna Terminals

802.11g

**Dallas Headquarters:**

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.**Data Plot**

Page 4 of 4

Job No.: 4L0613

Date: 12/21/2004

Specification: 15.2


Temperature(°C): 22

Tested By: David Light

Relative Humidity(%) 45

E.U.T.: TABLET PC

Configuration: TX W/TX UTILITY SET TO 25 POWER

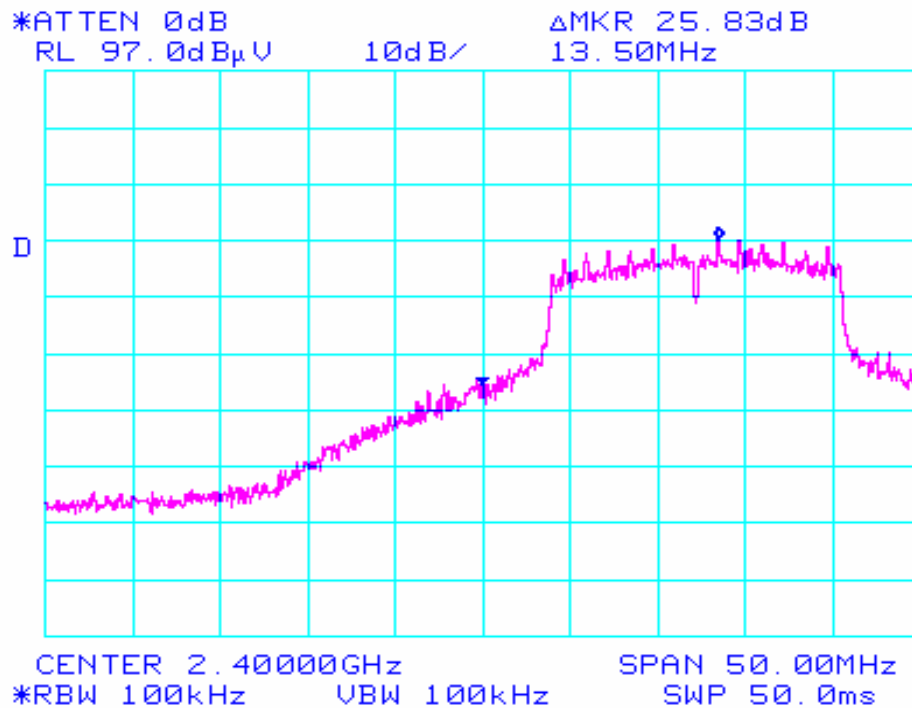Occupied Bandwidth

Notes: Lower bandedge
Channel 1
802.11g @ 54 Mbps

EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

Section 8. Radiated Emissions

NAME OF TEST: Radiated Emissions	PARA. NO.: 15.247 (c)
TESTED BY: David Light	DATE: 1/29/04

Test Results: Complies.

Measurement Data: See attached table.

EQUIPMENT: LE 1600 Series, Model T004

TEST REPORT NO.: 4L0613RUS1Rev3

Radiated Emissions – 802.11a



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
 Lewisville, TX 75057
 Tel: (972) 436-9600
 Fax: (972) 436-2667

Radiated Emissions

Page 1 of 1

Job No.: 4L0613 Date: 12/28/2004
 Specification: 15.247/15.205 Temperature(°C): 20
 Tested By: David Light Relative Humidity(%) 50
 E.U.T.: TABLET PC
 Configuration: Upright on long edge - Continuous transmit @ 54 Mbps - 802.11a
 Sample Number: 1
 Location: AC 3 RBW: 1 MHz
 Detector Type: Peak Peak VBW: 1 MHz
 Avg VBW 10 Hz

Test Equipment Used

Antenna: 1304 Directional Coupler: #N/A
 Pre-Amp: 1016 Cable #1: 1484
 Filter: 1650 Cable #2: 1485
 Receiver: 1464 Cable #3: #N/A
 Attenuator #1: #N/A Cable #4: #N/A
 Attenuator #2: #N/A Mixer: #N/A
 Additional test equipment: 988-983-991-992
 Measurement Uncertainty: +/- 3.6 dB

Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Detector / Polarity
								Tx 5825 MHz
11650	47.0	39.0	7.2	35.4	57.8	74	54	Peak/Horizontal
11650	36.0	39.0	7.2	35.4	46.8	74	54	Avg/Horizontal
11650	47.0	39.0	7.2	35.4	57.8	74	54	Peak/Vertical
11650	35.6	39.0	7.2	35.4	46.4	74	54	Avg/Vertical
								Tx 5785 MHz
11570	45.0	39.0	7.2	35.4	55.8	74	54	Peak/Horizontal
11570	36.5	39.0	7.2	35.4	47.3	74	54	Avg/Horizontal
11570	45.0	39.0	7.2	35.4	55.8	74	54	Peak/Vertical
11570	34.2	39.0	7.2	35.4	45.0	74	54	Avg/Vertical
								Tx 5745 MHz
11490	45.0	39.0	7.2	35.4	55.8	74	54	Peak/Horizontal
11490	34.6	39.0	7.2	35.4	45.4	74	54	Avg/Horizontal
11490	45.0	39.0	7.2	35.4	55.8	74	54	Peak/Vertical
11490	34.6	39.0	7.2	35.4	45.4	74	54	Avg/Vertical
Notes: Scanned all emissions from 30 MHz to 40 GHz								
No emissions were detected above the noise floor								

EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

Radiated Emissions – 802.11b



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Radiated EmissionsPage 1 of 1

Job No.: 4L0050 Date: 12/28/2004
Specification: 15.247/15.205 Temperature(°C): 20
Tested By: David Light Relative Humidity(%) 50
E.U.T.: TABLET PC w/802.11b
Configuration: Upright on long edge - Continuous transmit @ 11 Mbps Tx utility set at 25
Sample Number: 1
Location: AC 3 RBW: 1 MHz
Detector Type: Peak Peak VBW: 1 MHz
Avg VBW 10 Hz

Test Equipment Used

Antenna: 1304 Directional Coupler: #N/A
Pre-Amp: 1016 Cable #1: 1484
Filter: 1650 Cable #2: 1485
Receiver: 1464 Cable #3: #N/A
Attenuator #1: #N/A Cable #4: #N/A
Attenuator #2: #N/A Mixer: #N/A
Additional test equipment: 988-983-991-992
Measurement Uncertainty: +/- 3.6 dB

Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Detector / Polarity
								Tx 2462 MHz
2483.5	41.0	28.2	3.1	0.0	72.3	74	54	Peak/Horizontal
2483.5	22.3	28.2	3.1	0.0	53.6	74	54	Average/Horizontal
2483.5	38.0	28.2	3.1	0.0	69.3	74	54	Peak/Vertical
2483.5	22.0	28.2	3.1	0.0	53.3	74	54	Average/Vertical
Notes:	The device was tested on 3 channels.							
	No emissions were detected above the noise floor. Bandedge data provided.							

EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

Radiated Emissions – 802.11g



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Radiated EmissionsPage 1 of 1

Job No.: 4L0613 Date: 12/28/2004
Specification: 15.247/15.205 Temperature(°C): 20
Tested By: David Light Relative Humidity(%) 50
E.U.T.: TABLET PC w/802.11g
Configuration: Upright on long edge - Continuous transmit @ 54 Mbps Tx utility set at 25
Sample Number: 1
Location: AC 3 RBW: 1 MHz
Detector Type: Peak Peak VBW: 1 MHz
Avg VBW: 10 Hz

Test Equipment Used

Antenna: 1304 Directional Coupler: #N/A
Pre-Amp: 1016 Cable #1: 1484
Filter: 1650 Cable #2: 1485
Receiver: 1464 Cable #3: #N/A
Attenuator #1: #N/A Cable #4: #N/A
Attenuator #2: #N/A Mixer: #N/A
Additional test equipment: 988-983-991-992
Measurement Uncertainty: +/- 3.6 dB

Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Detector / Polarity
								Tx 2462 MHz
2483.5	34.5	28.2	3.1	0.0	65.8	74	54	Peak/Horizontal
2483.5	22.6	28.2	3.1	0.0	53.9	74	54	Average/Horizontal
2483.5	33.0	28.2	3.1	0.0	64.3	74	54	Peak/Vertical
2483.5	22.4	28.2	3.1	0.0	53.7	74	54	Average/Vertical
Notes: The device was tested on 3 channels.								
No emissions were detected above noise floor. Band edge data provided								

Radiated Photographs



EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

Section 9. Peak Power Spectral Density

NAME OF TEST: Peak Power Spectral Density	PARA. NO.: 15.247(d)
TESTED BY: David Light	DATE: 1/4/05

Test Results: Complies.

Measurement Data: See attached data..

EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

Peak Power Spectral Density

802.11a



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot

Page 1 of 3

Peak Power Spectral Density


Complete X

Preliminary: _____

Job No.: 4L0613 Date: 1/4/2005
Specification: 15.247(e) Temperature(°C): 20
Tested By: David Light Relative Humidity(%): 60
E.U.T.: Tablet PC
Configuration: Upright on long edge-Tx @ 54 Mbps-802.11a
Sample Number: 1
Location: Lab 1 RBW: 3 kHz
Detector Type: Peak VBW: 3 kHz

Test Equipment Used

Antenna: _____ Directional Coupler: _____
Pre-Amp: _____ Cable #1: 1626
Filter: _____ Cable #2: _____
Receiver: 1464 Cable #3: _____
Attenuator #1: 1470 Cable #4: _____
Attenuator #2: _____ Mixer: _____
Additional equipment used: _____
Measurement Uncertainty: +/-1.7 dB

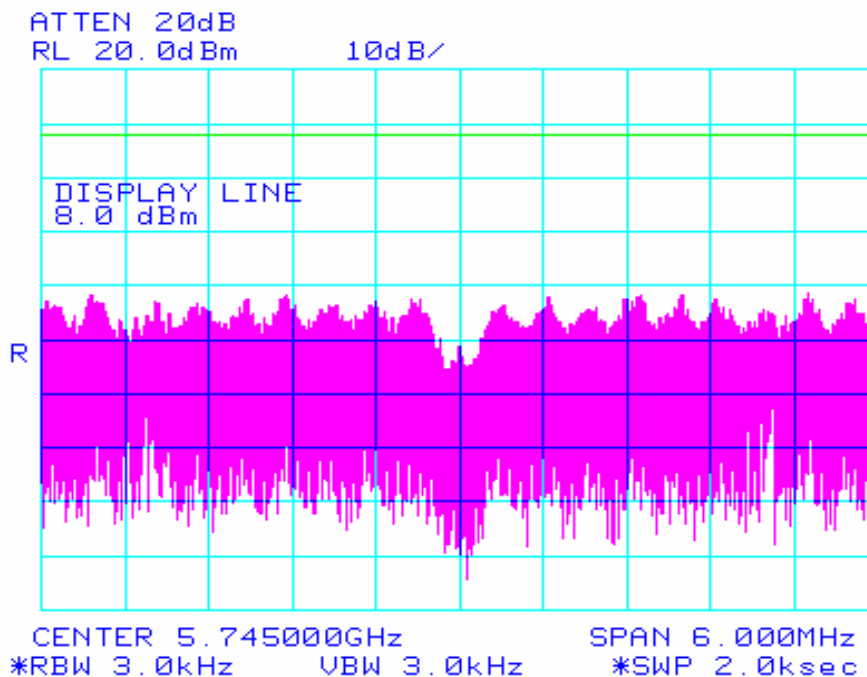

Notes: Lowest Channel
802.11a @ 54 Mbps

EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

Peak Power Spectral Density

802.11a


**Dallas Headquarters:**

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.**Data Plot****Peak Power Spectral Density**

Page 2 of 3

Job No.: 4L0613 Date: 1/4/2005
Specification: 15.247(e) Temperature(°C): 20
Tested By: David Light Relative Humidity(%) 60
E.U.T.: Tablet PC
Configuration: Upright on long edge-Tx @ 54 Mbps-802.11a

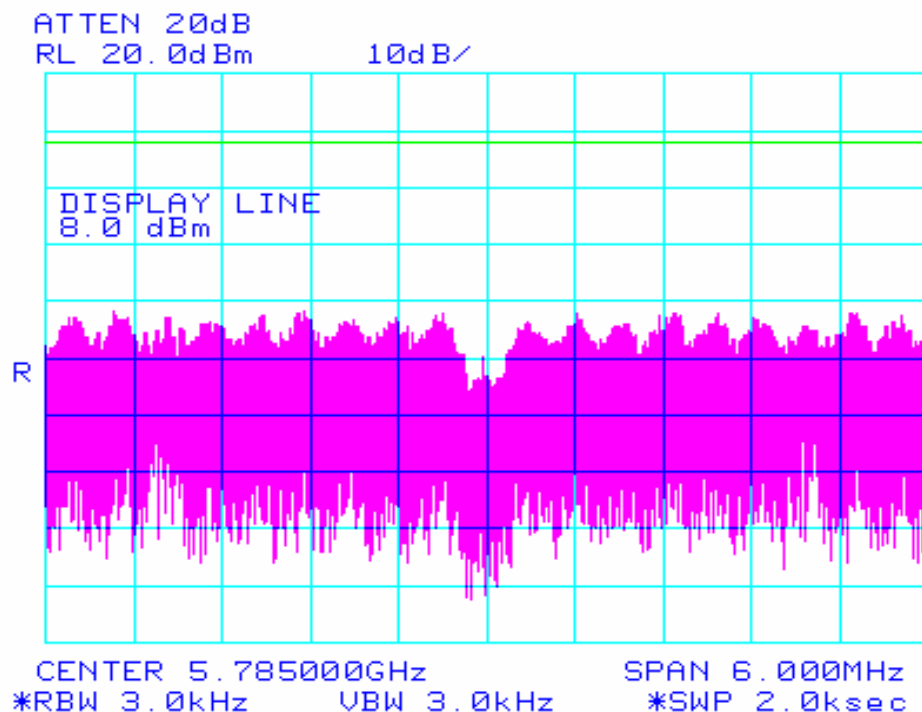

Notes: Mid Channel
802.11a @ 54 Mbps

EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

Peak Power Spectral Density

802.11a

**Dallas Headquarters:**

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.**Data Plot**

Page 3 of 3

Job No.: 4L0613

Date: 1/4/2005

Specification: 15.247(e)


Temperature(°C): 20

Tested By: David Light

Relative Humidity(%) 60

E.U.T.: Tablet PC

Configuration: Upright on long edge-Tx @ 54 Mbps-802.11a

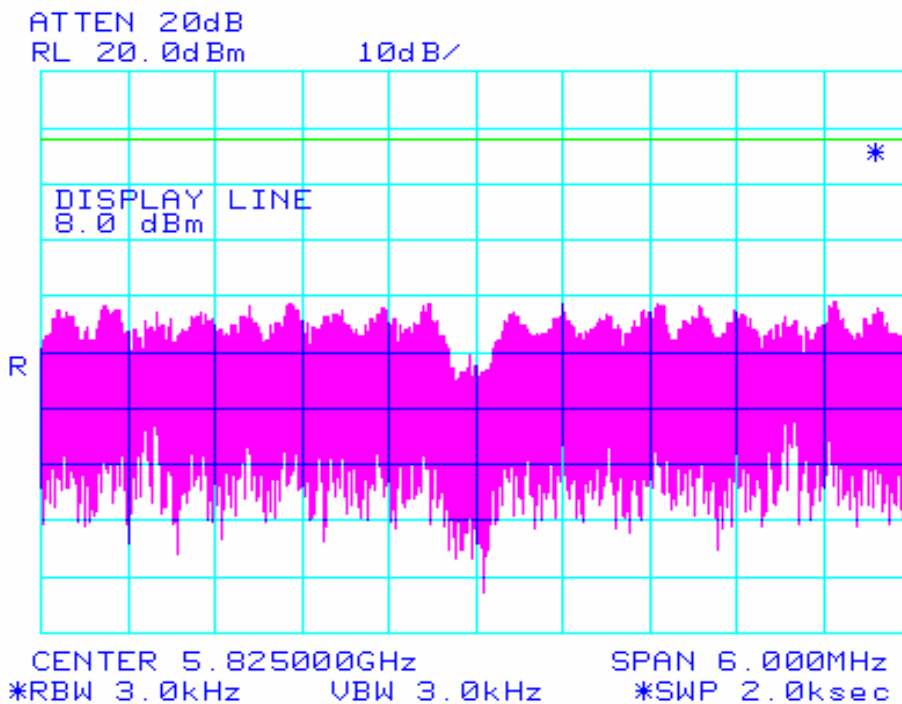Peak Power Spectral Density

Notes: Highest Channel
802.11a @ 54 Mbps

EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

Peak Power Spectral Density

802.11b



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot

Page 1 of 3


Peak Power Spectral Density

Job No.: 4L0613 Date: 1/4/2005
Specification: 15.247(e) Temperature(°C): 20
Tested By: David Light Relative Humidity(%): 60
E.U.T.: Tablet PC
Configuration: Upright on long edge-Tx 11 Mbps-802.11b
Sample Number: 1
Location: Lab 1 RBW: 3 kHz
Detector Type: Peak VBW: 3 kHz

Complete X
Preliminary: _____

Test Equipment Used

Antenna: _____ Directional Coupler: _____
Pre-Amp: _____ Cable #1: 1626
Filter: _____ Cable #2: _____
Receiver: 1464 Cable #3: _____
Attenuator #1: 1470 Cable #4: _____
Attenuator #2: _____ Mixer: _____
Additional equipment used: _____
Measurement Uncertainty: +/-1.7 dB

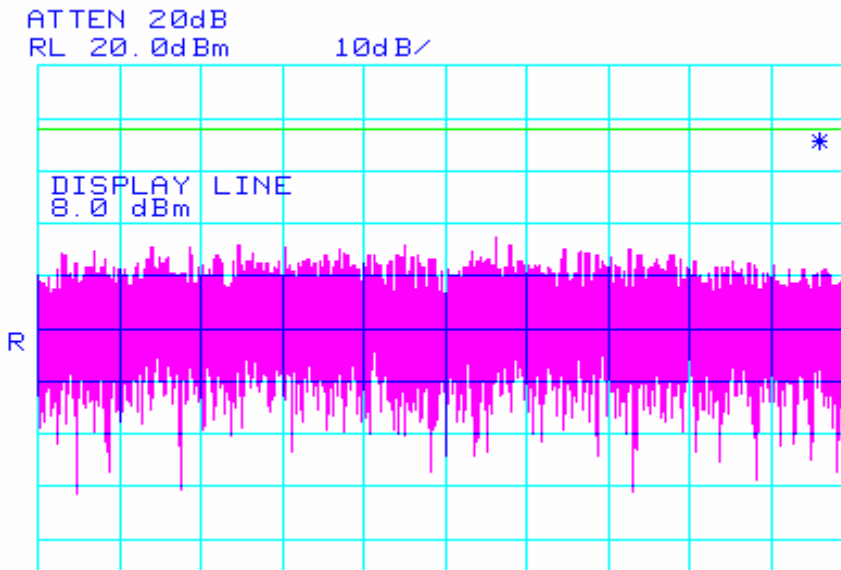

Notes: Channel 1
802.11b @ 11 Mbps

EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

Peak Power Spectral Density

802.11b


**Dallas Headquarters:**

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.**Data Plot****Peak Power Spectral Density**

Page 2 of 3

Job No.: 4L0613 Date: 1/4/2005
Specification: 15.247(e) Temperature(°C): 20
Tested By: David Light Relative Humidity(%) 60
E.U.T.: Tablet PC
Configuration: Upright on long edge-Tx 11 Mbps-802.11b

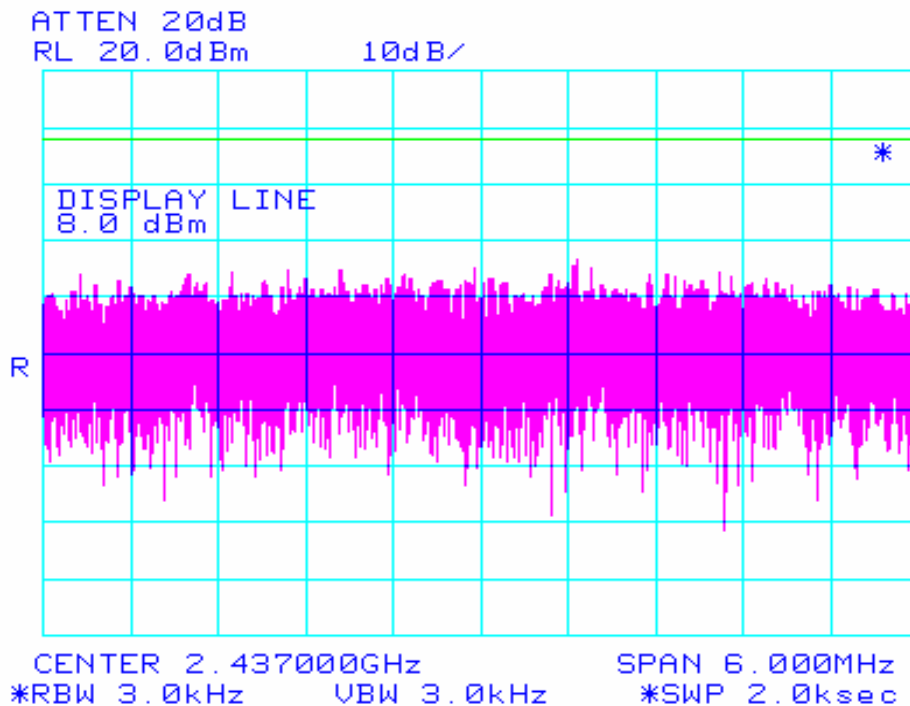

Notes: Channel 6
802.11b @ 11 Mbps

EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

Peak Power Spectral Density

802.11b

**Dallas Headquarters:**


802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot**Peak Power Spectral Density**

Page 3 of 3

Job No.: 4L0613 Date: 1/4/2005
Specification: 15.247(e) Temperature(°C): 20
Tested By: David Light Relative Humidity(%) 60
E.U.T.: Tablet PC
Configuration: Upright on long edge-Tx 11 Mbps-802.11b

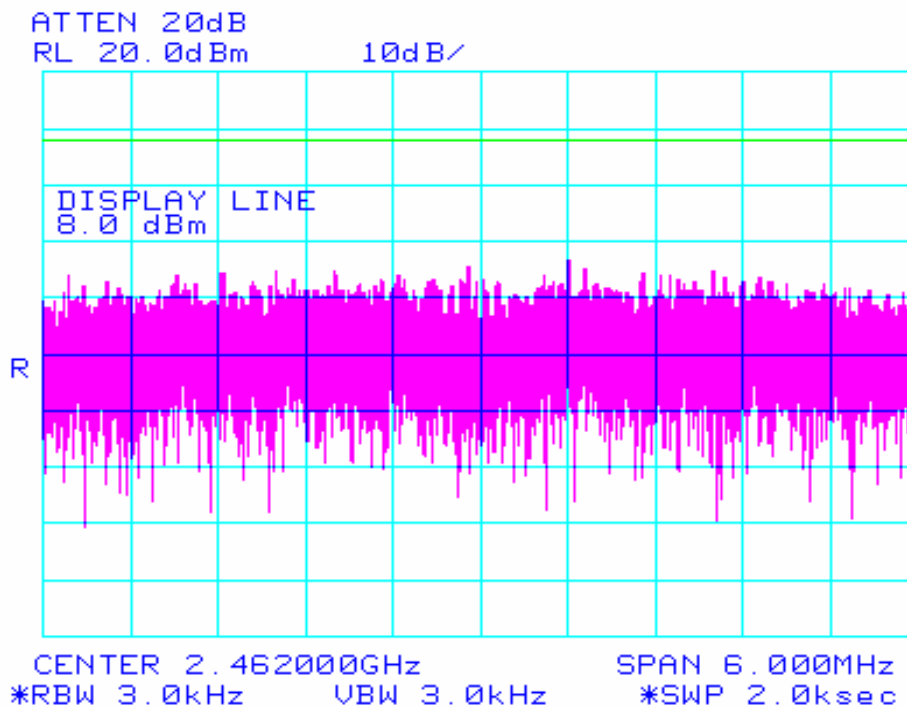

Notes: Channel 11
802.11b @ 11 Mbps

EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

Peak Power Spectral Density

802.11g



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot

Page 1 of 3


Peak Power Spectral Density

Job No.: 4L0613 Date: 1/4/2005
Specification: 15.247(e) Temperature(°C): 20
Tested By: David Light Relative Humidity(%) 60
E.U.T.: Tablet PC
Configuration: Upright on long edge-Tx 54 Mbps-802.11g
Sample Number: 1
Location: Lab 1 RBW: 3 kHz
Detector Type: Peak VBW: 3 kHz

Complete X
Preliminary: _____

Test Equipment Used

Antenna: _____ Directional Coupler: _____
Pre-Amp: _____ Cable #1: 1626
Filter: _____ Cable #2: _____
Receiver: 1464 Cable #3: _____
Attenuator #1: 1470 Cable #4: _____
Attenuator #2: _____ Mixer: _____
Additional equipment used: _____
Measurement Uncertainty: +/-1.7 dB

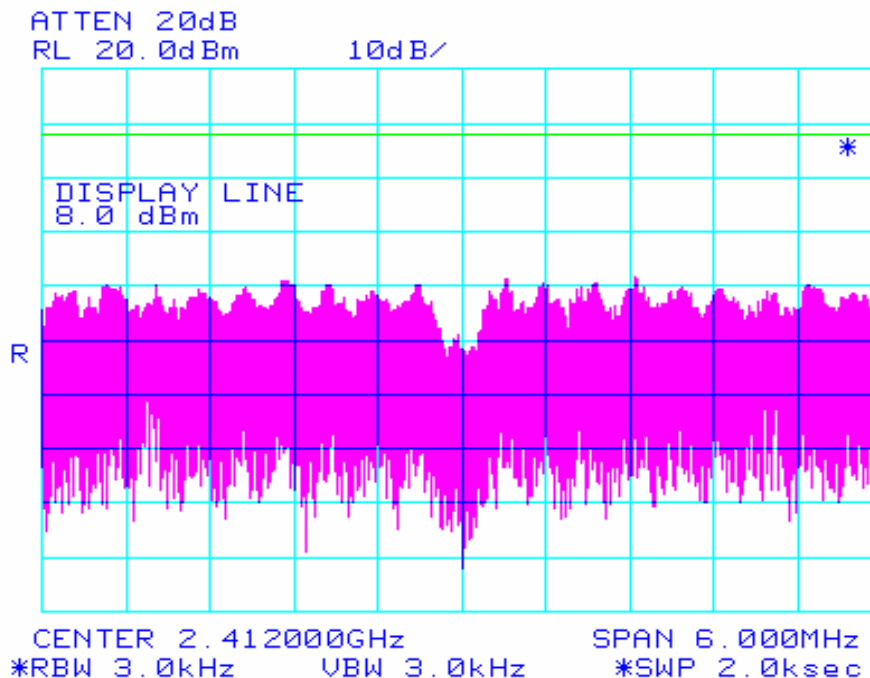

Notes: Channel 1
802.11g @ 54 Mbps

EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

Peak Power Spectral Density

802.11g


**Dallas Headquarters:**

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.**Data Plot** **Peak Power Spectral Density**

Page 2 of 3

Job No.: 4L0613 Date: 1/4/2005
Specification: 15.247(e) Temperature(°C): 20
Tested By: David Light Relative Humidity(%) 60
E.U.T.: Tablet PC
Configuration: Upright on long edge-Tx 54 Mbps-802.11g

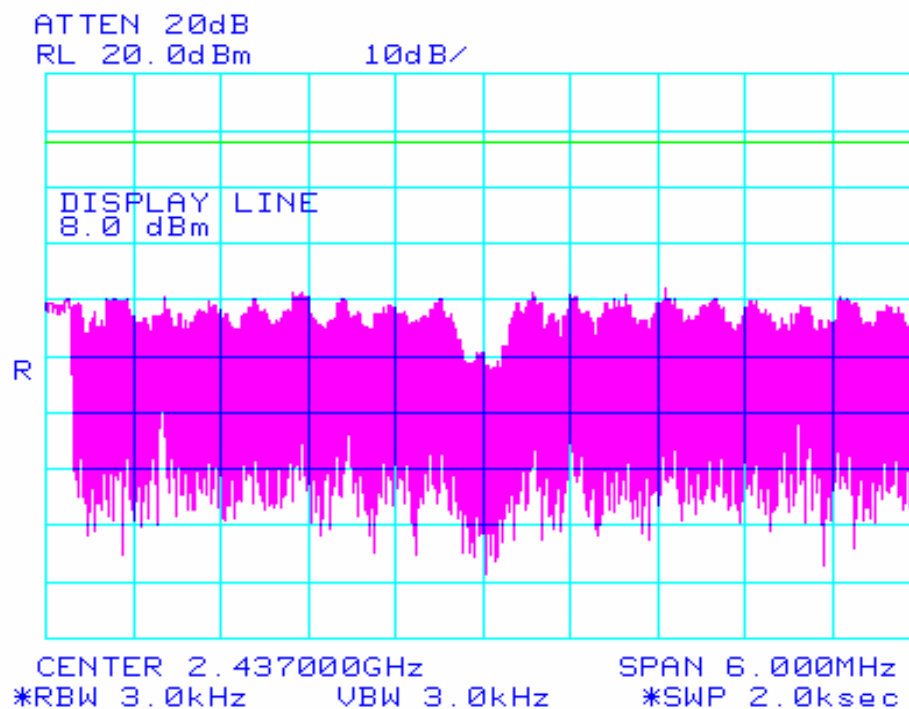

Notes: Channel 6
802.11g @ 54 Mbps

EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

Peak Power Spectral Density

802.11g

**Dallas Headquarters:**

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.**Data Plot**

Page 3 of 3

Job No.: 4L0613

Date: 1/4/2005

Specification: 15.247(e)


Temperature(°C): 20

Tested By: David Light

Relative Humidity(%) 60

E.U.T.: Tablet PC

Configuration: Upright on long edge-Tx 54 Mbps-802.11g

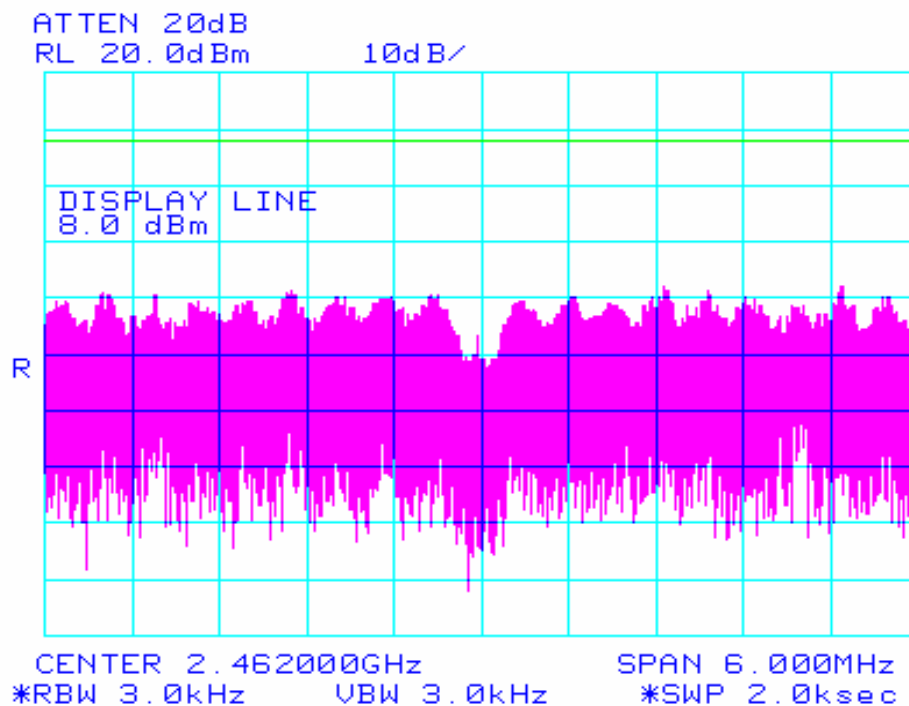Peak Power Spectral Density

Notes: Channel 11
802.11g @ 54 Mbps

EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

Section 10. Receiver Spurious Emissions

NAME OF TEST: Receiver Spurious Emissions	PARA. NO.: 7.3
TESTED BY: David Light	DATE: 1/4/05

Test Results: Complies.

Measurement Data: See attached data..

EQUIPMENT: LE 1600 Series, Model T004

TEST REPORT NO.: 4L0613RUS1Rev3

Test Data – Receiver Spurious Emissions

Radiated Emissions Data											
Complete	<u> X </u>		Job # : <u>4I0613E</u>		Test # : <u>REHE-01</u>						
Preliminary	<u> </u>		Page <u> 1 </u>		of <u> 2 </u>						
Client Name : <u>Motion Computing Inc.</u>											
EUT Name : <u>LE1600 Series</u>											
EUT Model # : <u>T004</u>											
EUT Part # : <u>EDX20</u>											
EUT Serial # : <u>56</u>											
EUT Config. : <u>transmitting max power and DVD operating</u>											
Specification : <u>FCC CLASS B</u>											
Reference : <u>CISPR 22 B</u>											
Rod. Ant. #:	<u> </u>		Temp. (deg. C) : <u> 12 </u>		Date : <u>12/21/04</u>						
Bicon Ant. #:	<u> 760 </u>		Humidity (%) : <u> 20 </u>		Time : <u>9:00</u>						
Log Ant. #:	<u> 759 </u>		EUT Voltage : <u> 120 </u>		Staff : <u>Kevin Rose</u>						
Bilog Ant. #:	<u> </u>		EUT Frequency : <u> 60 </u>		Photo ID: <u>4I0613E REHE-01</u>						
Dipole Ant. #:	<u> </u>		Phase: <u> </u>		Peak Bandwidth: <u>100 KHz</u>						
Cable#:	<u> 1983 </u>		Location: <u> </u>		Video Bandwidth: <u>100 KHz</u>						
Preamp#:	<u> 791 </u>		Distance: <u> 10 </u>								
Limiter#:	<u> na </u>										
Atten #:	<u> na </u>										
Detector#:	<u> </u>										
Meas. Freq. (MHz)	Ant. Pol. (H/V)	Atten. (dB)	Meter Reading (dBuV)	Antenna Factor (dB)	Path Loss (dB)	RF Gain (dB)	Corrected Reading (dBuV/m)	Spec. limit (dBuV/m)	CR/SL Diff. (dB)	Pass Fail Unc.	QP readings Comment
338.42	V		20.9	15.3	4.4	24.4	16.2	37.0	-20.8	Pass	
344.46	V		21.3	15.3	4.4	24.4	16.6	37.0	-20.4	Pass	
423	V		18.7	15.7	5.2	24.4	15.2	37.0	-21.8	Pass	
435.1	V		19.6	15.8	5.2	24.4	16.2	37.0	-20.8	Pass	
507.6	V		19.2	16.8	5.9	24.5	17.4	37.0	-19.6	Pass	
537.8	V		19.5	17.8	5.9	24.5	18.7	37.0	-18.3	Pass	
815.97	V		22.1	21.5	8.0	24.6	27.0	37.0	-10.0	Pass	
429.53	V		23.5	15.7	5.2	24.4	20.0	37.0	-17.0	Pass	
400.9	V		23.3	16.4	5.2	24.4	20.5	37.0	-16.5	Pass	
372.2	V		20.9	15.3	4.4	24.4	16.2	37.0	-20.8	Pass	
343.62	V		23.5	15.3	4.4	24.4	18.8	37.0	-18.2	Pass	
329.3	V		23	16.2	4.4	24.4	19.2	37.0	-17.8	Pass	
320.36	H		21.4	16.2	4.4	24.4	17.6	37.0	-19.4	Pass	
433.24	H		23.4	15.8	5.2	24.4	20.0	37.0	-17.0	Pass	
423	H		23	15.7	5.2	24.4	19.5	37.0	-17.5	Pass	
429.53	H		24	15.7	5.2	24.4	20.5	37.0	-16.5	Pass	
343.62	H		22	15.3	4.4	24.4	17.3	37.0	-19.7	Pass	
123.93	V		26.6	12.5	2.4	24.7	16.8	30.0	-13.2	Pass	
129.98			25	12.3	2.7	24.6	15.4	30.0	-14.6	Pass	
208.57			24	15.5	3.5	24.5	18.5	30.0	-11.5	Pass	
238.8			25.3	16.4	3.5	24.5	20.7	37.0	-16.3	Pass	

..\\EMCShare\\AUTOMATE\\DATASHTS\\RADEMEV Rev C.xls Document Control #EMC DS EM RAD HFE

Test Data – Receiver Spurious Emissions

Complete X
Preliminary _____

Job #: 410613E Test #: REHE-01
Page 2 of 2

Client Name :	Motion Computing Inc.
EUT Name :	LE1600 Series
EUT Model # :	T004
EUT Part # :	EDX20
EUT Serial # :	56
EUT Config. :	transmitting max power and DVD operating

Specification : FCC CLASS B Reference : CISPR 22 B

[illegible]

..\EMCShare\AUTOMATE\DATASHTS\RADEMEV Rev C.xls Document Control #EMC DS EM RAD HFE

Test setup Photos



EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

Section 10. Test Equipment List

Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date	Calibration Due
1464	Spectrum analyzer	Hewlett Packard 8563E	3551A04428	07/30/04	07/31/06
1484	Cable 2.0-18.0 Ghz	Storm PR90-010-072	N/A	08/26/04	08/26/05
1485	Cable 2.0-18.0 Ghz	Storm PR90-010-216	N/A	08/02/04	08/02/05
1016	Pre-Amp	HEWLETT PACKARD 8449A	2749A00159	11/12/04	11/12/05
759	ANTENNA, LOG PERIODIC	A.H. SYSTEMS SAS-200/510	556	07/23/04	07/23/05
760	Antenna biconical	Electro Metrics MFC-25	477	06/22/04	06/22/05
791	PREAMP, 25dB	ICC LNA25	398	11/12/04	11/12/05
1304	HORN ANTENNA	ELECTRO METRICS RGA-60	6151	09/22/03	09/22/05
988	HARMONIC MIXER	Hewlett Packard 11970A	2332A01929	CNR	N/A
989	HARMONIC MIXER	Hewlett Packard 11970U	2332A00116	CNR	N/A
1626	CABLE, 5 ft	MEGAPHASE 10311 1GVT4	N/A	CBU	N/A
1030	PEAK POWER SENSOR	HP 84811A	2539A03573	12/23/04	1/23/05
1029	PEAK POWER METER	HP 8900D	3303U0012	12/23/04	1/23/05
1470	10 db Attenuator DC 18 Ghz	MCL Inc. BW-S10W2 10db-2WDC	NONE	CBU	N/A
1650	WR90 Band Pass Filter	Nemko None	None	CBU	N/A
991	Horn antenna	EMCO 3160-10	9704-1049	CNR	N/A
992	Horn antenna	EMCO 3160-09	9705-1079	CNR	N/A

EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

ANNEX A - TEST DETAILS

EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

NAME OF TEST: Powerline Conducted Emissions

PARA. NO.: 15.207(a)

Minimum Standard: §15.207 Conducted limits.

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 mH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of Conducted Emission (MHz)	Limit (dBmV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current systems containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 mV within the frequency band 535-1705 kHz, as measured using a 50 mH/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits as provided in §15.205 and §§15.209, 15.221, 15.223, 15.225 or 15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provision for, the use of battery chargers which permit operating while charging, AC adaptors or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 15.247(a)(2)
---	--------------------------------

Minimum Standard: The minimum 6 dB bandwidth shall be at least 500 kHz

EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

NAME OF TEST: Maximum Peak Output Power	PARA. NO.: 15.247(b)(1)
---	-------------------------

Minimum Standard: The maximum peak output power shall not exceed 1 watt.

If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point to point operation may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceed 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operation may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Direct Measurement Method For Detachable Antennas:

If the antenna is detachable, a peak power meter is used to measure the power output with the transmitter operating into a 50 ohm load. The dBi gain of the antenna(s) employed shall be reported.

Substitution Antenna Method for Integral Antennas:

The peak field strength of the carrier is measured in a worst-case configuration with a RBW > 5 times the occupied bandwidth of the transmitted waveform. For cases where the RBW of the test instrument is not sufficient, the power is measured using a peak power meter instead of the spectrum analyzer.

The RBW of the spectrum analyzer shall be set to a value greater than the measured 6 dB occupied bandwidth of the E.U.T.

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

NAME OF TEST: Channel Separation	PARA. NO.: 15.247(a)(1)
----------------------------------	-------------------------

Minimum Standard:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

NAME OF TEST: Pseudorandom Hopping Algorithm	PARA. NO.: 15.247(a)(1)
--	-------------------------

Minimum Standard:

The system shall hop to channel frequencies that are selected from a pseudo-randomly ordered list of hopping frequencies. Each frequency must be used equally on average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their transmitters and shall shift frequencies in synchronization with the transmitted signals.

EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

NAME OF TEST: Time of Occupancy

PARA. NO.: 15.247(a)(1)(ii)

Minimum Standard:

Frequency Band (MHz)	20 dB Bandwidth	No. of Hopping Channels	Average Time of Occupancy
902 - 928	<250 kHz	50	=<0.4 sec. in 20 sec.
902 – 928	=>250 kHz	25	=<0.4 sec. in 10 sec.
2400 – 2483.5	-----	75	=<0.4 sec. in 30 sec.
5725 – 5850	-----	75	=<0.4 sec. in 30 sec.

Method Of Measurement:

The spectrum analyzer is set as follows:

RBW: 1 MHz

VBW: = RBW

Span: 0 Hz

LOG dB/div.: 10 dB

Sweep: Sufficient to see one hop time sequence.

Trigger: Video

The occupancy time of one hop is measured as above. The average time of occupancy is calculated over the appropriate period of time from above table (10, 20, or 30 seconds).

Avg. time of occupancy = (period from table/duration of one hop)/no. of channels multiplied by the duration of one hop.

For instance:

If a 2.4 GHz system has a measured hop duration time of 1 msec. and uses 75 channels, then the average time of occupancy would be:

(30 sec./1.001 sec.)/75 chan. = 400 x 1 msec. = 400 msec. or 0.4 sec. in 30 sec.

EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 15.247(a)(2)
----------------------------------	-------------------------

Minimum Standard:

Frequency Band (MHz)	Maximum 20 dB Bandwidth
902 - 928	500 kHz
2400 – 2483.5	1 MHz
5725 – 5850	1 MHz

Method Of Measurement:

The spectrum analyzer is set as follows:

RBW: At least 1% of span/div.

VBW: >RBW

Span: Sufficient to display 20 dB bandwidth

LOG dB/div.: 10 dB

Sweep: Auto

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

NAME OF TEST: RF Exposure	PARA. NO.: 15.247(b)(4)
---------------------------	-------------------------

Minimum Standard:

Systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines stipulated in 1.1307(b)(1) of CFR 47.

EQUIPMENT: LE 1600 Series, Model T004 TEST REPORT NO.: 4L0613RUS1Rev3

NAME OF TEST: Spurious Emissions(conducted) PARA. NO.: 15.247(c)

Minimum Standard: In any 100kHz bandwidth outside the frequency band in which the transmitter is operating, emissions shall be at least 20 dB below the fundamental emission or shall not exceed the following field strength limits. Emissions falling in the restricted bands of 15.205 shall not exceed the following field strength limits:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ @ 3m)	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

THE SPECTRUM IS SEARCHED TO THE 10th HARMONIC OF THE HIGHEST FREQUENCY GENERATED IN THE EUT.

Method Of Measurement:

30 MHz - 10th harmonic plot

RBW: 100 kHz

VBW: 300 kHz

Sweep: Auto

Display line: -20 dBc

Lower Band Edge

RBW: At least 1% of span/div.

VBW: >RBW

Span: As necessary to display any spurious at band edge.

Sweep: Auto

Center Frequency: 902 MHz, 2400 MHz, or 5725 MHz

Marker: Peak of fundamental emission

Marker Δ : Peak of highest spurious level below center frequency.

Upper Band Edge

RBW: At least 1% of span/div.

VBW: >RBW

Span: As necessary to display any spurious at band edge.

Sweep: Auto

Center Frequency: 928 MHz, 2483.5 MHz, or 5850 MHz

Marker: Peak of fundamental emission

Marker Δ : Peak of highest spurious level above center frequency.

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

EQUIPMENT: LE 1600 Series, Model T004 **TEST REPORT NO.:** 4L0613RUS1Rev3

NAME OF TEST: Radiated Spurious Emissions

PARA. NO.: 15.247(c)

Minimum Standard: In any 100kHz bandwidth outside the frequency band in which the transmitter is operating, emissions shall be at least 20 dB below the fundamental emission or shall not exceed the following field strength limits:

Emissions falling in the restricted bands of 15.205 shall not exceed the following field strength limits:

Frequency (MHz)	Field Strength (μV/m @ 3m)	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

THE SPECTRUM WAS SEARCHED TO THE 10th HARMONIC

15.205 Restricted Bands

MHz	MHz	MHz	GHz
0.09-0.11	16.42-16.423	399.9-410	4.5-5.25
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.125-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41	1718		

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

NAME OF TEST: Transmitter Power Density	PARA. NO.: 15.247(d)
---	----------------------

Minimum Standard: The transmitted power density averaged over any 1 second interval shall not be greater than +8 dBm in any 3 kHz bandwidth.

Method Of Measurement: The spectrum analyzer is set as follows:

RBW: 3 kHz

VBW: >3 kHz

Span: => measured 6 dB bandwidth

Sweep: Span(kHz)/3 (i.e. for a span of 1.5 MHz the sweep rate is $1500/3 = 500$ sec.

LOG dB/div.: 2 dB

Note: For devices with spectrum line spacing ≤ 3 kHz, the RBW of the analyzer is reduced until the spectral lines are resolved. The measurement data is normalized to 3 kHz by summing the power of all the individual spectral lines within a 3 kHz band in linear power units.

For Devices With Integral Antenna:

For devices with non-detachable antennas, the received field strength is peaked and the spectrum analyzer is set as above. The peak emission level is then measured and converted to a field strength by adding the appropriate antenna factor and cable loss. This field strength is then converted to an equivalent isotropic radiated power using the same method as described for Peak Power output.


Number of channels tested:

Tuning Range	Number Of Channels Tested	Channel Location In Band
1 MHz or Less	1	Middle
1 to 10 MHz	2	Top And Bottom
More Than 10 MHz	3	Top, Middle, Bottom


EQUIPMENT: LE 1600 Series, Model T004 *TEST REPORT NO.:* 4L0613RUS1Rev3

ANNEX B - TEST DIAGRAMS


Test Site For Radiated Emissions

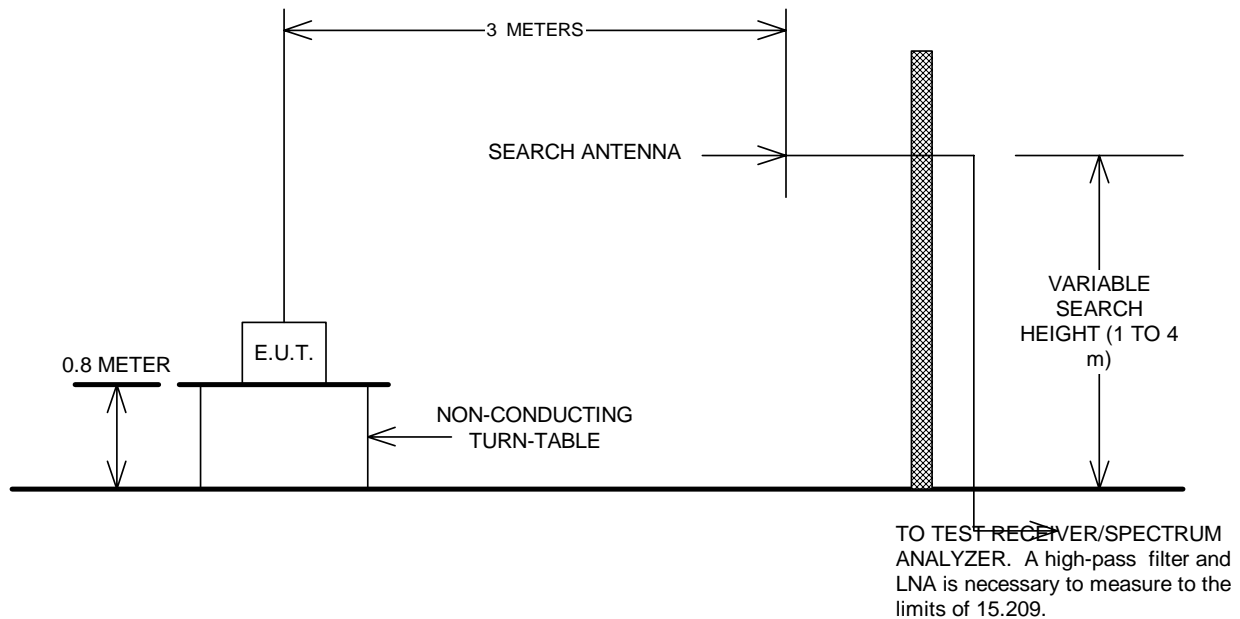

Conducted Emissions

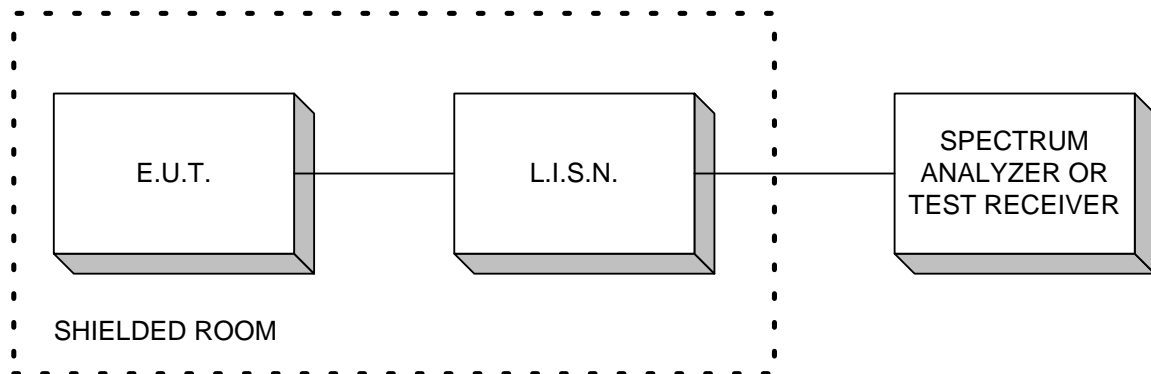

Peak Power At Antenna Terminals

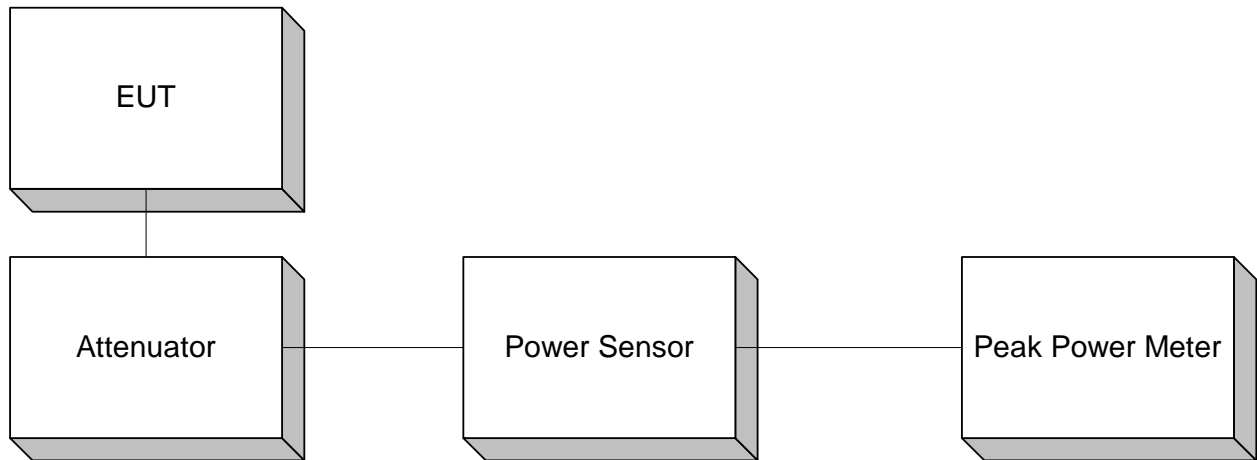

**Minimum 6 dB Bandwidth
Peak Power Spectral Density
Spurious Emissions (conducted)**

