



# TEST REPORT

**REPORT NUMBER: I21W00017-Rev1**

**ON**

**Type of Equipment:**

Tracker

**Type of Designation:**

PA32

**Manufacturer:**

Micron Electronics LLC.

**FCC ID:**

ZKQ-CM911B

**ACCORDING TO**

IEEE C95.1-2005

IEEE 1528-2013

**Chongqing Academy of Information and Communication Technology**

***Month date, year***

*Aug, 13, 2021*

***Signature***



**Xiang Luoyong**

***Director***

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of Chongqing Academy of Information and Communications Technology.



**Report No.:I21W00017-Rev1**

**Revision Version**

Report Number	Revision	Date	Memo
I21W00017	00	2021-08-04	Initial creation of test report
I21W00017-Rev1	01	2021-08-13	First change of test report

**Chongqing Academy of Information and Communication Technology**

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336  
Tel: 0086-23-88069965 FAX:0086-23-88608777

## CONTENTS

1. TEST LABORATORY.....	5
1.1. TESTING LOCATION.....	5
1.2. TESTING ENVIRONMENT.....	5
1.3. PROJECT DATA.....	5
1.4. SIGNATURE.....	5
2. STATEMENT OF COMPLIANCE.....	6
3. CLIENT INFORMATION.....	7
3.1. APPLICANT INFORMATION.....	7
3.2. MANUFACTURER INFORMATION.....	7
4. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	8
4.1. ABOUT EUT.....	8
4.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	10
4.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	10
5. REFERENCE DOCUMENTS.....	11
5.1. APPLICABLE LIMIT REGULATIONS.....	11
5.2. APPLICABLE MEASUREMENT STANDARDS.....	11
6. SPECIFIC ABSORPTION RATE (SAR).....	12
6.1. INTRODUCTION.....	12
6.2. SAR DEFINITION.....	12
7. SAR MEASUREMENT SETUP.....	13
7.1. MEASUREMENT SET-UP.....	13
7.2. DASY5 E-FIELD PROBE SYSTEM.....	14
7.3. E-FIELD PROBE CALIBRATION.....	15
7.4. OTHER TEST EQUIPMENT.....	15
8. POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM.....	19

<b>8.1. GENERIC DEVICE.....</b>	<b>19</b>
<b>8.2. DUT SETUP PHOTOS.....</b>	<b>20</b>
<b>9. TISSUE SIMULATING LIQUIDS.....</b>	<b>24</b>
<b>9.1. EQUIVALENT TISSUES.....</b>	<b>24</b>
<b>9.2. DIELECTRIC PERFORMANCE.....</b>	<b>25</b>
<b>10. SYSTEM VALIDATION.....</b>	<b>28</b>
<b>10.1. SYSTEM VALIDATION.....</b>	<b>28</b>
<b>10.2. SYSTEM SETUP.....</b>	<b>28</b>
<b>11. MEASUREMENT PROCEDURES.....</b>	<b>30</b>
<b>11.1. TESTS TO BE PERFORMED.....</b>	<b>30</b>
<b>11.2. MEASUREMENT PROCEDURE.....</b>	<b>31</b>
<b>11.3. SAR MEASUREMENT FOR CAT-M1.....</b>	<b>32</b>
<b>11.4. POWER DRIFT.....</b>	<b>32</b>
<b>12. AREA SCAN BASED 1-G SAR.....</b>	<b>33</b>
<b>12.1. REQUIREMENT OF KDB.....</b>	<b>33</b>
<b>12.2. FAST SAR ALGORITHMS.....</b>	<b>33</b>
<b>13. CONDUCTED OUTPUT POWER.....</b>	<b>34</b>
<b>13.1. MANUFACTURING TOLERANCE.....</b>	<b>34</b>
<b>13.2. GSM MEASUREMENT RESULT.....</b>	<b>37</b>
<b>13.3. CATM MEASUREMENT RESULT.....</b>	<b>38</b>
<b>13.4. WIFI MEASUREMENT RESULT.....</b>	<b>45</b>
<b>13.5. BT MEASUREMENT RESULT.....</b>	<b>47</b>
<b>14. SIMULTANEOUS TX SAR CONSIDERATIONS.....</b>	<b>48</b>
<b>14.1. STANDALONE SAR TEST EXCLUSION CONSIDERATIONS.....</b>	<b>48</b>
<b>14.2. SIMULTANEOUS TRANSMISSION SAR.....</b>	<b>48</b>
<b>15. SAR TEST RESULT.....</b>	<b>49</b>
<b>15.1. SAR RESULTS.....</b>	<b>49</b>

<b>15.2. SAR MEASUREMENT VARIABILITY .....</b>	<b>53</b>
<b>16. MEASUREMENT UNCERTAINTY .....</b>	<b>54</b>
<b>17. MAIN TEST INSTRUMENTS.....</b>	<b>56</b>
<b>ANNEX A. GRAPH RESULTS.....</b>	<b>57</b>
<b>ANNEX B. SYSTEM VALIDATION RESULTS.....</b>	<b>66</b>
<b>ANNEX C. CALIBRATION REPORT.....</b>	<b>73</b>

## 1. Test Laboratory

### 1.1. Testing Location

Company Name:	Chongqing Academy of Information and Communications Technology
Address:	No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China
Postal Code:	401336
Telephone:	0086-23-88069965
Fax:	0086-23-88608777


### 1.2. Testing Environment

Normal Temperature:	15-35℃
Relative Humidity:	20-75%
Ambient noise & Reflection:	< 0.012 W/kg

### 1.3. Project Data

Testing Start Date:	2021-06-24
Testing End Date:	2021-07-23

### 1.4. Signature



2021-08-13

**Fu Bohao**  
(Prepared this test report)

Date



2021-08-13

**Wang Lili**  
(Reviewed this test report)

Date



2021-08-13

**Xiang Luoyong**  
Director of the laboratory  
(Approved this test report)

Date

## Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336  
Tel: 0086-23-88069965 FAX: 0086-23-88608777

## 2. Statement of Compliance

The maximum results of Specific Absorption Rate(SAR) found during testing for **PA32** are as follows  
( with expanded uncertainty 22.4%)

**Table 2.1: Max. SAR Reported (1g)**

Band	Position	SAR 1g (W/Kg)
GPRS 1900	Body(5mm)	1.274
CATM Band 2	Body(5mm)	0.218
CATM Band 4	Body(5mm)	0.212
CATM Band 5	Body(5mm)	0.093
CATM Band 12	Body(5mm)	0.087
CATM Band 13	Body(5mm)	0.068
WIFI 2.4G	Body(5mm)	0.444
WIFI 5G UNII-1	Body(5mm)	0.245
WIFI 5G UNII-3	Body(5mm)	0.487

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the IEEE C95.1–2005.

**Table 2.2: Max. SUM SAR Reported (1g)**

Transmission SAR(W/Kg)											
Test Position		GSM 1900	CATM Band2	CATM Band4	CATM Band5	CATM Band12	CATM Band13	WIFI 2.4G	WIFI 5G UNII-1	WIFI 5G UNII-3	SUM
Body 5mm	Phantom Side	0.652	0.119	0.106	0.079	0.051	0.044	0.003	0.245	0.487	1.139
	Ground Side	1.274	0.218	0.212	0.093	0.087	0.068	0.004	0.068	0.266	1.540
	Left Side	0.350	0.067	0.026	0.064	0.039	0.033	0.002	0.175	0.291	0.641
	Right Side	0.588	0.098	0.092	0.037	0.021	0.016	0.001	0.008	0.008	0.596
	Bottom Side	0.246	0.045	0.037	0.054	0.050	0.026	0.000	0.003	0.431	0.677
	Top Side	0.077	0.014	0.007	0.004	0.003	0.002	0.444	0.201	0.034	0.521

The maximum SAR value is at the Ground Side obtained at the case of (Table 2.2), and the values are: **1.274 W/Kg (1g)**.

From (Table 2.2) we can get the combination of maximum simultaneous transmission signal is at the Ground Side:The value of GPRS and WIFI 5G UNII-3 is **1.540 W/Kg(1g)**.

### 3. Client Information

#### 3.1. Applicant Information

Company Name:	Micron Electronics LLC.
Address /Post:	1001 Yamato Road, Suite 400, Boca Raton, FL 33431, USA
Telephone:	18885383489
Fax:	--
Email:	pcheng@micron-electronics.com
Contact Person:	Ping Cheng

#### 3.2. Manufacturer Information

Company Name:	Micron Electronics LLC.
Address /Post:	1001 Yamato Road, Suite 400, Boca Raton, FL 33431, USA
Telephone:	18885383489
Fax:	--
Email:	pcheng@micron-electronics.com
Contact Person:	Ping Cheng



## 4. Equipment Under Test (EUT) and Ancillary Equipment (AE)

### 4.1. About EUT

Description:	Tracker
Model name:	PA32
GSM Frequency Band	PCS1900
CAT-M1 Frequency Band	Band 2/4/5/12/13
WIFI 2.4G	802.11b/g/n
Bluetooth	BLE
WIFI 5.1/5.8G	802.11 a/n
Test device Production information:	Production unit
Voice mode	Not Support
GPRS Class Mode	B
GPRS Multislot Class	12
EGPRS Multislot Class	12
Device type:	Portable device
Antenna type:	Inner antenna
Accessories/Body-worn configurations:	N/A
Hotspot mode:	N/A
Dimensions:	6.9cm×3.5cm×1.1cm



Picture 4-1: EUT Photo

**4.2. Internal Identification of EUT used during the test**

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
S4	866884045658283	A108_V2_P CB	PA32V02.01 B06.I01	2021-06-18

\*EUT ID: is used to identify the test sample in the lab internally.

**4.3. Internal Identification of AE used during the test**

AE ID*	Description	Model	SN	Manufacturer
B1	N/A	N/A	N/A	N/A

\*AE ID: is used to identify the test sample in the lab internally.

## 5. Reference Documents

### 5.1. Applicable Limit Regulations

**IEEE C95.1–2005:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue , 4.0 W/Kg as averaged over any 10g tissue for portable devices.

### 5.2. Applicable Measurement Standards

**IEEE 1528–2013:** Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

**KDB447498 D01: General RF Exposure Guidance v06:** Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

**KDB941225 D06 Hotspot Mode SAR v02r01:** SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities.

**KDB248227 D01 802.11 Wi-Fi SAR v02r02:** SAR Evaluation Procedures for IEEE 802.11 Wi-Fi Transmitters.

**KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04:** SAR Measurement Requirements for 100 MHz to 6 GHz.

**KDB865664 D02 RF Exposure Reporting v01r02:** RF Exposure Compliance Reporting and Documentation Considerations.

NOTE: KDB is not in A2LA Scope List.

## 6. Specific Absorption Rate (SAR)

### 6.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 6.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (  $dW$  ) absorbed by (dissipated in) an incremental mass (  $dm$  ) contained in a volume element (  $dv$  ) of a given density (  $\rho$  ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left( \frac{\delta T}{\delta t} \right)$$

Where:  $C$  is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$


Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of tissue and  $E$  is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 7. SAR MEASUREMENT SETUP

### 7.1. Measurement Set-up

The DASY5 system for performing compliance tests is illustrated above graphically. This system consists of the following items:

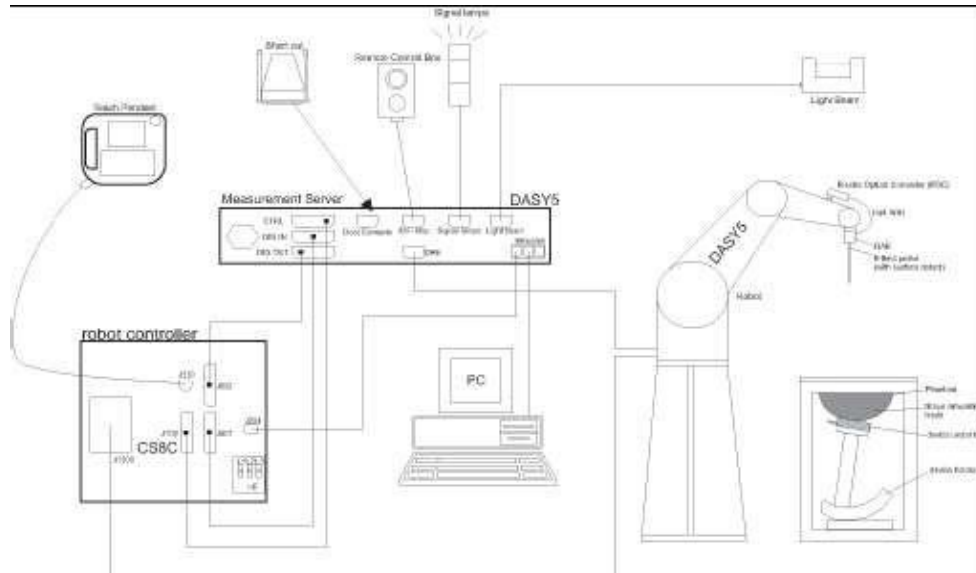

### Picture 7-1 SAR Lab Test Measurement Set-up

- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and theDASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.



## 7.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY5 software reads the reflection during a software approach and looks for the maximum using 2<sup>nd</sup> order curve fitting. The approach is stopped at reaching the maximum.

### Probe Specifications:

**Model:** EX3DV4  
**Frequency** 650MHz — 6GHz  
**Calibration:** In head and body simulating tissue at  
Frequencies from 650 up to 4900MHz  
**Linearity:**  $\pm 0.2$  dB

**Dynamic Range:** 10 mW/kg — 100W/kg

**Probe Length:** 330 mm

### Probe Tip

**Length:** 20 mm

**Body Diameter:** 12 mm

**Tip Diameter:** 2.5mm

**Tip-Center:** 1 mm

**Application:** SAR Dosimetry Testing

Compliance tests of mobile phones

Dosimetry in strong gradient fields



Picture 7-2 Near-field Probe



Picture 7-3 E-field Probe

### 7.3. E-field Probe Calibration

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm<sup>2</sup>) using an RF Signal generator, TEM cell, and RF Power Meter.

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equate to 1 mW/cm<sup>2</sup>.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

$\Delta t$  = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

$\Delta T$  = Temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

$\sigma$  = Simulated tissue conductivity,

$\rho$  = Tissue density (kg/m<sup>3</sup>).

### 7.4. Other Test Equipment

#### 7.4.1. Data Acquisition Electronics(DAE)

The data acquisition electronics consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Picture7-4: DAE**

#### 7.4.2. Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX90) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchron motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

**Picture7-5: DASY 5**

### 7.4.3. Measurement Server

The Measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128MB), RAM (DASY5: 128MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.



**Picture 7-6: Server for DASY 5**

### 7.4.4. Device Holder for Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of  $\pm 0.5\text{mm}$  would produce a SAR uncertainty of  $\pm 20\%$ . Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP).

Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters:

relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The


amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM and ELI phantoms.



Picture7-7: Device Holder

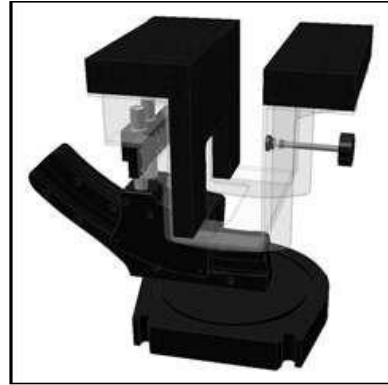

Picture 7-8: Laptop Extension Kit

#### 7.4.5. Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a table. The shape of the shell is based on data from an anatomical study designed to

Represent the 90<sup>th</sup> percentile of the population. The phantom enables the dissymmetric evaluation of SAR for both left and right handed handset usage, as well as body-worn usage using the flat phantom region. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. The shell phantom has a 2mm shell thickness (except the ear region where shell thickness increases to 6 mm).

Shell Thickness:  $2 \pm 0.2$  mm

Filling Volume: Approx. 25 liters

Dimensions: 810 x 1000 x 500 mm (H x L x W)

Available: Special



Picture 7-9: SAM Twin Phantom


## 8. Position of the wireless device in relation to the phantom

### 8.1. Generic device

For a device that can not be categorized as any of the other specific device types, it shall be considered to be a generic device;


The SAR evaluation shall be performed for all surfaces of the DUT that are accessible during intended use, as indicated in Picture 8-1. The separation distance in testing shall correspond to the intended use distance as specified in the user instructions provided by the manufacturer. If the intended use is not specified, all surfaces of the DUT shall be tested directly against the flat phantom.

The surface of the generic device (or the surface of the carry accessory holding the DUT) pointing towards the flat phantom shall be parallel to the surface of the phantom.

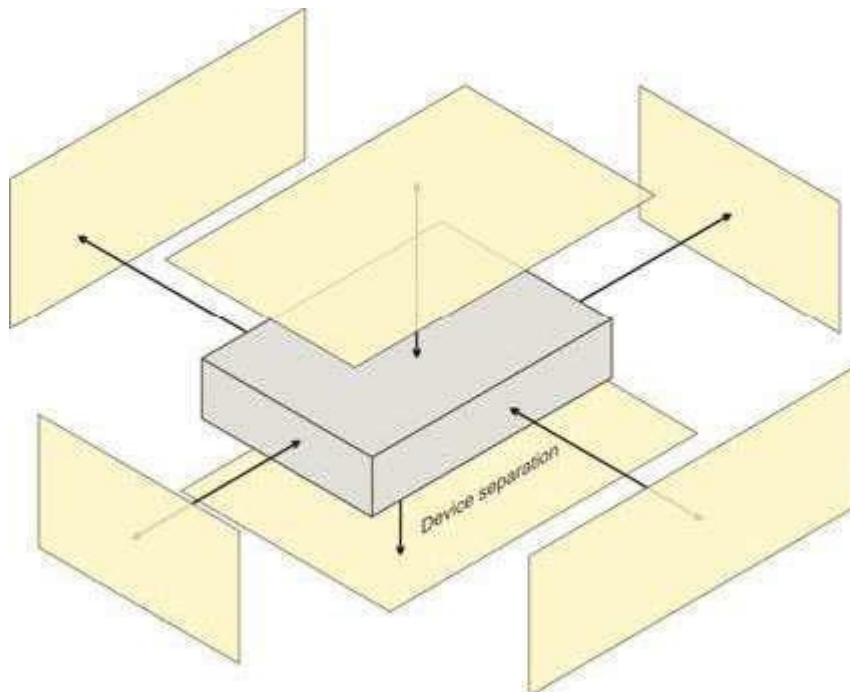

Picture 8-1 Test positions for Generic device


## 8.2. DUT Setup Photos

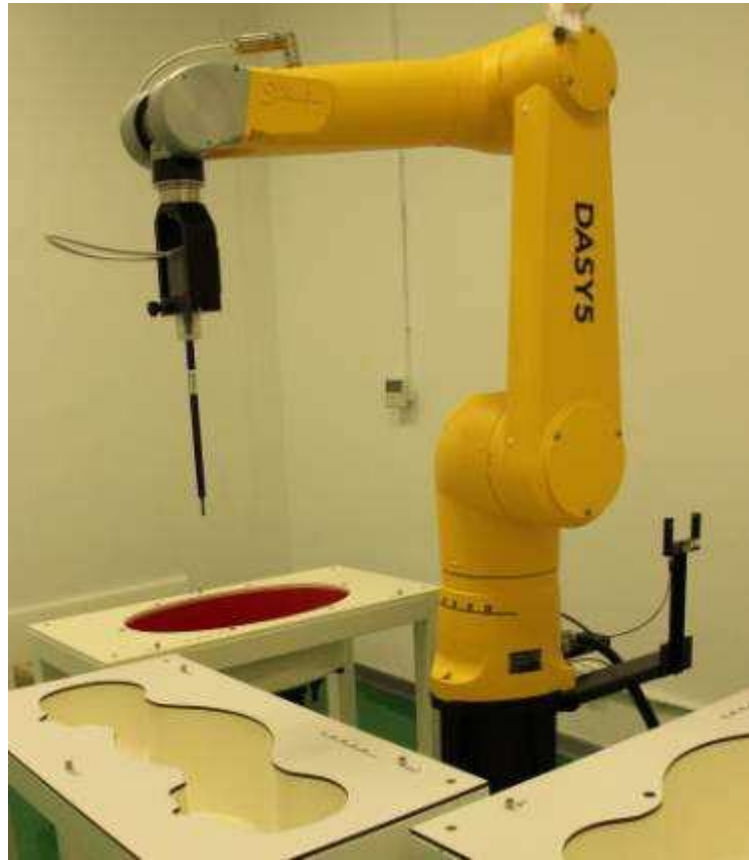


Picture 8-2: Specific Absorption Rate Test Layout

**Test positions for body:**

According to the antenna position, the Body SAR is tested at the following 6 test positions all with same distance between the EUT and the phantom bottom:

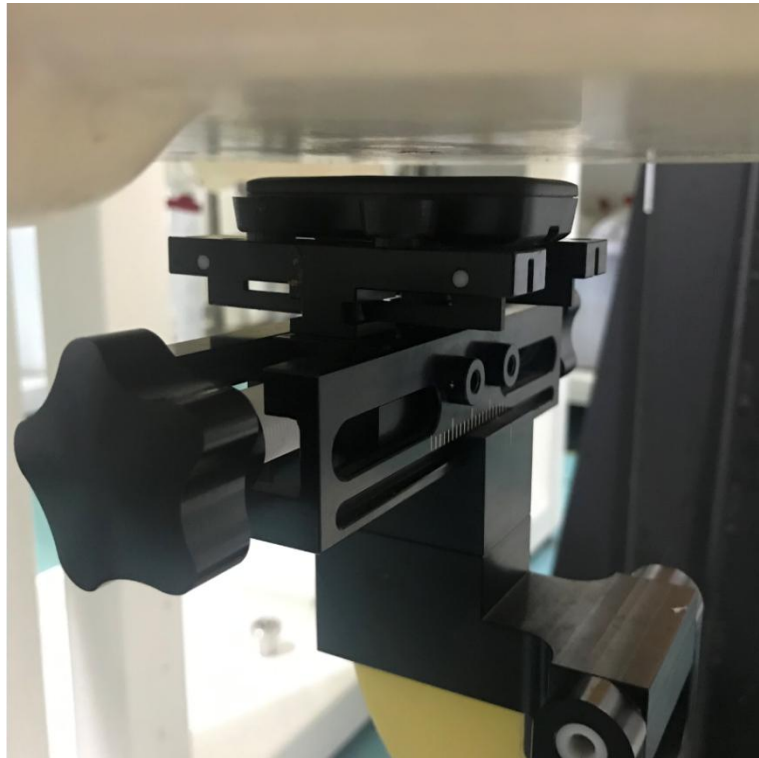

**Picture 8-3: Toward Phantom (5mm)**

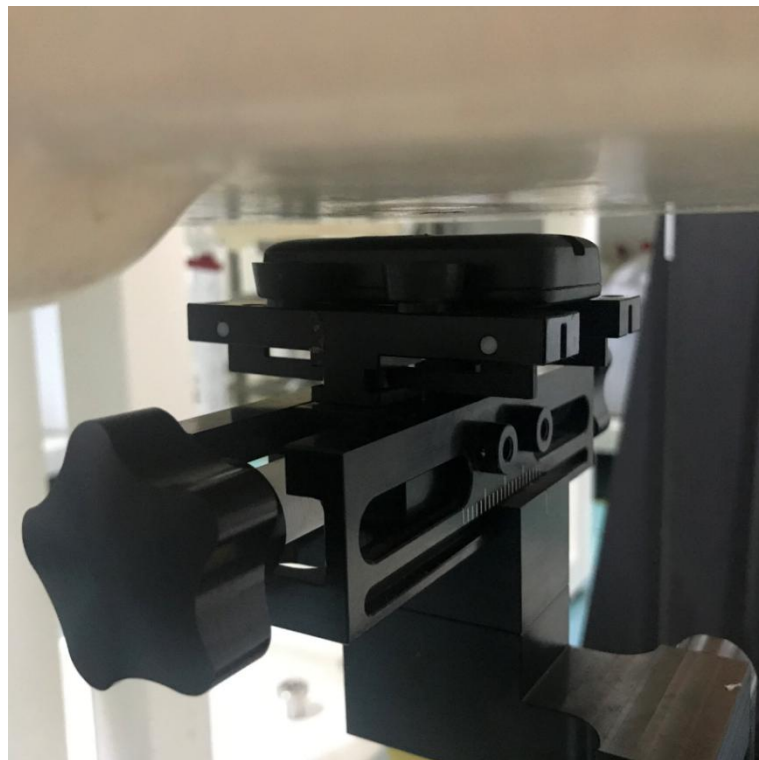


**Picture 8-4: Toward Ground (5mm)**

**Chongqing Academy of Information and Communication Technology**


Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336  
Tel: 0086-23-88069965

FAX:0086-23-88608777




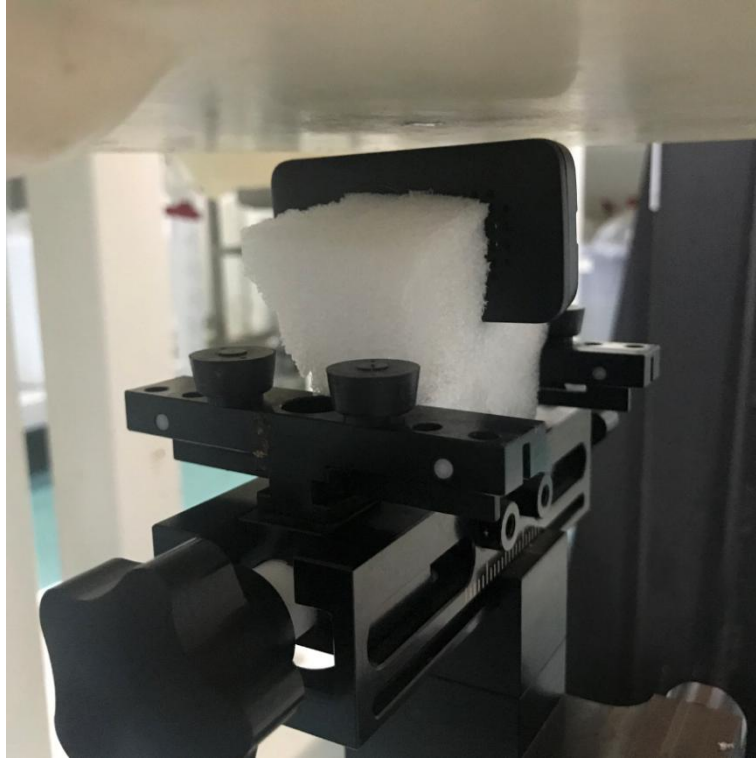


Picture 8-5: Toward Left (5mm)

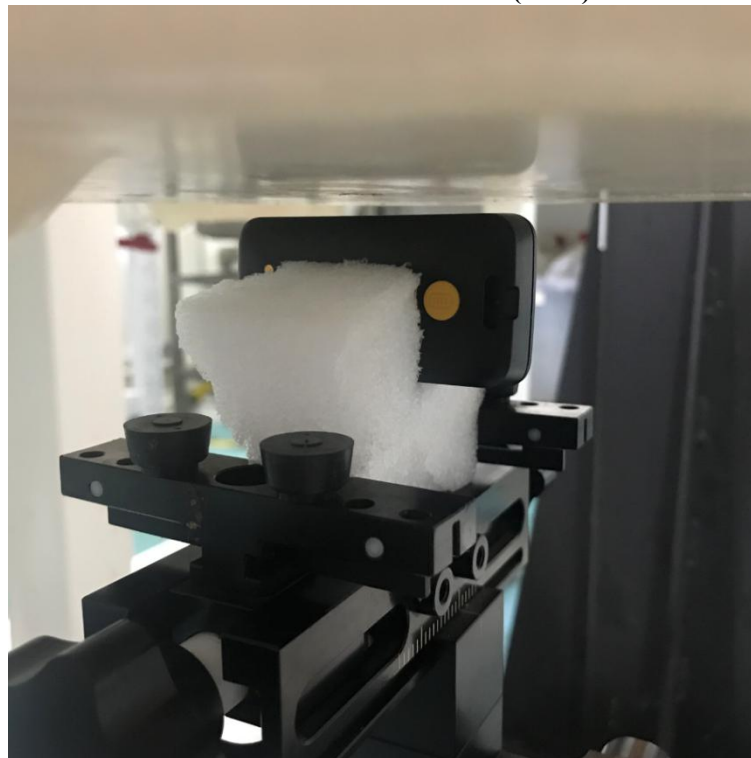

Picture 8-6: Toward Right (5mm)

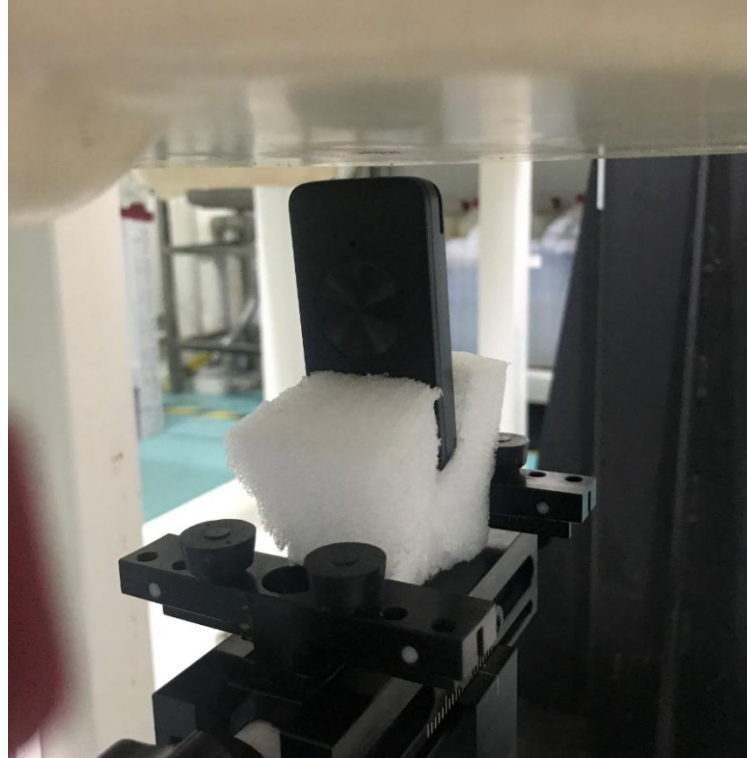

Picture 8-7: Toward Bottom (5mm)

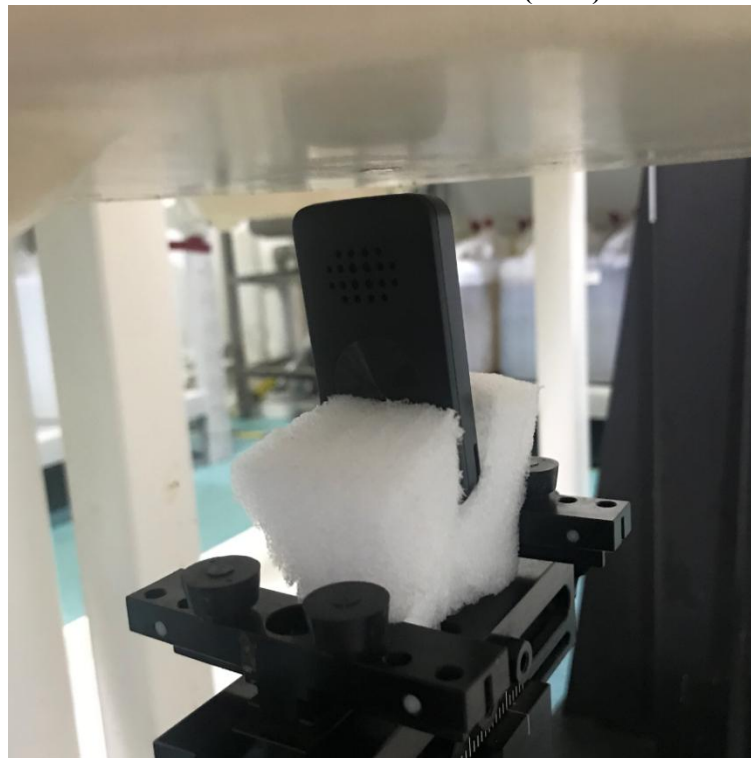

Picture 8-8: Toward Top (5mm)



## 9. Tissue Simulating Liquids

### 9.1. Equivalent Tissues

The liquid used for the frequency range of 800-3000 MHz consisted of water, sugar, salt and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table 3 and 4 shows the detail solution. The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

**Table 9.1. Composition of the Head Tissue Equivalent Matter**

Frequency (MHz)	835	1750	1900	2450
<b>Ingredients (% by weight)</b>				
<b>water</b>	<b>41.45</b>	<b>55.24</b>	<b>54.89</b>	<b>58.79</b>
<b>sugar</b>	<b>56.00</b>	<b>/</b>	<b>/</b>	<b>/</b>
<b>salt</b>	<b>1.45</b>	<b>0.306</b>	<b>0.18</b>	<b>0.06</b>
<b>preventol</b>	<b>0.1</b>	<b>/</b>	<b>/</b>	<b>/</b>
<b>cellulose</b>	<b>1.0</b>	<b>/</b>	<b>/</b>	<b>/</b>
<b>ClycolMonobutyl</b>	<b>/</b>	<b>44.45</b>	<b>44.93</b>	<b>41.15</b>
<b>Dielectric Parameters Target Value</b>	<b>f=850MHz <math>\epsilon=41.5</math> <math>\sigma=0.91</math></b>	<b>f=1750MHz <math>\epsilon=40.08</math> <math>\sigma=1.37</math></b>	<b>f=1950MHz <math>\epsilon=40.0</math> <math>\sigma=1.40</math></b>	<b>f=2450MHz <math>\epsilon=39.20</math> <math>\sigma=1.80</math></b>


**Table 9.2. Targets for tissue simulating liquid**

Frequency (MHz)	Liquid Type	Conductivity ( $\sigma$ )	$\pm 5\%$ Range	Permittivity ( $\epsilon$ )	$\pm 5\%$ Range
<b>750</b>	<b>Head</b>	<b>0.89</b>	<b>0.85~0.93</b>	<b>41.9</b>	<b>39.8~44.0</b>
<b>835</b>	<b>Head</b>	<b>0.91</b>	<b>0.86~0.95</b>	<b>41.5</b>	<b>39.4~43.6</b>
<b>1750</b>	<b>Head</b>	<b>1.37</b>	<b>1.30~1.44</b>	<b>40.8</b>	<b>38.1~42.1</b>
<b>1900</b>	<b>Head</b>	<b>1.40</b>	<b>1.33~1.47</b>	<b>40.0</b>	<b>38.0~42.0</b>
<b>2450</b>	<b>Head</b>	<b>1.80</b>	<b>0.85~0.93</b>	<b>39.2</b>	<b>37.2~41.2</b>
<b>5200</b>	<b>Head</b>	<b>4.66</b>	<b>4.43~5.71</b>	<b>36.0</b>	<b>34.2~37.05</b>
<b>5800</b>	<b>Head</b>	<b>5.26</b>	<b>5.00~6.31</b>	<b>35.3</b>	<b>33.54~36.35</b>


## 9.2. Dielectric Performance

Table 9.3: Dielectric Performance of Head Tissue Simulating Liquid


Measurement Value						
Liquid Temperature: 22.5°C						
Type	Frequency	Permittivity $\epsilon$	Drift (%)	Conductivity $\sigma$	Drift (%)	Test Date
Head	750	40.72	-2.82%	0.902	1.35%	2021-07-01
Head	835	40.99	-1.23%	0.902	-0.80%	2021-06-30
Head	1750	39.33	-3.60%	1.384	1.02%	2021-06-25
Head	1900	39.22	-1.95%	1.426	1.86%	2021-06-24
Head	2450	38.26	-2.40%	1.831	1.72%	2021-07-08
Head	5200	37.22	3.38%	4.566	-2.02%	2021-07-23
Head	5800	36.03	2.07%	5.257	-0.057%	2021-07-23

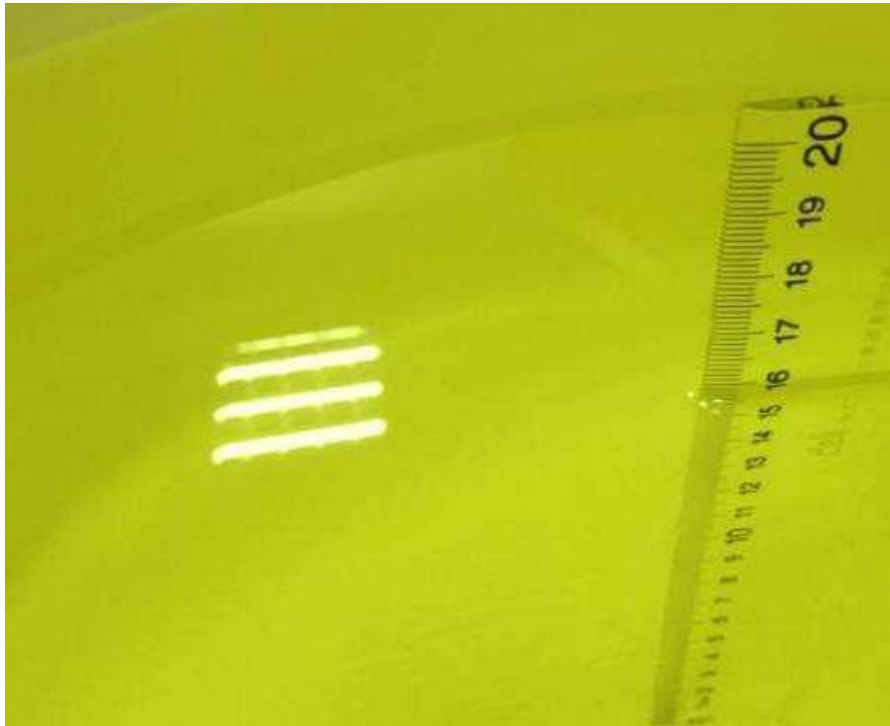


Picture9-1:Liquid depth in the Flat Phantom (750 MHz Head)

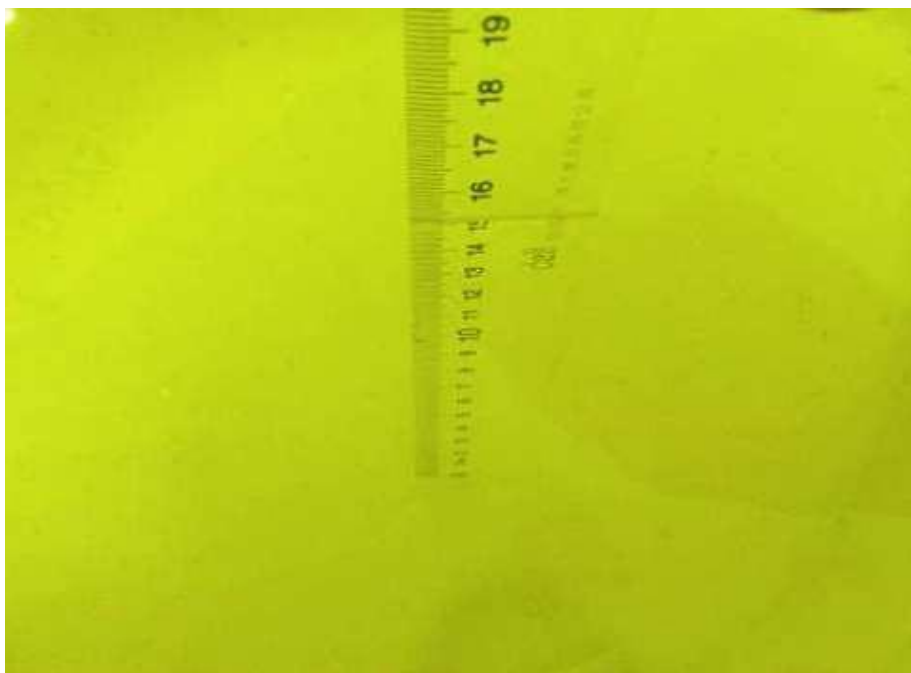

Picture 9-2: Liquid depth in the Flat Phantom (850 MHz Head)

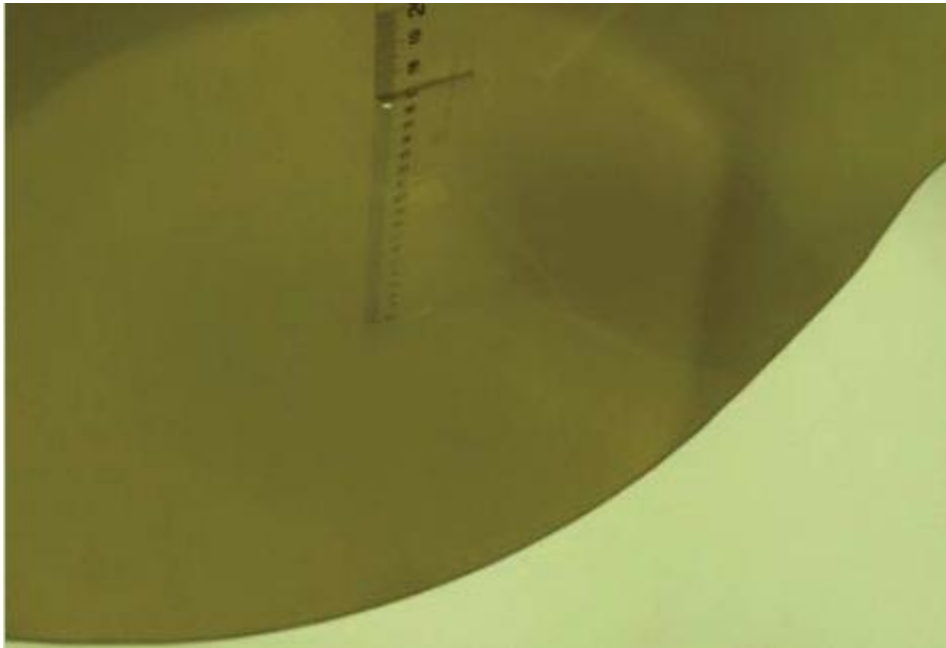

Picture 9-3: Liquid depth in the Flat Phantom (1900 MHz Head)

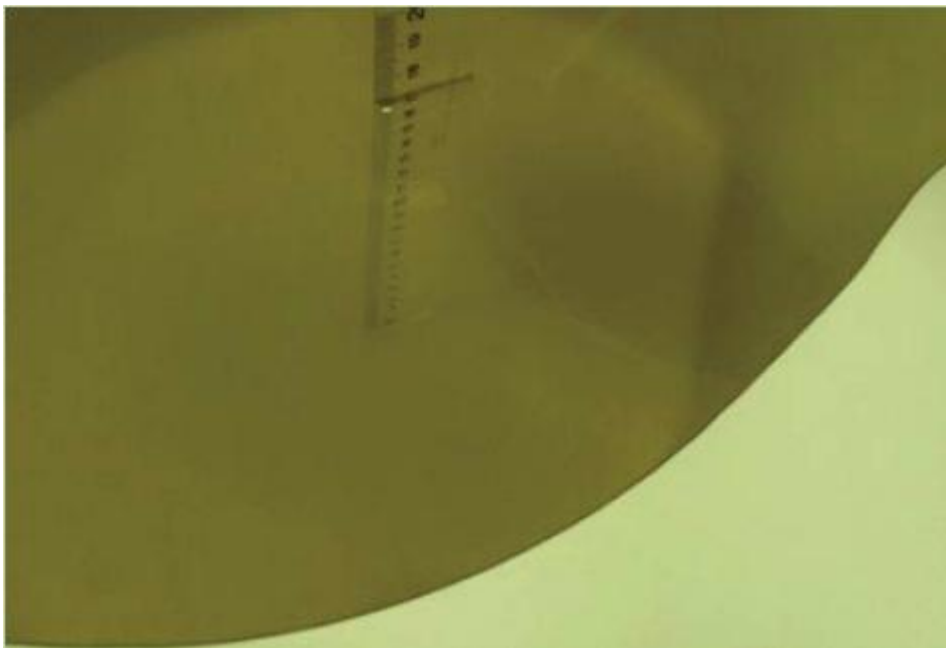

Picture 9-4: Liquid depth in the Flat Phantom (2450 MHz Head)


## 10. System Validation

### 10.1. System Validation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

### 10.2. System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

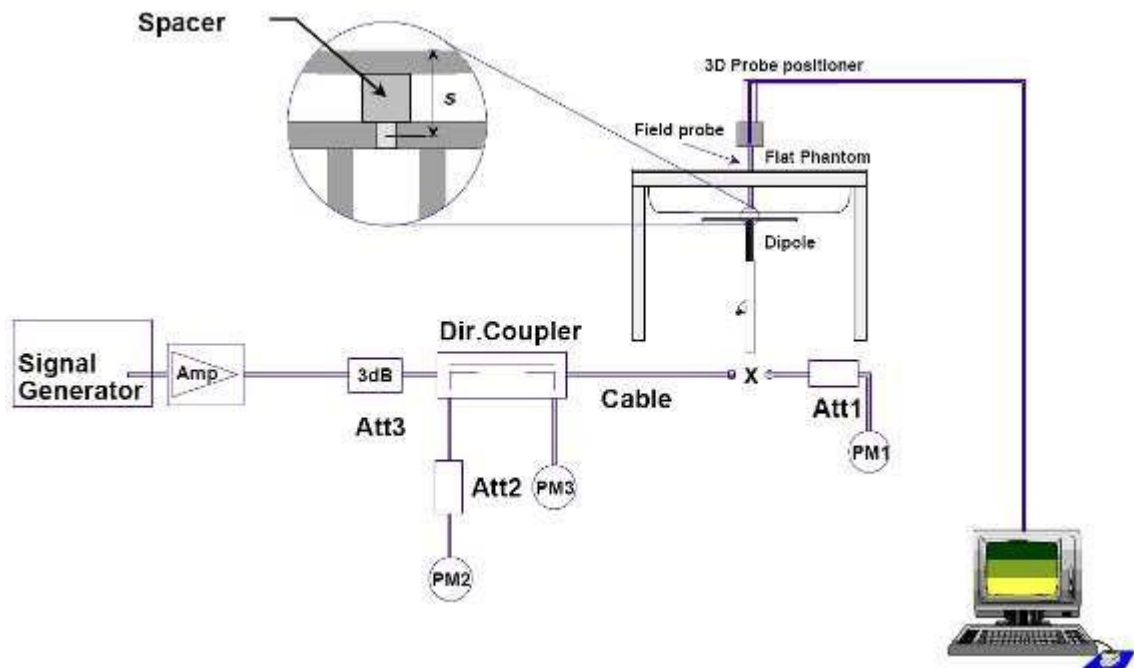

**Picture 10-1 System Setup for System Evaluation**

The output power on dipole port must be calibrated to 24 dBm (250mW) before dipole is connected. The results are normalized to 1 W input power.



Picture 10-2 Photo of Dipole Setup

Table 10.1: System Validation of Head

Verification Results							
Input power level: 1W							
Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation		Test date
	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	
750MHz	2.07	1.37	1.99	1.31	-3.86%	-4.38%	2021-07-01
835MHz	2.40	1.60	2.35	1.53	-2.08%	-4.38%	2021-06-30
1750MHz	8.96	4.73	8.67	4.72	-3.24%	-0.21%	2021-06-25
1900 MHz	9.78	5.04	9.69	5.10	-0.92%	1.19%	2021-06-24
2450 MHz	13.50	6.18	12.3	5.71	-8.89%	-7.61%	2021-07-08
5200MHz	74.90	21.4	76.9	21.9	2.67%	2.34%	2021-07-23
5800MHz	73.7	20.7	73.8	20.7	0.14%	0.00%	2021-07-23

## 11. Measurement Procedures

### 11.1. Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in Picture 19


**Step 1:** The tests described in 11.2 shall be performed at the channel that is closest to the centre of the transmit frequency band ( $f_c$ ) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in Chapter 8),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e.,  $N_c > 3$ ), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

**Step 2:** For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 11.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

**Step 3:** Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

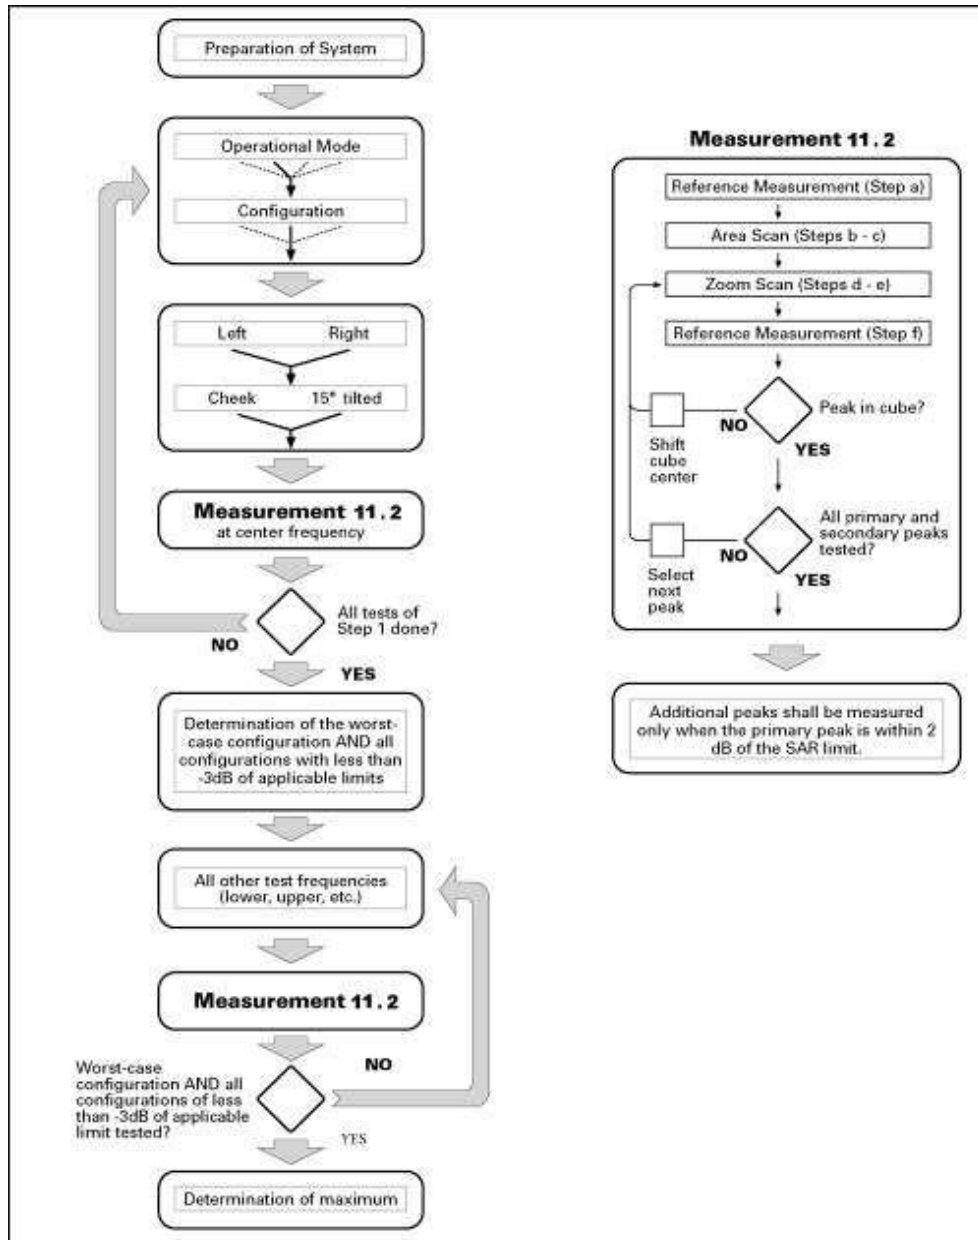

Picture 11-1 Block diagram of the tests to be performed

## 11.2. Measurement procedure

The following procedure shall be performed for each of the test conditions (see Picture 19) described in 11.1:

- Measure the local SAR at a test point within 8 mm or less in the normal direction from the inner surface of the phantom.
- Measure the two-dimensional SAR distribution within the phantom (area scan procedure). The boundary of the measurement area shall not be closer than 20 mm from the phantom side walls. The distance between the measurement points should enable the detection of the location of local maximum with an accuracy of better than half the linear dimension of the tissue cube after interpolation. A maximum grid spacing of 20 mm for frequencies below 3 GHz and  $(60/f \text{ [GHz]})$  mm for frequencies of 3GHz and greater is

## Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336  
Tel: 0086-23-88069965 FAX: 0086-23-88608777



recommended. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for frequencies below 3 GHz and  $\delta \ln(2)/2$  mm for frequencies of 3 GHz and greater, where  $\delta$  is the plane wave skin depth and  $\ln(x)$  is the natural logarithm. The maximum variation of the sensor-phantom surface shall be  $\pm 1$  mm for frequencies below 3 GHz and  $\pm 0.5$  mm for frequencies of 3 GHz and greater. At all measurement points the angle of the probe with respect to the line normal to the surface should be less than  $5^\circ$ . If this cannot be achieved for a measurement distance to the phantom inner surface shorter than the probe diameter, additional uncertainty evaluation is needed.

c) From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that are not within the zoom-scan volume; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR limit. This is consistent with the 2 dB threshold already stated;

d) Measure the three-dimensional SAR distribution at the local maxima locations identified in step c). The horizontal grid step shall be  $(24 / f[\text{GHz}])$  mm or less but not more than 8 mm. The minimum zoom size of 30 mm by 30 mm and 30 mm for frequencies below 3 GHz. For higher frequencies, the minimum zoom size of 22 mm by 22 mm and 22 mm. The grid step in the vertical direction shall be  $(8 - f[\text{GHz}])$  mm or less but not more than 5 mm, if uniform spacing is used. If variable spacing is used in the vertical direction, the maximum spacing between the two closest measured points to the phantom shell shall be  $(12 / f[\text{GHz}])$  mm or less but not more than 4 mm, and the spacing between farther points shall increase by an incremental factor not exceeding 1.5. When variable spacing is used, extrapolation routines shall be tested with the same spacing as used in measurements. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for frequencies below 3 GHz and  $\delta \ln(2)/2$  mm for frequencies of 3 GHz and greater, where  $\delta$  is the plane wave skin depth and  $\ln(x)$  is the natural logarithm. Separate grids shall be centered on each of the local SAR maxima found in step c). Uncertainties due to field distortion between the media boundary and the dielectric enclosure of the probe should also be minimized, which is achieved if the distance between the phantom surface and physical tip of the probe is larger than probe tip diameter. Other methods may utilize correction procedures for these boundary effects that enable high precision measurements closer than half the probe diameter. For all measurement points, the angle of the probe with respect to the flat phantom surface shall be less than  $5^\circ$ . If this cannot be achieved an additional uncertainty evaluation is needed.

e) Use post processing ( e.g. interpolation and extrapolation ) procedures to determine the local SAR values at the spatial resolution needed for mass averaging.

### 11.3. SAR Measurement for CAT-M1

SAR tests for CAT-M1 are performed with a base station simulator, SP 8315. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the SP 8315.

### 11.4. Power Drift

To control the output power stability during the SAR test, DASY5 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Section 15 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

## Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336  
Tel: 0086-23-88069965 FAX: 0086-23-88608777

## 12. Area Scan Based 1-g SAR

### 12.1. Requirement of KDB

According to the KDB447498D01v05, when the implementation is based on the specific polynomial algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-g SAR is  $\leq 1.2 \text{ W/kg}$ , a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peak and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex A). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

### 12.2. Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FASTSAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linearfit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1-g and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1-g and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial. If it were by the frequency validity was extended to cover the range 30-6000 MHz. Details of this study can be found in the BEMS2007 Proceedings.

Both algorithms are implemented in DASY software.

## 13. Conducted Output Power

### 13.1. Manufacturing tolerance

**Table 13.1: GPRS/EGPRS (GMSK Modulation)**

GSM 1900				
Channel		512	661	810
1 Txslots	Maximum Target Value (dBm)	$30 \pm 1$	$30 \pm 1$	$30 \pm 1$
2 Txslots	Maximum Target Value (dBm)	$30 \pm 1$	$30 \pm 1$	$30 \pm 1$
3 Txslots	Maximum Target Value (dBm)	$30 \pm 1$	$30 \pm 1$	$30 \pm 1$
4 Txslots	Maximum Target Value (dBm)	$30 \pm 1$	$30 \pm 1$	$30 \pm 1$

**Table 13.2: EGPRS (8PSK Modulation)**

GSM 1900				
Channel		512	661	810
1 Txslots	Maximum Target Value (dBm)	$29 \pm 1$	$29 \pm 1$	$29 \pm 1$
2 Txslots	Maximum Target Value (dBm)	$29 \pm 1$	$29 \pm 1$	$29 \pm 1$
3 Txslots	Maximum Target Value (dBm)	$29 \pm 1$	$29 \pm 1$	$29 \pm 1$
4 Txslots	Maximum Target Value (dBm)	$29 \pm 1$	$29 \pm 1$	$29 \pm 1$

Table 13.3: CAT-M1

Band	Bandwidth(MHz)	RB	Low	Middle	High
Band2	1.4/3/5/10/15/20	1#0	$24.0 \pm 1$	$24.0 \pm 1$	$24.0 \pm 1$
	1.4/3/5/10	6#0	$23.0 \pm 1$	$23.0 \pm 1$	$23.0 \pm 1$
	15/20	6#0	$24.0 \pm 1$	$24.0 \pm 1$	$24.0 \pm 1$
Band4	1.4/3/5/10/15/20	1#0	$24.0 \pm 1$	$24.0 \pm 1$	$24.0 \pm 1$
	1.4/3/5	6#0	$23.0 \pm 1$	$23.0 \pm 1$	$23.0 \pm 1$
	10/15/20	6#0	$24.0 \pm 1$	$24.0 \pm 1$	$24.0 \pm 1$
Band5	5/10	1#0	$24.0 \pm 1$	$24.0 \pm 1$	$24.0 \pm 1$
	5	6#0	$23.0 \pm 1$	$23.0 \pm 1$	$23.0 \pm 1$
	10	6#0	$24.0 \pm 1$	$24.0 \pm 1$	$24.0 \pm 1$
Band12	1.4/3/5/10	1#0	$24.0 \pm 1$	$24.0 \pm 1$	$24.0 \pm 1$
	1.4/3/5	6#0	$23.0 \pm 1$	$23.0 \pm 1$	$23.0 \pm 1$
	10	6#0	$24.0 \pm 1$	$23.0 \pm 1$	$23.0 \pm 1$
Band13	5/10	1#0	$24.5 \pm 1$	$24.5 \pm 1$	$24.5 \pm 1$
	5	6#0	$23.0 \pm 1$	$23.0 \pm 1$	$23.0 \pm 1$
	10	6#0	$24.0 \pm 1$	$24.0 \pm 1$	$24.0 \pm 1$

Table 13.4: WIFI

WIFI 802.11b			
Channel	Channel 1	Channel 6	Channel 11
Maximum Target Value (dBm)	$18.5 \pm 1$	$18.5 \pm 1$	$18.5 \pm 1$
WIFI 802.11g			
Channel	Channel 1	Channel 6	Channel 11
Maximum Target Value (dBm)	$17.0 \pm 1$	$17.0 \pm 1$	$17.0 \pm 1$
WIFI 802.11n 20M			
Channel	Channel 1	Channel 6	Channel 11
Maximum Target Value (dBm)	$16.5 \pm 1$	$16.5 \pm 1$	$16.5 \pm 1$
WIFI 802.11n 40M			
Channel	Channel 1	Channel 6	Channel 11
Maximum Target Value (dBm)	$17.0 \pm 1$	$17.0 \pm 1$	$17.0 \pm 1$
WIFI 802.11a			
Channel	Channel 36	Channel 40	Channel 48
Maximum Target Value (dBm)	$13.0 \pm 1$	$13.0 \pm 1$	$13.0 \pm 1$

## Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336  
Tel: 0086-23-88069965 FAX:0086-23-88608777

WIFI 802.11n			
Channel	Channel 36	Channel 40	Channel 48
Maximum Target Value (dBm)	$13.0 \pm 1$	$13.0 \pm 1$	$13.0 \pm 1$
WIFI 802.11a			
Channel	Channel 149	Channel 157	Channel 165
Maximum Target Value (dBm)	$13.5 \pm 1$	$13.5 \pm 1$	$13.5 \pm 1$
WIFI 802.11n			
Channel	Channel 149	Channel 157	Channel 165
Maximum Target Value (dBm)	$9.0 \pm 1$	$13.0 \pm 1$	$13.0 \pm 1$

**Table 13.5: BT**

Mode	Data Rate (Mbps)	Maximum Target Value (dBm)		
		Channel 0 (2402MHz)	Channel 19 (2440MHz)	Channel 39 (2470MHz)
BLE	1	$4.5 \pm 1$	$4.5 \pm 1$	$4.5 \pm 1$
	2	$4.5 \pm 1$	$4.5 \pm 1$	$4.5 \pm 1$

### 13.2. GSM Measurement result

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMU200) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured Average output power should be greater and within 5% than EMI measurement.

**Table 13.2 .1: The conducted power measurement results for GPRS/EGPRS (GMSK)**

GSM 1900	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	512	661	810		512	661	810
1 Txslot	30.82	30.37	29.99	-9.03dB	21.79	21.34	20.96
2 Txslot	30.15	30.07	30.41	-6.02dB	24.13	24.05	24.39
3 Txslot	30.40	30.22	30.20	-4.26dB	26.14	25.96	25.94
4 Txslot	30.31	30.12	29.80	-3.01dB	27.30	27.11	26.79

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 4Txslots for 1900MHz.

**Table 13.2.2: The conducted power measurement results for GPRS/EGPRS (8PSK)**

GSM 1900	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	512	661	810		512	661	810
1 Txslot	29.20	28.90	28.60	-9.03dB	20.17	19.87	19.57
2 Txslot	29.40	28.70	28.30	-6.02dB	23.38	22.68	22.28
3 Txslot	29.20	28.80	28.34	-4.26dB	24.94	24.54	24.08
4 Txslot	28.30	28.60	29.10	-3.01dB	25.29	25.59	26.09

### 13.3. CATM Measurement result

Table 13.3.1 The output Power for CATM Band 2

Mode	Bandwidth	Channel	RB	Index	Conducted Power	
					QPSK	16QAM
Band2	1.4MHz	18607	1#0	0	24.43	22.79
			6#0	0	22.74	22.79
		18900	1#0	0	24.55	22.75
			6#0	0	22.78	22.76
		19195	1#5	0	24.11	22.77
			6#0	0	22.75	22.81
	3MHz	18615	1#0	0	24.51	22.76
			6#0	0	22.79	22.77
		18900	1#0	0	24.46	22.75
			6#0	0	22.78	22.75
		19185	1#5	1	24.36	22.76
			6#0	1	22.75	22.77
	5MHz	18620	1#0	0	24.52	23.61
			6#0	0	23.39	22.78
		18900	1#0	0	24.30	23.41
			6#0	0	23.13	22.79
		19180	1#5	3	24.23	23.19
			6#0	3	23.25	22.79

	10MHz	18640	1#0	0	24.50	23.55
			4#0	0	23.36	23.70
		18900	1#0	0	24.35	23.33
			4#0	0	23.17	23.61
		19160	1#5	7	24.02	23.13
			4#2	7	23.16	22.86
	15MHz	18675	1#0	0	24.54	23.66
			6#0	0	24.31	24.74
		18900	1#0	0	24.21	23.37
			6#0	0	24.12	24.54
		19125	1#5	0	24.11	23.17
			6#0	0	24.16	24.47
	20MHz	18680	1#0	0	24.32	24.37
			6#0	0	24.21	23.44
		18900	1#0	0	24.15	24.55
			6#0	0	24.38	23.27
		19120	1#5	0	24.19	24.37
			6#0	0	24.41	23.34



Table 13.3.2 The output Power for CATM Band 4

Mode	Bandwidth	Channel	RB	Index	Conducted Power	
					QPSK	16QAM
Band4	1.4MHz	19957	1#0	0	24.41	22.88
			6#0	0	22.77	22.79
		20175	1#0	0	24.58	22.75
			6#0	0	22.77	22.79
		20393	1#5	0	24.15	22.78
			6#0	0	22.80	22.79
	3MHz	19965	1#0	0	24.48	22.79
			6#0	0	22.75	22.82
		20175	1#0	0	24.32	22.74
			6#0	0	22.78	22.76
		20385	1#5	1	24.38	22.75
			6#0	1	22.78	22.79
	5MHz	19975	1#0	0	24.23	23.19
			6#0	0	23.25	22.89
		20175	1#0	0	24.31	23.48
			6#0	0	23.16	22.76
		20375	1#5	3	24.55	23.67
			6#0	3	23.35	22.77
	10MHz	20000	1#0	0	24.32	24.37

			4#0	0	24.21	23.44
		20175	1#0	0	24.15	24.55
			4#0	0	24.38	23.27
		20350	1#5	7	24.02	23.13
			4#2	7	24.16	22.86
	15MHz	20025	1#0	0	24.54	23.66
			6#0	0	24.31	24.74
		20175	1#0	0	24.21	23.37
			6#0	0	24.12	24.54
		20325	1#5	0	24.11	23.17
			6#0	0	24.16	24.47
	20MHz	20050	1#0	0	24.35	23.33
			6#0	0	23.17	23.61
		20175	1#0	0	24.02	23.13
			6#0	0	24.16	22.86
		20300	1#5	0	24.21	24.41
			6#0	0	24.56	23.45

Table 13.3.3 The output Power for CATM Band 5

Mode	Bandwidth	Channel	RB	Index	Conducted Power	
					QPSK	16QAM
Band 5	5MHz	20425	1#0	0	24.45	23.59
			6#0	0	23.25	22.58
		20525	1#0	0	24.33	23.15
			6#0	0	23.17	22.52
		20625	1#5	3	24.10	23.05
			6#0	3	23.36	22.48
	10MHz	20450	1#0	0	24.59	23.31
			4#0	0	24.13	23.44
		20525	1#0	0	24.39	23.25
			4#0	0	23.27	23.43
		20600	1#5	7	24.12	23.26
			4#2	7	24.23	23.22
	20MHz	20050	1#0	0	24.35	23.33
			6#0	0	23.17	23.61
		20175	1#0	0	24.02	23.13
			6#0	0	24.16	22.86
		20300	1#5	0	24.21	24.41
			6#0	0	24.56	23.45

Table 13.3.4 The output Power for CATM Band 12

Mode	Bandwidth	Channel	RB	Index	Conducted Power	
					QPSK	16QAM
Band12	1.4MHz	23017	1#0	0	24.45	23.71
			6#0	0	22.62	22.77
		23095	1#0	0	24.57	23.55
			6#0	0	22.72	22.69
		23172	1#5	0	24.15	23.78
			6#0	0	22.58	22.85
	3MHz	20320	1#0	0	24.52	23.61
			6#0	0	23.39	22.68
		23095	1#0	0	24.30	23.41
			6#0	0	23.15	22.41
		23170	1#5	1	24.25	23.21
			6#0	1	23.25	22.39
	5MHz	23030	1#0	0	24.51	23.64
			6#0	0	22.59	22.77
		23095	1#0	0	24.47	23.53
			6#0	0	22.71	22.55
		23160	1#5	3	24.36	23.26
			6#0	3	22.65	22.47
	10MHz	23045	1#0	0	24.50	23.55
			4#0	0	23.36	23.70
		23095	1#0	0	24.35	23.33
			4#0	0	23.17	23.61
		23145	1#5	7	24.08	23.24
			4#2	7	24.22	23.71

Table 13.3.5 The output Power for CATM Band 13

Mode	Bandwidth	Channel	RB	Index	Conducted Power	
					QPSK	16QAM
Band13	5MHz	23200	1#0	0	25.12	23.91
			6#0	0	23.77	23.01
		23230	1#0	0	25.07	23.74
			6#0	3	23.70	22.95
		23254	1#5	3	25.02	23.79
			6#0	3	23.64	22.89
	10MHz	23225	1#0	0	25.19	23.99
			6#0	0	23.80	24.12
		23230	1#0	0	25.19	23.99
			6#0	0	23.80	24.12
		23235	1#5	7	24.13	24.05
			4#2	7	24.27	24.11

### 13.4. WIFI Measurement result

The average conducted power for WiFi is as following:

**Table 13.4.1 The output Power for WIFI 2.4G**

Mode	Data Rate(Mbps)	Teat Result(dBm)		
		Ch1	Ch6	Ch11
802.11b	1	17.51	17.54	17.58
	2	17.77	17.58	17.52
	5.5	18.12	18.91	18.85
	11	18.37	19.14	19.09
802.11g	6	16.02	16.24	16.84
	9	16.15	16.51	17.03
	12	16.38	16.66	17.05
	18	16.32	16.65	17.07
	24	16.76	17.02	17.32
	36	16.56	16.82	17.12
	48	17.07	17.26	17.81
	54	16.73	16.96	17.35
Mode	Data Rate(Mbps)	Teat Result(dBm)		
		Ch1	Ch6	Ch11
802.11n (20MHz)	MCS0	15.78	16.62	16.54
	MCS1	15.83	16.68	16.63
	MCS2	15.84	16.56	16.58
	MCS3	16.15	16.73	16.93
	MCS4	16.35	17.07	17.14
	MCS5	16.42	17.38	17.21
	MCS6	16.65	17.36	17.36
	MCS7	16.23	17.12	17.15
Mode	Data Rate(Mbps)	Teat Result(dBm)		
		Ch3	Ch7	Ch9
802.11n (40MHz)	MCS0	16.06	16.63	16.64
	MCS1	16.31	16.74	16.72
	MCS2	16.34	16.85	16.65
	MCS3	16.65	16.96	16.92
	MCS4	16.85	17.18	17.12
	MCS5	16.86	17.31	17.26
	MCS6	16.94	17.45	17.28
	MCS7	16.75	17.34	17.16

### Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336  
Tel: 0086-23-88069965 FAX:0086-23-88608777

**Measurement Results:**  
**5150-5250MHz:**
**Table 13.4.2 The output Power for 802.11a**

Mode	Data Rate(Mbps)	Teat Result(dBm)		
		Ch36	Ch40	Ch48
802.11a	6	12.70	13.30	12.70
	9	12.66	13.27	12.79
	12	12.68	13.27	12.81
	18	12.85	13.38	12.95
	24	12.98	13.71	13.02
	36	12.92	13.58	13.04
	48	13.11	13.65	13.14
	54	12.85	13.48	12.89

**Table 13.4.3 The output Power for 802.11n**

Mode	Data Rate(Mbps)	Teat Result(dBm)		
		Ch36	Ch40	Ch48
802.11n (20MHz)	MCS0	13.19	13.20	12.73
	MCS1	12.56	13.02	12.68
	MCS2	12.68	13.22	12.77
	MCS3	12.91	13.43	13.32
	MCS4	13.14	13.58	13.22
	MCS5	13.07	13.56	13.14
	MCS6	13.07	13.58	13.23
	MCS7	12.90	13.42	13.02

**5725-5850MHz:**
**Table 13.4.4 The output Power for 802.11a**

Mode	Data Rate(Mbps)	Teat Result(dBm)		
		Ch149	Ch157	Ch165
802.11a	6	14.33	12.82	12.62
	9	14.06	12.96	12.58
	12	14.20	13.08	12.64
	18	14.26	13.15	12.80
	24	14.29	13.30	12.90
	36	14.24	13.69	12.86
	48	14.39	13.23	12.96
	54	14.23	13.12	12.83

**Chongqing Academy of Information and Communication Technology**

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336  
Tel: 0086-23-88069965

FAX:0086-23-88608777

Table 13.4.4 The output Power for 802.11n

Mode	Data Rate(Mbps)	Teat Result(dBm)		
		Ch149	Ch157	Ch165
802.11n (20MHz)	MCS0	8.86	12.89	12.53
	MCS1	8.79	12.86	12.53
	MCS2	8.96	13.05	12.64
	MCS3	9.25	13.19	12.80
	MCS4	9.42	13.38	13.03
	MCS5	9.39	13.33	12.97
	MCS6	9.44	13.36	13.07
	MCS7	9.27	13.14	12.89

### 13.5. BT Measurement result

Mode	Data Rate (Mbps)	Conducted Power (dBm)		
		Channel 0 (2402MHz)	Channel 19 (2440MHz)	Channel 39 (2470MHz)
BLE	1	4.86	5.34	4.44
	2	5.33	5.44	4.89



## 14. Simultaneous TX SAR Considerations

### 14.1. Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

According to the KDB447498 appendix A, the SAR test exclusion threshold for 2450MHz at 5mm test separation distances is 10mW.

#### NOTE:

The maximum BT Measurement result is 5.44dBm=3.5mW.

### 14.2. Simultaneous transmission SAR

Transmission SAR(W/Kg)											
Test Position		GSM 1900	CATM Band2	CATM Band4	CATM Band5	CATM Band12	CATM Band13	WIFI 2.4G	WIFI 5G UNII-1	WIFI 5G UNII-3	SUM
Body 5mm	Phantom Side	0.652	0.119	0.106	0.079	0.051	0.044	0.003	0.245	0.487	1.139
	Ground Side	1.274	0.218	0.212	0.093	0.087	0.068	0.004	0.068	0.266	1.540
	Left Side	0.350	0.067	0.026	0.064	0.039	0.033	0.002	0.175	0.291	0.641
	Right Side	0.588	0.098	0.092	0.037	0.021	0.016	0.001	0.008	0.008	0.596
	Bottom Side	0.246	0.045	0.037	0.054	0.050	0.026	0.000	0.003	0.431	0.677
	Top Side	0.077	0.014	0.007	0.004	0.003	0.002	0.444	0.201	0.034	0.521

So the simultaneous transmission SAR is not required for WiFi transmitter.

## Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336  
Tel: 0086-23-88069965 FAX:0086-23-88608777

## 15. SAR Test Result

### 15.1. SAR results

Table 15.1: SAR Values( GPRS 1900MHz-Body)

Frequency		Mode (number of timeslots)	Test Position	Spacing (mm)	Maximum Power (dBm)	Measured allowed power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1850.2	512	GPRS 4TS	Phantom	5	30.31	31.0	1.172	0.556	0.652	-0.14
1850.2	512	GPRS 4TS	Ground	5	30.31	31.0	1.172	0.816	0.957	0.15
1850.2	512	GPRS 4TS	Left	5	30.31	31.0	1.172	0.299	0.350	0.17
1850.2	512	GPRS 4TS	Right	5	30.31	31.0	1.172	0.502	0.588	0.12
1850.2	512	GPRS 4TS	Bottom	5	30.31	31.0	1.172	0.210	0.246	0.09
1850.2	512	GPRS 4TS	Top	5	30.31	31.0	1.172	0.0659	0.077	0.04
1880.0	661	GPRS 4TS	Ground	5	30.12	31.0	1.225	1.040	1.274	0.19
1909.8	810	GPRS 4TS	Ground	5	29.80	31.0	1.318	0.605	0.798	-0.16
1880.0	661	EGPRS 4TS	Ground	5	28.60	30.0	1.380	0.537	0.741	-0.18
Retest										
1850.2	512	GPRS 4TS	Ground	5	30.31	31.0	1.172	0.848	0.994	0.18
1880.0	661	GPRS 4TS	Ground	5	30.12	31.0	1.225	0.959	1.174	0.16

Table 15.2: SAR Values (CATM-Band 2-Body)

Frequency		Mode (number of timeslots)	Test Position	Spacing (mm)	Maximum Power (dBm)	Measured allowed power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1857.5	18675	15M_16QAM_6@0	Phantom	5	24.74	25.00	1.062	0.112	0.119	0.15
1857.5	18675	15M_16QAM_6@0	Ground	5	24.74	25.00	1.062	0.159	0.169	0.14
1857.5	18675	15M_16QAM_6@0	Left	5	24.74	25.00	1.062	0.0634	0.067	-0.06
1857.5	18675	15M_16QAM_6@0	Right	5	24.74	25.00	1.062	0.0922	0.098	0.20
1857.5	18675	15M_16QAM_6@0	Bottom	5	24.74	25.00	1.062	0.0426	0.045	0.15
1857.5	18675	15M_16QAM_6@0	Top	5	24.74	25.00	1.062	0.0132	0.014	0.15
1880.0	18900	15M_16QAM_6@0	Ground	5	24.54	25.00	1.112	0.172	0.191	0.03
1902.5	19125	15M_16QAM_6@0	Ground	5	24.47	25.00	1.130	0.193	0.218	0.03

Table 15.3: SAR Values (CATM-Band 4-Body)

Frequency		Mode (number of timeslots)	Test Position	Spacing (mm)	Maximum Power (dBm)	Measured allowed power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1717.5	20025	15M_16QAM_6@0	Phantom	5	24.73	25.00	1.064	0.0992	0.106	-0.16
1717.5	20025	15M_16QAM_6@0	Ground	5	24.73	25.00	1.064	0.157	0.167	-0.08
1717.5	20025	15M_16QAM_6@0	Left	5	24.73	25.00	1.064	0.0246	0.026	0.13
1717.5	20025	15M_16QAM_6@0	Right	5	24.73	25.00	1.064	0.0866	0.092	-0.12
1717.5	20025	15M_16QAM_6@0	Bottom	5	24.73	25.00	1.064	0.0345	0.037	0.08
1717.5	20025	15M_16QAM_6@0	Top	5	24.73	25.00	1.064	0.00689	0.007	0.12
1732.5	20175	15M_16QAM_6@0	Ground	5	24.53	25.00	1.114	0.160	0.178	0.15
1747.5	20325	15M_16QAM_6@0	Ground	5	24.46	25.00	1.132	0.187	0.212	-0.13

Table 15.4: SAR Values (CATM-Band 5-Body)

Frequency		Mode (number of timeslots)	Test Position	Spacing (mm)	Maximum Power (dBm)	Measured allowed power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
829.0	20450	10M_QPSK_1@0	Phantom	5	24.59	25.00	1.099	0.072	0.079	-0.04
829.0	20450	10M_QPSK_1@0	Ground	5	24.59	25.00	1.099	0.0769	0.085	-0.14
829.0	20450	10M_QPSK_1@0	Left	5	24.59	25.00	1.099	0.0583	0.064	-0.15
829.0	20450	10M_QPSK_1@0	Right	5	24.59	25.00	1.099	0.0334	0.037	0.03
829.0	20450	10M_QPSK_1@0	Bottom	5	24.59	25.00	1.099	0.0487	0.054	0.15
829.0	20450	10M_QPSK_1@0	Top	5	24.59	25.00	1.099	0.00350	0.004	0.16
836.5	20525	10M_QPSK_1@0	Ground	5	24.39	25.00	1.151	0.0807	0.093	-0.13
844.0	20600	10M_QPSK_1@0	Ground	5	24.12	25.00	1.225	0.0718	0.088	-0.01

Table 15.5: SAR Values (CATM-Band 12-Body)

Frequency		Mode (number of timeslots)	Test Position	Spacing (mm)	Maximum Power (dBm)	Measured allowed power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
707.5	23095	1.4M_QPSK_1@0	Phantom	5	24.57	25.00	1.104	0.0461	0.051	0.09
707.5	23095	1.4M_QPSK_1@0	Ground	5	24.57	25.00	1.104	0.0733	0.081	0.18
707.5	23095	1.4M_QPSK_1@0	Left	5	24.57	25.00	1.104	0.0354	0.039	-0.14
707.5	23095	1.4M_QPSK_1@0	Right	5	24.57	25.00	1.104	0.0187	0.021	-0.12
707.5	23095	1.4M_QPSK_1@0	Bottom	5	24.57	25.00	1.104	0.0452	0.050	-0.14
707.5	23095	1.4M_QPSK_1@0	Top	5	24.57	25.00	1.104	0.00312	0.003	0.15
699.7	23017	10M_QPSK_1@0	Ground	5	24.45	25.00	1.135	0.0765	0.087	-0.10
715.2	23172	10M_QPSK_1@0	Ground	5	24.15	25.00	1.216	0.065	0.079	-0.13

Table 15.6: SAR Values (CATM-Band 13-Body)

Frequency		Mode (number of timeslots)	Test Position	Spacing (mm)	Maximum Power (dBm)	Measured allowed power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
782.0	23230	10M_QPSK_1@0	Phantom	5	25.19	25.50	1.074	0.0409	0.044	-0.04
782.0	23230	10M_QPSK_1@0	Ground	5	25.19	25.50	1.074	0.0485	0.052	-0.07
782.0	23230	10M_QPSK_1@0	Left	5	25.19	25.50	1.074	0.0305	0.033	0.02
782.0	23230	10M_QPSK_1@0	Right	5	25.19	25.50	1.074	0.0145	0.016	0.16
782.0	23230	10M_QPSK_1@0	Bottom	5	25.19	25.50	1.074	0.0242	0.026	0.07
782.0	23230	10M_QPSK_1@0	Top	5	25.19	25.50	1.074	0.00181	0.002	0.13
781.5	23225	10M_QPSK_1@0	Ground	5	25.19	25.50	1.074	0.0491	0.053	-0.07
782.5	23235	10M_QPSK_1@0	Ground	5	24.13	25.50	1.371	0.0498	0.068	-0.18

Table 15.7: SAR Values (WIFI)

Frequency		Mode/Band	Test Position	Spacing (mm)	Maximum Power (dBm)	Measured allowed power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
2437.0	6	802.11b	Phantom	5	19.14	19.50	1.086	0.00312	0.003	-0.05
2437.0	6	802.11b	Ground	5	19.14	19.50	1.086	0.00351	0.004	0.01
2437.0	6	802.11b	Left	5	19.14	19.50	1.086	0.00199	0.002	-0.19
2437.0	6	802.11b	Right	5	19.14	19.50	1.086	0.00114	0.001	0.12
2437.0	6	802.11b	Bottom	5	19.14	19.50	1.086	0.00001	0.000	0.07
2437.0	6	802.11b	Top	5	19.14	19.50	1.086	0.389	0.423	0.03
2412.0	1	802.11b	Top	5	18.37	18.50	1.030	0.421	0.434	0.12
2462.0	11	802.11b	Top	5	19.09	19.50	1.099	0.404	0.444	-0.17

Table 15.8: SAR Values (WIFI 5G UNII-1)

Frequency		Mode/Band	Test Position	Spacing (mm)	Maximum Power (dBm)	Measured allowed power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
5200.0	40	802.11a	Phantom	5	13.65	14.0	1.084	0.194	0.210	-0.02
5200.0	40	802.11a	Ground	5	13.65	14.0	1.084	0.063	0.068	0.02
5200.0	40	802.11a	Left	5	13.65	14.0	1.084	0.161	0.175	-0.08
5200.0	40	802.11a	Right	5	13.65	14.0	1.084	0.007	0.008	0.05
5200.0	40	802.11a	Bottom	5	13.65	14.0	1.084	0.003	0.003	-0.05
5200.0	40	802.11a	Top	5	13.65	14.0	1.084	0.185	0.201	-0.11
5180.0	36	802.11a	Phantom	5	13.11	14.0	1.227	0.200	0.245	-0.05
5240.0	48	802.11a	Phantom	5	13.14	14.0	1.219	0.181	0.221	-0.08

**Table 15.8: SAR Values (WIFI 5G UNII-3)**

Frequency		Mode/Band	Test Position	Spacing (mm)	Maximum Power (dBm)	Measured allowed power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
5745.0	149	802.11a	Phantom	5	14.39	14.50	1.026	0.436	0.447	-0.15
5745.0	149	802.11a	Ground	5	14.39	14.50	1.026	0.259	0.266	0.07
5745.0	149	802.11a	Left	5	14.39	14.50	1.026	0.284	0.291	-0.07
5745.0	149	802.11a	Right	5	14.39	14.50	1.026	0.008	0.008	-0.07
5745.0	149	802.11a	Bottom	5	14.39	14.50	1.026	0.420	0.431	0.02
5745.0	149	802.11a	Top	5	14.39	14.50	1.026	0.033	0.034	0.06
5785.0	157	802.11a	Phantom	5	13.23	13.50	1.064	0.458	0.487	0.17
5825.0	165	802.11a	Phantom	5	12.96	13.00	1.009	0.411	0.415	-0.08

## 15.2. SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

**Table 15.15 SAR Measurement Variability for Body (1g)**

Frequency		Mode /band	Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio
MHz	Ch.						
1850.2	512	GPRS 4TS	Toward Ground	5	0.816	0.848	1.04
1880.0	661	GPRS 4TS	Toward Ground	5	1.040	0.959	1.08

## 16. Measurement Uncertainty

Measurement uncertainty evaluation for SAR test

Error Description	Unc. value, ±%	Prob. Dist.	Div.	c <sub>i</sub> 1g	c <sub>i</sub> 10g	Std.Unc. ±%,1g	Std.Unc. ±%,10g	V <sub>i</sub> V <sub>eff</sub>
<b>Measurement System</b>								
Probe Calibration	6.0	N	1	1	1	6.0	6.0	∞
Axial Isotropy	0.5	R	3	0.7	0.7	0.2	0.2	∞
Hemispherical Isotropy	2.6	R	3	0.7	0.7	1.1	1.1	∞
Boundary Effects	0.8	R	3	1	1	0.5	0.5	∞
Linearity	0.6	R	3	1	1	0.3	0.3	∞
System Detection Limits	1.0	R	3	1	1	0.6	0.6	∞
Readout Electronics	0.7	N	1	1	1	0.7	0.7	∞
Response Time	0	R	3	1	1	0	0	∞
Integration Time	2.6	R	3	1	1	1.5	1.5	∞
RF Ambient Noise	3.0	R	3	1	1	1.7	1.7	∞
RF Ambient Reflections	3.0	R	3	1	1	1.7	1.7	∞
Probe Positioner	1.5	R	3	1	1	0.9	0.9	∞
Probe Positioning	2.9	R	3	1	1	1.7	1.7	∞
Max. SAR Eval.	1.0	R	3	1	1	0.6	0.6	∞
<b>Test Sample Related</b>								
Device Positioning	2.9	N	1	1	1	2.9	2.9	145
Device Holder	3.6	N	1	1	1	3.6	3.6	5
<b>Phantom and Setup</b>								
Phantom Uncertainty	4.0	R	3	1	1	2.3	2.3	∞
Liquid Conductivity (target)	5.0	R	3	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (meas.)	2.5	N	1	0.64	0.43	1.6	1.1	∞
Liquid Permittivity (target)	5.0	R	3	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (meas.)	2.5	N	1	0.6	0.49	1.5	1.2	∞

## Measurement uncertainty evaluation for system validation

Error Description	Unc. value, ±%	Prob. Dist.	Div.	c <sub>i</sub> 1g	c <sub>i</sub> 10g	Std.Unc. ±%,1g	Std.Unc. ±%,10g	V <sub>i</sub> V <sub>eff</sub>
<b>Measurement System</b>								
Probe Calibration	6.0	N	1	1	1	6.0	6.0	∞
Axial Isotropy	0.5	R	3	0.7	0.7	0.2	0.2	∞
Hemispherical Isotropy	2.6	R	3	0.7	0.7	1.1	1.1	∞
Boundary Effects	0.8	R	3	1	1	0.5	0.5	∞
Linearity	0.6	R	3	1	1	0.3	0.3	∞
System Detection Limits	1.0	R	3	1	1	0.6	0.6	∞
Readout Electronics	0.7	N	1	1	1	0.7	0.7	∞
Response Time	0	R	3	1	1	0	0	∞
Integration Time	2.6	R	3	1	1	1.5	1.5	∞
RF Ambient Noise	3.0	R	3	1	1	1.7	1.7	∞
RF Ambient Reflections	3.0	R	3	1	1	1.7	1.7	∞
Probe Positioner	1.5	R	3	1	1	0.9	0.9	∞
Probe Positioning	2.9	R	3	1	1	1.7	1.7	∞
Max. SAR Eval.	1.0	R	3	1	1	0.6	0.6	∞
<b>Dipole</b>								
Power Drift	5.0	R	3	1	1	2.9	2.9	∞
Dipole Positioning	2.0	N	1	1	1	2.0	2.0	∞
Dipole Input Power	5.0	N	1	1	1	5.0	5.0	∞
<b>Phantom and Setup</b>								
Phantom Uncertainty	4.0	R	3	1	1	2.3	2.3	∞
Liquid Conductivity (target)	5.0	R	3	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (meas.)	2.5	N	1	0.64	0.43	1.6	1.1	∞
Liquid Permittivity (target)	5.0	R	3	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (meas.)	2.5	N	1	0.6	0.49	1.5	1.2	∞
<b>Combined Std Uncertainty</b>						±11.2%	±10.9%	387
<b>Expanded Std Uncertainty</b>						±22.4%	±21.8%	



## 17.MAIN TEST INSTRUMENTS

**Table 16.1: List of Main Instruments**

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Probe	EX3DV4	3844	2020-11-05	2021-11-04
02	Probe	EX3DV4	7633	2021-04-09	2022-04-08
02	DAE	DAE4	1329	2021-04-21	2022-04-20
03	DAE	DAE4	1244	2021-03-23	2022-03-22
04	Power Meter	N1914A	MY50001660	2021-05-12	2022-05-11
05	Radio Communication Analyzer	CMW500	164483	2021-05-12	2022-05-11
06	Radio Communication Analyzer	CMU200	122816	2021-05-12	2022-05-11
07	Radio Communication Analyzer	SP8315	SP8315-1295	2021-06-06	2022-06-05
08	Signal Generator	N5181A	MY50143363	2021-05-12	2022-05-11
09	Power Sensor	E8481H	MY51020011	2021-05-12	2022-05-11
10	Power Amplifier	ZHL	QA1202003	2021-05-12	2022-05-11
11	Attenuator	8491A	MY39267989	2021-05-12	2022-05-11
12	Probe kit	85070E	3G-S-00139	NA	NA
13	Network Analyzer	E5071C	US39175666	2021-05-12	2022-05-11
14	D750V3	dipole	1037	2021-04-17	2022-04-16
15	D835V2	dipole	4d135	2020-10-16	2021-10-15
16	D1750V2	dipole	1063	2020-10-15	2021-10-14
17	D1900V2	dipole	5d153	2020-10-14	2021-10-13
18	D2450V2	dipole	886	2020-10-13	2021-10-12
19	D5GHzV2	dipole	1172	2021-03-23	2022-03-22

\*\*\*END OF REPORT BODY\*\*\*

## ANNEX A. GRAPH RESULTS

### GPRS 1900MHz 4TS Body Toward Ground Middle

Date/Time: 2021/6/24

Electronics: DAE4 Sn1329

Medium: Head 1900MHz

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.406 \text{ S/m}$ ;  $\epsilon_r = 39.288$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5^\circ\text{C}$  Liquid Temperature:  $22.5^\circ\text{C}$

Communication System: GPRS 4TS; Frequency:  $1880 \text{ MHz}$ ; Duty Cycle: 1:8.3

Probe: EX3DV4 - SN3844ConvF(8.06, 8.06, 8.06)

#### Middle Toward Ground GPRS 1900 4TS/Area Scan (7x10x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $1.03 \text{ W/kg}$

#### Middle Toward Ground GPRS 1900 4TS/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $23.46 \text{ V/m}$ ; Power Drift =  $0.19 \text{ dB}$

Peak SAR (extrapolated) =  $1.61 \text{ W/kg}$

SAR(1 g) =  $1.04 \text{ W/kg}$ ; SAR(10 g) =  $0.603 \text{ W/kg}$

Maximum value of SAR (measured) =  $1.11 \text{ W/kg}$

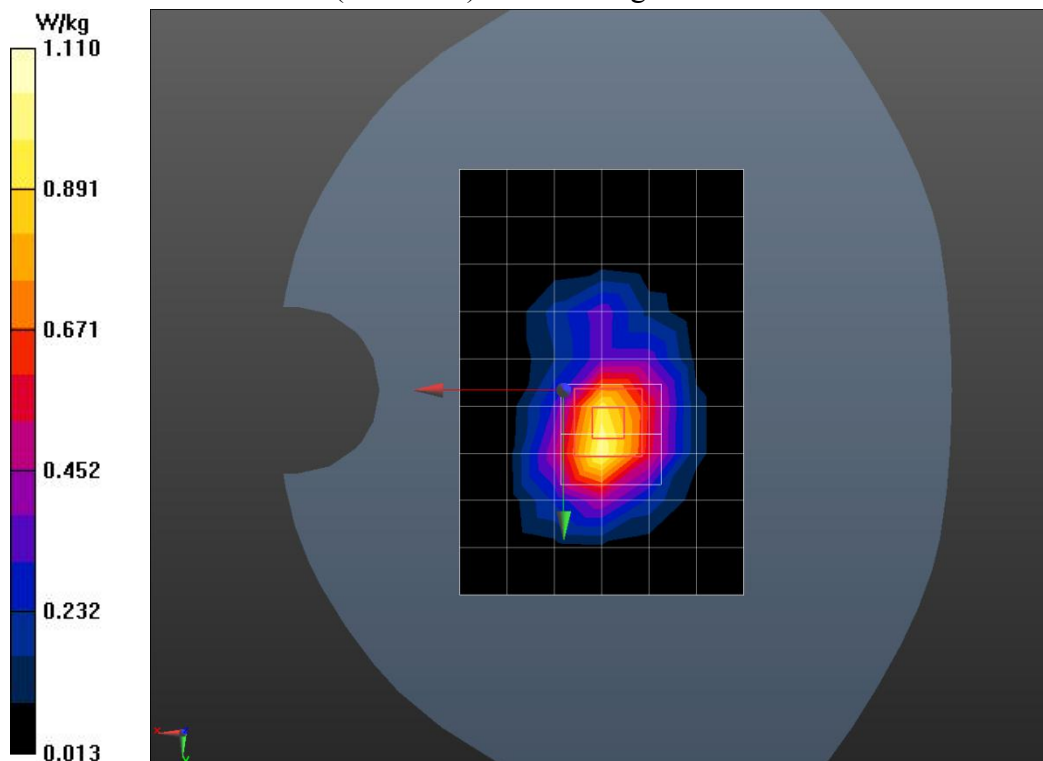

### Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336

Tel: 0086-23-88069965

FAX: 0086-23-88608777

## CATM Band 2 15MHz 6RB Body Toward Ground High

Date/Time: 2021/6/24

Electronics: DAE4 Sn1329

Medium: Head 1900MHz

Medium parameters used (interpolated):  $f = 1902.5$  MHz;  $\sigma = 1.429$  S/m;  $\epsilon_r = 39.211$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature:22.5°C

Liquid Temperature:22.5°C

Communication System: CATM Band 2; Frequency: 1902.5 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3844ConvF(8.06, 8.06, 8.06)

### High Toward Ground CATM Band 2 15MHz 6RB/Area Scan (6x8x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.200 W/kg

### High Toward Ground CATM Band 2 15MHz 6RB/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.87 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.203 W/kg

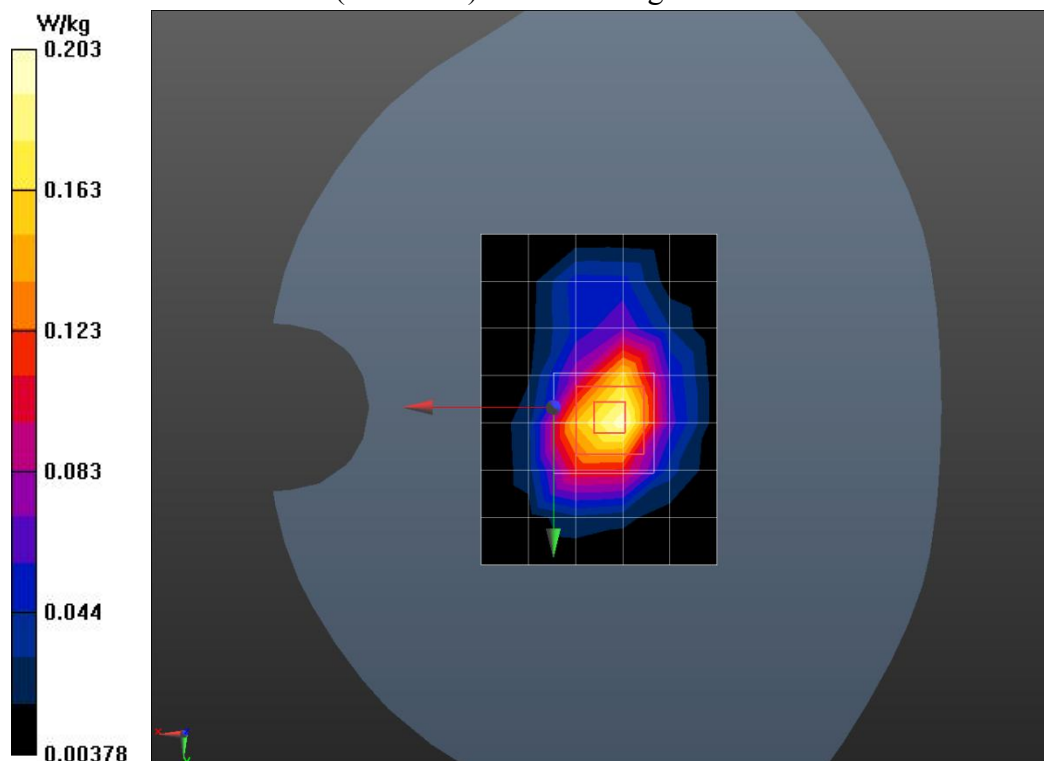

## Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336

Tel: 0086-23-88069965

FAX:0086-23-88608777

## CATM Band 4 15MHz 6RB Body Toward Phantom High

Date/Time: 2021/6/25

Electronics: DAE4 Sn1329

Medium: Head 1750MHz

Medium parameters used (interpolated):  $f = 1747.5$  MHz;  $\sigma = 1.382$  S/m;  $\epsilon_r = 39.334$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature:22.5°C

Liquid Temperature:22.5°C

Communication System: CATM Band 4 ; Frequency: 1747.5 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3844ConvF(8.48, 8.48, 8.48)

### High Toward Ground CATM Band 4 15MHz 6RB/Area Scan (6x8x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.175 W/kg

### High Toward Ground CATM Band 4 15MHz 6RB/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 12.08 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.270 W/kg

SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.114 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Maximum value of SAR (measured) = 0.206 W/kg

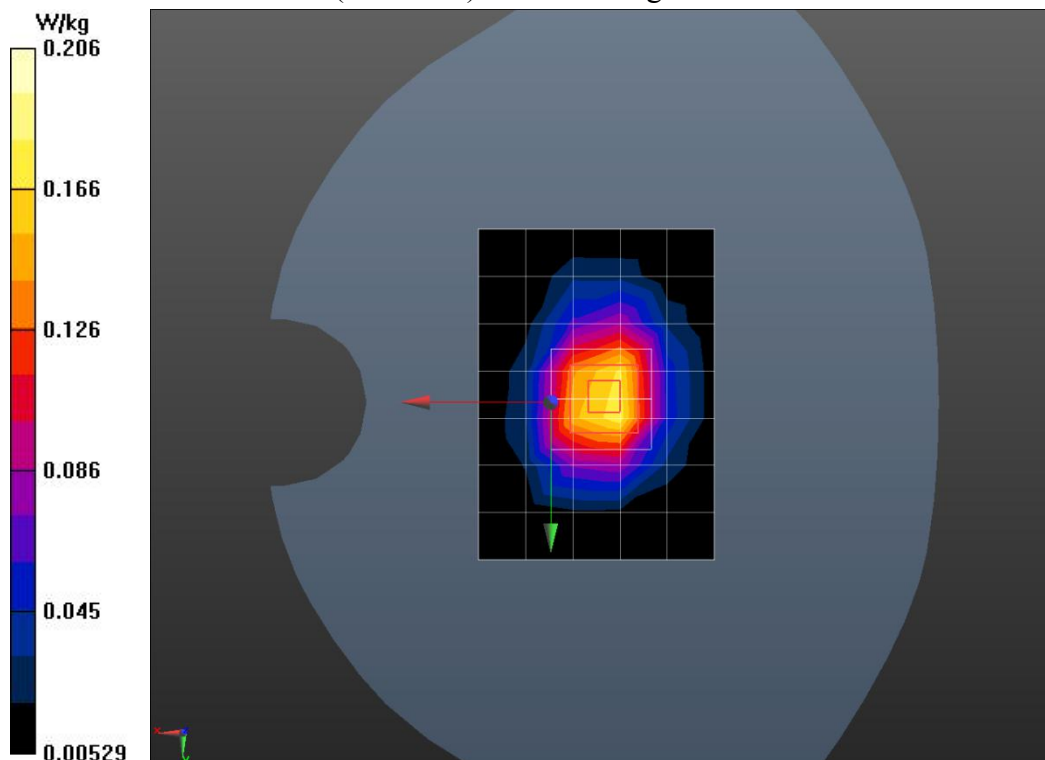

## Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336

Tel: 0086-23-88069965

FAX:0086-23-88608777

## CATM Band 5 10MHz 1RB Body Toward Ground Middle

Date/Time: 2021/6/30

Electronics: DAE4 Sn1329

Medium: Head 900MHz

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.903$  S/m;  $\epsilon_r = 40.976$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature:22.5°C

Liquid Temperature:22.5°C

Communication System: CATM Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3844ConvF(9.5, 9.5, 9.5)

### Middle Toward Ground CATM Band 5 10MHz 1RB/Area Scan (6x8x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0855 W/kg

### Middle Toward Ground CATM Band 5 10MHz 1RB/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.497 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.0838 W/kg

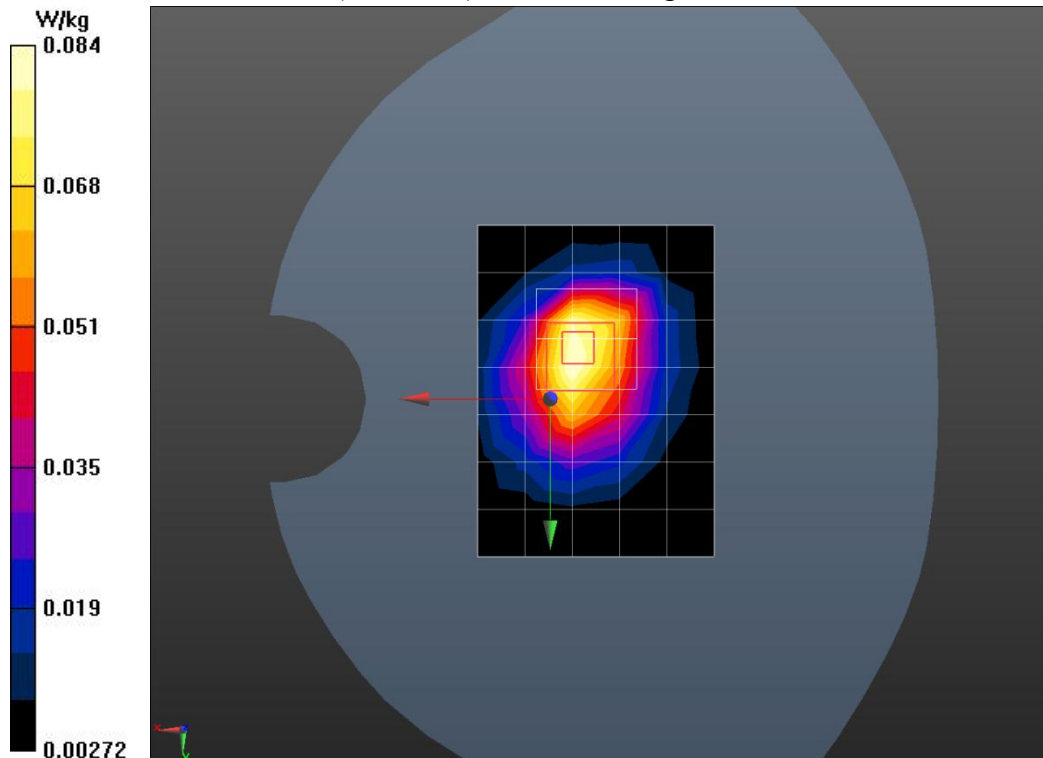

## Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336

Tel: 0086-23-88069965

FAX:0086-23-88608777

## CATM Band 12 1.4MHz 1RB Body Toward Ground Low

Date/Time: 2021/7/1

Electronics: DAE4 Sn1329

Medium: Head 750MHz

Medium parameters used:  $f = 700 \text{ MHz}$ ;  $\sigma = 0.865 \text{ S/m}$ ;  $\epsilon_r = 41.817$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5^\circ\text{C}$

Liquid Temperature:  $22.5^\circ\text{C}$

Communication System: CATM Band 12; Frequency:  $699.7 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: EX3DV4 - SN3844ConvF(9.8, 9.8, 9.8)

### Low Toward Ground CATM Band 12 1.4MHz 1RB/Area Scan (7x9x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $0.0755 \text{ W/kg}$

### Low Toward Ground CATM Band 12 1.4MHz 1RB/Zoom Scan (7x7x7)/Cube 0:


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $8.297 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$

Peak SAR (extrapolated) =  $0.139 \text{ W/kg}$

SAR(1 g) =  $0.077 \text{ W/kg}$ ; SAR(10 g) =  $0.048 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.0841 \text{ W/kg}$

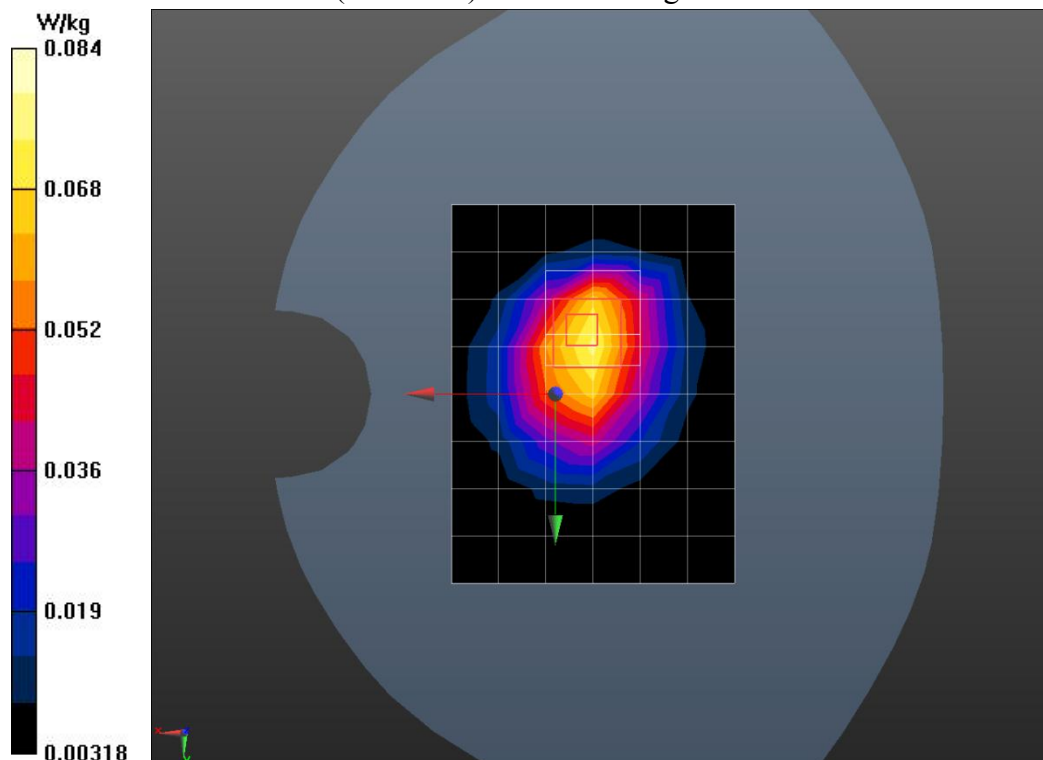

## Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336

Tel: 0086-23-88069965

FAX: 0086-23-88608777

## CATM Band 13 10MHz 1RB Body Toward Ground High

Date/Time: 2021/7/1

Electronics: DAE4 Sn1329

Medium: Head 750MHz

Medium parameters used (interpolated):  $f = 782.5$  MHz;  $\sigma = 0.936$  S/m;  $\epsilon_r = 40.219$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature:22.5°C

Liquid Temperature:22.5°C

Communication System:CATM Band 13; Frequency: 782.5 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3844ConvF(9.5, 9.5, 9.5)

### High Toward Ground CATM Band 13 10MHz 1RB/Area Scan (9x13x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0501 W/kg

### High Toward Ground CATM Band 13 10MHz 1RB/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.500 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0850 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.0528 W/kg

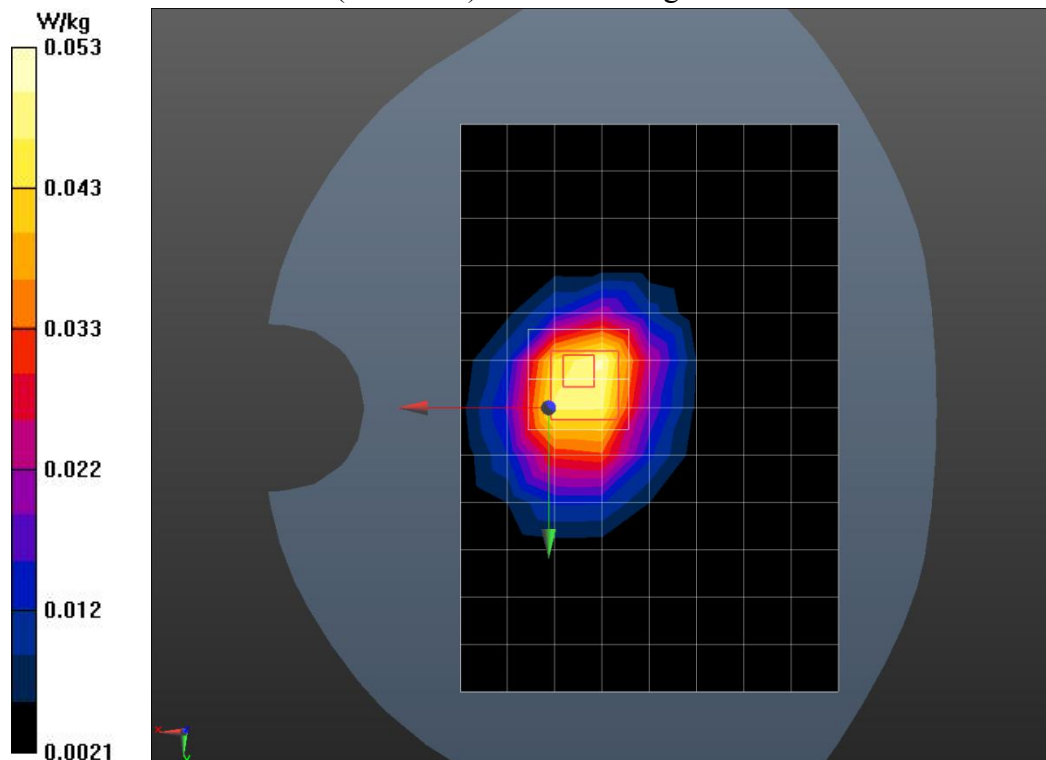

## Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336

Tel: 0086-23-88069965

FAX:0086-23-88608777

## WIFI 802.11b Body Toward Top Ground Low

Date/Time: 2021/7/8

Electronics: DAE4 Sn1329

Medium: Head 2450MHz

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.787$  S/m;  $\epsilon_r = 38.353$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature:22.5°C Liquid Temperature:22.5°C

Communication System: Wi-Fi; Frequency: 2412 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3844ConvF(7.38, 7.38, 7.38)

**Low Top 11b 11Mpsk With 5mm/Area Scan (6x8x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.453 W/kg

**Low Top 11b 11Mpsk With 5mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


$dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 13.01 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.877 W/kg

SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 0.481 W/kg

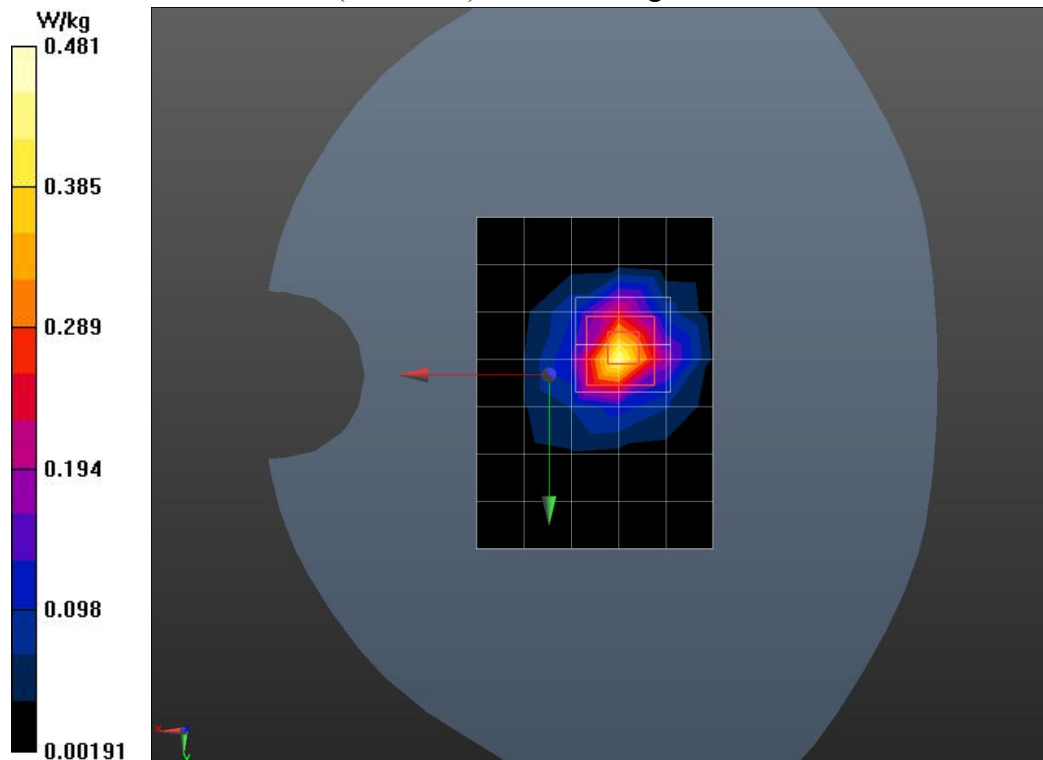

## Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336

Tel: 0086-23-88069965

FAX:0086-23-88608777



## Wi-Fi5G UNII-1 11a Toward Phantom Low

Date/Time: 2021/7/23

Electronics: DAE4 Sn1244

Medium parameters used:  $f = 5180$  MHz;  $\sigma = 4.545$  S/m;  $\epsilon_r = 37.254$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature:21.3°C Liquid Temperature:21.3°C

Communication System: 5GHz U-NII-1; Frequency: 5180 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(5.78, 5.78, 5.78)

### Wi-Fi5G UNII-1 11a Front Mode Low 5mm/Area Scan (41x81x1):

Measurement grid:  $dx=10$  mm,  $dy=10$  mm

Maximum value of SAR (Measurement) = 0.371 W/kg

### Wi-Fi5G UNII-1 11a Front Mode Low 5mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 4.814 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.059 W/kg

Maximum of SAR (measured) = 0.331 W/kg

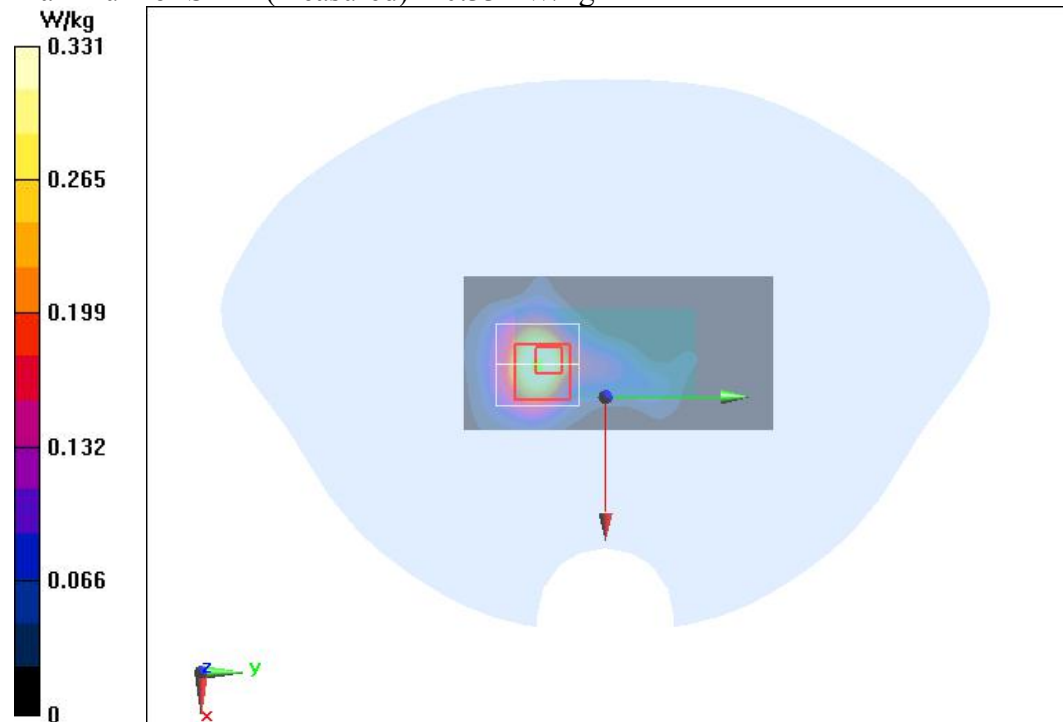

## Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336

Tel: 0086-23-88069965

FAX:0086-23-88608777

## Wi-Fi5G UNII-3 11a Toward Phantom Middle

Date/Time: 2021/7/23

Electronics: DAE4 Sn1244

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.209$  S/m;  $\epsilon_r = 36.117$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature:21.3°C Liquid Temperature:21.3°C

Communication System: 5GHz U-NII-3; Frequency: 5785 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(5.18, 5.18, 5.18)

### Wi-Fi5G UNII-3 11a Front Mode Middle 5mm/Area Scan (41x81x1):

Measurement grid:  $dx=10$  mm,  $dy=10$  mm

Maximum value of SAR (Measurement) = 0.885 W/kg

### Wi-Fi5G UNII-3 11a Front Mode Middle 5mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 8.578 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 0.458 W/kg; SAR(10 g) = 0.135 W/kg

Maximum of SAR (measured) = 1.11 W/kg

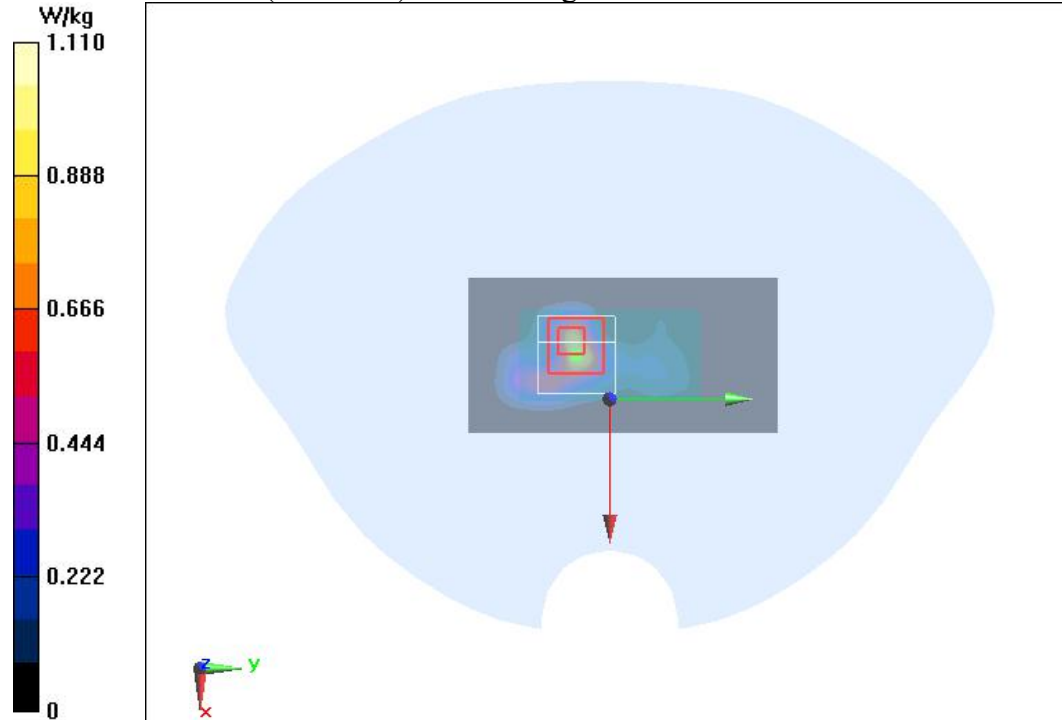

## Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336

Tel: 0086-23-88069965

FAX:0086-23-88608777

## ANNEX B. SYSTEM VALIDATION RESULTS

### System 750MHz

Date/Time: 2021/7/1

Electronics: DAE4 Sn1329

Medium: Head 750MHz

Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.902 \text{ S/m}$ ;  $\epsilon_r = 40.717$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5^\circ\text{C}$  Liquid Temperature:  $22.5^\circ\text{C}$

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3844ConvF(9.5, 9.5, 9.5)

**System Check Dipole 750 MHz/Area Scan (7x21x1):** Measurement grid:

$dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.60 W/kg

**System Check Dipole 750 MHz/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


$dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 55.83 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.22 W/kg

SAR(1 g) = 2.07 W/kg; SAR(10 g) = 1.32 W/kg

Maximum value of SAR (measured) = 2.27 W/kg

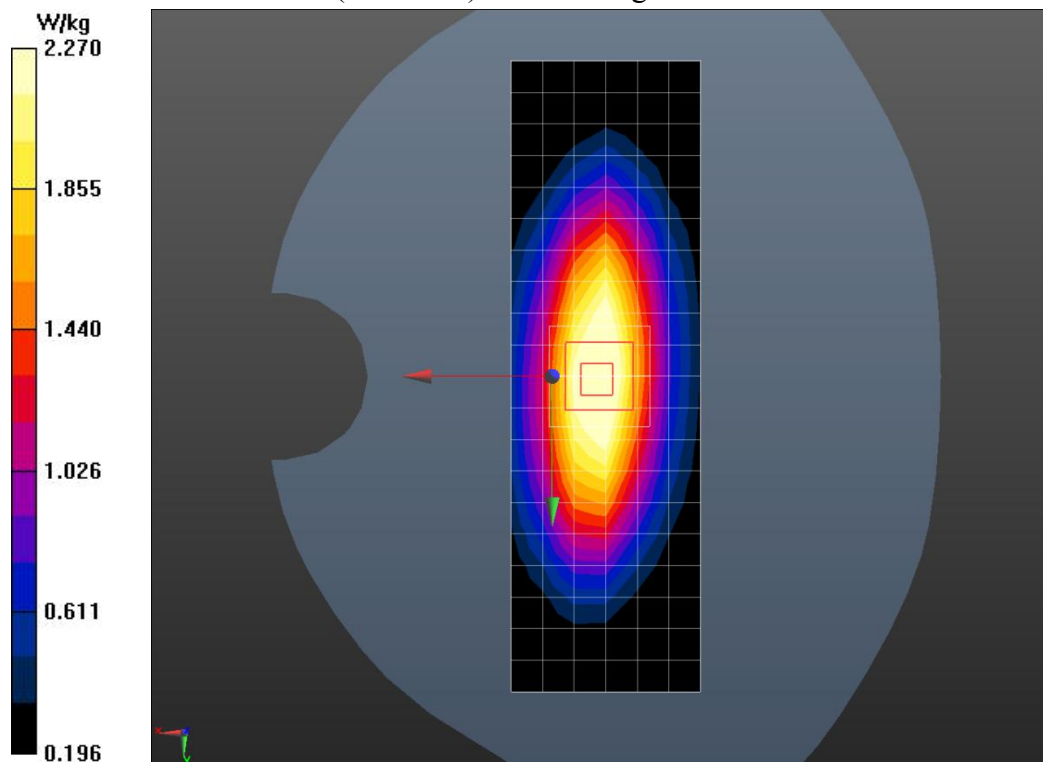

### Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336

Tel: 0086-23-88069965

FAX: 0086-23-88608777

## System 835MHz

Date/Time: 2021/6/30

Electronics: DAE4 Sn1329

Medium: Head 835MHz

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.902 \text{ S/m}$ ;  $\epsilon_r = 40.993$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5^\circ\text{C}$  Liquid Temperature:  $22.5^\circ\text{C}$

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3844ConvF(9.5, 9.5, 9.5)

**System Check Dipole 835 MHz/Area Scan (5x18x1):** Measurement grid:

$dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.49 W/kg

**System Check Dipole 835 MHz/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


$dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 53.43 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.58 W/kg

SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.55 W/kg

Maximum value of SAR (measured) = 2.58 W/kg

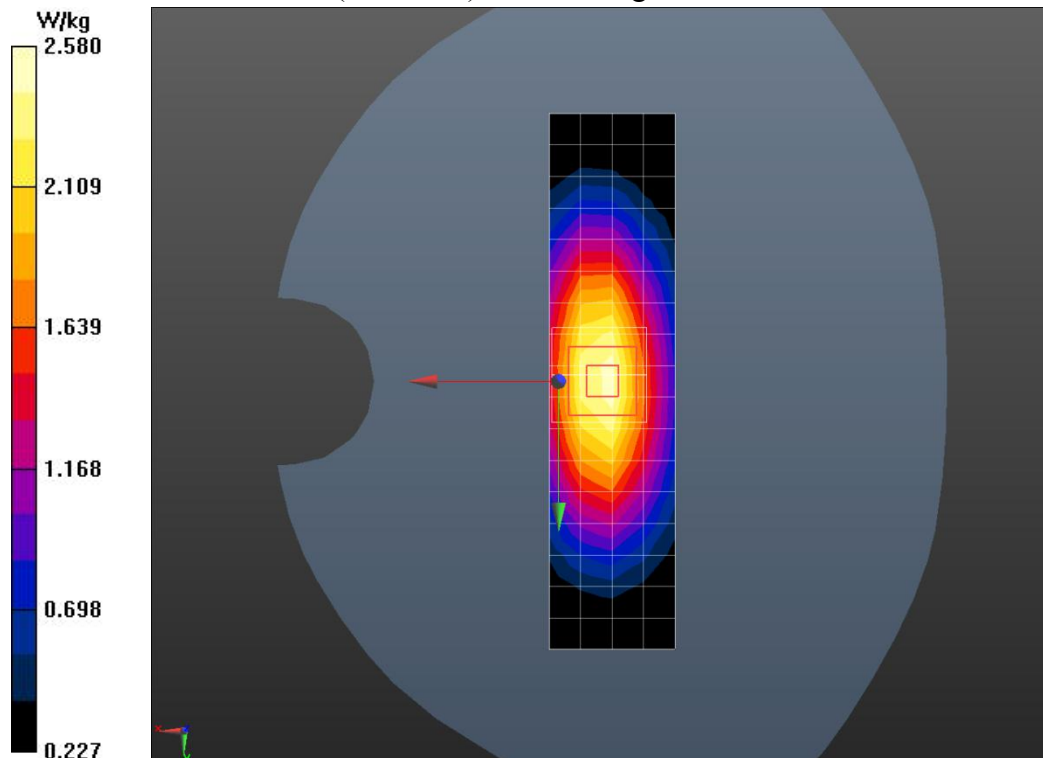

## Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336

Tel: 0086-23-88069965

FAX: 0086-23-88608777

## System 1750MHz

Date/Time: 2021/6/25

Electronics: DAE4 Sn1329

Medium: Head 1750MHz

Medium parameters used:  $f = 1750 \text{ MHz}$ ;  $\sigma = 1.384 \text{ S/m}$ ;  $\epsilon_r = 39.328$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5^\circ\text{C}$  Liquid Temperature:  $22.5^\circ\text{C}$

Communication System: CW ; Frequency: 1750 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3844ConvF(8.48, 8.48, 8.48)

**System Head 1750MHz/Area Scan (6x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $9.42 \text{ W/kg}$

**System Head 1750MHz/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


$dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $83.82 \text{ V/m}$ ; Power Drift =  $-0.19 \text{ dB}$

Peak SAR (extrapolated) =  $14.7 \text{ W/kg}$

SAR(1 g) =  $8.31 \text{ W/kg}$ ; SAR(10 g) =  $4.51 \text{ W/kg}$

Maximum value of SAR (measured) =  $9.34 \text{ W/kg}$

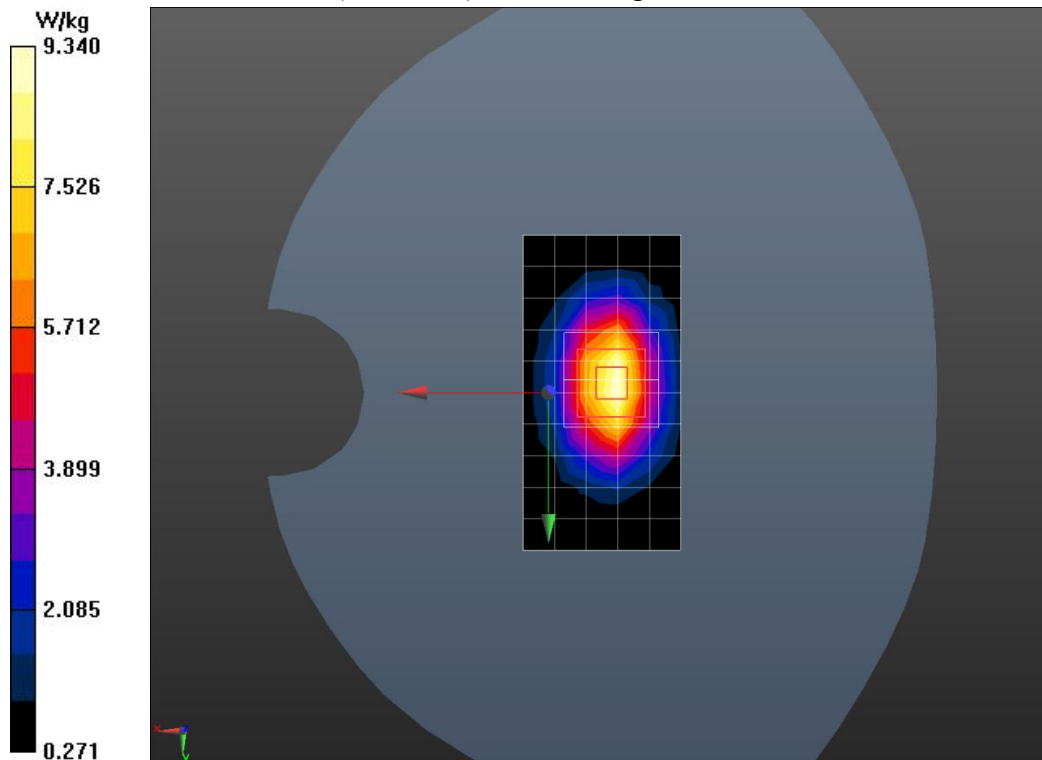

## Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336

Tel: 0086-23-88069965

FAX:0086-23-88608777

## System 1900MHz

Date/Time: 2021/6/24

Electronics: DAE4 Sn1329

Medium: Head 1900MHz

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.426 \text{ S/m}$ ;  $\epsilon_r = 39.218$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5^\circ\text{C}$  Liquid Temperature:  $22.5^\circ\text{C}$

Communication System: CW ; Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3844ConvF(8.06, 8.06, 8.06)

**System Head 1900MHz/Area Scan (5x9x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 11.0 W/kg

**System Head 1900MHz/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


$dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 88.07 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 17.9 W/kg

SAR(1 g) = 9.9 W/kg; SAR(10 g) = 5.2 W/kg

Maximum value of SAR (measured) = 11.0 W/kg

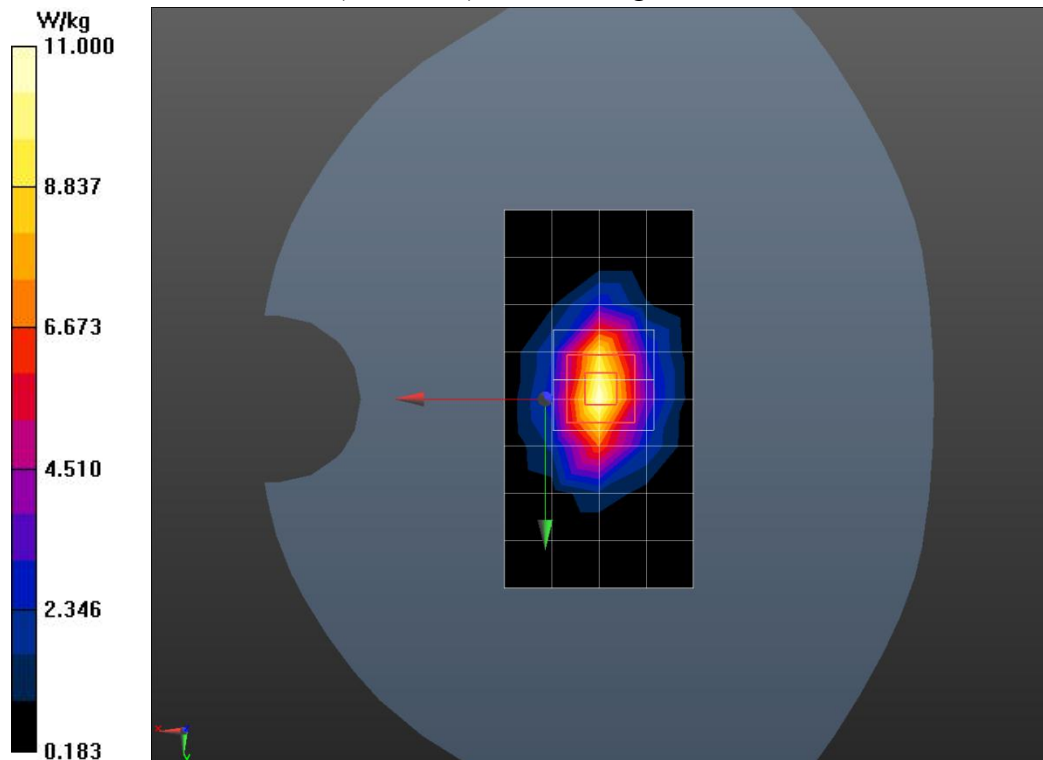

## Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336

Tel: 0086-23-88069965

FAX:0086-23-88608777

## System 2450MHz

Date/Time: 2021/7/8

Electronics: DAE4 Sn1329

Medium: Head 2450MHz

Medium parameters used:  $f = 2450 \text{ MHz}$ ;  $\sigma = 1.831 \text{ S/m}$ ;  $\epsilon_r = 38.258$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5^\circ\text{C}$  Liquid Temperature:  $22.5^\circ\text{C}$

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3844ConvF(7.38, 7.38, 7.38)

**System Check Dipole 2450 MHz/Area Scan (6x9x1):** Measurement grid:

$dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (measured) = 14.5 W/kg

**System Check Dipole 2450 MHz/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


$dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 86.20 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 26.4 W/kg

SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.78 W/kg

Maximum value of SAR (measured) = 14.4 W/kg

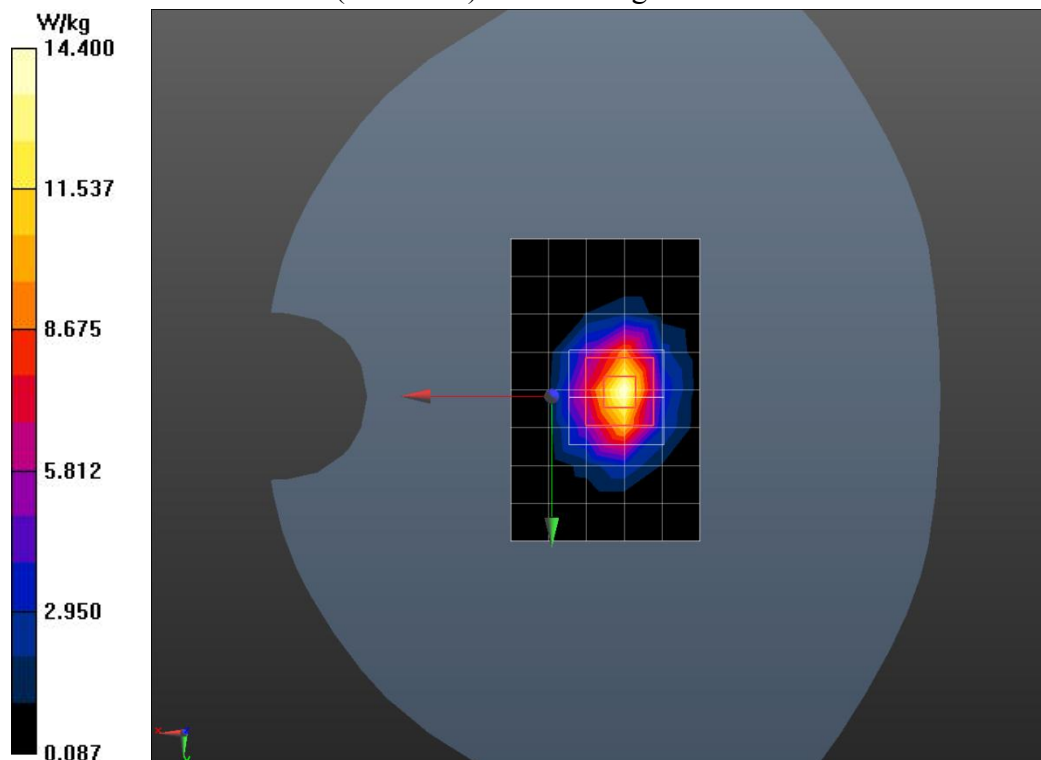

## Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336

Tel: 0086-23-88069965

FAX: 0086-23-88608777

## System 5800MHz

Date/Time: 2021/7/23

Electronics: DAE4 Sn1244

Medium parameters used:  $f = 5800 \text{ MHz}$ ;  $\sigma = 5.257 \text{ S/m}$ ;  $\epsilon_r = 36.025$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.3^\circ\text{C}$  Liquid Temperature:  $21.3^\circ\text{C}$

Communication System: CW 600MHz-6GHz; Frequency: 5800 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(5.18, 5.18, 5.18)

### System Cheek Head 5800MHz/Area Scan (91x91x1):

Measurement grid:  $dx=10 \text{ mm}$ ,  $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) =  $19.5 \text{ W/kg}$

### System Cheek Head 5800MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (7x7x7)/Cube 0:


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $55.24 \text{ V/m}$ ; Power Drift =  $0.05 \text{ dB}$

Peak SAR (extrapolated) =  $32.8 \text{ W/kg}$

SAR(1 g) =  $7.38 \text{ W/kg}$ ; SAR(10 g) =  $2.07 \text{ W/kg}$

Maximum of SAR (measured) =  $19.6 \text{ W/kg}$

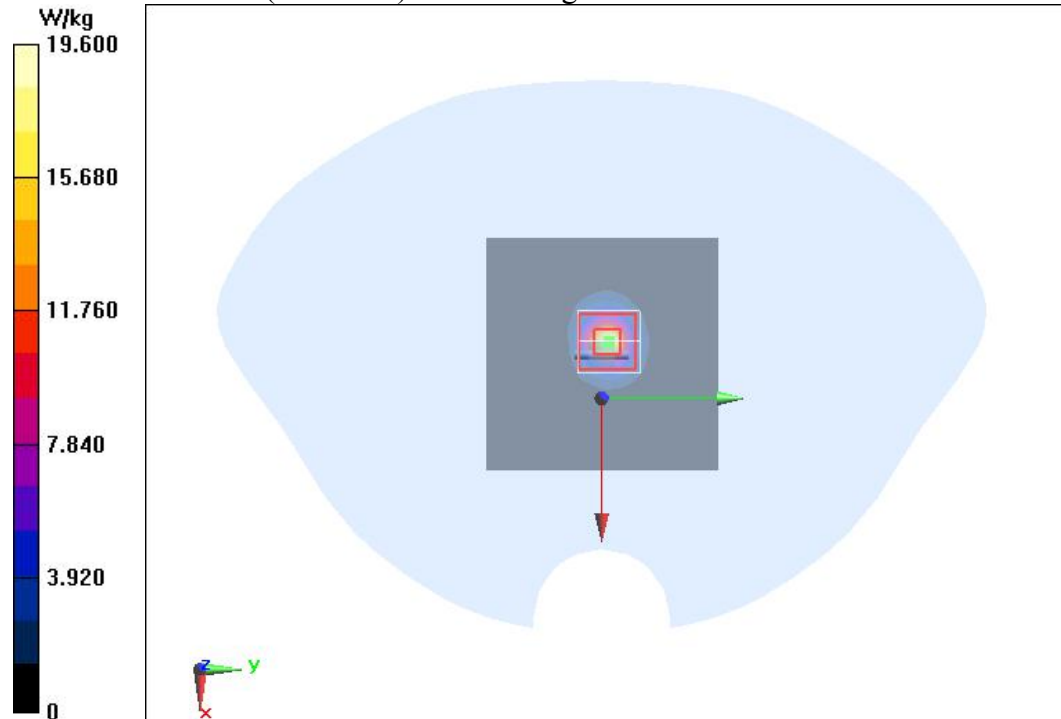

## Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336

Tel: 0086-23-88069965

FAX: 0086-23-88608777



## System 5200MHz

Date/Time: 2021/7/23

Electronics: DAE4 Sn1244

Medium parameters used (interpolated):  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.819 \text{ S/m}$ ;

$\epsilon_r = 35.172$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.3^\circ\text{C}$  Liquid Temperature:  $21.3^\circ\text{C}$

Communication System: 600MHz-6GHz; Frequency: 5200 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(5.78, 5.78, 5.78)

### System Cheek Head 5200MHz/Area Scan (71x71x1):

Measurement grid:  $dx=10 \text{ mm}$ ,  $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) =  $18.5 \text{ W/kg}$

### System Cheek Head 5200MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $60.21 \text{ V/m}$ ; Power Drift =  $0.10 \text{ dB}$

Peak SAR (extrapolated) =  $31.9 \text{ W/kg}$

SAR(1 g) =  $7.69 \text{ W/kg}$ ; SAR(10 g) =  $2.19 \text{ W/kg}$

Maximum of SAR (measured) =  $19.3 \text{ W/kg}$

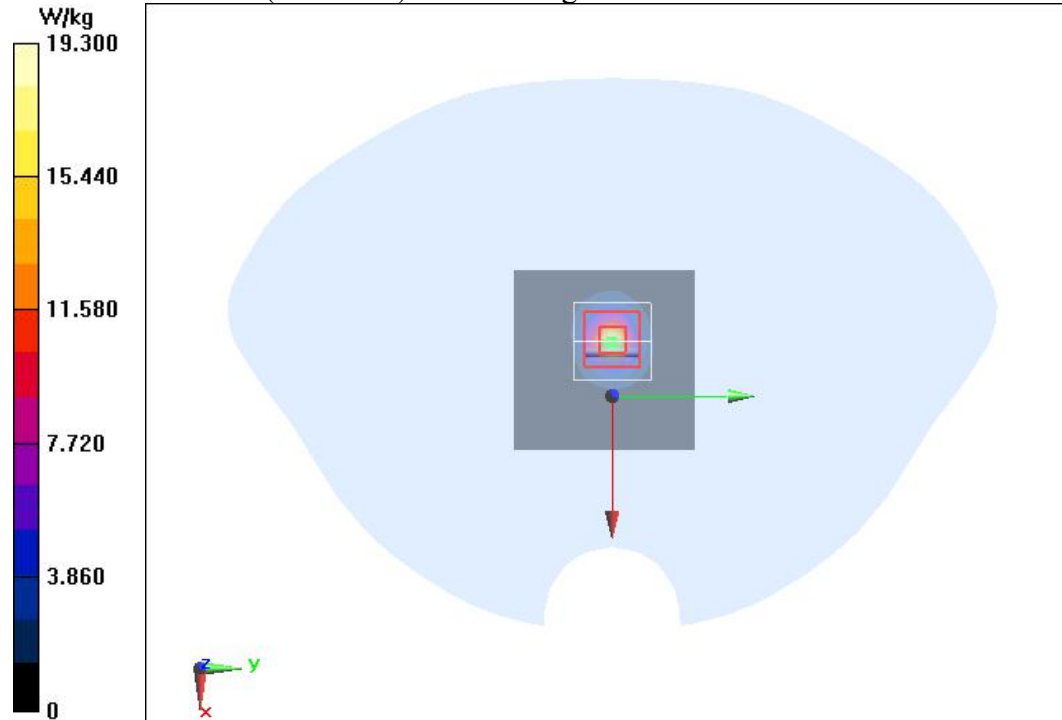

## Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336

Tel: 0086-23-88069965

FAX: 0086-23-88608777

## ANNEX C. CALIBRATION REPORT



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: ctt@chinatti.com <http://www.chinatti.cn>




中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570

Client : **CATR(Chongqing)** Certificate No: **Z21-60150**

<b>CALIBRATION CERTIFICATE</b>											
Object	DAE4 - SN: 1329										
Calibration Procedure(s)	FF-Z11-002-01 Calibration Procedure for the Data Acquisition Electronics (DAEx)										
Calibration date:	April 21, 2021										
<p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity&lt;70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 25%;">Primary Standards</th> <th style="width: 15%;">ID #</th> <th style="width: 40%;">Cal Date(Calibrated by, Certificate No.)</th> <th style="width: 20%;">Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td style="padding: 5px;">Process Calibrator 753</td> <td style="padding: 5px;">1971018</td> <td style="padding: 5px;">16-Jun-20 (CTTL, No.J20X04342)</td> <td style="padding: 5px;">Jun-21</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration	Process Calibrator 753	1971018	16-Jun-20 (CTTL, No.J20X04342)	Jun-21
Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration								
Process Calibrator 753	1971018	16-Jun-20 (CTTL, No.J20X04342)	Jun-21								
Calibrated by:	Name Yu Zongying	Function SAR Test Engineer	Signature 								
Reviewed by:	Lin Hao	SAR Test Engineer									
Approved by:	Qi Dianyuan	SAR Project Leader									
<p>Issued: April 23, 2021</p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p>											



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

**Glossary:**

DAE data acquisition electronics  
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

**Methods Applied and Interpretation of Parameters:**

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
 E-mail: cttl@chinattl.com Http://www.chinattl.cn

### DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 $\mu$ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.342 $\pm$ 0.15% (k=2)	404.470 $\pm$ 0.15% (k=2)	404.065 $\pm$ 0.15% (k=2)
Low Range	3.99919 $\pm$ 0.7% (k=2)	3.99544 $\pm$ 0.7% (k=2)	4.00132 $\pm$ 0.7% (k=2)

### Connector Angle

Connector Angle to be used in DASY system	104 $^{\circ}$ $\pm$ 1 $^{\circ}$
---	-----------------------------------

In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cnClient : **3in**Certificate No: **Z21-60060****CALIBRATION CERTIFICATE**Object **DAE4 - SN: 1244**Calibration Procedure(s) **FF-Z11-002-01**  
Calibration Procedure for the Data Acquisition Electronics  
(DAEx)Calibration date: **March 23, 2021**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&amp;TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
-------------------	------	--	-----------------------

Process Calibrator 753	1971018	16-Jun-20 (CTTL, No.J20X04342)	Jun-21
------------------------	---------	--------------------------------	--------

	Name	Function
Calibrated by:	Yu Zongying	SAR Test Engineer
Reviewed by:	Lin Hao	SAR Test Engineer
Approved by:	Qi Dianyuan	SAR Project Leader

Signature

Issued: March 25, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z21-60060

Page 1 of 3

**Chongqing Academy of Information and Communication Technology**Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336  
Tel: 0086-23-88069965 FAX:0086-23-88608777



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

**Glossary:**

DAE data acquisition electronics  
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

**Methods Applied and Interpretation of Parameters:**

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.





Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

**DC Voltage Measurement**

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 $\mu$ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	403.865 $\pm$ 0.15% (k=2)	403.596 $\pm$ 0.15% (k=2)	404.512 $\pm$ 0.15% (k=2)
Low Range	3.95292 $\pm$ 0.7% (k=2)	3.97071 $\pm$ 0.7% (k=2)	3.97935 $\pm$ 0.7% (k=2)

**Connector Angle**

Connector Angle to be used in DASY system	23.5° $\pm$ 1 °
---	-----------------



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY



中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

Client **CATR(Chongqing)**

Certificate No: **Z20-60408**

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN : 3844**

Calibration Procedure(s) **FF-Z11-004-02**  
**Calibration Procedures for Dosimetric E-field Probes**




Calibration date: **November 05, 2020**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	16-Jun-20(CTTL, No.J20X04344)	Jun-21
Power sensor NRP-Z91	101547	16-Jun-20(CTTL, No.J20X04344)	Jun-21
Power sensor NRP-Z91	101548	16-Jun-20(CTTL, No.J20X04344)	Jun-21
Reference 10dBAttenuator	18N50W-10dB	10-Feb-20(CTTL, No.J20X00525)	Feb-22
Reference 20dBAttenuator	18N50W-20dB	10-Feb-20(CTTL, No.J20X00526)	Feb-22
Reference Probe EX3DV4	SN 7307	29-May-20(SPEAG, No.EX3-7307_May20)	May-21
DAE4	SN 1556	4-Feb-20(SPEAG, No.DAE4-1556_Feb20)	Feb-21
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGenerator MG3700A	6201052605	23-Jun-20(CTTL, No.J20X04343)	Jun-21
Network Analyzer E5071C	MY46110673	10-Feb-20(CTTL, No.J20X00515)	Feb-21

	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: November 07, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z20-60408

Page 1 of 9

## Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336  
Tel: 0086-23-88069965 FAX:0086-23-88608777





Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization $\Phi$	$\Phi$ rotation around probe axis
Polarization $\theta$	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i $\theta=0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>: Assessed for E-field polarization  $\theta=0$  ( $f \leq 900\text{MHz}$  in TEM-cell;  $f > 1800\text{MHz}$ : waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM( $f$ )<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A,B,C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800\text{MHz}$ ) and inside waveguide using analytical field distributions based on power measurements for  $f > 800\text{MHz}$ . The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50\text{MHz}$  to  $\pm 100\text{MHz}$ .
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

Certificate No:Z20-60408

Page 2 of 9

## Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336  
Tel: 0086-23-88069965 FAX:0086-23-88608777



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com <http://www.chinattl.cn>

## DASY/EASY – Parameters of Probe: EX3DV4 – SN:3844

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc ( $k=2$ )
Norm( $\mu V/(V/m)^2$ ) <sup>A</sup>	0.48	0.41	0.19	$\pm 10.0\%$
DCP(mV) <sup>B</sup>	103.0	102.7	97.2	

### Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB· $\mu V$	C	D dB	VR mV	Unc <sup>E</sup> ( $k=2$ )
0	CW	X	0.0	0.0	1.0	0.00	167.5	$\pm 2.3\%$
		Y	0.0	0.0	1.0		150.0	
		Z	0.0	0.0	1.0		88.3	

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution Corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X, Y, Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 4).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

## DASY/EASY – Parameters of Probe: EX3DV4 – SN:3844

### Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz] <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
835	41.5	0.90	9.50	9.50	9.50	0.15	1.31	±12.1%
900	41.5	0.97	9.46	9.46	9.46	0.17	1.26	±12.1%
1750	40.1	1.37	8.48	8.48	8.48	0.24	1.07	±12.1%
1900	40.0	1.40	8.06	8.06	8.06	0.25	1.07	±12.1%
2300	39.5	1.67	7.76	7.76	7.76	0.38	0.87	±12.1%
2450	39.2	1.80	7.38	7.38	7.38	0.33	1.03	±12.1%
2600	39.0	1.96	7.34	7.34	7.34	0.46	0.81	±12.1%

<sup>C</sup> Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


<sup>F</sup> At frequency below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
 E-mail: cttl@chinattl.com Http://www.chinattl.cn

## Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

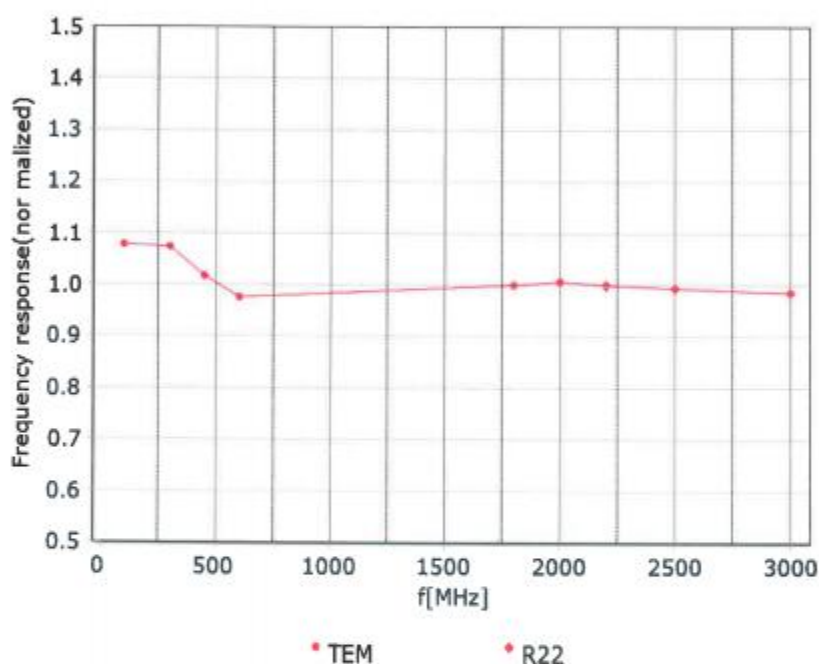

Uncertainty of Frequency Response of E-field:  $\pm 7.4\%$  ( $k=2$ )








Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

## Receiving Pattern ( $\Phi$ ), $\theta=0^\circ$

**f=600 MHz, TEM**



**f=1800 MHz, R22**

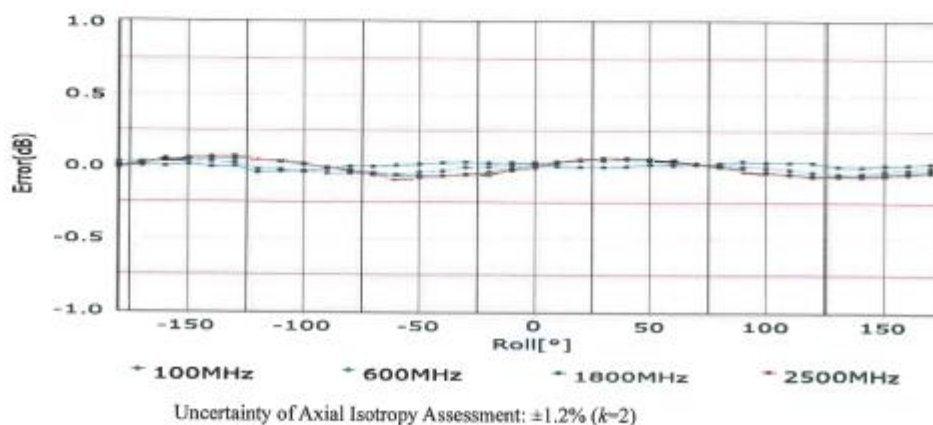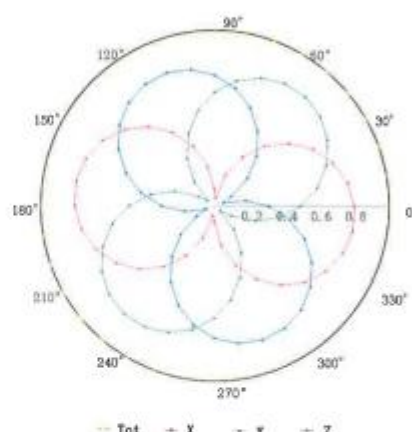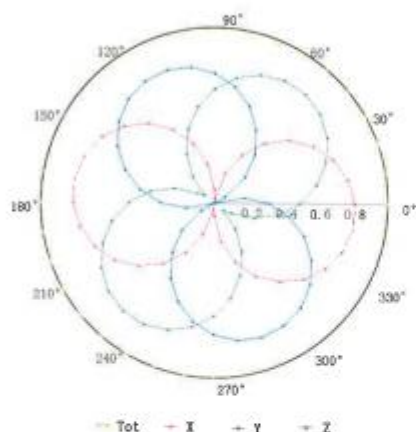



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

### Dynamic Range f(SAR<sub>head</sub>) (TEM cell, f = 900 MHz)

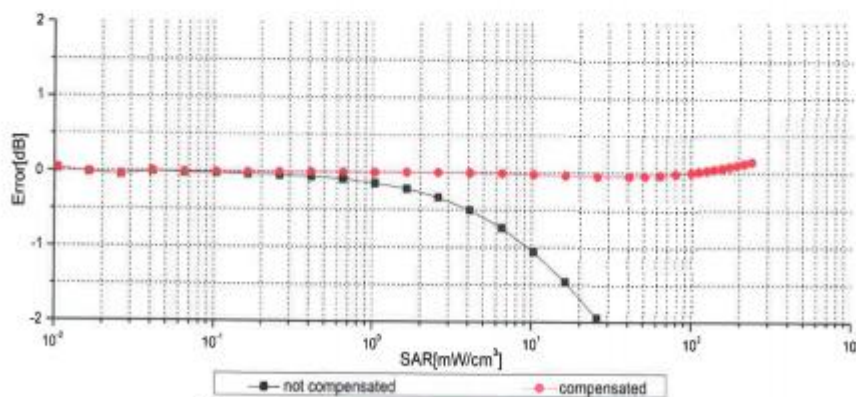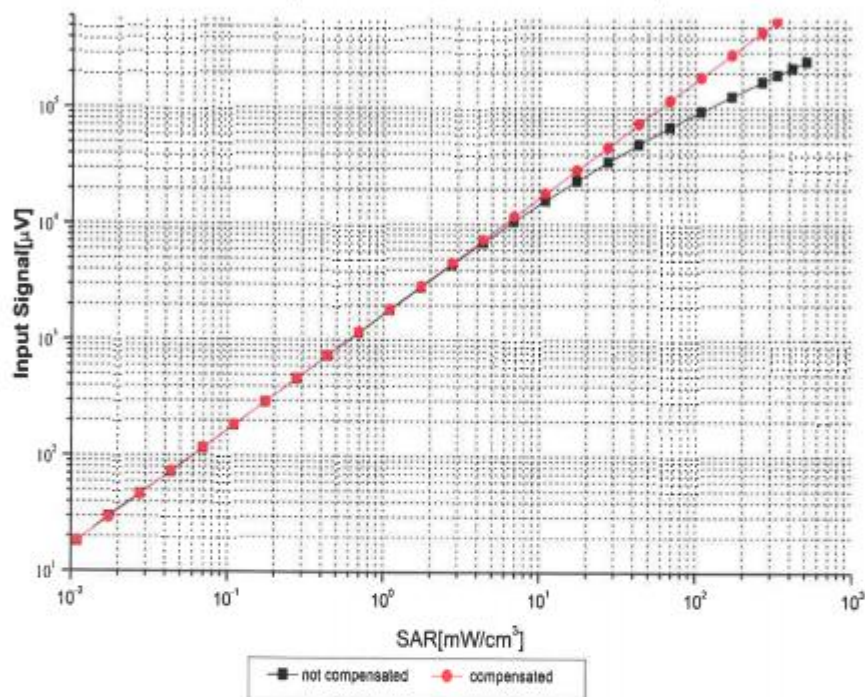

Uncertainty of Linearity Assessment:  $\pm 0.9\%$  ( $k=2$ )

Certificate No:Z20-60408

Page 7 of 9

### Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336  
Tel: 0086-23-88069965 FAX:0086-23-88608777





Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)


## Conversion Factor Assessment

**f=835 MHz,WGLS R9(H\_convF)**

**f=1750 MHz,WGLS R22(H\_convF)**

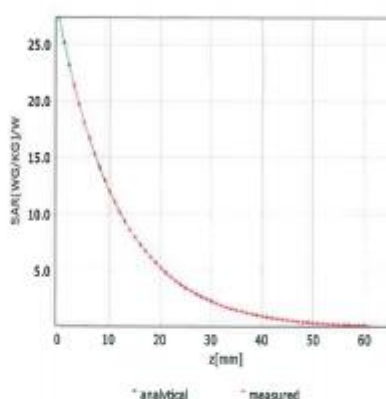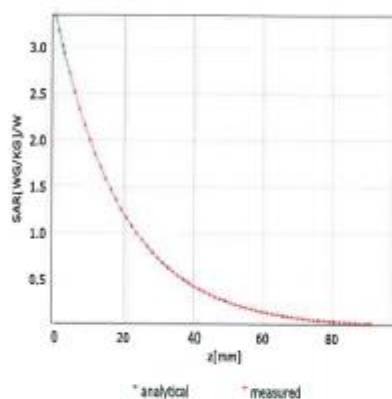

## Deviation from Isotropy in Liquid

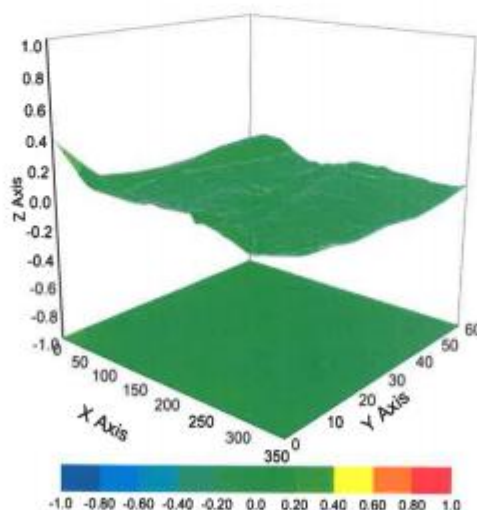

Uncertainty of Spherical Isotropy Assessment:  $\pm 3.2\%$  ( $k=2$ )



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)

## DASY/EASY – Parameters of Probe: EX3DV4 – SN:3844

### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	25.7
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	10mm
Tip Diameter	2.5mm
Probe Tip to Sensor X Calibration Point	1mm
Probe Tip to Sensor Y Calibration Point	1mm
Probe Tip to Sensor Z Calibration Point	1mm
Recommended Measurement Distance from Surface	1.4mm





In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)



中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570

Client **3in**Certificate No: **Z21-60058****CALIBRATION CERTIFICATE**

Object EX3DV4 - SN : 7633

Calibration Procedure(s) FF-Z11-004-02  
Calibration Procedures for Dosimetric E-field Probes

Calibration date: April 09, 2021

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&amp;TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	16-Jun-20(CTTL, No.J20X04344)	Jun-21
Power sensor NRP-Z91	101547	16-Jun-20(CTTL, No.J20X04344)	Jun-21
Power sensor NRP-Z91	101548	16-Jun-20(CTTL, No.J20X04344)	Jun-21
Reference 10dBAttenuator	18N50W-10dB	10-Feb-20(CTTL, No.J20X00525)	Feb-22
Reference 20dBAttenuator	18N50W-20dB	10-Feb-20(CTTL, No.J20X00526)	Feb-22
Reference Probe EX3DV4	SN 7307	29-May-20(SPEAG, No.EX3-7307_May20)	May-21
DAE4	SN 1555	25-Aug-20(SPEAG, No.DAE4-1555_Aug20)	Aug-21
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGenerator MG3700A	6201052605	23-Jun-20(CTTL, No.J20X04343)	Jun-21
Network Analyzer E5071C	MY46110673	21-Jan-21(CTTL, No.J20X00515)	Jan-22

	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: April 11, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z21-60058

Page 1 of 9

**Chongqing Academy of Information and Communication Technology**

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336  
Tel: 0086-23-88069965 FAX:0086-23-88608777