

FCC PART 15.249

TEST REPORT

For

SZ DJI TECHNOLOGY CO., LTD

14th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave,
Nanshan, Shenzhen, Guangdong, China

FCC ID: SS3-RD241907

Report Type: Original Report	Product Name: HIGH-PRECISION DBF IMAGING RADAR
Report Number: RDG190518002-00B	
Report Date: 2019-06-22	
Reviewed By:	Jerry Zhang
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY.....	3
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	5
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
FCC§15.203 - ANTENNA REQUIREMENT.....	7
APPLICABLE STANDARD	7
ANTENNA CONNECTOR CONSTRUCTION	7
FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS	8
APPLICABLE STANDARD	8
EUT SETUP	8
TEST EQUIPMENT SETUP.....	10
TEST PROCEDURE	10
CORRECTED AMPLITUDE & MARGIN CALCULATION	10
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST DATA	11
FCC §15.215(C) – 20 DB BANDWIDTH TESTING.....	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST DATA	21

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	HIGH-PRECISION DBF IMAGING RADAR
EUT Model:	RD2418R
Operation Frequency:	24150 MHz
Modulation Type:	FMCW
Rated Input Voltage:	DC 15V from system
External Dimension:	109mm(Ø)*152mm(H)
Serial Number:	190518002
EUT Received Date:	2019/5/18

Objective

This type approval report is prepared on behalf of **SZ DJI TECHNOLOGY CO., LTD** in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.249 rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
Unwanted Emissions, radiated	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~40GHz: 5.23 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier : CN0022.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured in swept mode for testing which was provided by the manufacturer.

EUT Exercise Software

No software was used in test.


Equipment Modifications

No modifications were made to the EUT.

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DJI	Aircraft	T16	3WWDZ-15A

Block Diagram of Test Setup

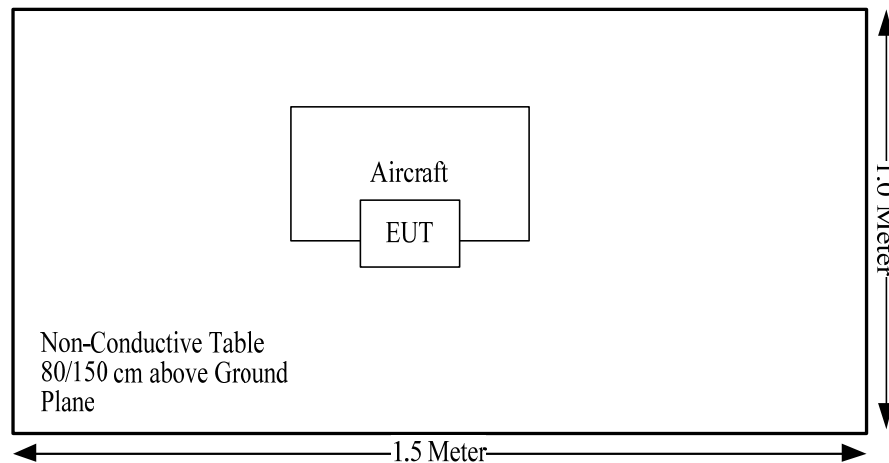

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conduction Emissions	Not Applicable
15.205, §15.209, §15.249	Radiated Emissions	Compliance
§15.215 (c)	20 dB Bandwidth	Compliance

Not Applicable: The EUT was powered by DC 15V system.

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

Antenna Connector Construction

The EUT has one internal antenna arrangement, and the antenna gain is 15.5 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.

FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS**Applicable Standard**

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

EUT Setup


Below 1 GHz:

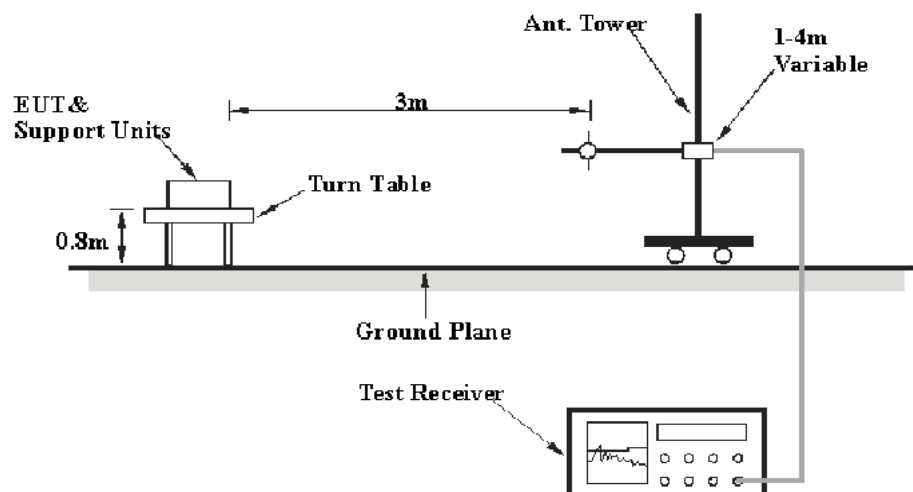

1-26.5 GHz:

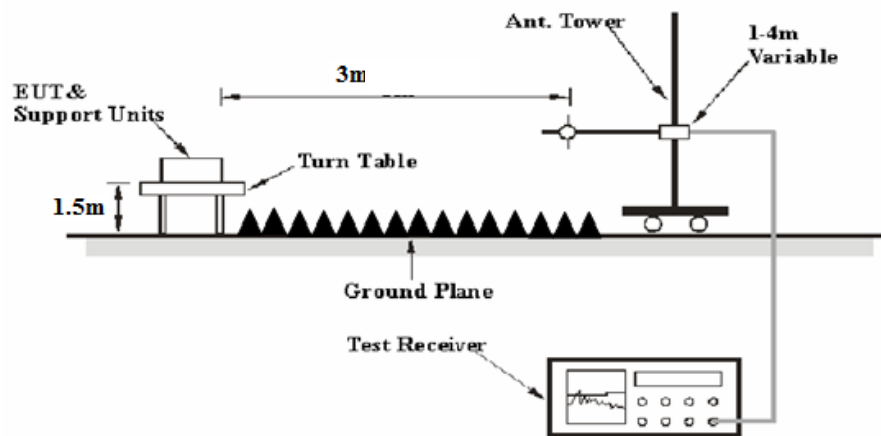

26.5-100 GHz:

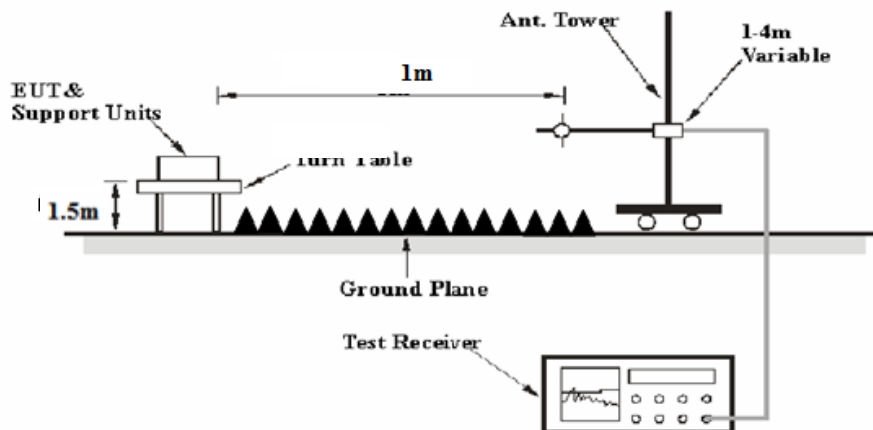

The radiated emission tests were performed in the 3 meters Chamber A, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

According to C63.10, the 26.5- 100GHz test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1m

Distance extrapolation factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1m]})$ dB

Extrapolation result = Corrected Amplitude (dB μ V/m) - distance extrapolation factor (9.54dB)

For above 40GHz, external harmonic mixers are utilized. The antenna is scanned around the entire perimeter surface of the EUT, in both horizontal and vertical polarizations, at the distance of 0.5m from the EUT. The Mixers and it's RF cables is compose a system for calibration, the conversion factor was added into the test Spectrum Analyzer in testing.

Test Equipment Setup

The system was investigated from 30 MHz to 100 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 30 MHz to 1GHz, peak and average detection mode above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Or

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$
$$\text{Margin} = \text{Limit} - \text{Extrapolation result}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2018-06-26	2019-06-26
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2019-05-06	2020-05-06
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-03	2019-08-03
R&S	Spectrum Analyzer	8564E	3943A01781	2019-01-06	2020-01-06
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2016-11-18	2019-11-18
MICRO-COAX	Coaxial Cable	UFA147-1-2362- 100100	64639 231029- 001	2019-02-24	2020-02-24
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
R&S	Spectrum Analyzer	8564E	3943A01781	2019-03-02	2020-03-02
OML	Harmonic Mixer	WR19/M19HWD	U60313-1	2016-10-14	2019-10-14
OML	Horn Antenna	M19RH	11648-01	2016-10-14	2019-10-14
OML	Harmonic Mixer	WR12/M12HWD	E60120-1	2016-10-19	2019-10-19
OML	Horn Antenna	M12RH	E60120-2	2016-10-19	2019-10-19
OML	Harmonic Mixer	WR08/M08HWD	F60313-1	2016-10-24	2019-10-24
OML	Horn Antenna	M08RH	F60313-2	2016-10-24	2019-10-24


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	25.5 °C
Relative Humidity:	35 %
ATM Pressure:	101.6 kPa

The testing was performed by Tyler Pan on 2019-06-10 and 2019-06-11.

Test Mode: Transmitting

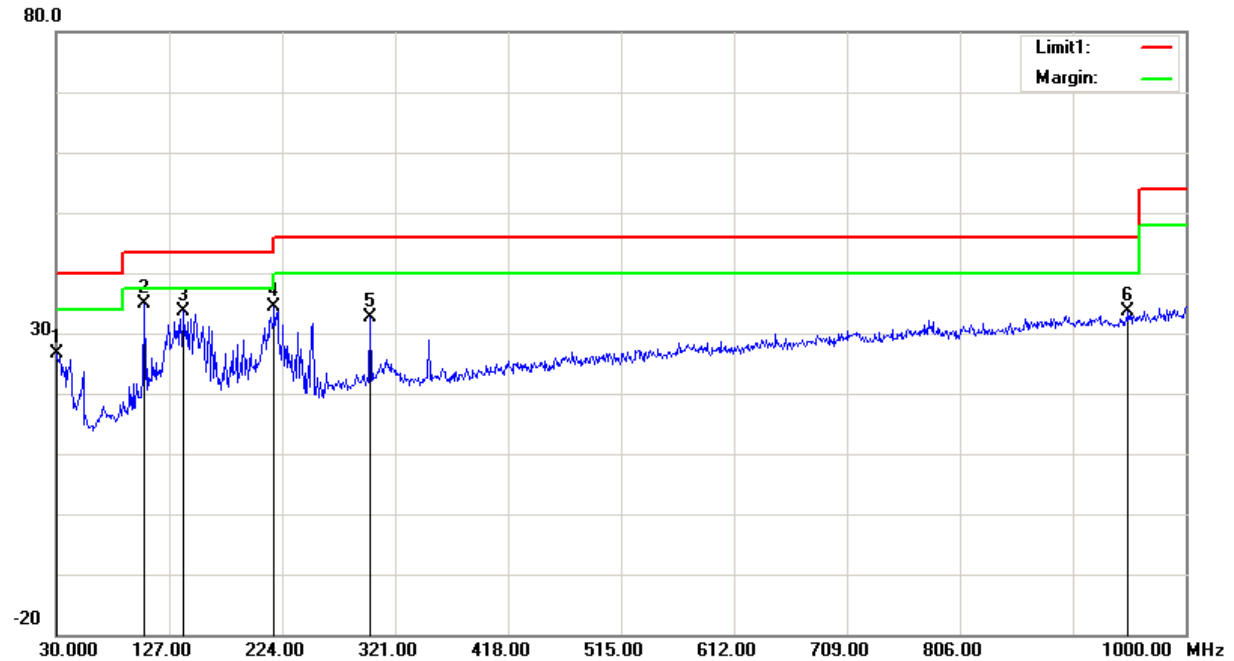1) 30MHz-1GHz:**Horizontal:**

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	24.95	peak	1.72	26.67	40.00	13.33
105.6600	42.20	peak	-7.32	34.88	43.50	8.62
139.6100	39.24	peak	-5.68	33.56	43.50	9.94
217.2100	41.55	peak	-7.14	34.41	46.00	11.59
299.6600	36.57	peak	-3.83	32.74	46.00	13.26
950.5300	32.75	peak	0.85	33.60	46.00	12.40

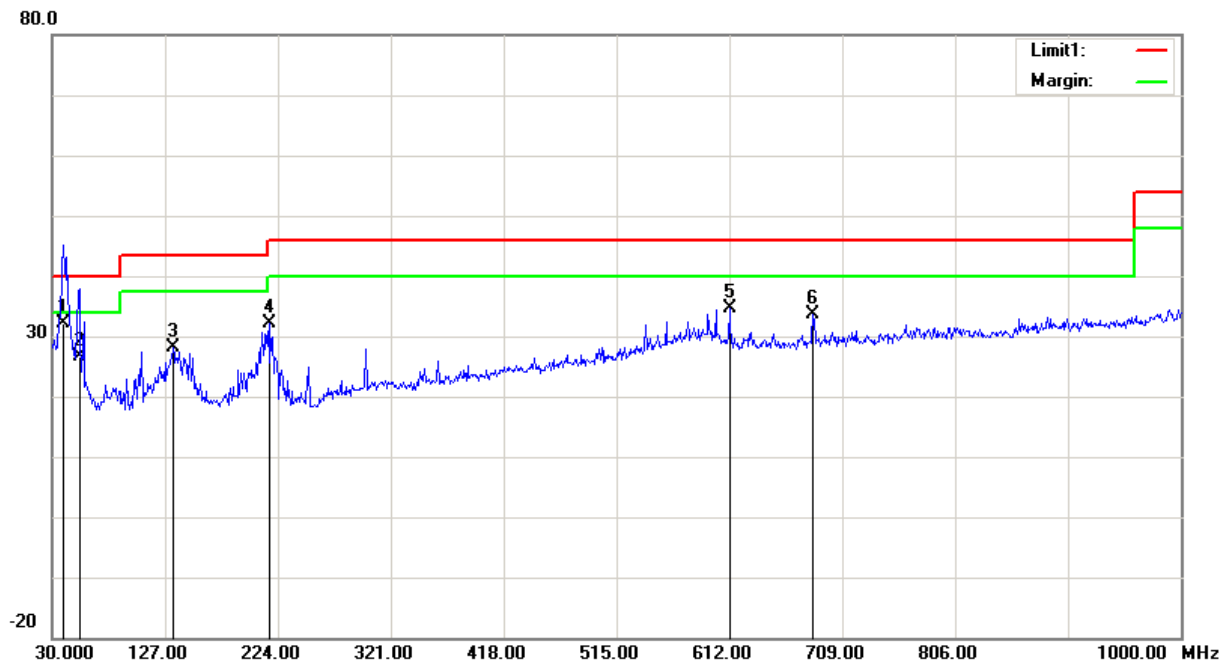Vertical:

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
39.7000	37.90	QP	-5.66	32.24	40.00	7.76
53.2800	38.50	QP	-11.96	26.54	40.00	13.46
133.7900	33.26	peak	-5.05	28.21	43.50	15.29
217.2100	39.17	peak	-7.14	32.03	46.00	13.97
612.0000	33.45	peak	1.18	34.63	46.00	11.37
683.7800	30.99	peak	2.67	33.66	46.00	12.34

2) 1GHz-40GHz




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB(1/m))					
24150.00	83.72	PK	H	35.41	10.96	37.12	92.97	127.96	34.99
24150.00	62.13	AV	H	35.41	10.96	37.12	71.38	107.96	36.58
24150.00	103.70	PK	V	35.41	10.96	37.12	112.95	127.96	15.01
24150.00	82.40	AV	V	35.41	10.96	37.12	91.65	107.96	16.31
24000.00	49.68	PK	V	35.35	10.87	37.40	58.50	74.00	15.50
24000.00	36.54	AV	V	35.35	10.87	37.40	45.36	54.00	8.64
24250.00	52.63	PK	V	35.45	11.02	36.94	62.16	74.00	11.84
24250.00	36.87	AV	V	35.45	11.02	36.94	46.40	54.00	7.60
1551.00	47.93	PK	H	24.10	2.69	27.94	46.78	74.00	27.22
1551.00	30.06	AV	H	24.10	2.69	27.94	28.91	54.00	25.09
5200.00	49.32	PK	V	30.50	4.71	26.91	57.62	74.00	16.38
5200.00	32.56	AV	V	30.50	4.71	26.91	40.86	54.00	13.14



40GHz-100GHz



Frequency (GHz)	Receiver		Rx Antenna		Corrected Amplitude (dB μ V/m)	Extrapolation result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB(1/m))				
48.3	38.37	PK	H	40.08	78.45	62.89	87.96	19.05
48.3	25.7	AV	H	40.08	65.78	50.22	67.96	11.72
72.45	42.25	PK	H	43.85	86.1	70.54	87.96	17.42
72.45	23.36	AV	H	43.85	67.21	51.65	67.96	16.31
96.6	39.9	PK	H	45.92	85.82	70.26	87.96	17.7
96.6	22.17	AV	H	45.92	68.09	52.53	67.96	15.43

Note:1. for the range 40-60GHz, the test performed at the distance 1m. for the range 60-100GHz, the test performed at the distance 0.5m.




Test plots Horizontal

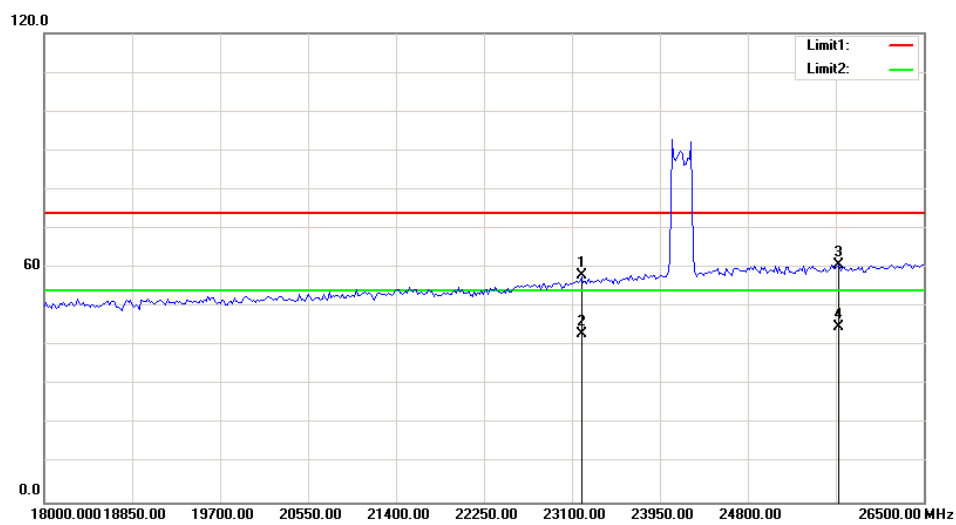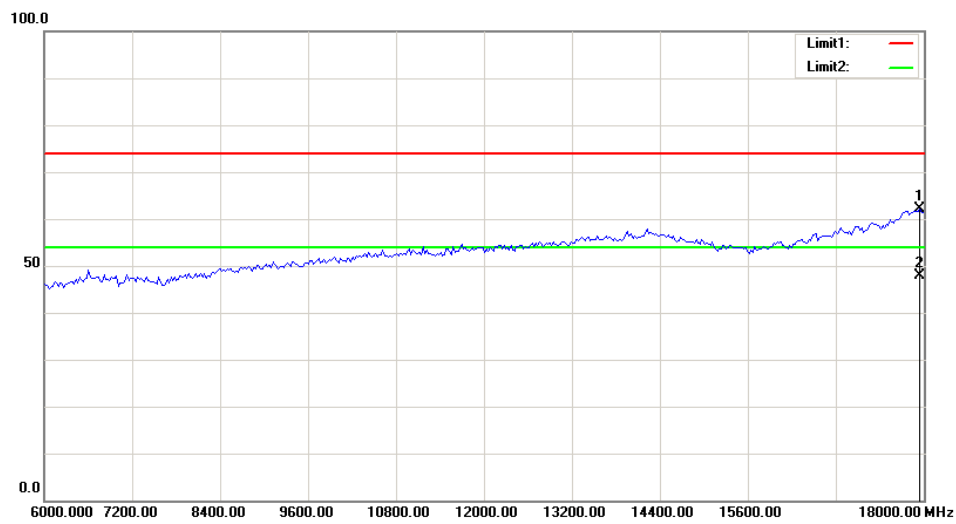
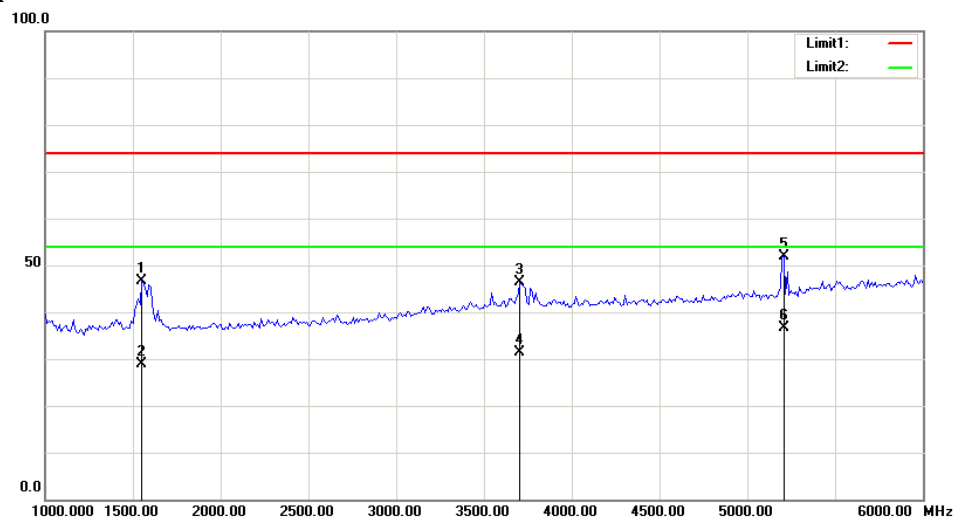


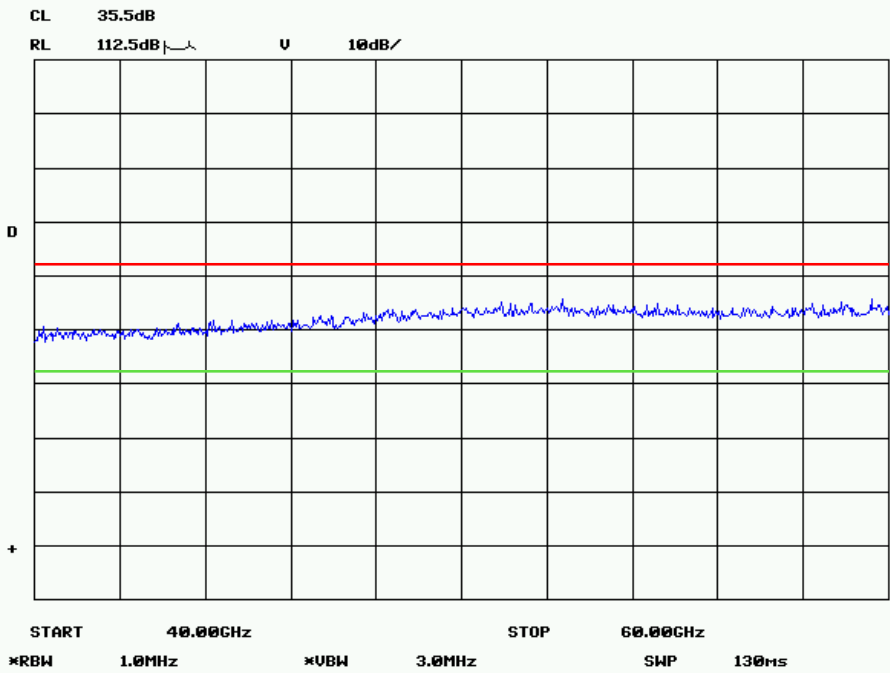
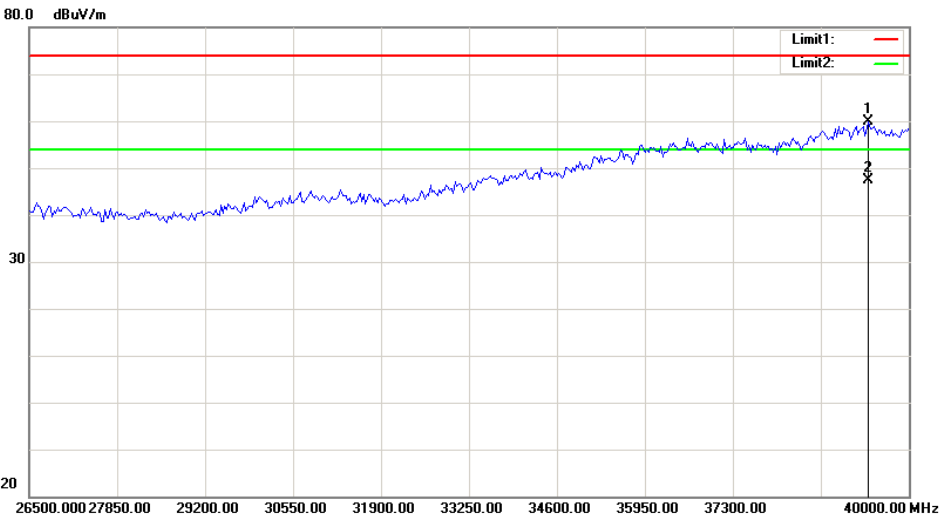


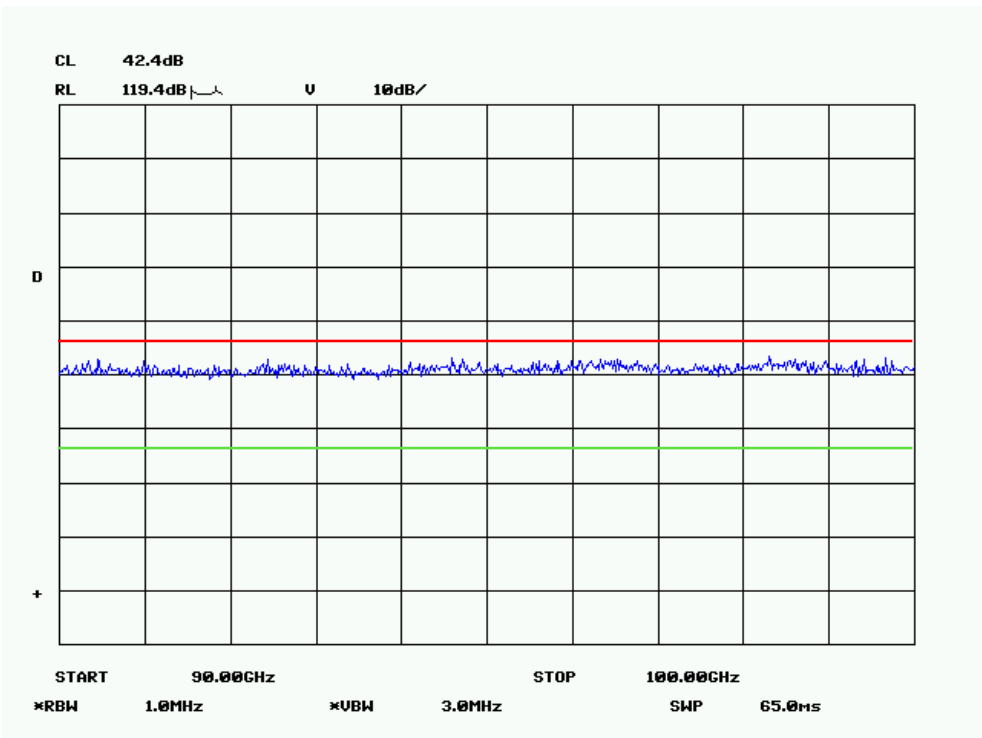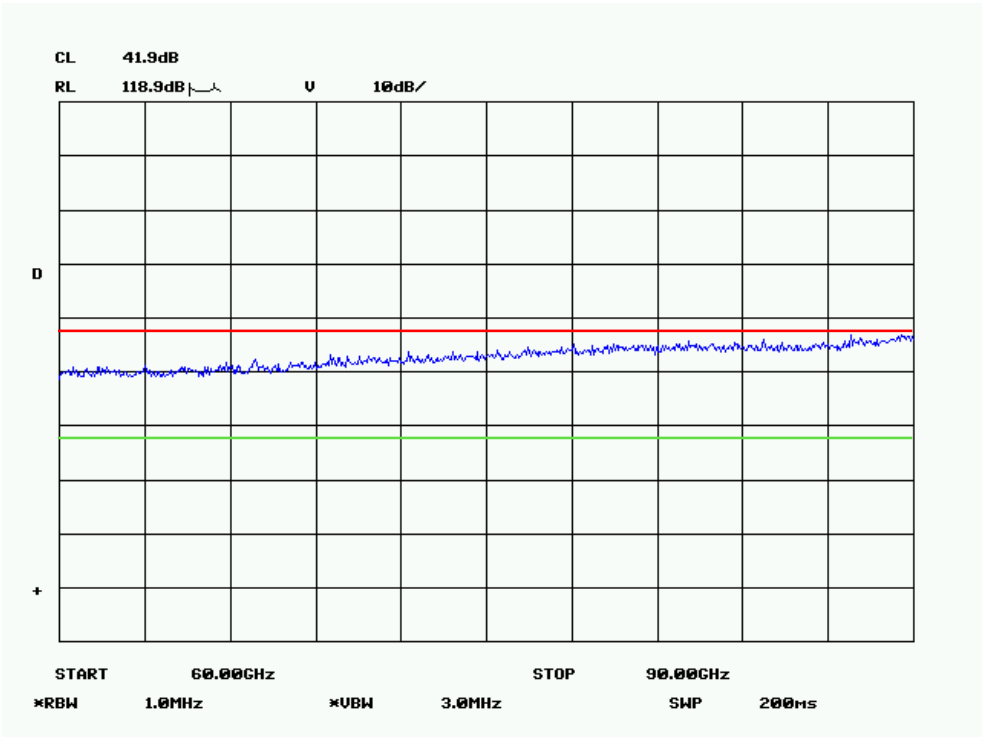

Vertical

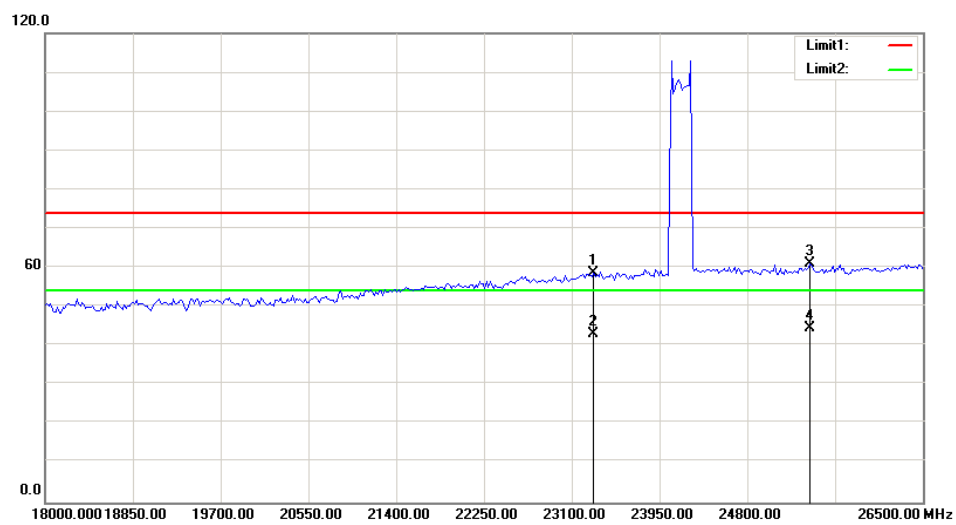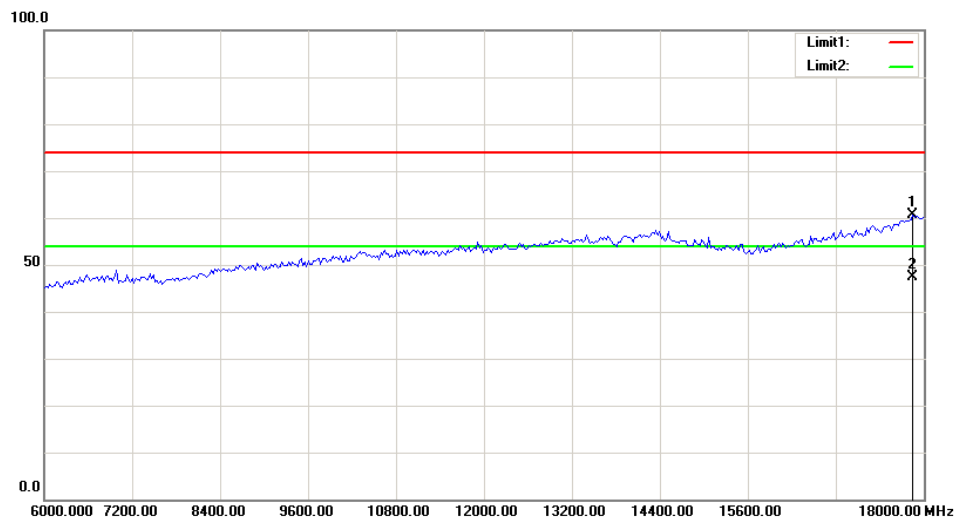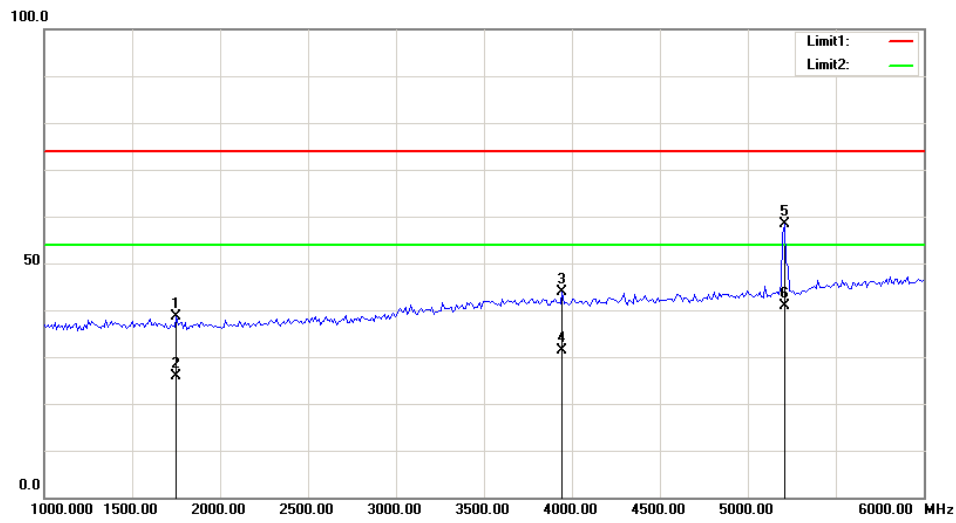

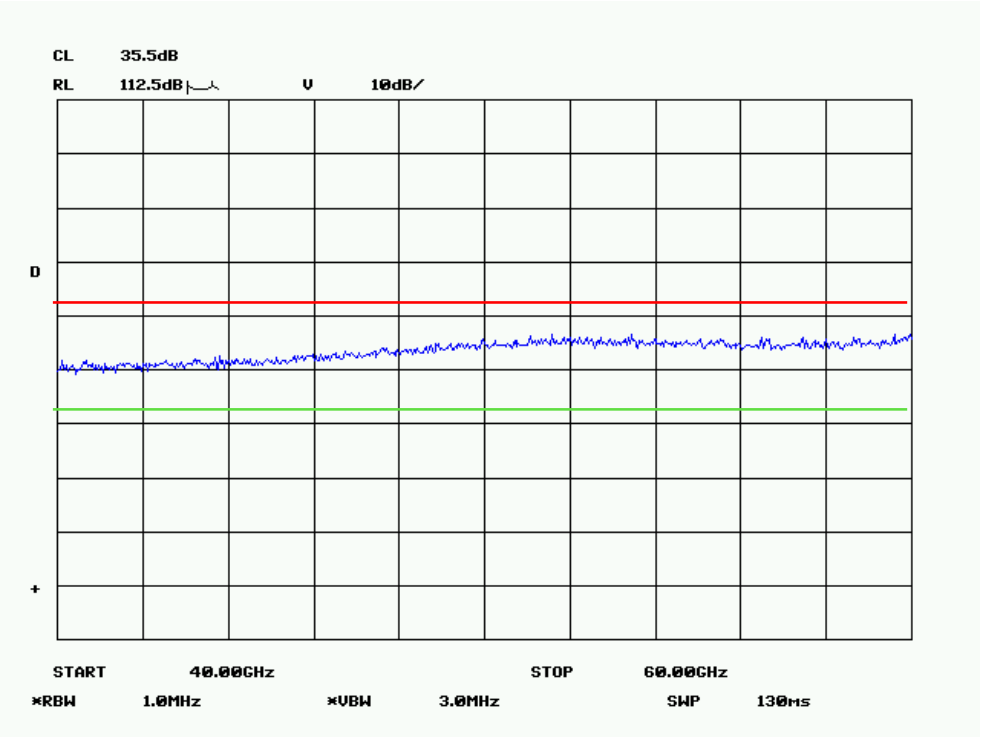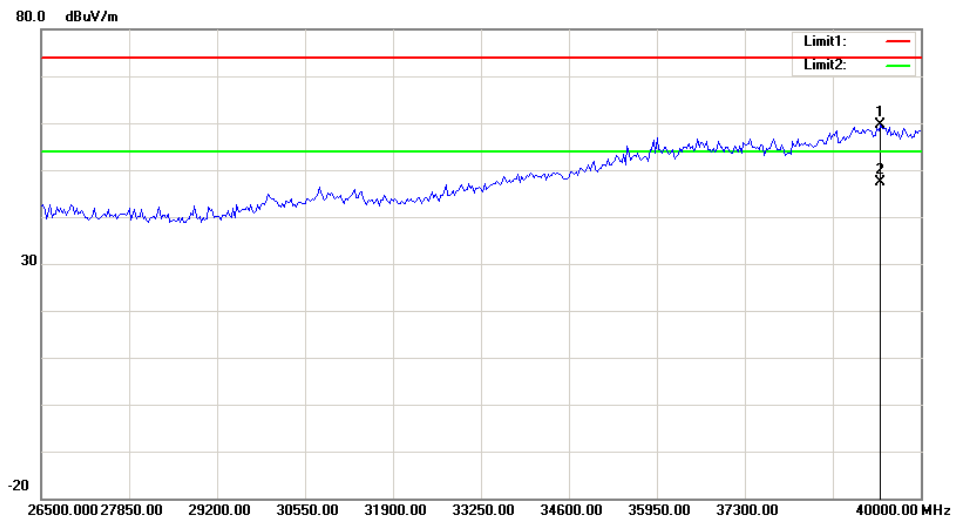

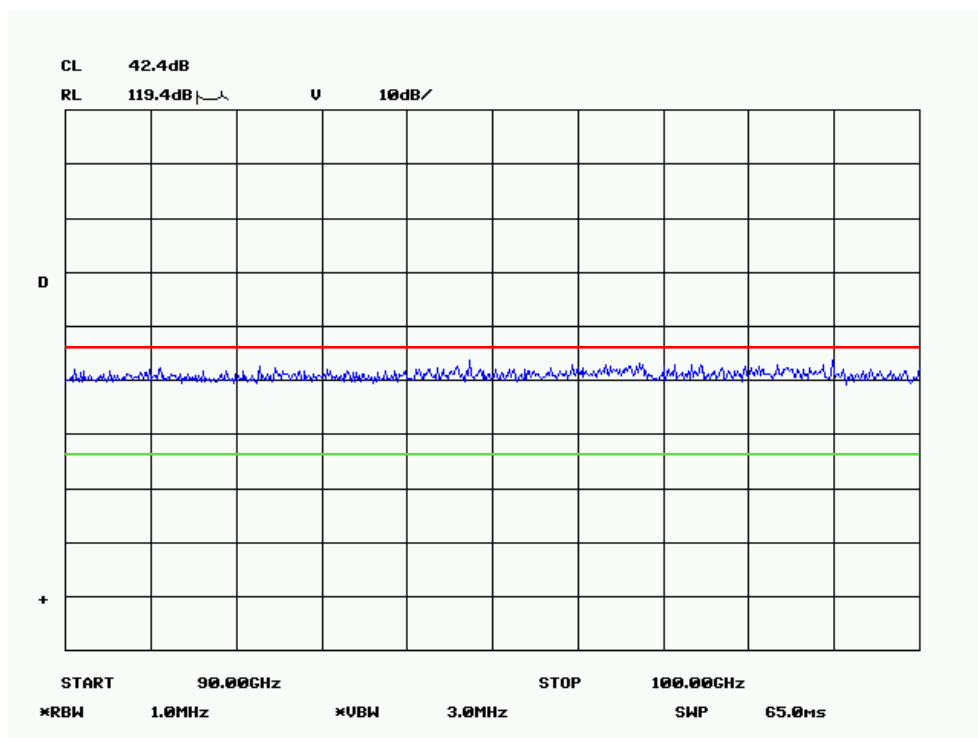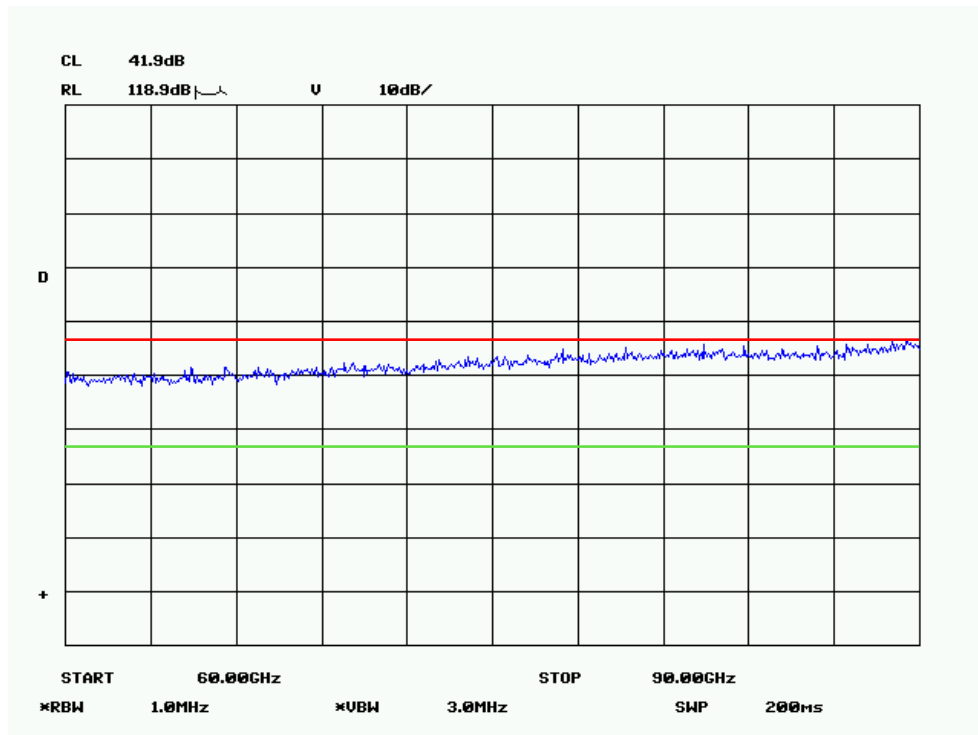

FCC §15.215(c) – 20 dB BANDWIDTH TESTING

Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
3. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-03	2019-08-03
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
MICRO-COAX	Coaxial Cable	UFA147-1- 2362-100100	64639 231029- 001	2019-02-24	2020-02-24
Quinstar	Amplifier	QLW- 18405536-JO	15964001001	2018-06-27	2019-06-27

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.3 °C
Relative Humidity:	39 %
ATM Pressure:	101.6 kPa


The testing was performed by Tyler Pan on 2019-06-10.

Test Result: Compliant.

Please refer to following tables and plots

Test Mode: Transmitting

Frequency (MHz)	20 dB Bandwidth (MHz)
24150	196

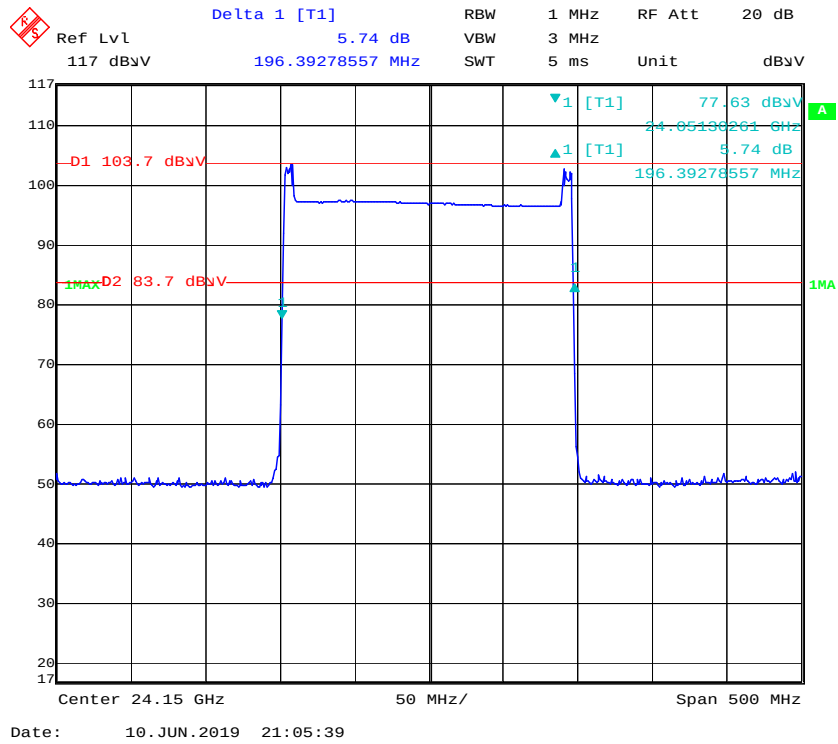

***** END OF REPORT *****