
Extension Socket

ZG-TXWM-9A

1. Product Introduction

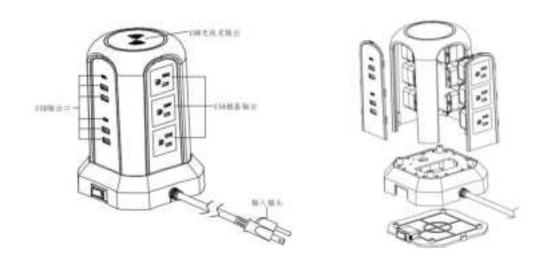

*Button instruction

Overload control switch key: press to power on, switch red light on indicates that the socket has been powered on.

*USB output description

USB supports a maximum single-port 2.1A output and uses a shared 20W at the same time.



2. The name and content of harmful products

	Hazardous substance					
Name of	(pb)	(Hg)	(Cd)	(PBB)	(Cr (VI))	(PBDE)
parts						
PCBA	X	0	0	0	0	0
Shell	0	0	0	0	0	0
Structural	Х	0	0	0	0	0
metal						

This form is prepared in accordance with the provisions of SJ/T11364

O: Indicates that the content of the harmful substance in all homogeneous materials of the part is below the limit requirements specified in GB/T26572

X: Indicates that the content of the hazardous substance in at least one homogeneous material of the part exceeds the limit requirements specified in GB/T26572

Note: This product is marked with an "X" because there are no alternative technologies or components available at this stage

10 The numbers in this label indicate that the environmental protection life of the product under normal use is 10 years

3. Warranty description

(1) The warranty period is one year from the date of purchase. During the

warranty period, if the product fails under normal use (excluding

man-made damage), it can be repaired or replaced free of charge with

the purchase invoice.

②For the products sold without our permission or unauthorized service

center, incorrect use of non-this product, such as unauthorized

dismantling of the components of the product, beyond the warranty

period, due to irresistible force damage such as natural factors, our

company will not assume the free warranty responsibility for the product.

Warning

1. When multiple plugs are inserted at the same time, the total power of

the load shall not exceed the maximum allowable power

2.Please do not coil the extension cord socket. If the coil is used, the

actual current value that can be carried will be lower than its amount

Constant value

4. Basic parameter

Product model: ZG-TXWM-9A

Nominal voltage: 125~50/60Hz

Maximum current: 15A

Rated power: 1850W Max.

Operating temperature:-5C-35°C

USB Output voltage:5V=-2.1A Max.

Executive standard: GB/T1002-2021; GB/T 2099.1-2008;

GB/T 2099.7-2015;

GB 17625.1-2022(A type);

GB 4943.1-2022;GB/T 9254.1-2021

Suitable for non-tropical climates only.

5. Contact address

Manufacturer: Guangdong Zhangong Electric Technology Co., Ltd.

Add: 701, Building 29, Zhifu Industrial Park, Xingtan Town, Shunde

District, Foshan City, Guangdong Province

Telephone hotline: 0757-26363652

Website guide: http://www.zhangongsocket.com/

https://shop797k641127960.1688.com/

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- --Reorient or relocate the receiving antenna.
- --Increase the separation between the equipment and receiver.
- --Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- --Consult the dealer or an experienced radio/TV technician for help.

 Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

 Radiation Exposure Statement

This device complies with FCC RF radiation exposure limits set forth for an uncontrolled environment.

The FCC certification of this device refers to RF exposure testing performed in typical operating conditions, where a person is no closer than 20 centimeters from the device surface at all times, except for non-repetitive patterns with transient time intervals in the order of a second. Only in the stated conditions, the device is shown to fully comply with the FCC RF Exposure requirements of KDB 447498.