


XQ200U Communication module

LTE Cat 1 module

Designed specifically for both the M2M and IoT applications

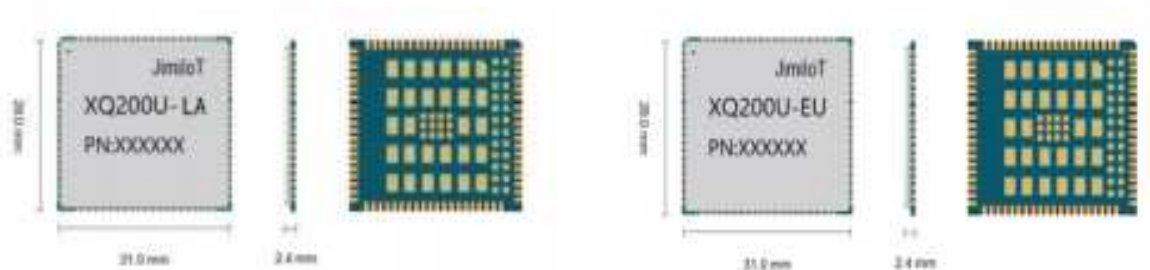

1. Product introduction

XQ200U Is a LTE Cat1 and GSM wireless communication module developed based on 8910DM, using 3GPP Rel.13 L TE technology, support LTE-FDD, LTE-TDD network data connection, super high cost performance.

This module implements the remote EC 200U full pin-to-pin design; the XQ200U series contains two versions of XQ200U_LA and XQ 200 _ EU.

XQ 200U The module package is consistent with the EC200U, and the package size is 28.0*31.0*2.4mm. It can meet almost all M2M application needs, such as automation, intelligent metering, tracking systems, security systems, routers, wireless POS machines, mobile computing devices, PDA phones and tablet computers.

2. Function

Functional overview

- Support for LTE Cat 1 / GPRS;
- Ultra-thin LGA packaging;
- Baseband chip integrated RAM and flash;
- Support for FOTA;

3. Communication characteristics

. 1.3 The frequency band

The 2 + 4G is divided into two versions, and the frequency band planning is shown as follows:

Latin America XQ 200U _LA GSM: B 2 / B 5; FDD: B 2 / B 4 / B 5 / B 7

Eurasian XQ 200U _EU GSM: B 2 / B 3 / B 5 / B 8; FDD: B 1 / B 3 / B 5 / B 7 / B 8 / B 20 / B 28; TDD: B38 / B40 / B41

2.3 The LTE feature

• LTE Rate (Mbps) LTE-FDD: Max 0 (DL) / Max. 5 (UL); LTE-TDD: Max 7.88 (DL) / Max 3 (UL)

3.3 The GSM features

3.3.1. GPRS :

- Support GPRS multi-slot class 12
- Coding scheme : CS-1, CS-2, CS-3 and CS-4
- Max .80Kbps (DL), Max .80Kbps (UL)

3.2.3 EDGE:

- Support EDGE multi-slot class 12
- Support GMSK and 8-PSK for different MCS (Modulation and Coding Scheme)
- Downlink coding schemes : MCS 1-9
- Uplink coding schemes : MCS 1-9
- Max .236.8Kbps (DL), Max .236.8Kbps (UL)

4.3 Call

CSV

CSV oice

5.3 SMS

- Point-to-point MO and MT;
- SMS Cell Broadcast;
- Text and PDU Mode

4. The interface is the INTERFACE

4.1., and the general interface

Power supply

- (U) The SIM interface

The USB interface

The UART interface

The I2C interface

The SPI interface

Vacation audio interface

The ADC interface

- LCD

Admito matrix keyboard

- SD block
- RESET_in

. 2.4 Antenna

LTE antenna

. 3.4 SIM

Supports a 1.8V / 3.0V USIM / SIM card

Support for eSIM, place-in (soft SIM)

Firmware Upgrade

USB interface ;

FO TA

Delta Firmware Upgrade Over-the-Air;

5. Performance

. 1.5 LTE Cat1 of power consumption

Class 3 (23 dBm \pm 2dB), the LTE-FDD frequency band

Class 3 (23 dBm \pm 2dB), LTE-TDD frequency band;

6. General characteristics

. 1.6 3 The GPP standard

3GPP TS 27.007, 27.005 for the defined command

6.2. temperature

storage temperature

-40° C ~ +85° C;

working temperature

-35° C ~ +75° C;

6.2.1. Appearance

size

28.0mm × 31.0mm × 2.4mm;

weight

About 4.1g;

package

L CC

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC regulatory compliance statement

§15.19 Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

§15.21 Information to user

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

- **List of applicable FCC rules:**

47 CFR Part 22, 24, 27

- **Summarize the specific operational use conditions**

This module can be used in IOT devices, the input voltage to the module is nominally 4V.

- **Limited module procedures**

This module is a single module.

- **Trace antenna designs**

The antenna is not a trace antenna.

- **RF exposure considerations**

This Module complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

- **Antennas**

If you desire to increase antenna gain and either change antenna type or use same antenna type certified, a Class II permissive change application is required to be filed by us, or you (host manufacturer) can take responsibility through the change in FCC ID (new application) procedure followed by a Class II permissive change application.

- **Label and compliance information**

Please notice that if the FCC identification number is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. This exterior label can use wording such as the following: "[Contains FCC ID: 2AMLF-XQ200U-LA](#)" any similar wording that expresses the same meaning may be used.

§ 15.19 Labelling requirements shall be complied on end user device.

Labelling rules for special device, please refer to §2.925, § 15.19 (a)(5) and relevant KDB publications. For E-label, please refer to §2.935.

- **Information on test modes and additional testing requirements**

The OEM integrator is responsible for ensuring that the end-user has no manual instruction to remove or install module.

The module is limited to installation in mobile application, a separate approval is required for all other operating configurations, including portable configurations with respect to §2.1093 and difference antenna configurations.

● **FCC other Parts, Part 15B Compliance Requirements for Host product manufacturer**

This modular transmitter is only FCC authorized for the specific rule parts listed on our grant, host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification.

Host manufacturer in any case shall ensure host product which is installed and operating with the module is in compliant with Part 15B requirements.

Please note that For a Class B or Class A digital device or peripheral, the instructions furnished the user manual of the end-user product shall include statement set out in §15.105 *Information to the user* or such similar statement and place it in a prominent location in the text of host product manual. Original texts as following:

For Class B

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.*
- Increase the separation between the equipment and receiver.*
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.*
- Consult the dealer or an experienced radio/TV technician for help.*

For Class A

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.