

February 8, 2019

HID Global Corporation  
6533 Flying Cloud Drive  
Eden Prairie, MN 55344

Dear Robert Cresswell,

Enclosed is the EMC test report for compliance testing of the HID Global Corporation, RB25F, tested to the requirements of Title 47 of the CFR, Part 15.225, Subpart C for Certification as an Intentional Radiator.

Thank you for using the services of Eurofins | MET Labs, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
EUROFINS | MET LABS, INC.



Joel Huna  
Documentation Department

Reference: (\\HID Global Corporation\\EMCA101051-FCC225 Rev. 1)

Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins | MET Labs, Inc. While use of the A2LA logo in this report reflects MET accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.



## **Electromagnetic Compatibility Criteria Test Report**

for the

**HID Global Corporation  
RB25F**

**Tested under**  
the FCC Certification Rules  
contained in  
15.225 Subpart C  
for Intentional Radiators

**MET Report: EMCA101051-FCC225 Rev. 1**

February 8, 2019

**Prepared For:**

**HID Global Corporation  
6533 Flying Cloud Drive  
Eden Prairie, MN 55344**


**Prepared By:**  
**Eurofins | MET Labs, Inc.**  
13501 McCallen Pass,  
Austin, TX 78753

**Electromagnetic Compatibility Criteria  
Test Report**

for the

**HID Global Corporation  
RB25F****Tested under**  
the FCC Certification Rules  
contained in  
15.225 Subpart C  
for Intentional RadiatorsGiuliano Messina, Project Engineer  
Electromagnetic Compatibility LabJoel Huna  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Part 15.225 under normal use and maintenance.

John Mason,  
Director, Electromagnetic Compatibility Lab

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	February 8, 2019	Initial Issue.
1	March 26, 2019	TCB Correction

## Table of Contents

<b>I.</b>	<b>Executive Summary .....</b>	<b>1</b>
	A. Purpose of Test .....	2
	B. Executive Summary .....	2
<b>II.</b>	<b>Equipment Configuration .....</b>	<b>3</b>
	A. Overview.....	4
	B. References.....	4
	C. Test Site .....	5
	D. Measurement Uncertainty .....	5
	E. Description of Test Sample.....	5
	F. Equipment Configuration.....	6
	G. Support Equipment .....	6
	H. Ports and Cabling Information.....	7
	I. Mode of Operation.....	7
	J. Method of Monitoring EUT Operation .....	7
	K. Modifications .....	7
	a) Modifications to EUT .....	7
	b) Modifications to Test Standard.....	7
	L. Disposition of EUT .....	7
<b>III.</b>	<b>Electromagnetic Compatibility Criteria for Intentional Radiators .....</b>	<b>8</b>
	§ 15.203 Antenna Requirement .....	9
	20 dB Occupied Bandwidth.....	10
	§ 15.225(a) Spurious Emission Limits, within the band 13.553 – 13.567 MHz.....	11
	§ 15.225(b) Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz .....	12
	§ 15.225(c) Spurious Emission Limits, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz .....	13
	§ 15.225(d) Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz.....	14
	§ 15.225(e) Frequency Stability .....	18
	§ 2.1093 Radiofrequency radiation exposure portable devices .....	21
<b>IV.</b>	<b>Test Equipment .....</b>	<b>22</b>
<b>V.</b>	<b>Certification &amp; User's Manual Information .....</b>	<b>24</b>
	A. Certification Information .....	25
	B. Label and User's Manual Information .....	29

## List of Tables

Table 1. Executive Summary of EMC Part 15.225 Compliance Testing .....	2
Table 2. EUT Summary Table.....	4
Table 3. References .....	4
Table 4. Uncertainty Calculations Summary.....	5
Table 5. Equipment Configuration .....	6
Table 6. Support Equipment.....	6
Table 7. Ports and Cabling Information .....	7
Table 8. Spurious Emissions, Outside the Bands, 13.56 MHz, 30 - 135.6 MHz, Vertical, QP Marker Data .....	17
Table 9. Test Equipment List .....	23

## List of Plots

Plot 1. Occupied Bandwidth, 10 kHz .....	10
Plot 2. Emissions Within the Band 13.553 – 14.01 MHz Mask .....	11
Plot 3. Spurious Emissions, Outside the Bands 13.56 MHz, 0.009 – 0.15 MHz.....	15
Plot 4. Spurious Emissions, Outside the Bands, 13.56 MHz, 0.15 – 0.49 MHz.....	15
Plot 5. Spurious Emissions, Outside the Bands, 13.56 MHz, 0.49 – 1.705 MHz.....	15
Plot 6. Spurious Emissions, Outside the Bands 13.56 MHz, 1.705 – 13.11 MHz.....	16
Plot 7. Spurious Emissions, Outside the Bands, 13.56 MHz, 14.01 – 30 MHz.....	16
Plot 8. Spurious Emissions, Outside the Bands, 13.56 MHz, 30 – 135.6 MHz, Horizontal .....	17
Plot 9. Spurious Emissions, Outside the Bands, 13.56 MHz, 30 – 135.6 MHz, Vertical .....	17
Plot 10. Frequency Tolerance, 85% of Supply .....	19
Plot 11. Frequency Tolerance, 115% of Supply .....	19
Plot 12. Frequency Tolerance, Extreme Temperatures, -20C.....	20
Plot 13. Frequency Tolerance, Extreme Temperatures, 50C .....	20

## List of Figures

Figure 1. Block Diagram of Test Configuration.....	6
--	---

## List of Terms and Abbreviations

<b>AC</b>	<b>Alternating Current</b>
<b>ACF</b>	<b>Antenna Correction Factor</b>
<b>Cal</b>	<b>Calibration</b>
<b><i>d</i></b>	<b>Measurement Distance</b>
<b>dB</b>	<b>Decibels</b>
<b>dB<math>\mu</math>A</b>	<b>Decibels above one microamp</b>
<b>dB<math>\mu</math>V</b>	<b>Decibels above one microvolt</b>
<b>dB<math>\mu</math>A/m</b>	<b>Decibels above one microamp per meter</b>
<b>dB<math>\mu</math>V/m</b>	<b>Decibels above one microvolt per meter</b>
<b>DC</b>	<b>Direct Current</b>
<b>E</b>	<b>Electric Field</b>
<b>DSL</b>	<b>Digital Subscriber Line</b>
<b>ESD</b>	<b>Electrostatic Discharge</b>
<b>EUT</b>	<b>Equipment Under Test</b>
<b><i>f</i></b>	<b>Frequency</b>
<b>FCC</b>	<b>Federal Communications Commission</b>
<b>GRP</b>	<b>Ground Reference Plane</b>
<b>H</b>	<b>Magnetic Field</b>
<b>HCP</b>	<b>Horizontal Coupling Plane</b>
<b>Hz</b>	<b>Hertz</b>
<b>IEC</b>	<b>International Electrotechnical Commission</b>
<b>kHz</b>	<b>kilohertz</b>
<b>kPa</b>	<b>kilopascal</b>
<b>kV</b>	<b>kilovolt</b>
<b>LISN</b>	<b>Line Impedance Stabilization Network</b>
<b>MHz</b>	<b>Megahertz</b>
<b><math>\mu</math>H</b>	<b>microhenry</b>
<b><math>\mu</math></b>	<b>microfarad</b>
<b><math>\mu</math>s</b>	<b>microseconds</b>
<b>NEBS</b>	<b>Network Equipment-Building System</b>
<b>PRF</b>	<b>Pulse Repetition Frequency</b>
<b>RF</b>	<b>Radio Frequency</b>
<b>RMS</b>	<b>Root-Mean-Square</b>
<b>TWT</b>	<b>Traveling Wave Tube</b>
<b>V/m</b>	<b>Volts per meter</b>
<b>VCP</b>	<b>Vertical Coupling Plane</b>

# I. Executive Summary



## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the HID Global Corporation RB25F, with the requirements of Part 15, §15.225. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the RB25F. HID Global Corporation should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the RB25F, has been **permanently** discontinued.

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.225, in accordance with HID Global Corporation, purchase order number 110963495. All tests were conducted using measurement procedures ANSI C64.4-2014 and C63.10-2013.

FCC Reference 47 CFR Part 15.225	Description	Compliance
Part 15 §15.203	Antenna Requirement	Compliant
Part 15 §15.207(a)	Conducted Emission Limits	Not Applicable
Part 15 §15.215	20dB Occupied Bandwidth	Compliant
Part 15 §15.225(a)	Field Strength emissions within the band 13.553 – 13.567 MHz	Compliant
Part 15 §15.225(b)	Field Strength emissions within the band 13.410 – 13.553 MHz and 13.567 – 13.710 MHz	Compliant
Part 15 §15.225(c)	Field Strength emissions within the band 13.110 – 13.410 MHz and 13.710 – 14.010 MHz	Compliant
Part 15 §15.225(d)	Outside-Band Field Strength emissions per 15.209 - 13.110 – 14.010 MHz	Compliant
Part 15 §15.225(e)	Frequency Tolerance of the Carrier	Compliant
Part 2 §2.1093	Radio Frequency radiation exposure, portable devices	Compliant

**Table 1. Executive Summary of EMC Part 15.225 Compliance Testing**

## II. Equipment Configuration

## A. Overview

Eurofins | MET Labs, Inc. was contracted by HID Global Corporation to perform testing on the RB25F, under HID Global Corporation's purchase order number 110963495.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the HID Global Corporation, RB25F.

The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	RB25F	
<b>Model(s) Covered:</b>	RB25F	
<b>EUT Specifications:</b>	Primary Power: 12 VDC	
	FCC ID: JQ6-RB25F	
	Type of Modulations:	ASK
	Equipment Code:	DXX
	Peak RF Output Power:	-15.26 dBm
	EUT Frequency Ranges:	13.56 MHz
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.	
<b>Environmental Test Conditions:</b>	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
<b>Evaluated by:</b>	Giuliano Messina	
<b>Report Date(s):</b>	February 8, 2019	

**Table 2. EUT Summary Table**

## B. References

<b>CFR 47, Part 15, Subpart C</b>	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
<b>ANSI C63.4:2014</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ISO/IEC 17025:2005</b>	General Requirements for the Competence of Testing and Calibration Laboratories
<b>ANSI C63.10-2013</b>	American National Standard for Testing Unlicensed Wireless Devices

**Table 3. References**

## C. Test Site

All testing was performed at Eurofins | MET Labs, Inc., 13501 McCallen Pass, Austin, TX 78753. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

Correlation between semi-anechoic chamber and OATS:

Two calibrated Loop antennas were used on an OATS. One antenna was driven by a signal generator with a known power. The receive antenna was initially placed 1m away from the transmit antenna. The two antennas were placed parallel to each other. The receive antenna was in turn connected to a calibrated spectrum analyzer. The emissions were swept from 9 kHz to 30 MHz. The receive antenna was then rotated 90 degrees and measurements re-taken. Additional measurements were taken when the receive antenna was placed at 3meters. This same setup was taken to inside the semi-anechoic chamber and the measurements repeated.

The data was used to correlate the semi-anechoic chamber and OATS.

## D. Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
<b>RF Frequencies</b>	±4.52 Hz	2	95%
<b>RF Power Conducted Emissions</b>	±2.97 dB	2	95%
<b>RF Power Radiated Emissions</b>	±2.95 dB	2	95%


**Table 4. Uncertainty Calculations Summary**

## E. Description of Test Sample

The RB25F, Equipment Under Test (EUT), is a robust, versatile and high-power fingerprint reader/controller that addresses the global need for a reliable biometric reader for physical access control applications.

The RB25F supports a variety of industry-standard technologies including iCLASS® Seos®, iCLASS SE, iCLASS®, MIFARE® DESFire®, MIFARE® Classic and HID Mobile Access® virtual credentials.

The RB25F device is paired with the web-based HID Biometric Manager software that performs configuration and management of the reader/ controller. In addition, the software enables enrollment of user's fingerprint credentials for use with the different biometric authentication modes - 1:1 verification and 1: N identification.

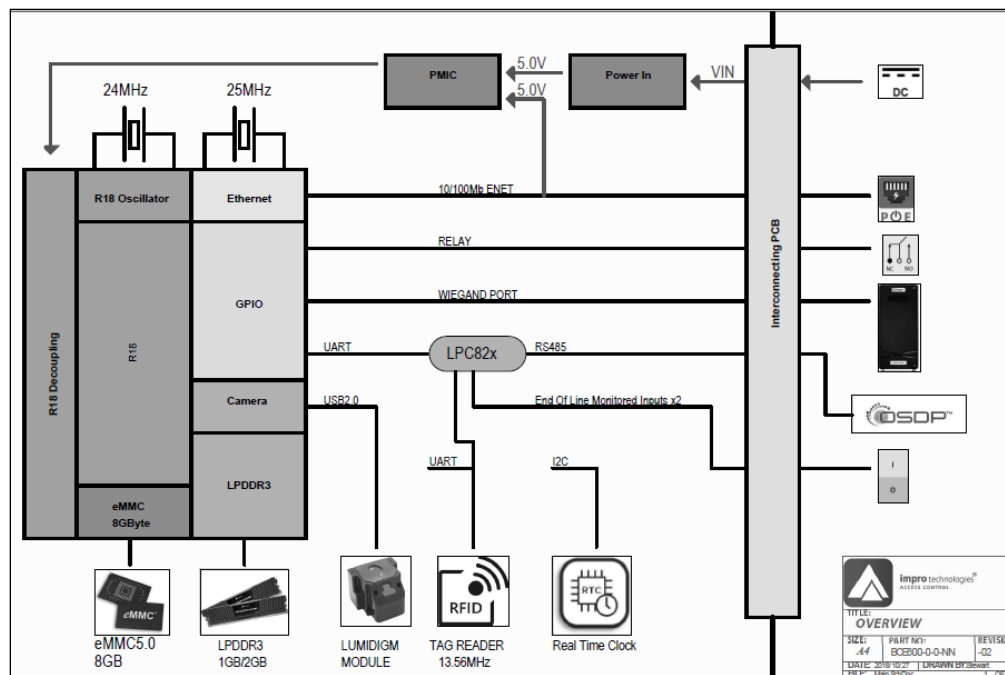

**Figure 1. Block Diagram of Test Configuration**

## F. Equipment Configuration

The EUT was set up as outlined in Figure 1. All equipment incorporated as part of the EUT is included in the following list.

Ref. ID	Slot #	Name / Description	Model Number	Part Number	Serial Number	Rev. #
1	NA	iCLASS SE Finger Print Reader	RB25F	NA	NA	NA

**Table 5. Equipment Configuration**

### G. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number	*Customer Supplied Calibration Data
1	Lap top	DELL	Inspiron 15.6"	NA
2	Ethernet Switch	NETGEAR 8 Port	GS108	NA
3	12VDC Battery	Duracell	12VDC 6A	NA

The 'Customer Supplied Calibration Data' column will be marked as either not applicable, not available, or will contain the calibration date supplied by the customer.

### Table 6. Support Equipment

## H. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty	Length as tested (m)	Max Length (m)	Shielded ? (Y/N)	Termination Box ID & Port Name
1	Ethernet	Ethernet cable CAT5/5E/6	1	0.46	100	Yes	Network
2	DC Input	22 awg wires	2	0.46	152	No	12VDC
3	Wiegand Port	22 awg wires	8	0.46	152	No	I/O
4	Inputs	22 awg wires	3	0.46	152	No	I/O
5	Relay	22 awg wires	3	0.46	152	No	I/O
6	RS-485	22 awg wires	3	0.46	152	No	I/O

Table 7. Ports and Cabling Information

## I. Mode of Operation

The unit has several modes: Card only; Finger only; Finger and Card; Template on card. Normal operation will be changing depending on the operator. For Card only- the unit will operate when a card is been presented. Finger only- the unit will be operated when a finger is scanned, for finger and Card- when a card is been presented and a finger as well. For template on card – when a card holds a finger print in it.

## J. Method of Monitoring EUT Operation

The unit has several LEDs turning on as soon as the unit is powering up and indicting the status of the unit. when unit is first powered up LEDs will turn Blue and Green until booting process is done, then LEDs will turn Red until a finger or card will be presented. Once a card or a finger will be presented, the Red light will turn Green and back to Red. The finger sensor will turn LEDs blue to indicate ready to read status.

## K. Modifications

### a) Modifications to EUT

No modifications were made to the EUT.

### b) Modifications to Test Standard

No modifications were made to the test standard.

## L. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to HID Global Corporation upon completion of testing.

### **III. Electromagnetic Compatibility Criteria for Intentional Radiators**

---

**Electromagnetic Compatibility Criteria for Intentional Radiators****§ 15.203      Antenna Requirement****Test Requirement:**

**§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:**

The EUT as tested is compliant the criteria A of §15.203. EUT utilizes an integral antenna.

**Test Engineer(s):**

Giuliano Messina

**Test Date(s):**

November 26, 2018



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.215(c) 20 dB Occupied Bandwidth


**Test Requirement(s):** § 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. In the case of intentional radiators operating under the provisions of subpart E, the emission bandwidth may span across multiple contiguous frequency bands identified in that subpart. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

**Test Procedure:** The transmitter was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measure with the spectrum analyzer using an RBW approximately 1-5% of the total emission bandwidth. The 20 dB Bandwidth was measured and recorded.

**Test Results:** The EUT was compliant with this requirement.

**Test Engineer(s):** Giuliano Messina

**Test Date(s):** November 26, 2018

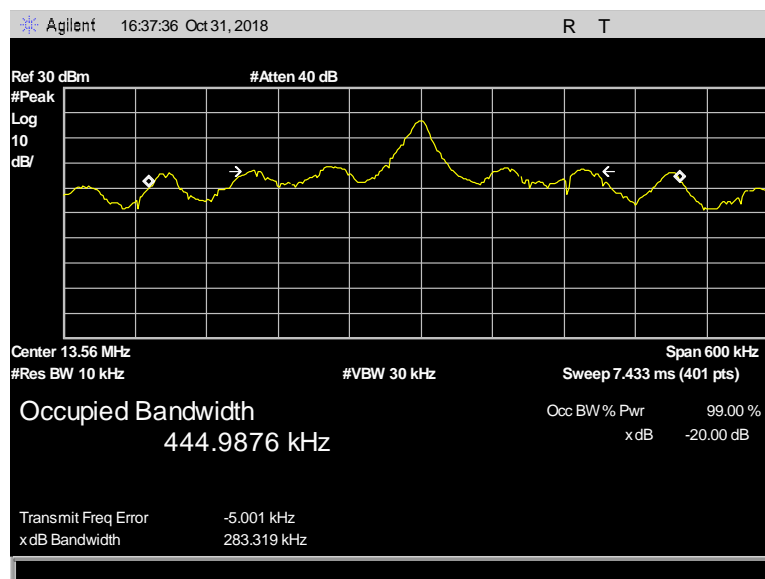

Plot 1. Occupied Bandwidth, 10 kHz

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.225(a) Field Strength, within the band 13.553 – 13.567 MHz

**Test Requirement(s):** 15.225 (a) The field strength of any emissions within the band 13.553 – 13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

**Test Procedure:** The EUT was set to transmit and placed on a 0.8m-high wooden stand inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4: 2014 and ANSI C63.10: 2013 were used. The loop antenna was located 3 m from the EUT. Measurements were conducted with the loop antenna at coaxial (parallel) and planar (perpendicular) orientations. The Spectrum analyzer RBW was set to 10 kHz and VBW was set to 30 kHz. A peak detector was used.


The measurements were made at 1m and then extrapolated to 30m using the following correction factor.

$$40\log(3/30) = -40 \text{ dB}$$

**Test Results:** The EUT was compliant with the requirements of §15.225(a).

**Test Engineer(s):** Giuliano Messina

**Test Date(s):** October 25, 2018

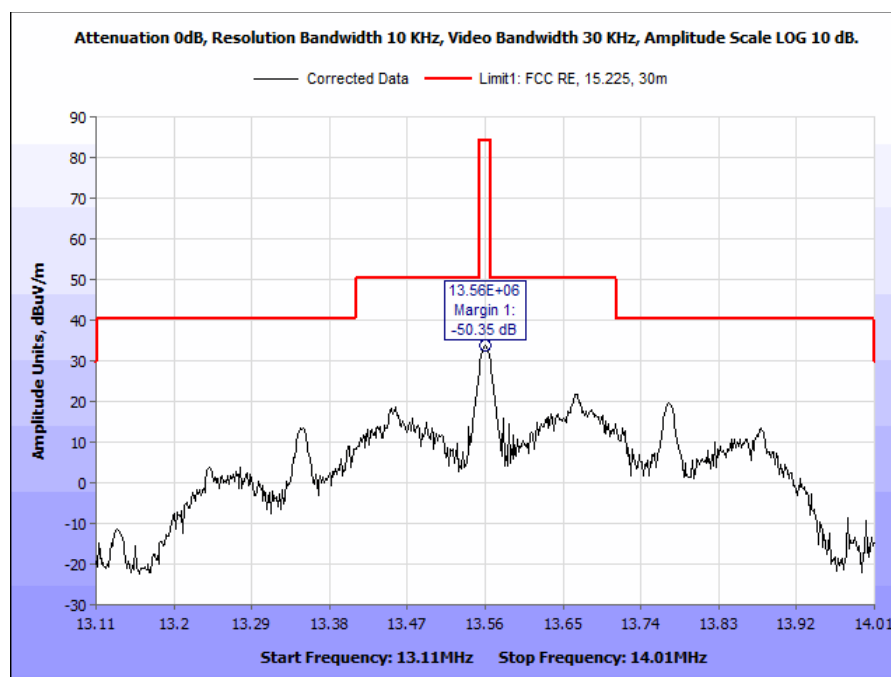

Plot 2. Emissions Within the Band 13.553 – 14.01 MHz Mask

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.225(b) Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz

**Test Requirement(s):** **15.225 (b)** Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

**Test Procedures:** The EUT was set to transmit and placed on a 0.8m-high wooden stand inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4: 2014 and ANSI C63.10: 2013 were used. The loop antenna was located 3 m from the EUT. Measurements were conducted with the loop antenna at coaxial (parallel) and planar (perpendicular) orientations. The Spectrum analyzer RBW was set to 10 kHz and VBW was set to 30 kHz. A peak detector was used.

The measurements were made at 3m and then extrapolated to 30m using the following correction factor.

$$40\log(3/30) = -40 \text{ dB}$$

**Test Results:** The EUT was compliant with the requirements of § 15.225(b). Please see §15.225(a) for data plots.

**Test Engineer(s):** Giuliano Messina

**Test Date(s):** November 26, 2018

---

**Electromagnetic Compatibility Criteria for Intentional Radiators****§ 15.225(c) Spurious Emission Limits, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz**

**Test Requirement(s):** **15.225 (c)** Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

**Test Procedures:** The EUT was set to transmit and placed on a 0.8m-high wooden stand inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4: 2014 and ANSI C63.10: 2013 were used. The loop antenna was located 3 m from the EUT. Measurements were conducted with the loop antenna at coaxial (parallel) and planar (perpendicular) orientations. The Spectrum analyzer RBW was set to 10 kHz and VBW was set to 30 kHz. A peak detector was used.

The measurements were made at 3m and then extrapolated to 30m using the following correction factor.

$$40\log(3/30) = -40 \text{ dB}$$

**Test Results:** The EUT was compliant with the requirements of §15.225(c). Please see §15.225(a) for data plots.

**Test Engineer(s):** Giuliano Messina

**Test Date(s):** November 26, 2018

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.225(d) Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz

**Test Requirement(s):** 15.225 (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

**Test Procedures:** The EUT was set to transmit and placed on a 0.8m-high wooden stand inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4: 2014 and ANSI C63.10: 2013 were used. For measurements below 30 MHz a loop antenna placed 3m away from the unit was used. For measurements above 30 MHz a biconallog antenna placed 10m away from the unit was used. Measurements were conducted with the loop antenna at coaxial (parallel) and planar (perpendicular) orientations. Above 30MHz, the Spectrum analyzer RBW was set to 100 kHz and VBW was set to 300 kHz. Below 30MHz, the Spectrum analyzer RBW was set to 10 kHz and VBW was set to 30 kHz. Below 150 kHz, the RBW was set to 300 Hz and the VBW set to 1 kHz. A peak detector was used below 30 MHz and a Quasi-peak detector was used for measurements for above 30 MHz.

The measurements made at 3m with the loop antenna were then extrapolated to 30m or 300 m using the following correction factors.

$$40\log(3/30) = -40 \text{ dB}$$

$$40\log(3/300) = -80 \text{ dB}$$


The measurements made at 10m with the biconilog antenna were then extrapolated to the 3m using the following correction factor.

$$20\log(10/3) = +10.46 \text{ dB}$$


**Test Results:** The EUT was compliant with requirements of § 15.225 (d).

**Test Engineer:** Giuliano Messina


**Test Date:** November 26, 2018

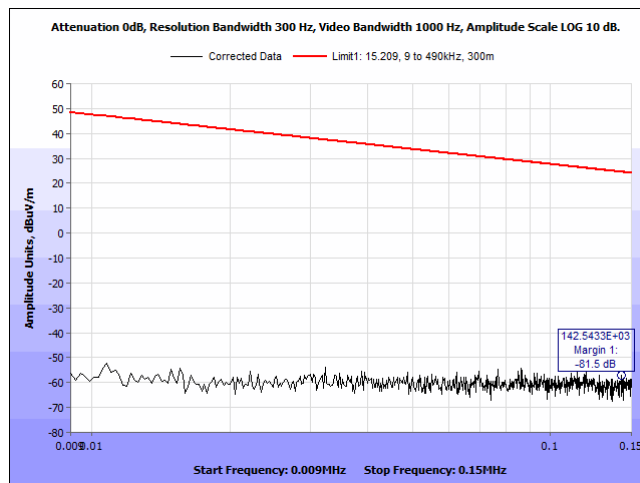


Plot 3. Spurious Emissions, Outside the Bands 13.56 MHz, 0.009 – 0.15 MHz

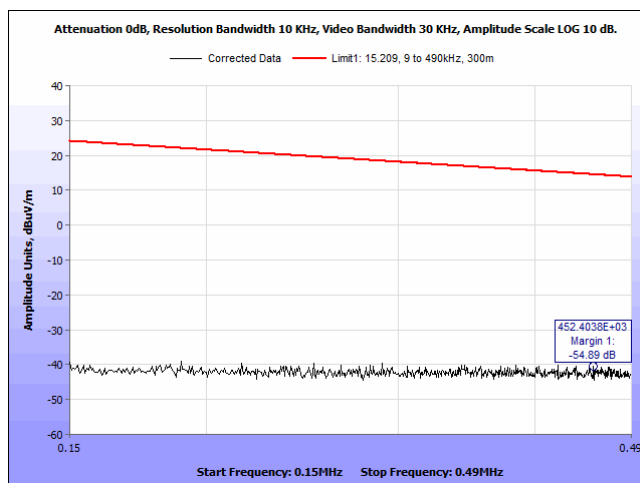


Plot 4. Spurious Emissions, Outside the Bands, 13.56 MHz, 0.15 – 0.49 MHz

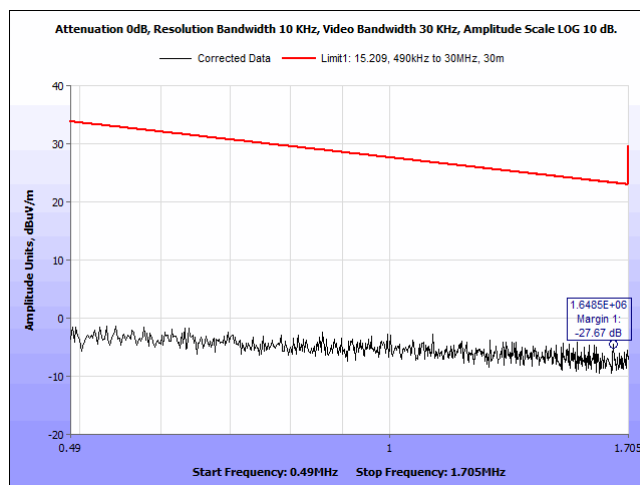

Plot 5. Spurious Emissions, Outside the Bands, 13.56 MHz, 0.49 – 1.705 MHz

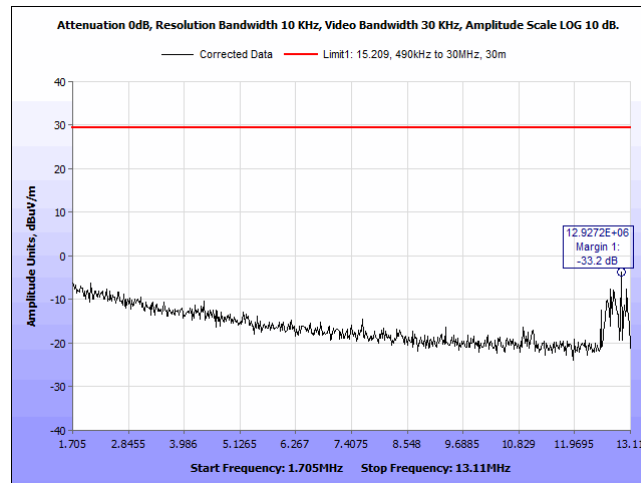


Plot 6. Spurious Emissions, Outside the Bands 13.56 MHz, 1.705 – 13.11 MHz

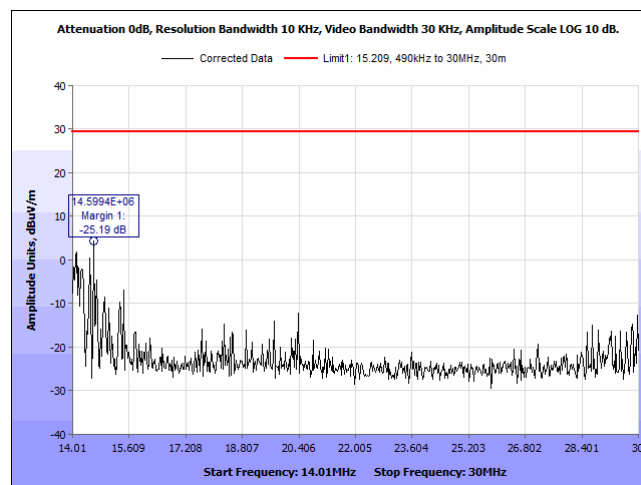


Plot 7. Spurious Emissions, Outside the Bands, 13.56 MHz, 14.01 – 30 MHz

Frequency (Hz)	Meter Reading (dBuV)	RBW (Hz)	Distance Correction Factor (dB)	Measurement Sensor Factor Amplitude (dBuV)	Preamp Factor (dB)	Corrected Measurement dBuV/m	Limit 1, 15.209 Average dBuV/m	Margin 1 (dB)
40.68E+06	36.7	100000	10.46	16.8	-24.57	39.39	40	-0.61

Table 8. Spurious Emissions, Outside the Bands, 13.56 MHz, 30 - 135.6 MHz, Vertical, QP Marker Data

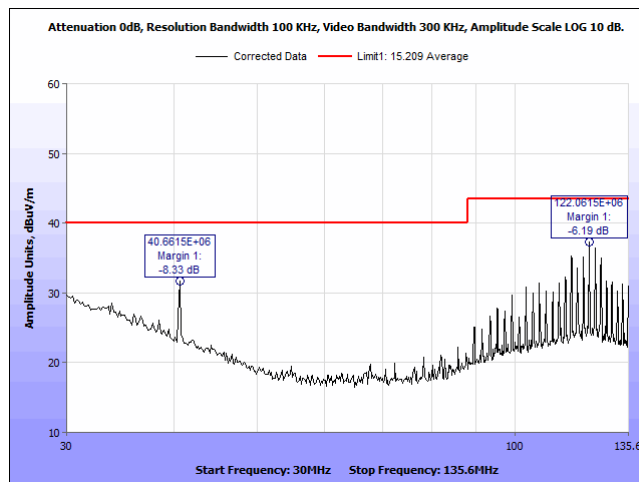

Plot 8. Spurious Emissions, Outside the Bands, 13.56 MHz, 30 – 135.6 MHz, Horizontal

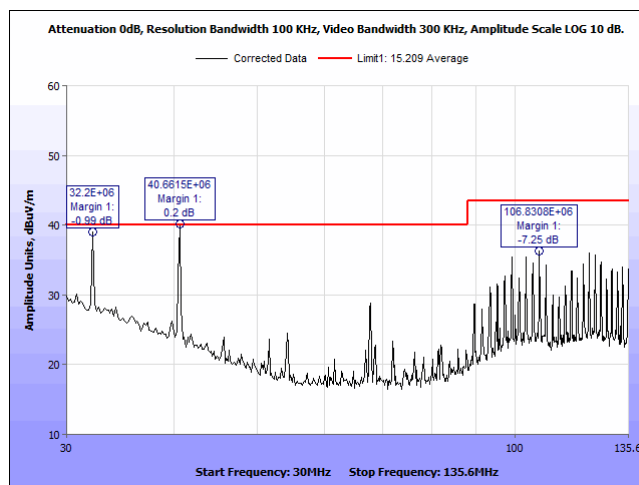

Plot 9. Spurious Emissions, Outside the Bands, 13.56 MHz, 30 – 135.6 MHz, Vertical



---

**Electromagnetic Compatibility Criteria for Intentional Radiators****§ 15.225(e) Frequency Stability**


**Test Requirement(s):** 15.225(e) The frequency tolerance of the carrier signal shall be maintained within +/-0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

**Test Procedure:** Measurements are in accordance with Part 2.1055. The EUT was placed in the Environmental Chamber and allowed to reach desired temperature. A spectrum analyzer was used to measure the frequency drift. The EUT was set to transmit in the operating frequency range. Frequency drift was investigated for the extreme temperatures (-20° to 50°C) and nominal temperature, as required.


**Test Results:** The EUT was found compliant with Part 15.225 (e) requirement(s) of this section.

**Test Engineer(s):** Giuliano Messina


**Test Date(s):** December 19, 2018

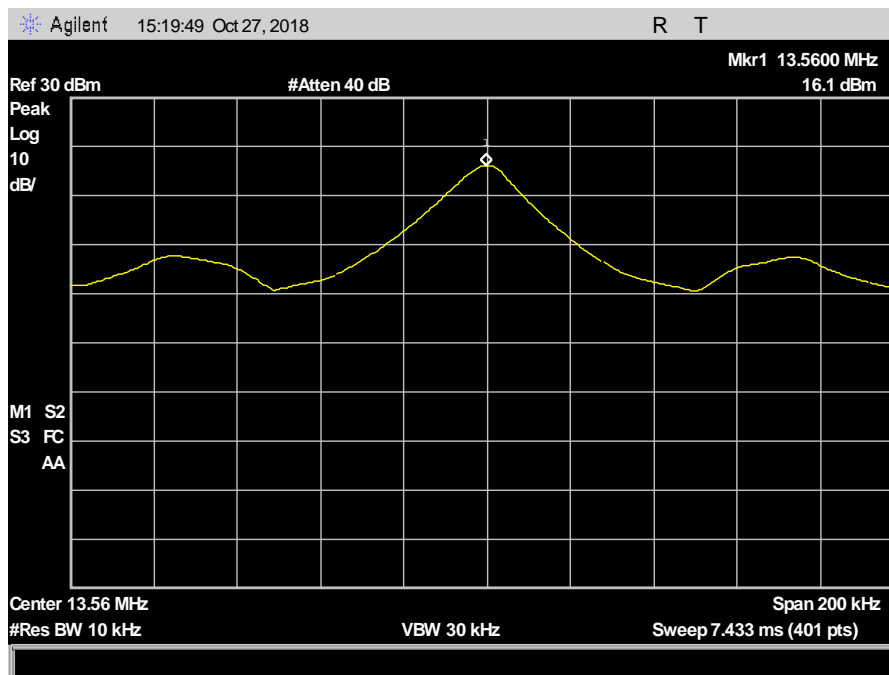


Plot 10. Frequency Tolerance, 85% of Supply

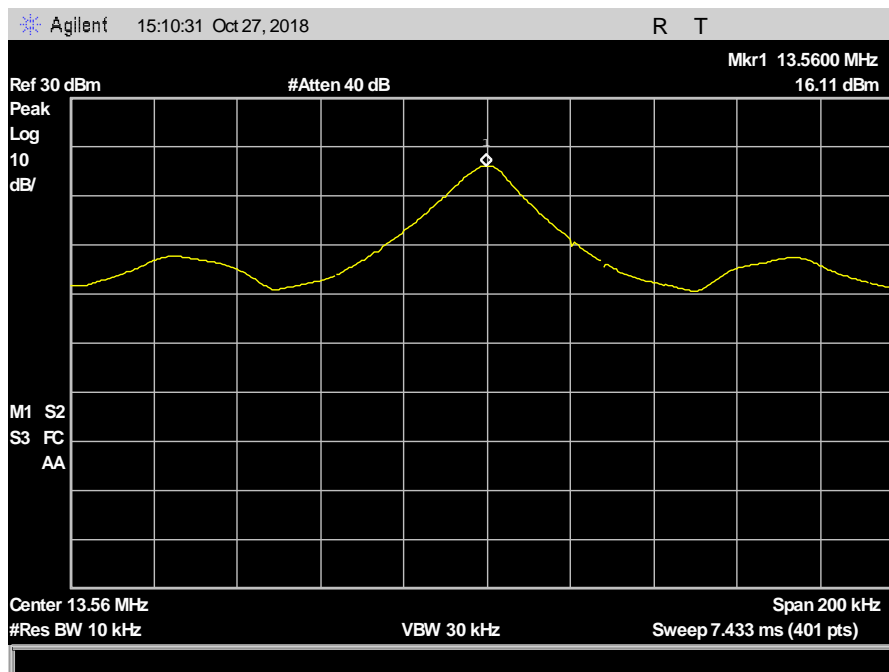

Plot 11. Frequency Tolerance, 115% of Supply

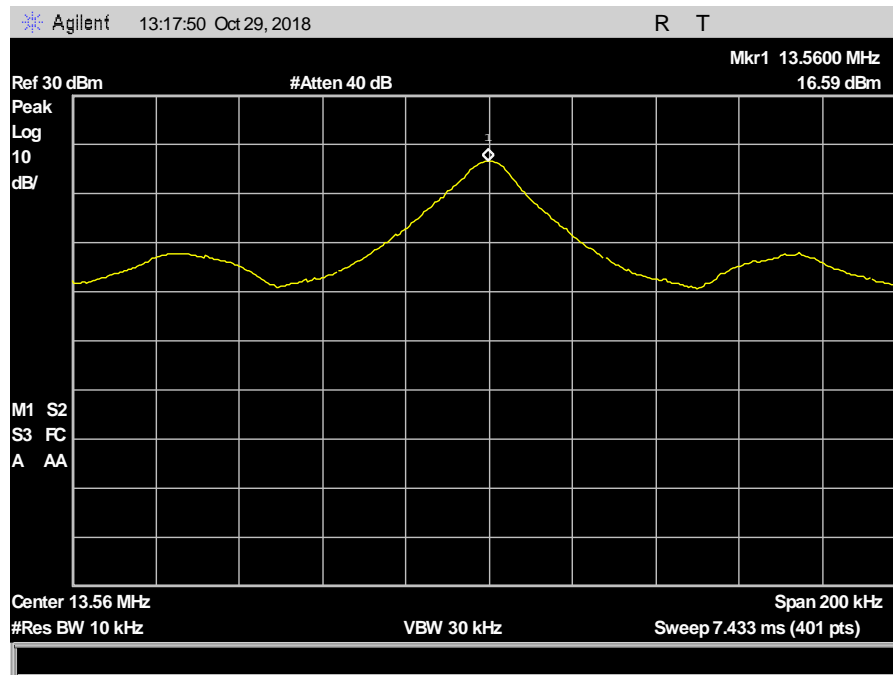

Plot 12. Frequency Tolerance, Extreme Temperatures, -20C

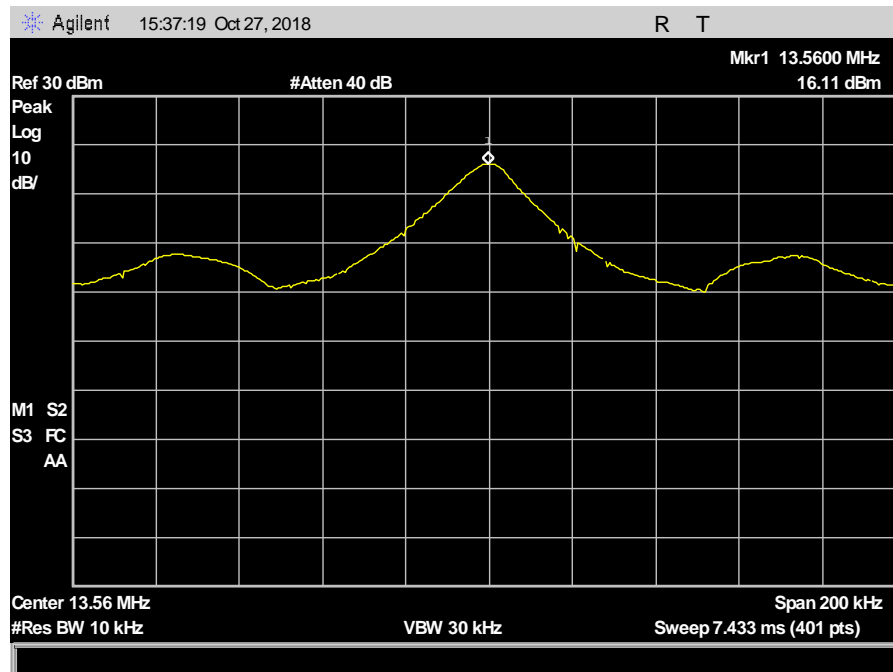

Plot 13. Frequency Tolerance, Extreme Temperatures, 50C

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 2.1093 Radiofrequency radiation exposure, portable devices

**RF Exposure Requirements:** §1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

**RF Radiation Exposure Limit:** §1.1310: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

**§2.1093:** As specified in this section, a portable device is defined as a transmitting device designed to be used so that the radiated structure(s) of the device is within 20 centimeters of the body of the user.

Calculations below are in accordance with KDB 447498 D01 General RF Exposure Guidance v06, Section 4.3 General SAR test exclusion guidance.

The SAR test exclusion thresholds are 3.0 for 1-g SAR and 7.5 for 10-g extremity SAR.

### HF (13.56 MHz)

FCC										
Frequency (MHz)	Con. Pwr. (dBm)	Con. Pwr. (uW)	Ant. Gain (dBi)	Ant. Gain numeric	Total Pwr. (uW)	Calculated SAR Threshold (mW)	1.0-g SAR Limit	Margin	Separation Distance Declared (mm)	Result
13.56	-15.26	29.79	1	1.26	37.5	442.974	3.0	442.93	5	Pass

Per KDB 447498, Section 4.3.1 (c)(2), applicable for frequencies below 100 MHz, the following may be considered for SAR test exclusion:

$$\frac{\text{max. power of channel, including tuneup tolerance [mW]}}{\text{min. test separation distance [mm]}} * \sqrt{f \text{ [GHz]}} \leq 3.0 (1 - g \text{ SAR Limit})$$

$$\text{max. power of channel, including tuneup tolerance [mW]} \leq \frac{3.0}{5 \text{ [mm]}} (1 - g \text{ SAR})$$

$$\text{max. power of channel, including tuneup tolerance [mW]} \leq 474.342 (1 - g \text{ SAR})$$

$$(0.5) * 474.342 \text{ mW} * [1 + \log\left(\frac{100}{13.56}\right)]$$

$$442.974 \text{ mW}$$

## IV. Test Equipment

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

<b>MET Asset #</b>	<b>Nomenclature</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Last Cal Date</b>	<b>Cal Due Date</b>
1A1225	Temperature Chamber	Espec	EXP-2H	2/27/2018	2/27/2019
1A1083	EMI Test Receiver	Rohde & Schwarz	ESU40	10/17/2018	10/17/2019
1A1106	10m Chamber (FCC)	ETS	Semi-Anechoic	12/2/2016	12/2/2019
1A1050	Bilog Antenna (30MHz to 1GHz)	Schaffner	CBL 6112D	8/29/2018	2/29/2020
1A1050-A	Attenuator	Fairview Microwave	SA6N5WA-04	8/29/2018	2/29/2020
1A1176	Active Loop Antenna	ETS-Lindgren	6502	1/31/2018	7/31/2019
1A1099	Generator	COM-Power Corp	CGO-51000	See Note	
1A1088	Pre-Amp	Rohde & Schwarz	TS-PR1	See Note	
1A1044	Generator	COM-Power Corp	CG-520	See Note	
1A1073	Multi Device Controller	ETS EMCO	2090	See Note	
1A1074	System Controller	Panasonic	WV-CU101	See Note	

**Table 9. Test Equipment List**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

## **V. Certification & User's Manual Information**

## Certification & User's Manual Information

### A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### § 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing*;
  - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
  - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

## Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

### § 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

### § 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

---

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

## Certification & User's Manual Information

### § 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
  - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
    - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
    - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
  - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

## Certification & User's Manual Information

### 1. Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

#### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.
- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

#### § 15.21 Information to user.

The user's manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

### § 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

# End of Report