

Description: 2.4-2.5/5.15-7.125GHz Dual band Ceramic 10x3.2x1.5mm PART NUMBER: W3006

Series: Chip Antenna



- 2.4-2.5 / 5.15-7.125GHz WIFi-6E
- Peak gain 2.2 / 5.2 dBi
- Efficiency 60 / 70 %
- Compact size W x L x H (10 x 3.2 x 1.5 mm)
- Low weight: 240 mg
- Fully SMD compatible
- Tape and reel packing
- RoHS Compliant Product
- Moisture Sensitivity Level: MSL1

Applications:

- Layout 1 for 2.4-2.5 / 5.15-5.85GHz
- Layout 2 for 2.4-2.5 / 5.15-7.125GHz
- IEEE 802.11a/b/g/n/x
- WiFi-6E
- 5 GHz WLAN
- 2.4 GHz WLAN
- 2.4 GHz ISM Band Systems
- 5GHz ISM Band Systems
- ZigBee IEEE 802.15.4



Issue: 2137


In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100

All dimensions are in inches/mm

Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998





TECHNICAL DATA SHEET

Description: 2.4-2.5/5.15-7.125GHz Dual band Ceramic 10x3.2x1.5mm

PART NUMBER: W3006

ELECTRICAL SPECIFICATIONS

Layout and Matching for 2.4-2.5/5.15-5.85GHz Frequency 2.4-2.5 / 5.15-5.85 GHz **Return Loss** -8/-9 dB max 60 / 80 % Efficiency (typical) Peak Gain (typical) 1.8 / 4.5dBi Layout and Matching for 2.4-2.5/5.15-7.125GHz WiFi-6E Frequency 2.4-2.5 / 5.15-7.125 GHz **Return Loss** -5/-5 dB max Efficiency (typical) 65 / 75 % Peak Gain (typical) 1.6 / 4.2dBi Nominal Impedance 50Ω Polarization Linear Interface SMD mount ceramic antenna



2

lssue: 2137

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



Description: 2.4-2.5/5.15-7.125GHz Dual band Ceramic 10x3.2x1.5mm

Series: Chip Antenna

PART NUMBER: W3006

MECHANICAL SPECIFICATIONS

Weight	0.24g
Size	10 x 3.2 x 1.5 mm

ENVIRONMENTAL SPECIFICATIONS

Operating temperature	-40~+85° C
Temperature	-40~+85° C
Humidity	Cyclic 6 +25° C/+55° C 95%
Vibration	
Sinusoidal 2-8Hz	7.5 mm
Sinusoidal 8-200Hz	20 m/s²
Shocks	0.5 ms
Salt mist	96 hours

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



3




Description: 2.4-2.5/5.15-7.125GHz Dual band Ceramic 10x3.2x1.5mm

Series: Chip Antenna

PART NUMBER: W3006

MECHANICAL DRAWING AND TERMINAL CONFIGURATION

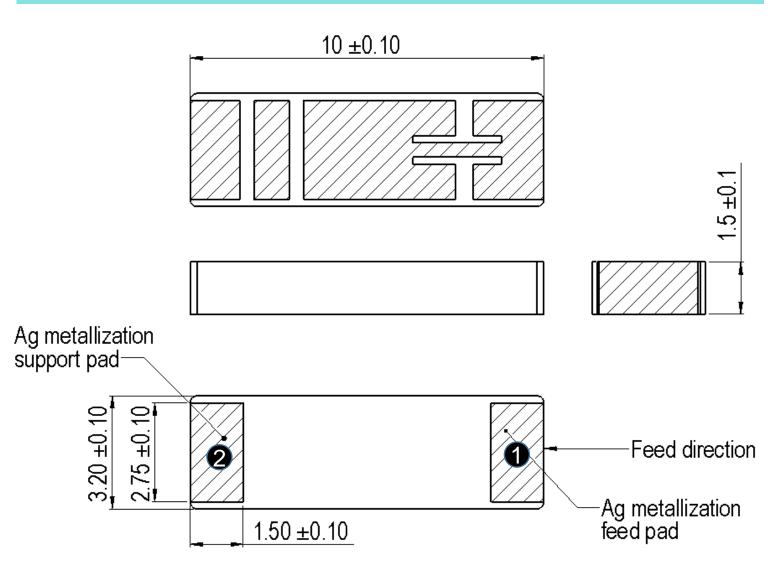

No.	Terminal Name	Terminal Dimensions
1	Feed	1.5 x 2.75 mm
2	Support pad	1.5 x 2.75 mm
Antenna feed pad can be identified by looking top surface metallization pattern		

Issue: 2137

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



4




Description: 2.4-2.5/5.15-7.125GHz Dual band Ceramic 10x3.2x1.5mm

Series: Chip Antenna

PART NUMBER: W3006

MECHANICAL DRAWING AND TERMINAL CONFIGURATION

Ground cleared under antenna

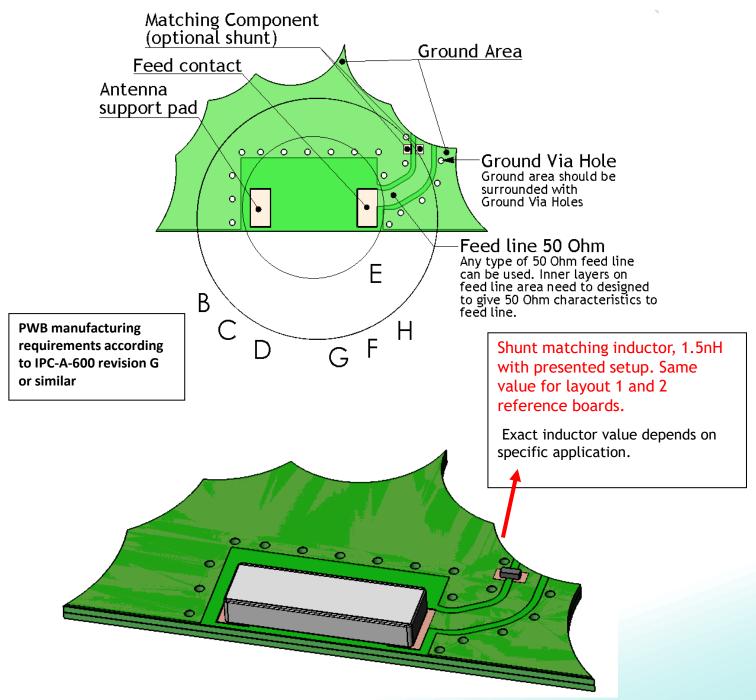

Issue: 2137

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



5



Description: 2.4-2.5/5.15-7.125GHz Dual band Ceramic 10x3.2x1.5mm


Series: Chip Antenna

PART NUMBER: W3006


MECHANICAL DRAWING AND TERMINAL CONFIGURATION

1.Layout and Matching for 2.4-2.5/5.15-5.85GHz


Ground clearance area (11.60 x 6.25 mm)

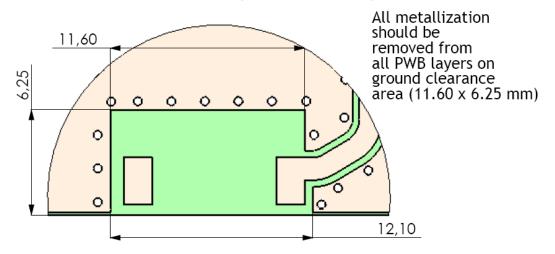

Opening in bottom/inner ground layers



Opening in other layers (no ground/ RF)



Issue: 2137

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



6



YAGEO company


Series: Chip Antenna

Description: 2.4-2.5/5.15-7.125GHz Dual band Ceramic 10x3.2x1.5mm

PART NUMBER: W3006


MECHANICAL DRAWING AND TERMINAL CONFIGURATION

Recommended Antenna Pad Dimensions on PWB Layout (top surface)

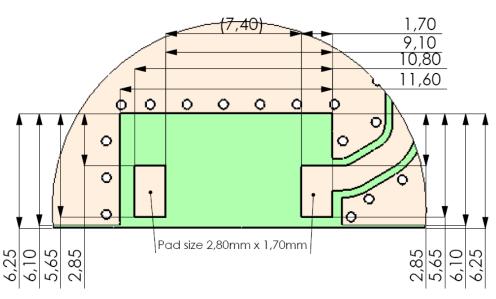

Pad dimensions in top copper

Recommended test board layout for electrical characteristic measurement, test board outline size 80 x 37mm

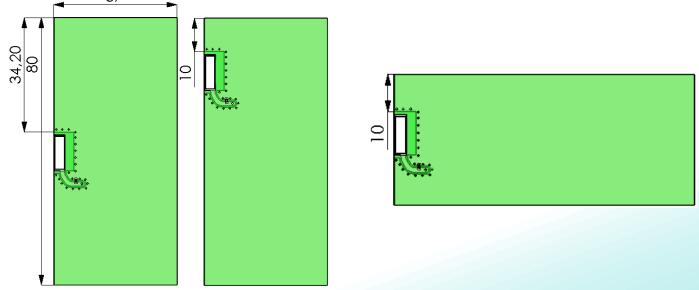

Issue: 2137

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



Series: Chip Antenna

Description: 2.4-2.5/5.15-7.125GHz Dual band Ceramic 10x3.2x1.5mm

PART NUMBER: W3006

MECHANICAL DRAWING AND TERMINAL CONFIGURATION


Ground clearance area (13.3 x 6.25 mm)

2.Layout and Matching for 2.4-2.5/5.15-7.125GHz


6.2 o О O С 13.80

All metallization should be removed from all PWB layers on ground clearance area (13.3 x 6.25mm)

Opening in bottom/inner ground layers

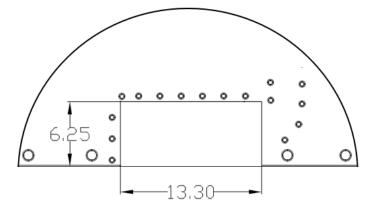

Opening in other layers (no ground/RF)

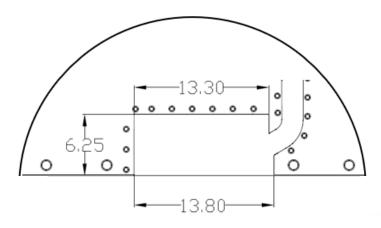

Issue: 2137

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



8




Description: 2.4-2.5/5.15-7.125GHz Dual band Ceramic 10x3.2x1.5mm

Series: Chip Antenna

PART NUMBER: W3006

MECHANICAL DRAWING AND TERMINAL CONFIGURATION

Recommended Antenna Pad Dimensions on PWB Layout (top surface)

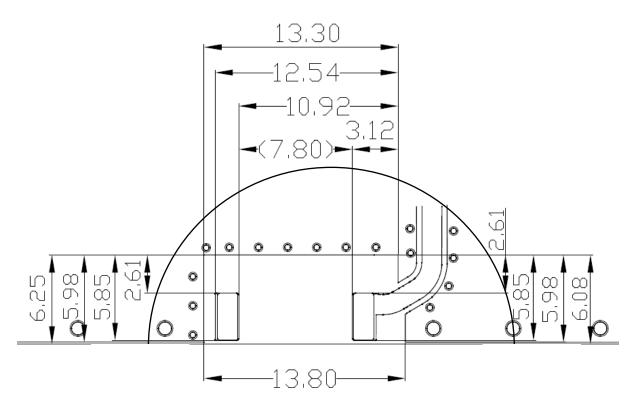

Pad dimensions in top copper

Issue: 2137

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



9




TECHNICAL DATA SHEET

Description: 2.4-2.5/5.15-7.125GHz Dual band Ceramic 10x3.2x1.5mm


PART NUMBER: W3006

Test setup

1. Layout and Matching for 2.4-2.5/5.15-5.85GHz

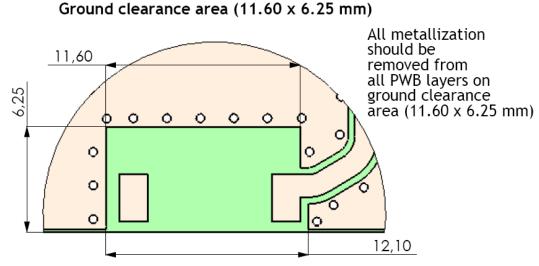

Return Loss

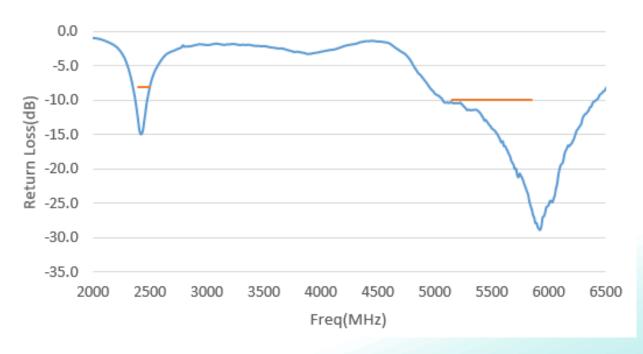

Issue: 2137

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

10

RoHS




Description: 2.4-2.5/5.15-7.125GHz Dual band Ceramic 10x3.2x1.5mm

Series: Chip Antenna

PART NUMBER: W3006

CHARTS

1. Layout and Matching for 2.4-2.5/5.15-5.85GHz

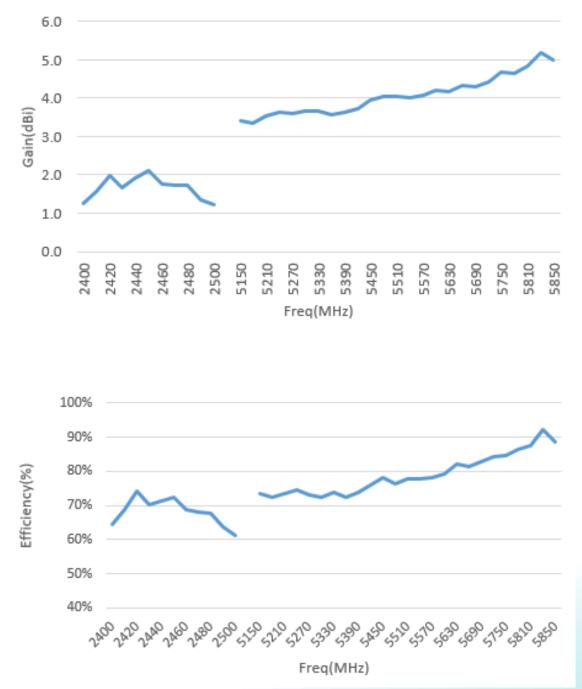

Issue: 2137

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

11

RoHS




TECHNICAL DATA SHEET

Description: 2.4-2.5/5.15-7.125GHz Dual band Ceramic 10x3.2x1.5mm

PART NUMBER: W3006

CHARTS

1. Layout and Matching for 2.4-2.5/5.15-5.85GHz

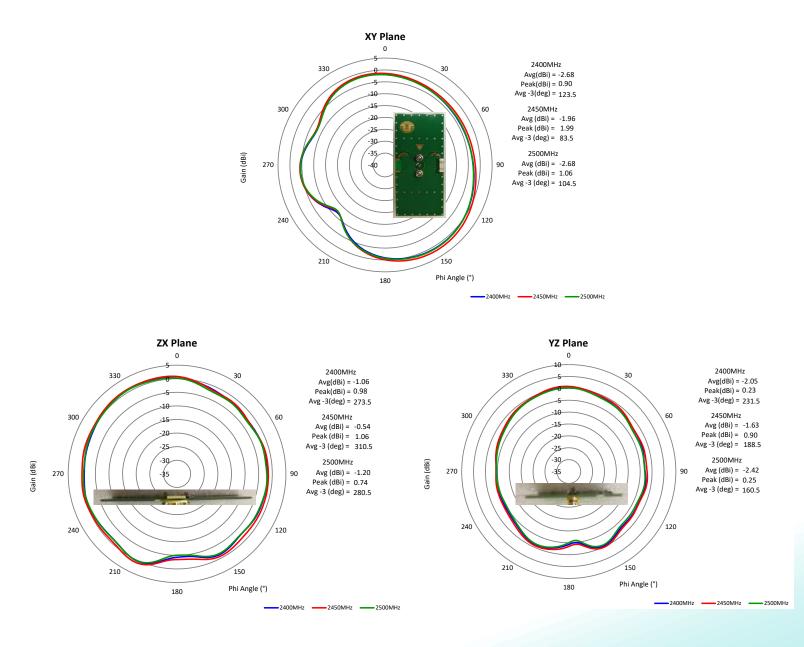

Issue: 2137

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






TECHNICAL DATA SHEET

Description: 2.4-2.5/5.15-7.125GHz Dual band Ceramic 10x3.2x1.5mm

PART NUMBER: W3006

CHARTS

1. Layout and Matching for 2.4-2.5/5.15-5.85GHz

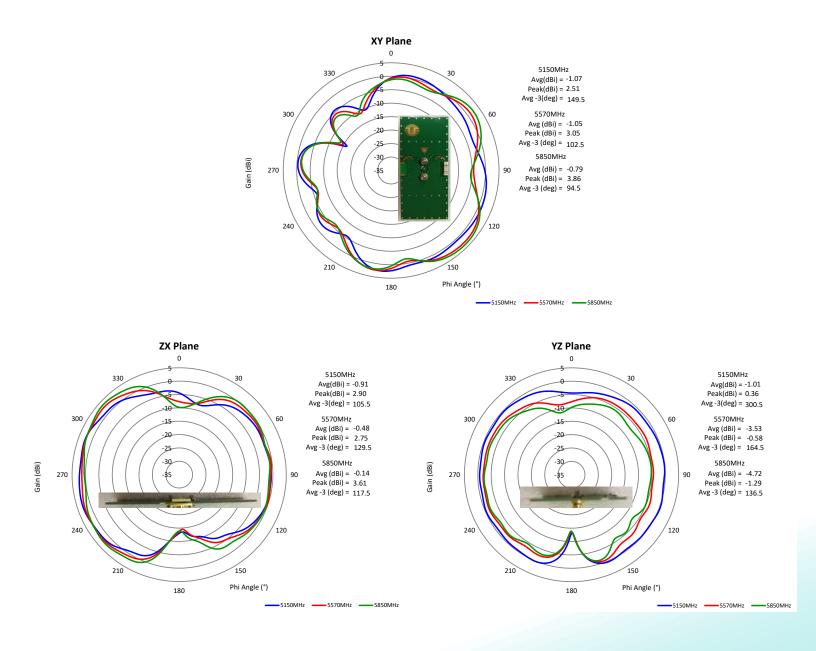

Issue: 2137

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Description: 2.4-2.5/5.15-7.125GHz Dual band Ceramic 10x3.2x1.5mm

Series: Chip Antenna


PART NUMBER: W3006

Test setup

2. Layout and Matching for 2.4-2.5/5.15-7.125GHz

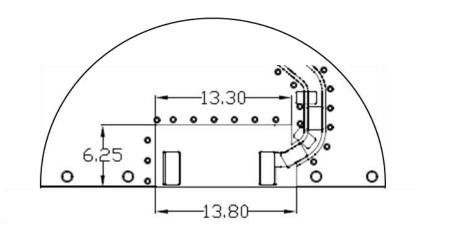

Return Loss

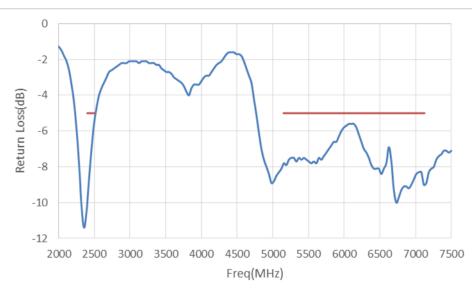

Issue: 2137

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Description: 2.4-2.5/5.15-7.125GHz Dual band Ceramic 10x3.2x1.5mm

Series: Chip Antenna

PART NUMBER: W3006

CHARTS

2. Layout and Matching for 2.4-2.5/5.15-7.125GHz

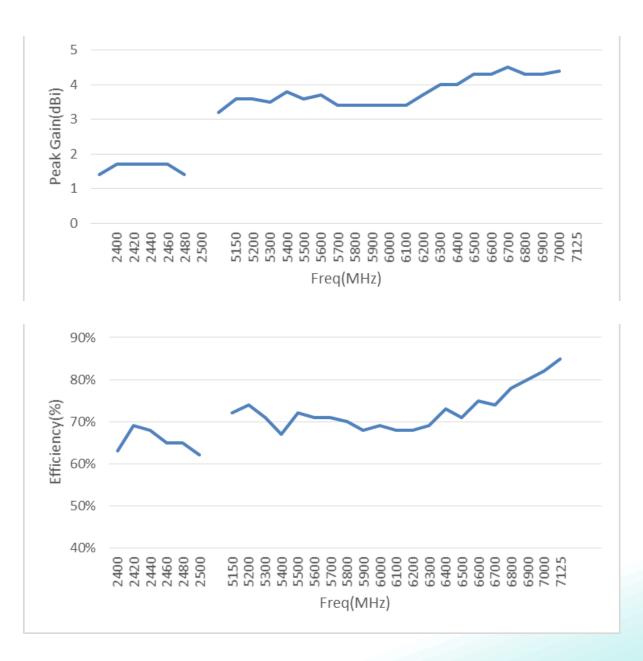

Issue: 2137

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



15




Description: 2.4-2.5/5.15-7.125GHz Dual band Ceramic 10x3.2x1.5mm


Series: Chip Antenna

PART NUMBER: W3006

CHARTS

2. Layout and Matching for 2.4-2.5/5.15-7.125GHz

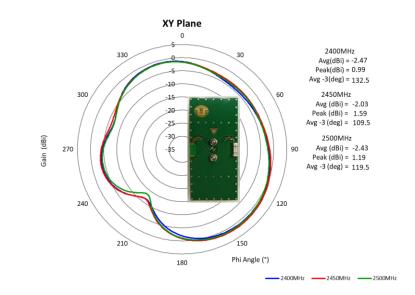

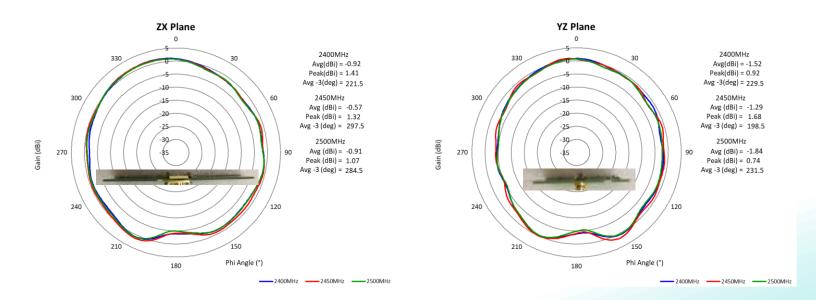

Issue: 2137

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Description: 2.4-2.5/5.15-7.125GHz Dual band Ceramic 10x3.2x1.5mm


Series: Chip Antenna

PART NUMBER: W3006

CHARTS

2. Layout and Matching for 2.4-2.5/5.15-7.125GHz

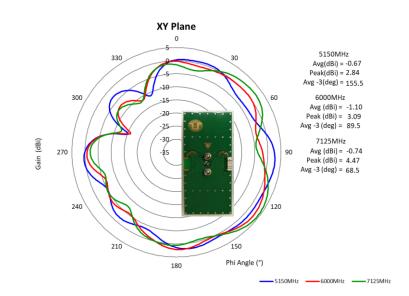

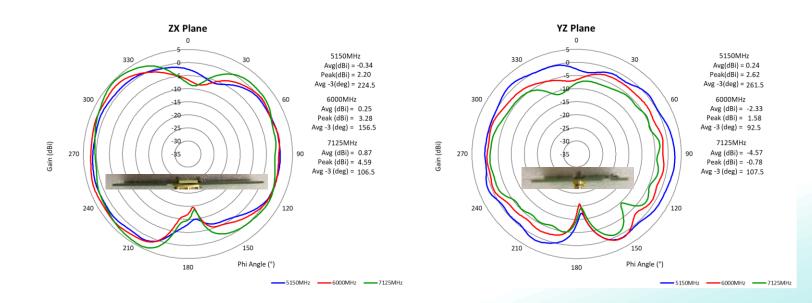

Issue: 2137

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





TECHNICAL DATA SHEET

Description: 2.4-2.5/5.15-7.125GHz Dual band Ceramic 10x3.2x1.5mm

PART NUMBER: W3006

PACKAGING


1000pcs antennas per 7" reel

3pcs 7" reel per inner package box


2pcs inner box per out box

Total 6000pcs antenna per out box

Out box size: 390mmx215mmx165mm







LEVEL

NOT MOISTURE SENSITIVE

1

These Devices do not require special storage conditions provided:

- 1. They are maintained at conditions equal to or less than 30 $^{\circ}\mathrm{C}$ and 85% RH.
- They are solder reflowed at a peak body temperture which does not exceed 260°C.

Note: Level and body temperture defined by IPC/JEDEC J-STD-020

Issue: 2137

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse: W3006