

FCC RF Test Report

APPLICANT : BlackBerry Ltd.
EQUIPMENT : GSM Quad-band / UMTS FIVE bands / LTE
eleven bands mobile phone
BRAND NAME : BlackBerry
MODEL NAME : RJE181LW
MARKETING NAME : DTEK50
FCC ID : L6ARJE180LW
STANDARD : FCC 47 CFR Part 2, 27
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on May 09, 2016 and completely tested on Jun. 30, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-D-2010 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China

TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Modification of EUT	5
1.5 Maximum Frequency Tolerance and Emission Designator.....	6
1.6 Testing Site.....	6
1.7 Applied Standards	7
1.8 Specification of Accessory.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System.....	9
2.3 Support Unit used in test configuration and system	9
2.4 Measurement Results Explanation Example.....	10
3 CONDUCTED TEST ITEMS	11
3.1 Measuring Instruments	11
3.2 Test Setup	11
3.3 Test Result of Conducted Test.....	11
3.4 Conducted Output Power Measurement	12
3.5 EIRP Power Density	13
3.6 Occupied Bandwidth.....	14
3.7 Conducted Band Edge Measurement	15
3.8 Conducted Spurious Emission Measurement	16
3.9 Frequency Stability Measurement.....	17
4 RADIATED TEST ITEMS	18
4.1 Measuring Instruments	18
4.2 Test Setup	18
4.3 Test Result of Radiated Test.....	18
4.4 Radiated Spurious Emission Measurement	19
5 LIST OF MEASURING EQUIPMENT	20
6 UNCERTAINTY OF EVALUATION	21
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG611504-06C	Rev. 01	Initial issue of report	Jul. 12, 2016

**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.4	§2.1046	RSS-Gen(6.12)	Conducted Output Power	Reporting Only	PASS	-
-	-	RSS-195(5.5.1)	Peak-to-Average Ratio	<13dB	N/A	Reporting only
3.5	§27.50 (a)(3)	RSS-195(5.5)	EIRP Power Density	EIRP < 250mW/5MHz	PASS	-
3.6	§2.1049	RSS-GEN(6.6)	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §27.53 (a)(4)	RSS-195(5.6)	Conducted Band Edge Measurement	Refer standard	PASS	-
3.8	§2.1051 §27.53 (a)(4)	RSS-195(5.6)	Conducted Spurious Emission	$< 70 + 10\log_{10}(P[\text{Watts}])$	PASS	-
3.9	§2.1055 §27.54	RSS-195(5.4)	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (a)(4)	RSS-195(5.6)	Radiated Spurious Emission	$< 70 + 10\log_{10}(P[\text{Watts}])$	PASS	Under limit 0.67 dB at 4608.000 MHz

1 General Description

1.1 Applicant

BlackBerry Ltd.

2200 University Ave E., Waterloo, ON, CAN. N2K0A7

1.2 Manufacturer

TCL Communication Ltd.

5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	GSM Quad-band / UMTS FIVE bands / LTE eleven bands mobile phone
Brand Name	BlackBerry
Model Name	RJE181LW
Marketing Name	DTEK50
FCC ID	L6ARJE180LW
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+(16QAM uplink is not supported)/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth v3.0 + EDR/Bluetooth v4.0 LE/Bluetooth v4.2 LE
IMEI Code	Conducted: 004402243119959 Radiation: 004402243119942 ERP/EIRP: NA
Tx Frequency	LTE Band 30 : 2307.5 MHz ~ 2312.5 MHz
Rx Frequency	LTE Band 30 : 2352.5 MHz ~ 2357.5 MHz
Bandwidth	5MHz / 10MHz
Maximum Output Power to Antenna	LTE Band 30 : 19.73 dBm
Type of Modulation	QPSK / 16QAM
HW Version	PIO
SW Version	AAF295
EUT Stage	Identical Prototype

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Maximum Frequency Tolerance and Emission Designator

LTE Band 30	QPSK			16QAM		
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum Conducted power(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum Conducted power(W)
5	4M50G7D	-	0.0935	4M50W7D	-	0.0757
10	9M05G7D	0.0013	0.0940	8M97W7D	-	0.0701

1.6 Testing Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.	
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958	
Test Site No.	Sporton Site No.	FCC/IC Registration No.
	03CH03-KS	306251/4086E

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	Sporton Site No.	
	TH01-SZ	

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, Part 27(D)
- ANSI / TIA / EIA-603
- FCC KDB 971168 Power Meas License Digital Systems D01 v02r02
- IC RSS-Gen Issue 4
- RSS-195 Issue 2

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.8 Specification of Accessory

Specification of Accessory				
AC Adapter	Brand Name	N/A	Model Name	UC13US
	Power Rating	I/P: 100 - 240Vac 0.5A, O/P:5V 2.0A		
	Manufacturer	BYD		
	S/N	CBA0059AG4C1		
Battery 1	Brand Name	N/A	Model Name	TLp026EJ
	Power Rating	3.85V 2610mAh		
	Manufacturer	COSLIGHT		
	P/N	CAC2610010CJ		
Battery 2	Brand Name	N/A	Model Name	TLp026E2
	Power Rating	3.84V 2610mAh		
	Manufacturer	SCUD		
	P/N	CAC2610011C2		
USB Cable 1	Brand Name	NA	Model Name	NA
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		
	P/N	CDA0000043C8		
USB Cable 2	Brand Name	NA	Model Name	NA
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		
	P/N	CDA0000043C2		
Earphone	Brand Name	LIANCHUANG	Model Name	NA
	Signal Line Type	1.25 meter, non-shielded cable, without ferrite core		
	P/N	CCB0045A15C3		

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	30	-	-	V		-	-	V	V	V	V	V	V	V	V
		-	-		V			V	V	V	V	V		V	
Peak-to-Average Ratio	30	-	-		V	-	-	V	V	V		V		V	
E.I.R.P PSD	30	-	-	V		-	-	V	V	V			V	V	V
		-	-		V	-	-	V	V	V				V	
26dB and 99% Bandwidth	30	-	-	V		-	-	V	V			V	V	V	V
		-	-		V	-	-	V	V			V		V	
Conducted Band Edge	30	-	-	V		-	-	V	V	V		V	V		V
		-	-		V	-	-	V	V	V		V		V	
Conducted Spurious Emission	30	-	-	V		-	-	V	V	V			V	V	V
		-	-		V	-	-	V	V	V				V	
Frequency Stability	30	-	-		V	-	-	V				V		V	
Radiated Spurious Emission	30	-	-	V		-	-	V		V			V	V	V
					V			V		V				V	
Note	- The mark "V" means that this configuration is chosen for testing - The mark "-" means that this bandwidth is not supported. - The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.														

2.2 Connection Diagram of Test System

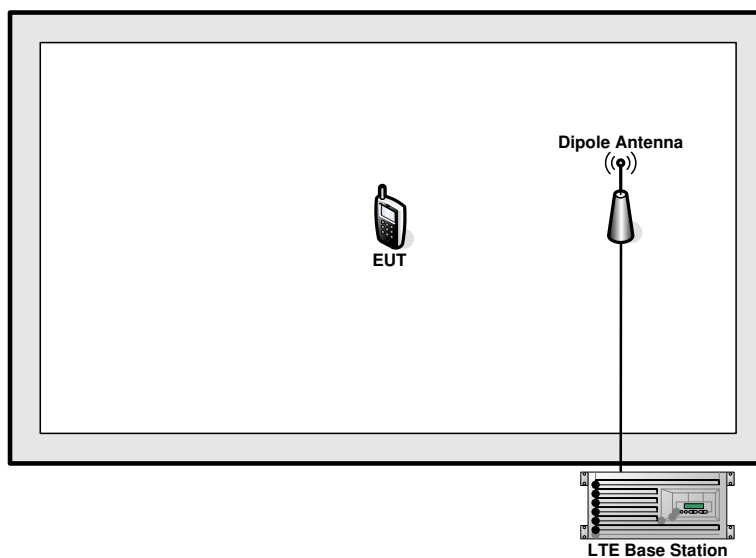

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTRON	GPS-3030D	N/A	N/A	Unshielded, 1.8m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5dB and 10dB attenuator.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5 + 10 = 15 \text{ (dB)}\end{aligned}$$


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

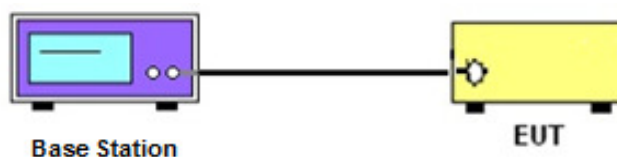

3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth ,Band-Edge and Conducted Spurious Emission

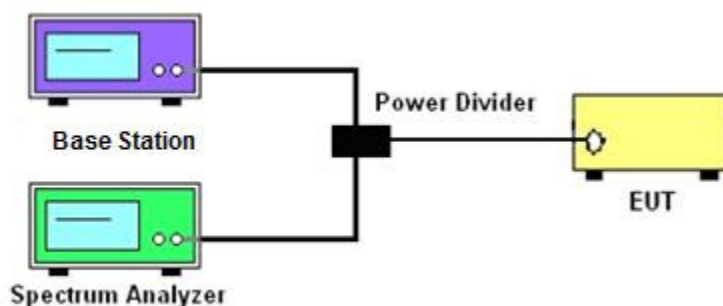

3.2.3 Frequency Stability

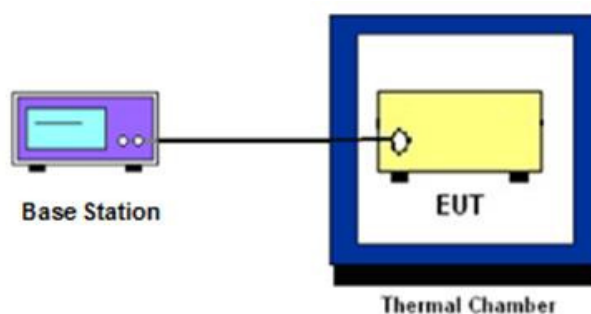

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.

3.5 EIRP Power Density

3.5.1 Description of EIRP Power Density

For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

3.5.2 Test Procedures

1. Set instrument center frequency to OBW center frequency.
2. Set span to at least 1.5 times the OBW.
3. Set the RBW to the specified reference bandwidth (often 1 MHz).
4. Set VBW $\geq 3 \times$ RBW.
5. Detector = RMS (power averaging).
6. Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
7. Sweep time = auto couple.
8. Employ trace averaging (RMS) mode over a minimum of 100 traces.
9. Use the peak marker function to determine the maximum amplitude level within the reference bandwidth (PSD).

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26dB occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal 26 dB.

The 26 dB emission bandwidth(EBW) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF powers with full RB sizes were measured.

3.7 Conducted Band Edge Measurement

3.7.1 Description of Conducted Band Edge Measurement

27.53 (a)(4)

For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

3.7.2 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The band edges of low and high channels were measured with RBW $\geq$ 1% EBW set in Spectrum Analyzer, while the EUT was transmitting under maximum power.
3. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
4. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)} = [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$

3.8 Conducted Spurious Emission Measurement

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $70 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $70 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [70 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [70 + 10\log(P)] \text{ (dB)}$
 $= -40\text{dBm}.$

3.9 Frequency Stability Measurement

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

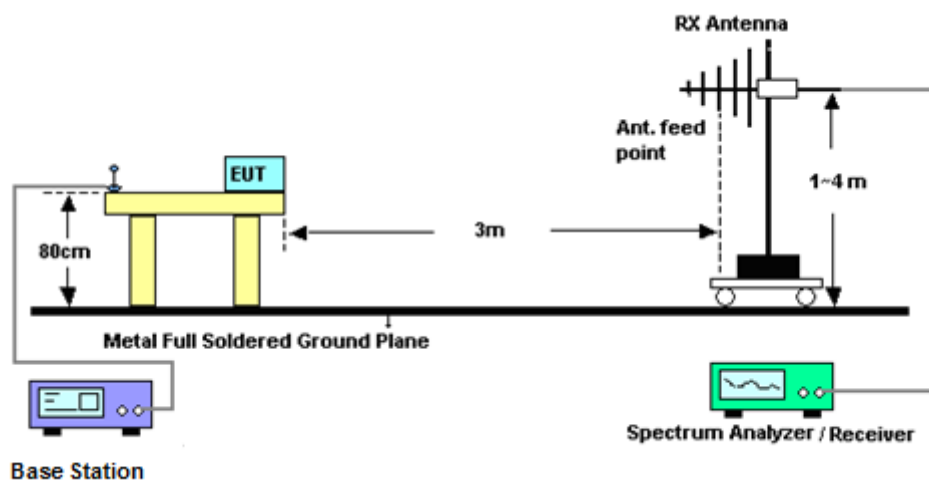

4.2.2 For radiated test above 1GHz

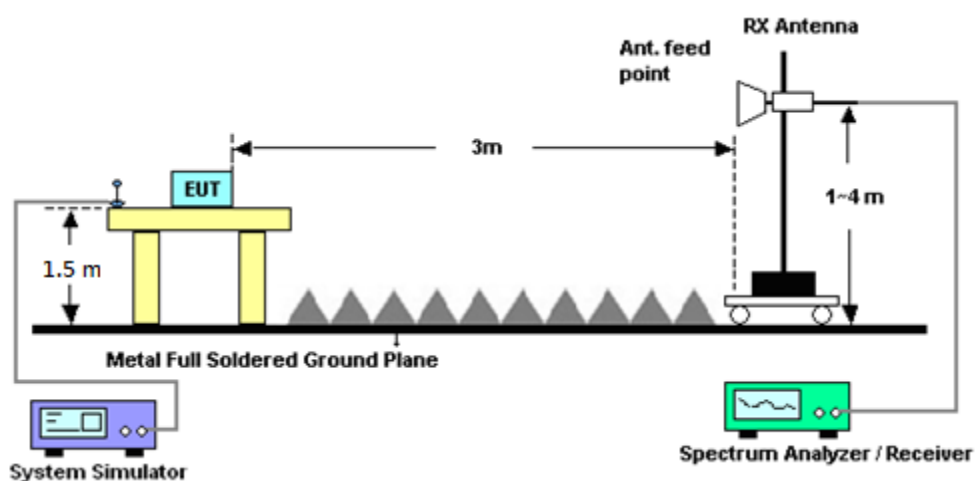

4.3 Test Result of Radiated Test

Please refer to Appendix B.

4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $70 + 10 \log (P)$ dB.

4.4.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $70 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [70 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[70 + 10\log(P)]$ (dB)
= -40dBm.

11. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	May 07, 2016	Jun. 18, 2016~ Jun. 21, 2016	May 06, 2017	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Aug. 07, 2015	Jun. 18, 2016~ Jun. 21, 2016	Aug. 06, 2016	Conducted (TH01-SZ)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 22, 2016	Jun. 30, 2016	Apr. 21, 2017	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 16, 2016	Jun. 30, 2016	Apr. 15, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 16, 2016	Jun. 30, 2016	Apr. 15, 2017	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz ~40GHz	Oct. 24, 2015	Jun. 30, 2016	Oct. 23, 2016	Radiation (03CH03-KS)
Amplifier	Burgeon	BPA-530	102212	0.01MHz~3000MHz	Aug.10, 2015	Jun. 30, 2016	Aug. 09, 2016	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18~40GHz	Aug. 27, 2015	Jun. 30, 2016	Aug. 26, 2016	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 24, 2015	Jun. 30, 2016	Oct. 23, 2016	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jun. 30, 2016	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 30, 2016	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 30, 2016	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.5dB
--	-------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.5dB
--	-------

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.6dB
--	-------

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 30 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	-	19.71	-
10	1	25		-	19.73	-
10	1	49		-	19.70	-
10	25	0		-	18.99	-
10	25	12		-	18.88	-
10	25	25		-	18.89	-
10	50	0		-	18.88	-
10	1	0	16-QAM	-	18.40	-
10	1	25		-	18.46	-
10	1	49		-	18.15	-
10	25	0		-	18.02	-
10	25	12		-	17.96	-
10	25	25		-	18.04	-
10	50	0		-	17.82	-
5	1	0	QPSK	19.66	19.52	19.71
5	1	12		19.69	19.63	19.36
5	1	24		19.59	19.56	19.61
5	12	0		18.97	19.00	19.00
5	12	7		18.92	18.98	18.96
5	12	13		18.78	18.94	18.92
5	25	0		18.78	18.90	18.95
5	1	0	16-QAM	18.47	18.32	18.76
5	1	12		18.67	18.58	18.79
5	1	24		18.67	18.33	18.17
5	12	0		18.13	17.63	17.85
5	12	7		18.02	17.99	17.75
5	12	13		17.84	17.92	17.81
5	25	0		17.75	17.94	17.93



LTE Band 30

Peak-to-Average Ratio

Mode	LTE Band 30 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Middle CH	3.94	4.75	4.90	5.68	PASS


LTE Band 30 / 10MHz / QPSK

Middle Channel / 1RB



Date: 18 JUN 2016 15:10:08

Middle Channel / Full RB

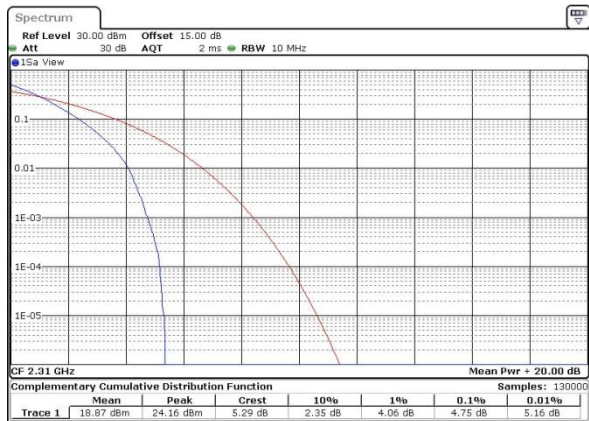

Date: 18 JUN 2016 15:10:58

LTE Band 30 / 10MHz / 16QAM

Middle Channel / 1RB



Date: 18 JUN 2016 15:10:26

Middle Channel / Full RB









Date: 18 JUN 2016 15:10:44

**EIRP Power Density**

Mode	LTE Band 30 : Conducted Power Density (dBm/5MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	20.48	20.04	-	-	-	-	-	-
Middle CH	-	-	-	-	20.27	19.91	21.37	20.07	-	-	-	-
Highest CH	-	-	-	-	20.59	19.75	-	-	-	-	-	-


Mode	LTE Band 30 : EIRP Power Density (dBm/5MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	21.24	20.8	-	-	-	-	-	-
Middle CH	-	-	-	-	21.03	20.67	22.13	20.83	-	-	-	-
Highest CH	-	-	-	-	21.35	20.51	-	-	-	-	-	-
Antenna Gain	0.76 dBi											
Limit	250mW / 5MHz = 24dBm / 5MHz											
Result	Pass											

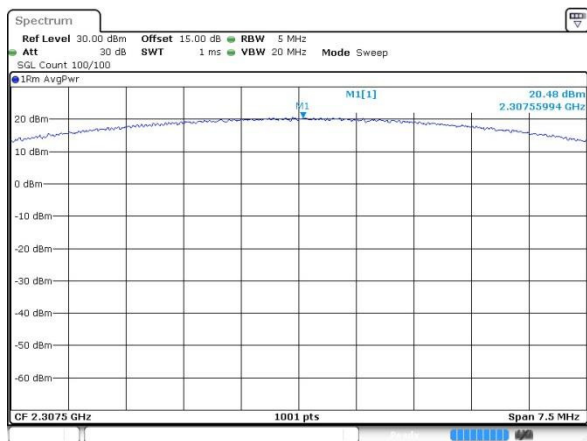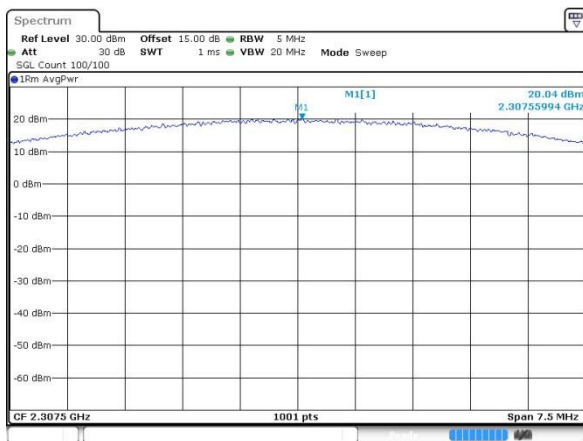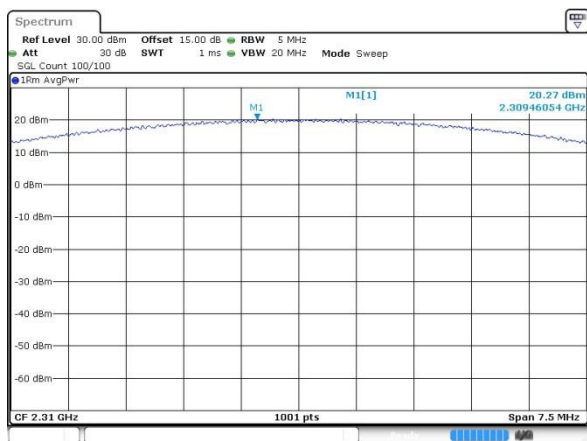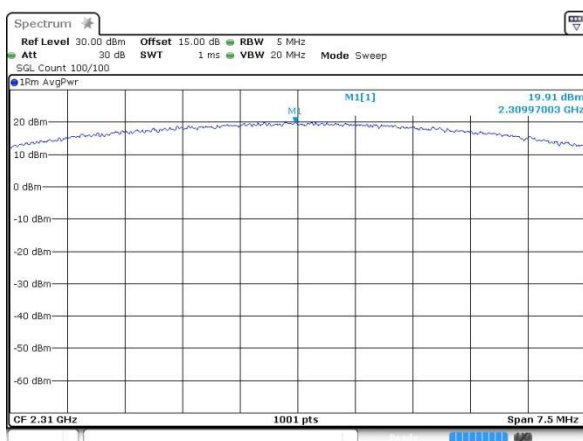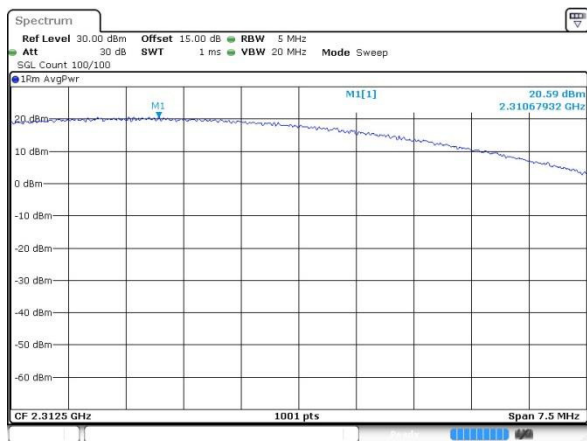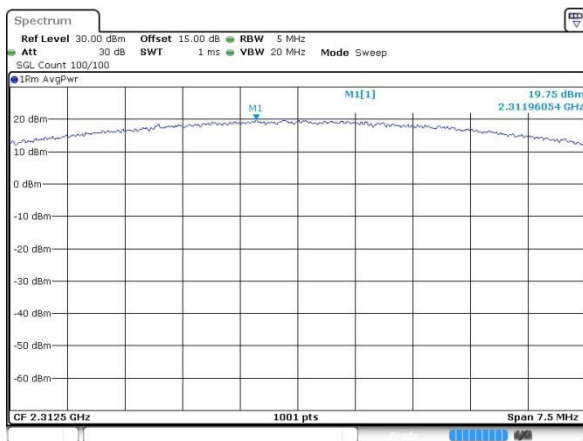LTE Band 30 / 5MHz
Lowest Channel / 5MHz / 1RB12 / QPSK

Lowest Channel / 5MHz / 1RB12 / 16QAM

Middle Channel / 5MHz / 1RB12 / QPSK

Middle Channel / 5MHz / 1RB12 / 16QAM

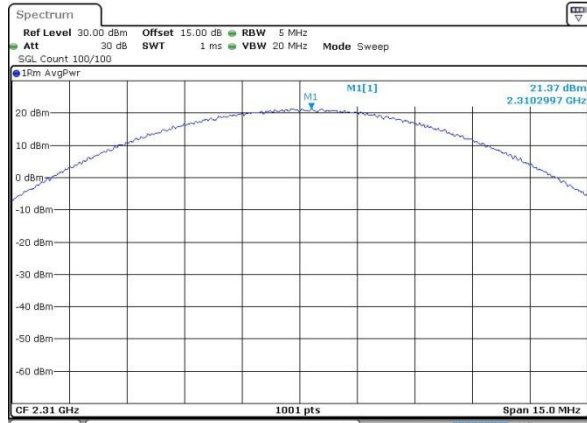Highest Channel / 5MHz / 1RB0 / QPSK

Highest Channel / 5MHz / 1RB12 / 16QAM


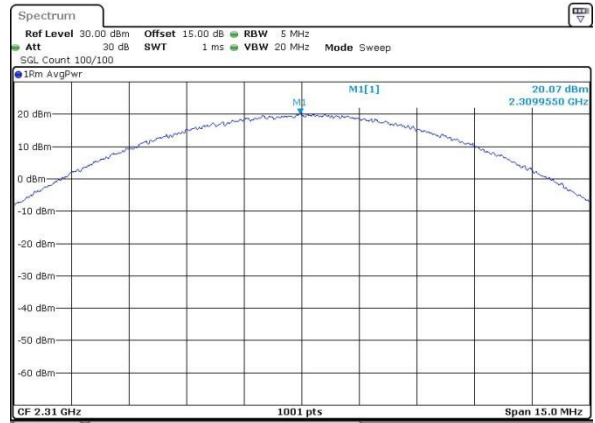


LTE Band 30 / 10MHz

Middle Channel / 10MHz / 1RB25 / QPSK



Middle Channel / 10MHz / 1RB25 / 16QAM




**26dB Bandwidth**

Mode	LTE Band 30 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.93	4.87	-	-	-	-	-	-
Middle CH	-	-	-	-	5.05	4.83	9.83	9.79	-	-	-	--
Highest CH	-	-	-	-	4.91	4.91	-	-	-	-	-	-


LTE Band 30

Lowest Channel / 5MHz / QPSK

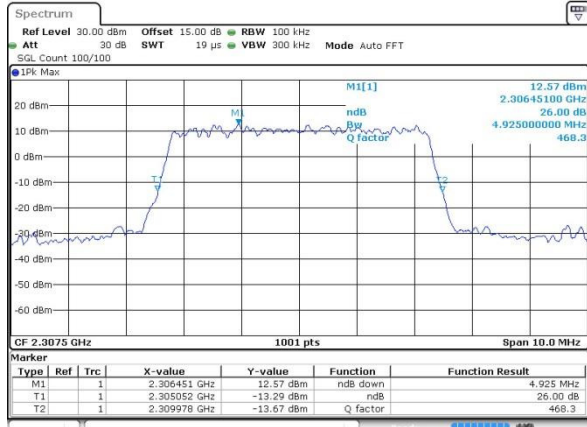


Date: 18 JUN 2016 14:33:56

Lowest Channel / 5MHz / 16QAM

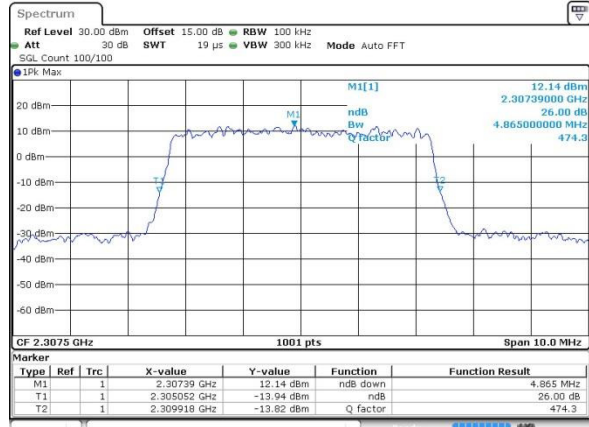


Date: 18 JUN 2016 14:34:17

Middle Channel / 5MHz / QPSK

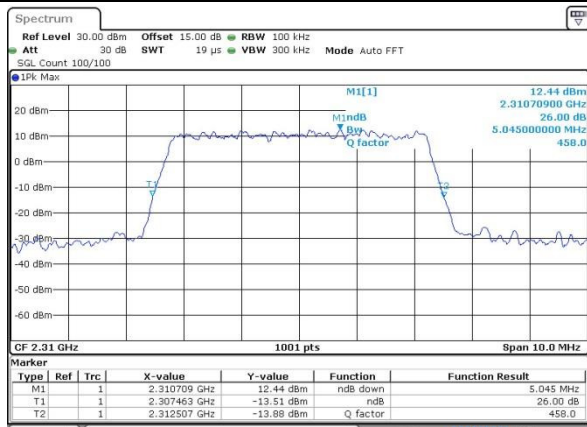


Date: 18 JUN 2016 14:34:37

Middle Channel / 5MHz / 16QAM

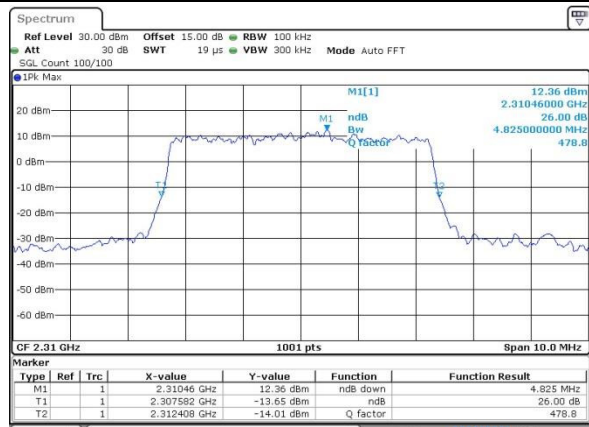


Date: 18 JUN 2016 14:39:02

Highest Channel / 5MHz / QPSK

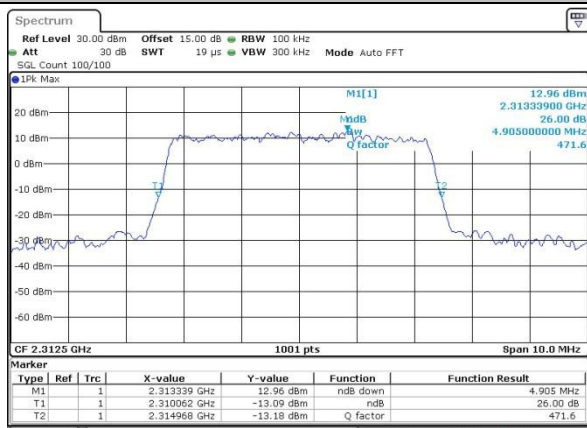

Date: 18 JUN 2016 14:39:58


Highest Channel / 5MHz / 16QAM

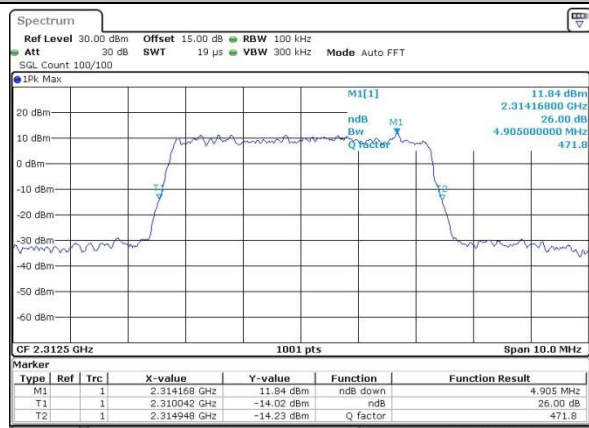

Date: 18 JUN 2016 14:39:43


LTE Band 30

Middle Channel / 10MHz / QPSK

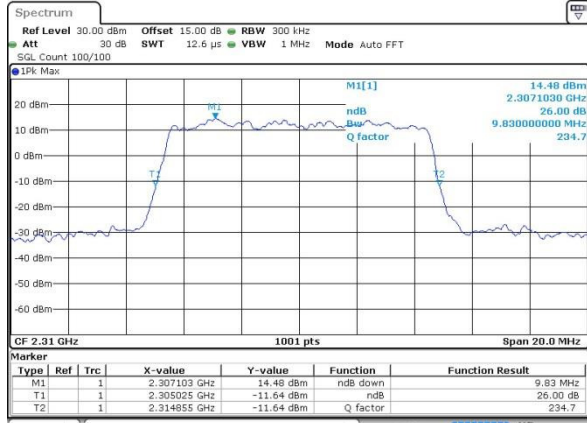

Date: 18 JUN 2016 15:08:13

Middle Channel / 10MHz / 16QAM

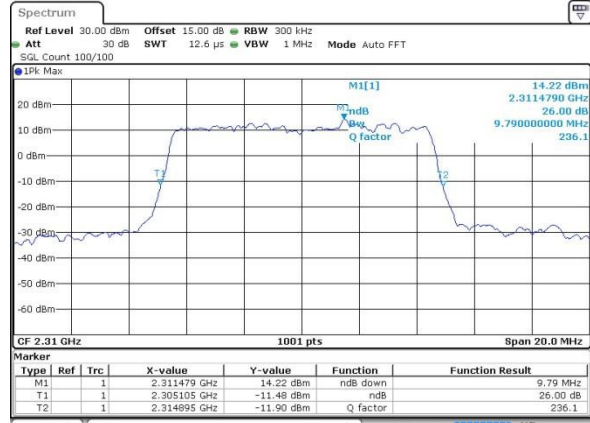


Date: 18 JUN 2016 15:08:31

**Occupied Bandwidth**

Mode	LTE Band 30 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.50	4.48	-	-	-	-	-	-
Middle CH	-	-	-	-	4.47	4.50	9.05	8.97	-	-	-	-
Highest CH	-	-	-	-	4.49	4.48	-	-	-	-	-	-


LTE Band 30

Lowest Channel / 5MHz / QPSK

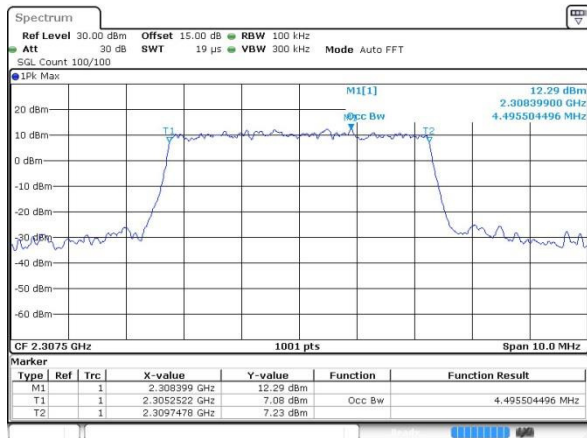


Date: 18 JUN 2016 14:41:32

Lowest Channel / 5MHz / 16QAM

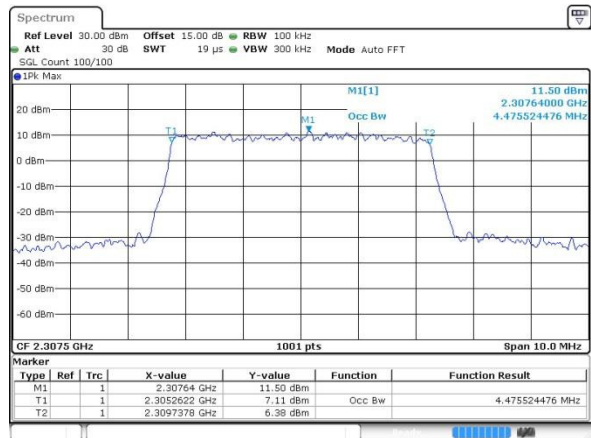


Date: 18 JUN 2016 14:41:49

Middle Channel / 5MHz / QPSK

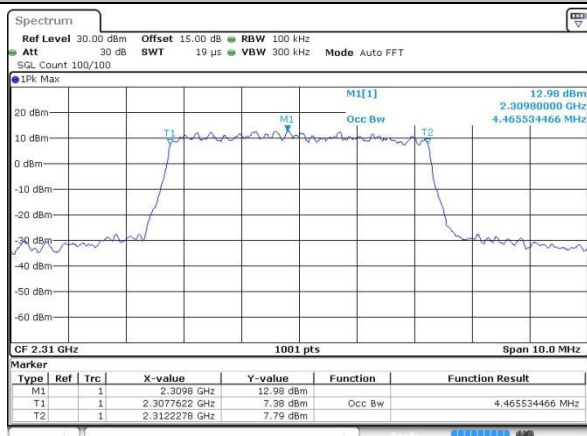


Date: 18 JUN 2016 14:42:09

Middle Channel / 5MHz / 16QAM

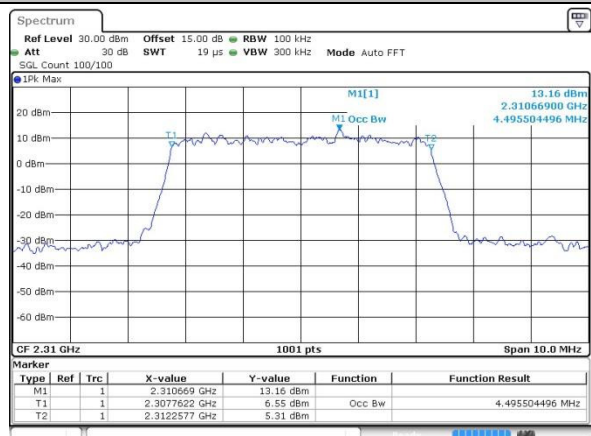


Date: 18 JUN 2016 14:42:22

Highest Channel / 5MHz / QPSK

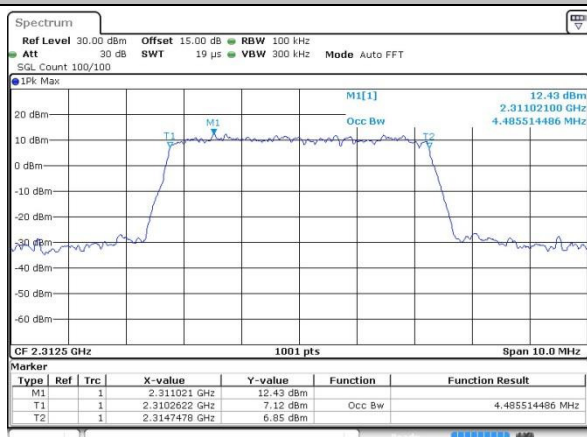

Date: 18 JUN 2016 14:42:36


Highest Channel / 5MHz / 16QAM

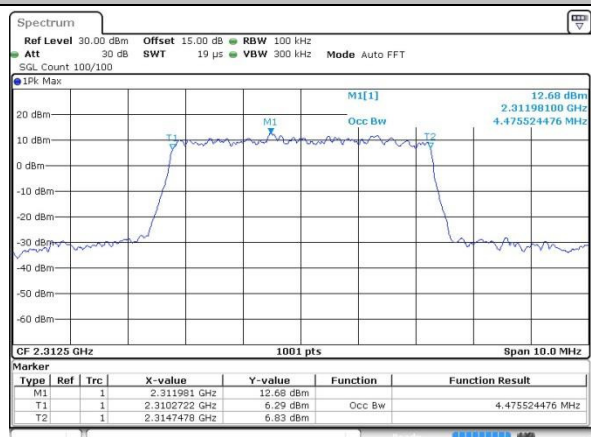

Date: 18 JUN 2016 14:42:50


LTE Band 30

Middle Channel / 10MHz / QPSK

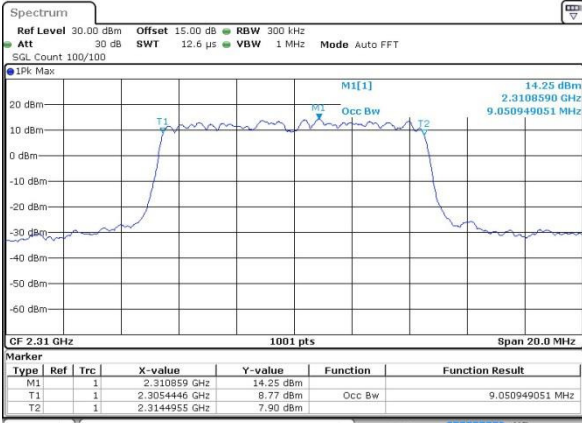

Date: 18 JUN 2016 15:08:53

Middle Channel / 10MHz / 16QAM

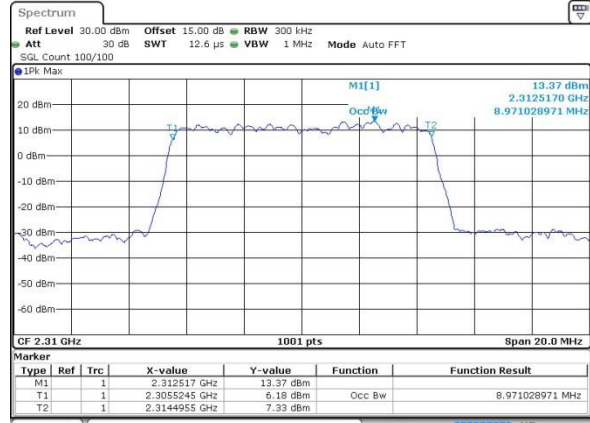


Date: 18 JUN 2016 15:09:06


Conducted Band Edge

LTE Band 30 / 5MHz / QPSK


Lowest Band Edge / 1 RB 0

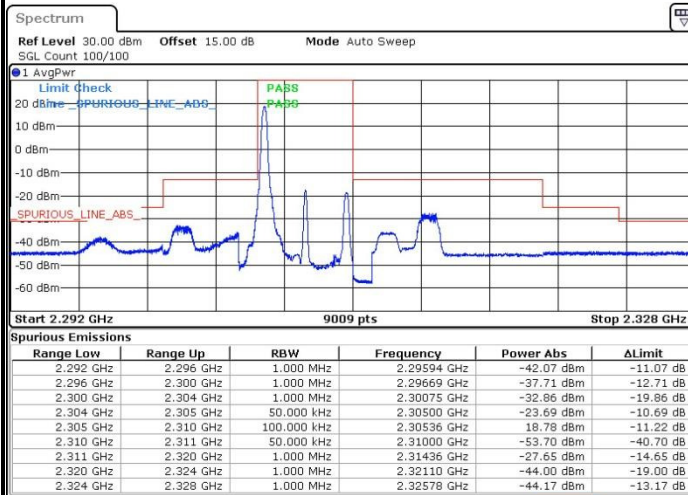


Highest Band Edge / 1 RB 0


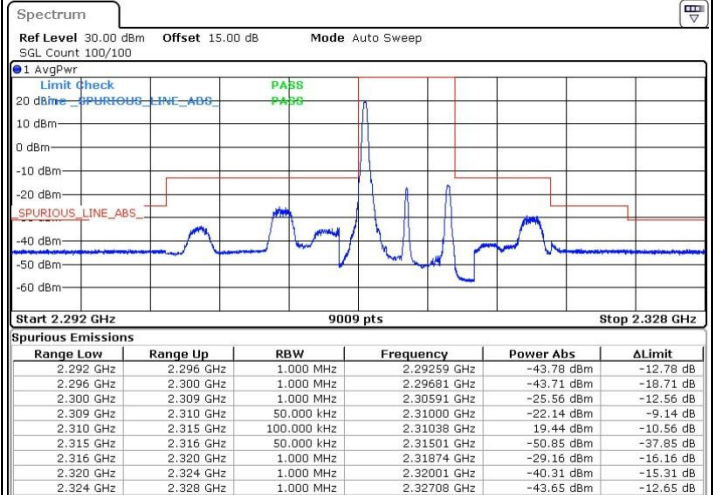


Lowest Band Edge / 1 RB Max

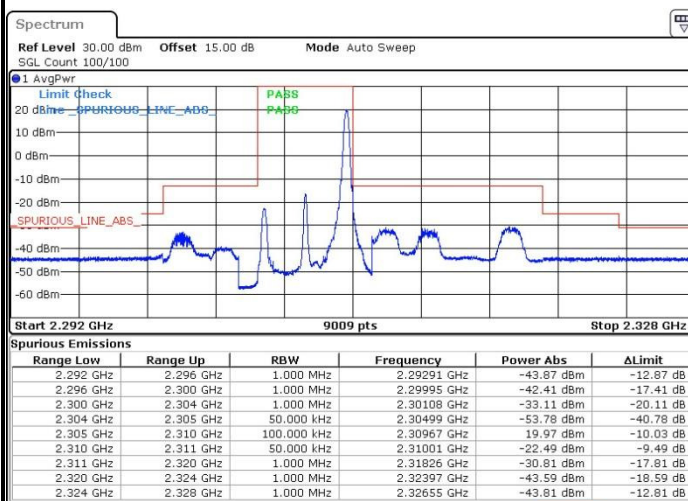

Highest Band Edge / 1 RB Max

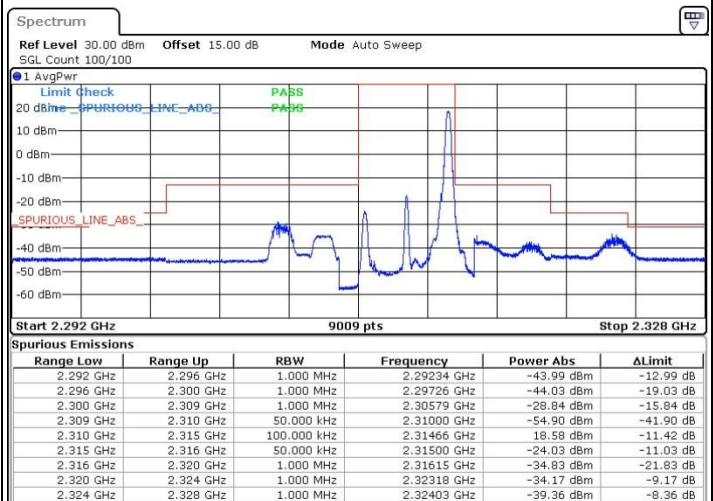


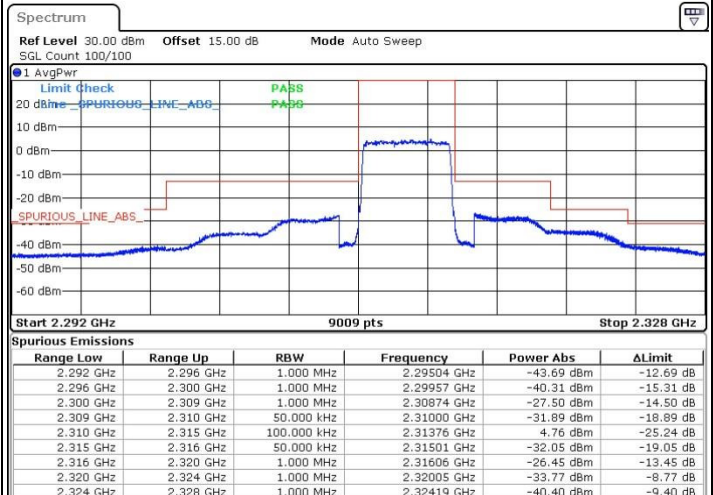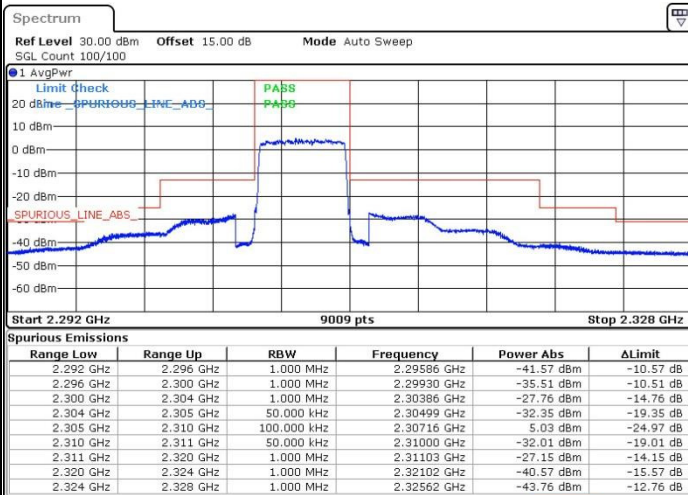**Lowest Band Edge / Full RB****Highest Band Edge / Full RB**




LTE Band 30 / 5MHz / 16QAM


Lowest Band Edge / 1RB 0

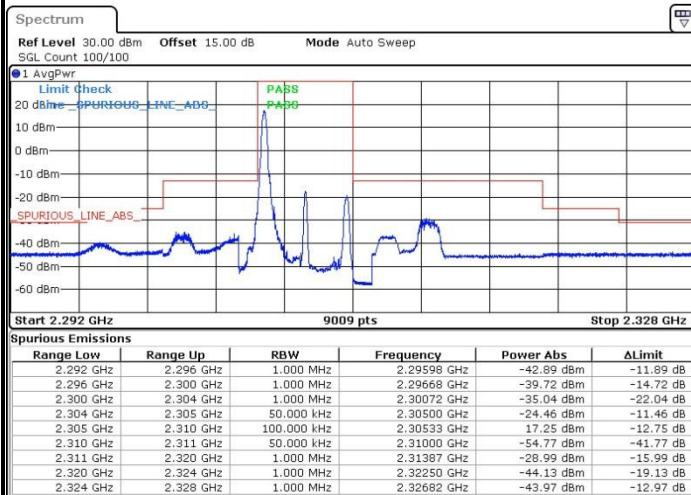


Highest Band Edge / 1 RB 0

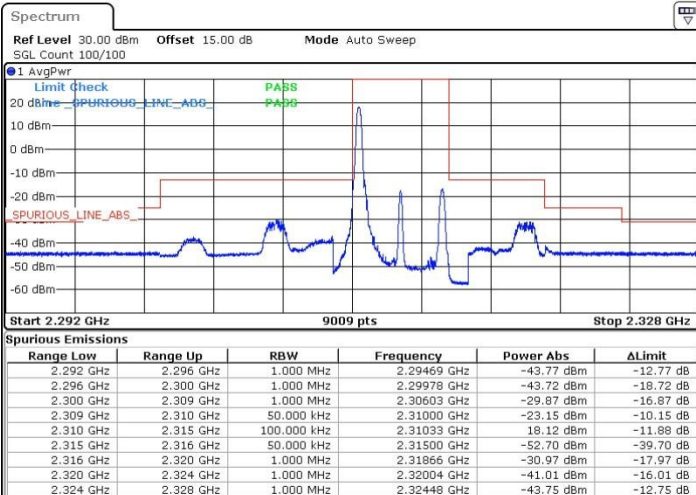

Lowest Band Edge / 1 RB Max

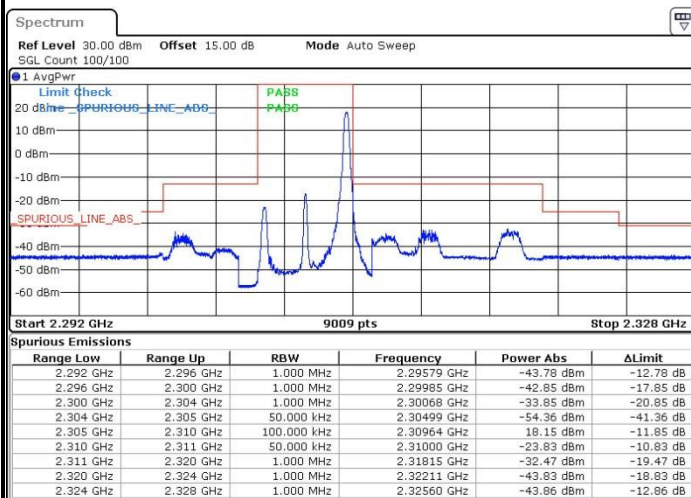


Highest Band Edge / 1 RB Max

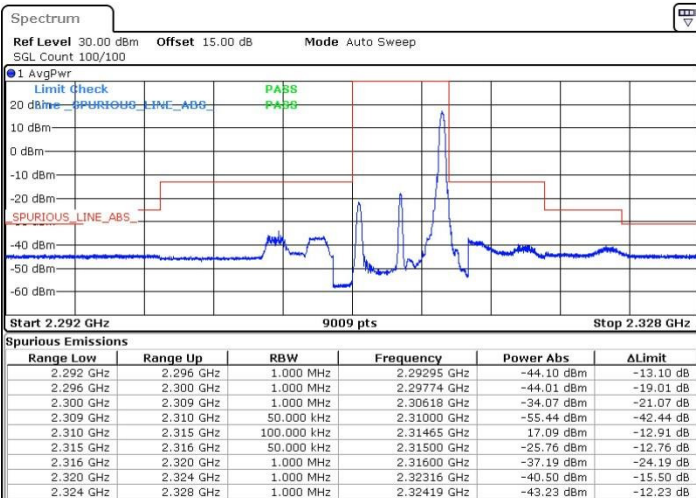




Lowest Band Edge / Full RB

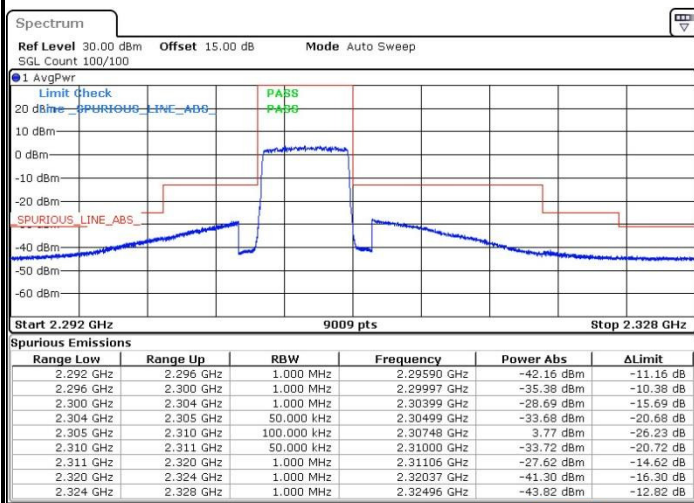


Highest Band Edge / Full RB

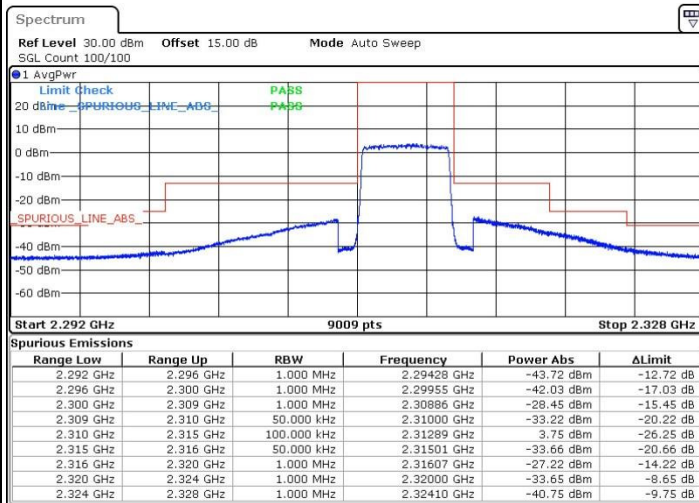




LTE Band 30 / 10MHz / QPSK


Band Edge / 1 RB 0

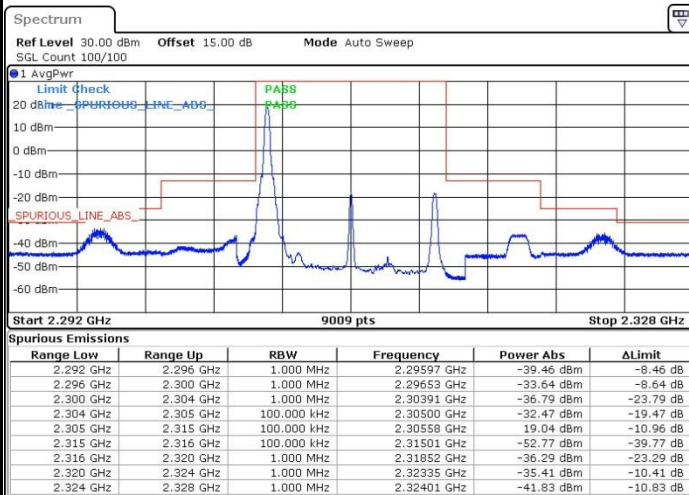

Band Edge / 1 RB Max

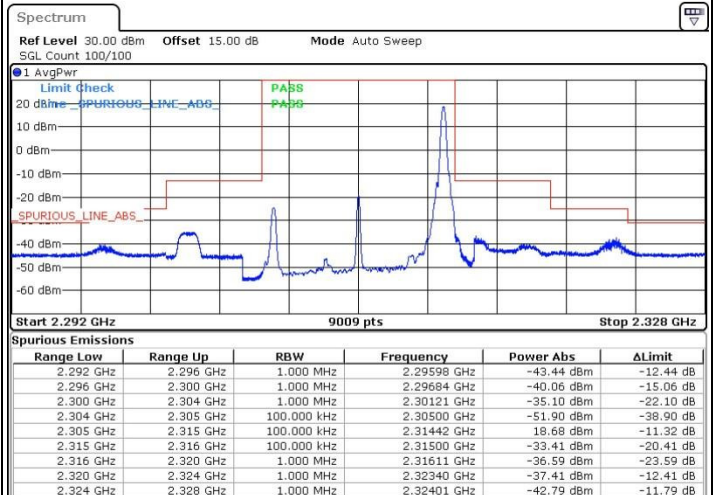


Band Edge / Full RB

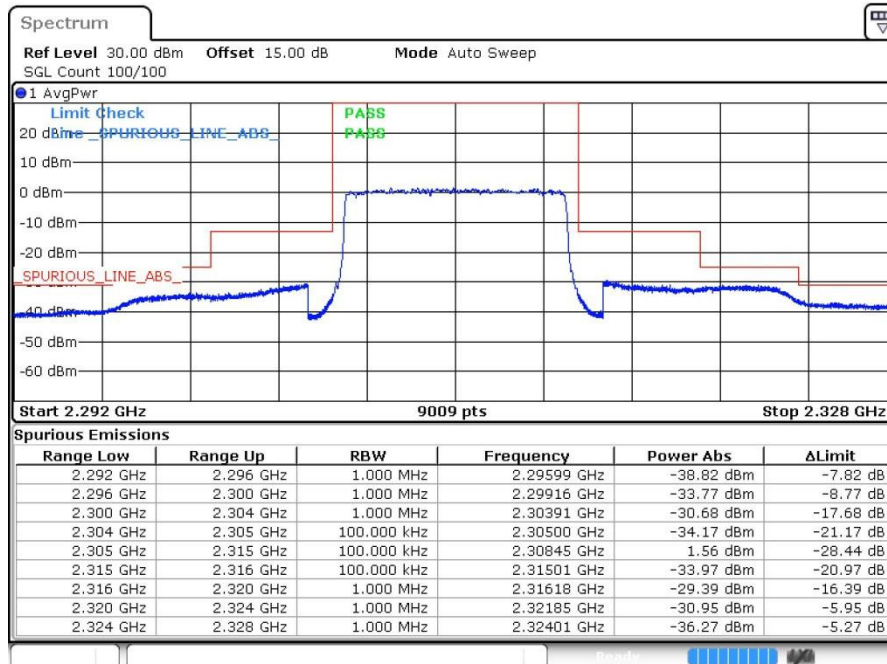




LTE Band 30 / 10MHz / 16QAM


Band Edge / 1 RB 0

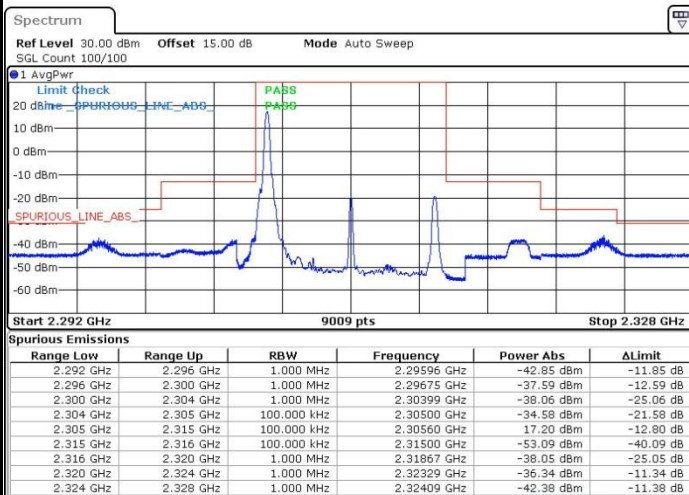


Band Edge / 1 RB Max

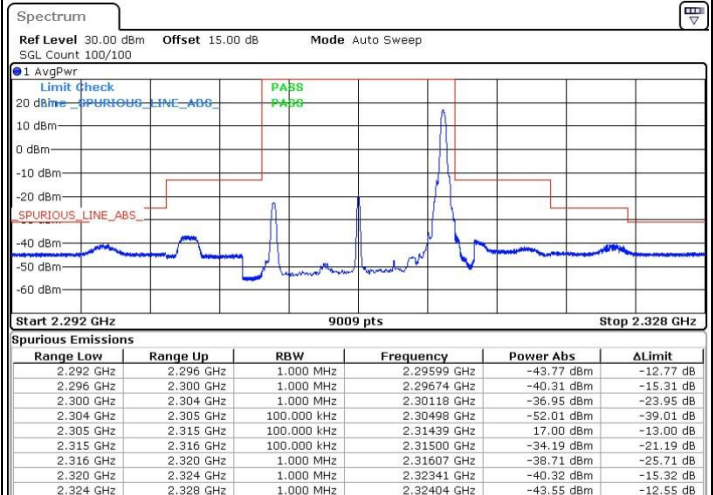


Band Edge / Full RB

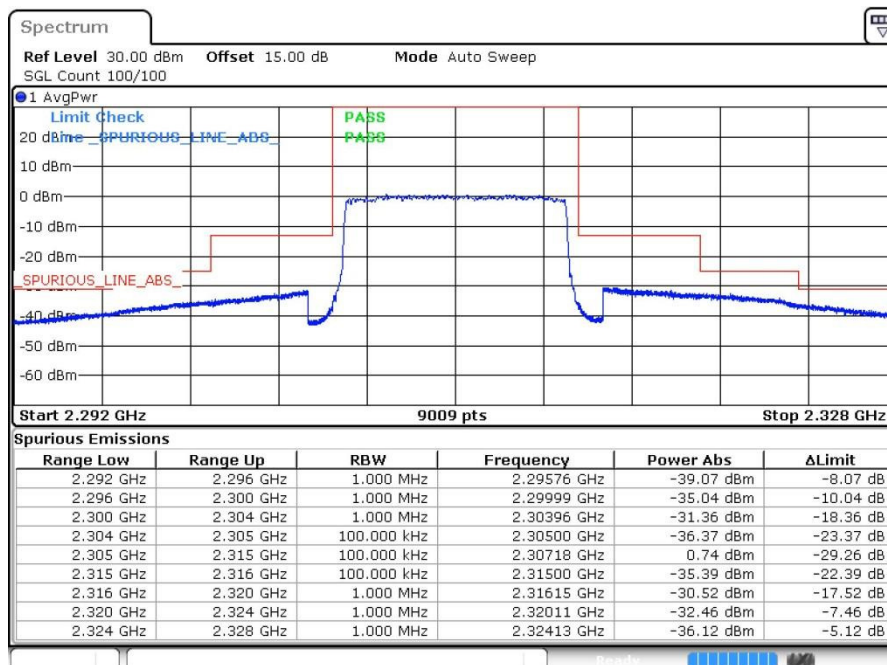


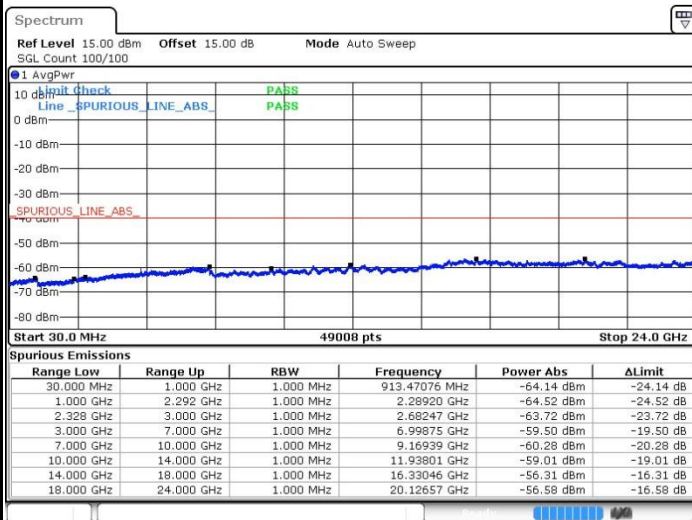**Conducted Spurious Emission****LTE Band 30 / 5MHz****Lowest Channel / QPSK**


Date: 18 JUN 2016 14:47:25

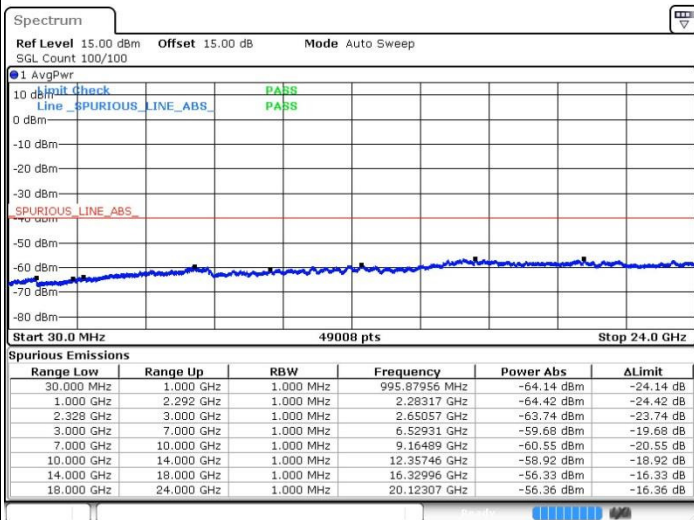Lowest Channel / 16QAM

Date: 18 JUN 2016 14:50:31

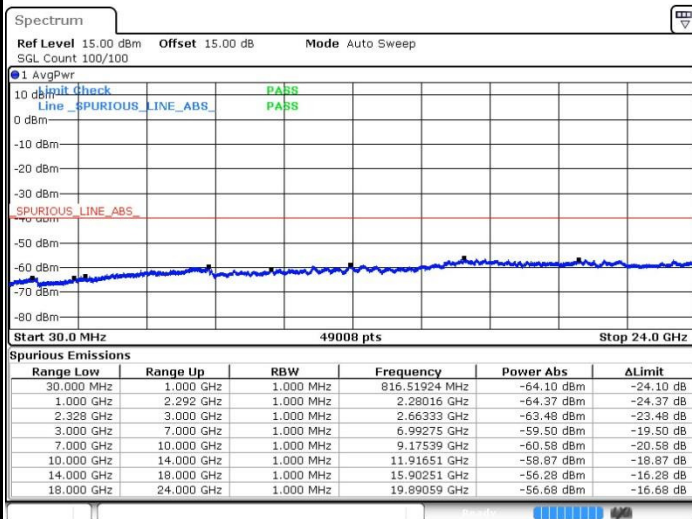Middle Channel / QPSK

Date: 18 JUN 2016 14:51:39

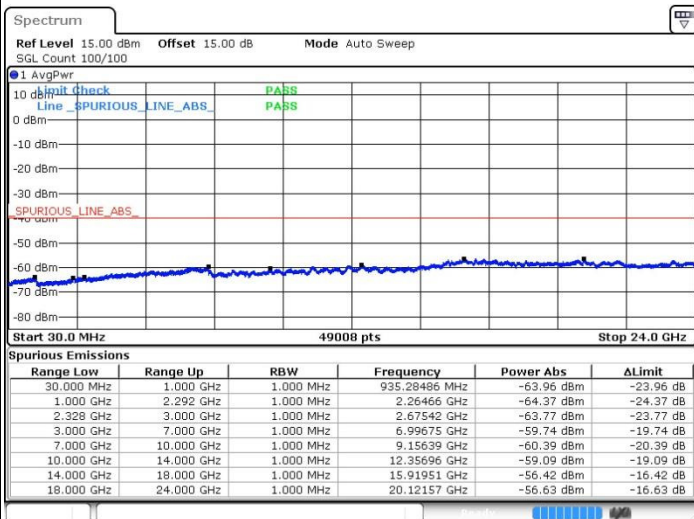
Middle Channel / 16QAM

Date: 18 JUN 2016 14:52:26




LTE Band 30 / 5MHz

Highest Channel / QPSK

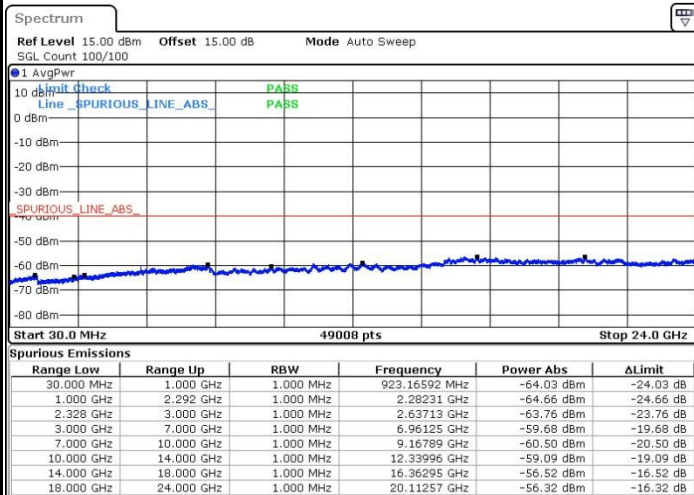

Date: 18 JUN 2016 14:53:37


Highest Channel / 16QAM

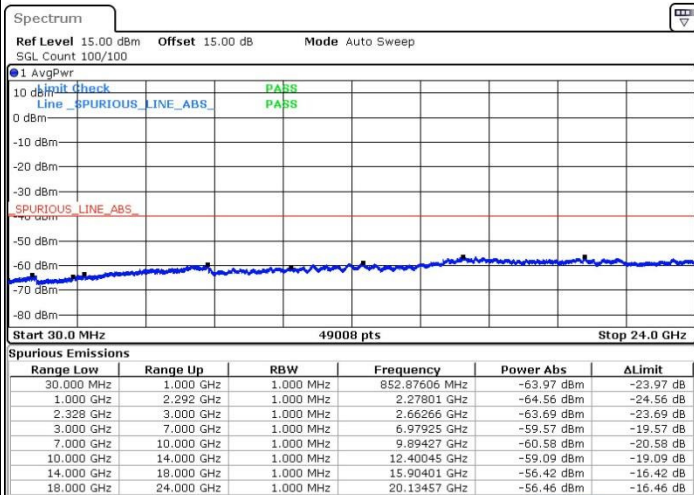

Date: 18 JUN 2016 14:54:28


LTE Band 30 / 10MHz

Middle Channel / QPSK

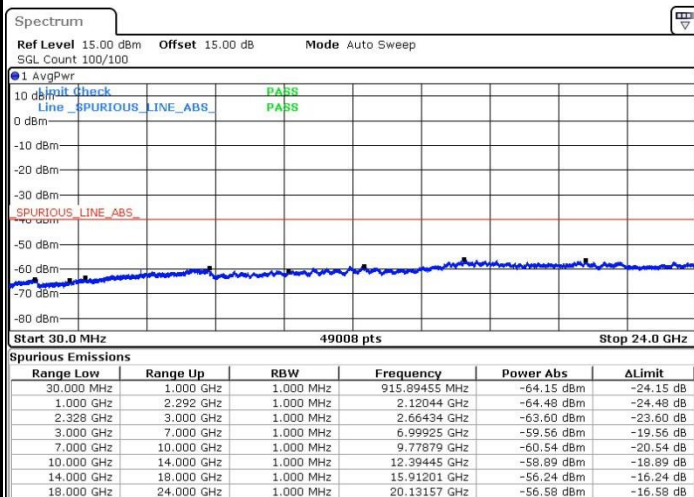

Date: 18 JUN 2016 15:00:34

Middle Channel / 16QAM

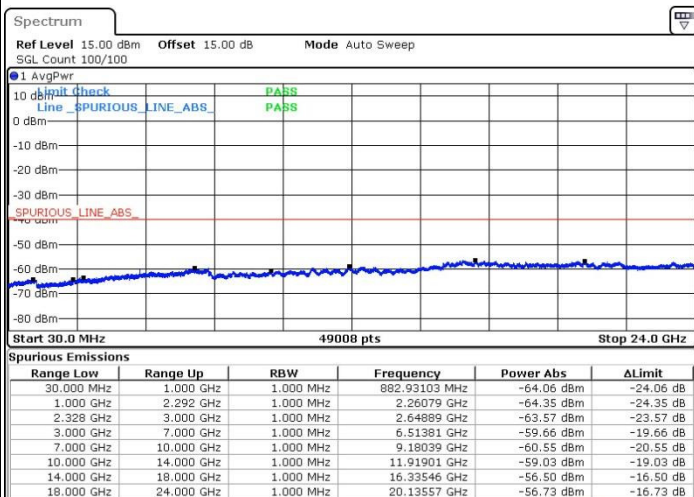

Date: 18 JUN 2016 15:02:10

Frequency Stability

Test Conditions		LTE Band 30 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0004	PASS
40	Normal Voltage	0.0009	
30	Normal Voltage	0.0000	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0004	
0	Normal Voltage	0.0004	
-10	Normal Voltage	0.0000	
-20	Normal Voltage	0.0000	
-30	Normal Voltage	0.0009	
20	Maximum Voltage	0.0004	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0013	

Note:

1. Normal Voltage = 3.9V. ; Battery End Point (BEP) = 3.55 V. ; Maximum Voltage =4.4 V
2. Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Appendix B. Test Results of Radiated Test

LTE Band 30 / 5MHz / QPSK / RB Size 1 Offset 0									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4608	-41.37	-40	-1.37	-28.96	-47.90	2.07	8.60	H
	6920	-46.05	-40	-6.05	-39.44	-54.12	2.60	10.67	H
	9234	-51.27	-40	-11.27	-46.20	-60.23	3.27	12.23	H
	4608	-54.73	-40	-14.73	-41.21	-61.26	2.07	8.60	V
	6936	-55.70	-40	-15.70	-48.88	-63.77	2.60	10.67	V
	9216	-56.37	-40	-16.37	-51.12	-65.33	3.27	12.23	V
Middle	4616	-41.34	-40	-1.34	-28.93	-47.87	2.07	8.60	H
	6920	-46.60	-40	-6.60	-39.99	-54.67	2.60	10.67	H
	9234	-51.26	-40	-11.26	-46.19	-60.22	3.27	12.23	H
	4616	-55.20	-40	-15.20	-41.68	-61.73	2.07	8.60	V
	6920	-56.01	-40	-16.01	-49.19	-64.08	2.60	10.67	V
	9225	-56.61	-40	-16.61	-51.36	-65.57	3.27	12.23	V
Highest	4624	-53.93	-40	-13.93	-38.19	-60.46	2.07	8.60	H
	6768	-54.03	-40	-14.03	-47.42	-62.10	2.60	10.67	H
	9252	-52.39	-40	-12.39	-47.32	-61.35	3.27	12.23	H
	4616	-59.15	-40	-19.15	-45.63	-65.68	2.07	8.60	V
	6924.7	-57.82	-40	-17.82	-51	-65.89	2.60	10.67	V
	9234	-56.51	-40	-16.51	-51.26	-65.47	3.27	12.23	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 30 / 10MHz / QPSK / RB Size 1 Offset 0 for Battery 1									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	4608	-40.67	-40	-0.67	-28.33	-47.20	2.07	8.60	H
	6920	-49.81	-40	-9.81	-43.20	-57.88	2.60	10.67	H
	9225	-50.33	-40	-10.33	-45.26	-59.29	3.27	12.23	H
	4608	-56.43	-40	-16.43	-42.91	-62.96	2.07	8.60	V
	6920	-53.46	-40	-13.46	-46.64	-61.53	2.60	10.67	V
	9234	-55.99	-40	-15.99	-50.74	-64.95	3.27	12.23	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 30 / 10MHz / QPSK / RB Size 1 Offset 0 for Battery 2									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	4614	-41.76	-40	-1.76	-29.29	-48.29	2.07	8.60	H
	6918	-51.19	-40	-11.19	-44.58	-59.26	2.60	10.67	H
	9225	-50.68	-40	-10.68	-45.61	-59.64	3.27	12.23	H
	4614	-56.34	-40	-16.34	-42.82	-62.87	2.07	8.60	V
	6918	-54.94	-40	-14.94	-48.12	-63.01	2.60	10.67	V
	9225	-55.19	-40	-15.19	-49.94	-64.15	3.27	12.23	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.