

Test Plot 1#: GSM 850 Mid Body Right**DUT: POS terminal; Type: N80; Serial: 2MT3-2;**

Communication System: Generic GPRS-3 slots (0); Frequency: 836.6MHz; Duty Cycle: 1:2.66
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.945 \text{ S/m}$; $\epsilon_r = 40.905$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x13x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.692 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.77 V/m; Power Drift =0.15dB

Peak SAR (extrapolated) = 0.829 W/kg

SAR(1 g) = 0.619 W/kg; SAR(10 g) = 0.455 W/kg

Maximum value of SAR (measured) = 0.694 W/kg

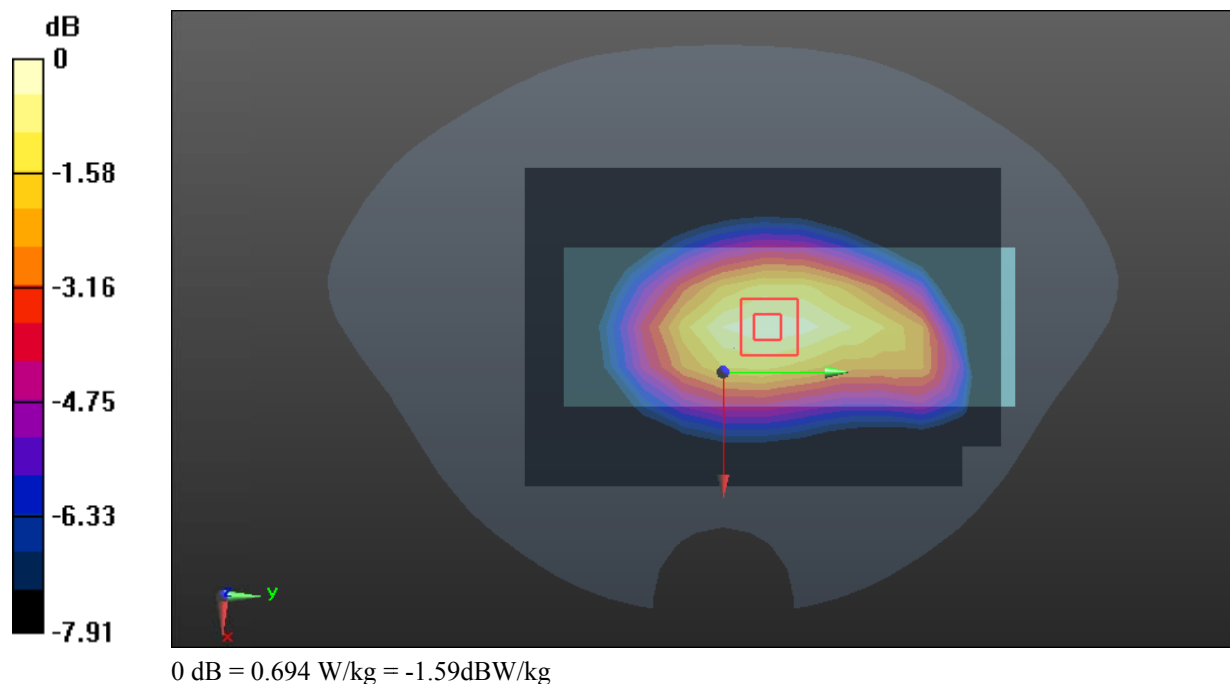

Test Plot 2#: PCS 1900 High Body Right**DUT: POS terminal; Type: N80; Serial: 2MT3-2;**

Communication System: Generic GPRS-3 slots (0); Frequency: 1909.8MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.422 \text{ S/m}$; $\epsilon_r = 39.197$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1909.8; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.46 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.13 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.21 W/kg

SAR(1 g) = 1.36 W/kg; SAR(10 g) = 0.807 W/kg

Maximum value of SAR (measured) = 1.63 W/kg

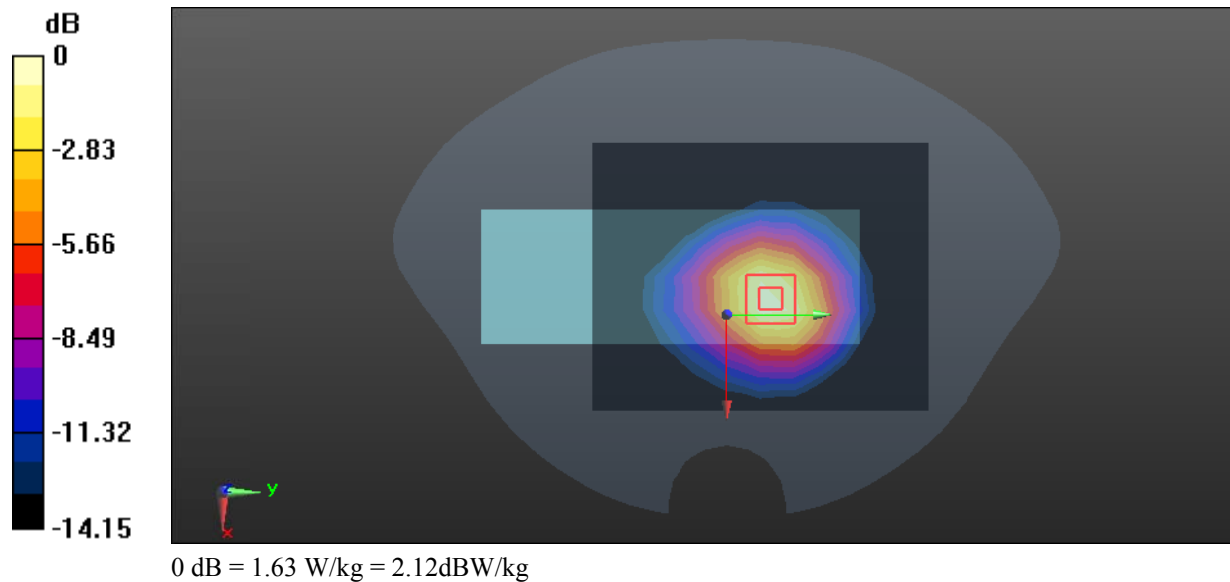

Test Plot 3#: PCS 1900 High Limb Right**DUT: POS terminal; Type: N80; Serial: 2MT3-2;**

Communication System: Generic GPRS-3 slots (0); Frequency: 1909.8MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.422 \text{ S/m}$; $\epsilon_r = 39.197$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1909.8; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 5.97 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.70 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 9.01 W/kg

SAR(1 g) = 5 W/kg; SAR(10 g) = 2.66 W/kg

Maximum value of SAR (measured) = 6.14 W/kg

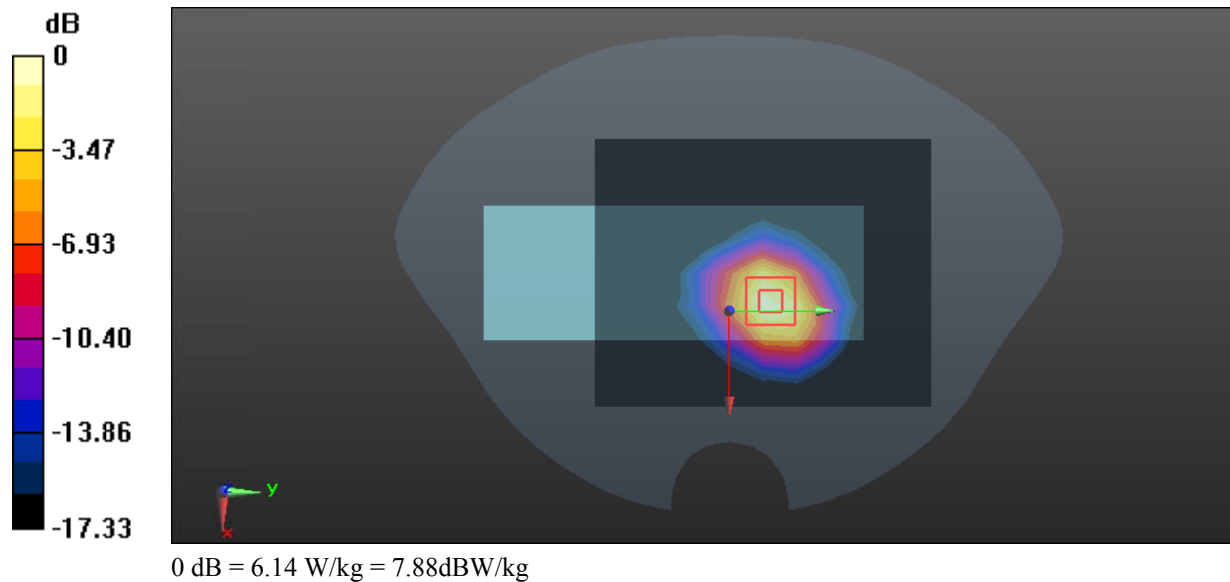

Test Plot 4#: WCDMA Band 2 High Body Right**DUT: POS terminal; Type: N80; Serial: 2MT3-2;**

Communication System: WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.422$ S/m; $\epsilon_r = 39.223$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1907.6; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.48 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.271 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 1.38 W/kg; SAR(10 g) = 0.824 W/kg

Maximum value of SAR (measured) = 1.67 W/kg

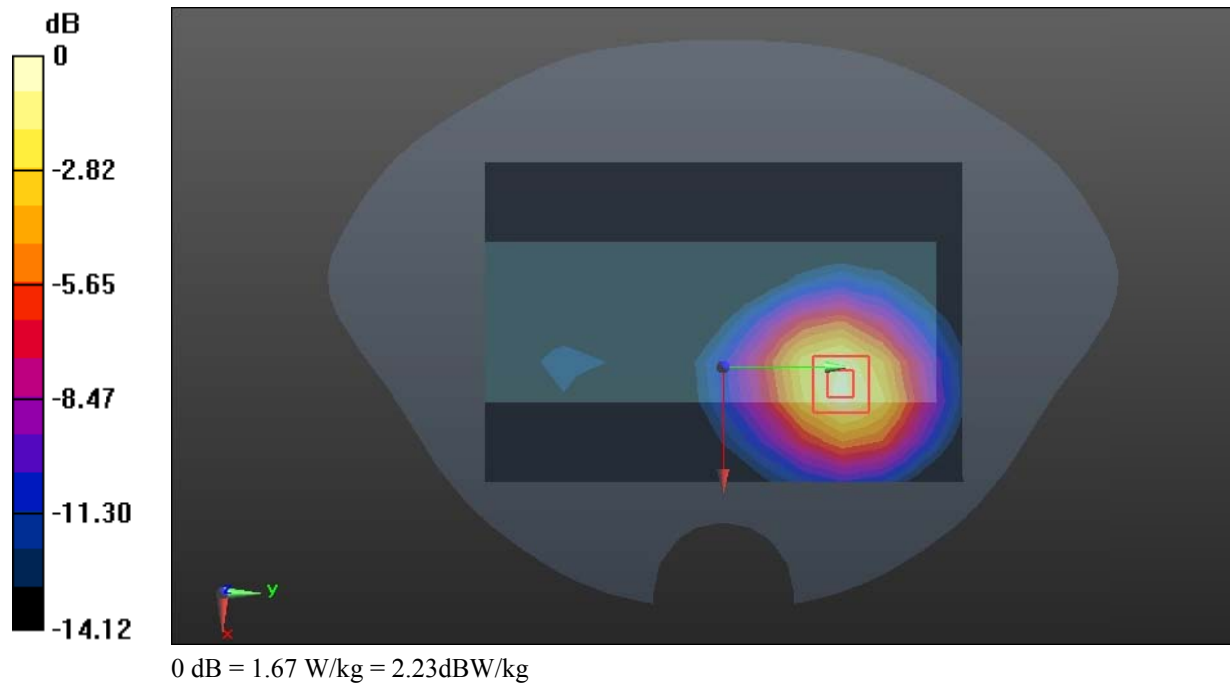

Test Plot 5#: WCDMA Band 2 High Limb Right**DUT: POS terminal; Type: N80; Serial: 2MT3-2;**

Communication System: WCDMA (0); Frequency: 1907.6MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.422$ S/m; $\epsilon_r = 39.223$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1907.6; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.82 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.86 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 8.47 W/kg

SAR(1 g) = 4.8 W/kg; SAR(10 g) = 2.58 W/kg

Maximum value of SAR (measured) = 5.88 W/kg

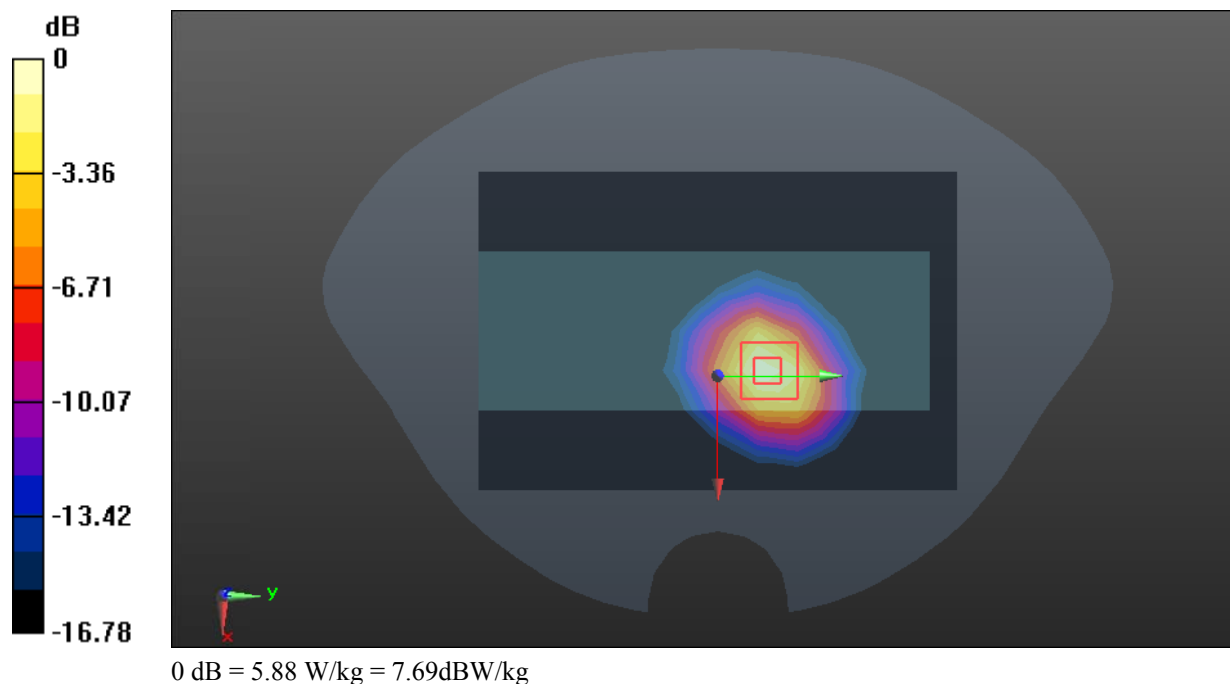

Test Plot 6#: WCDMA Band 4 High Body Right**DUT: POS terminal; Type: N80; Serial: 2MT3-2;**

Communication System: WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.293$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1752.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.09 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.738 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.974 W/kg; SAR(10 g) = 0.598 W/kg

Maximum value of SAR (measured) = 1.16 W/kg

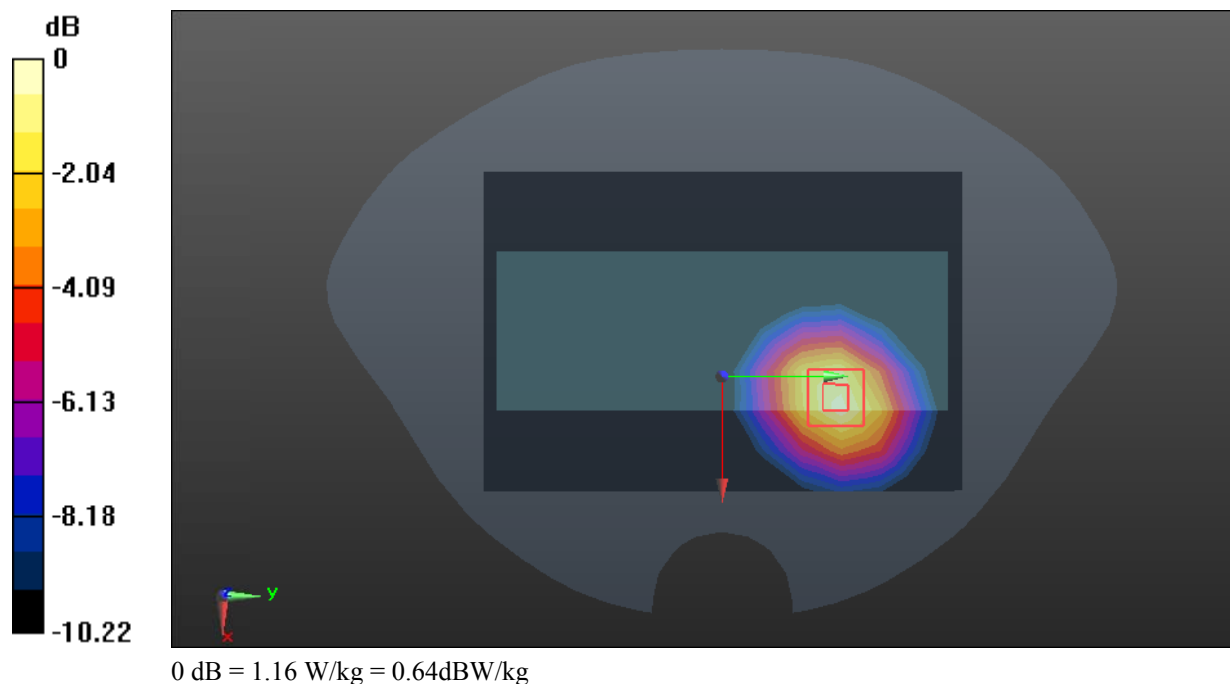

Test Plot 7#: WCDMA Band 5 Mid Body Right**DUT: POS terminal; Type: N80; Serial: 2MT3-2;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 40.905$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.280 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.22 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.195 W/kg

Maximum value of SAR (measured) = 0.289 W/kg

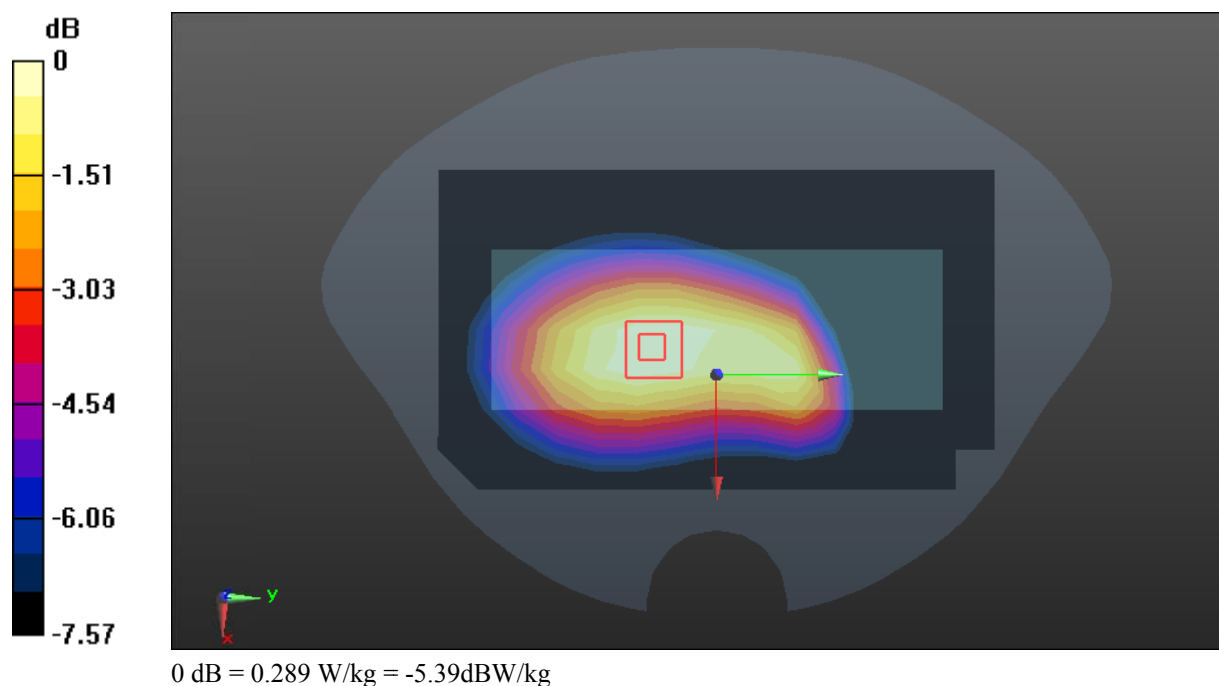

Test Plot 8#: LTE Band 2 1RB High Body Right**DUT: POS terminal; Type: N80; Serial: 2MT3-2;**

Communication System: Generic FDD-LTE (0); Frequency:1900MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1900$ MHz; $\sigma = 1.424$ S/m; $\epsilon_r=39.315$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1900;Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x13x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.57 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.918 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 1.37 W/kg; SAR(10 g) = 0.823 W/kg

Maximum value of SAR (measured) = 1.64 W/kg

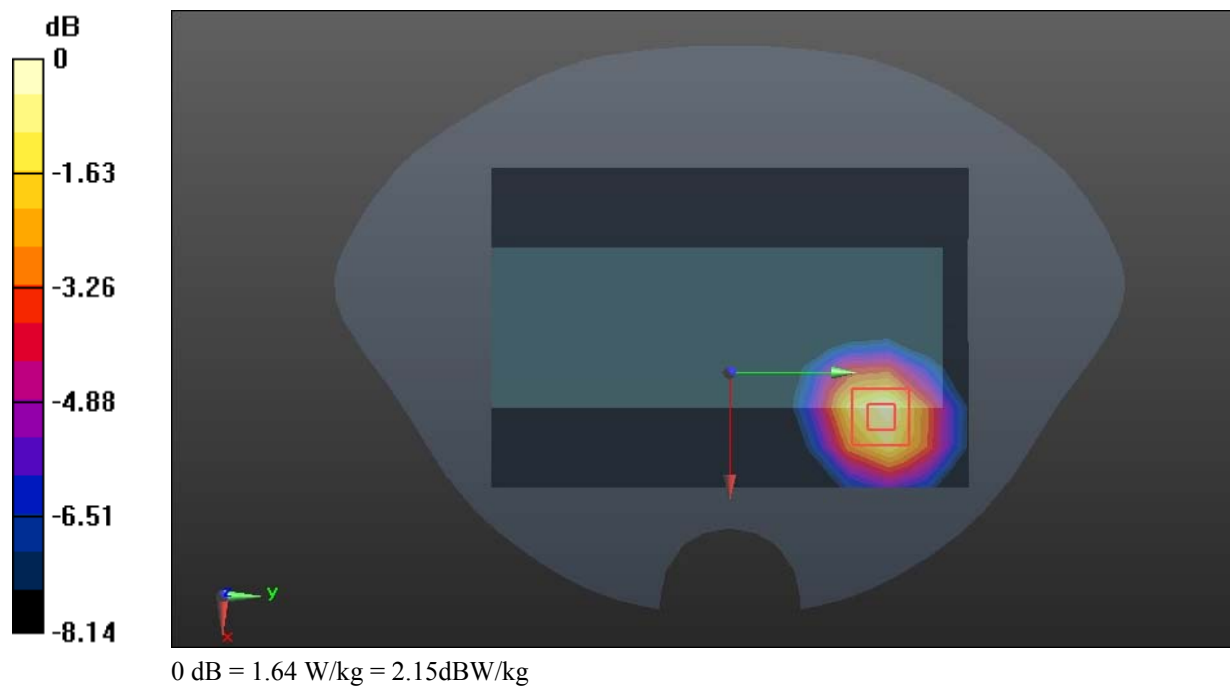

Test Plot 9#: LTE Band 2 1RB Mid Limb Right**DUT: POS terminal; Type: N80; Serial: 2MT3-2;**

Communication System: Generic FDD-LTE (0); Frequency: 1880MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.347$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.85 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.31 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 8.74 W/kg

SAR(1 g) = 4.94 W/kg; SAR(10 g) = 2.65 W/kg

Maximum value of SAR (measured) = 6.12 W/kg

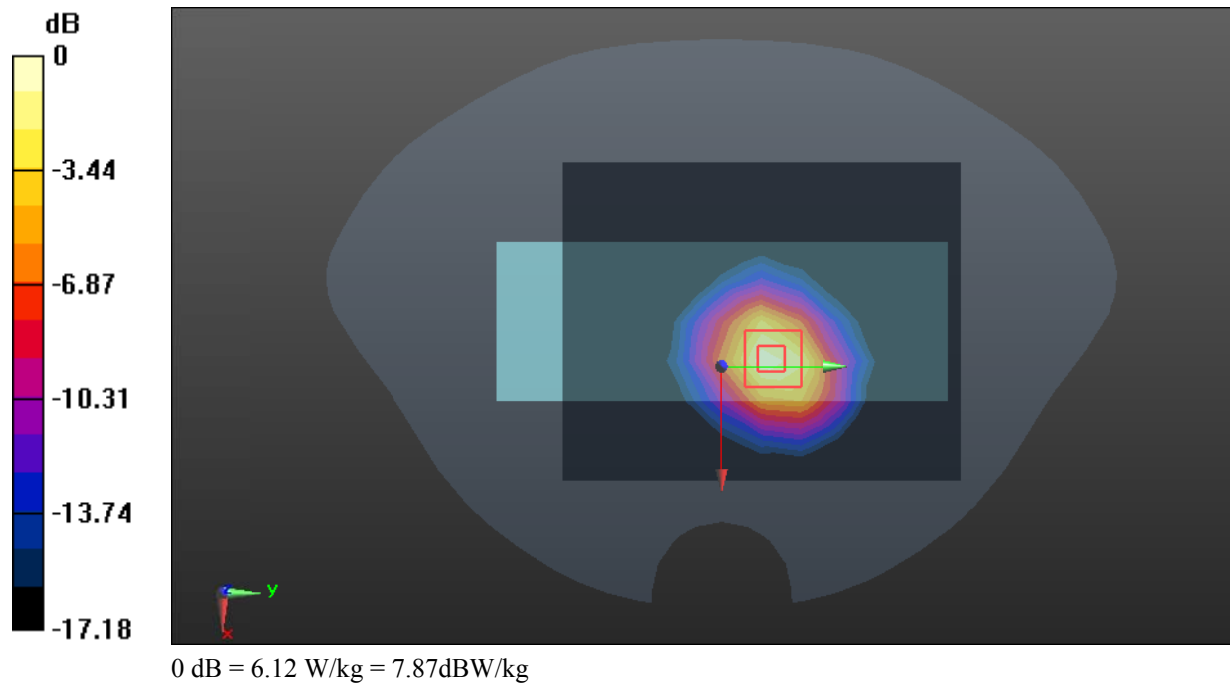

Test Plot 10#: LTE Band 5 1RB Mid Body Right**DUT: POS terminal; Type: N80; Serial: 2MT3-2;**

Communication System: Generic FDD-LTE (0); Frequency:836.5MHz; Duty Cycle: 1:1
 Medium parameters used: $f=836.5$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r=40.907$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.324 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.93 V/m; Power Drift =0.10dB

Peak SAR (extrapolated) = 0.376 W/kg

SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.213 W/kg

Maximum value of SAR (measured) = 0.318 W/kg

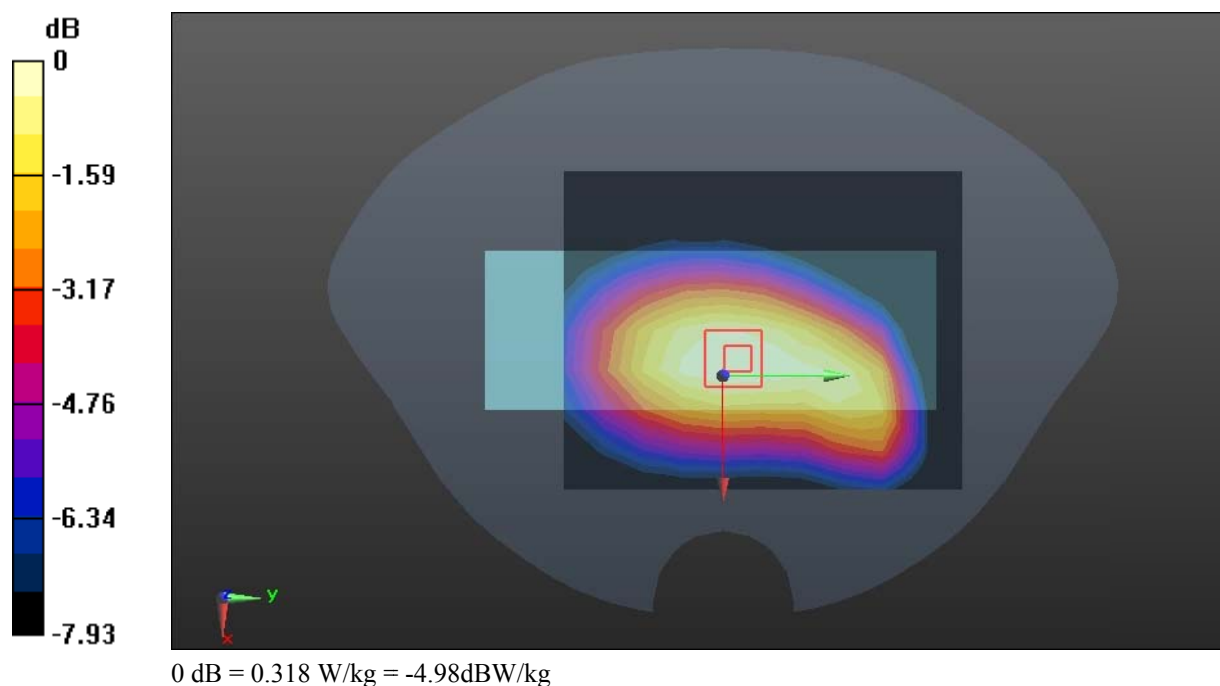

Test Plot 11#: LTE Band 7 1RB Mid Body Right**DUT: POS terminal; Type: N80; Serial: 2MT3-2;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 40.06$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2535 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.05 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.715 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.908 W/kg; SAR(10 g) = 0.481 W/kg

Maximum value of SAR (measured) = 1.14 W/kg

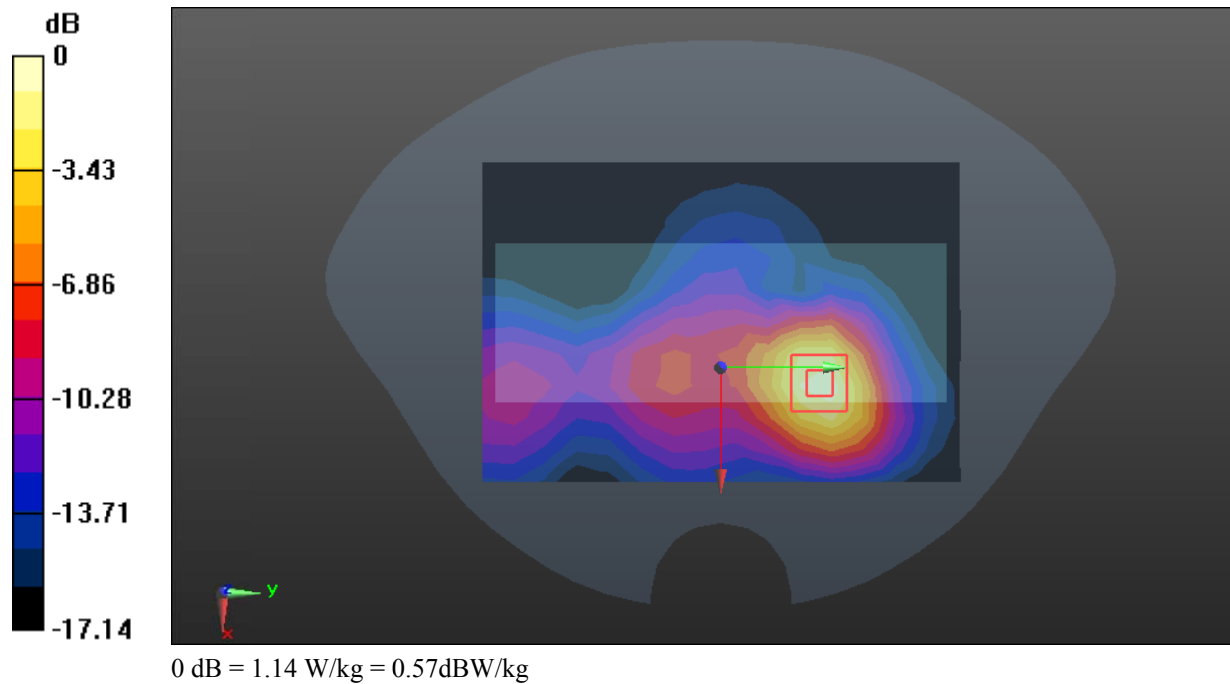

Test Plot 12#: LTE Band 66 1RB High Body Right**DUT: POS terminal; Type: N80; Serial: 2MT3-2;**

Communication System: Generic FDD-LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.219$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1770 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.999 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.76 V/m; Power Drift = 0.14dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.874 W/kg; SAR(10 g) = 0.547 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

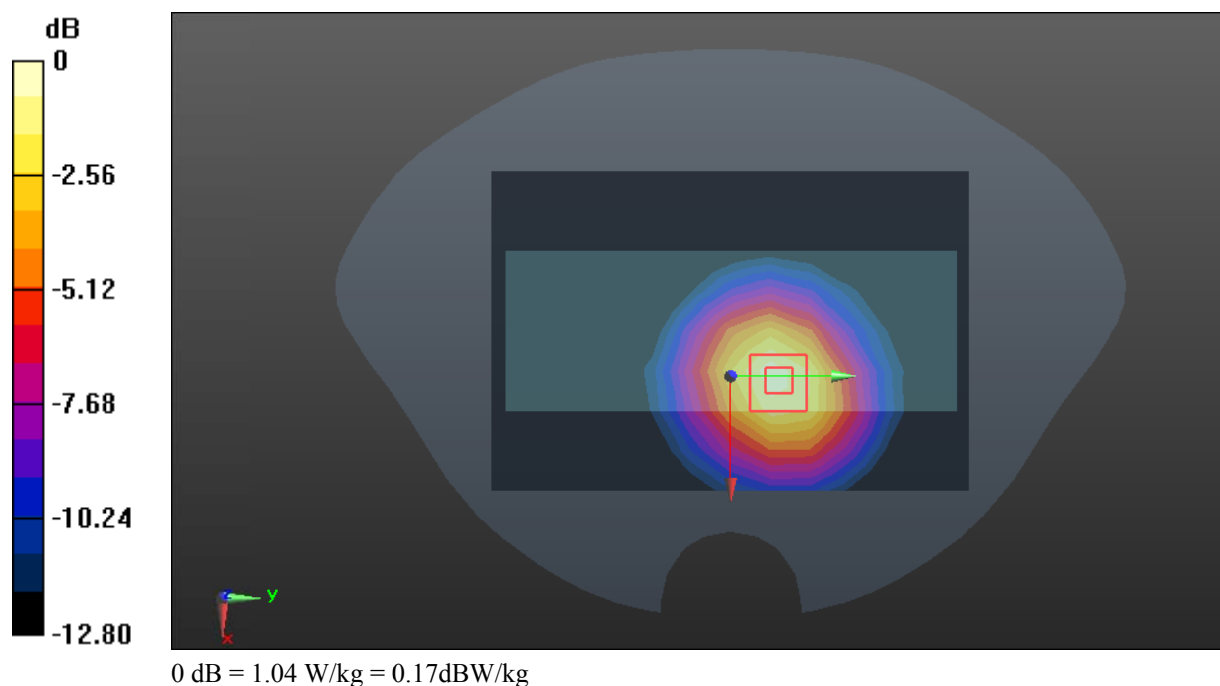

Test Plot 13#: WLAN 2.4G Mid Body Left**DUT: POS terminal; Type: N80; Serial: 2MT3-2;**

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.804$ S/m; $\epsilon_r = 40.406$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2437 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.191 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.369 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.289 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 0.204 W/kg

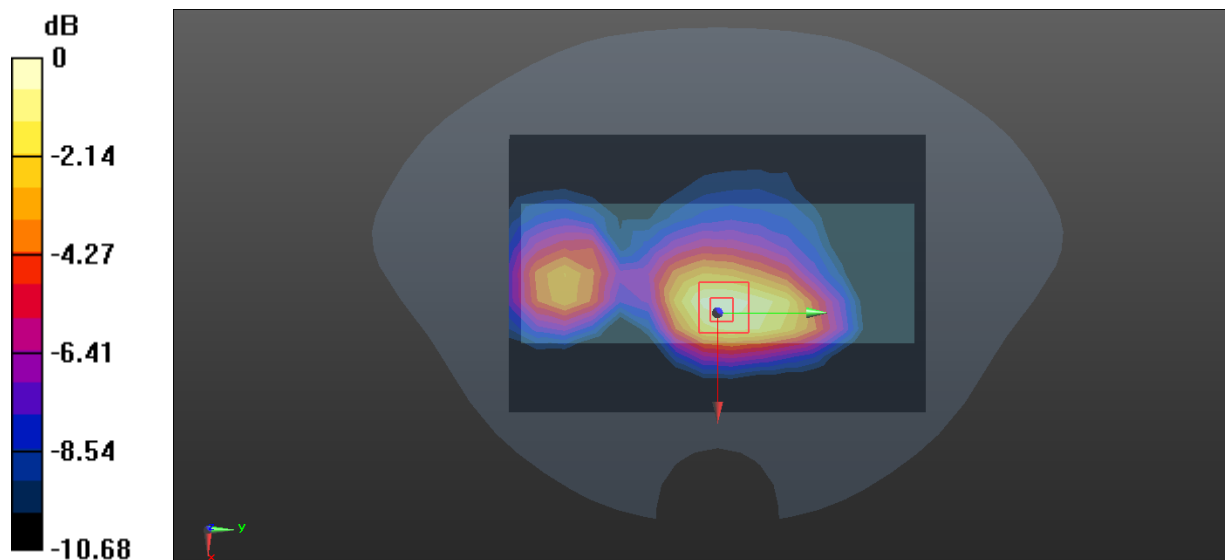

0 dB = 0.204 W/kg = -6.90 dBW/kg

Test Plot 14#: WLAN 2.4G Mid Limb Left**DUT: POS terminal; Type: N80; Serial: 2MT3-2;**

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.804$ S/m; $\epsilon_r = 40.406$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2437 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.23 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.07 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 0.935 W/kg; SAR(10 g) = 0.438 W/kg

Maximum value of SAR (measured) = 1.24 W/kg

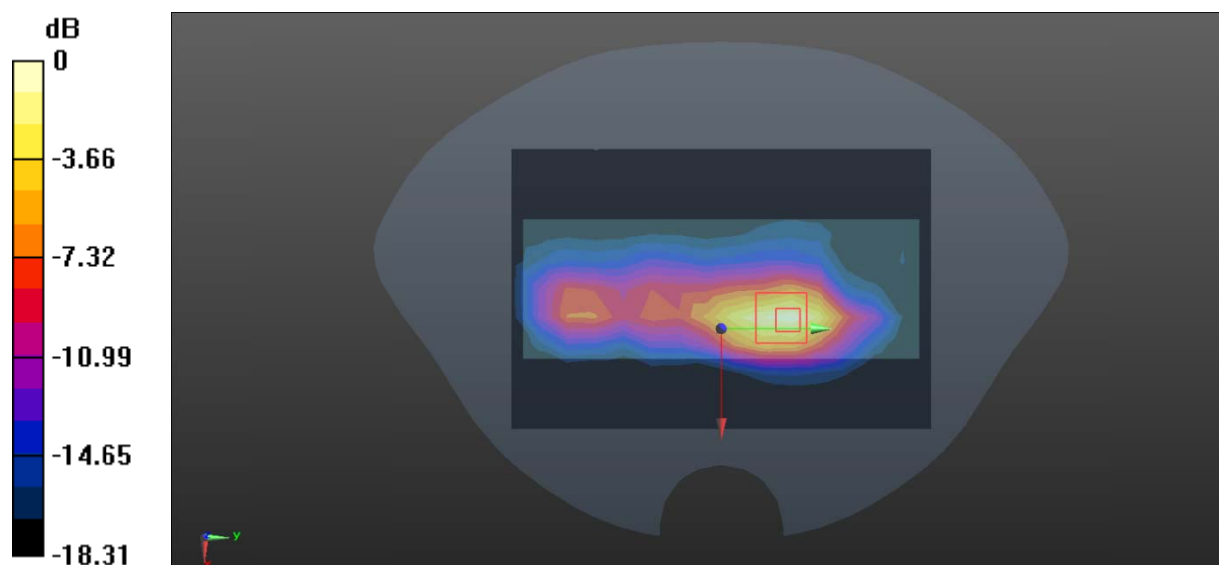

0 dB = 1.24 W/kg = 0.93 dBW/kg

Test Plot 15#: 5.2G WLAN Mid Body Left**DUT: POS terminal; Type: N80; Serial: 2MT3-2;**

Communication System: 802.11a (0); Frequency: 5200MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.554$ S/m; $\epsilon_r = 36.738$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5200 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.13 W/kg


Zoom Scan (7x7x16) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 16.76 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.595 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 1.20 W/kg

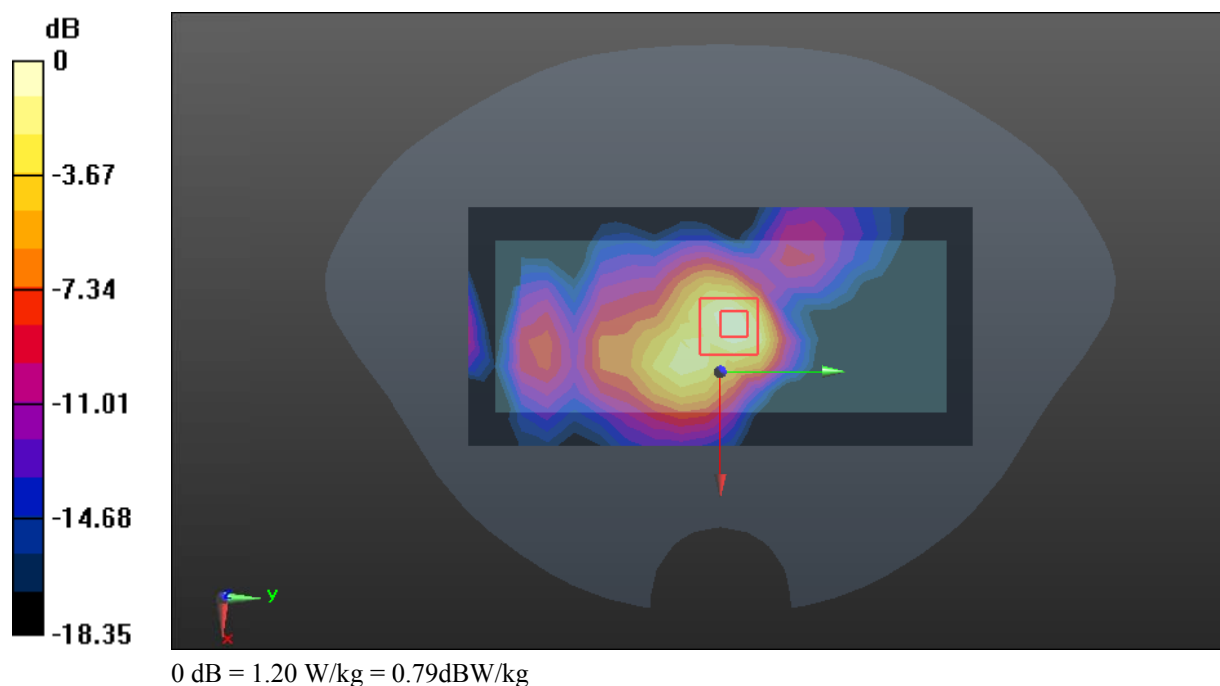

Test Plot 16#: 5.3G WLAN Mid Body Left**DUT: POS terminal; Type: N80; Serial: 2MT3-2;**

Communication System: 802.11a (0); Frequency: 5280MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5280$ MHz; $\sigma = 4.638$ S/m; $\epsilon_r = 36.525$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5280 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.22 W/kg


Zoom Scan (7x7x16) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 12.57 V/m; Power Drift = 0.11dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.585 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

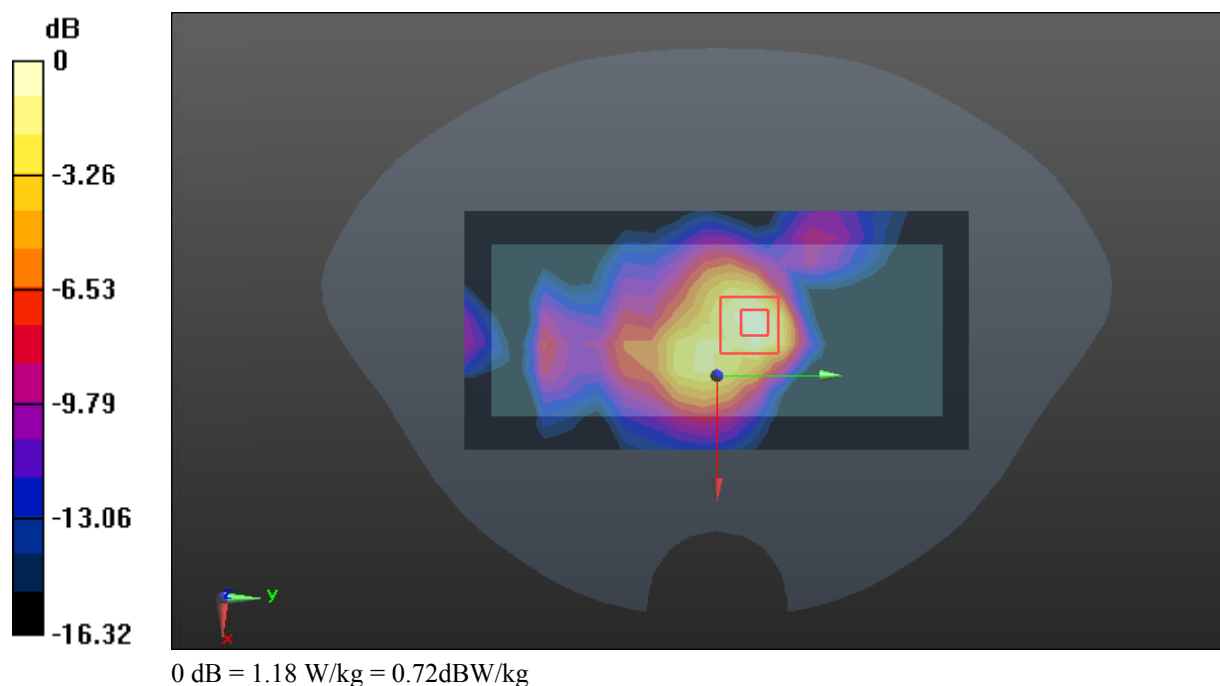

Test Plot 17#: 5.6G WLAN High Body Left**DUT: POS terminal; Type: N80; Serial: 2MT3-2;**

Communication System: 802.11a (0); Frequency: 5700MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5700$ MHz; $\sigma = 5.134$ S/m; $\epsilon_r = 35.604$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.04, 4.65, 4.62) @ 5700 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.27 W/kg


Zoom Scan (7x7x16) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 22.37 V/m; Power Drift = 0.02dB

Peak SAR (extrapolated) = 3.58 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.386 W/kg

Maximum value of SAR (measured) = 2.31 W/kg

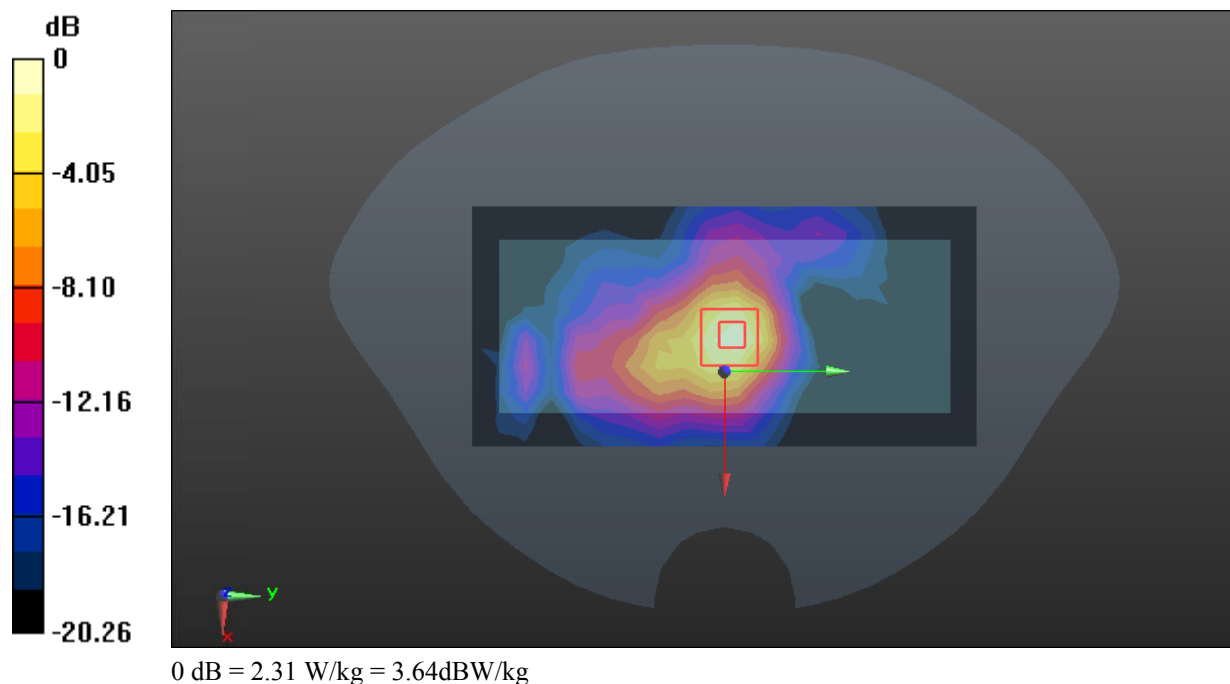

Test Plot 18#: 5.8G WLAN High Body Left**DUT: POS terminal; Type: N80; Serial: 2MT3-2;**

Communication System: 802.11a (0); Frequency: 5825 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5825$ MHz; $\sigma = 5.326$ S/m; $\epsilon_r = 35.39$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.04, 4.65, 4.62) @ 5825 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.49 W/kg


Zoom Scan (7x7x16) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.60 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 4.19 W/kg

SAR(1 g) = 1.26 W/kg; SAR(10 g) = 0.462 W/kg

Maximum value of SAR (measured) = 2.72 W/kg

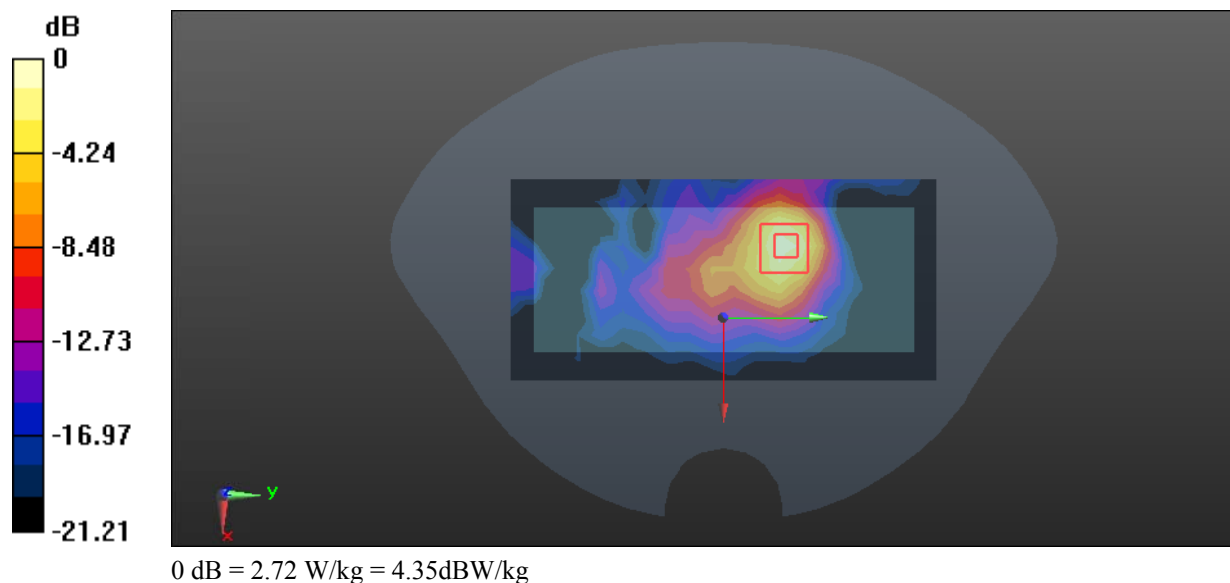

Test Plot 19#: 5.8G WLAN High Limb Left**DUT: POS terminal; Type: N80; Serial: 2MT3-2;**

Communication System: 802.11a (0); Frequency: 5825 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5825$ MHz; $\sigma = 5.326$ S/m; $\epsilon_r = 35.39$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.04, 4.65, 4.62) @ 5825 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 14.0 W/kg


Zoom Scan (7x7x16) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 22.92 V/m; Power Drift = 0.15dB

Peak SAR (extrapolated) = 31.3 W/kg

SAR(1 g) = 8.05 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 18.7 W/kg

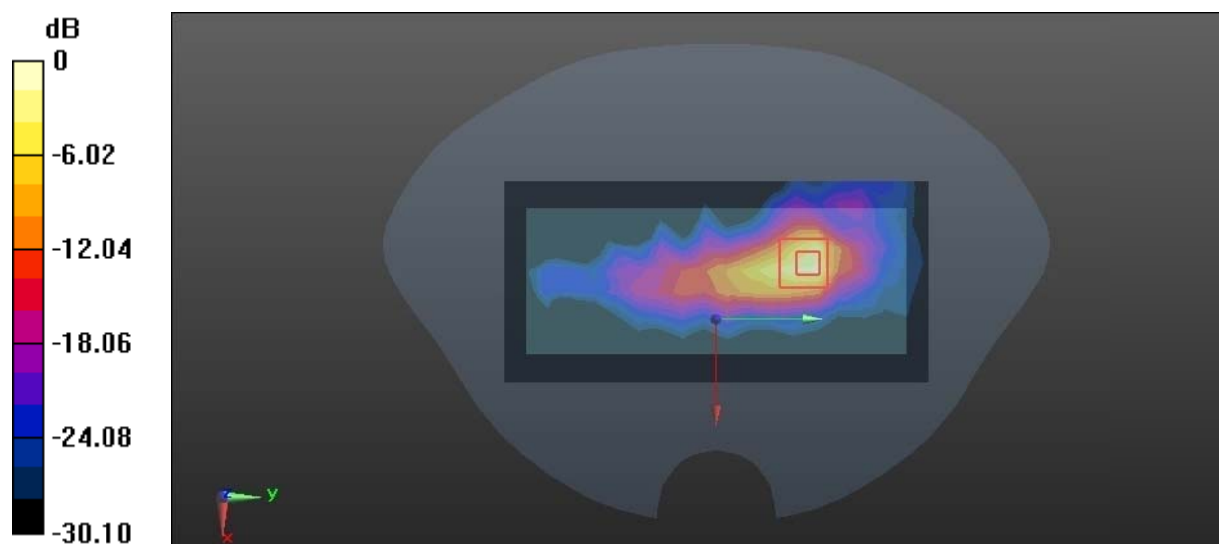

0 dB = 18.7 W/kg = 12.72dBW/kg