


11A Ant1 5500



11A Ant1 5580

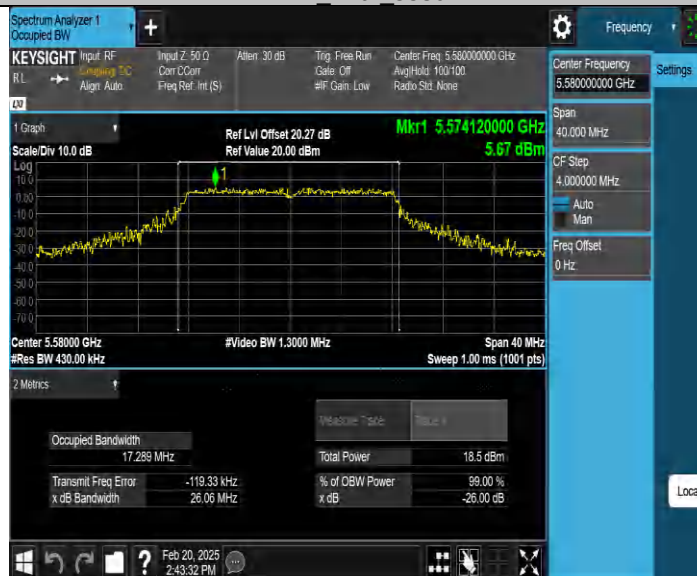


11A Ant1 5700



11A Ant1 5745



11A Ant1 5785

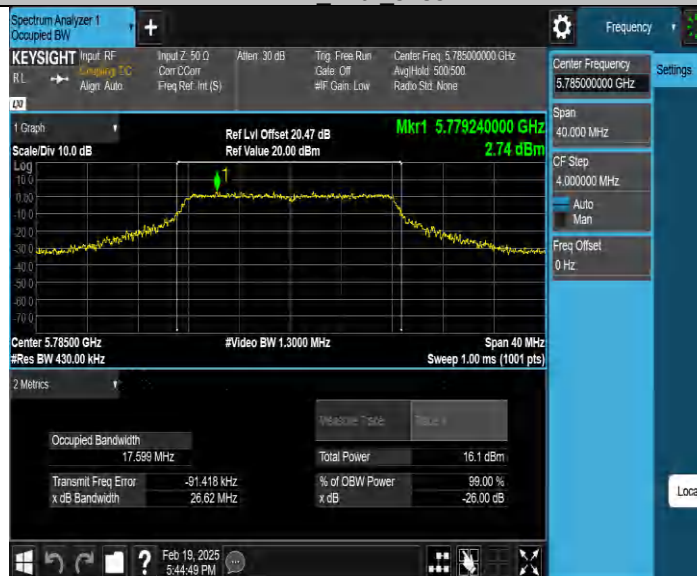

11A Ant1 5825



11N20SISO Ant1 5180



11N20SISO Ant1 5200



11N20SISO Ant1 5240



11N20SISO Ant1 5260



11N20SISO Ant1 5280



11N20SISO Ant1 5320



11N20SISO Ant1 5500



11N20SISO Ant1 5580



11N20SISO Ant1 5700



11N20SISO Ant1 5745



11N20SISO Ant1 5785



11N20SISO Ant1 5825



11N40SISO Ant1 5190



11N40SISO Ant1 5230




11N40SISO Ant1 5270



11N40SISO Ant1 5310



11N40SISO Ant1 5510

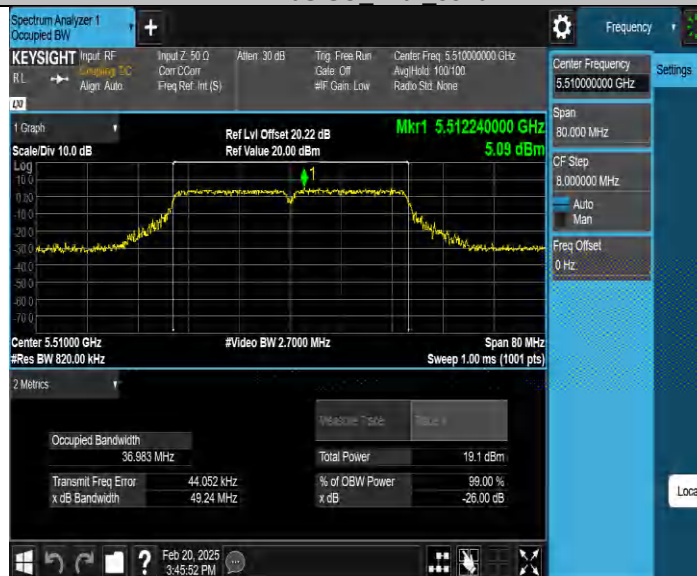

11N40SISO Ant1 5550



11N40SISO Ant1 5670




11N40SISO Ant1 5755



11N40SISO Ant1 5795



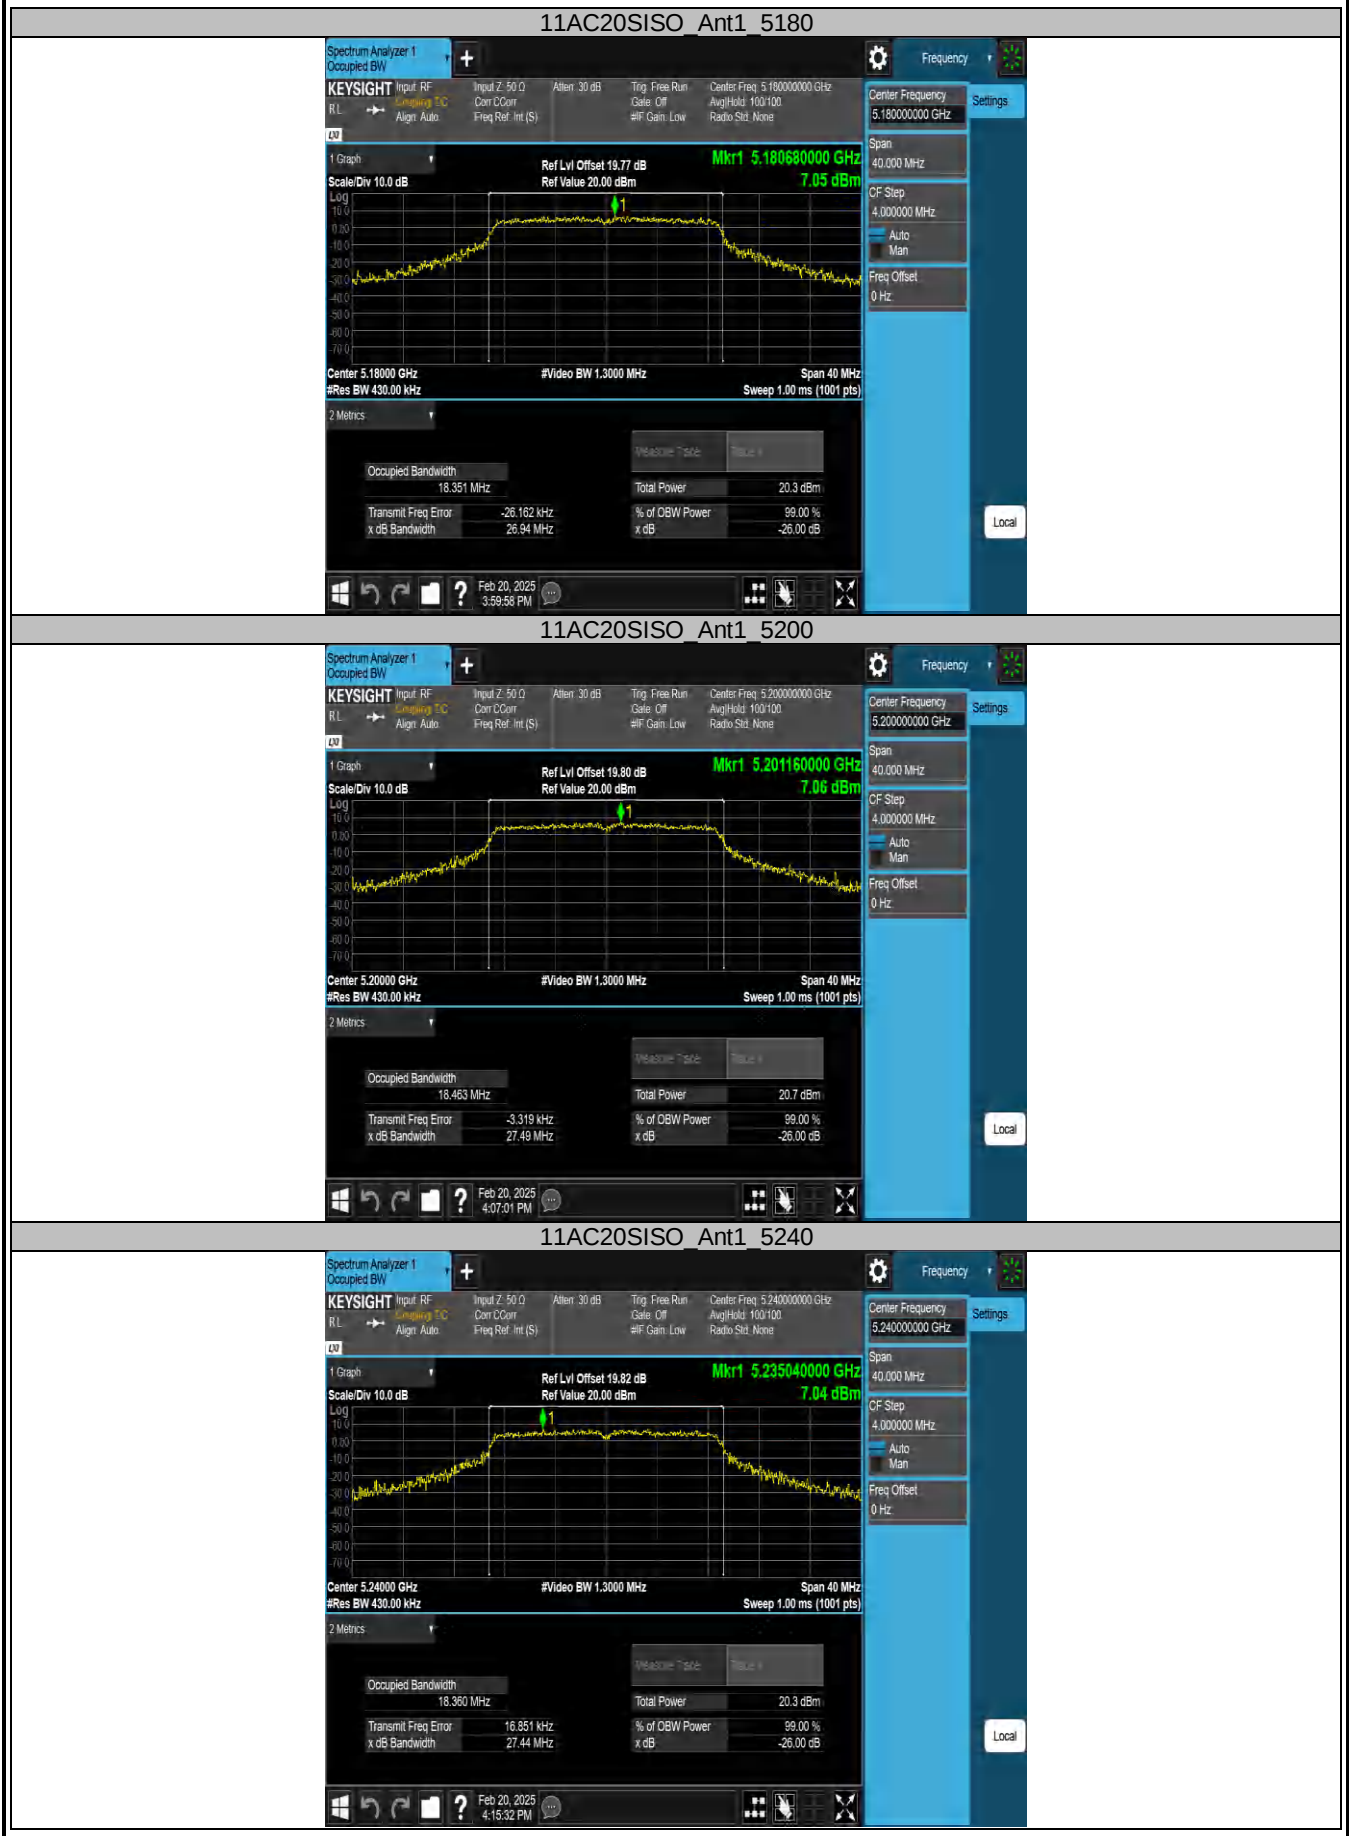

11AC20SISO Ant1 5260




11AC20SISO Ant1 5280



11AC20SISO Ant1 5320



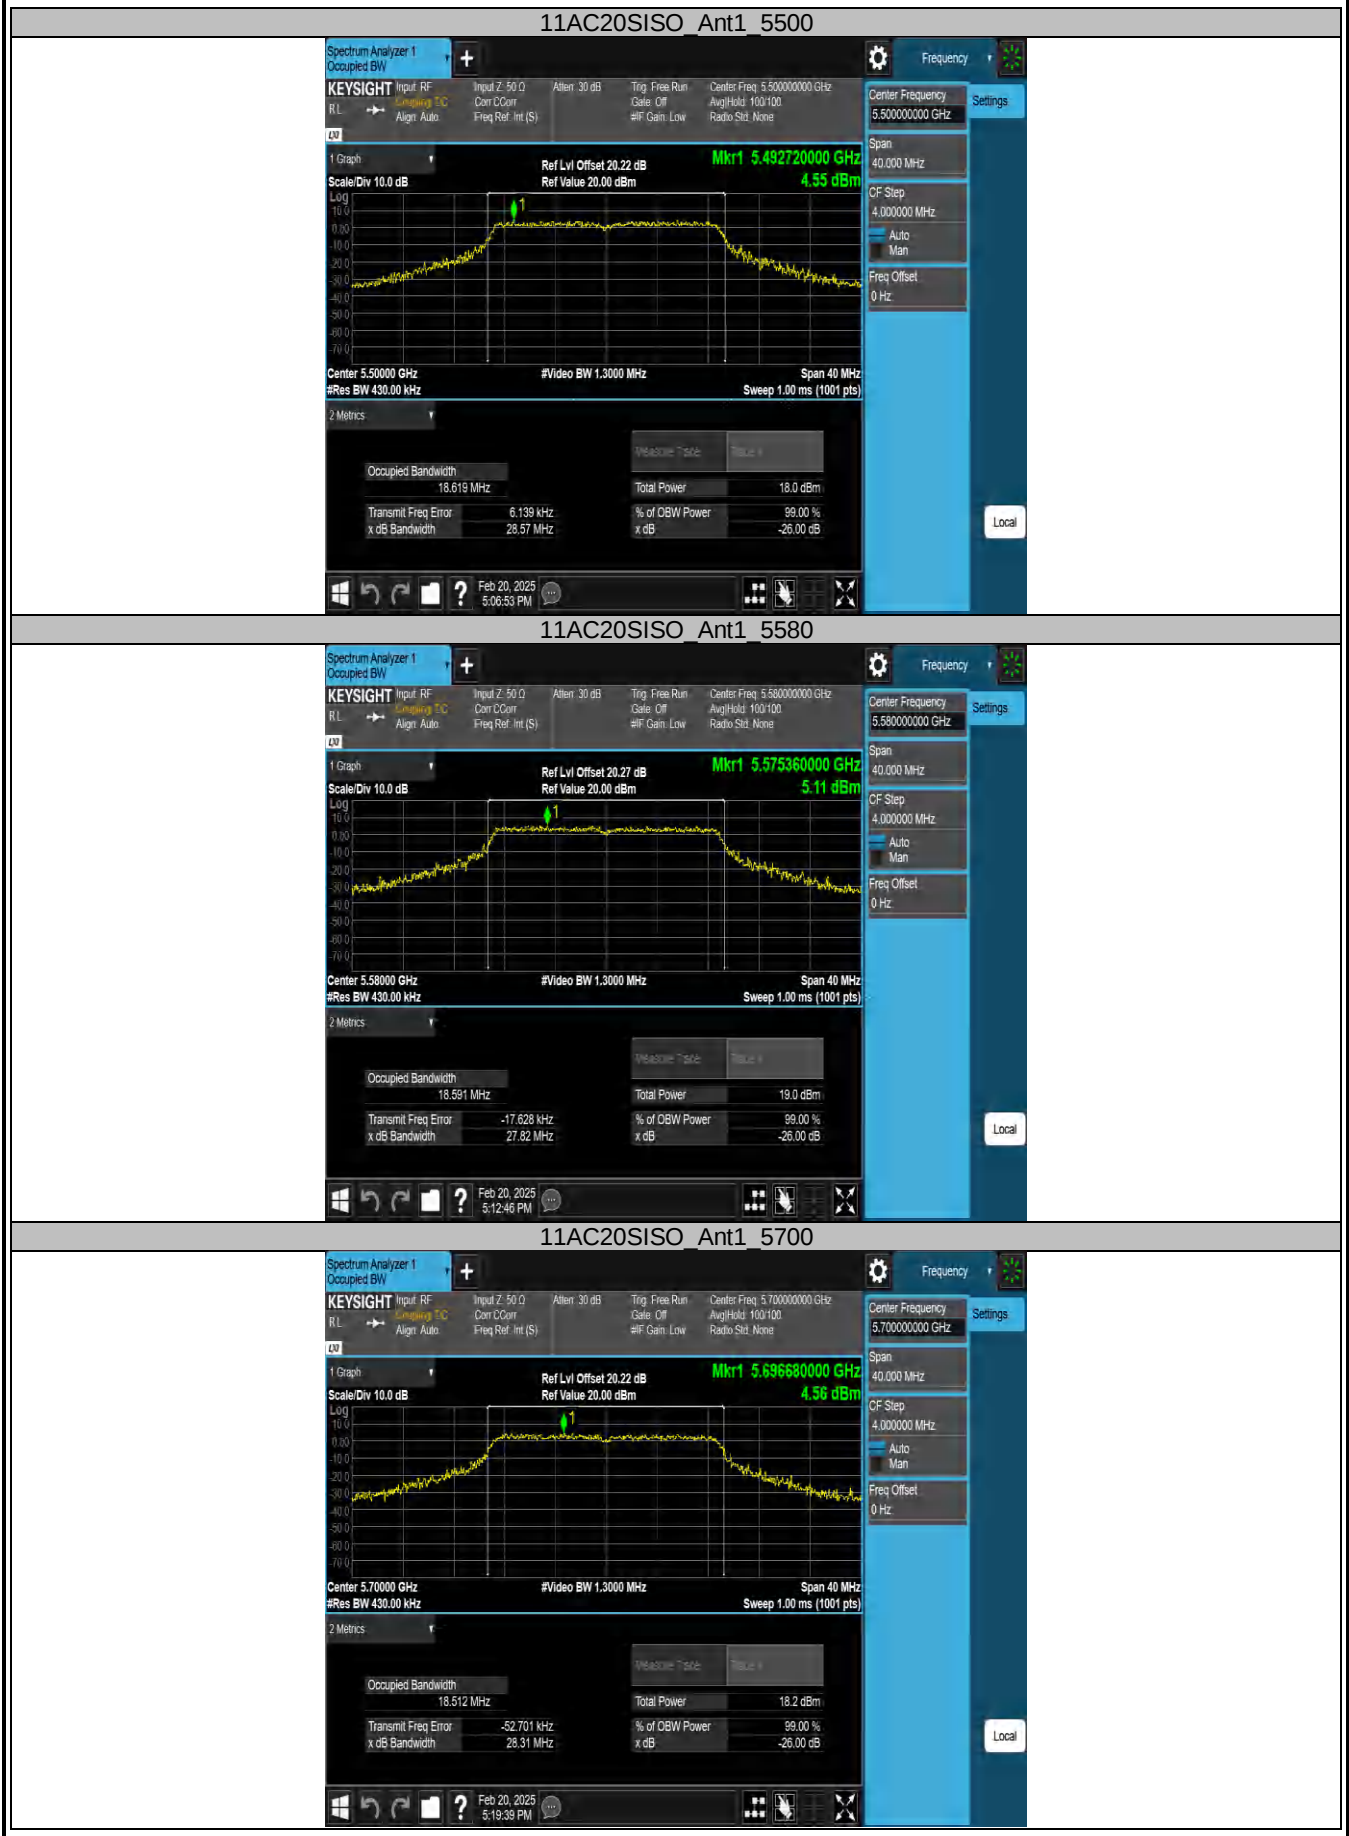

11AC20SISO Ant1 5745



11AC20SISO Ant1 5785



11AC20SISO Ant1 5825



11AC40SISO Ant1 5190



11AC40SISO Ant1 5230



11AC40SISO Ant1 5270



11AC40SISO Ant1 5310



11AC40SISO Ant1 5510



11AC40SISO Ant1 5550



11AC40SISO Ant1 5670




11AC40SISO Ant1 5755



11AC40SISO Ant1 5795



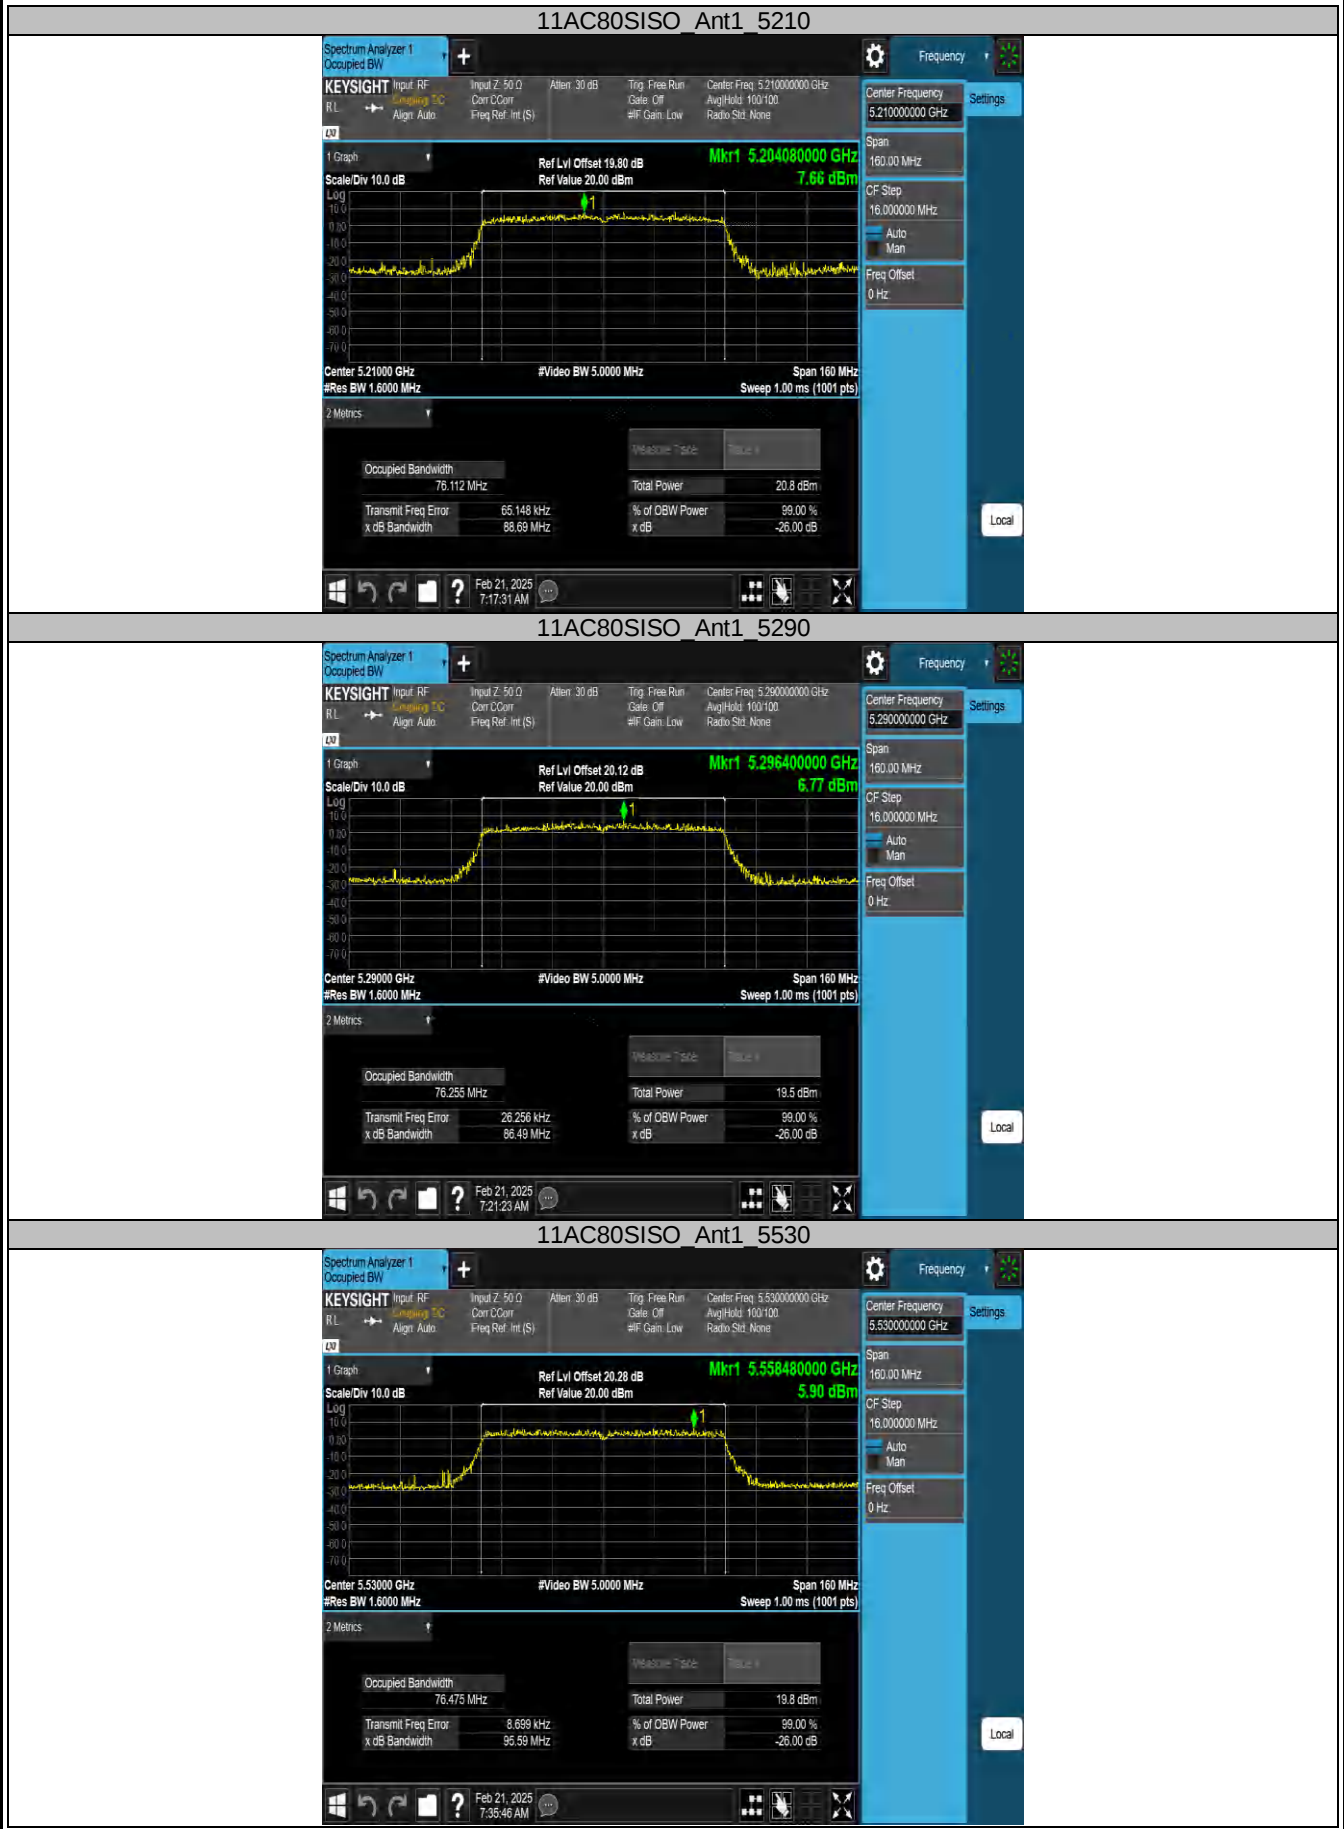

11AC80SISO Ant1 5610




11AC80SISO Ant1 5775




11AX20SISO Ant1 5180




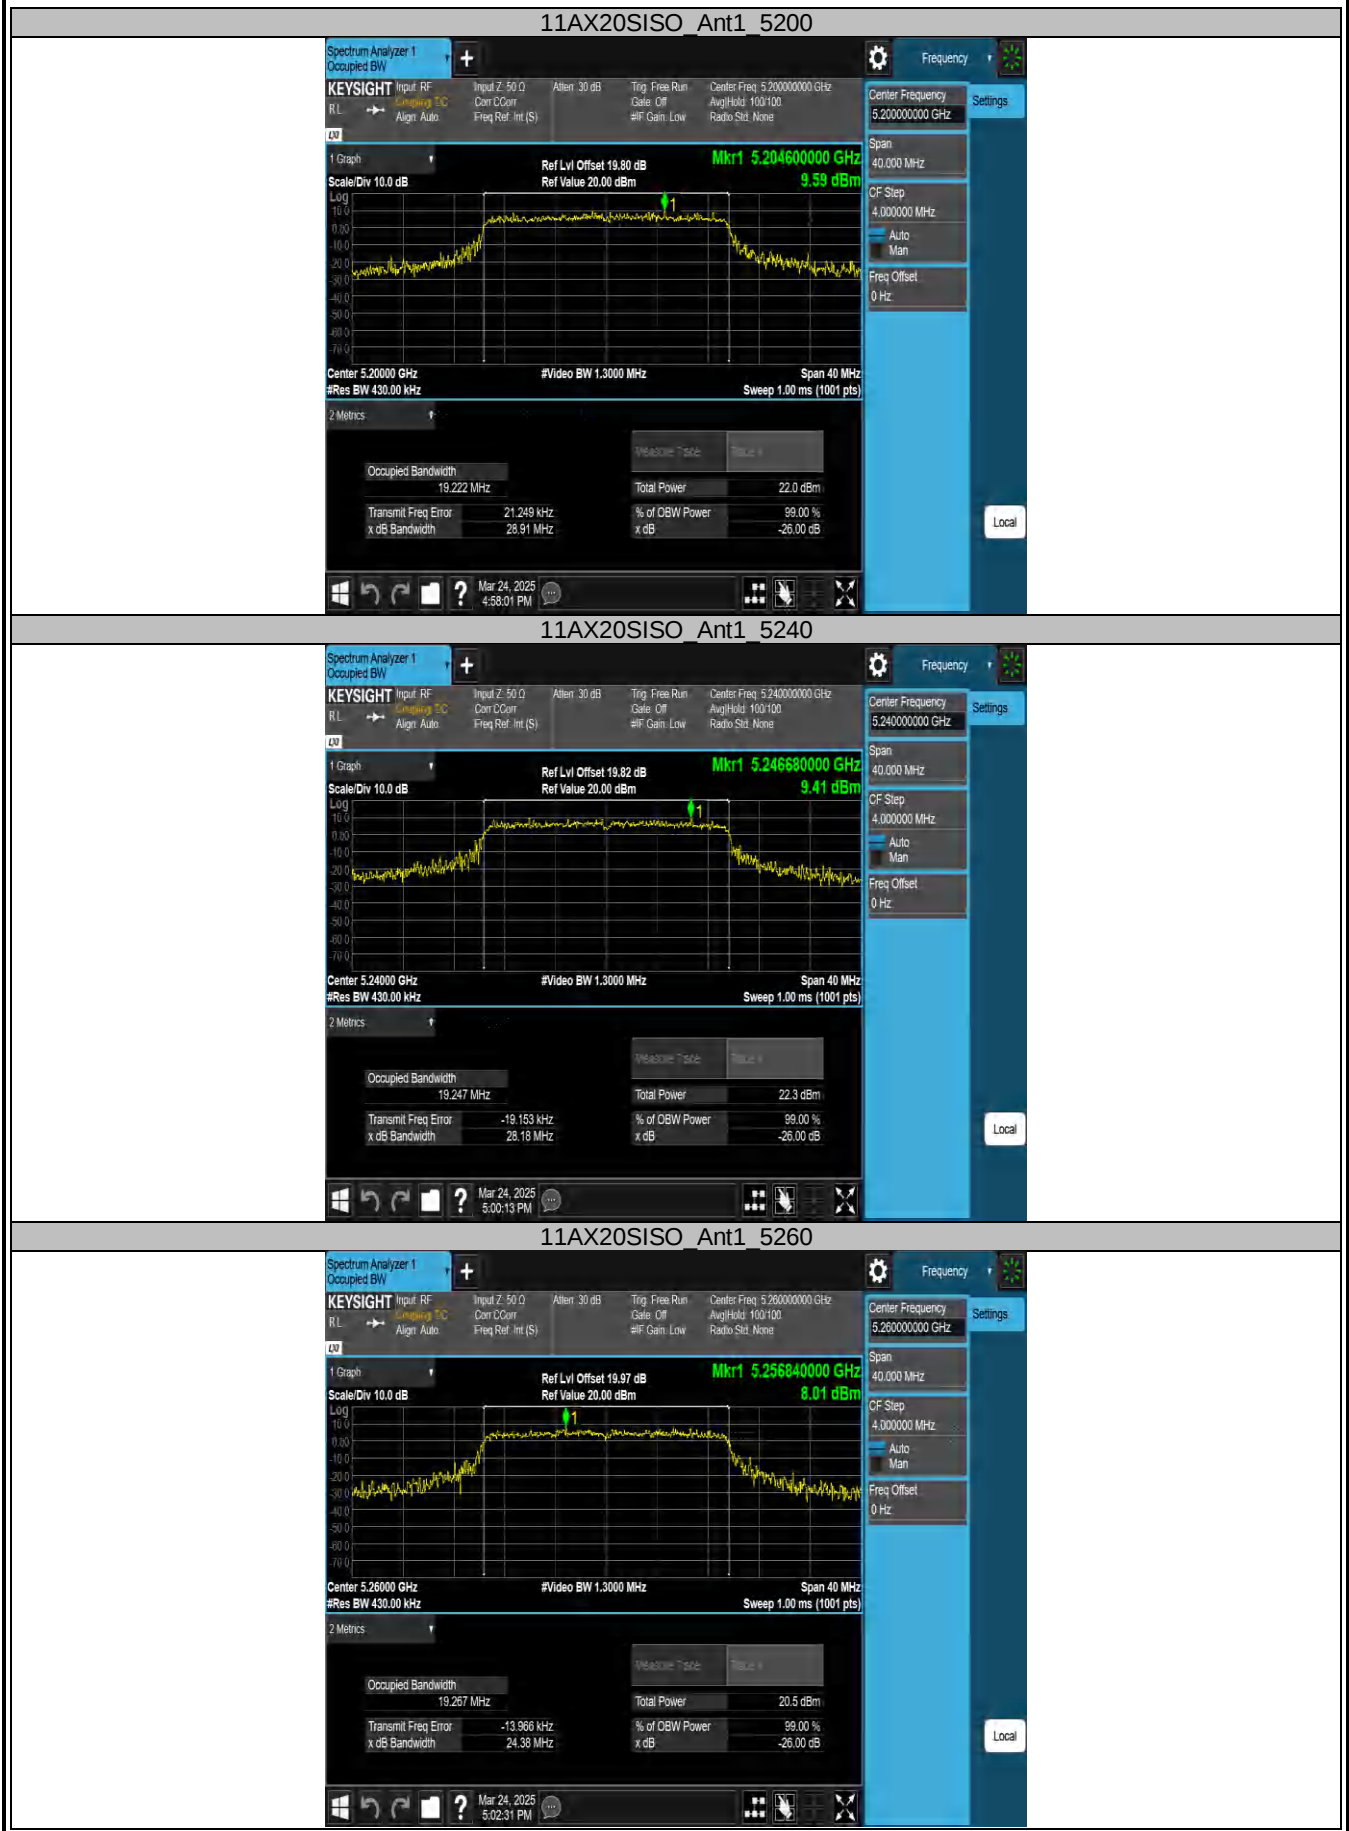

11AX20SISO Ant1 5280

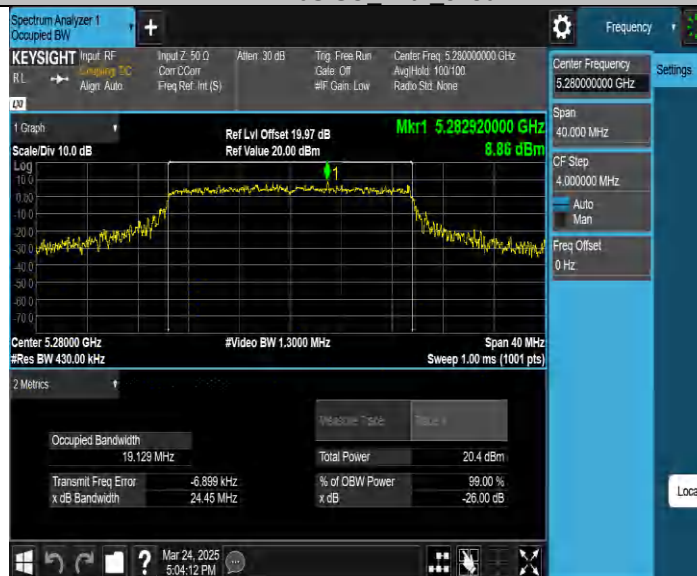


11AX20SISO Ant1 5320

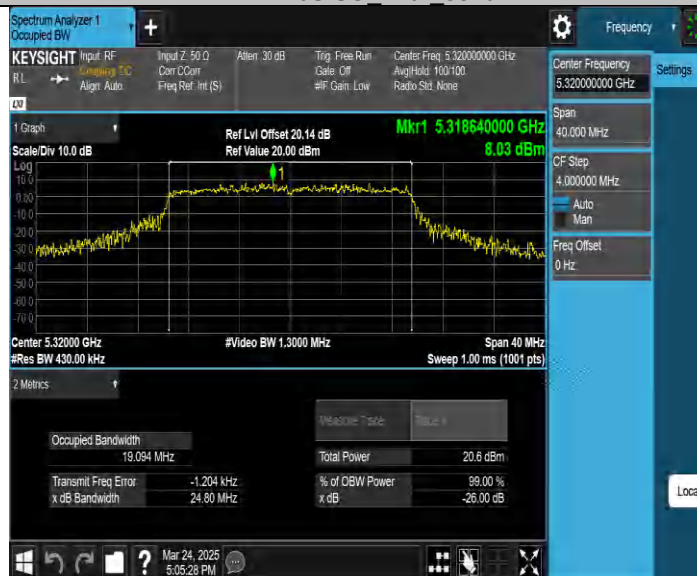

11AX20SISO Ant1 5500



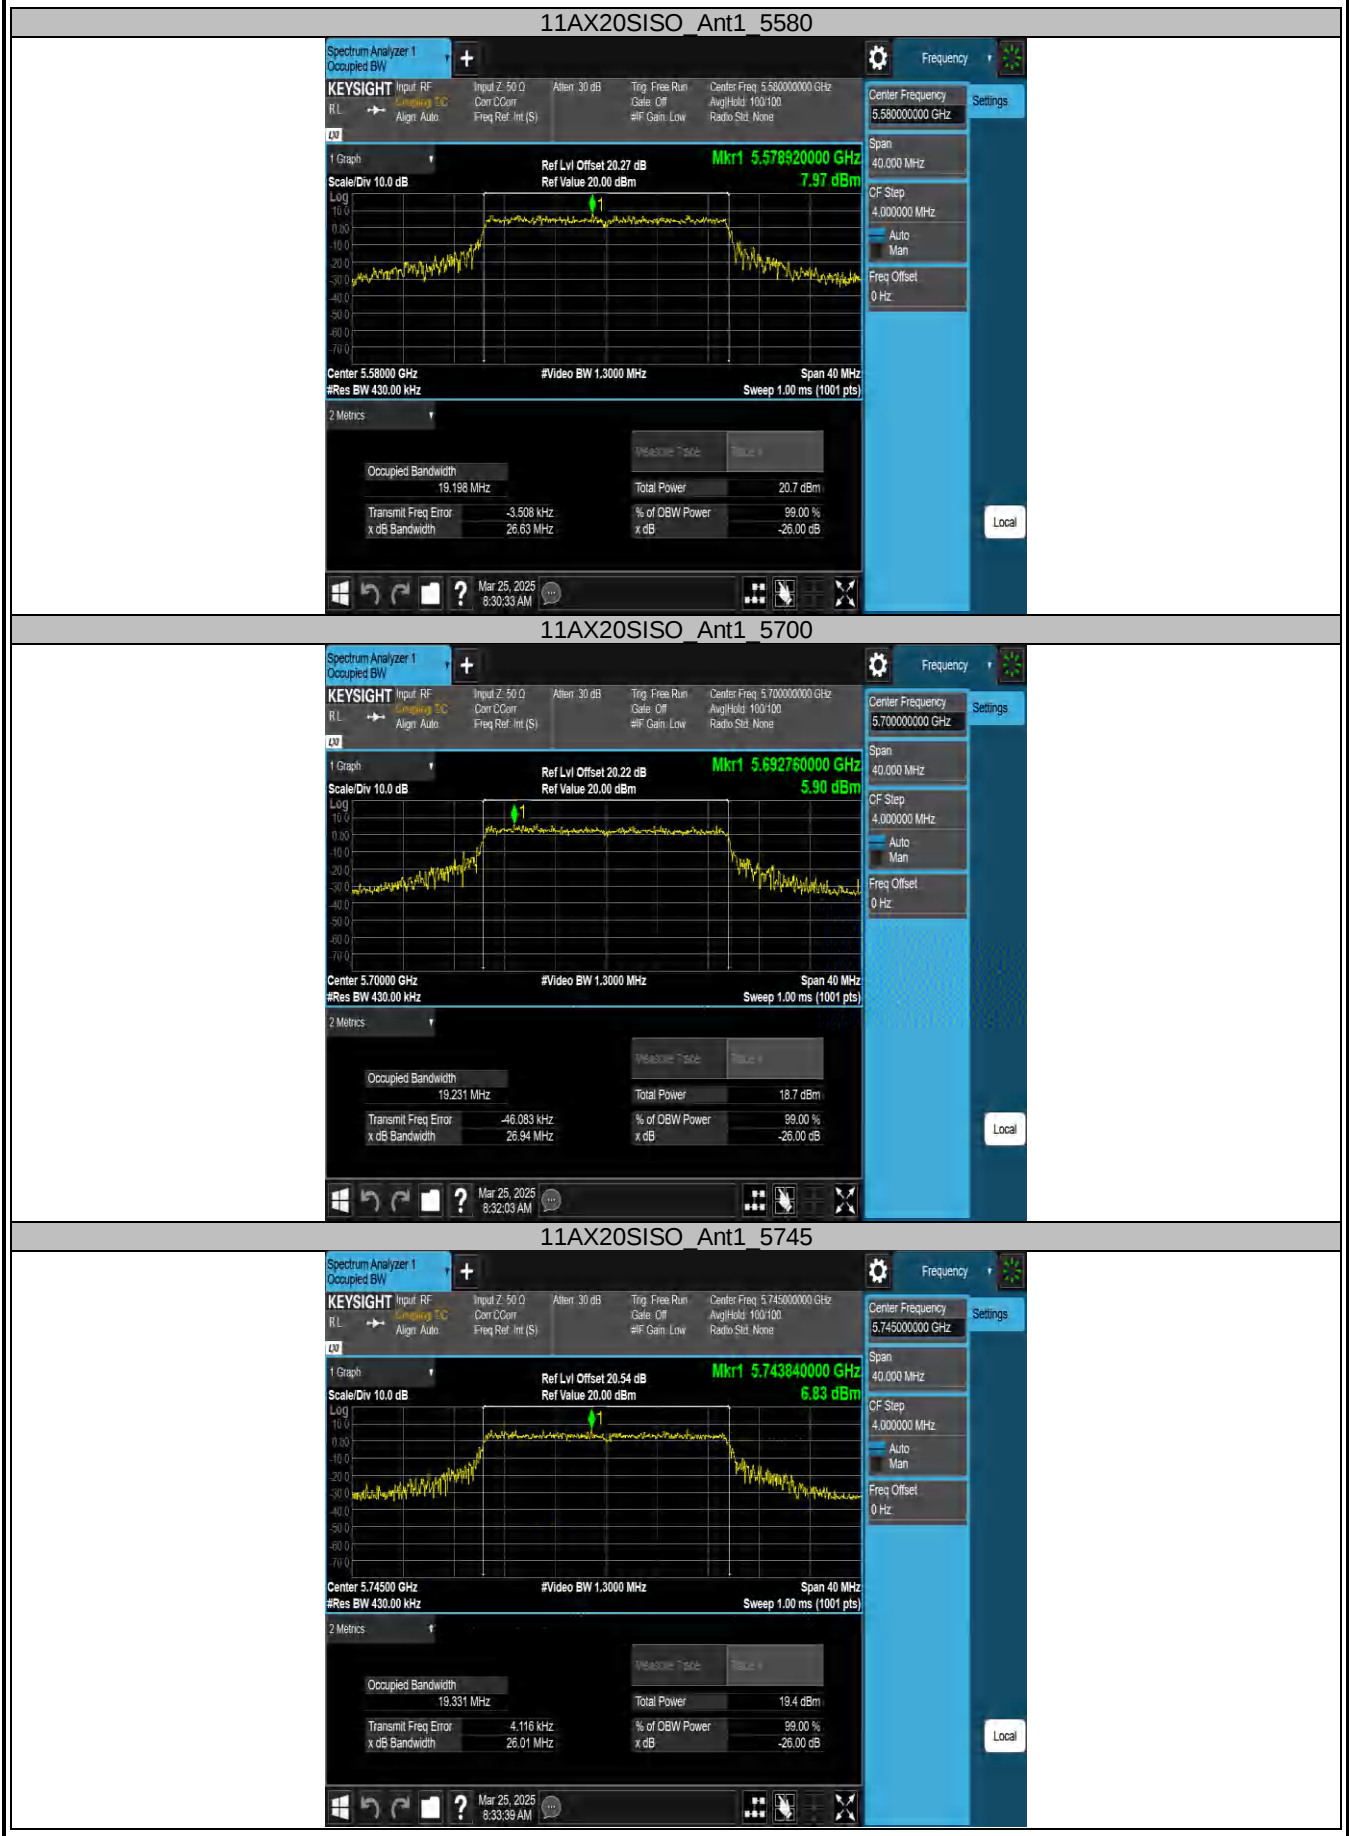

11AX20SISO Ant1 5785



11AX20SISO Ant1 5825



11AX40SISO Ant1 5190



11AX40SISO_Ant1_5230




11AX40SISO_Ant1_5270




11AX40SISO_Ant1_5310



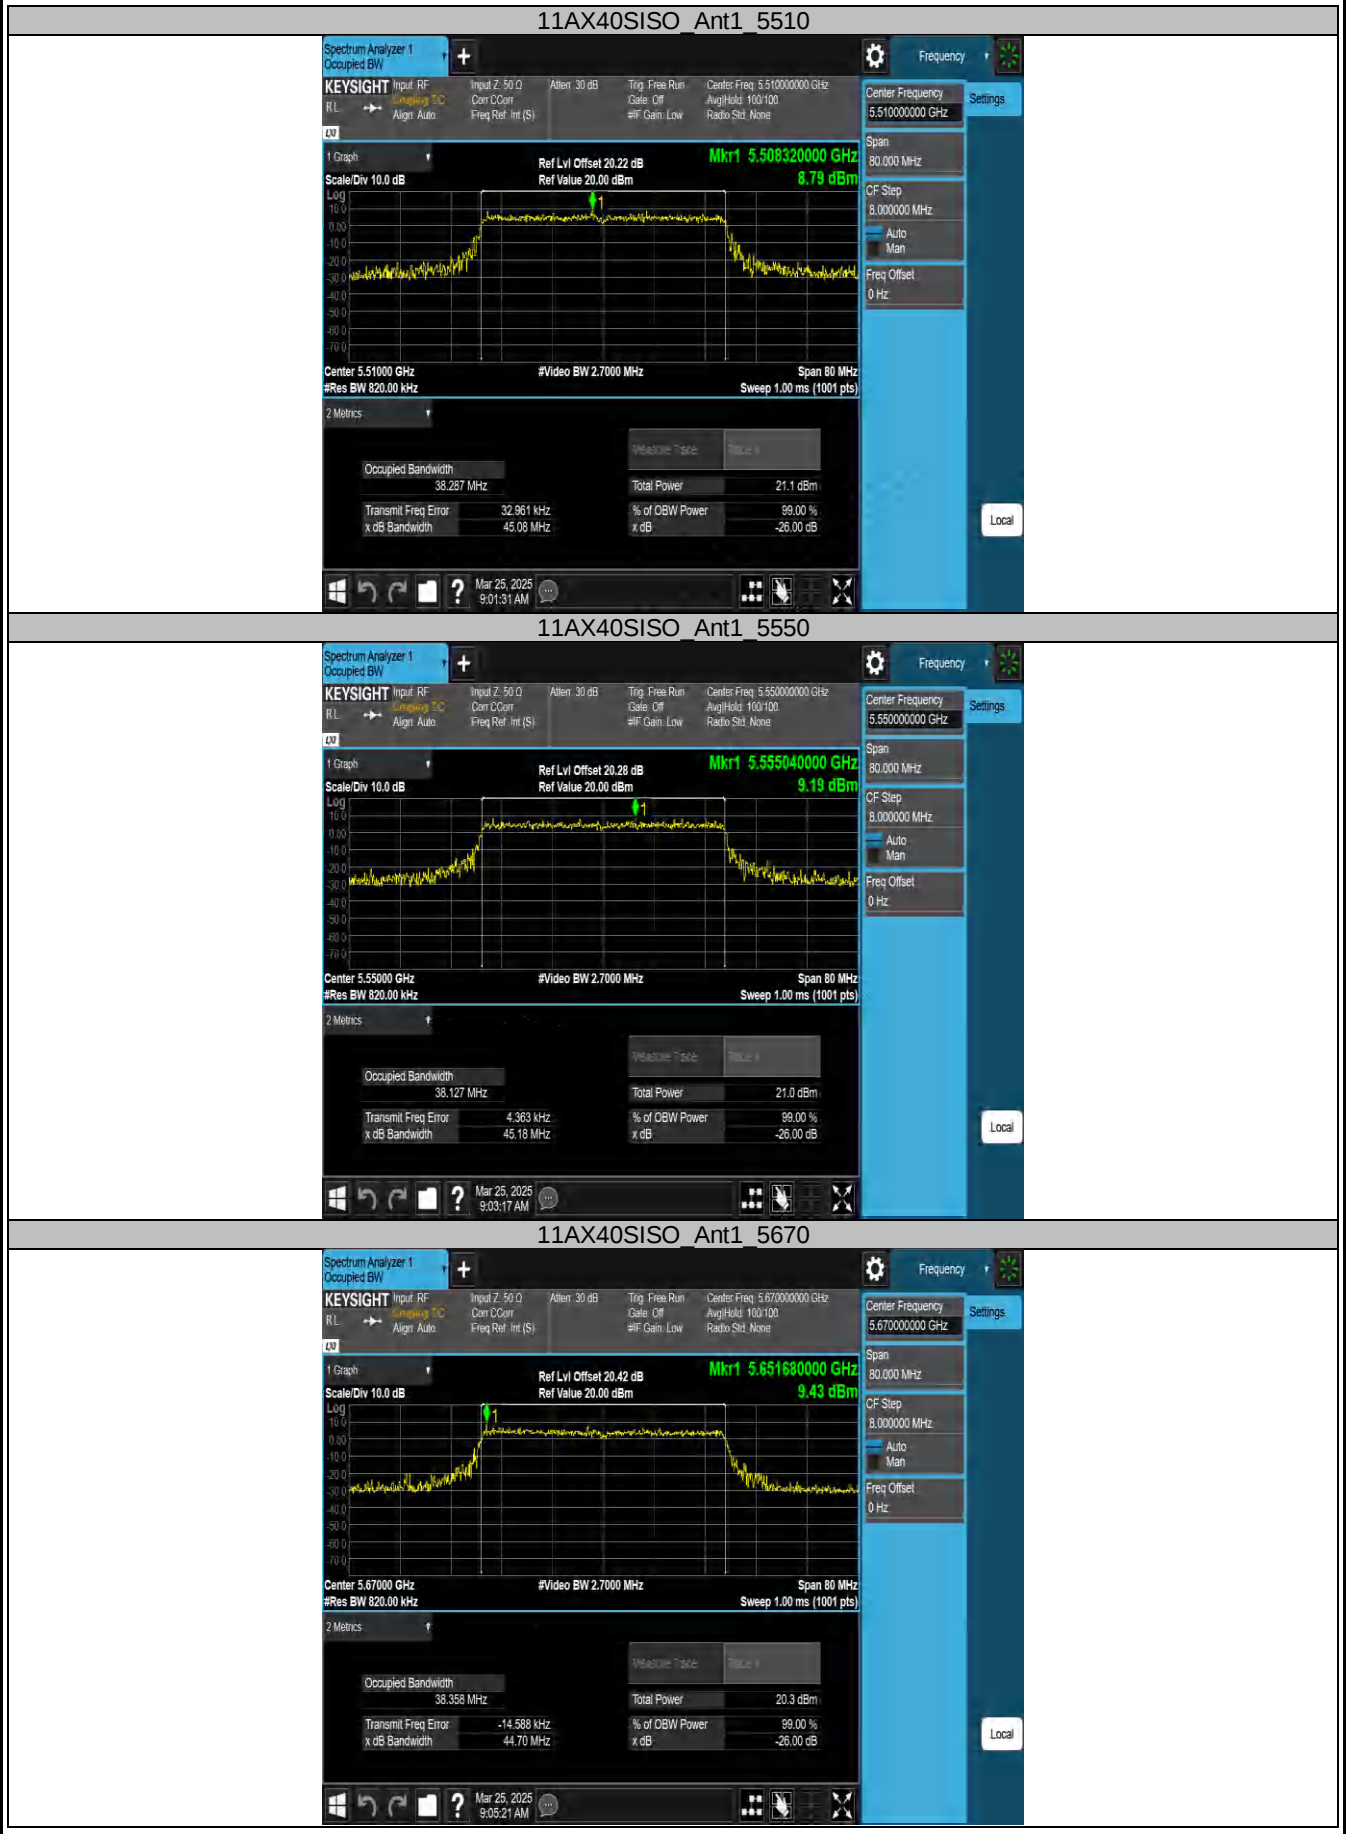

11AX40SISO Ant1 5755

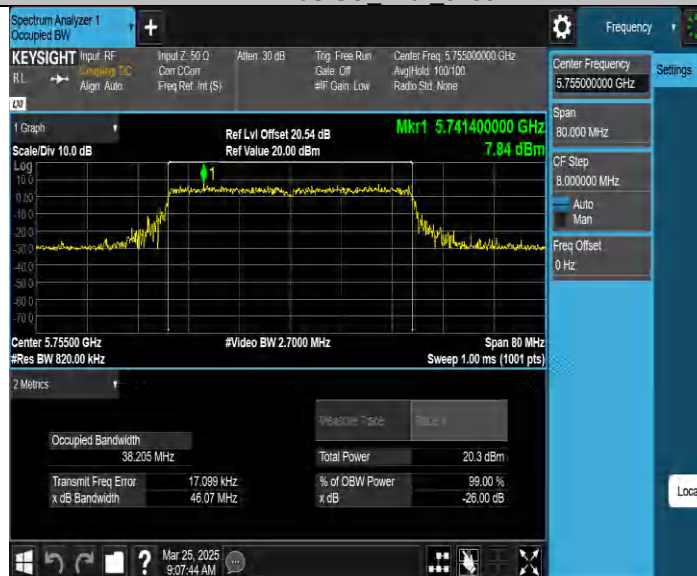

11AX40SISO Ant1 5795



11AX80SISO Ant1 5210



11AX80SISO Ant1 5290




11AX80SISO Ant1 5530



11AX80SISO Ant1 5610



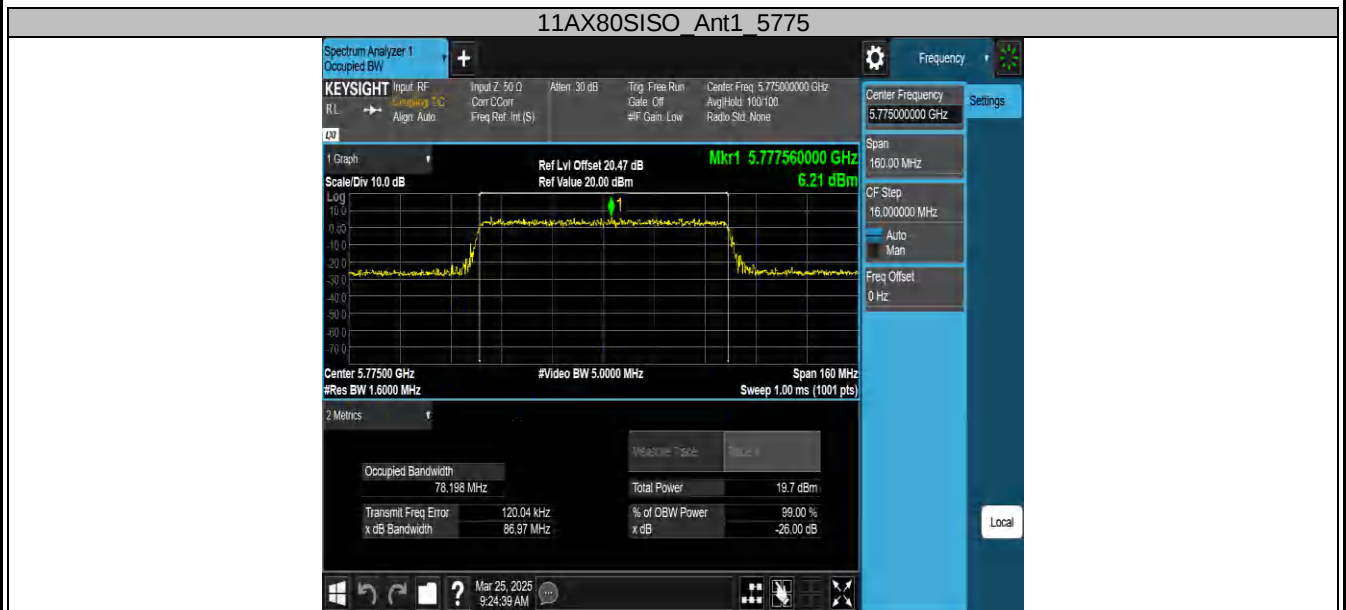

Appendix A.6: Test Results of 6dB Bandwidth

Test Result

TestMode	Antenna	Channel	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.400	5736.800	5753.200	0.5	PASS
		5785	16.320	5776.840	5793.160	0.5	PASS
		5825	16.200	5816.960	5833.160	0.5	PASS
11N20SISO	Ant1	5745	17.720	5736.120	5753.840	0.5	PASS
		5785	17.640	5776.160	5793.800	0.5	PASS
		5825	17.600	5816.200	5833.800	0.5	PASS
11N40SISO	Ant1	5755	36.400	5736.760	5773.160	0.5	PASS
		5795	36.320	5776.840	5813.160	0.5	PASS
11AC20SISO	Ant1	5745	17.800	5736.080	5753.880	0.5	PASS
		5785	17.800	5776.080	5793.880	0.5	PASS
		5825	17.560	5816.200	5833.760	0.5	PASS
11AC40SISO	Ant1	5755	36.480	5736.760	5773.240	0.5	PASS
		5795	36.400	5776.760	5813.160	0.5	PASS
11AC80SISO	Ant1	5775	76.480	5736.760	5813.240	0.5	PASS
11AC20SISO	Ant1	5745	19.120	5735.440	5754.560	0.5	PASS
		5785	19.040	5775.480	5794.520	0.5	PASS
		5825	19.040	5815.480	5834.520	0.5	PASS
11AC40SISO	Ant1	5755	38.080	5735.960	5774.040	0.5	PASS
		5795	37.120	5776.120	5813.240	0.5	PASS
11AC80SISO	Ant1	5775	77.920	5735.960	5813.880	0.5	PASS

Test Graphs

11A Ant1 5745



11A Ant1 5785



11A Ant1 5825



11N20SISO Ant1 5745



11N20SISO Ant1 5785



11N20SISO Ant1 5825



11N40SISO Ant1 5755



11N40SISO Ant1 5795



11AC20SISO Ant1 5745



11AC20SISO Ant1 5785



11AC20SISO Ant1 5825



11AC40SISO Ant1 5755



11AC40SISO Ant1 5795



11AC80SISO Ant1 5775



11AX20SISO Ant1 5745



11AX20SISO Ant1 5785



11AX20SISO Ant1 5825



11AX40SISO Ant1 5755





Appendix A.7: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30MHz - 1GHz

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch48
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

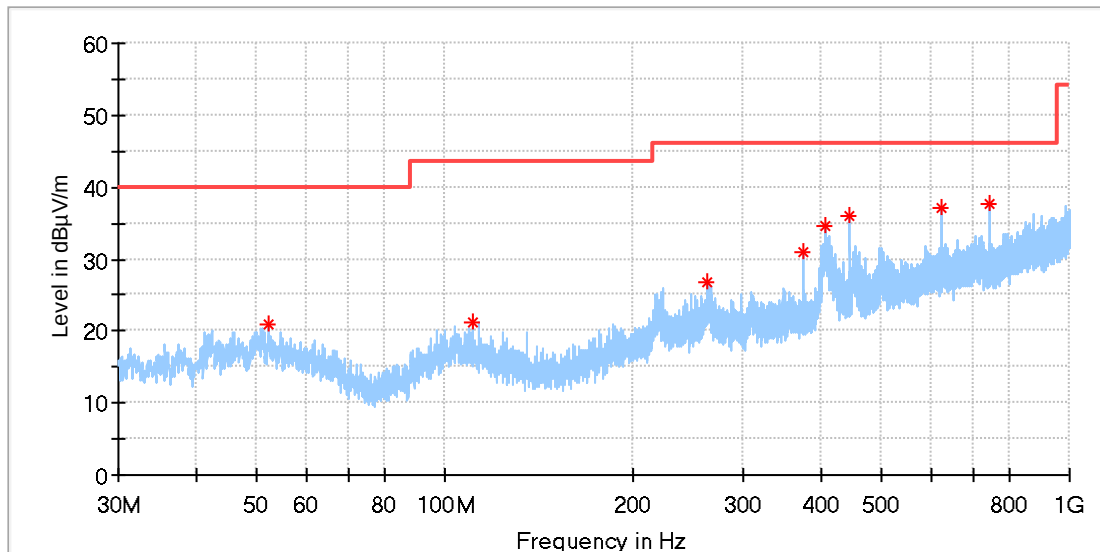

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
52.048846	20.95	40.00	19.05	100.0	H	128.0	-18.4
110.957692	21.07	43.50	22.43	100.0	H	286.0	-19.3
261.979231	26.74	46.00	19.26	100.0	H	128.0	-17.1
375.021539	30.99	46.00	15.01	100.0	H	151.0	-14.3
406.098846	34.49	46.00	11.51	100.0	H	143.0	-13.6
445.495769	35.97	46.00	10.03	100.0	H	24.0	-12.9
625.020385	37.07	46.00	8.93	100.0	H	294.0	-9.2
742.539615	37.61	46.00	8.39	100.0	H	341.0	-7.2

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch48
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

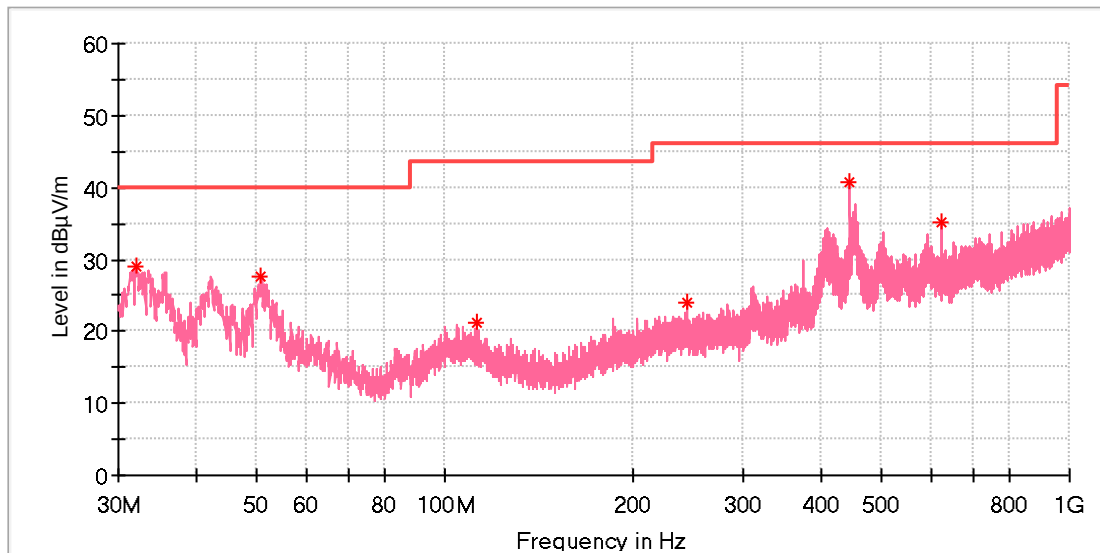

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
32.089231	29.08	40.00	10.92	100.0	V	215.0	-22.7
50.855000	27.72	40.00	12.28	100.0	V	299.0	-18.4
112.450000	21.08	43.50	22.42	100.0	V	86.0	-19.5
243.735769	23.88	46.00	22.12	100.0	V	22.0	-17.6
445.495769	40.72	46.00	5.28	100.0	V	325.0	-12.9
625.020385	35.28	46.00	10.72	100.0	V	308.0	-9.2

Final_Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz

Note: The highest waveform in the figure is 5GHz Wi-Fi Fundamental.

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch48
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

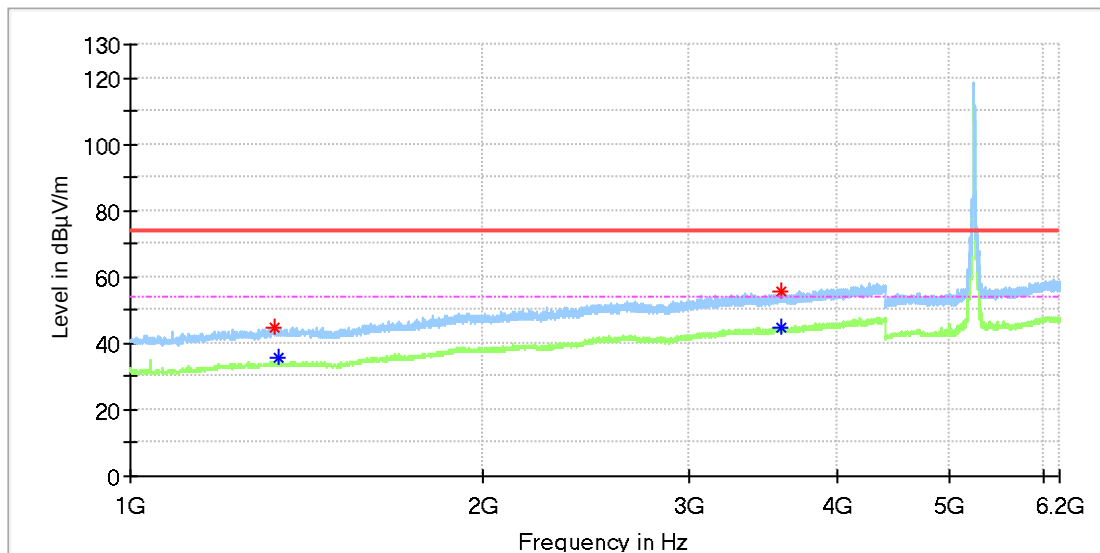

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1325.500000	44.50	---	74.00	29.50	150.0	H	9.0	2.9
1336.000000	---	35.59	54.00	18.41	150.0	H	1.0	3.0
3582.500000	55.39	---	74.00	18.61	150.0	H	118.0	11.6
3585.000000	---	44.86	54.00	9.14	150.0	H	231.0	11.6

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: POS Terminal
Model: C20DS
Test Mode: WIFI 5G_11a_Ch48
Order No/Sample No: 168531160/A003911736-002
Test Voltage: Adaptor
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

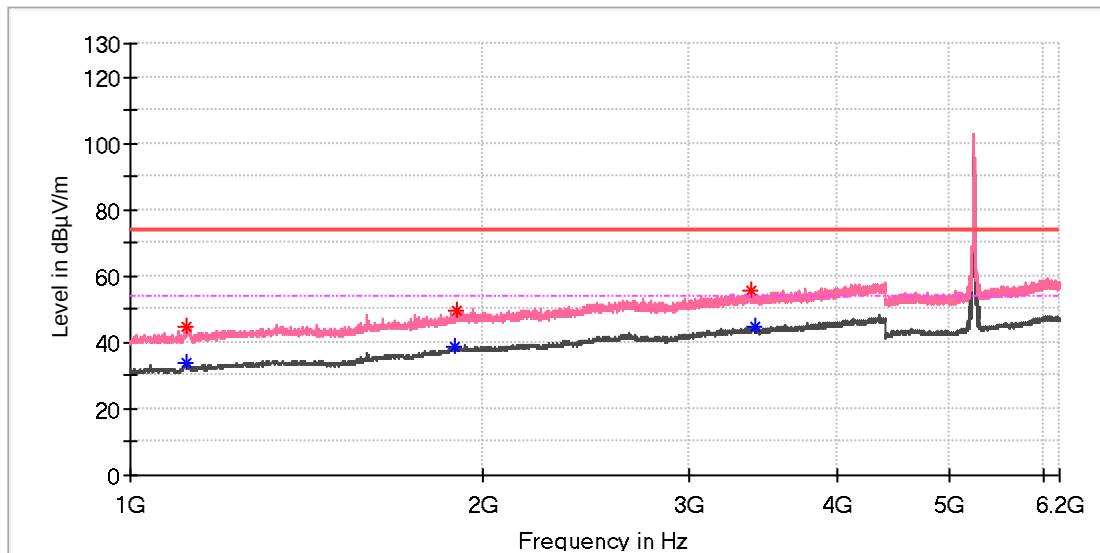

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1115.000000	---	34.06	54.00	19.94	150.0	V	264.0	0.8
1118.500000	44.67	---	74.00	29.33	150.0	V	282.0	0.8
1893.000000	---	38.69	54.00	15.31	150.0	V	35.0	7.3
1898.000000	49.39	---	74.00	24.61	150.0	V	0.0	7.4
3389.500000	55.60	---	74.00	18.40	150.0	V	287.0	11.1
3406.500000	---	44.52	54.00	9.48	150.0	V	322.0	11.2

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch48
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

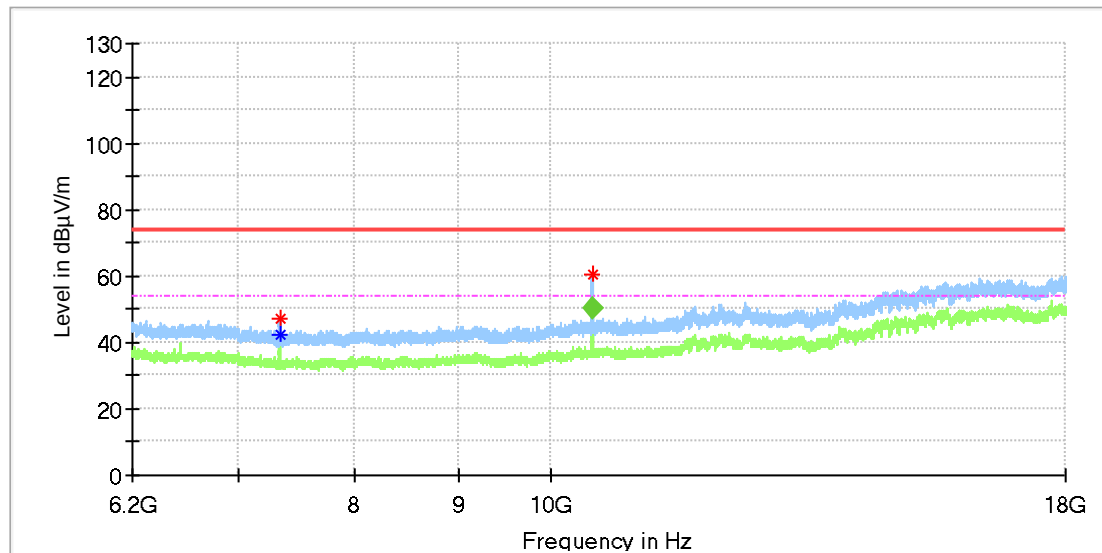

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7336.733333	---	42.07	54.00	11.93	150.0	H	322.0	8.1
7337.225000	47.26	---	74.00	26.74	150.0	H	322.0	8.1
10479.958333	60.71	---	74.00	13.29	150.0	H	0.0	12.0

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10480.071250	50.29	54.00	3.71	151.0	H	-2.0	12.0

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch48
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

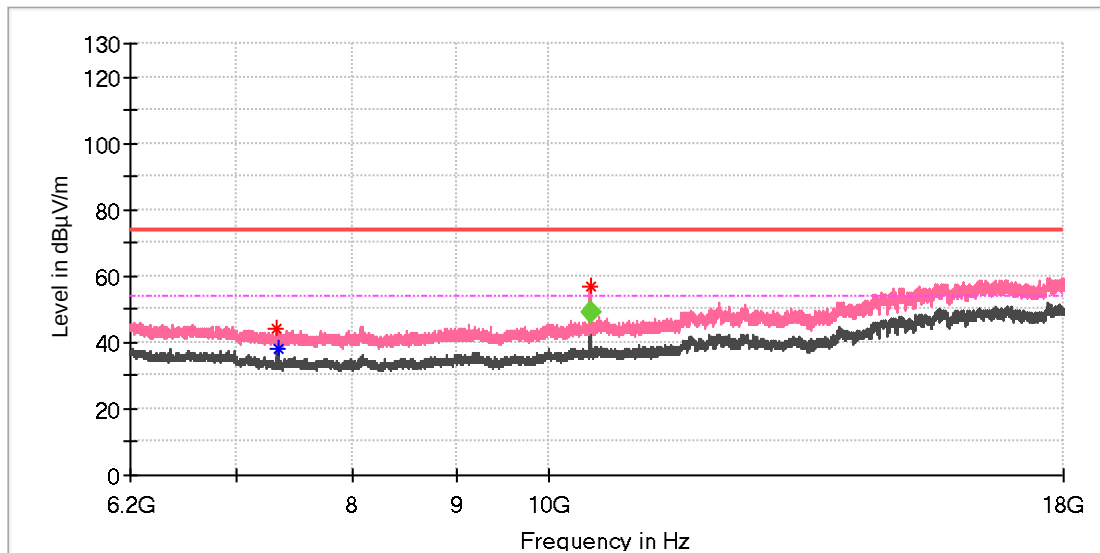

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7333.783333	43.87	---	74.00	30.13	150.0	V	310.0	8.1
7336.241667	---	38.02	54.00	15.98	150.0	V	310.0	8.1
10479.958333	56.71	---	74.00	17.29	150.0	V	288.0	12.0

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10479.939583	48.69	54.00	5.31	148.0	V	287.0	12.0

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch52
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

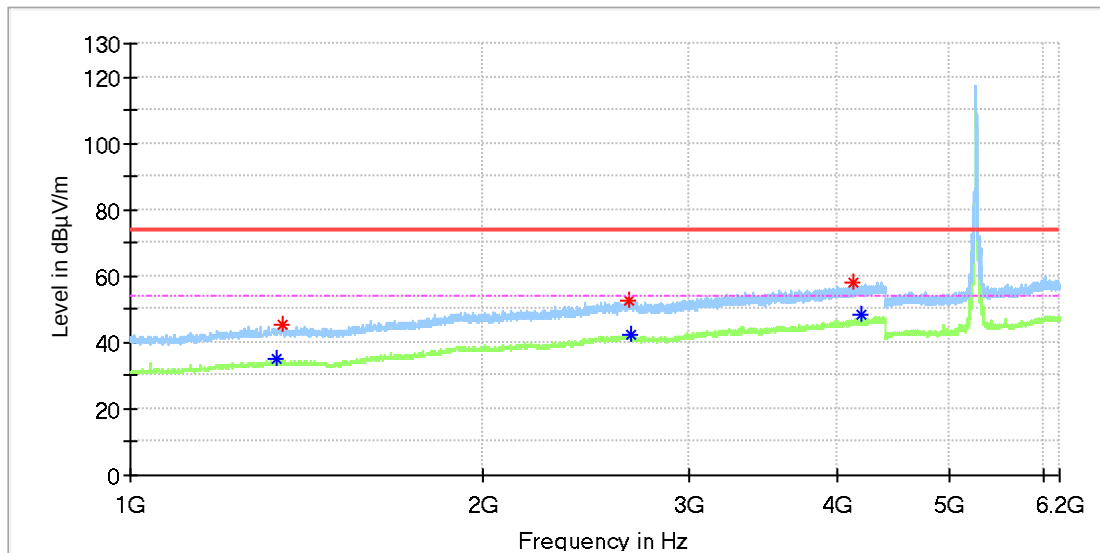

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1331.000000	---	35.09	54.00	18.91	150.0	H	215.0	3.0
1348.500000	45.31	---	74.00	28.69	150.0	H	188.0	3.1
2665.500000	52.37	---	74.00	21.63	150.0	H	88.0	10.2
2669.500000	---	42.50	54.00	11.50	150.0	H	81.0	10.2
4140.500000	57.96	---	74.00	16.04	150.0	H	148.0	13.3
4208.000000	---	48.58	54.00	5.42	150.0	H	108.0	13.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch52
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

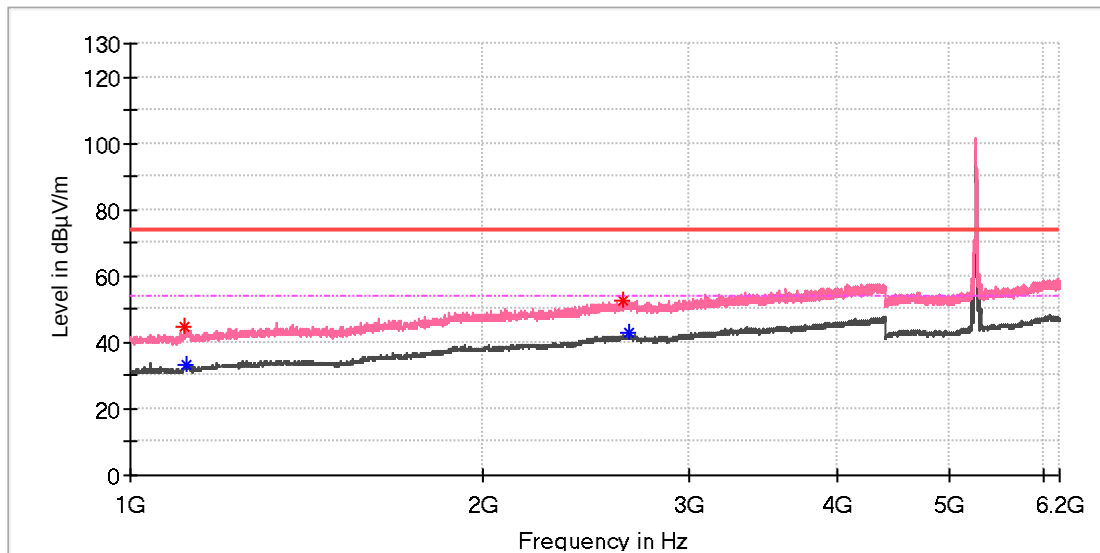

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1112.500000	44.75	---	74.00	29.25	150.0	V	272.0	0.7
1117.000000	---	33.55	54.00	20.46	150.0	V	241.0	0.8
2628.500000	52.44	---	74.00	21.56	150.0	V	57.0	9.9
2658.000000	---	42.74	54.00	11.26	150.0	V	183.0	10.2

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch52
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

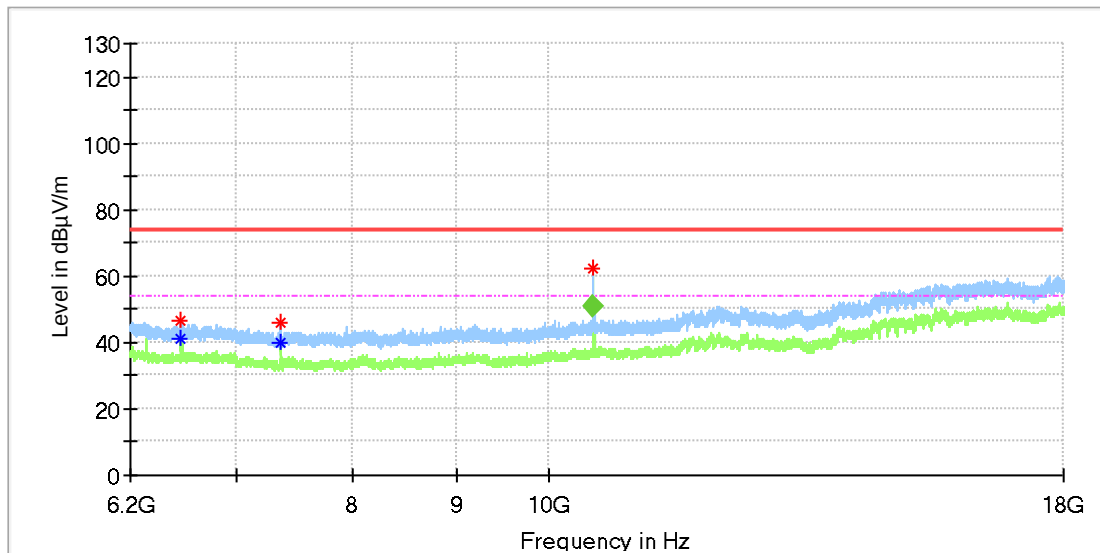

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6570.225000	---	41.34	54.00	12.66	150.0	H	318.0	8.7
6570.225000	46.58	---	74.00	27.42	150.0	H	318.0	8.7
7361.808333	46.02	---	74.00	27.98	150.0	H	293.0	8.2
7366.725000	---	40.01	54.00	13.99	150.0	H	256.0	8.2
10519.783333	62.11	---	74.00	11.89	150.0	H	2.0	12.0

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10520.070833	50.92	54.00	3.08	149.0	H	-3.0	12.0

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch52
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

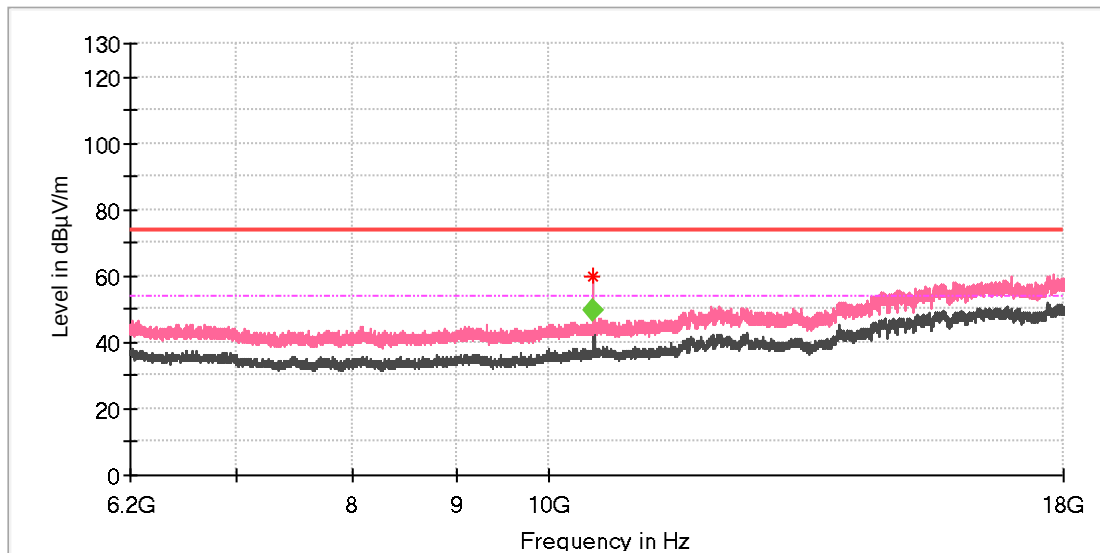

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10519.783333	59.87	---	74.00	14.13	150.0	V	317.0	12.0

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10519.983333	49.55	54.00	4.45	150.0	V	316.0	12.0

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch116
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

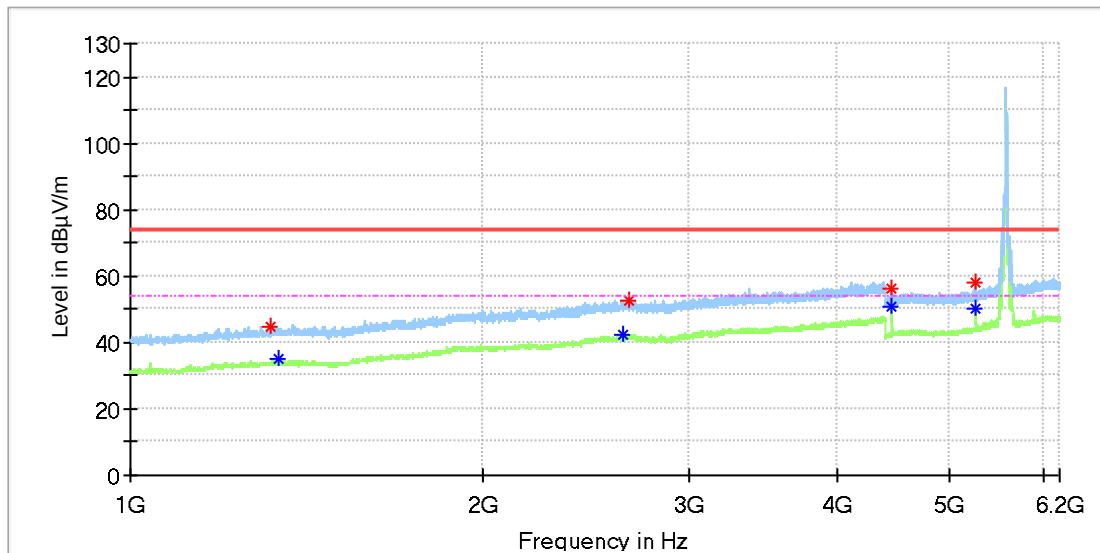

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1318.500000	44.90	---	74.00	29.10	150.0	H	97.0	2.9
1336.000000	---	35.31	54.00	18.69	150.0	H	156.0	3.0
2632.000000	---	42.39	54.00	11.61	150.0	H	261.0	9.9
2657.500000	52.61	---	74.00	21.39	150.0	H	104.0	10.2
4463.500000	---	50.86	54.00	3.14	150.0	H	357.0	12.8
4464.000000	56.29	---	74.00	17.71	150.0	H	346.0	12.8
5259.000000	58.32	---	74.00	15.68	150.0	H	341.0	14.4
5259.500000	---	50.04	54.00	3.96	150.0	H	341.0	14.4

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch116
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

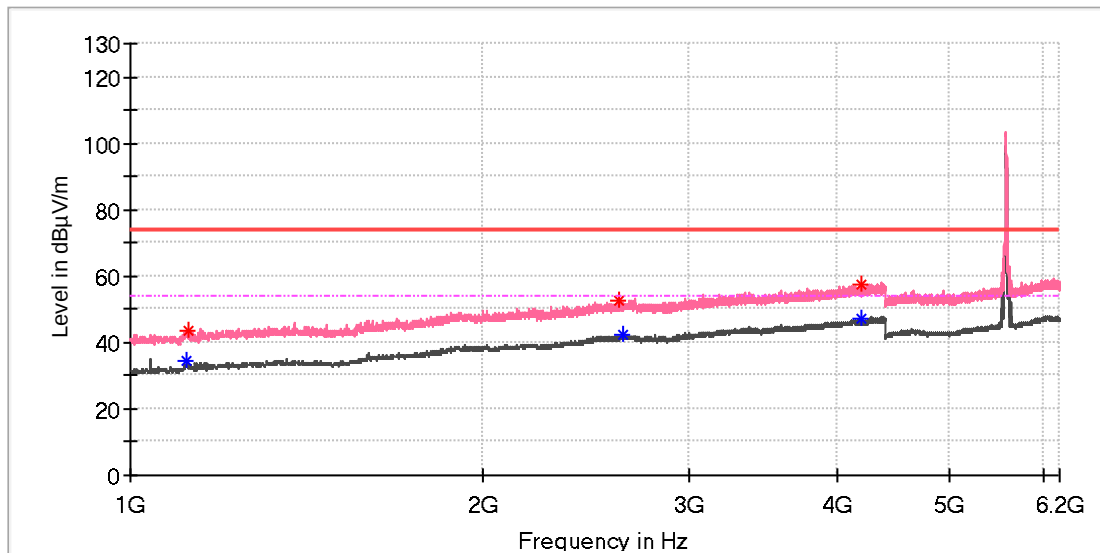

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1118.500000	---	34.76	54.00	19.24	150.0	V	266.0	0.8
1122.500000	43.75	---	74.00	30.25	150.0	V	96.0	0.9
2611.500000	52.45	---	74.00	21.55	150.0	V	59.0	9.7
2631.000000	---	42.37	54.00	11.63	150.0	V	102.0	9.9
4194.000000	---	47.09	54.00	6.91	150.0	V	214.0	13.4
4195.500000	57.46	---	74.00	16.54	150.0	V	47.0	13.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch116
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

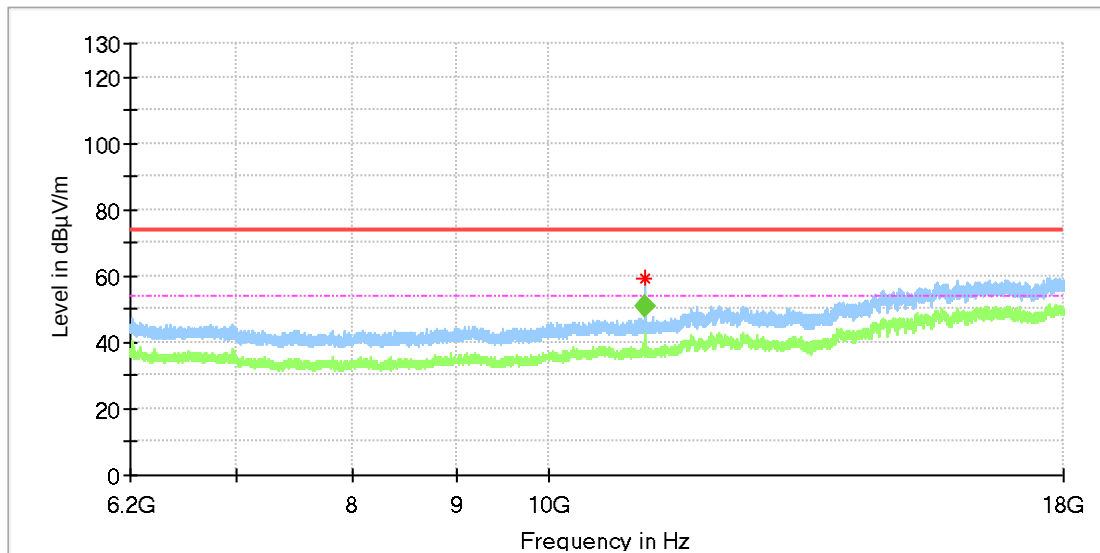

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11159.933333	59.21	---	74.00	14.79	150.0	H	0.0	12.5

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11159.921250	50.64	54.00	3.36	148.0	H	-5.0	12.5

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch116
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

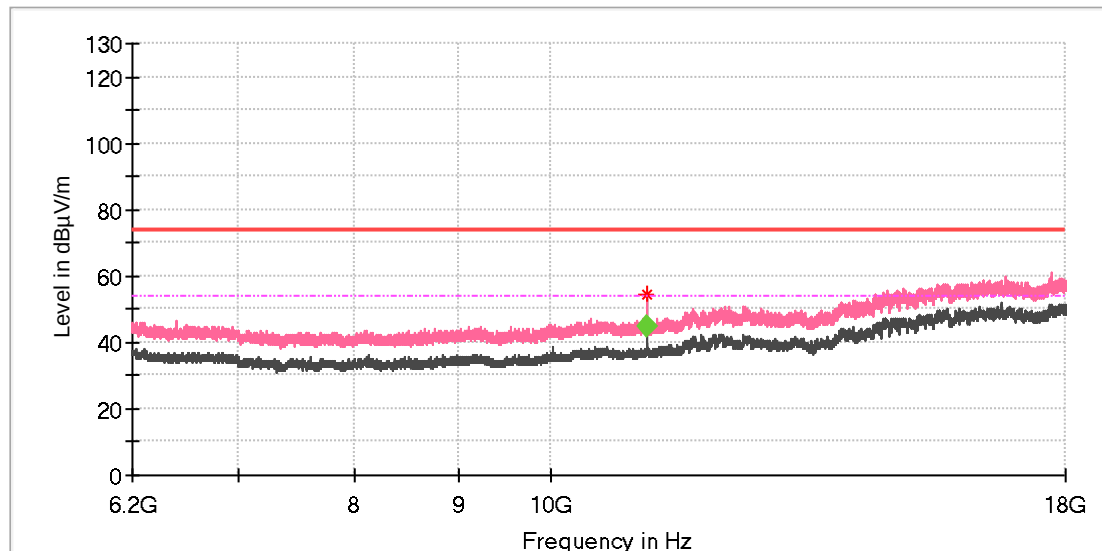

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11159.933333	54.70	---	74.00	19.30	150.0	V	322.0	12.5

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11160.147916	45.01	54.00	8.99	148.0	V	321.0	12.5

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch157
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

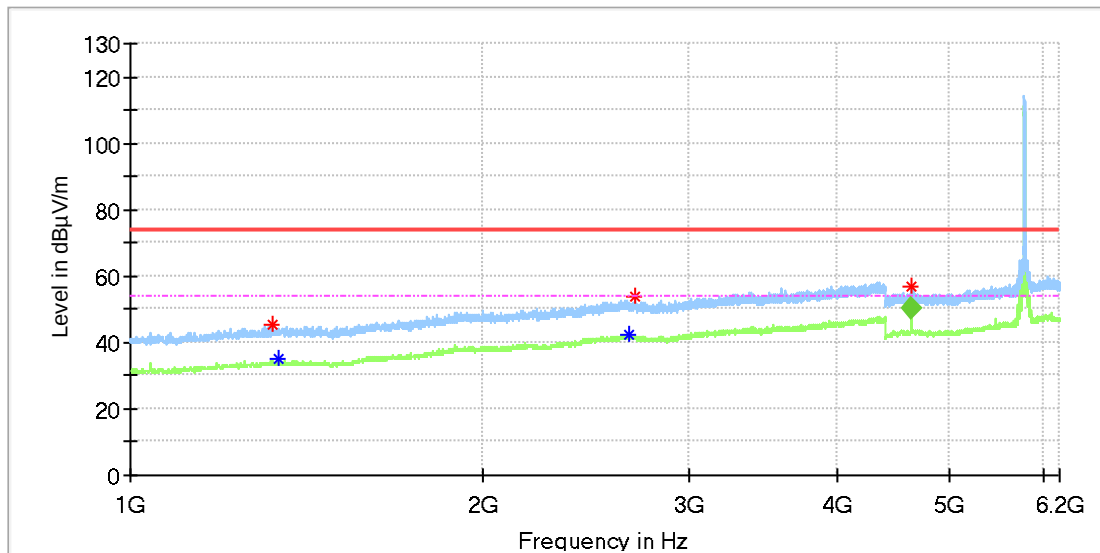

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1321.000000	45.45	---	74.00	28.55	150.0	H	41.0	2.9
1336.500000	---	35.00	54.00	19.00	150.0	H	315.0	3.0
2659.000000	---	42.09	54.00	11.91	150.0	H	190.0	10.2
2692.500000	53.55	---	74.00	20.45	150.0	H	111.0	10.0
4628.000000	57.08	---	74.00	16.92	150.0	H	341.0	13.5

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4627.866667	50.35	54.00	3.65	145.0	H	339.0	13.5

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch157
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

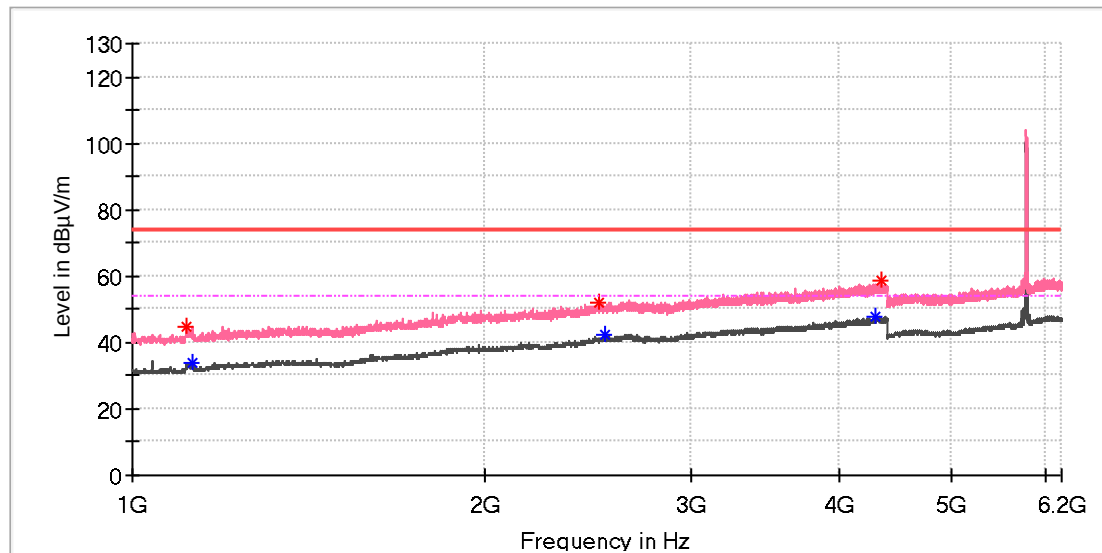

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1113.000000	44.60	---	74.00	29.40	150.0	V	270.0	0.7
1124.500000	---	33.85	54.00	20.15	150.0	V	270.0	0.9
2499.000000	52.25	---	74.00	21.75	150.0	V	82.0	9.0
2530.000000	---	42.13	54.00	11.87	150.0	V	53.0	9.3
4298.000000	---	47.60	54.00	6.40	150.0	V	158.0	13.7
4359.500000	58.35	---	74.00	15.65	150.0	V	93.0	13.9

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch157
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

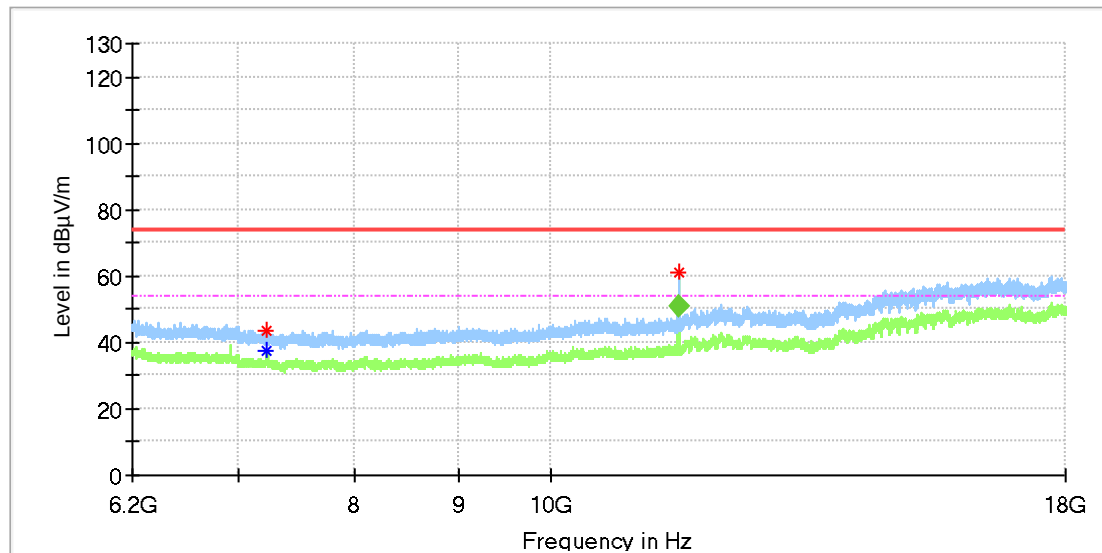

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7227.091667	43.44	---	74.00	30.56	150.0	H	263.0	8.7
7227.091667	---	37.53	54.00	16.47	150.0	H	263.0	8.7
11569.983333	61.19	---	74.00	12.81	150.0	H	57.0	13.4

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11569.820833	50.71	54.00	3.29	151.0	H	52.0	13.4

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch157
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

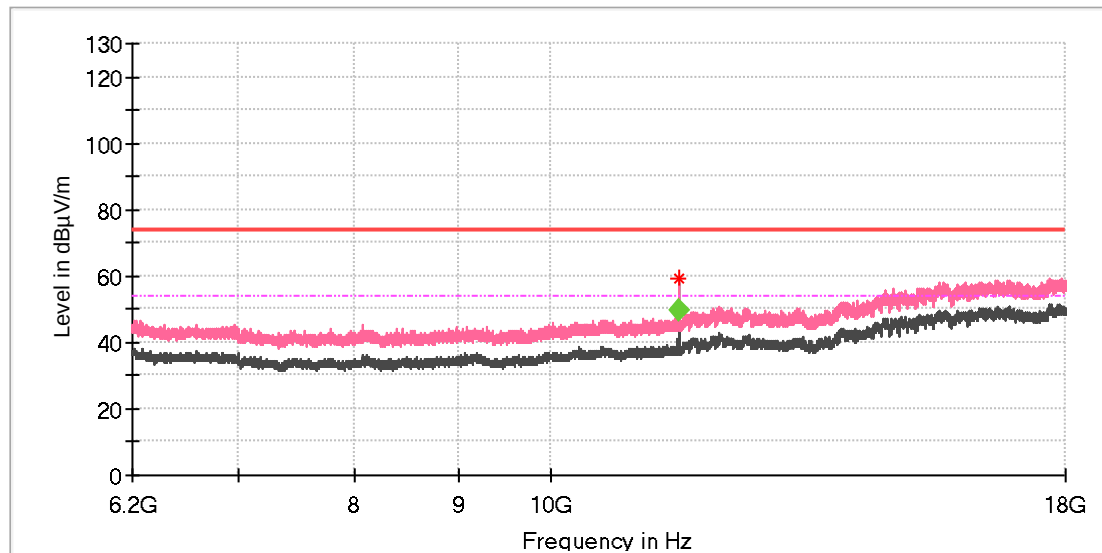

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11569.983333	58.97	---	74.00	15.03	150.0	V	331.0	13.4

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11569.955833	49.69	54.00	4.31	145.0	V	326.0	13.4

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11n20_Ch157
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

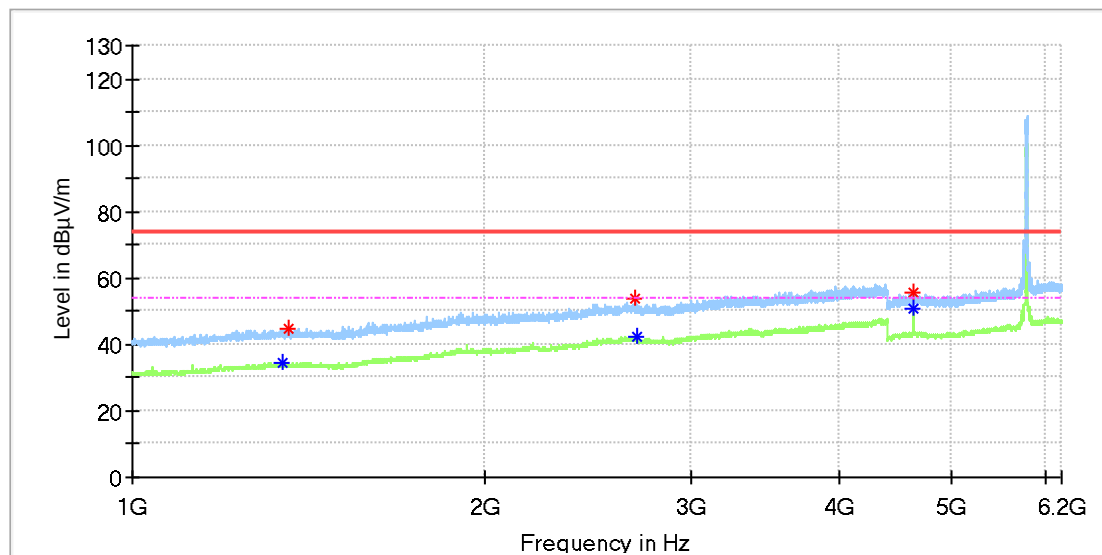

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1344.000000	---	34.41	54.00	19.59	150.0	H	198.0	3.1
1359.500000	44.57	---	74.00	29.43	150.0	H	87.0	3.1
2688.000000	53.82	---	74.00	20.18	150.0	H	343.0	10.1
2690.500000	---	42.55	54.00	11.45	150.0	H	139.0	10.0
4627.500000	55.69	---	74.00	18.31	150.0	H	355.0	13.5
4628.000000	---	50.83	54.00	3.17	150.0	H	355.0	13.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11n20_Ch157
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

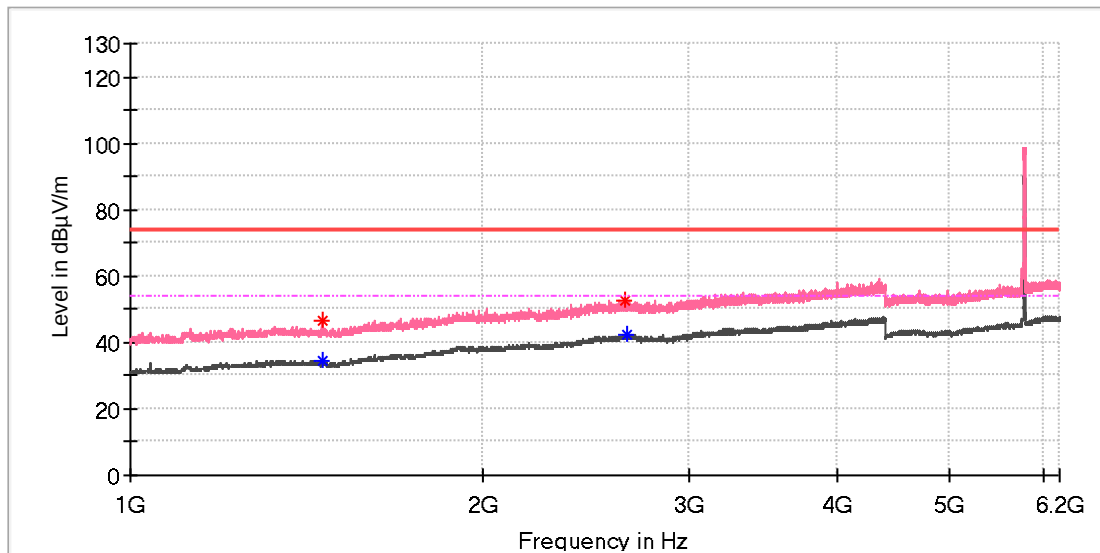

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1456.000000	46.58	---	74.00	27.42	150.0	V	359.0	2.7
1456.500000	---	34.27	54.00	19.73	150.0	V	190.0	2.7
2642.500000	52.86	---	74.00	21.14	150.0	V	334.0	10.1
2653.000000	---	42.28	54.00	11.72	150.0	V	357.0	10.2

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11n20_Ch157
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

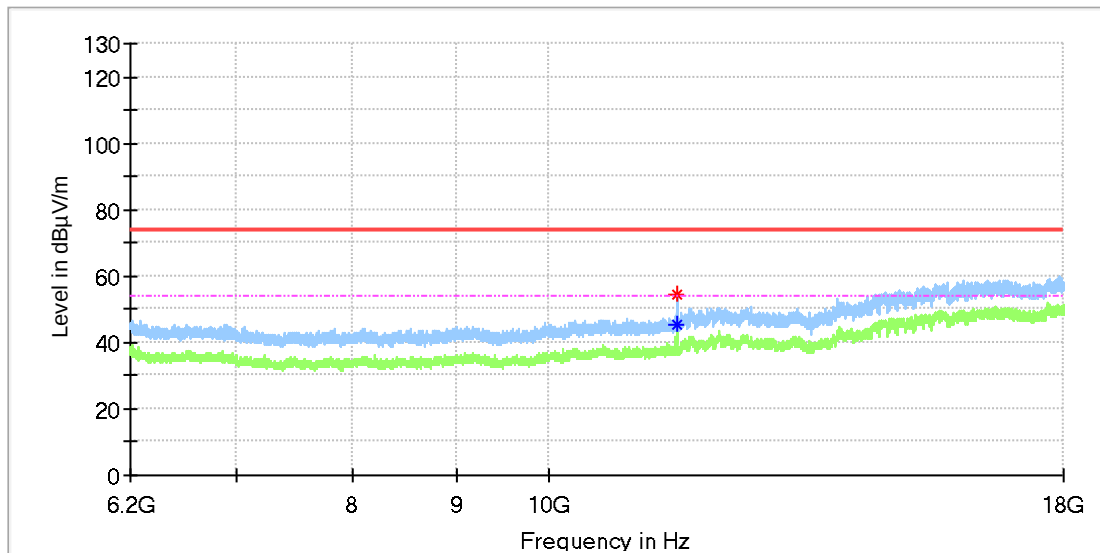

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11569.983333	54.22	---	74.00	19.78	150.0	H	274.0	13.4
11569.983333	---	45.48	54.00	8.52	150.0	H	274.0	13.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11n20_Ch157
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

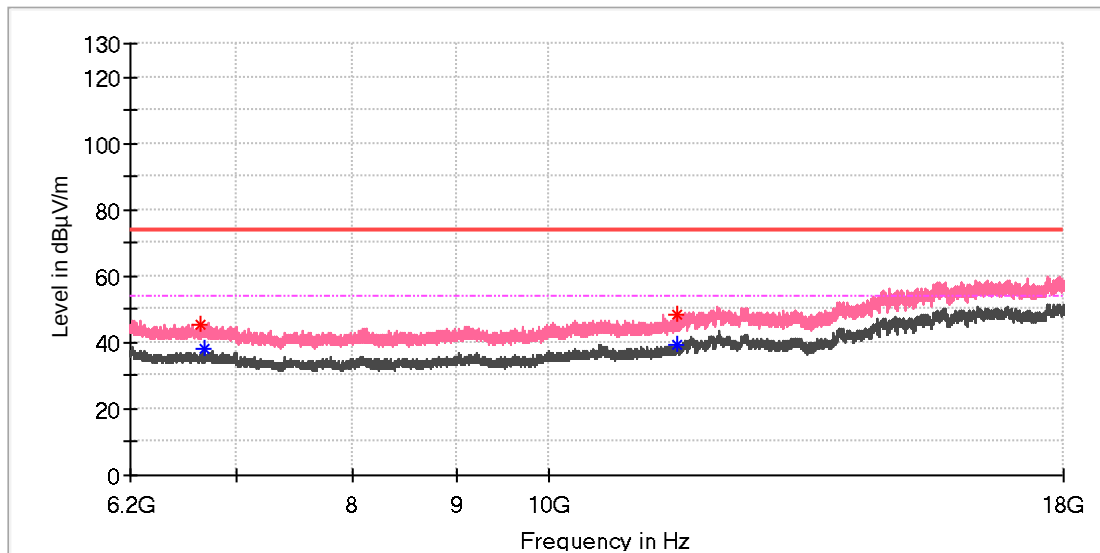

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6724.116667	45.64	---	74.00	28.36	150.0	V	40.0	8.6
6740.833333	---	38.28	54.00	15.72	150.0	V	241.0	8.6
11568.508333	48.49	---	74.00	25.51	150.0	V	339.0	13.4
11568.508333	---	39.51	54.00	14.49	150.0	V	339.0	13.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.8: Test Results of Radiated Emissions in Restricted Bands


Note:

1) This testing was carried out on different modulations, but only the worst case was presented in this report.

U-NII-1 Band

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch36
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

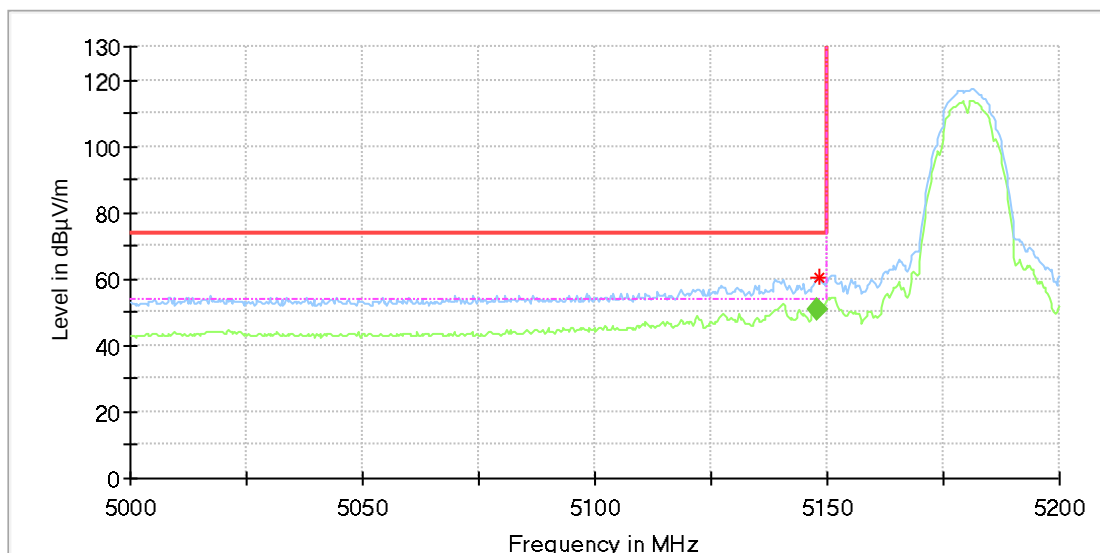

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5148.316667	60.64	---	74.00	13.36	150.0	H	354.0	13.9

Final Result

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5147.927778	50.60	54.00	3.40	148.0	H	349.0	13.9

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch36
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

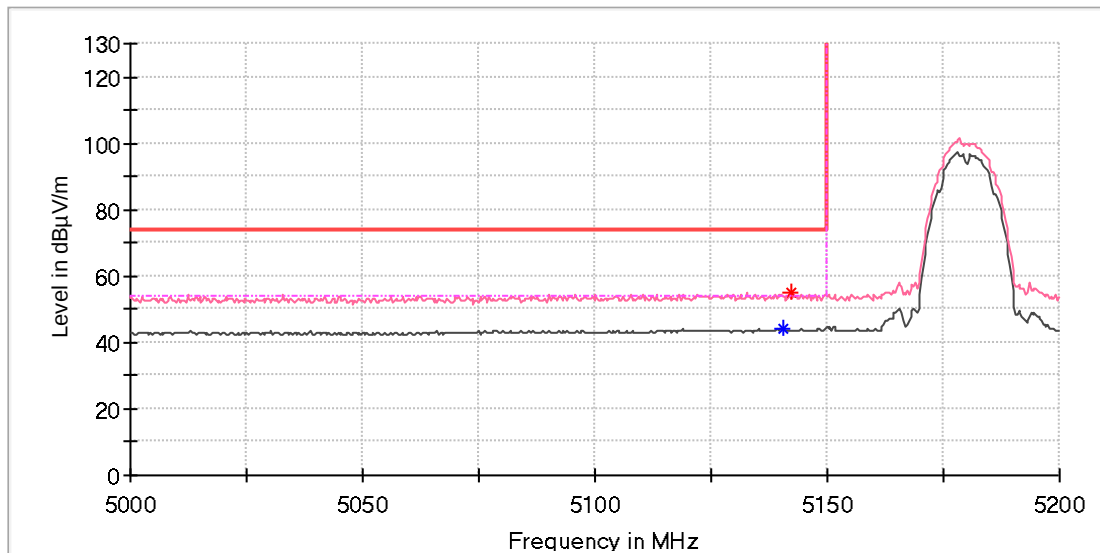

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5140.450000	---	44.35	54.00	9.65	150.0	V	242.0	13.9
5142.088889	54.82	---	74.00	19.18	150.0	V	88.0	13.9

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11ac80_Ch42
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

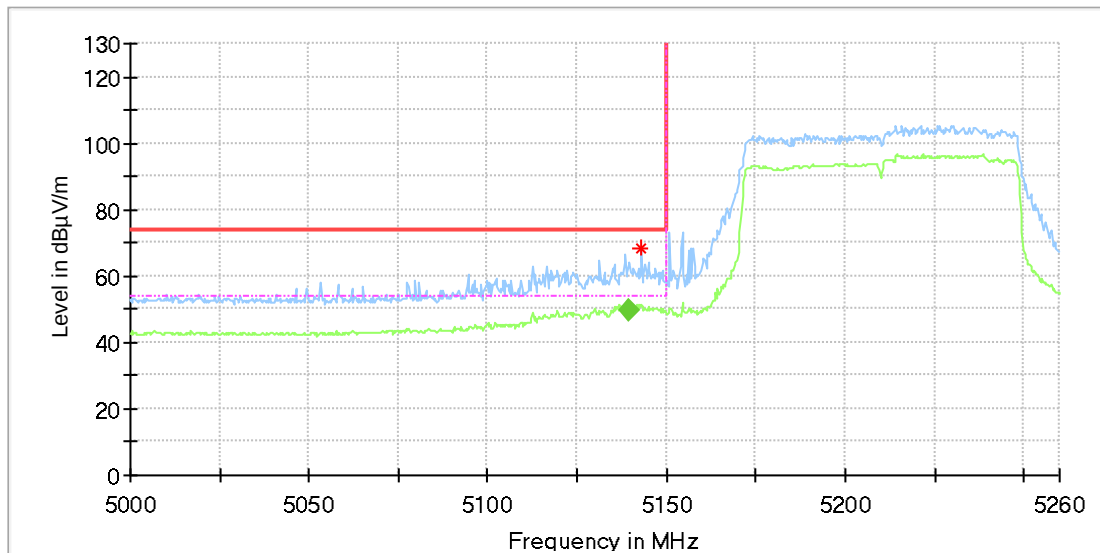

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5143.072222	68.40	---	74.00	5.60	150.0	H	342.0	13.9

Final_Result

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5139.794445	49.79	54.00	4.21	150.0	H	340.0	13.9

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11ac80_Ch42
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

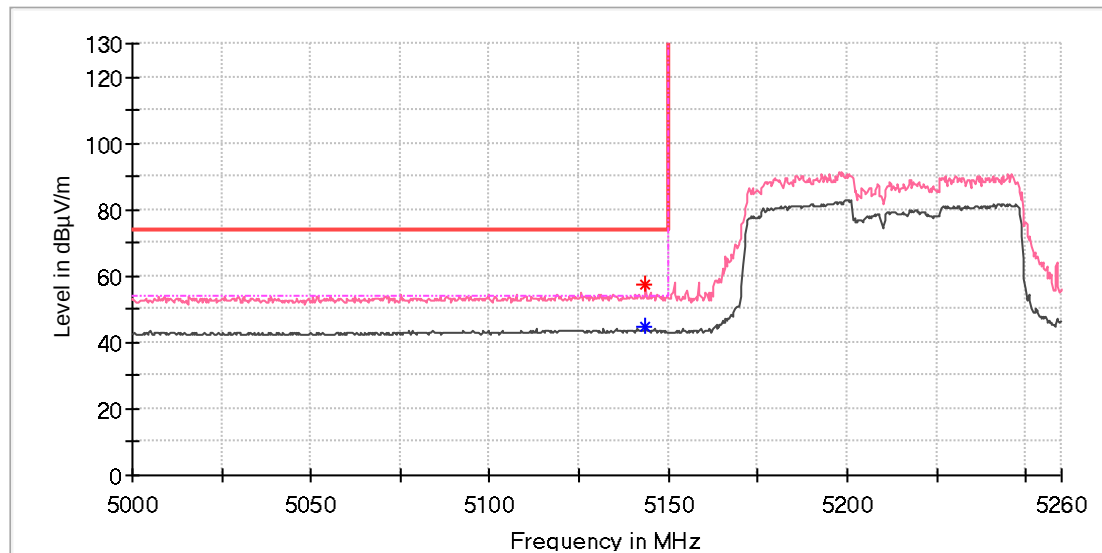

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5143.727778	---	44.89	54.00	9.11	150.0	V	20.0	13.9
5143.727778	57.55	---	74.00	16.45	150.0	V	20.0	13.9

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11n20_Ch36
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

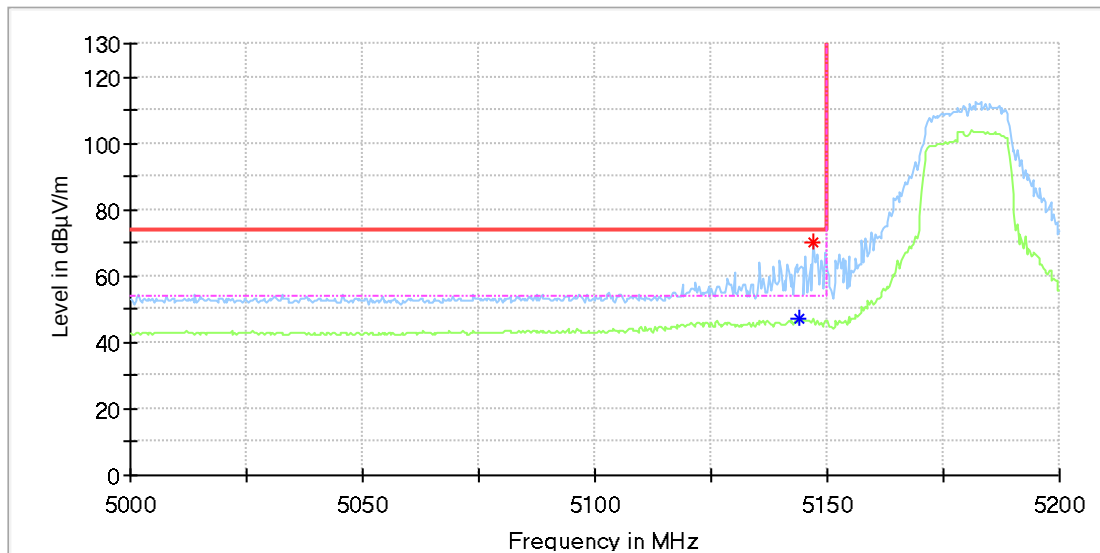

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5144.055556	---	47.03	54.00	6.97	150.0	H	352.0	13.9
5147.005556	69.84	---	74.00	4.16	150.0	H	332.0	13.9

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11n20_Ch36
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

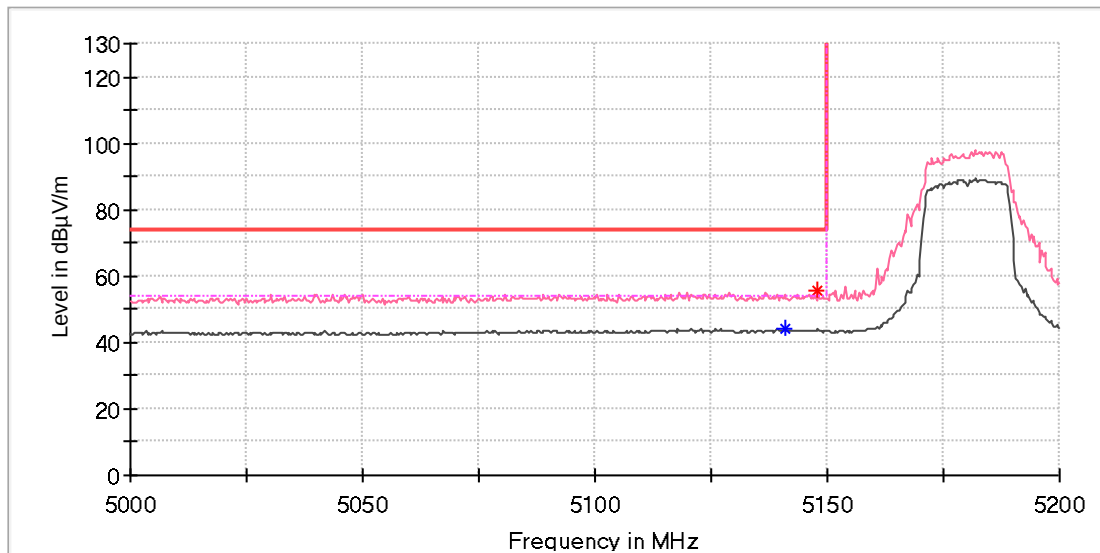

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5140.777778	---	44.21	54.00	9.79	150.0	V	293.0	13.9
5147.988889	55.79	---	74.00	18.21	150.0	V	39.0	13.9

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11n40_Ch38
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

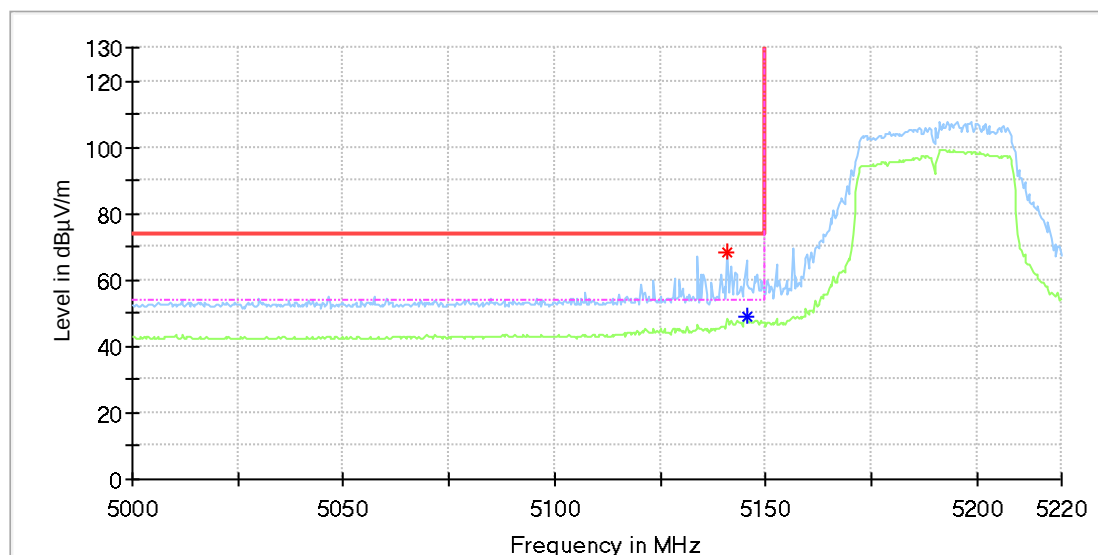

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5145.366667	---	48.78	54.00	5.22	150.0	H	343.0	13.9
5140.777778	68.62	---	74.00	5.38	150.0	H	356.0	13.9

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11n40_Ch38
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

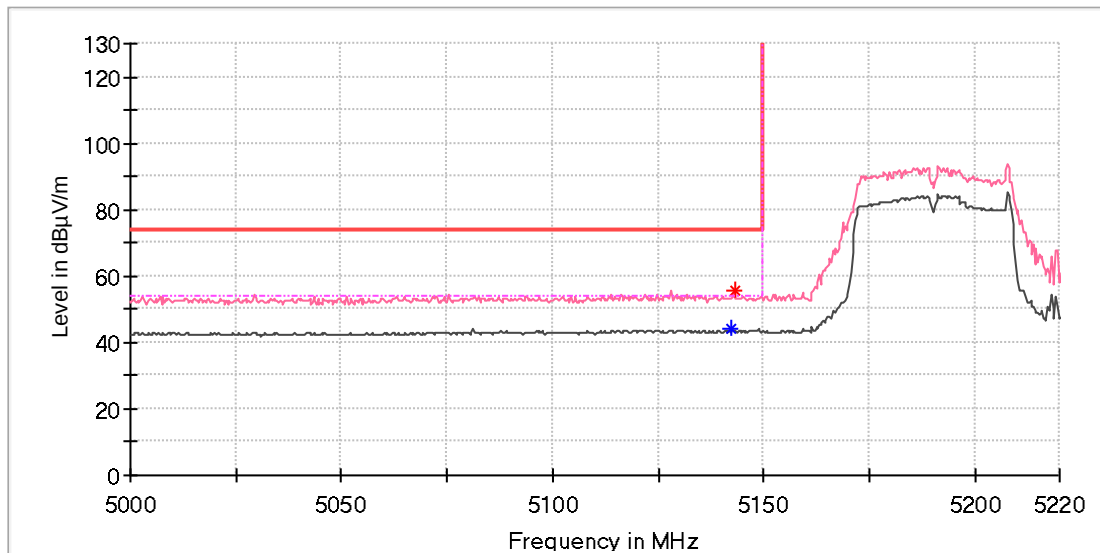

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5142.416667	---	43.98	54.00	10.02	150.0	V	0.0	13.9
5143.072222	55.43	---	74.00	18.57	150.0	V	274.0	13.9


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

U-NII-2A Band

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch64
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

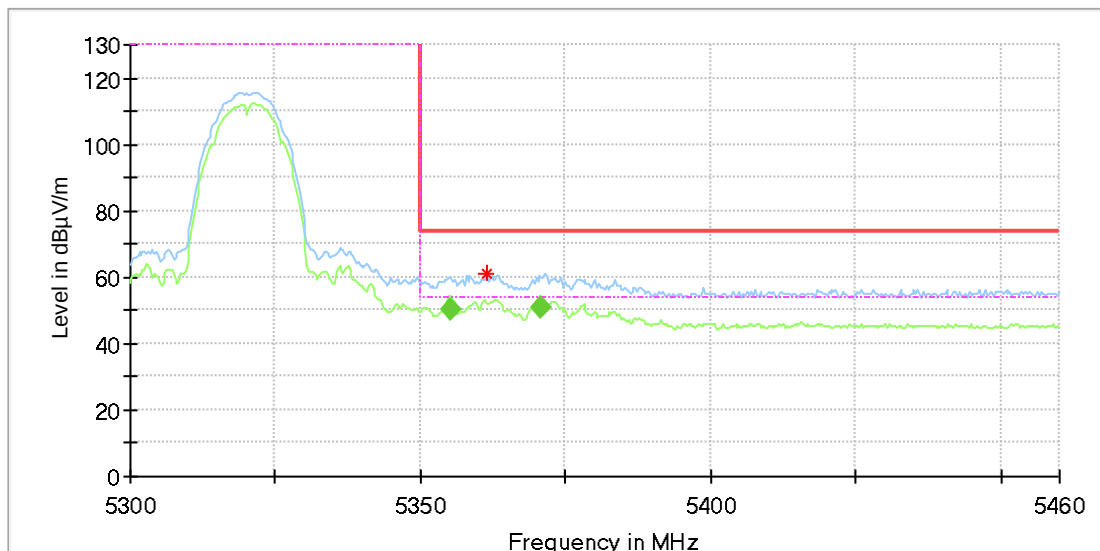

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5361.361111	61.07	---	74.00	12.93	150.0	H	338.0	14.8

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5355.030555	50.48	54.00	3.52	148.0	H	336.0	14.8
5370.783333	50.72	54.00	3.28	148.0	H	351.0	14.8

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch64
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

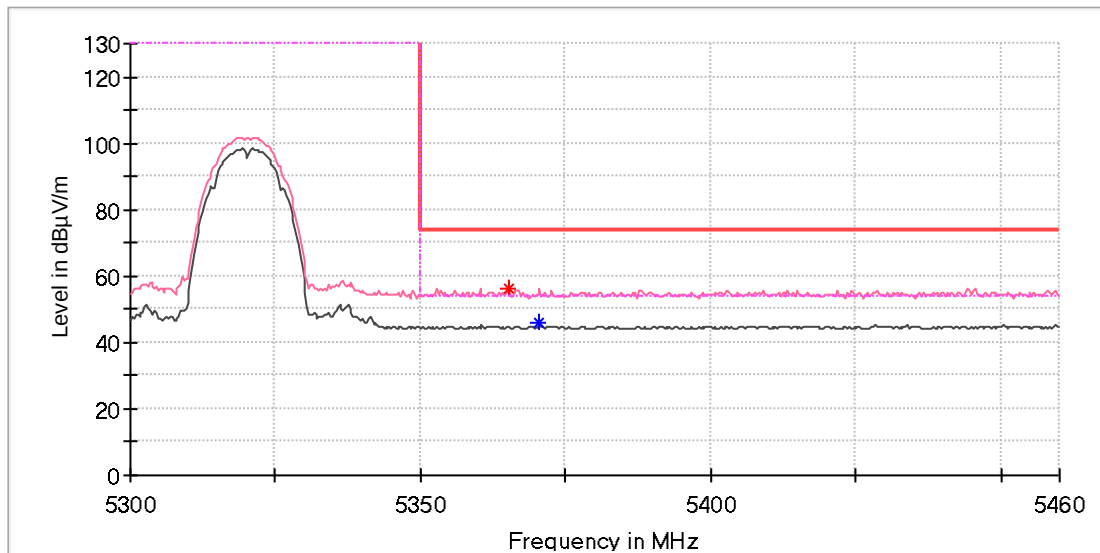

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5365.188889	56.33	---	74.00	17.67	150.0	V	64.0	14.8
5370.488889	---	46.07	54.00	7.93	150.0	V	272.0	14.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11ac80_Ch58
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

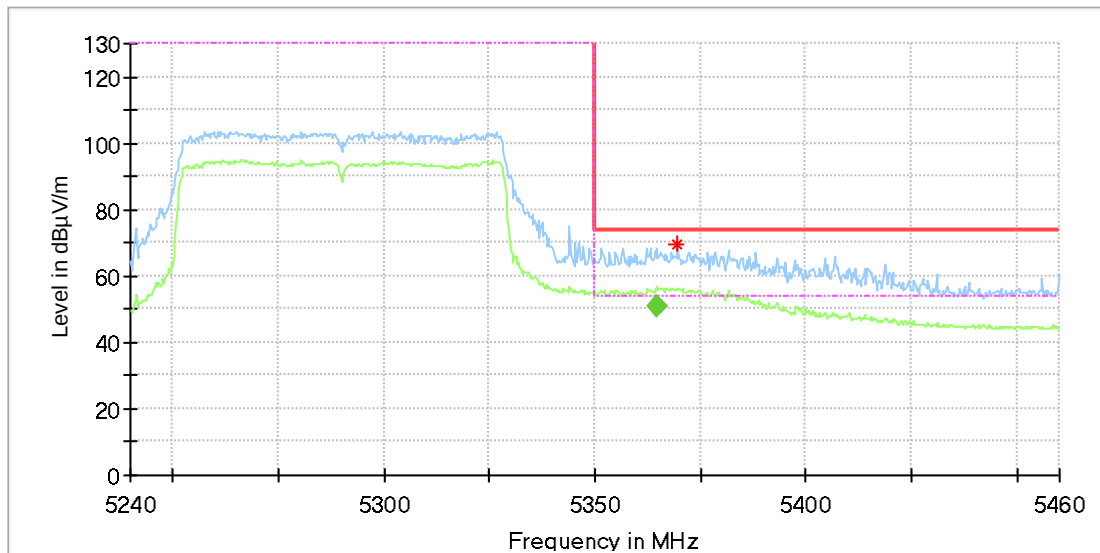

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5369.605556	69.34	---	74.00	4.66	150.0	H	0.0	14.8

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5364.600000	50.77	54.00	3.23	145.0	H	350.0	14.8

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11ac80_Ch58
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

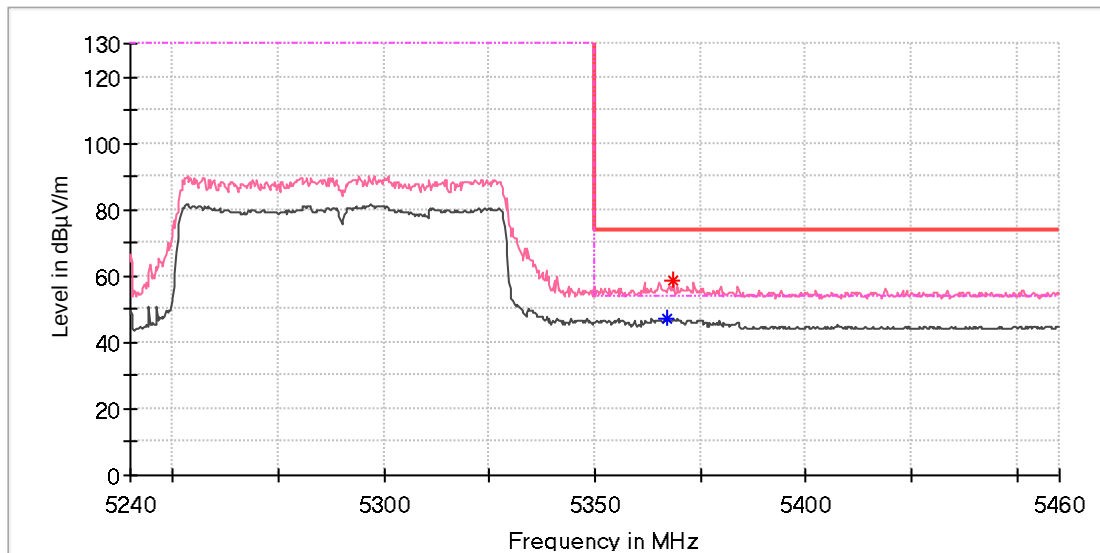

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5367.250000	---	47.22	54.00	6.78	150.0	V	6.0	14.8
5368.722222	58.36	---	74.00	15.64	150.0	V	6.0	14.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11n20_Ch64
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

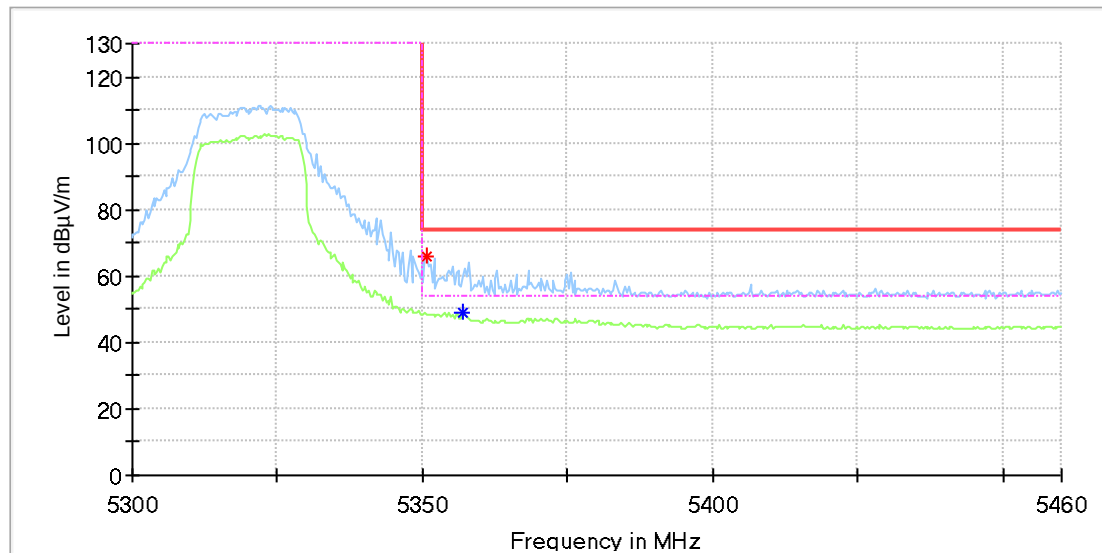

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5350.761111	65.98	---	74.00	8.02	150.0	H	0.0	14.8
5356.944445	---	49.10	54.00	4.90	150.0	H	328.0	14.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11n20_Ch64
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

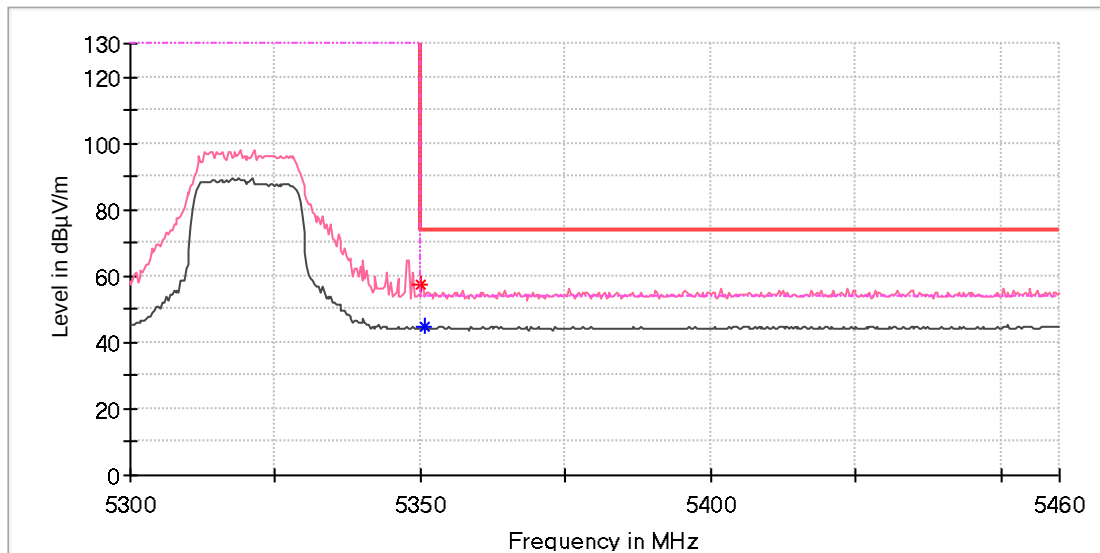

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5350.172222	57.34	---	74.00	16.66	150.0	V	278.0	14.8
5350.761111	---	44.74	54.00	9.26	150.0	V	0.0	14.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11n40_Ch62
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

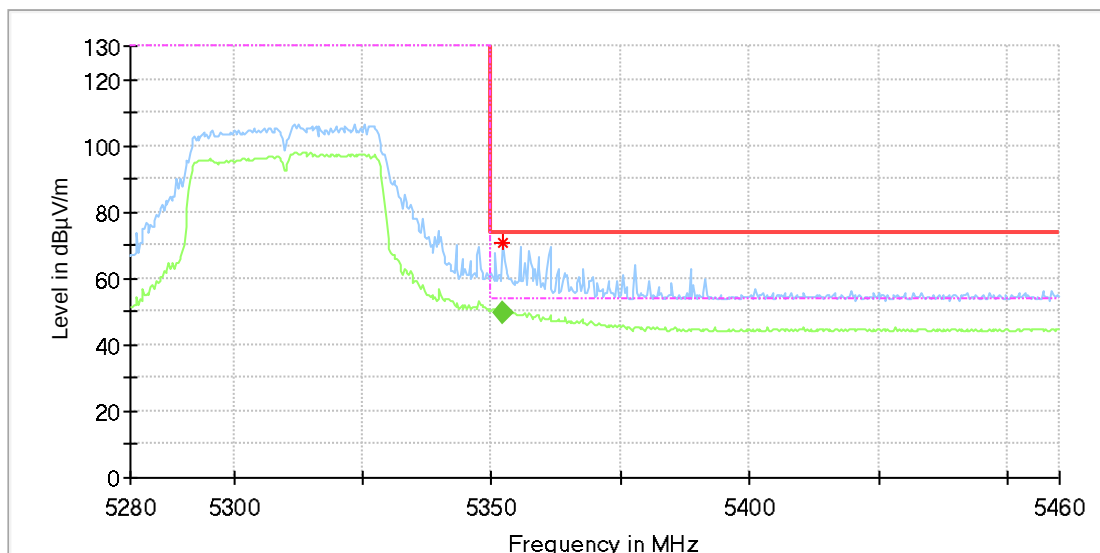

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5352.233333	70.98	---	74.00	3.02	150.0	H	344.0	14.8

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5352.233333	49.51	54.00	4.49	145.0	H	339.0	14.8

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11n40_Ch62
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

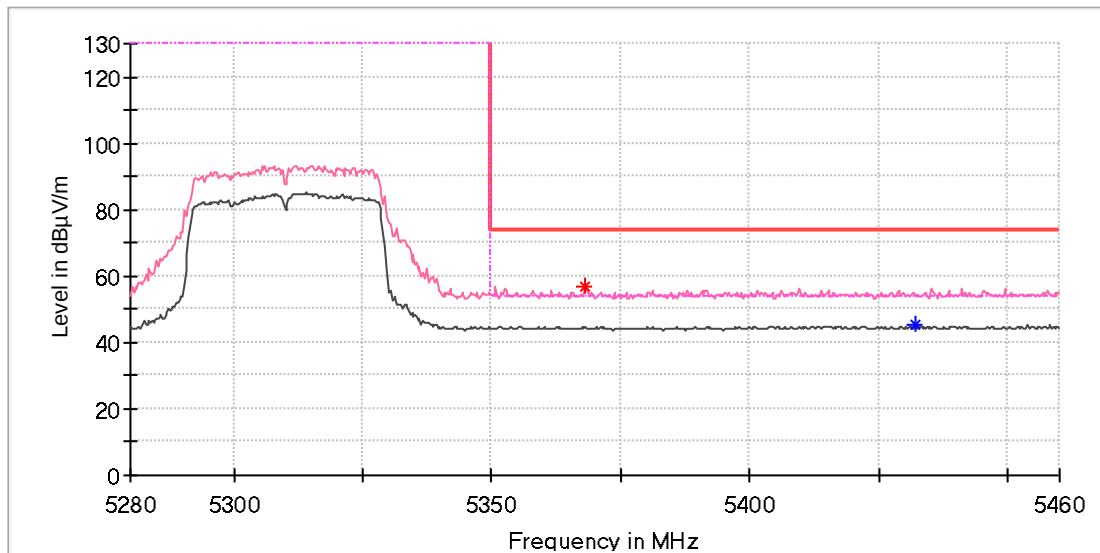

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5368.133333	56.91	---	74.00	17.09	150.0	V	22.0	14.8
5432.027778	---	45.15	54.00	8.85	150.0	V	136.0	15.0


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

U-NII-2C Band

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch100
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

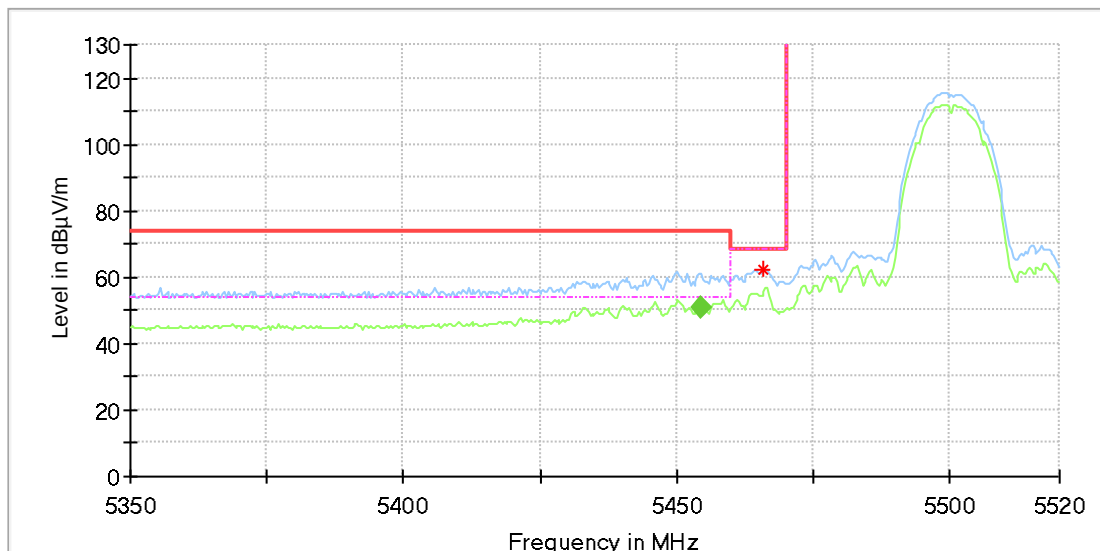

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5465.933333	62.47	---	68.20	5.73	150.0	H	312.0	15.1

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5454.461111	50.60	54.00	3.40	148.0	H	339.0	15.0

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch100
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

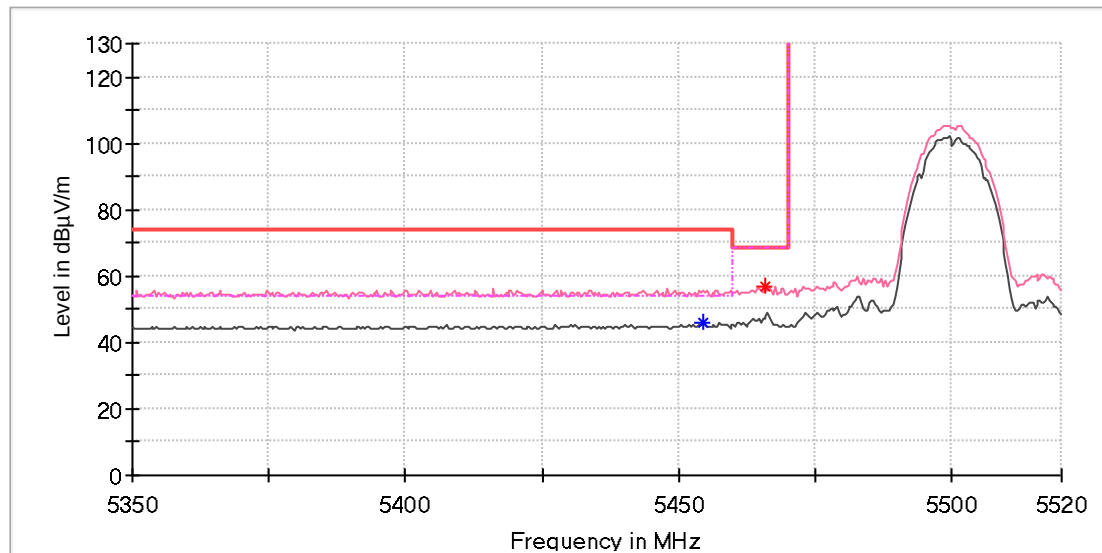

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5454.461111	---	46.03	54.00	7.97	150.0	V	13.0	15.0
5465.605556	56.63	---	68.20	11.57	150.0	V	8.0	15.1

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch140
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

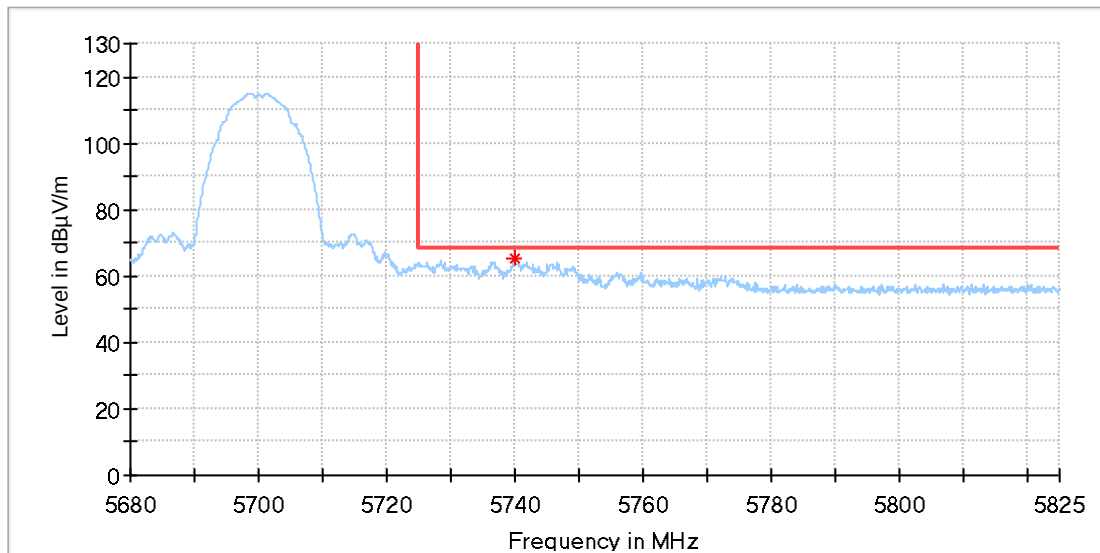

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5739.900000	65.14	68.20	3.06	150.0	H	327.0	15.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch140
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

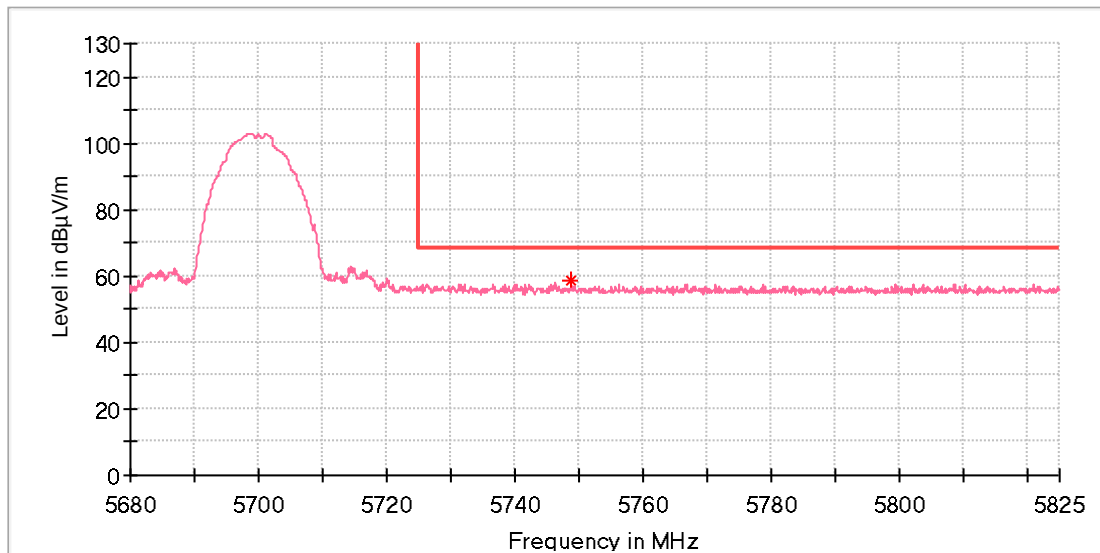

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5748.716667	58.50	68.20	9.70	150.0	V	167.0	15.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11ac80_Ch106
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

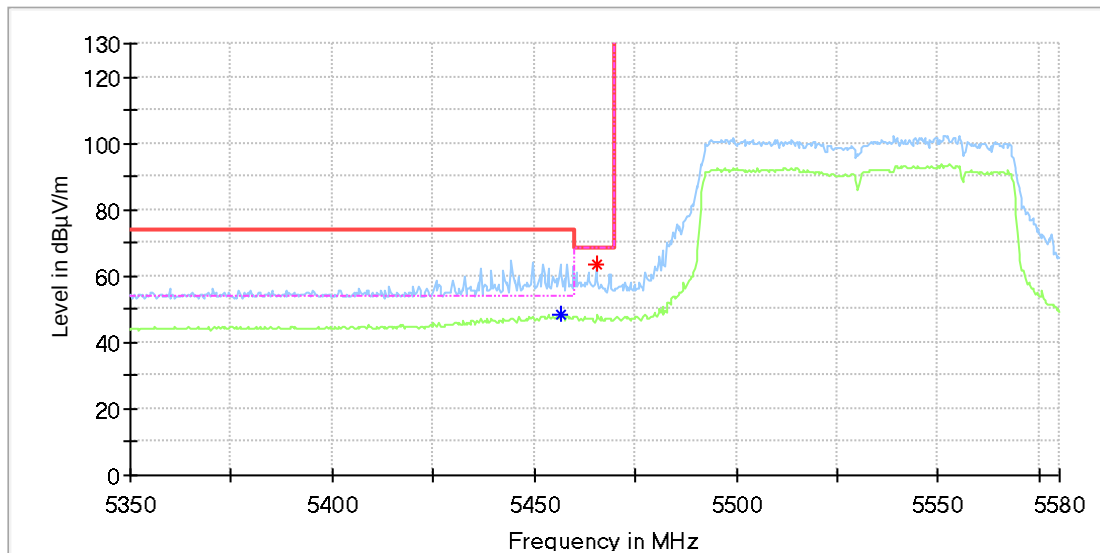

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5456.755556	---	48.31	54.00	5.69	150.0	H	0.0	15.1
5465.277778	63.71	---	68.20	4.49	150.0	H	320.0	15.1

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11ac80_Ch106
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

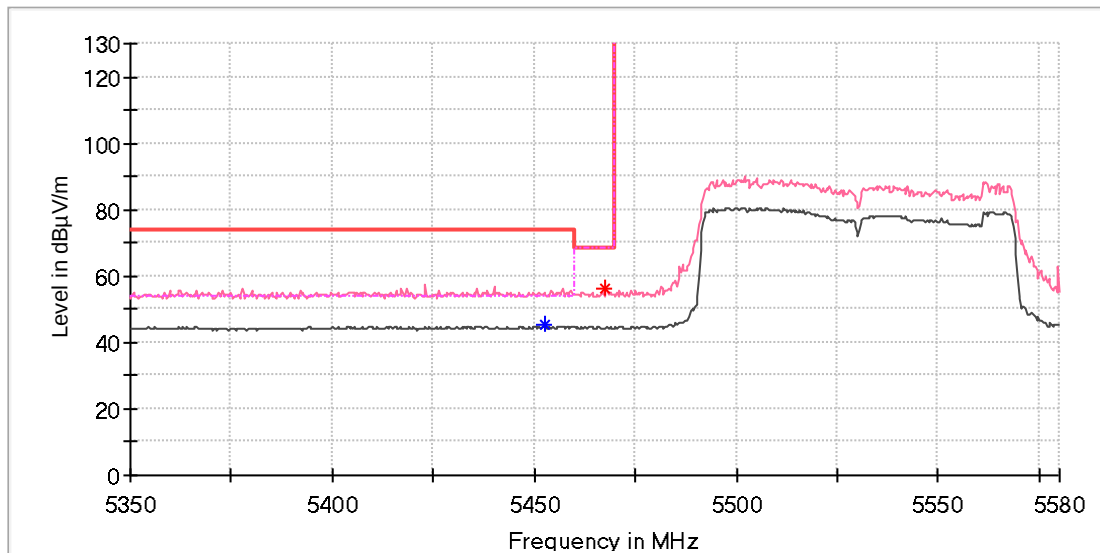

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5452.822222	---	45.06	54.00	8.94	150.0	V	107.0	15.0
5467.572222	56.51	---	68.20	11.69	150.0	V	180.0	15.1

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11ac80_Ch122
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

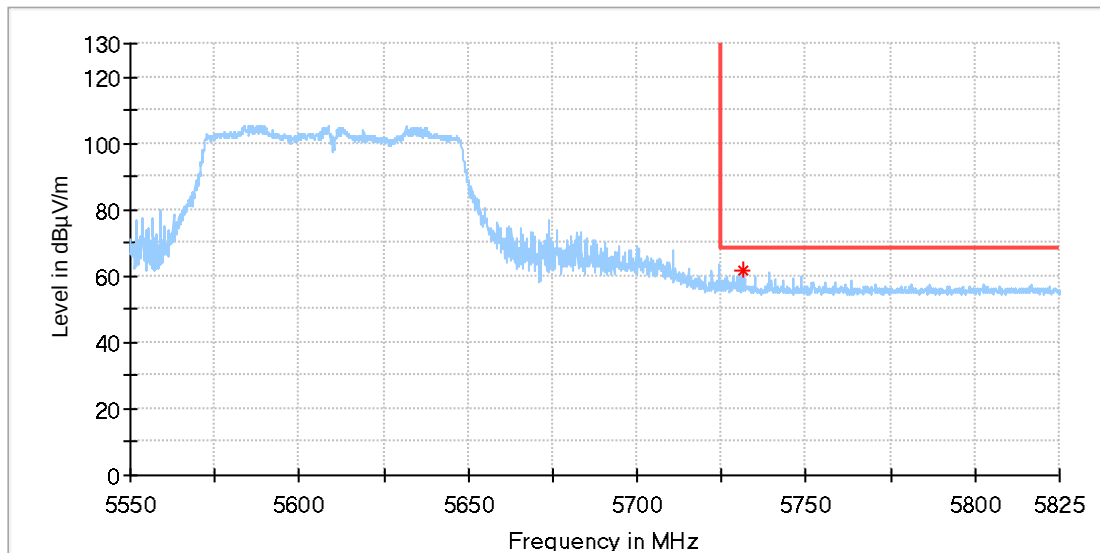

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5731.466667	61.59	68.20	6.61	150.0	H	337.0	15.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11ac80_Ch122
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

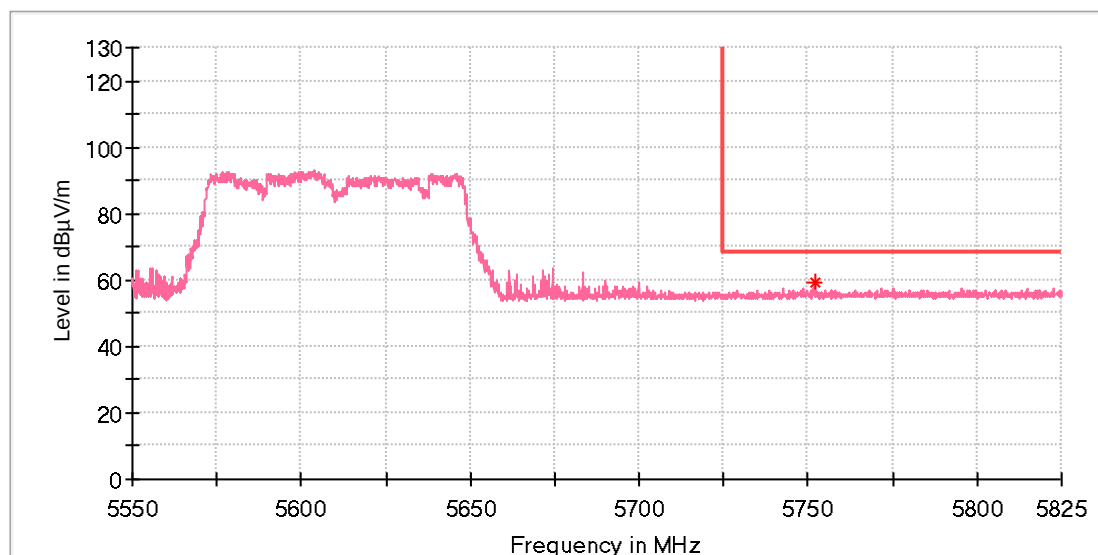

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5751.879167	59.02	68.20	9.18	150.0	V	300.0	15.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11n20_Ch100
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

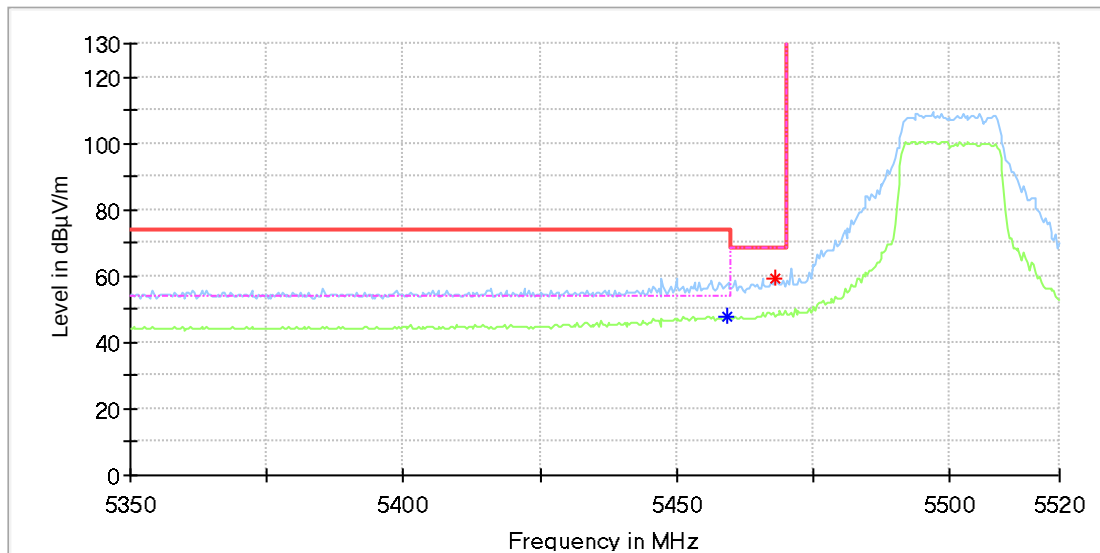

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5459.050000	---	47.82	54.00	6.18	150.0	H	314.0	15.1
5467.900000	59.44	---	68.20	8.76	150.0	H	319.0	15.1

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11n20_Ch100
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

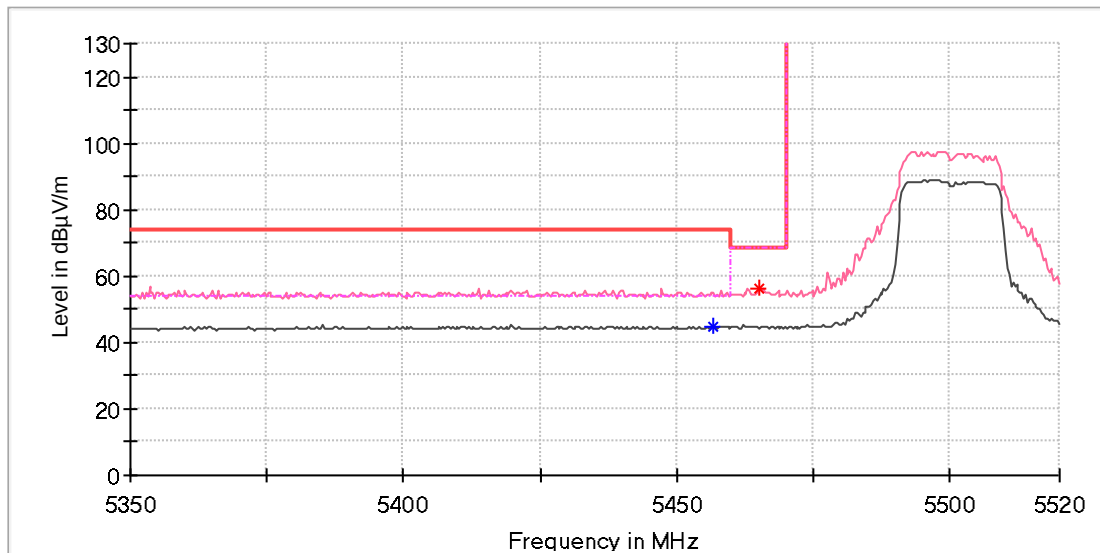

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5456.755556	---	44.75	54.00	9.25	150.0	V	322.0	15.1
5464.950000	56.18	---	68.20	12.02	150.0	V	139.0	15.1

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11n20_Ch140
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

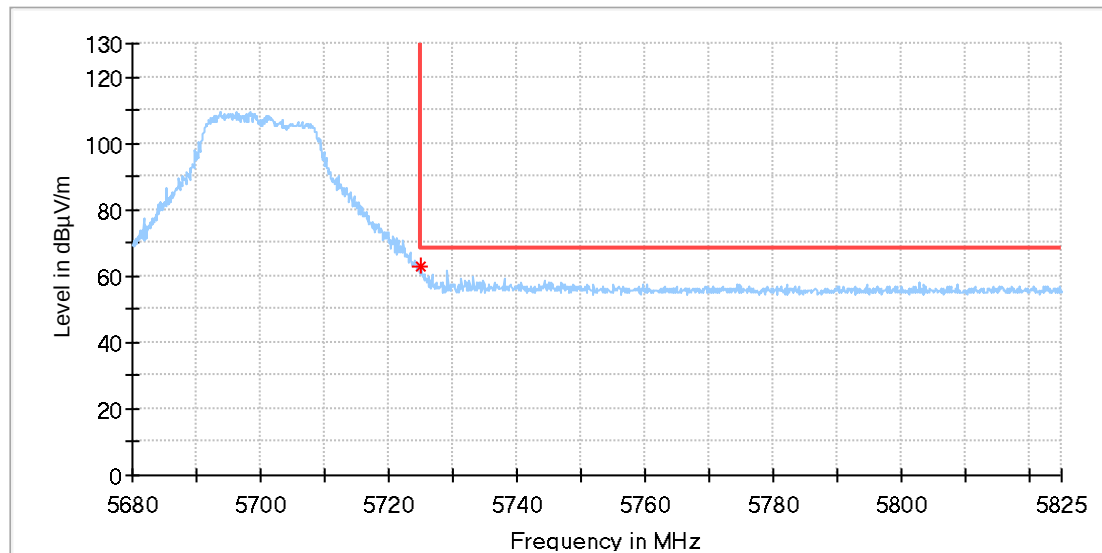

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5725.141667	62.74	68.20	5.46	150.0	H	319.0	15.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11n20_Ch140
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

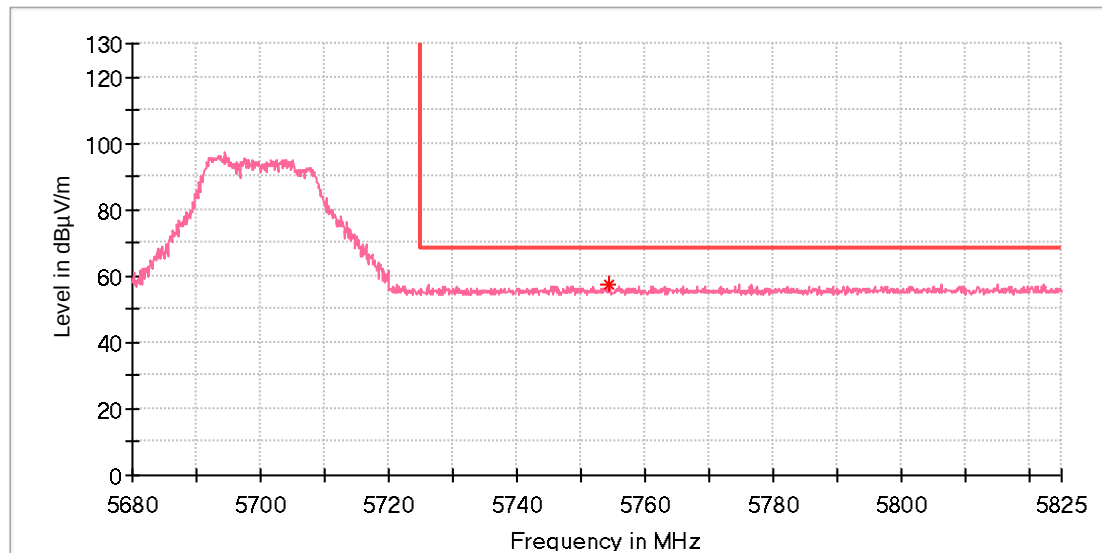

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5754.46667	57.51	68.20	10.69	150.0	V	26.0	15.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11n40_Ch102
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

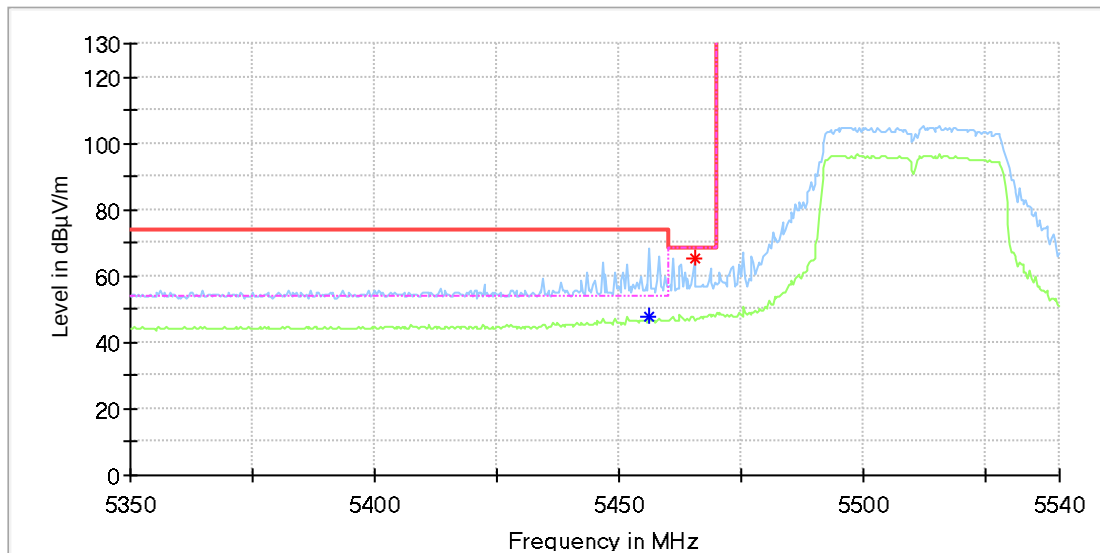

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5456.100000	---	47.90	54.00	6.10	150.0	H	347.0	15.1
5465.277778	65.13	---	68.20	3.07	150.0	H	322.0	15.1

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11n40_Ch102
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

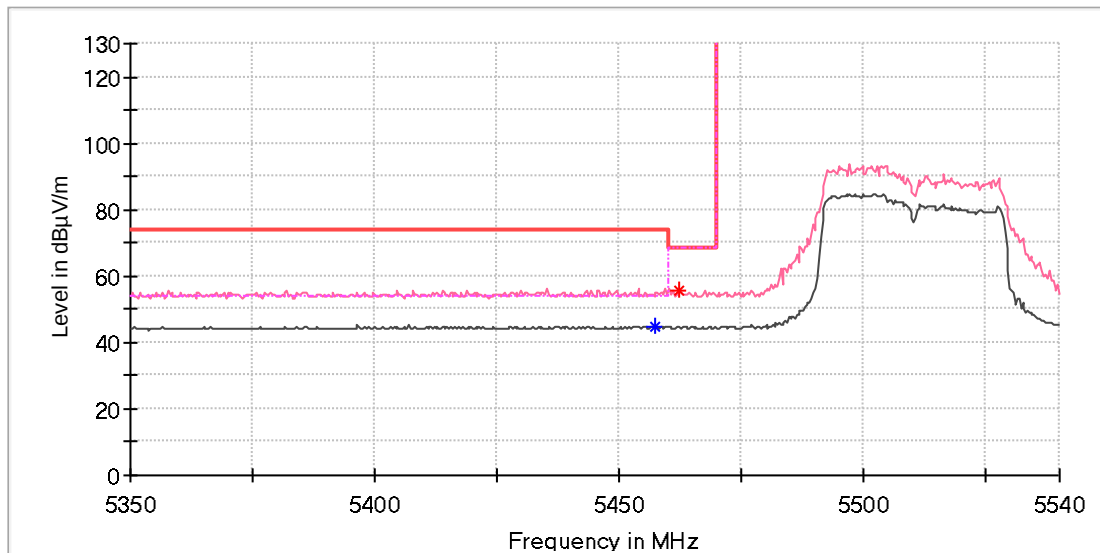

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5457.083333	---	44.86	54.00	9.14	150.0	V	302.0	15.1
5462.000000	55.78	---	68.20	12.42	150.0	V	329.0	15.1

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11n40_Ch134
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

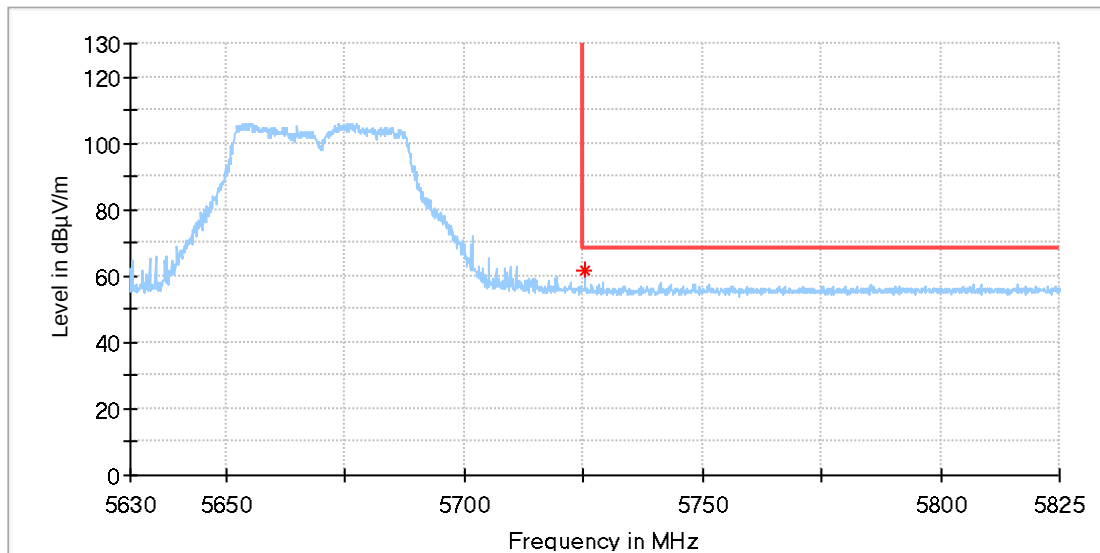

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5725.333333	61.74	68.20	6.46	150.0	H	307.0	15.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11n40_Ch134
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

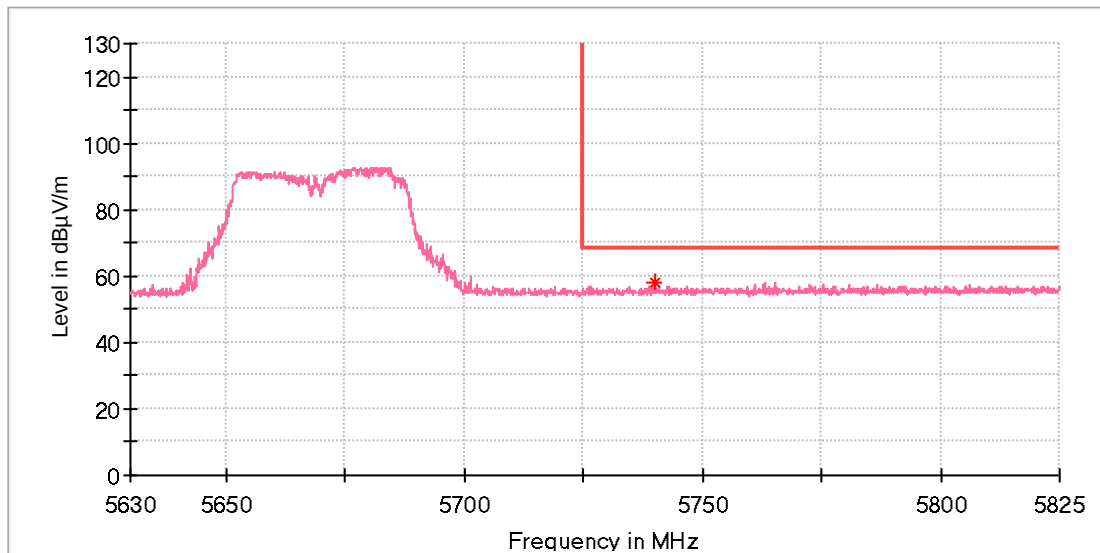

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5740.187500	57.92	68.20	10.28	150.0	V	221.0	15.4


Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

U-NII-3 Band

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch149
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

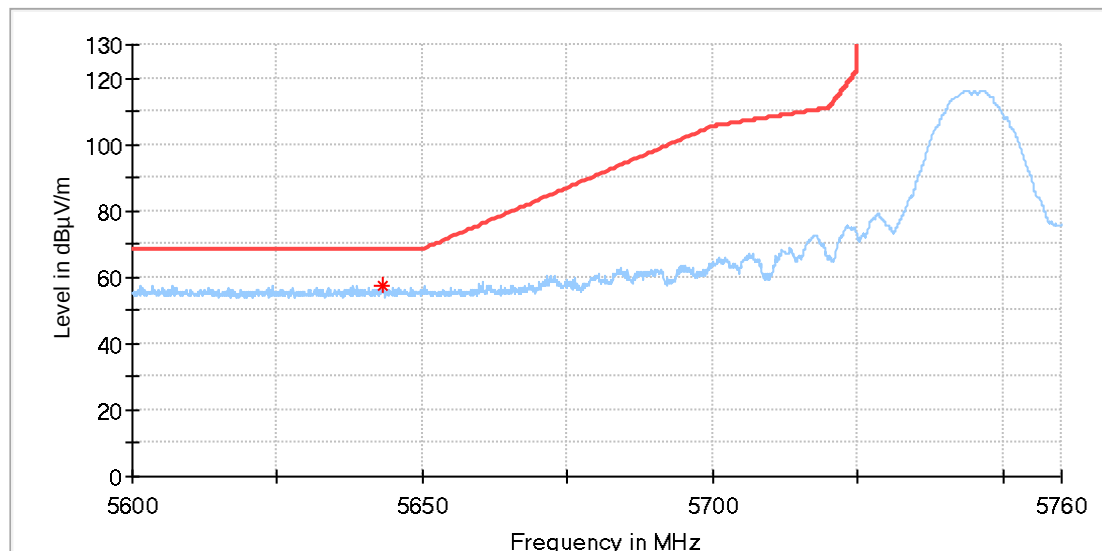

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5643.266667	57.63	68.20	10.57	150.0	H	299.0	15.3

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch149
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

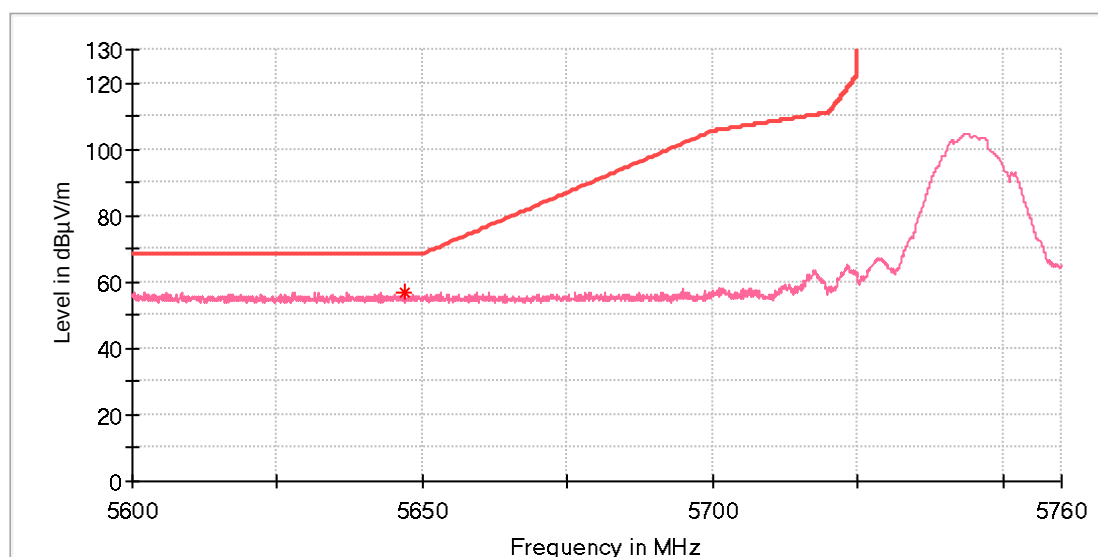

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5646.872222	57.05	68.20	11.15	150.0	V	107.0	15.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch165
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

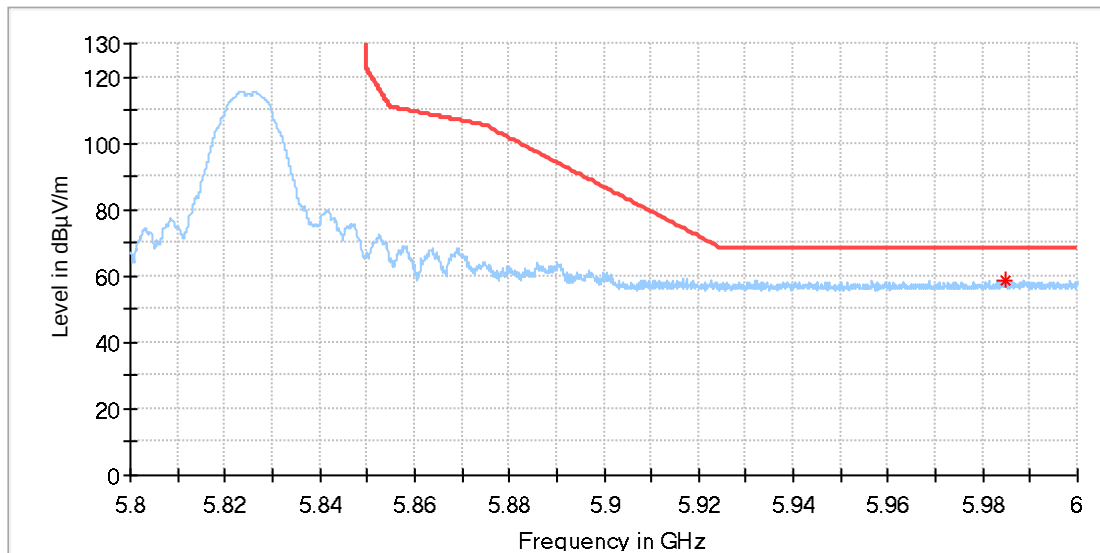

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5984.798611	58.92	68.20	9.28	150.0	H	261.0	16.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11a_Ch165
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

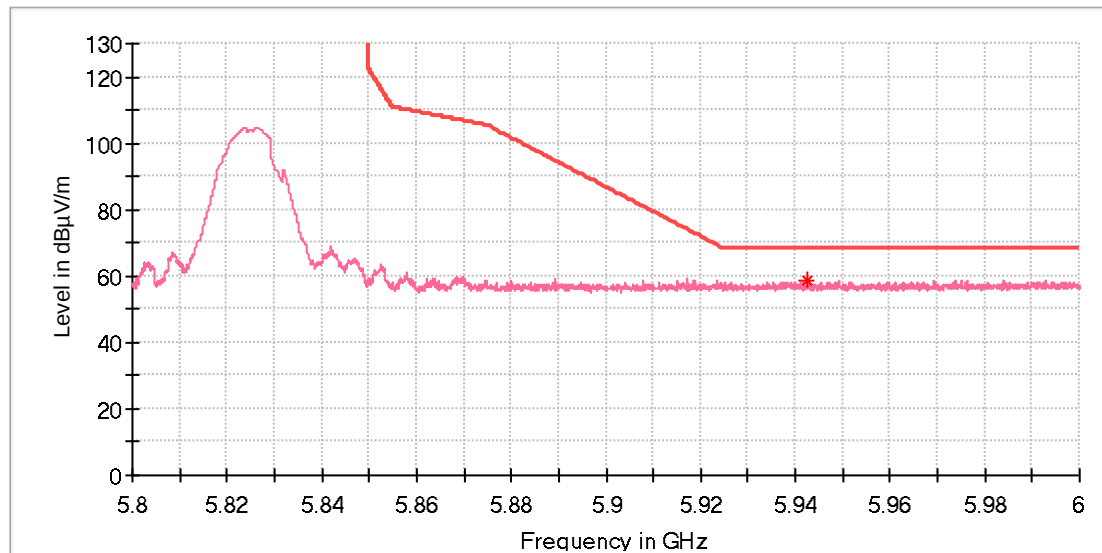

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5942.402778	58.89	68.20	9.31	150.0	V	105.0	16.2

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11ac80_Ch155
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

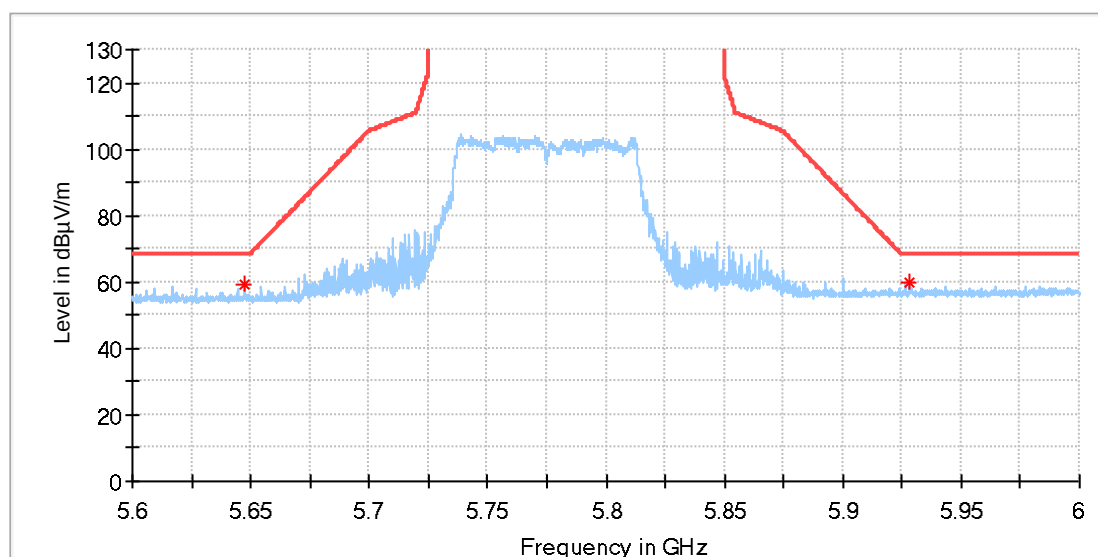

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5647.222222	59.28	68.20	8.92	150.0	H	334.0	15.3
5928.111111	59.76	68.20	8.44	150.0	H	327.0	16.2

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	POS Terminal
Model:	C20DS
Test Mode:	WIFI 5G_11ac80_Ch155
Order No/Sample No:	168531160/A003911736-002
Test Voltage:	Adaptor
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

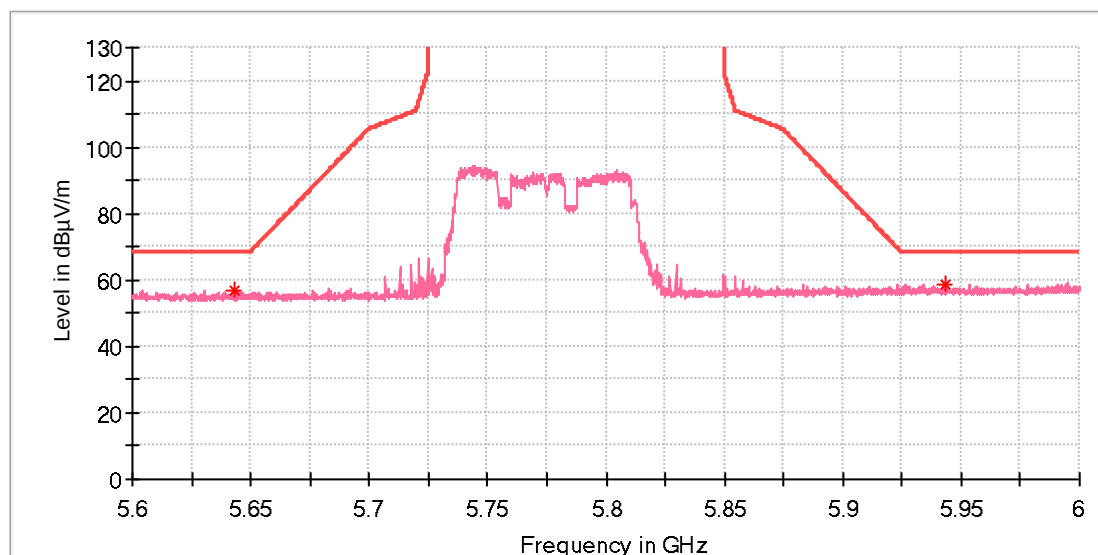

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5643.444445	56.87	68.20	11.33	150.0	V	293.0	15.3
5943.333333	58.72	68.20	9.48	150.0	V	238.0	16.2

Final_Result


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.9: Test Results of Dynamic Frequency Selection (DFS)


DFS Detection Thresholds

TestMode	Frequency[dbm]	Radar Type	Result	Limit[dbm]	Verdict
11N20SISO	5260	Type0	-62.46	-62.00	PASS
	5500	Type0	-62.15	-62.00	PASS
11AC80SISO	5290	Type0	-57.03	-56.70	PASS
	5530	Type0	-57.19	-56.70	PASS


11N20SISO_5260_Type0

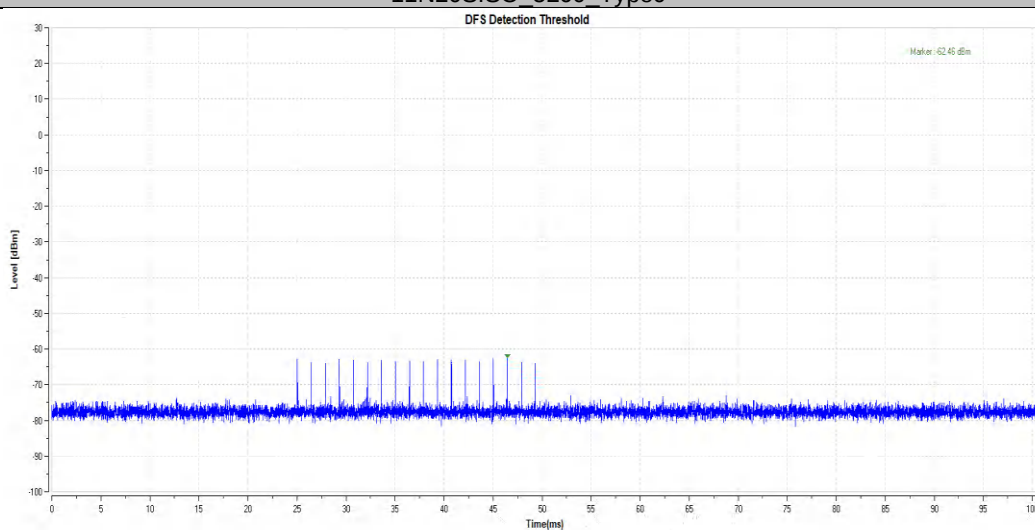


11N20SISO_5500_Type0

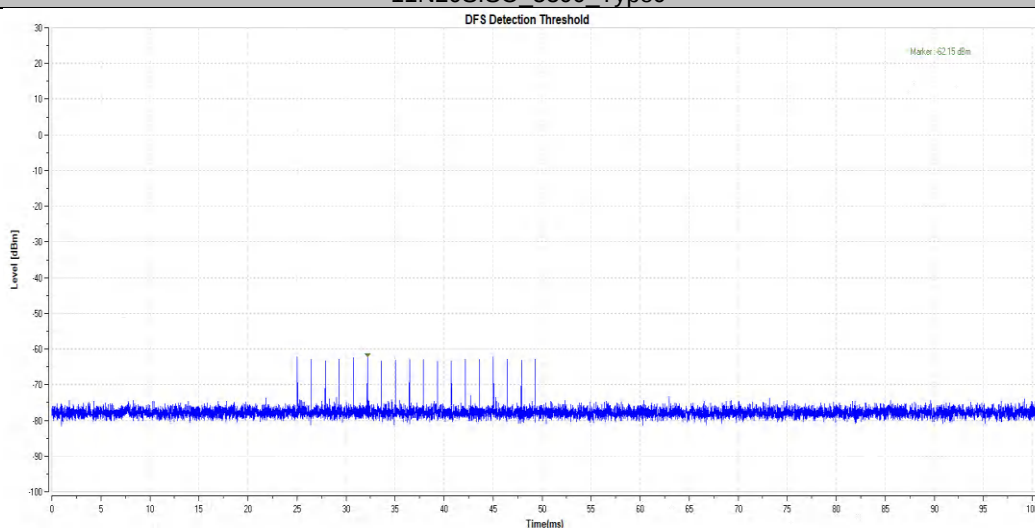

11AC80SISO_5290_Type0

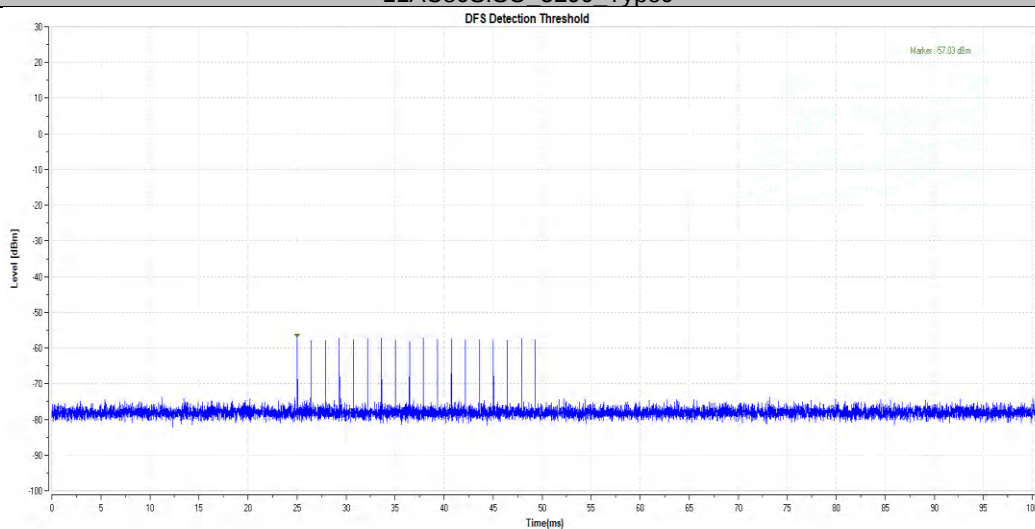


11AC80SISO_5530_Type0

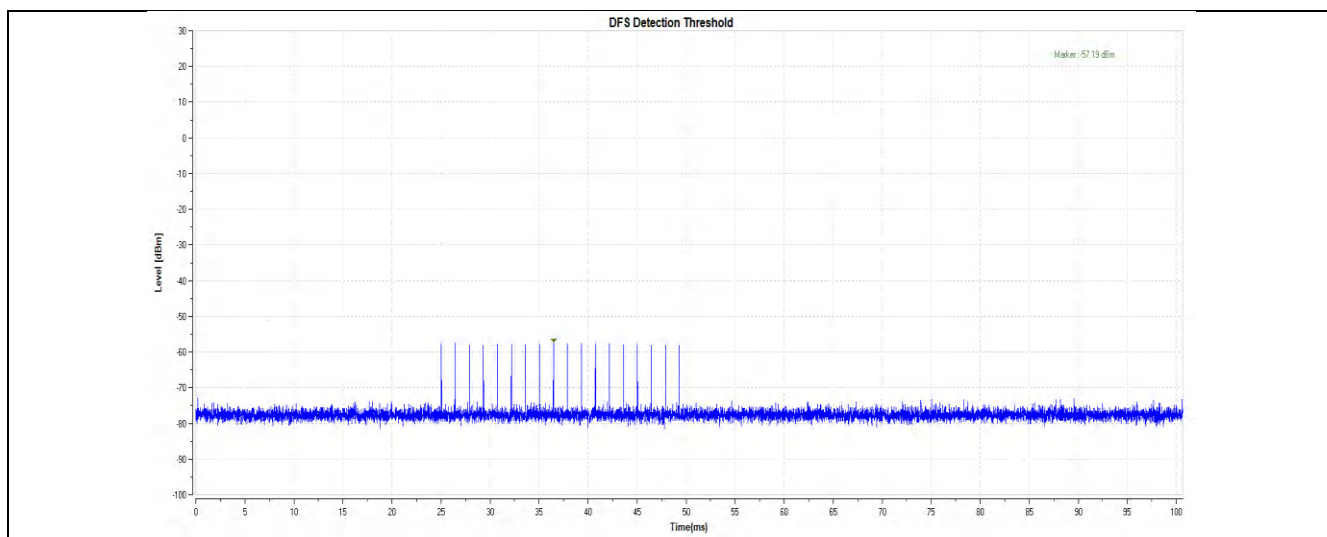


Channel Move Time and Channel Closing Transmission Time

TestMode	Frequency[MHz]	CCTT[ms]	Limit[ms]	CMT[ms]	Limit[ms]	Verdict
11N20SISO	5260	200+0	200+60	0	10000	PASS
	5500	200+0	200+60	0	10000	PASS
11AC80SISO	5290	200+0	200+60	0	10000	PASS
	5530	200+0	200+60	0	10000	PASS


11N20SISO_5260

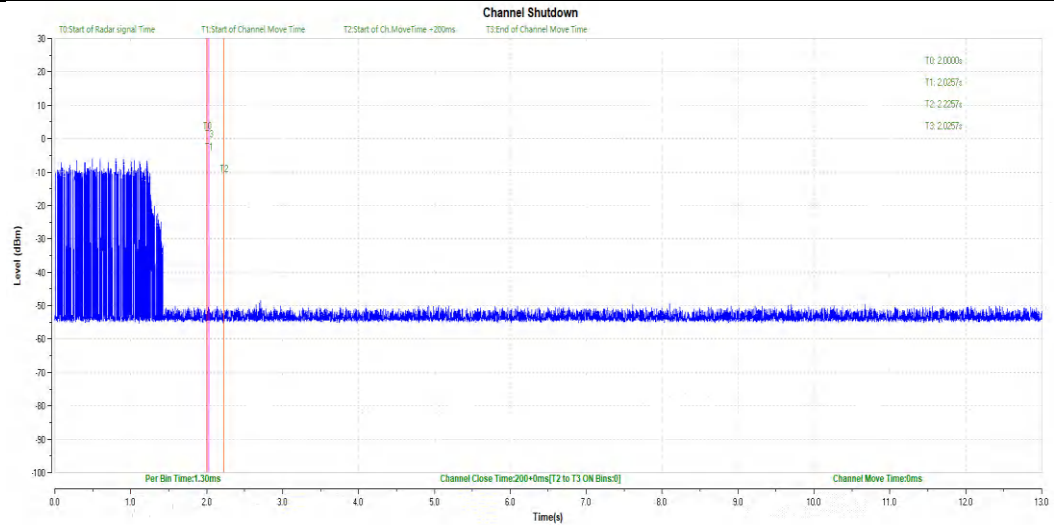


11N20SISO_5500

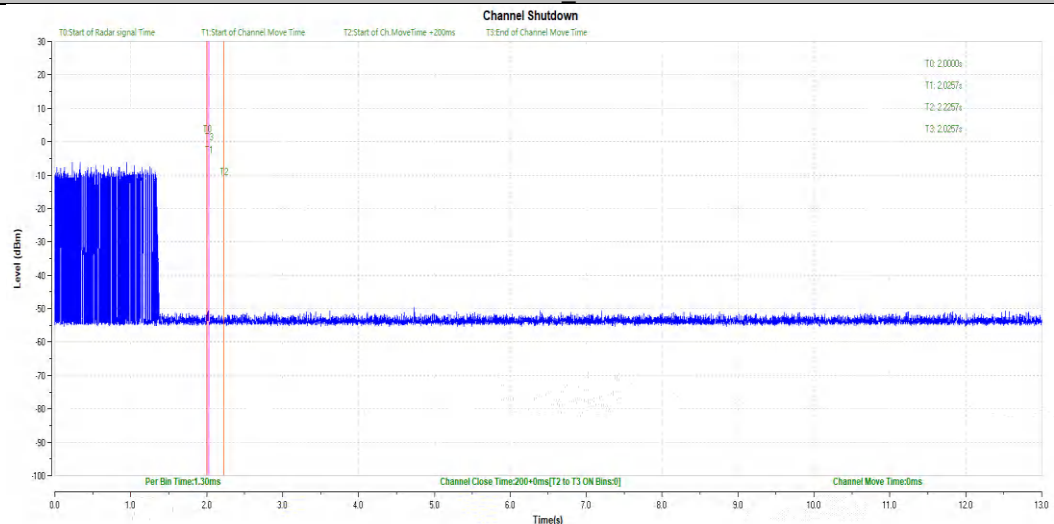

11AC80SISO_5290

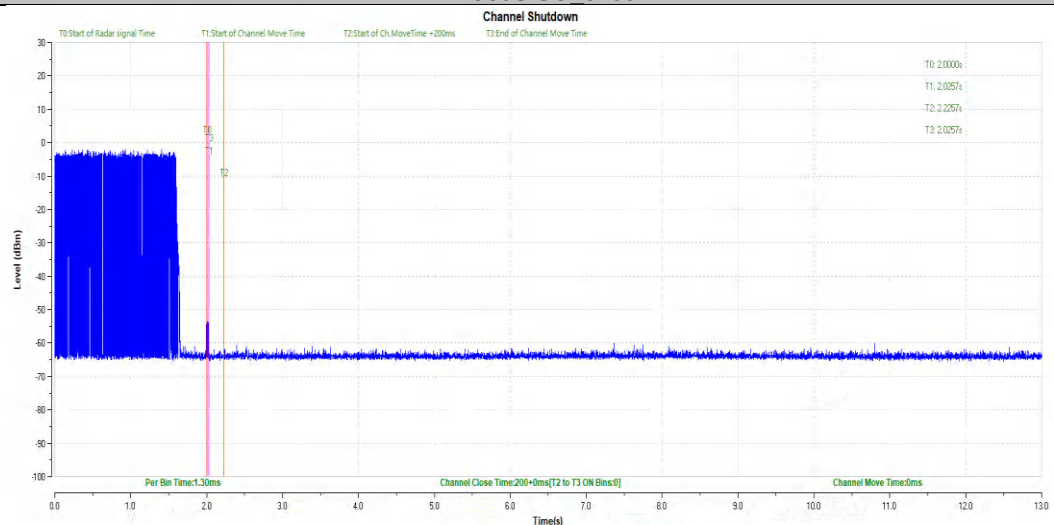

11AC80SISO_5530

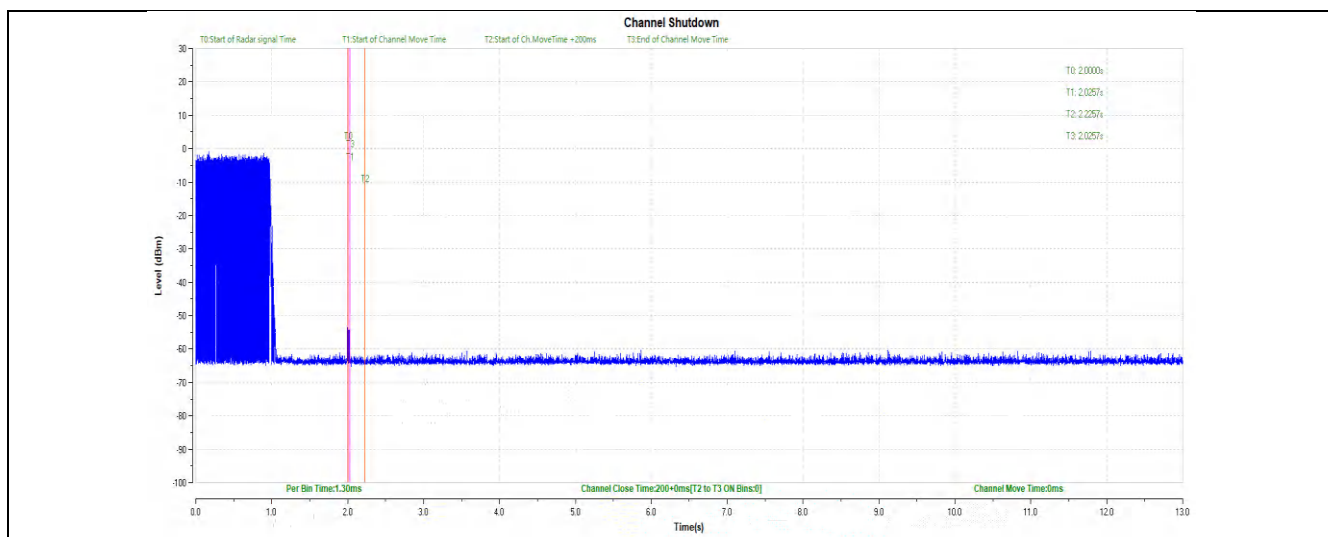


Non-Occupancy Period

TestMode	Frequency[MHz]	Result	Limit[s]	Verdict
11N20SISO	5260	see test graph	≥1800	PASS
	5500	see test graph	≥1800	PASS
11AC80SISO	5290	see test graph	≥1800	PASS
	5530	see test graph	≥1800	PASS


11N20SISO_5260

Non-Occupancy Period

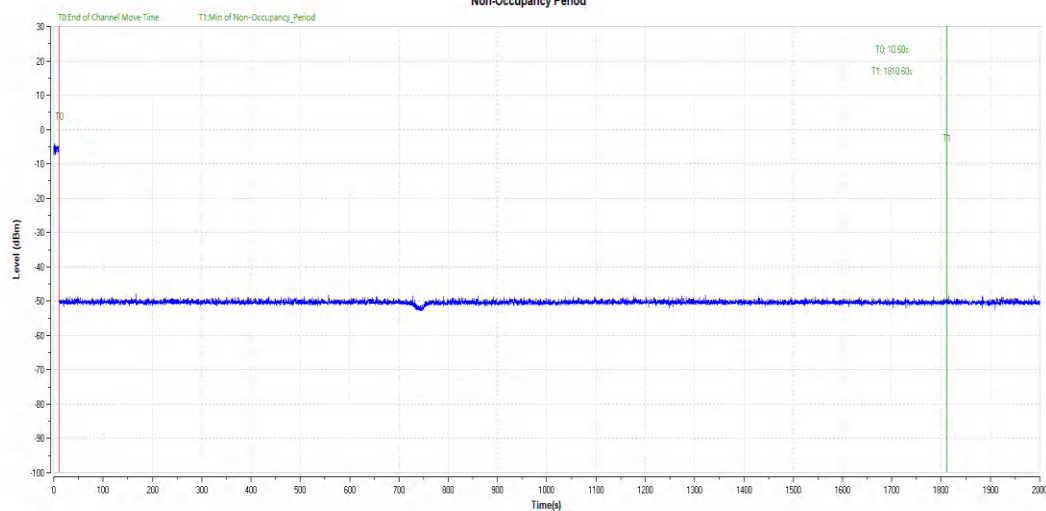


11N20SISO_5500

Non-Occupancy Period

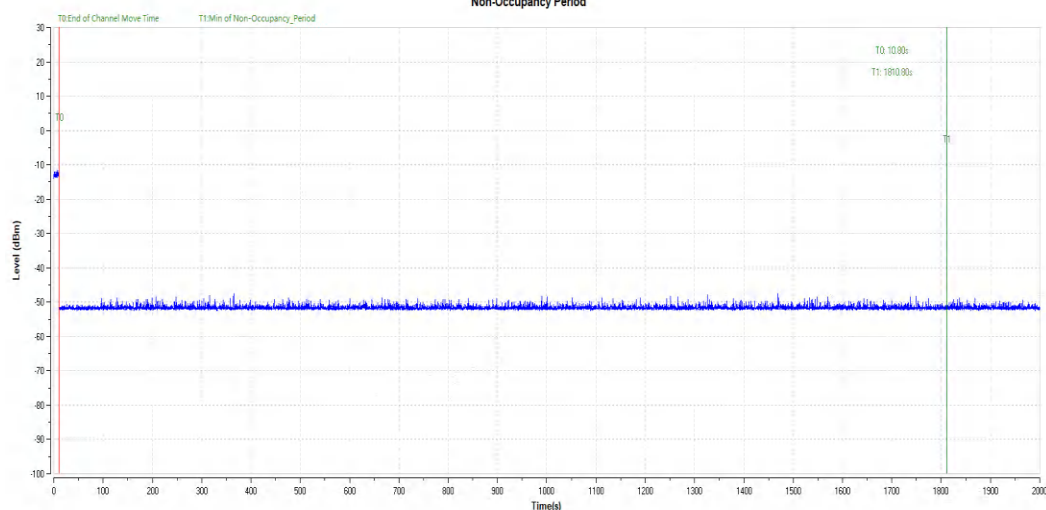


11AC80SISO_5290

Non-Occupancy Period

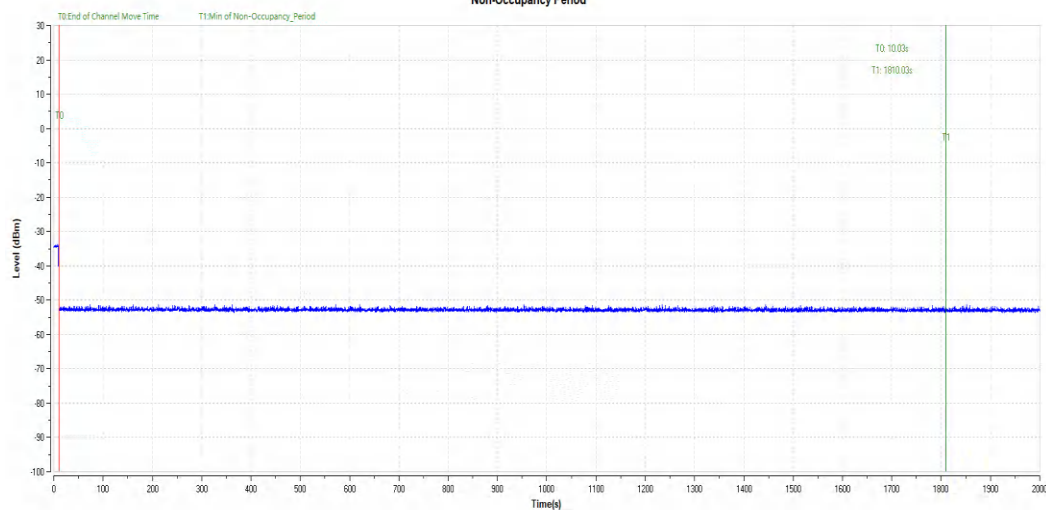


11AC80SISO_5530

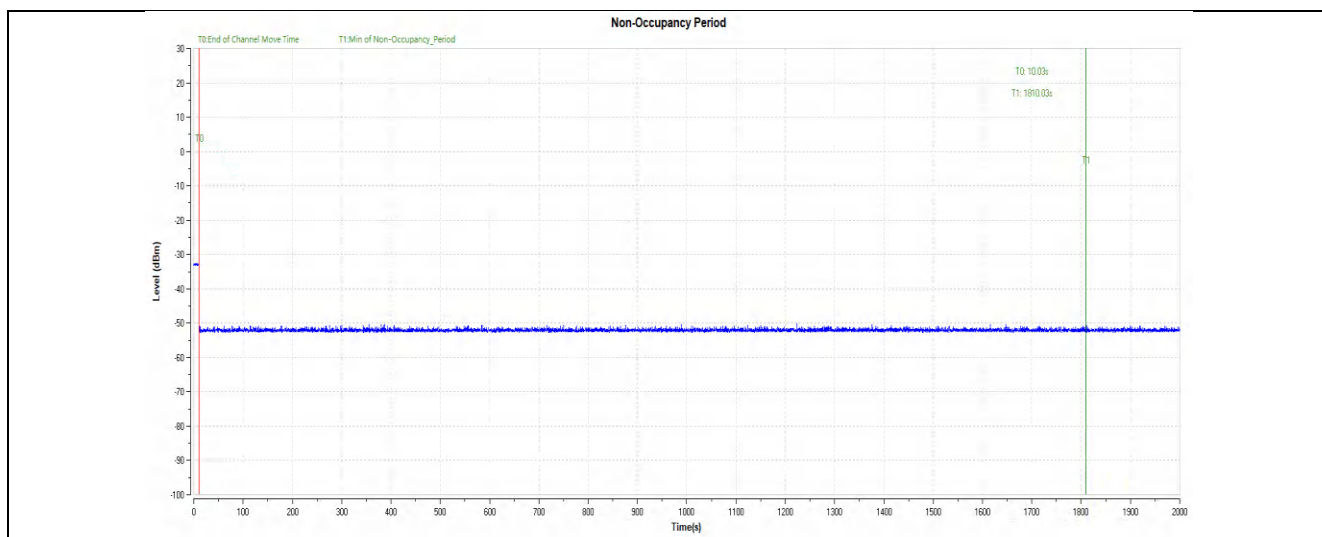

Appendix A.10: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name:	POS Terminal
Order Number:	168531160 60
Model:	C20DS
Test Mode:	Wi-Fi Link
Test Voltage:	AC 120V/60Hz
Test Standard:	FCC Part 15C
Test By:/Review By:	Dawn Shen/ Shower Dai
Tem./Hum./Pressure:	24.0°C/50.4%/101kPa
Remark:	SR3

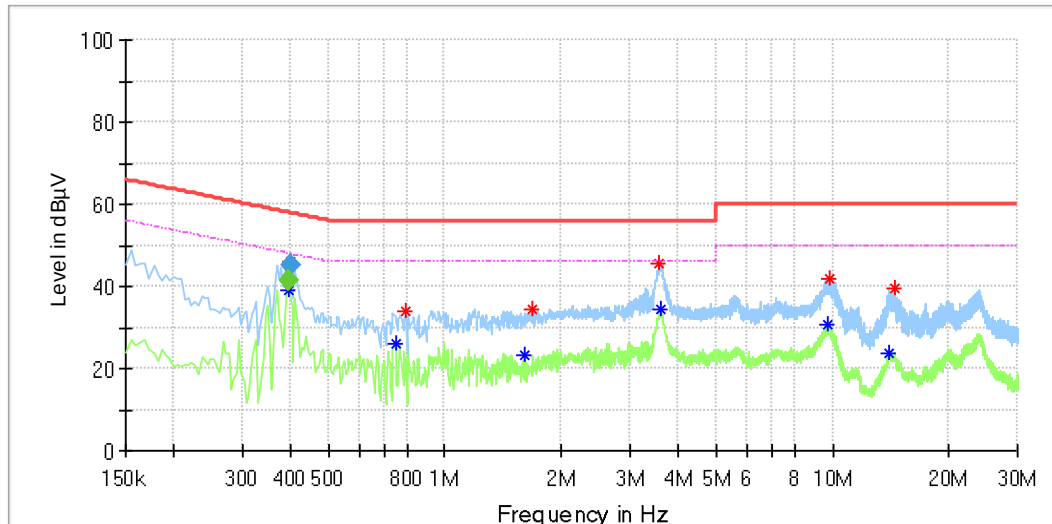

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.393000	---	38.91	48.10	9.19	L1	9.9
0.397500	46.02	---	57.81	11.79	L1	9.9
0.744000	---	26.04	46.00	19.96	L1	9.9
0.793500	33.99	---	56.00	22.01	L1	9.9
1.608000	---	23.44	46.00	22.56	L1	10.0
1.689000	34.21	---	56.00	21.79	L1	10.0
3.556500	45.78	---	56.00	10.22	L1	10.1
3.597000	---	34.20	46.00	11.80	L1	10.1
9.694500	---	30.62	50.00	19.38	L1	10.2
9.811500	41.67	---	60.00	18.33	L1	10.2
14.041500	---	23.92	50.00	26.08	L1	10.2
14.388000	39.76	---	60.00	20.24	L1	10.2

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.393000	---	41.29	48.00	6.71	1000.0	9.000	L1	9.9
0.397500	45.00	---	57.91	12.91	1000.0	9.000	L1	9.9

EUT Information

EUT Name: POS Terminal
Order Number: 168531160 60
Model: C20DS
Test Mode: Wi-Fi Link
Test Voltage: AC 120V/60Hz
Test Standard: FCC Part 15C
Test By./Review By: Dawn Shen/ Shower Dai
Tem./Hum./Pressure: 24.0°C/50.4%/101kPa
Remark: SR3

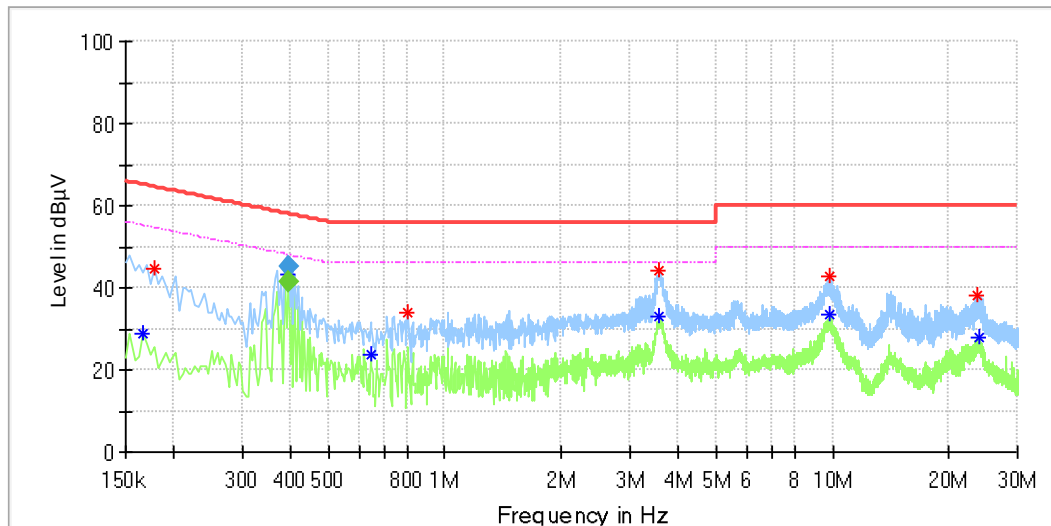

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.166000	---	28.92	55.16	26.24	N	9.7
0.178000	44.56	---	64.58	20.02	N	9.7
0.393500	---	43.30	47.98	4.68	N	9.7
0.393500	45.77	---	57.98	12.21	N	9.7
0.642000	---	23.95	46.00	22.05	N	9.7
0.802000	34.17	---	56.00	21.83	N	9.7
3.554000	44.09	---	56.00	11.91	N	9.8
3.578000	---	32.91	46.00	13.09	N	9.8
9.830000	---	33.44	50.00	16.56	N	9.9
9.830000	42.95	---	60.00	17.05	N	9.9
23.710000	38.29	---	60.00	21.71	N	10.1
23.906000	---	27.96	50.00	22.04	N	10.1

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.393500	---	41.27	47.99	6.72	1000.0	9.000	N	9.7
0.393500	45.28	---	57.99	12.71	1000.0	9.000	N	9.7