

TABLE OF CONTENTS

	Pages
1 GENERAL INFORMATION	3
1.1 Product Description	3
1.2 Related Submittal Grant	4
1.3 Tested System Details	4
1.4 Test Methodology	4
1.5 Test Facility	4
2 SYSTEM TEST CONFIGURATION	5
2.1 Justification	5
2.2 EUT Exercise Software	5
2.3 Special Accessories	5
2.4 Equipment Modifications	5
2.5 Configuration of Tested System	5
3 CONDUCTED EMISSION EQUIPMENT/DATA	6
4 RADIATED EMISSION EQUIPMENT/DATA	7
Field Strength Calculation	14
5 Attestation Statement	15

1 GENERAL INFORMATION

1.1 Product Description

NAME, MODEL, SERIAL # OF EUT:		MMT-503 Transmitter	
DESCRIPTION OF EUT:		Hand-held battery operated RF remote control	
OPERATING MODE(S):		Continuous transmission	
POWER CORDS			
UNIT:		UNIT:	
MANUFACTURER:		MANUFACTURER:	
SHIELDED:		SHIELDED:	
LENGTH:		LENGTH:	
POWER INTERFACE			
FREQUENCY/AC/DC VOLTAGE:		12.0 Vdc	
PHASES/CURRENT:		25 mA max; 11 mA nominal	
OSCILLATOR FREQUENCIES			
FREQUENCY	EUT LOCATION	DESCRIPTION OF USE	
1.8432 MHz	Crystal	Microcontroller	
POWER SUPPLY			
DESCRIPTION	MANUFACTURER	MODEL #	SERIAL #
N/A			
POWER LINE FILTERS			
MANUFACTURER	MODEL NO.	QTY.	LOCATION ON EUT
N/A			

1 GENERAL INFORMATION (continued)

1.2 Related Submittal/Grant

None

1.3 Tested System Details

The FCC IDs for all equipment, plus descriptions of all cables used in the tested system are:

None

1.4 Test Methodology

Purpose of Test: To demonstrate compliance with the ANSI C63.4 setup.

Test Performed:

1. Conducted Emissions, FCC Part 2, Paragraphs 2.989, 2.991 and Part 22, Paragraph 22.816
2. Radiated Emissions EN55022: 1992 Class B limit, 30 - 1,000 MHz, 10 meters
- X 3. Radiated Emission per FCC Part 15, Paragraph 15.109(a), 15.205, 15.209, & 15.231(a); 15.231(b); 15.231(c)
4. Frequency Stability, Part 2, Paragraph 2.995, and Part 87, Paragraph 87.133
RF Output Power, Part 2, Paragraph 2.985, Part 22, Paragraph 22.917

Both Conducted and radiated testing were performed according to the procedures in FCC/ANSI C63.4 and CSA 108.8 - M1983. Radiated testing was performed at an antenna-to-EUT distance of 3 meters (1 - 25 GHz).

1.5 Test Facility

The open area test site and conducted measurement data were tested by:

TÜV PRODUCT SERVICE
10040 Mesa Rim Road
San Diego, CA 92121-2912
Phone: 619 546 3999
Fax: 619 546 0364

The Test Site Data and performance comply with ANSI 63.4 and are registered with the FCC, 7435 Oakland Mills Rd, Columbia Maryland 21046. All Measurement Data is acquired according to the content of FCC Measurement Procedure and ANSI C63.4, unless supplemented with additional requirements as noted in the test report.

2. SYSTEM TEST CONFIGURATION

2.1 Justification

The EUT was initially tested for FCC emission in the following configuration:

See Block Diagram.

2.2 EUT Exercise Software

None

2.3 Special Accessories

None

2.4 Modification

None

2.5 Configuration of Tested System

See Block Diagram.

3 CONDUCTED EMISSION EQUIPMENT/DATA

The following data lists the significant emission frequencies, measured levels, correction factor (which includes cable and antenna corrections), the corrected reading, and the limit.

VDC unit.

4 RADIATED EMISSION EQUIPMENT/DATA

The following data lists the significant emission frequencies, measured levels, correction factor (which includes cable and antenna corrections), the corrected reading, and the limit.

See following page(s).


REPORT NO: SC101681
COMPANY: Mirimed
EUT: MT 503 Remote Key FOB Transmitter
EUT MODE: Continuous Transmission
DATE: 13-Mar-01

SPEC: FCC Part 15 para 15.109(a)

TESTED BY: Shawn A'Neals

SA

TEST DISTANCE: 3 Meters

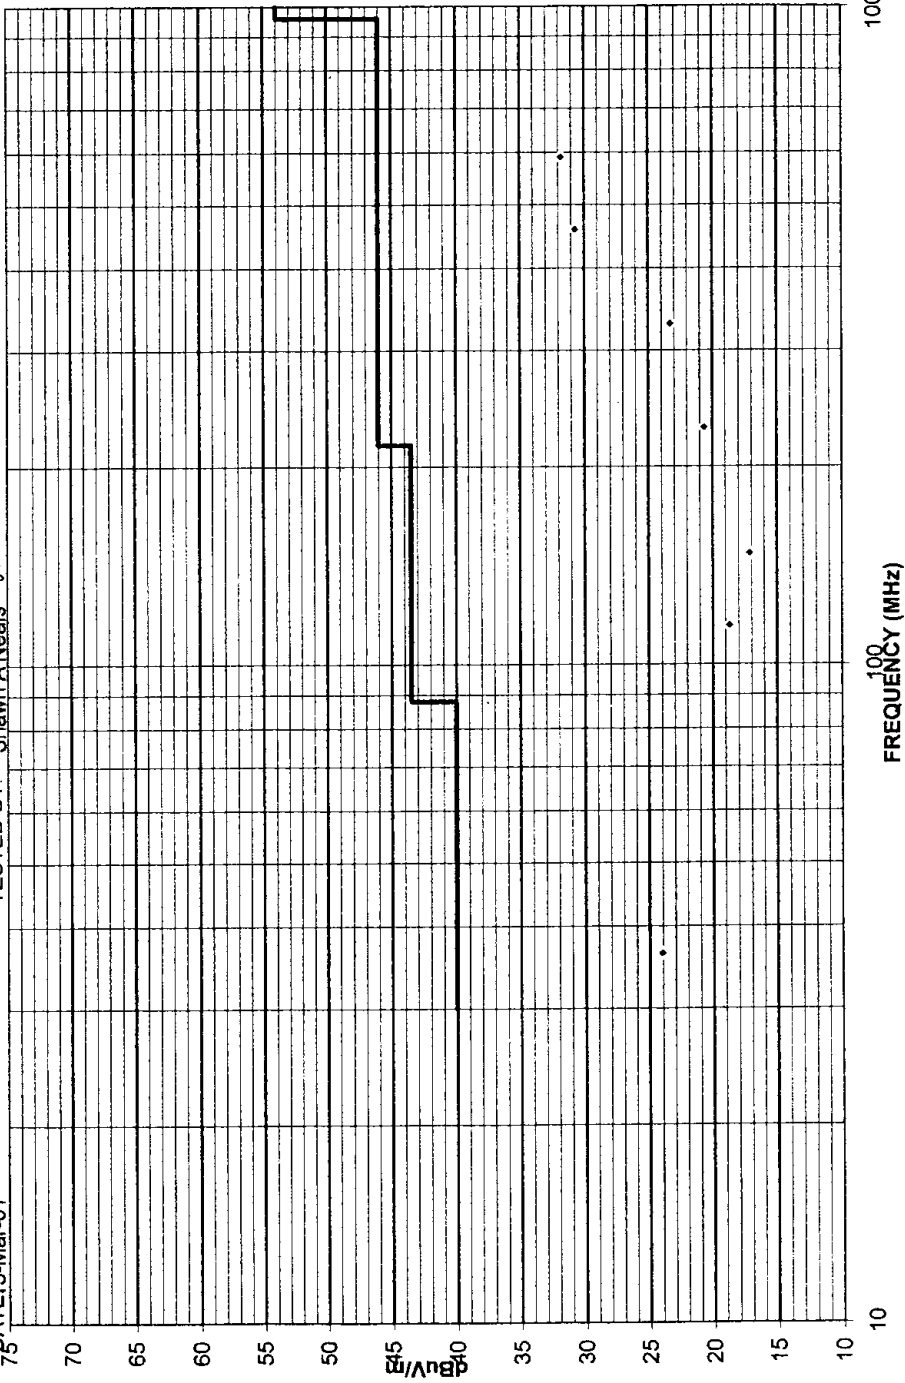

SPEC: FCC Part 15 para 15.109(a)

TEST DIST: 3 Meters

TEST SITE: 2

BICONICAL: 738

LOG PERIODIC: 738

RCVR: 427

[illegible]

TEST DIST: 3 meters

TEST SITE: 3

BICONICAL: N/A

LOG: 244

OTHER: 251

12 volt battery

s/n99910

no other emissions detected

v.beta1

[illegible]

15.231(a) 503 Transmitter
Deactivation - 5 seconds


MKR 3.415 sec
13.10 dB μ V

hp REF 97.0 dB μ V

ATTEN 0 dB

10 dB/

POS PK

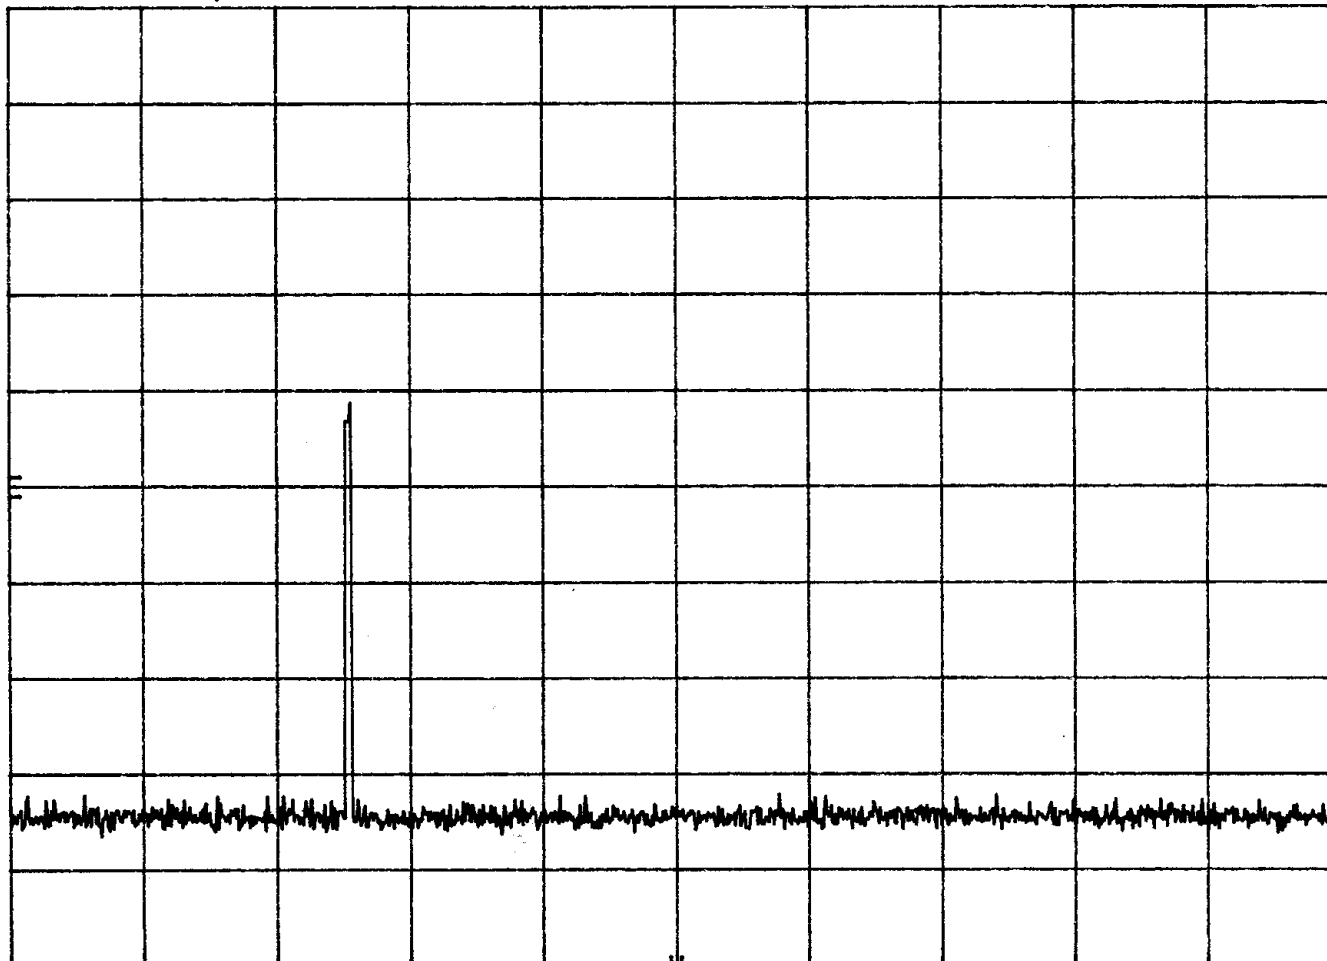

CENTER 916.6500 MHz


RES BW 30 kHz

VBW 30 kHz

SPAN 0 Hz
SWP 5.0 sec

11

MINIMED FCC PART 15, PARA. 15.231(c) 23 March 2001 BANDWIDTH
NOTE(S): 1) $f_0 = 916.65$
2) 20 dB BW spec =
3) 20 dB BW measured =

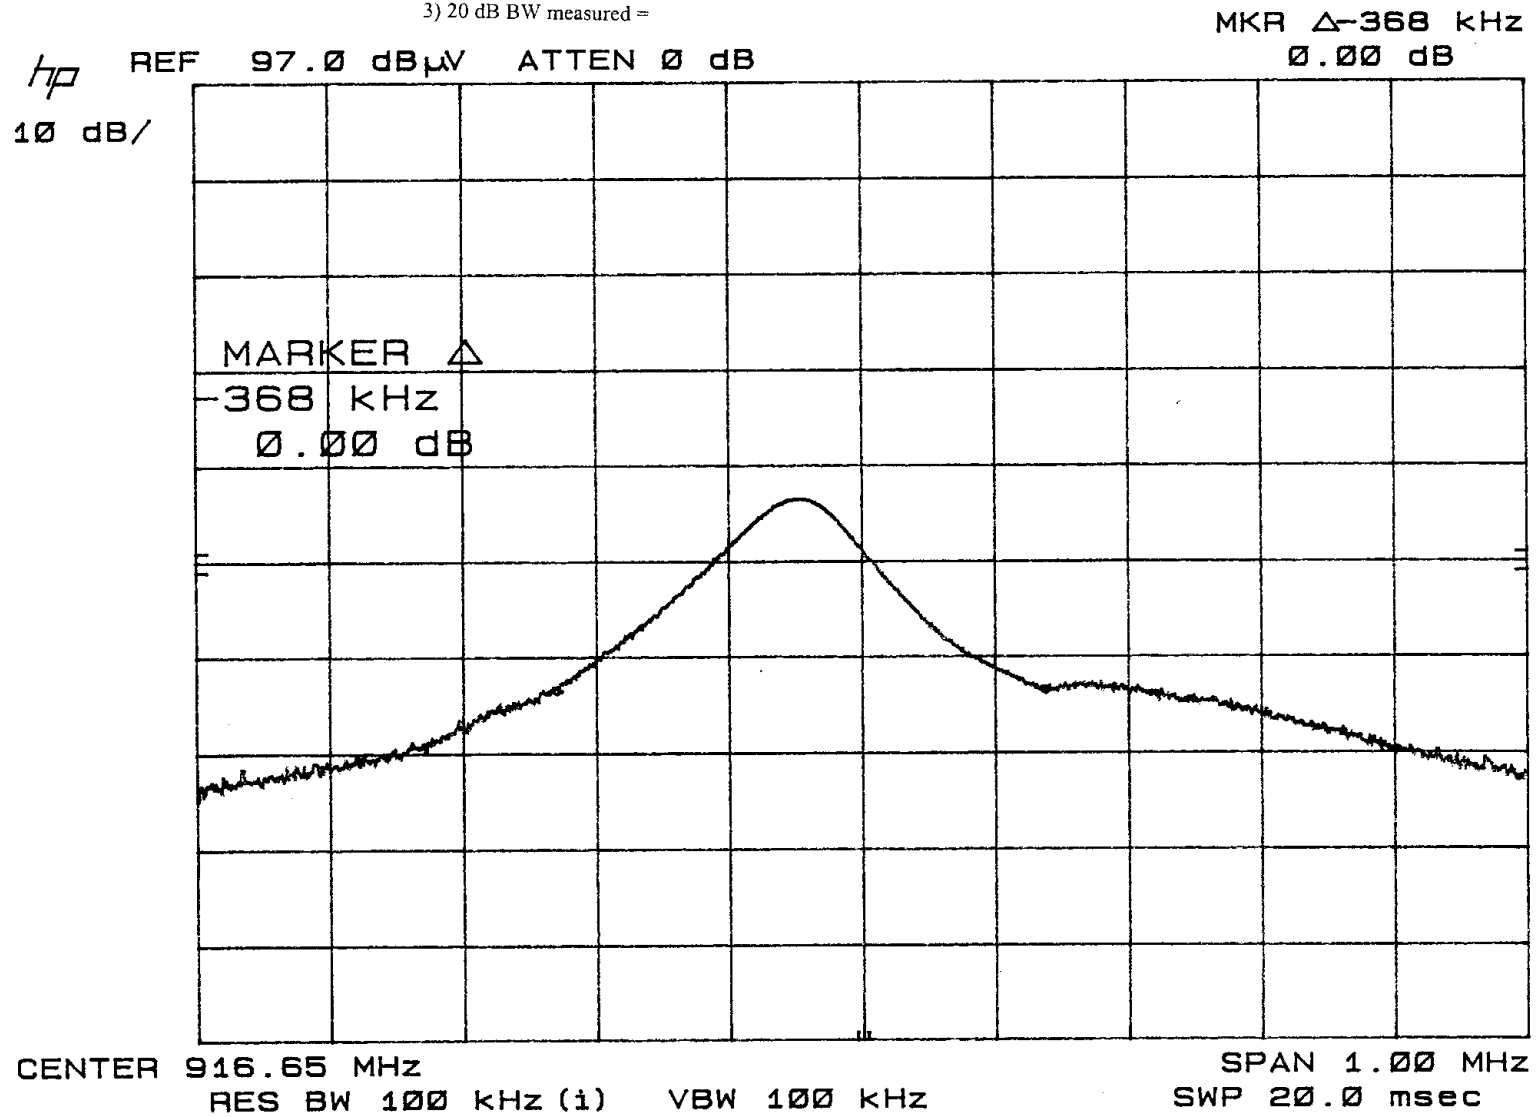

Emissions Test Conditions: FCC Part 15, Paragraph 15.109(a); 15.205; 15.209; 15.231(b) and 15.231(a); 15.231(b); 15.231(c)

The measurements were performed at the following test location :

☐ - Test not applicable

Canyon #3, Carroll Canyon, San Diego
SR-3, Shielded Room, 12' x 20' x 8', Metal Chamber

Radiated Emissions Testing was performed at a test distance of:

3 meters

Test Equipment Used :

Model No.	Prop. No.	Description	Manufacturer	Serial No.	Cal Date
3115	251/453	Antenna, Double Ridge Guide	EMCO	9412-4363	10/01
3146	244	Antenna, Log Periodic Dipole	EMCO	1063	0202
85660B	407	Spectrum Analyzer	Hewlett Packard	2311A02209	11/01
AA-190-06.00.0	729	Frequency Cables	United Microwave Pro	--	*
AA-190-30.00.0	732	Frequency Cables	United Microwave Pro	--	*
CBL6111	460	Antenna, Bilog	Chase	--	Verified
8566B	744	Spectrum Analyzer	Hewlett Packard	--	09/01
ESVS30	427	Receiver	Rhode & Schwarz	--	11/01
LPB 2520 / A	738	LPB	Antenna Research	--	05/01
HP 8568B	187/188	Spectrum Analyzer	Hewlett Packard	--	11/01

Remarks: _____

Field Strength Calculation

If a preamplifier was used during the Radiated Emission Testing, it is required that the amplifier gain must be subtracted from the Spectrum Analyzer (Meter) Reading. In addition, a correction factor for the antenna, cable used and a distance factor, if any, must be applied to the Meter Reading before a true field strength reading can be obtained. In the automatic measurement, these considerations are automatically presented as a part of the print out. In the case of manual measurements and for greater efficiency and convenience, instead of using these correlation factors for each meter reading, the specification limit was modified to reflect these correlation factors at each frequency value so that the meter readings can be compared directly to the modified specification limit. This modified specification limit is referred to as the "Corrected Meter Reading Limit" or simply the CMRL, which is the actual field strength present at the antenna. The quantity can be derived in the following manner:

$$\text{Corrected Meter Reading Limit (CMRL)} = \text{SAR} + \text{AF} + \text{CL} - \text{AG} - \text{DC}$$

Where, SAR = Spectrum Analyzer Reading

AF = Antenna Factor

CL = Cable Loss

AG = Amplifier Gain (if any)

DC = Distance Correction (if any)

Assume the following situation: A meter reading of 29.4 dBuV was obtained from a Class A computing device measured at 83 MHz. Assume an antenna factor of 9.2 dB, a cable loss of 1.4 dB and amplifier gain of 20.0 dB at 83 MHz. The final field strength would be determined as follows:

$$\text{CMRL} = 29.4 \text{ dBuV} + 9.2 \text{ dB} - 1.4 \text{ dB} - 20 \text{ dB/M} - 0.0 \text{ dB}$$

$$\text{CMRL} = 20.0 \text{ dBuV/M}$$

This result is well below the FCC and CSA Class A limit of 29.5 dbuV/m at 83 MHz.

For the manual mode of measurement, a table of corrected meter reading limit was used to permit immediate comparison of the meter reading to determine if the measure emission amplitude exceeded the specification limit at that specific frequency.

4. ATTESTATION STATEMENT

GENERAL REMARKS:

SUMMARY:

All tests per *FCC Part 15, Paragraphs 15.205; 15.209; 15.231(a); 15.231(b); and 15.231(c)* were

■ - Performed

The Equipment Under Test

■ - **Fulfills** the requirements of *FCC Part 15, Paragraphs 15.205; 15.209; 15.231(a); 15.231(b); and 15.231(c)*.

- TÜV PRODUCT SERVICE, INC. -

Responsible Engineer:

A handwritten signature in black ink, appearing to read "Jim Owen", written in a cursive style.

Jim Owen
(EMC Engineer)