
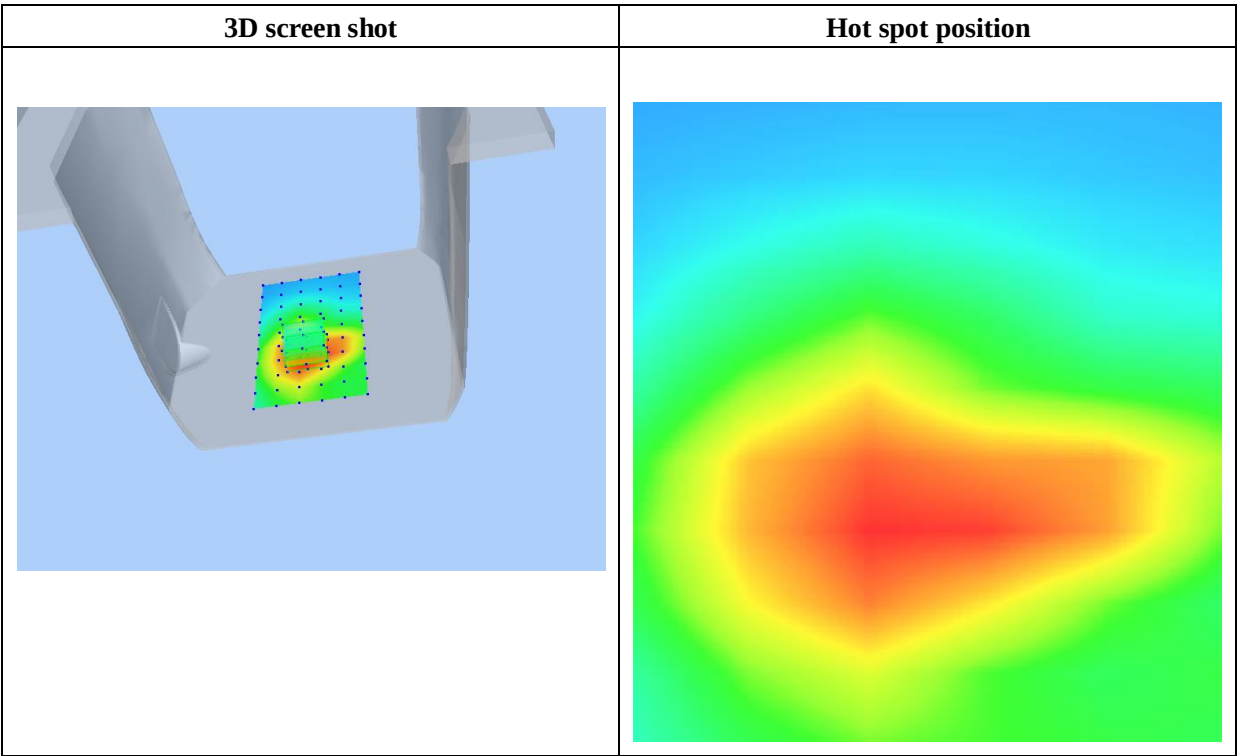


Maximum location: X=-2.00, Y=-23.00

SAR Peak: 0.21 W/kg

SAR 10g (W/Kg)	0.069211
SAR 1g (W/Kg)	0.122680

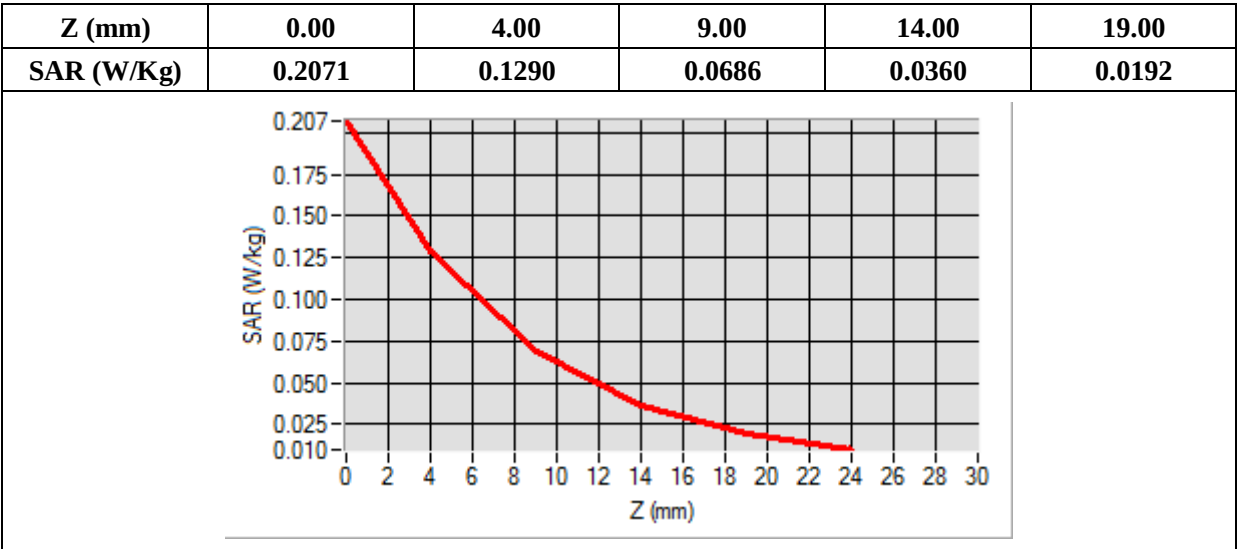

MEASUREMENT 26


Type: Phone measurement (Complete)
Date of measurement: 2021-04-30
Measurement duration: 12 minutes 3 seconds
E-field Probe: SN 09/13 EP168; ConvF: 5.64; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi_802.11b
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2462.000000
Relative Permittivity (real part)	39.804726
Conductivity (S/m)	1.828174
Power Variation (%)	1.940000
Ambient Temperature	21.9
Liquid Temperature	21.9

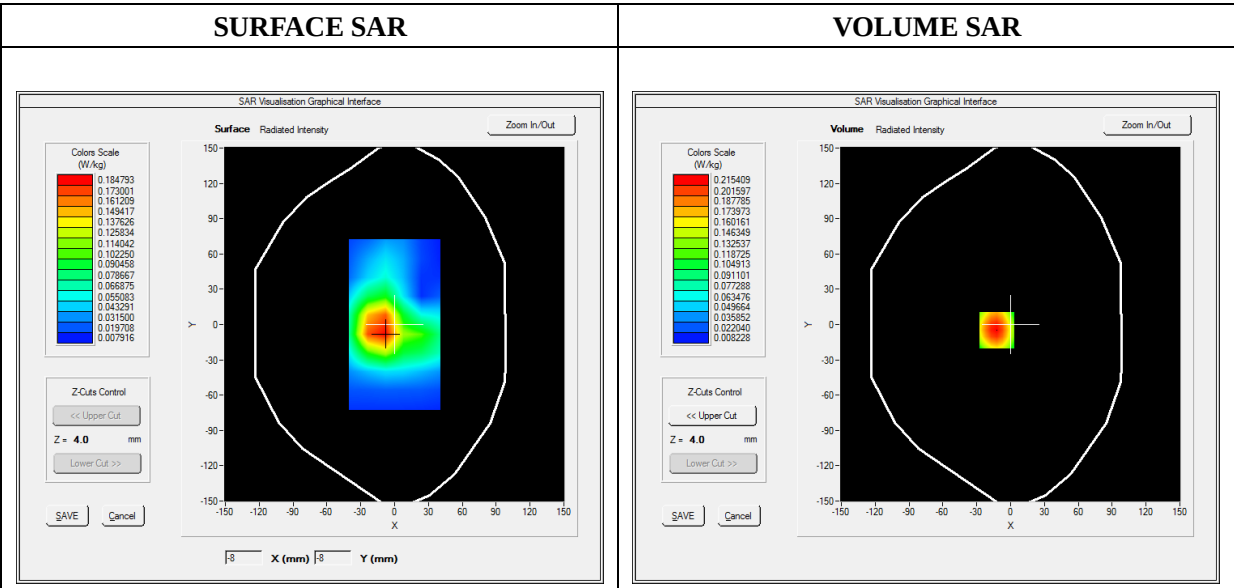

Maximum location: X=-12.00, Y=-5.00

SAR Peak: 0.36 W/kg

SAR 10g (W/Kg)	0.108272
SAR 1g (W/Kg)	0.202806

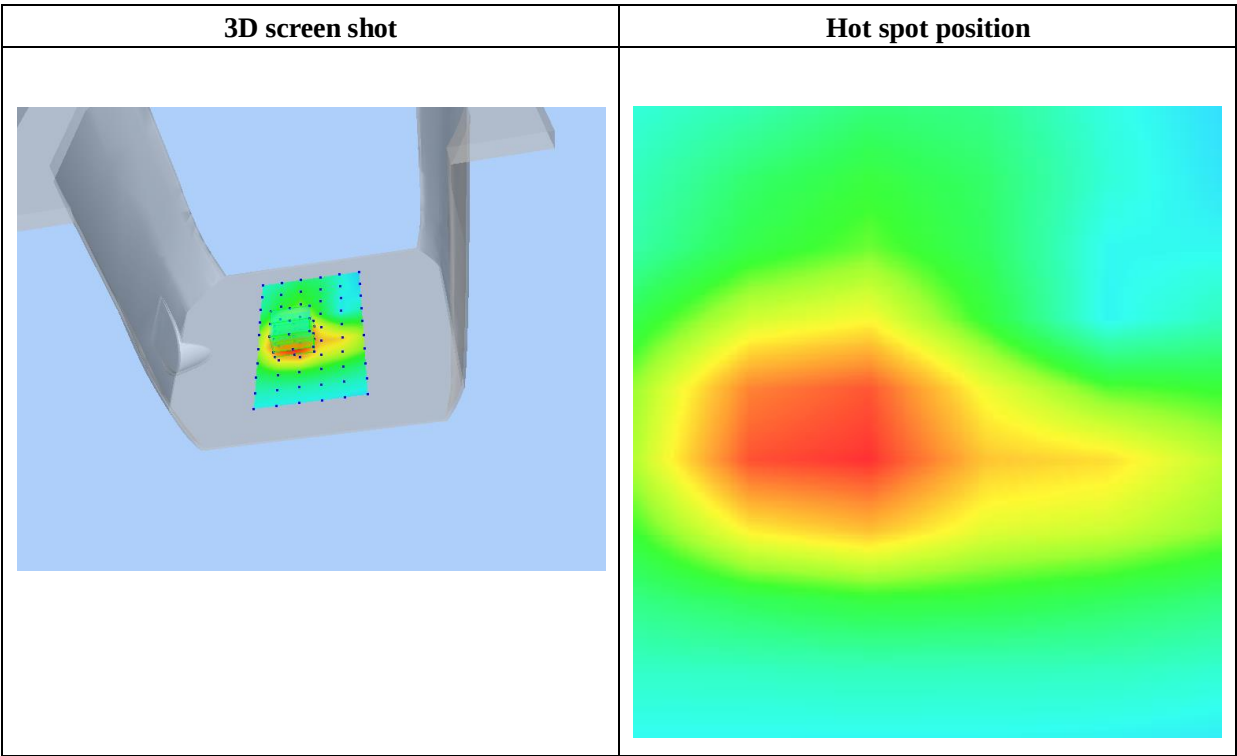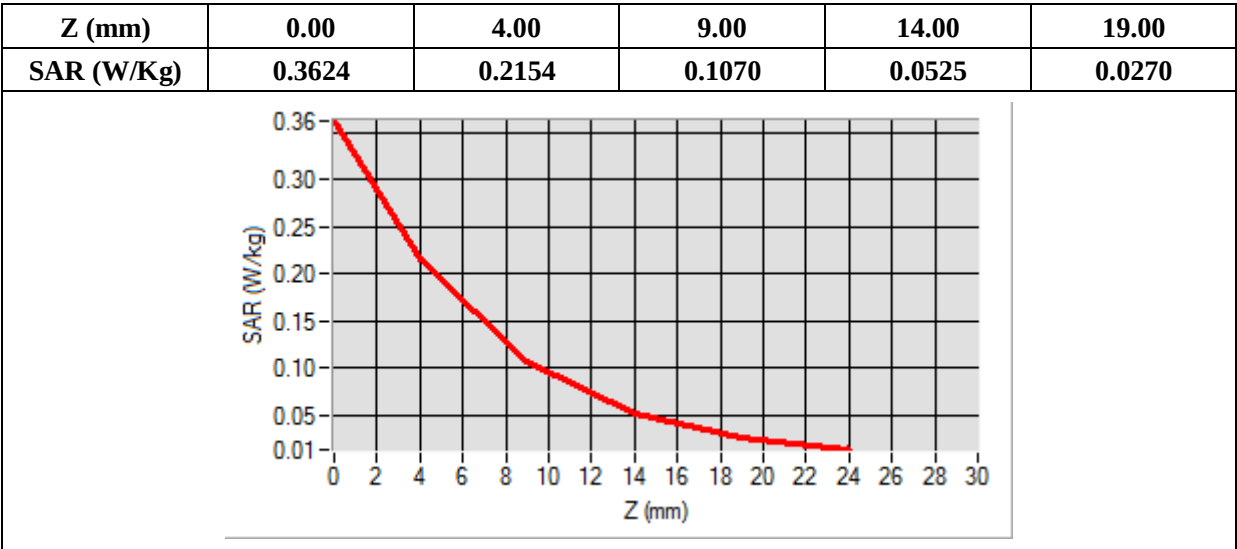

MEASUREMENT 27/42

Type: Phone measurement (Complete)

Date of measurement: 2021-05-11

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 2.44; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.2GHz)_802.11n40
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5230.000000
Relative Permittivity (real part)	37.023869
Conductivity (S/m)	4.827611
Power Variation (%)	-1.150000
Ambient Temperature	22.5
Liquid Temperature	22.5

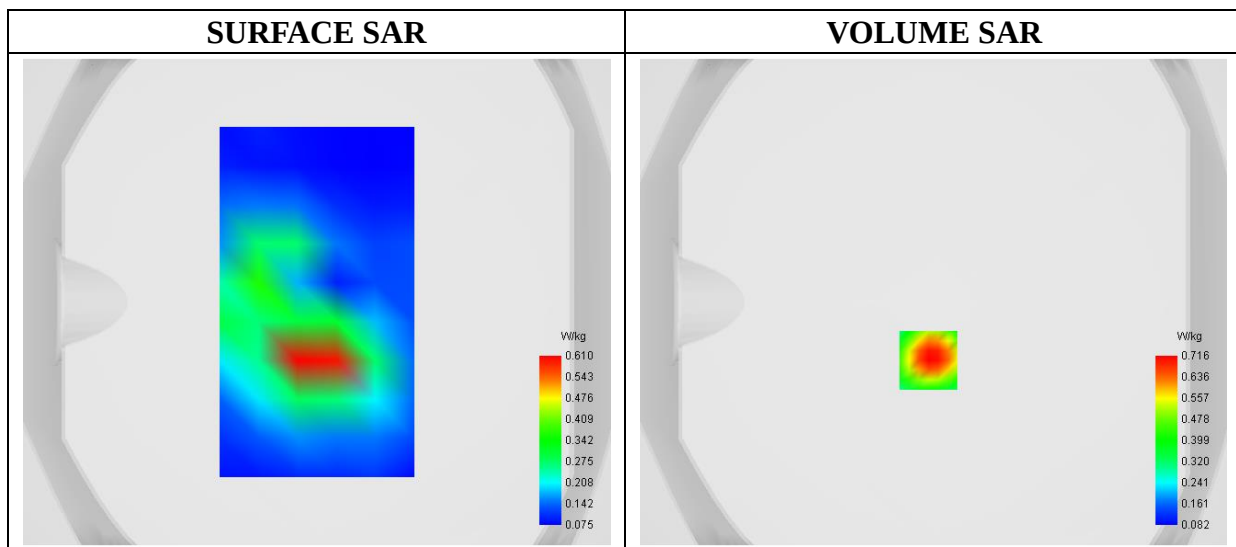

Maximum location: X=-2.00, Y=-24.00

SAR 10g (W/Kg)	0.255423
SAR 1g (W/Kg)	0.496331

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.9829	0.7156	0.5222	0.3839	0.2896	0.2252	0.1810	0.1497	0.1265

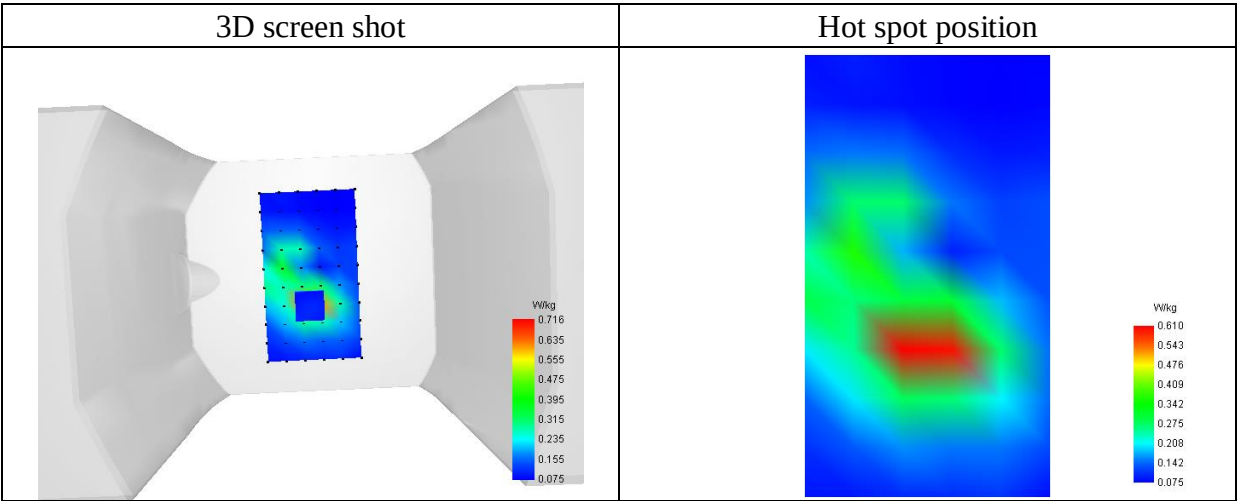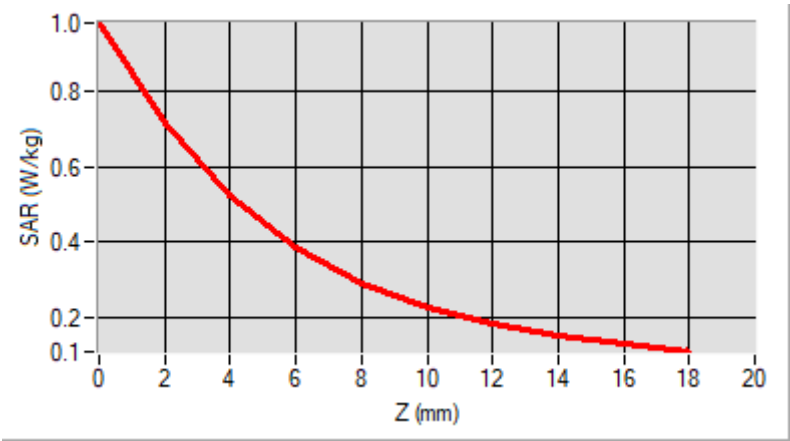

MEASUREMENT 28/43

Type: Phone measurement (Complete)

Date of measurement: 2021-05-11

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 2.68; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.3GHz)_802.11 n (HT20)
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5320.000000
Relative Permittivity (real part)	36.920839
Conductivity (S/m)	4.870192
Power Variation (%)	1.110000
Ambient Temperature	22.5
Liquid Temperature	22.5

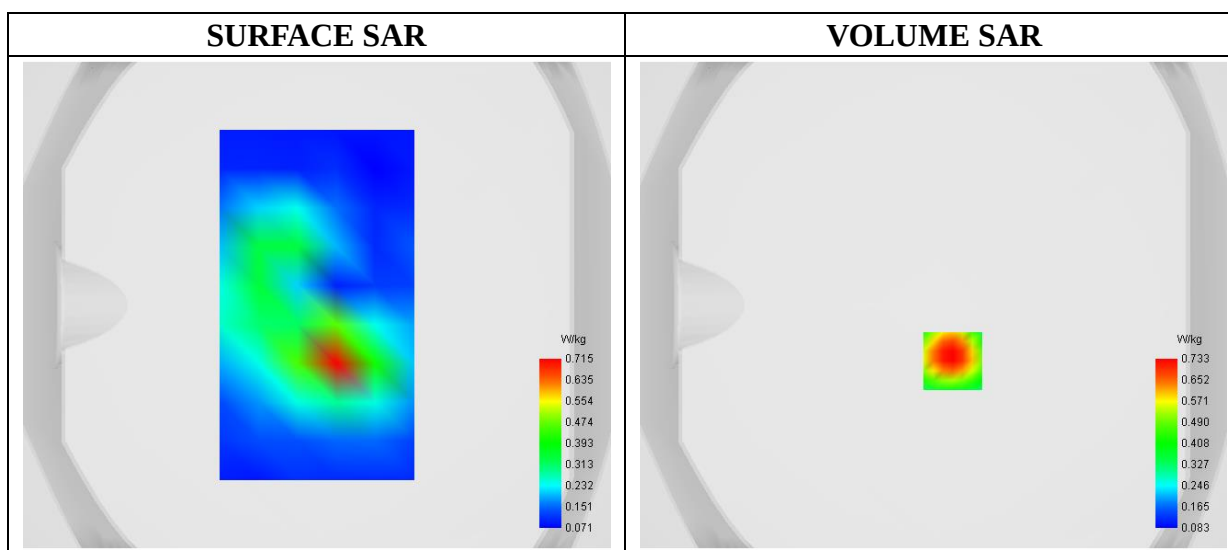

Maximum location: X=8.00, Y=-23.00

SAR 10g (W/Kg)	0.275417
SAR 1g (W/Kg)	0.518087

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	1.0702	0.7334	0.4837	0.3990	0.2798	0.2404	0.1856	0.1662	0.1439

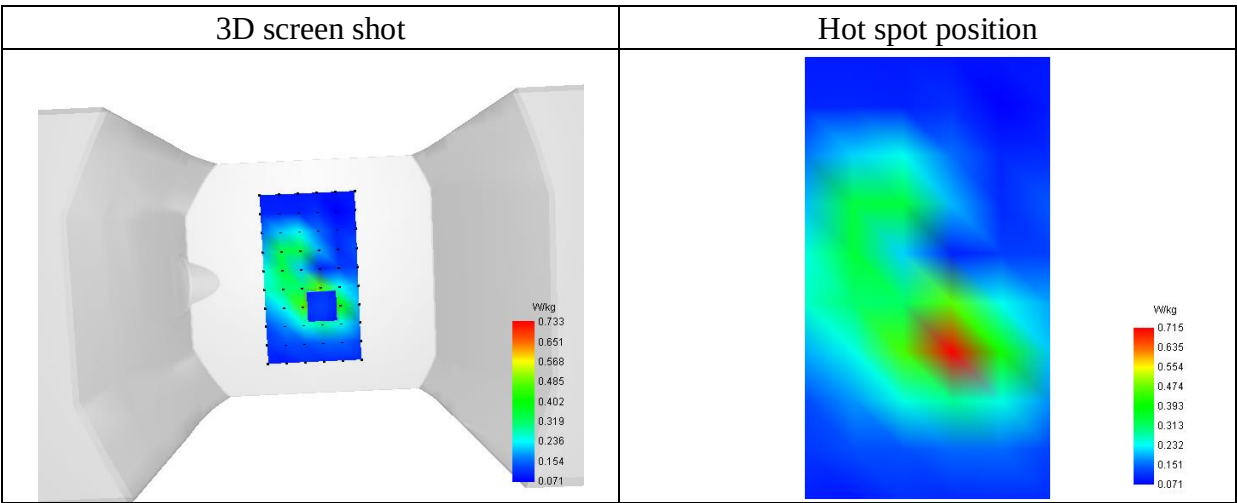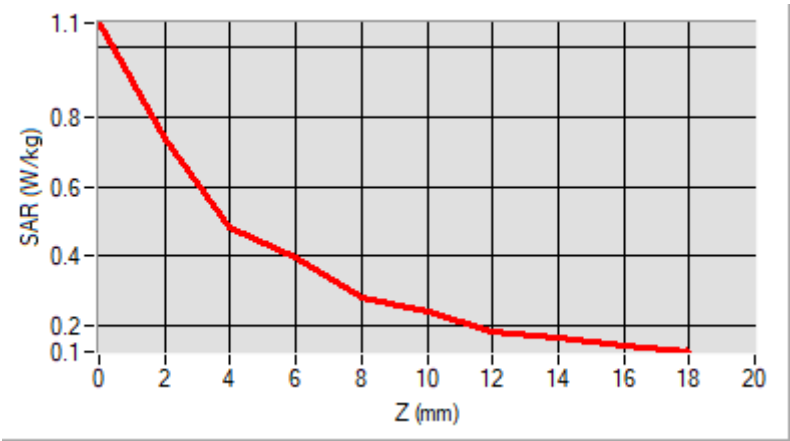

MEASUREMENT 29/44

Type: Phone measurement (Complete)

Date of measurement: 2021-05-11

Measurement duration: 12 minutes 21 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 2.72; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.6GHz)_802.11 n (HT40)
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5510.000000
Relative Permittivity (real part)	35.540963
Conductivity (S/m)	5.045278
Power Variation (%)	0.750000
Ambient Temperature	22.5
Liquid Temperature	22.5

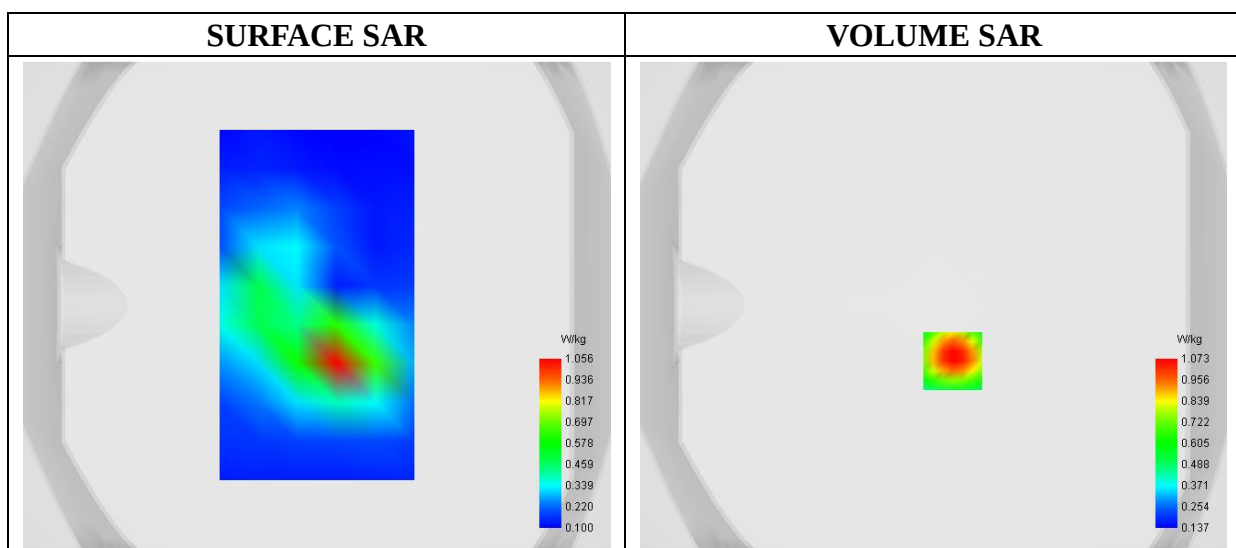

Maximum location: X=8.00, Y=-23.00

SAR 10g (W/Kg)	0.378364
SAR 1g (W/Kg)	0.723512

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	1.5231	1.0732	0.7561	0.5376	0.3953	0.3033	0.2440	0.2053	0.1789

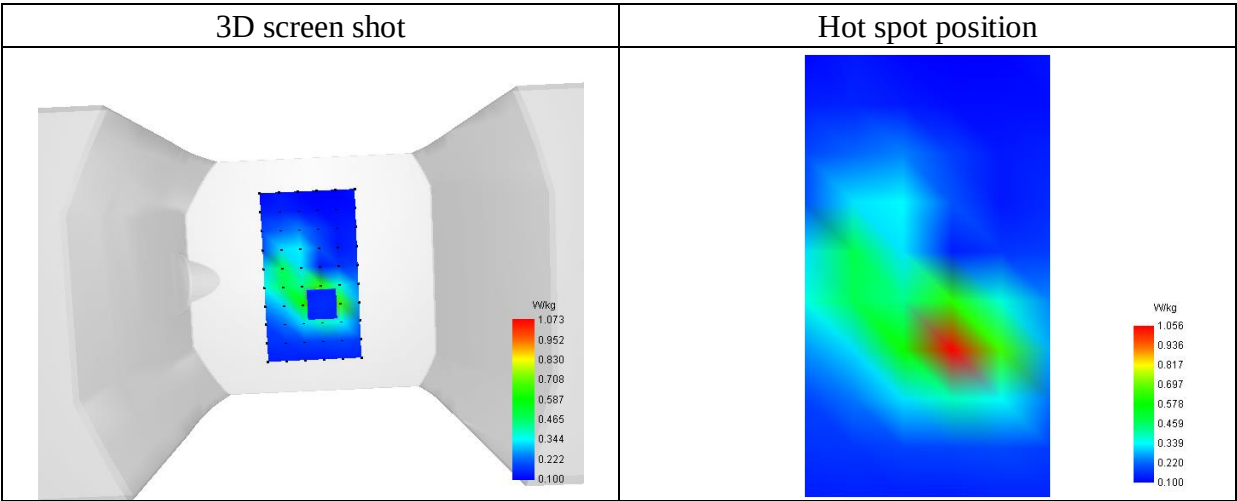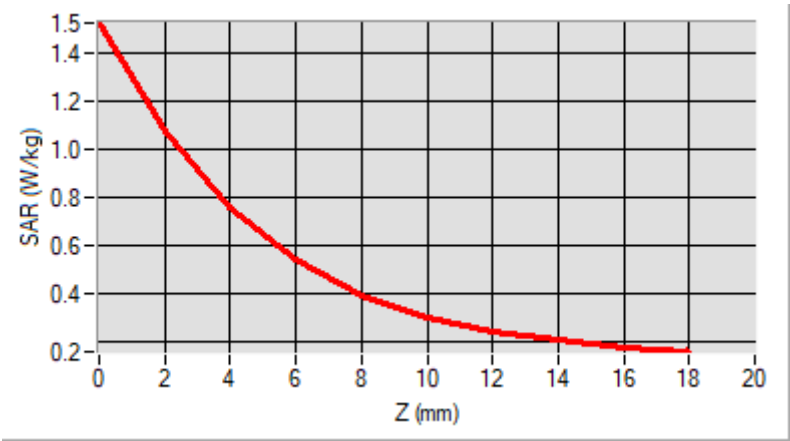

MEASUREMENT 30/45

Type: Phone measurement (Complete)

Date of measurement: 2021-05-11

Measurement duration: 12 minutes 21 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 2.52; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.8GHz)_802.11 n (HT20)
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5745.000000
Relative Permittivity (real part)	35.142273
Conductivity (S/m)	5.270836
Power Variation (%)	-1.330000
Ambient Temperature	22.5
Liquid Temperature	22.5

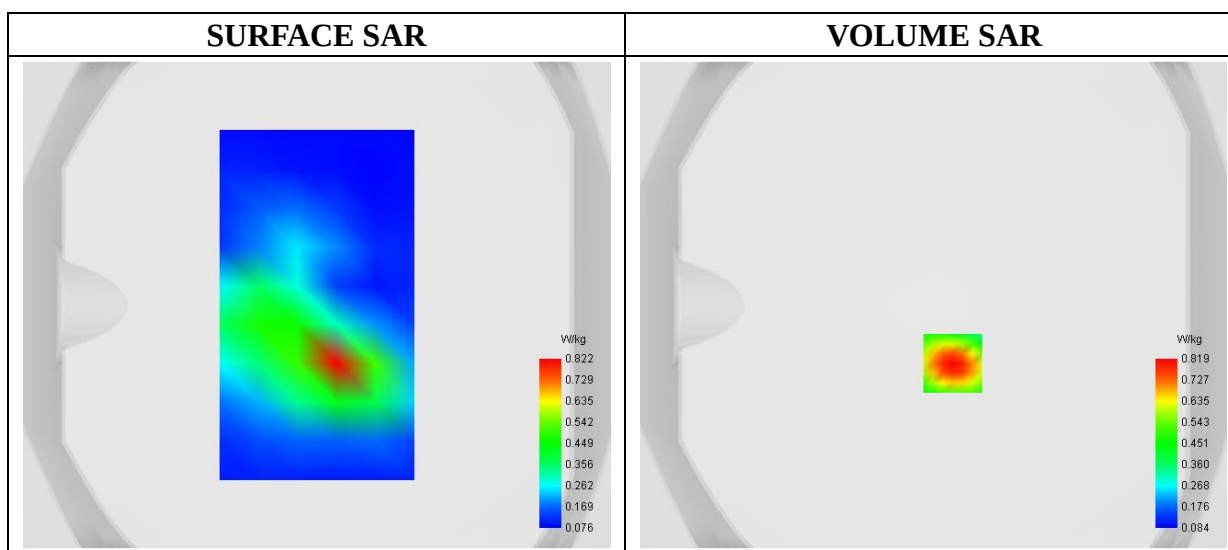

Maximum location: X=8.00, Y=-24.00

SAR 10g (W/Kg)	0.284634
SAR 1g (W/Kg)	0.557917

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	1.1389	0.8187	0.5887	0.4258	0.3159	0.2418	0.1915	0.1564	0.1307

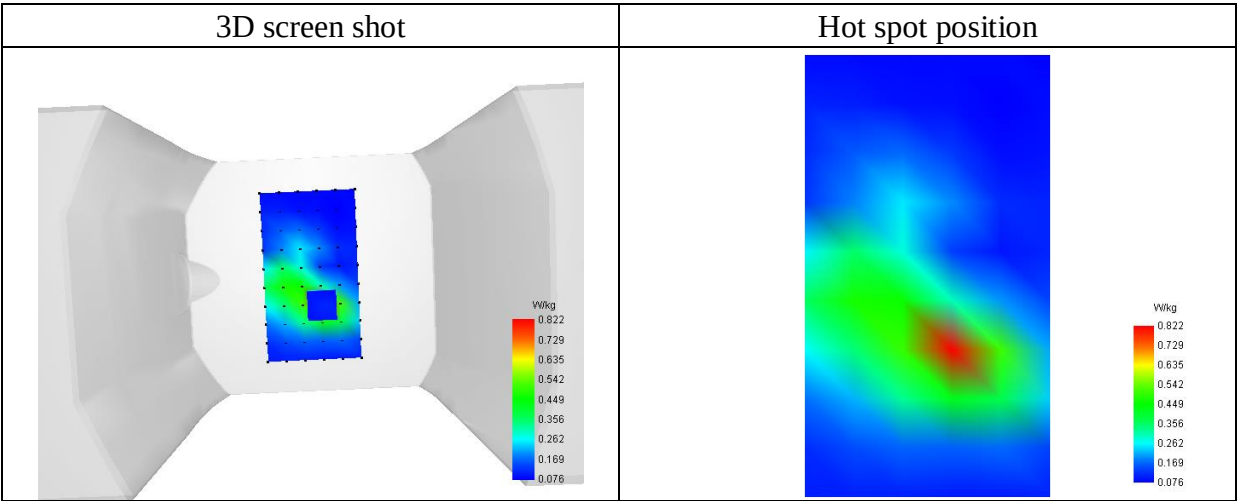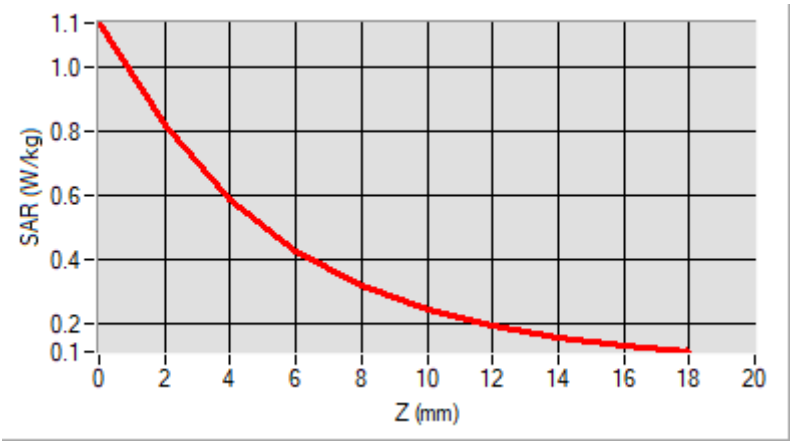

MEASUREMENT 31

Type: Phone measurement (Complete)
Date of measurement: 2021-05-06
Measurement duration: 12 minutes 48 seconds
E-field Probe: SN 09/13 EP168; ConvF: 6.93; Calibrated: 2020-05-22


C. Experimental conditions

D.

Area Scan	dx=8mm dy=8mm
Phantom	Flat Plane
Device Position	Back
Band	GPRS850_4TX
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	836.600000
Relative Permittivity (real part)	42.702834
Conductivity (S/m)	0.918612
Power Variation (%)	0.210000
Ambient Temperature	22.1
Liquid Temperature	22.1

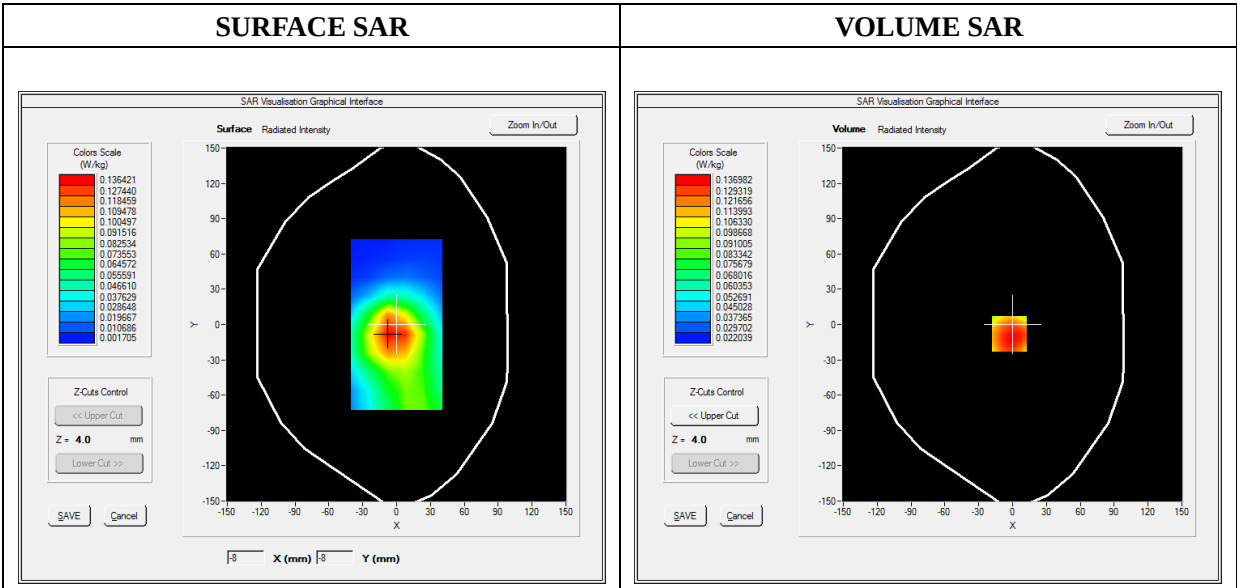

Maximum location: X=-3.00, Y=-8.00

SAR Peak: 0.18 W/kg

SAR 10g (W/Kg)	0.094308
SAR 1g (W/Kg)	0.132449

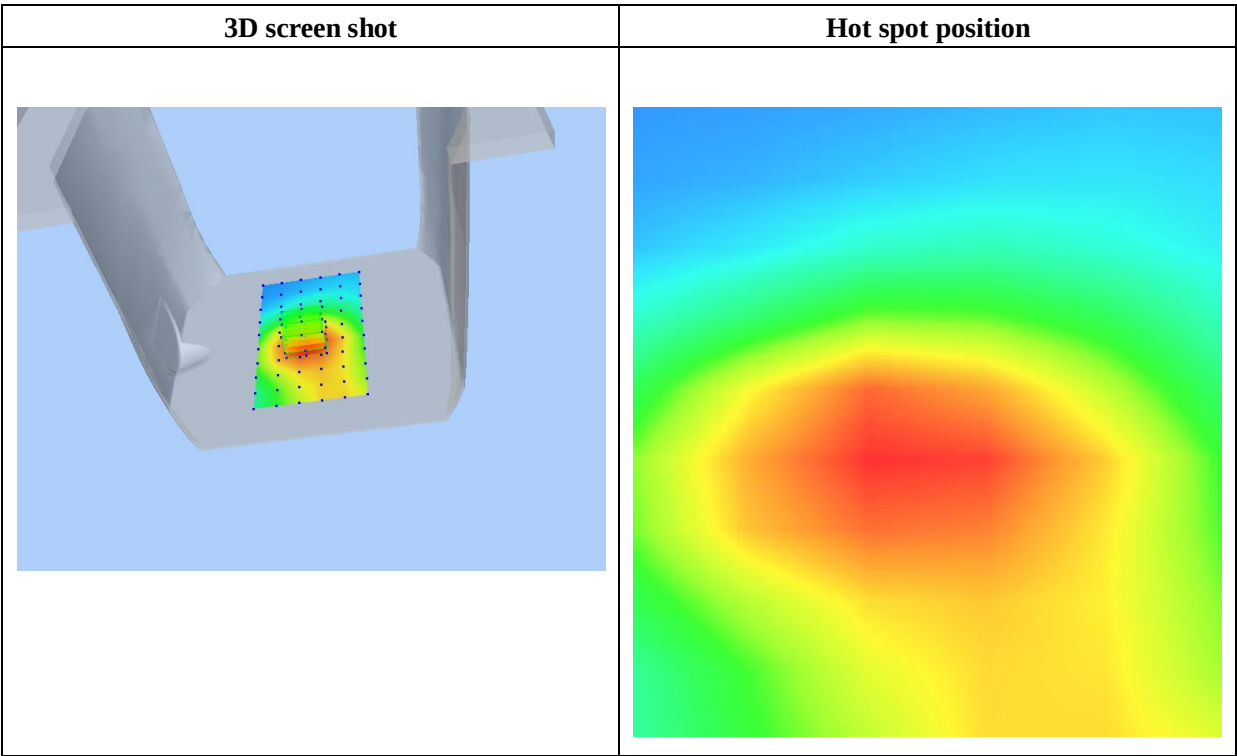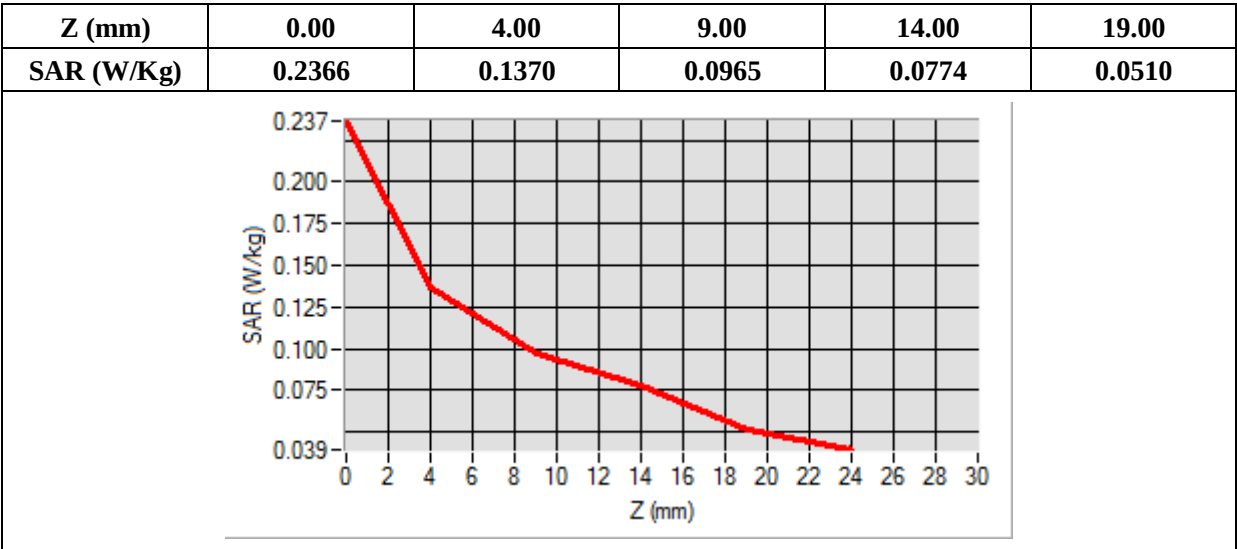

MEASUREMENT 32

Type: Phone measurement (Complete)

Date of measurement: 2021-05-08

Measurement duration: 11 minutes 48 seconds


E-field Probe: SN 09/13 EP168; ConvF: 6.35; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Flat Plane
Device Position	Left
Band	GPRS1900_4TX
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	1909.800000
Relative Permittivity (real part)	39.570296
Conductivity (S/m)	1.403845
Power Variation (%)	-0.260000
Ambient Temperature	22.3
Liquid Temperature	22.3

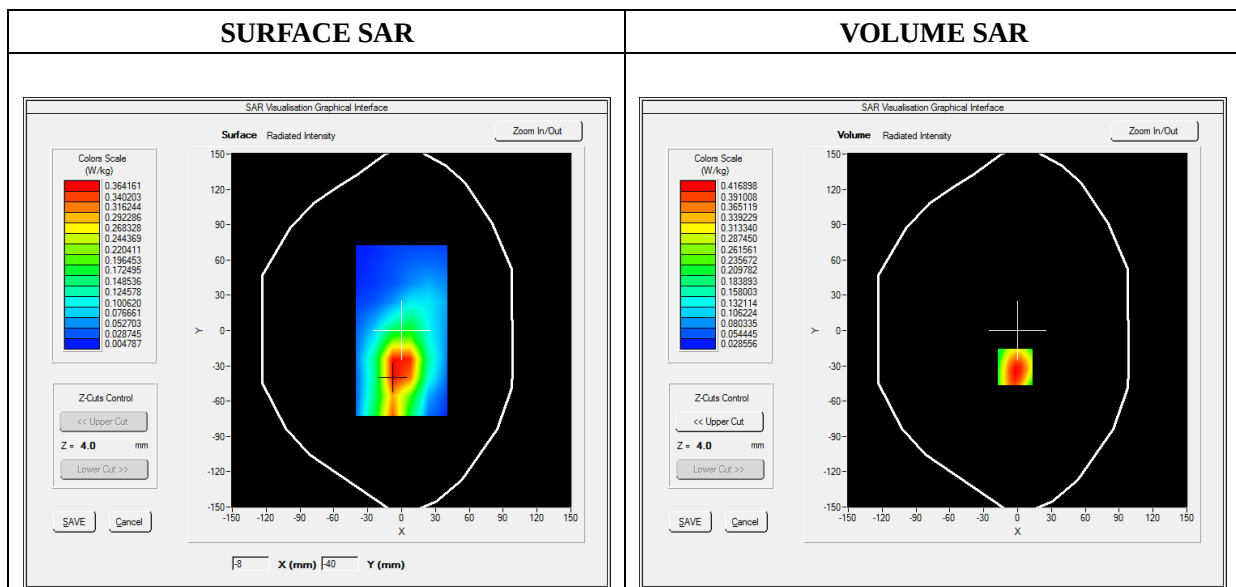

Maximum location: X=-2.00, Y=-31.00

SAR Peak: 0.65 W/kg

SAR 10g (W/Kg)	0.226024
SAR 1g (W/Kg)	0.393479

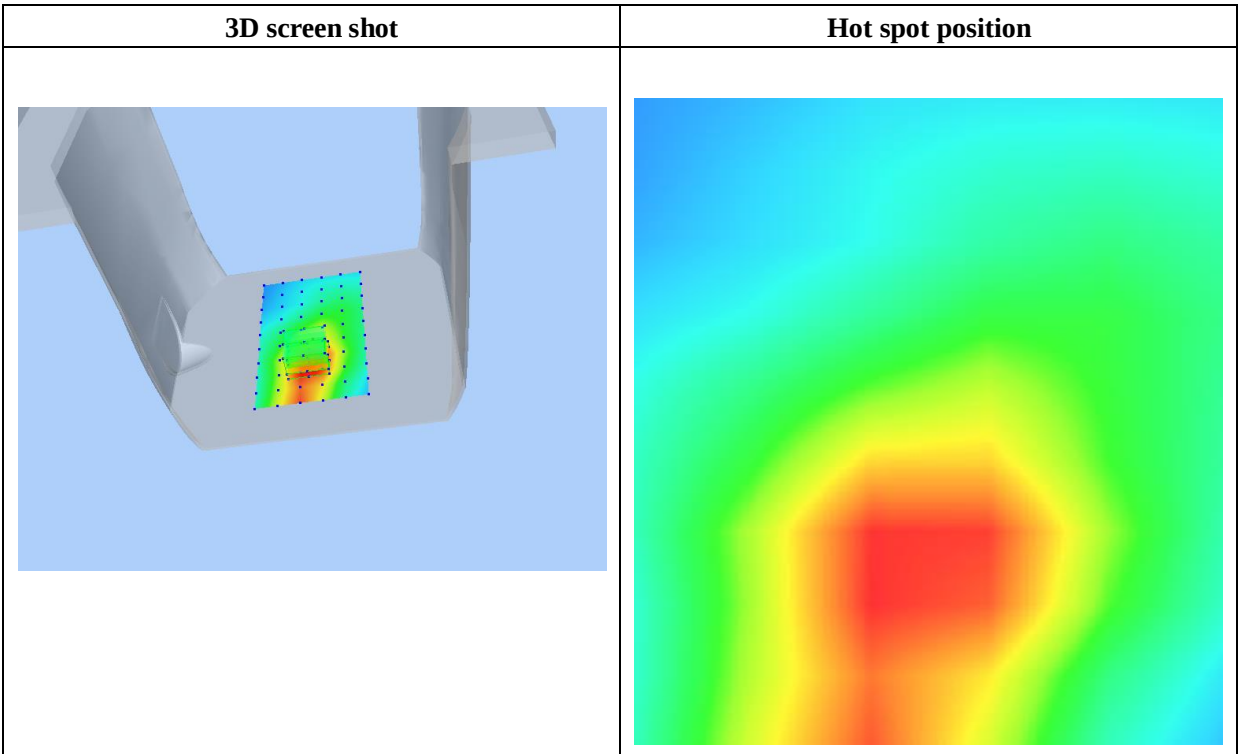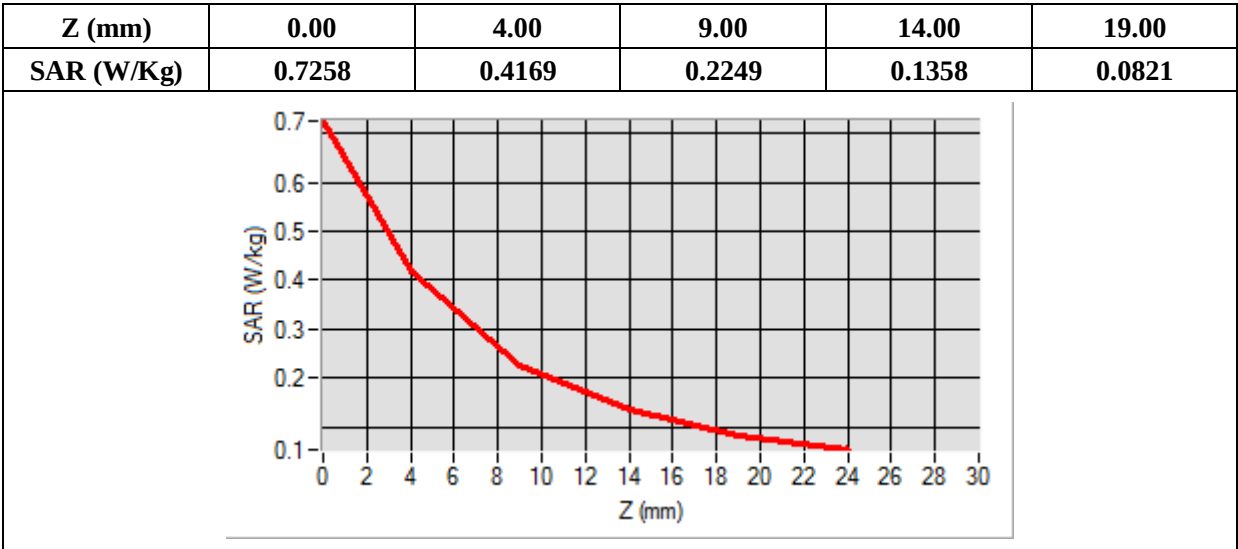

MEASUREMENT 36


Type: Phone measurement (Complete)
Date of measurement: 2021-04-30
Measurement duration: 12 minutes 3 seconds
E-field Probe: SN 09/13 EP168; ConvF: 5.37; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Flat Plane
Device Position	Left
Band	LTE Band 7
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2510.000000
Relative Permittivity (real part)	39.481257
Conductivity (S/m)	1.926332
Power Variation (%)	-2.210000
Ambient Temperature	21.9
Liquid Temperature	21.9

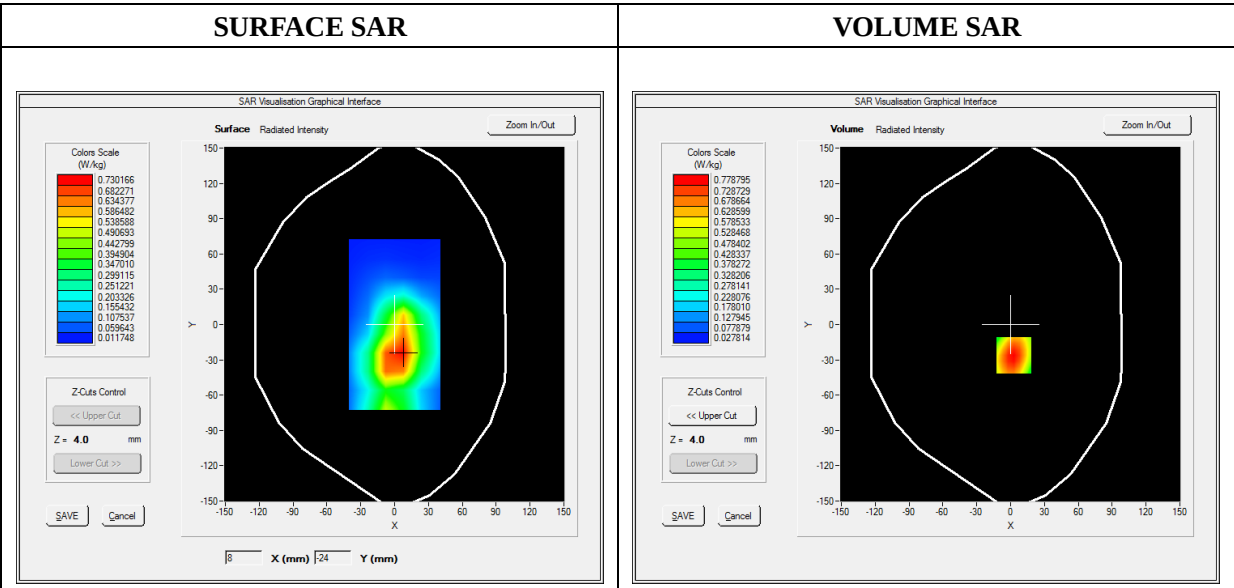

Maximum location: X=3.00, Y=-26.00

SAR Peak: 1.28 W/kg

SAR 10g (W/Kg)	0.401975
SAR 1g (W/Kg)	0.734006

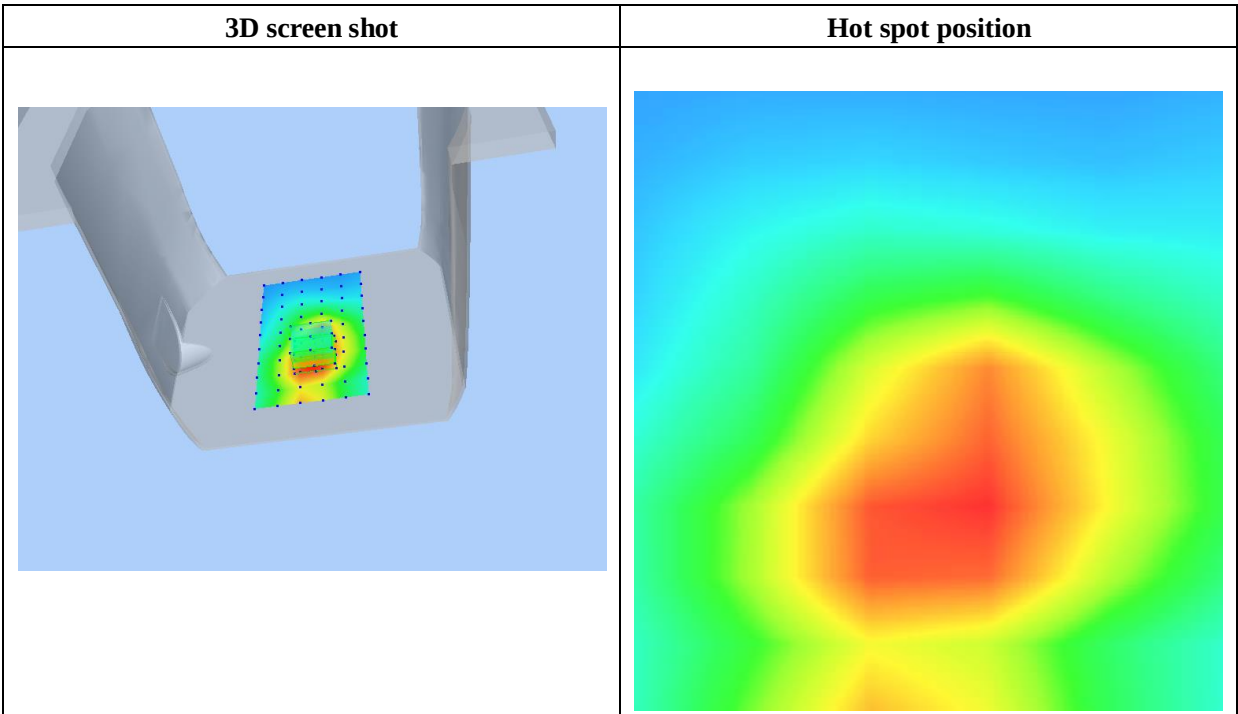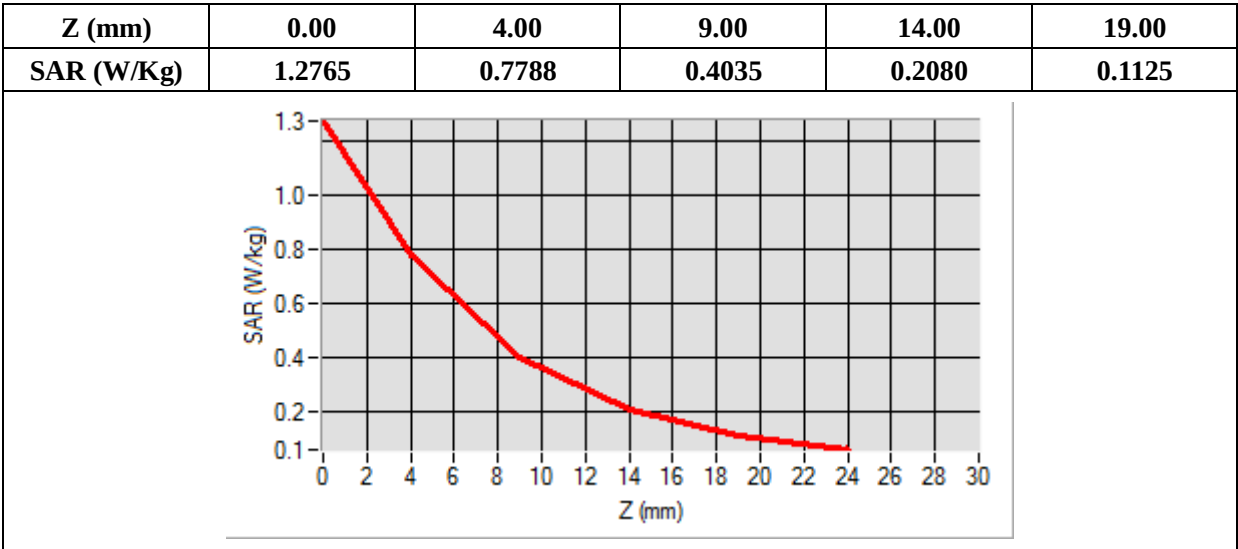

MEASUREMENT 37

Type: Phone measurement (Complete)

Date of measurement: 2021-04-30

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 09/13 EP168; ConvF: 5.37; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Flat Plane
Device Position	Left
Band	LTE Band 38
Channels	QPSK, 20MHz, 1RB,High
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2610.000000
Relative Permittivity (real part)	39.218356
Conductivity (S/m)	1.990324
Power Variation (%)	-0.800000
Ambient Temperature	21.9
Liquid Temperature	21.9

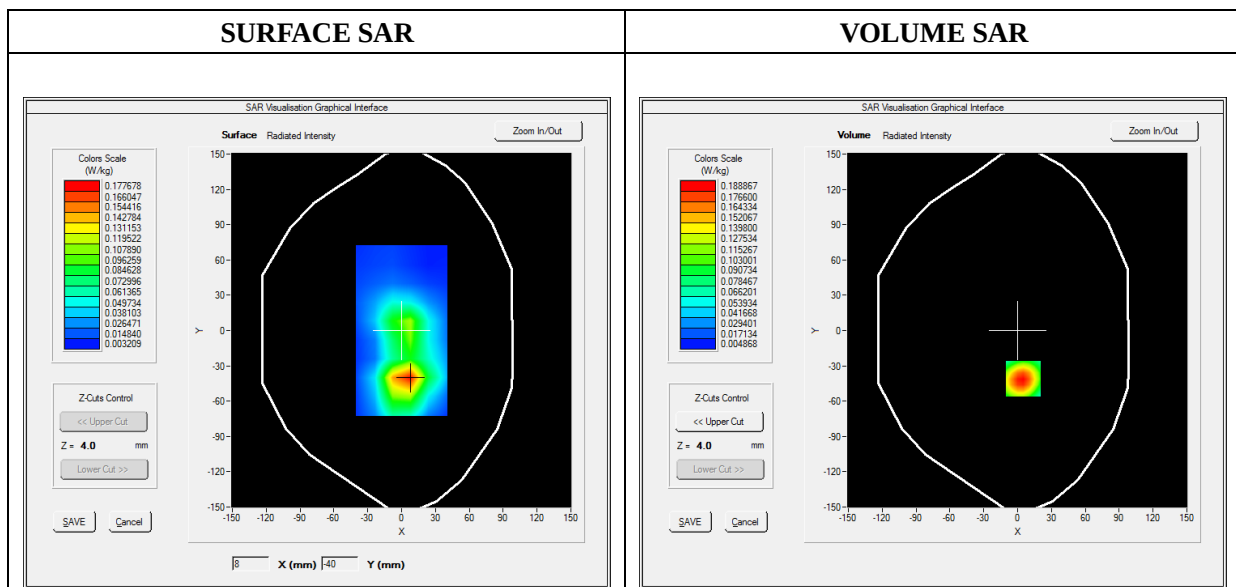

Maximum location: X=5.00, Y=-41.00

SAR Peak: 0.31 W/kg

SAR 10g (W/Kg)	0.092108
SAR 1g (W/Kg)	0.178967

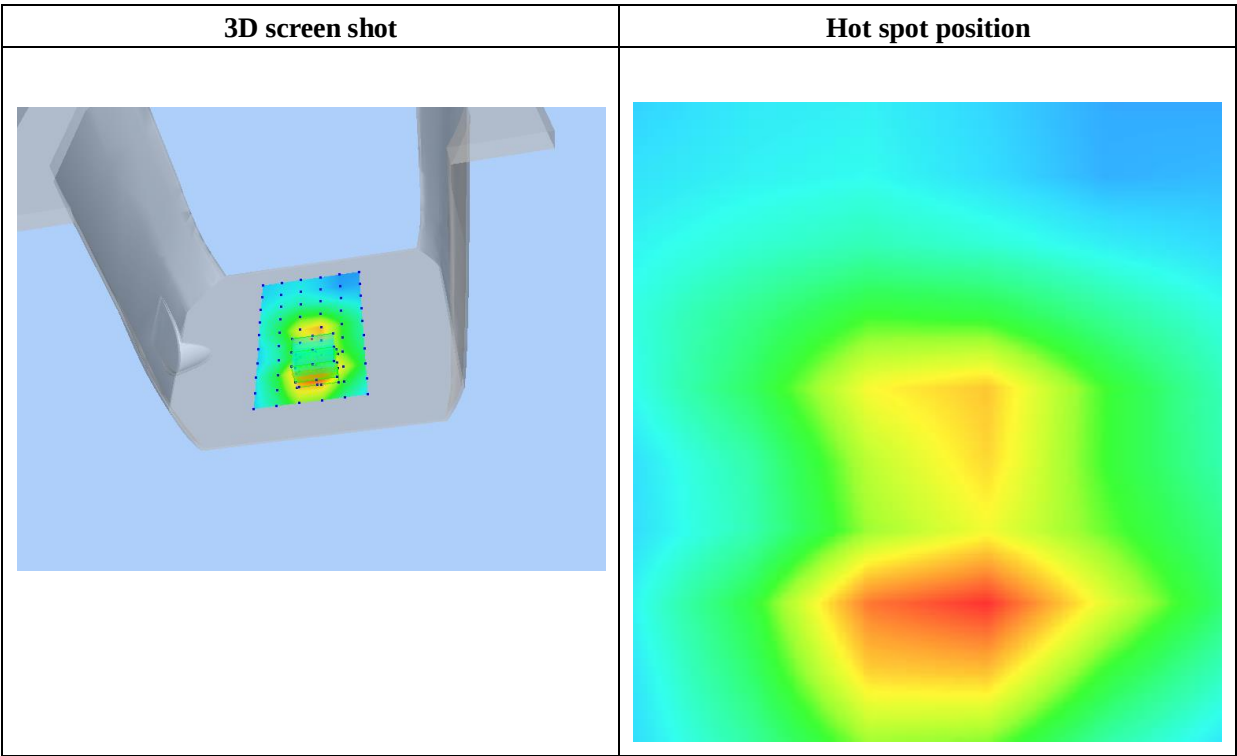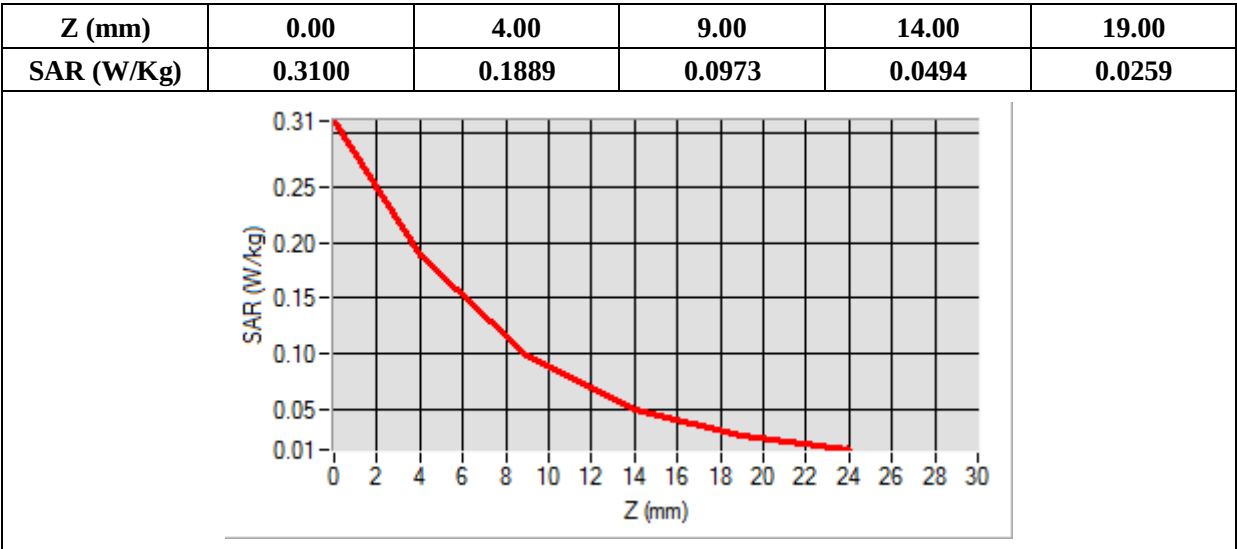

MEASUREMENT 38

Type: Phone measurement (Complete)

Date of measurement: 2021-04-30

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 09/13 EP168; ConvF: 5.64; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Flat Plane
Device Position	Left
Band	LTE Band 40 a
Channels	QPSK, 10MHz, 1RB,Middle
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	2310.000000
Relative Permittivity (real part)	40.382660
Conductivity (S/m)	1.730236
Power Variation (%)	-0.230000
Ambient Temperature	21.9
Liquid Temperature	21.9

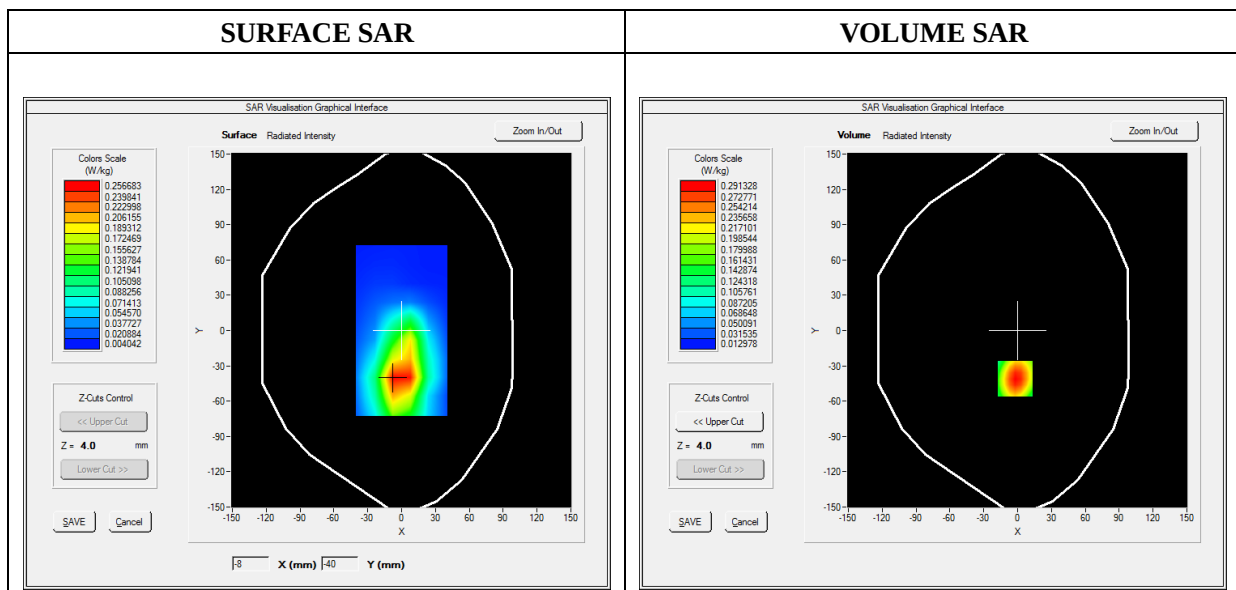

Maximum location: X=-2.00, Y=-41.00
SAR Peak: 0.46 W/kg

SAR 10g (W/Kg)	0.150212
SAR 1g (W/Kg)	0.272424

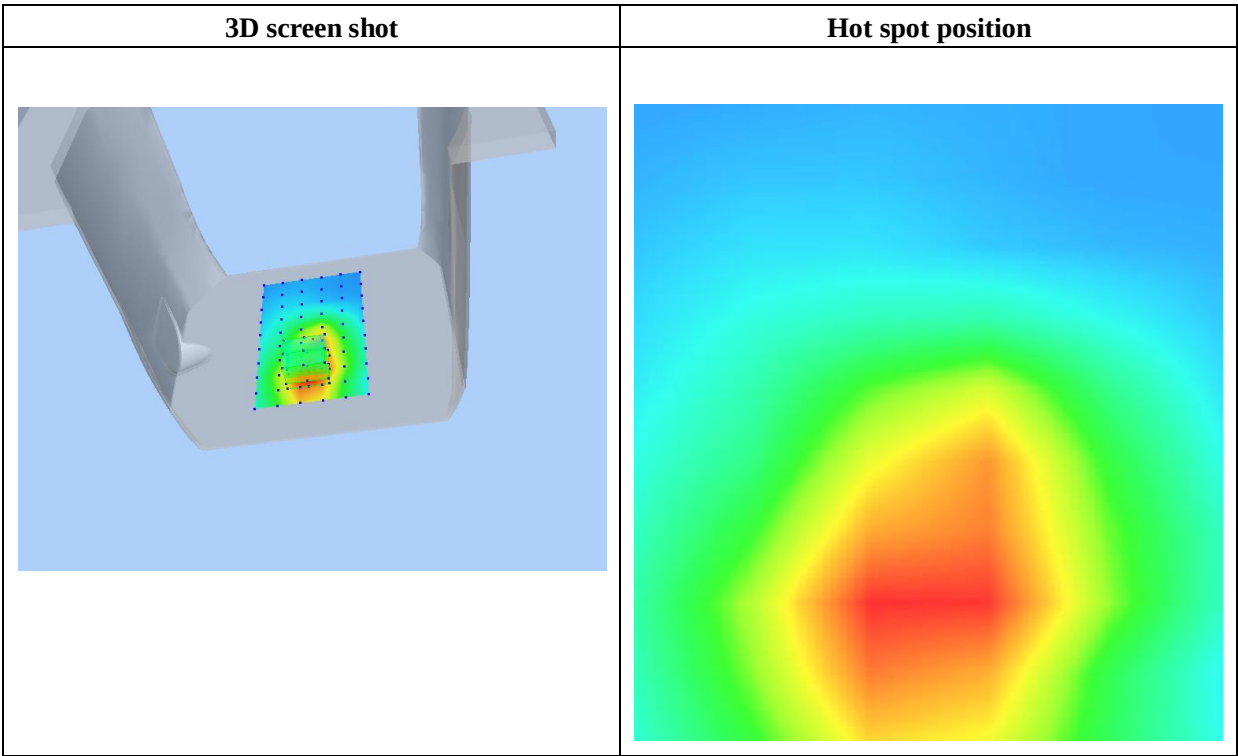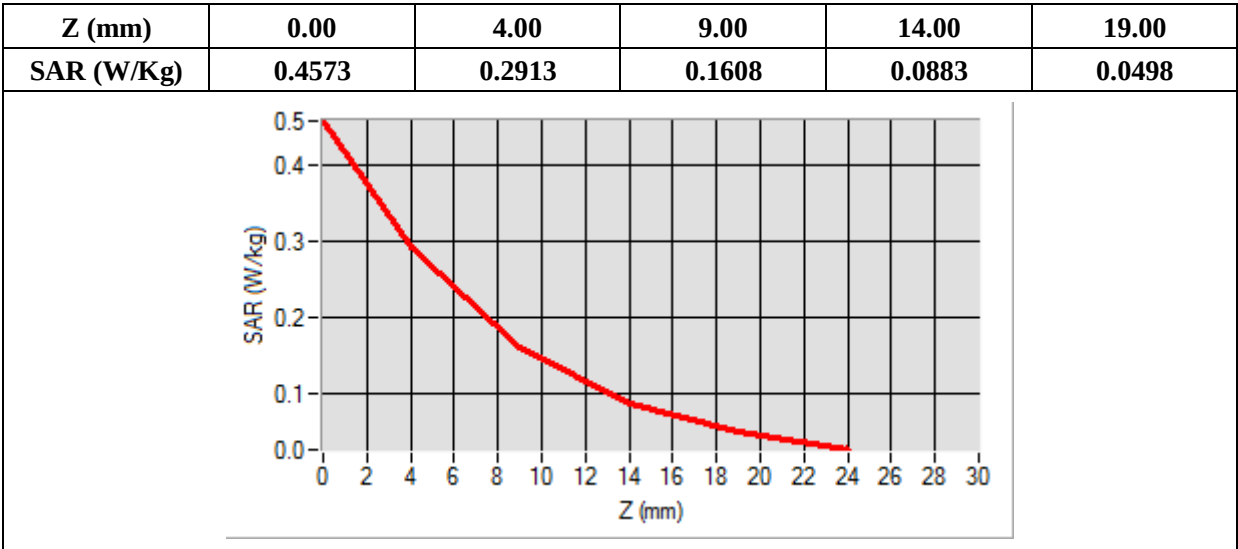

MEASUREMENT 39


Type: Phone measurement (Complete)
Date of measurement: 2021-04-30
Measurement duration: 12 minutes 3 seconds
E-field Probe: SN 09/13 EP168; ConvF: 5.64; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Flat Plane
Device Position	Left
Band	LTE Band 40 b
Channels	QPSK, 10MHz, 1RB,Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2355.000000
Relative Permittivity (real part)	40.521374
Conductivity (S/m)	1.750889
Power Variation (%)	-1.210000
Ambient Temperature	21.9
Liquid Temperature	21.9

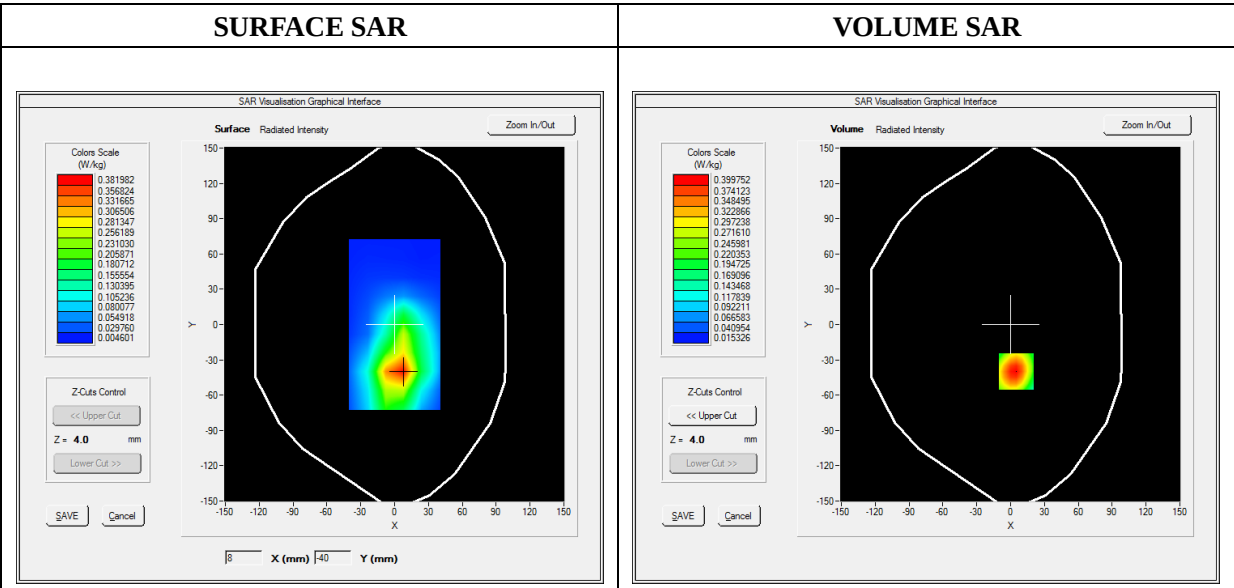

Maximum location: X=5.00, Y=-40.00

SAR Peak: 0.63 W/kg

SAR 10g (W/Kg)	0.205353
SAR 1g (W/Kg)	0.373145

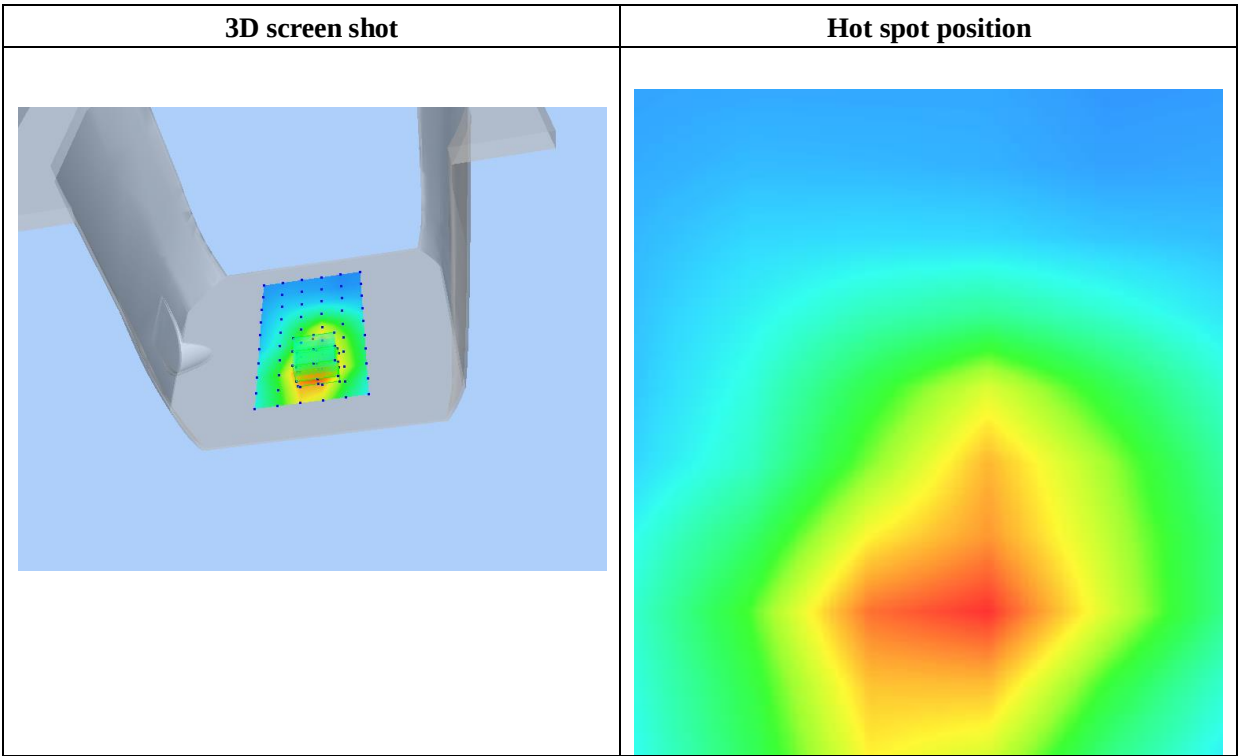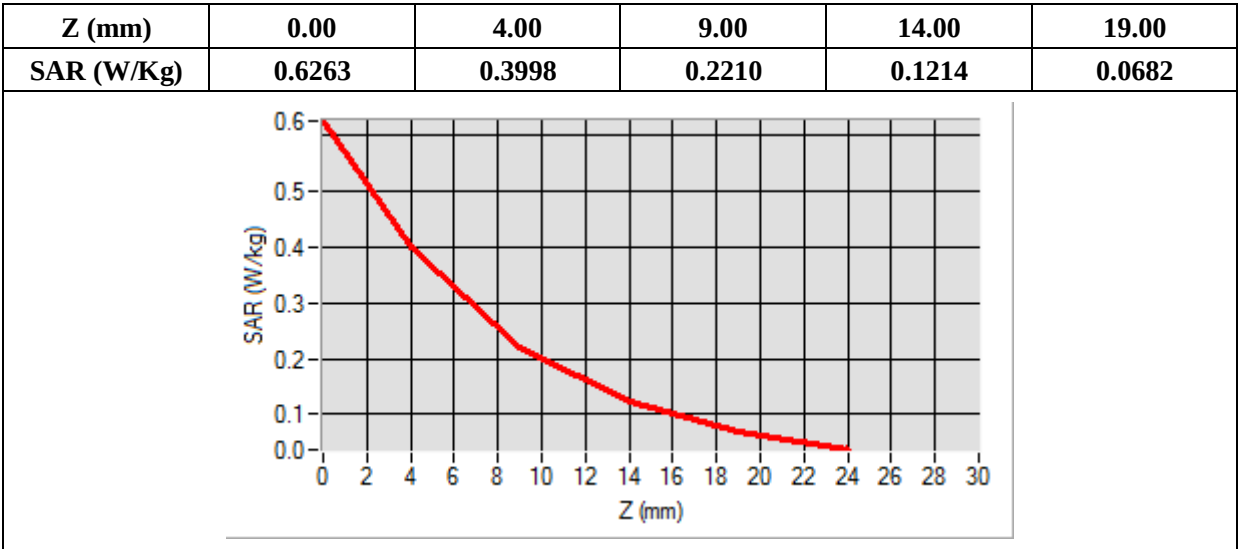

MEASUREMENT 40


Type: Phone measurement (Complete)
Date of measurement: 2021-04-30
Measurement duration: 12 minutes 3 seconds
E-field Probe: SN 09/13 EP168; ConvF: 5.37; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Flat Plane
Device Position	Left
Band	LTE Band 41
Channels	QPSK, 20MHz, 1RB,Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2593.000000
Relative Permittivity (real part)	39.218356
Conductivity (S/m)	1.990324
Power Variation (%)	-0.940000
Ambient Temperature	21.9
Liquid Temperature	21.9

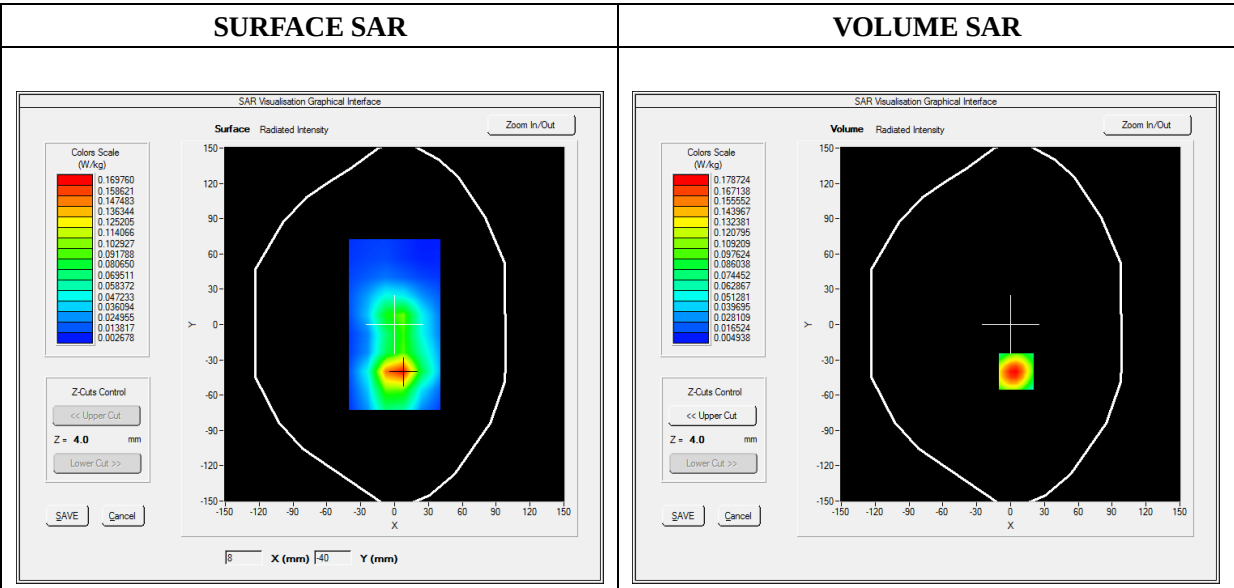

Maximum location: X=5.00, Y=-40.00

SAR Peak: 0.29 W/kg

SAR 10g (W/Kg)	0.087025
SAR 1g (W/Kg)	0.166651

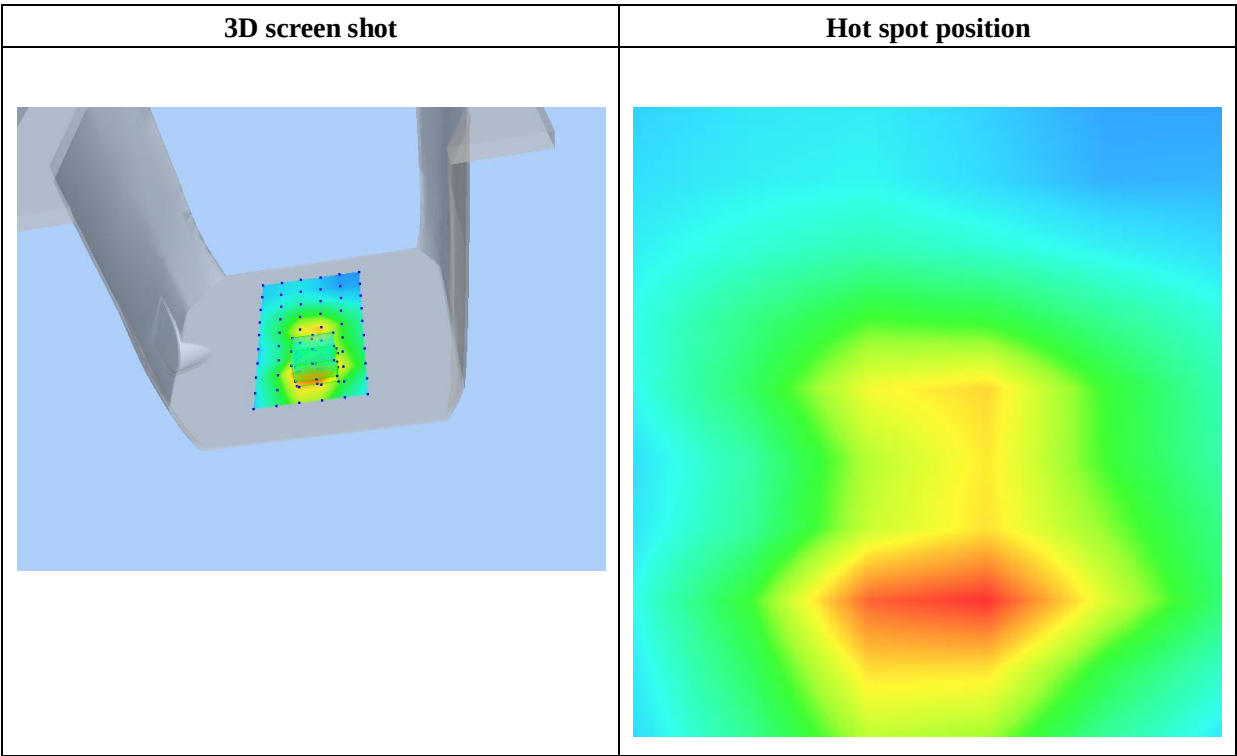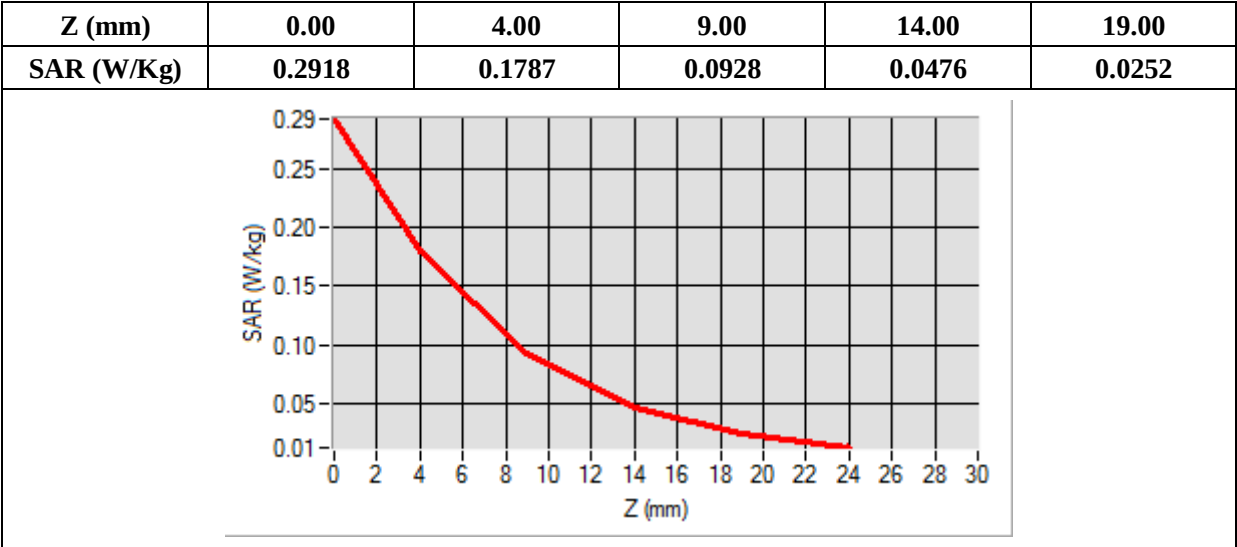

MEASUREMENT 41


Type: Phone measurement (Complete)
Date of measurement: 2021-04-30
Measurement duration: 12 minutes 3 seconds
E-field Probe: SN 09/13 EP168; ConvF: 5.64; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Flat Plane
Device Position	Left
Band	WiFi_802.11b
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2462.000000
Relative Permittivity (real part)	39.804726
Conductivity (S/m)	1.828174
Power Variation (%)	-0.860000
Ambient Temperature	21.9
Liquid Temperature	21.9

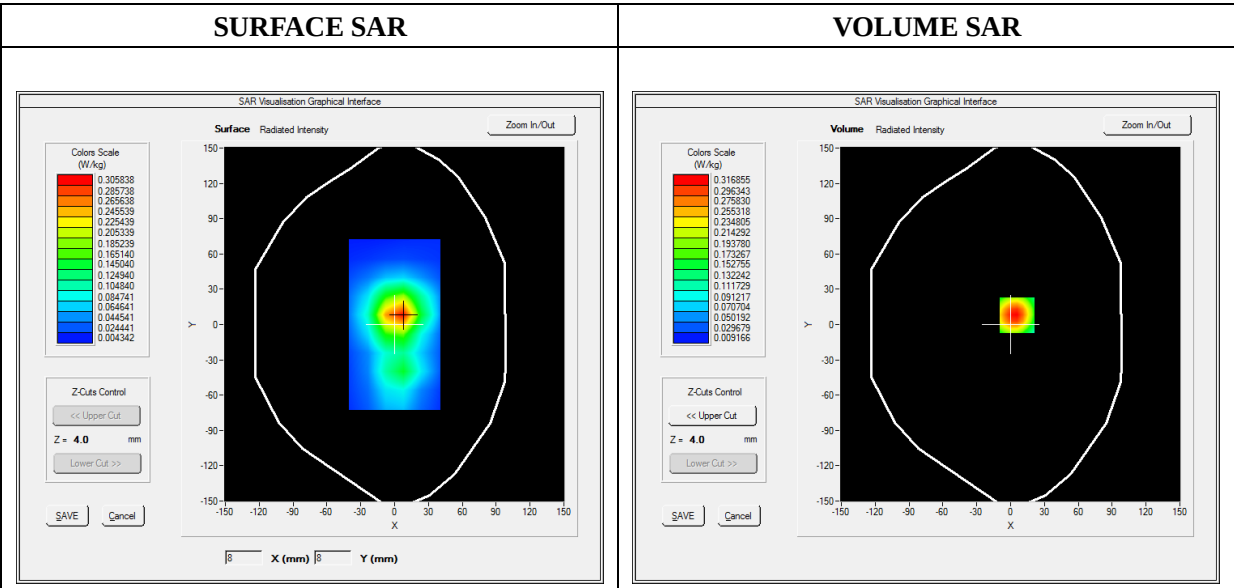

Maximum location: X=6.00, Y=8.00

SAR Peak: 0.54 W/kg

SAR 10g (W/Kg)	0.154331
SAR 1g (W/Kg)	0.296921

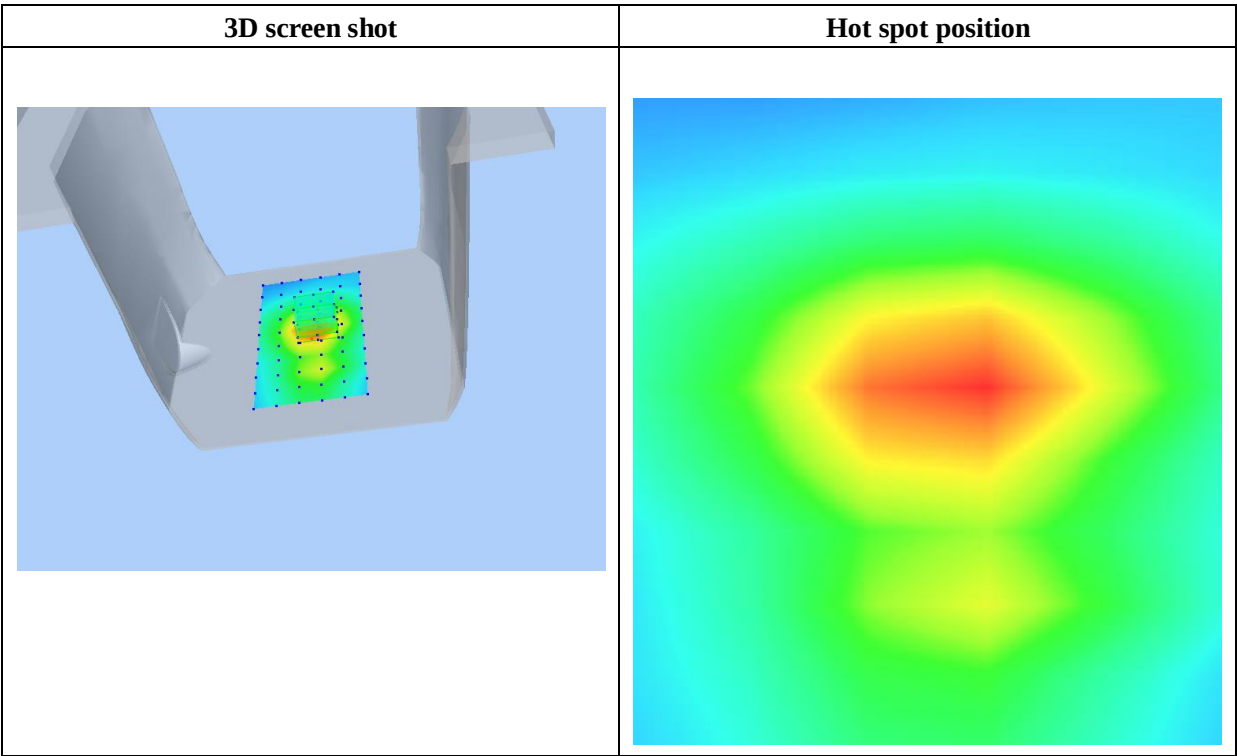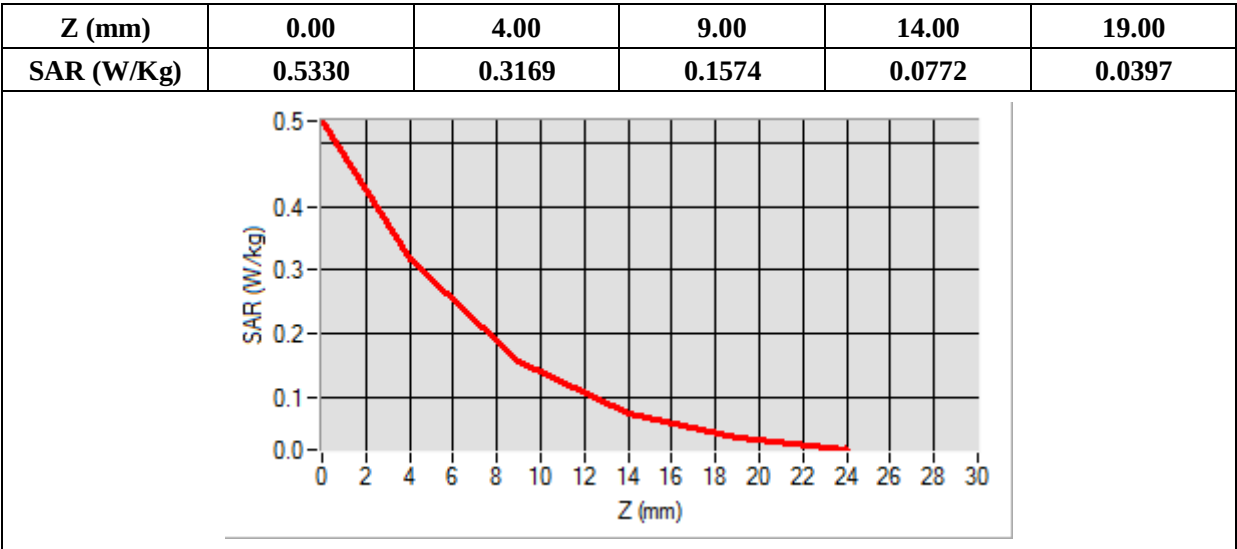

Annex C. EUT Photos


EUT View Front



EUT View Back




Antenna View

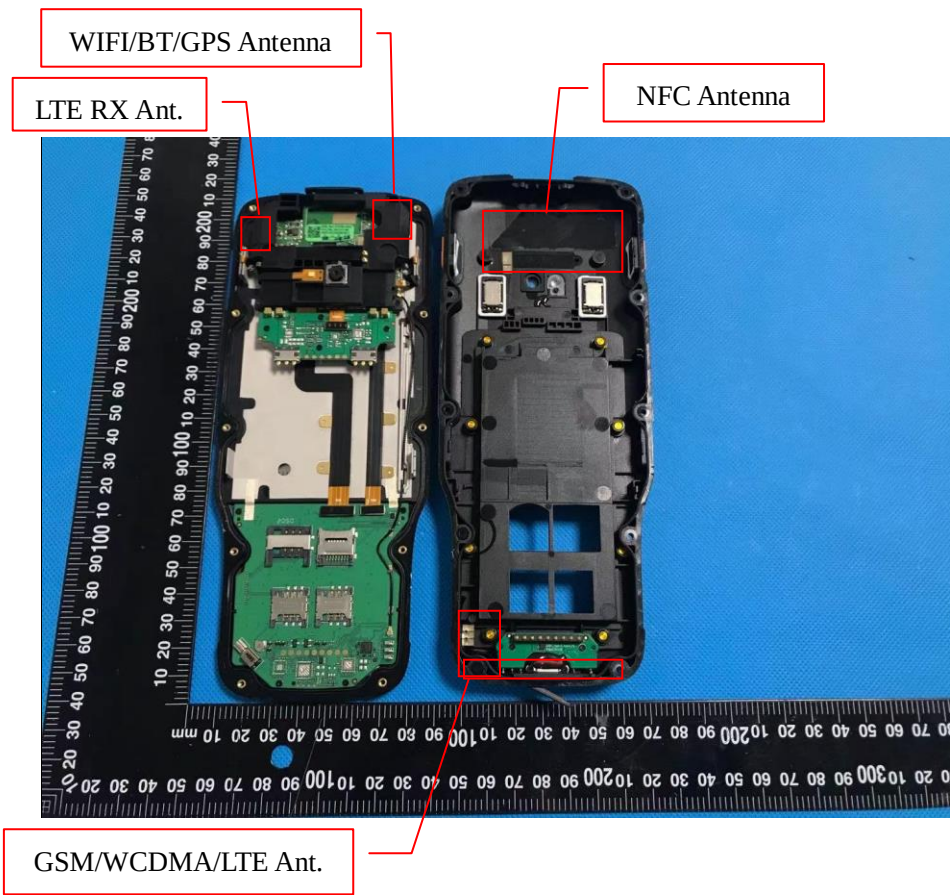


Annex D. Test Setup Photos

Head Exposure Conditions


Right Cheek

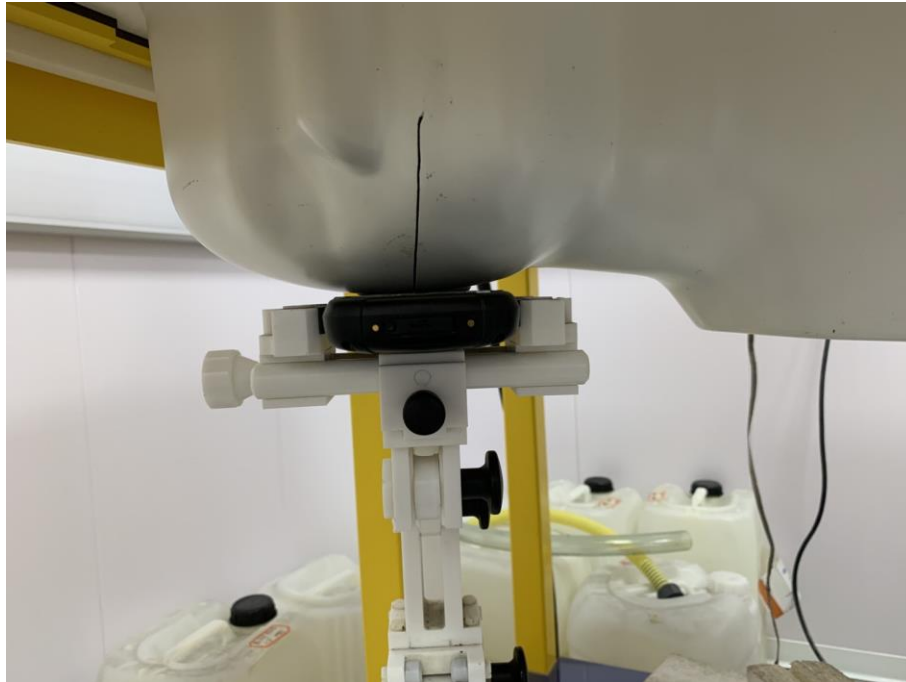


Right Tilt

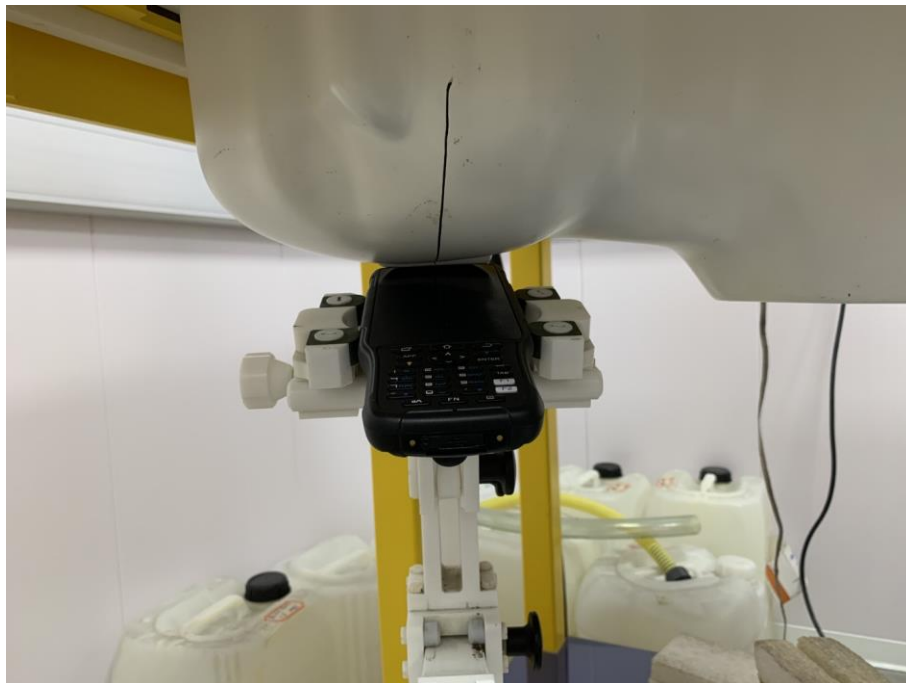

Left Cheek

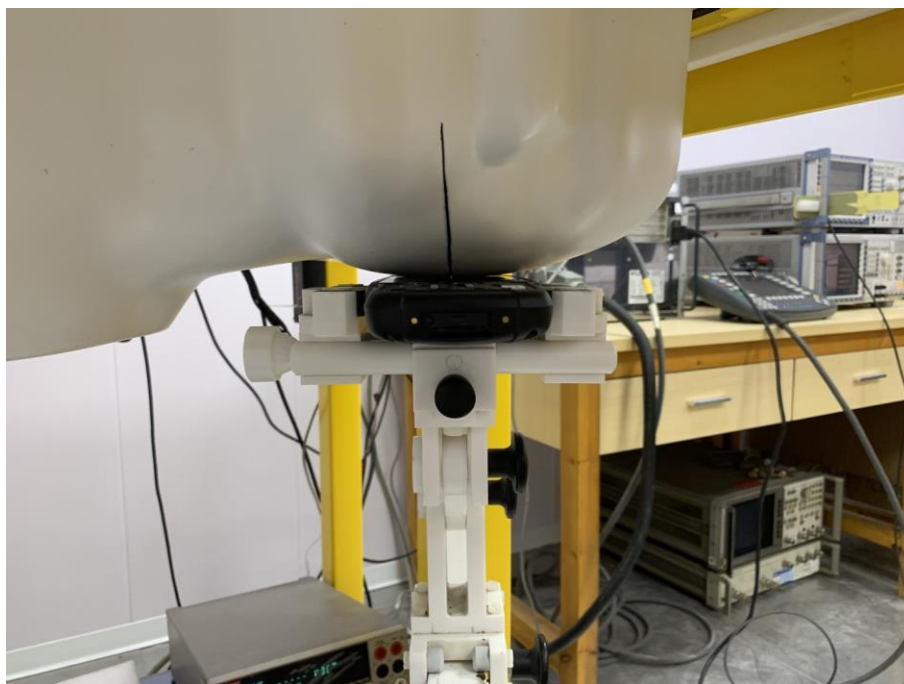

Left Tilt

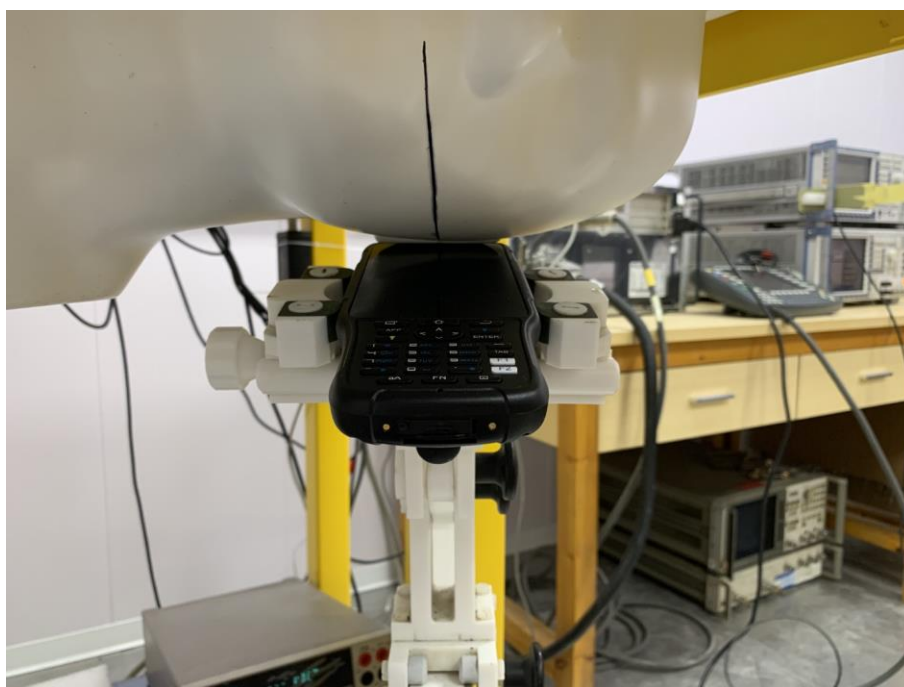

Body mode Exposure Conditions

Test distance: 10mm

Body Front



Body Back



Body Right




Body Left



Body Top



Body Bottom

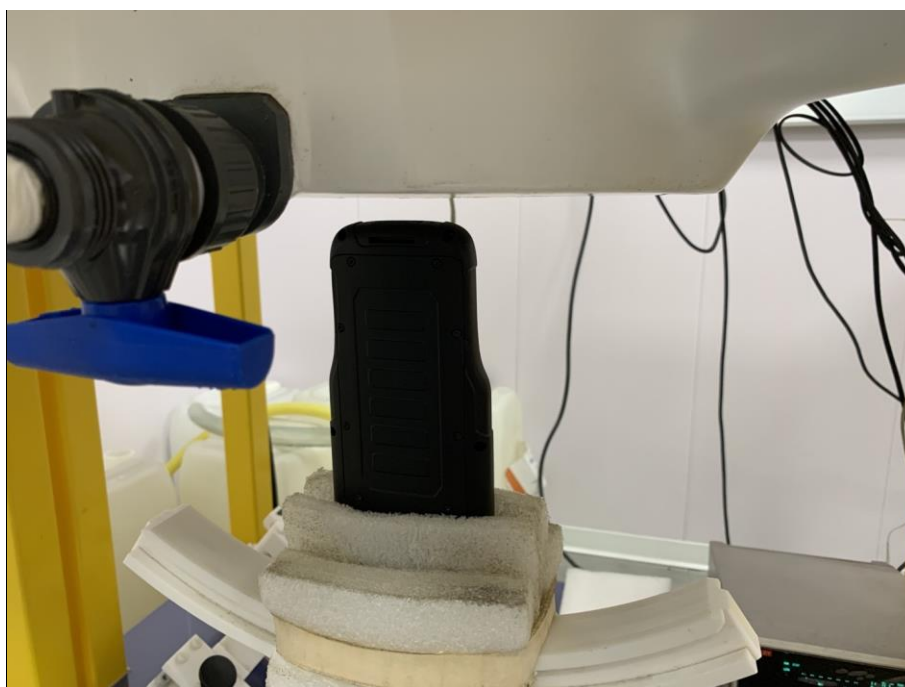

Annex E. Calibration Certificate

Please refer to the exhibit for the calibration certificate

******* END OF REPORT *******