

RADIO REPORT FCC 47 CFR Part 15C ISED Canada RSS-247 Frequency hopping systems operating within the 2400.0 MHz - 2483.5 MHz band	
Report Reference No	G0M-2302-1881-TFC247BL-W276-V03
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	    DAkkS - Registration number : D-PL-12092-01-03 (ISED) ISED Testing Laboratory site: 3470A DAkkS - Registration number : D-PL-12092-01-04 (FCC) FCC Filed Test Laboratory, Reg.-No.: 96970
Applicant	u-blox AG
Address	Zürcherstrasse 68 8800 Thalwil Switzerland
Test Specification	47 CFR Part 15C RSS-247, Issue 2, 2017-02 RSS-Gen, Issue 5, Amendment 2, 2021-02
Non-Standard Test Method	None
Equipment under Test (EUT):	
Product Description	MAYA-W2 host-based multiradio modules
Model(s)	MAYA-W276-00B
Additional Model(s)	None
Brand Name(s)	u-blox
Hardware Version(s)	02
Software Version(s)	1.0.0.39.1-18.80.1.p154.38
FCC ID	XPYMAYAW2B
IC	8595A-MAYAW2B
Test Result	PASSED

Possible test case verdicts:		
Required by standard but not tested	N/T	
Not required by standard	N/R	
Not applicable to EUT	N/A	
Test object does meet the requirement	P(PASS)	
Test object does not meet the requirement	F(FAIL)	
Testing:		
Test Lab Temperature	20 °C - 30 °C	
Test Lab Humidity	25 % - 55 %	
Date of receipt of test item	2023-03-02	
Report:		
Compiled by	Radwan Jaafar	
Responsible for test (+ signature) (Senior Expert Engineer)	Radwan Jaafar	
Approved by (+ signature) (Test Lab Engineer)	Wilfried Treffke	
Date of Issue	2023-12-05	
Total number of pages	140	
General Remarks:		
The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.		
Additional Comments:		

ADDITIONAL VARIANTS

Additional Variants (not tested and not evaluated variants)		
Not-tested Variant	Description	
1	Product Type Description	Host-based multiradio module
	Model name	MAYA-W266-00B
	Brand name	u-blox
	Hardware Version	02
	Software Version	1.0.0.39.1-18.80.1.p154.38
	FCC ID	XPYMAW2B
	IC	8595A-MAYAW2B
	PMN	MAYA-W266-00B
	HVIN	MAYA-W266-00B
	FVIN	N/A
	HMN	N/A
Comment: Those named additional variants above have not been tested. Those additional variants of the series have been declared by the manufacturer. The test report explicitly states that those variants were neither tested nor assessed nor evaluated.		

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2023-11-02	Initial Release	--
02	2023-11-30	Replaced document: G0M-2302-1881-TFC247BL-W276-V01 Replaced by: G0M-2302-1881-TFC247BL-W276-V02 Reason: Correction of the model name and FVIN of the EUT.	R. Jaafar
03	2023-12-05	Replaced document: G0M-2302-1881-TFC247BL-W276-V02 Replaced by: G0M-2302-1881-TFC247BL-W276-V03 Reason: - Correction of the module name in the plots. - Editorial correction to AC powerline conducted emissions at section 3.5. - Add EIRP test results for IC at section 3.3.	R. Jaafar

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
RBW	Resolution bandwidth
RMS	Root mean square
VBW	Video bandwidth
V _{NOM}	Nominal supply voltage

REPORT INDEX

1	Equipment (Test Item) Under Test.....	7
1.1	Photos – Equipment External	8
1.2	Photos – Equipment Internal	15
1.3	Support Equipment.....	17
1.4	Test Modes	18
1.5	Test Frequencies.....	19
1.6	Sample emission level calculation.....	20
2	Result Summary.....	21
3	Test Conditions and Results.....	22
3.1	Test Conditions and Results - Occupied bandwidth.....	22
3.2	Test Conditions and Results - 6 dB bandwidth.....	30
3.3	Test Conditions and Results - Maximum peak conducted output power	38
3.4	Test Conditions and Results - Power spectral density	46
3.5	Test Conditions and Results - AC powerline conducted emissions.....	54
3.6	Test Conditions and Results - Band-edge compliance.....	61
3.7	Test Conditions and Results - Conducted spurious emissions.....	67
3.8	Test Conditions and Results - Transmitter radiated emissions	75
3.9	Test Conditions and Results - Receiver radiated emissions	82
ANNEX A	Transmitter spurious emissions (with Antenna-1)	87
ANNEX B	Transmitter spurious emissions (With Antenna-2).....	110
ANNEX C	Receiver spurious emissions (with Antenna-1)	135
ANNEX D	Receiver spurious emissions (with Antenna-2)	138

1 Equipment (Test Item) Under Test

Description	MAYA-W2 host-based multiradio modules		
Model	MAYA-W276-00B		
Additional Model(s)	None		
Brand Name(s)	u-blox		
Sample Identification	EUT	Sample-ID	Serial Number
	Radiated with embedded antenna	44078	AW86C1DEB9615900400
	conducted, and radiated with external antenna	43211	AW86C1DEB95988C0300
Hardware Version(s)	02		
Software Version(s)	1.0.0.39.1-18.80.1.p154.38		
PMN	MAYA-W276-00B		
HVIN	MAYA-W276-00B		
FVIN	N/A		
HMN	N/A		
FCC ID	XPYMAYAW2B		
IC	8595A-MAYAW2B		
Equipment type	Radio Module		
Radio type	Transceiver		
Assigned frequency bands	2400.0 MHz - 2483.5 MHz		
Radio technology	Bluetooth LE 5.3		
Bluetooth Specification	LE 1M PHY		Yes
	LE 2M PHY		Yes
	LE Coded PHY S=8 (125 kbit)		Yes
	LE Coded PHY S=2 (500 kbit)		Yes
	Stable Modulation Index - Transmitter		No
	Stable Modulation Index - Receiver		Yes
Modulation	GFSK		
Number of antenna ports	1		
Antenna-1	Type	External	
	Model	ANT-DB1-RAF-SMA	
	Manufacturer	Linx Technologies	
	Gain	4.1 dBi (customer declaration)	
Antenna-2	Type	Integrated	
	Model	custom	
	Manufacturer	ProAnt AB	
	Gain	-4.1 dBi (customer declaration)	
Supply Voltage (1st port)	V _{NOM}	3.3 VDC	
Supply Voltage (2nd port)	V _{NOM}	1.8 VDC	
Operating Temperature	T _{NOM}	20 °C	
AC/DC-Adaptor	Model	None	
Manufacturer	u-blox AG Zürcherstrasse 68 8800 Thalwil Switzerland		

1.1 Photos – Equipment External

EUT top view

Photos deleted.
Refer to separate photo exhibits.

EUT overview - with embedded antenna

Photos deleted.

Refer to separate photo exhibits.

EUT overview - with external antenna

Photos deleted.

Refer to separate photo exhibits.

Evaluation board top view

Photos deleted.
Refer to separate photo exhibits.

Evaluation board side view

Photos deleted.

Refer to separate photo exhibits.

Data cable

Photos deleted.
Refer to separate photo exhibits.

Power adapter

Photos deleted.

Refer to separate photo exhibits.

1.2 Photos – Equipment Internal

RF Module-MW276 (length)

Photos deleted.
Refer to separate photo exhibits.

RF Module-MW276 (width)

Photos deleted.

Refer to separate photo exhibits.

1.3 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
AE	Notebook	Dell	Latitude E7250	For configuring test modes
AE	Evaluation Board	u-blox		
CBL	USB-C	---	---	Connection between evaluation board and EUT
CBL	Data cable	---	---	
CBL	SBI cable			
CBL	Ethernet	---	---	Connection between evaluation board and notebook
AE	AC/DC Adapter	EDACPOWER ELECT.	EA1045CR	To power the evaluation board
SFT	Terminal	Debian / Linux	---	For test mode activation
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
SFT	Software			
Comment:				

1.4 Test Modes

Mode	Description
1 Mbps	Mode = Transmit Modulation = GFSK Packet Type = PRBS9 Packet Length = 193 Bytes Spreading = None Duty cycle = 87 % Pmax = 19 dBm
2 Mbps	Mode = Transmit Modulation = GFSK Packet Type = PRBS9 Packet Length = 250 Bytes Spreading = None Duty cycle = 43 % Pmax = 19 dBm
Receive	Mode = Receive
Note: Coded S2 and S8 are not part of the test scope.	
Comment: The above settings were found as worst case by evaluation of the output power.	

1.5 Test Frequencies

Designator	Mode	Channel	Frequency [MHz]
F1	Tx	0	2402
F2	Tx / Rx	19	2440
F3	Tx	39	2480

1.6 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB μ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Field strength limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Field strength limit (dB}\mu\text{V/m)} = 20 \cdot \log (\mu\text{V/m})$$

Example only for radiated field strength:

Reading + AF	= Net Reading	:	Net reading	- Field strength limit	= Margin
+21.5 dB μ V	+ 26 dB/m	:	47.5 dB μ V/m	- 57.0 dB μ V/m	= -9.5

2 Result Summary

FCC 47 CFR Part 15C, ISED RSS-247				
Product Standard Reference	Requirement	Reference Method	Result	Remarks
ISED RSS-Gen, Issue 5 A2 (section 6.7)	Occupied Bandwidth	ANSI C63.10-2013	PASS	Informational only
FCC § 15.247(a)(2) ISED RSS-247, Issue 2 (section 5.2)	6 dB Bandwidth	ANSI C63.10-2013	PASS	
FCC § 15.247(b) ISED RSS-247, Issue 2 (section 5.4)	Maximum peak conducted power	ANSI C63.10-2013	PASS	
FCC § 15.247(e) ISED RSS-247, Issue 2 (section 5.2)	Power spectral density	ANSI C63.10-2013	PASS	
FCC § 15.207 ISED RSS-247, Issue 2 (section 3.1)	AC power line conducted emissions	ANSI C63.10-2013	PASS	
FCC § 15.247(d) ISED RSS-247, Issue 2 (section 5.5)	Band edge compliance	ANSI C63.10-2013	PASS	
FCC § 15.247(d) ISED RSS-247, Issue 2 (section 5.5)	Conducted spurious emissions	ANSI C63.10-2013	PASS	
FCC § 15.247(d) FCC § 15.209 ISED RSS-Gen, Issue 5 A2 (section 6.13)	Transmitter radiated spurious emissions	ANSI C63.10-2013	PASS	
ISED RSS-247, Issue 2 (section 3.1)	Receiver radiated spurious emissions	ANSI C63.4-2014	PASS	
Comment: The Decision Rule is applied on the basis of ETSI TR 102 273 and ETSI TR 100 028. These standards provide guidance on how to calculate and apply measurement uncertainty whilst providing maximum uncertainties allowance. In all cases due consideration will be given to ILAC-G8:09/2019. Where a result is considered conditional in respect of its proximity to the limit line, the customer would be made aware of situation so that they can make an informed decision on how to proceed.				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object

3 Test Conditions and Results

3.1 Test Conditions and Results - Occupied bandwidth


3.1.1 Information

Test Information	
Reference	ISED RSS-Gen, Issue 5 A2 (section 6.7)
Measurement Method	ANSI C63.10 6.9.3
Measurement Uncertainty	$\pm 1.26 \%$
Test Sample ID	43211
Operator	Radwan Jaafar
Date	2023-03-09

3.1.2 Limits

Limits
None (Informational only)

3.1.3 Setup

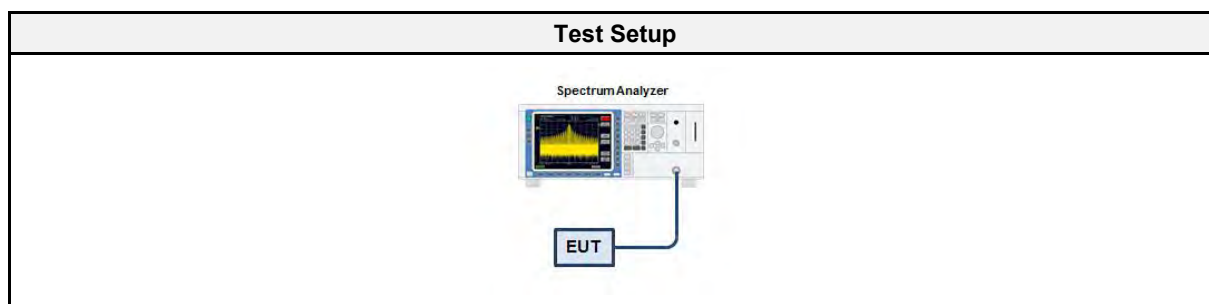

3.1.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyser	R&S	FSU 26	EF01003	2022-07	2023-07
Cable (CAABB)	Gigalane	GIGALANE 1730	EF00779	2023-03	2024-03

3.1.5 Procedure

Test Procedure
1. EUT transmitter is activated in test mode under normal conditions 2. The spectrum analyzer is set to peak detection and maximum hold with a span twice the emission spectrum 3. The resolution bandwidth is set to the range of 1 % to 5 % of the occupied bandwidth 4. The occupied bandwidth is measured with the build-in analyzer function


3.1.6 Results

Test Results 1 Mbps		
Mode	Frequency [MHz]	Bandwidth [MHz]
GFSK	2402	1.040
GFSK	2440	1.040
GFSK	2480	1.040

Test Results 2 Mbps		
Mode	Frequency [MHz]	Bandwidth [MHz]
GFSK	2402	2.070
GFSK	2440	2.070
GFSK	2480	2.070

Occupied Bandwidth


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-09
 Note: PHY 1 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Occupied Bandwidth [MHz]: 1.040

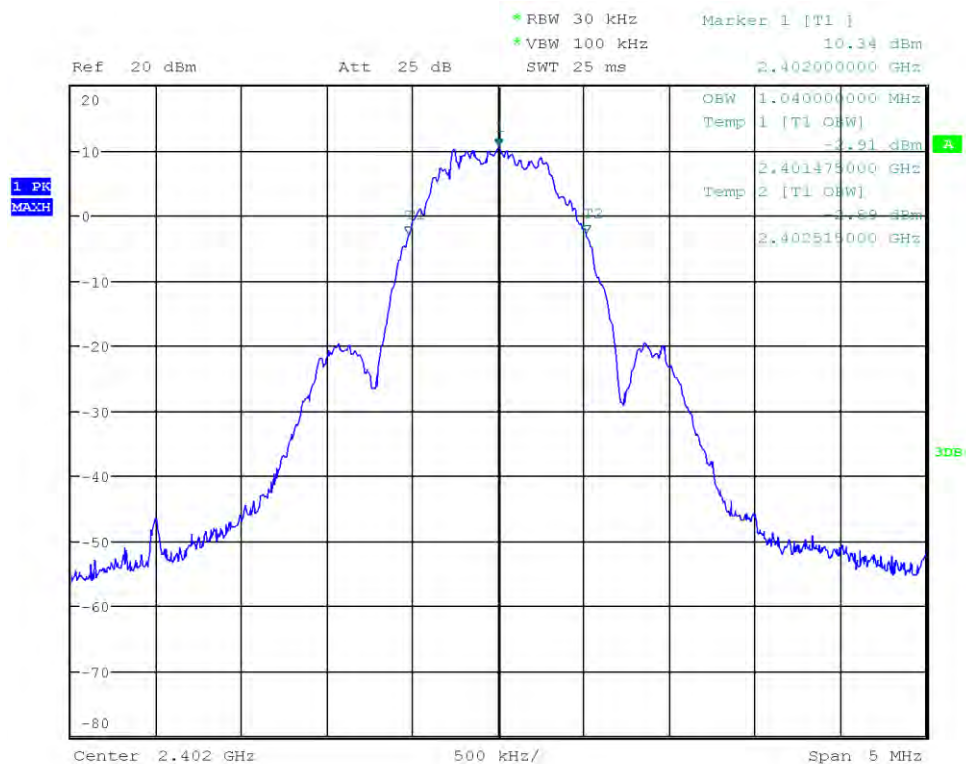

Date: 9.MAR.2023 10:14:41

Occupied Bandwidth


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-09
 Note: PHY 1 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Occupied Bandwidth [MHz]: 1.040

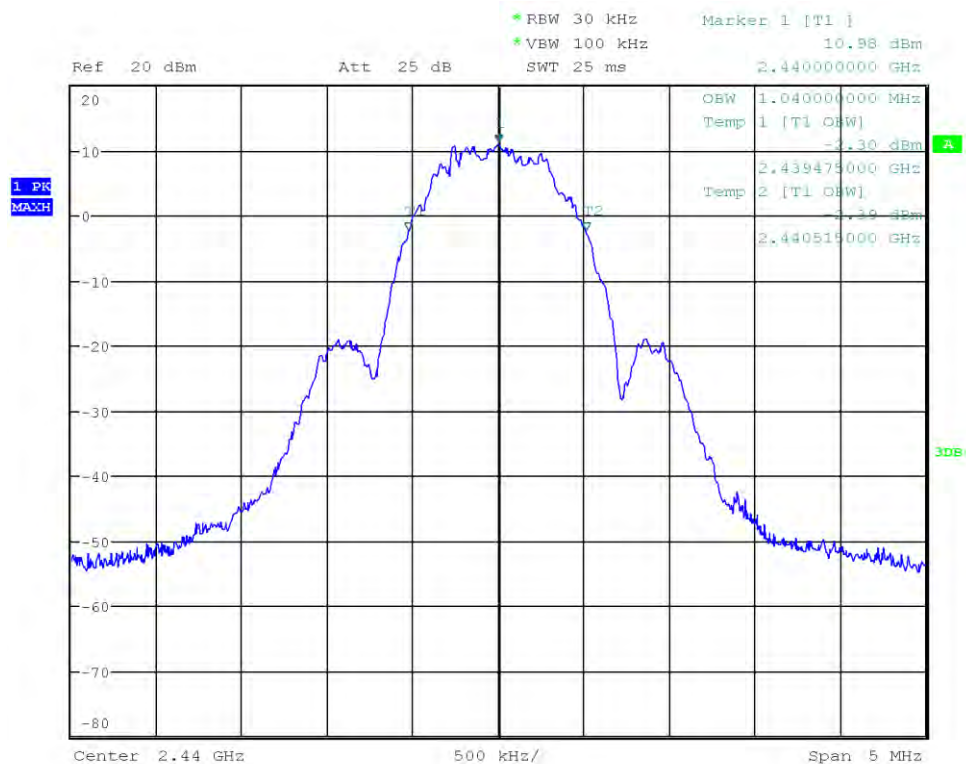

Date: 9.MAR.2023 10:19:15

Occupied Bandwidth


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-09
 Note: PHY 1 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Occupied Bandwidth [MHz]: 1.040

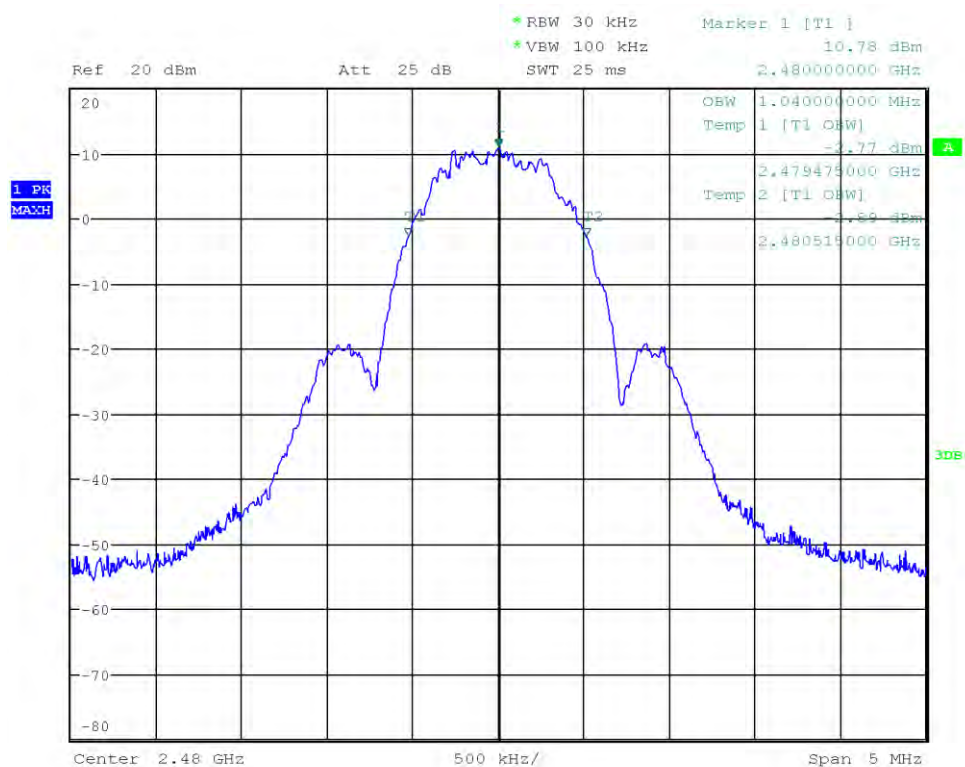

Date: 9.MAR.2023 10:21:44

Occupied Bandwidth


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-09
 Note: PHY 2 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Occupied Bandwidth [MHz]: 2.070

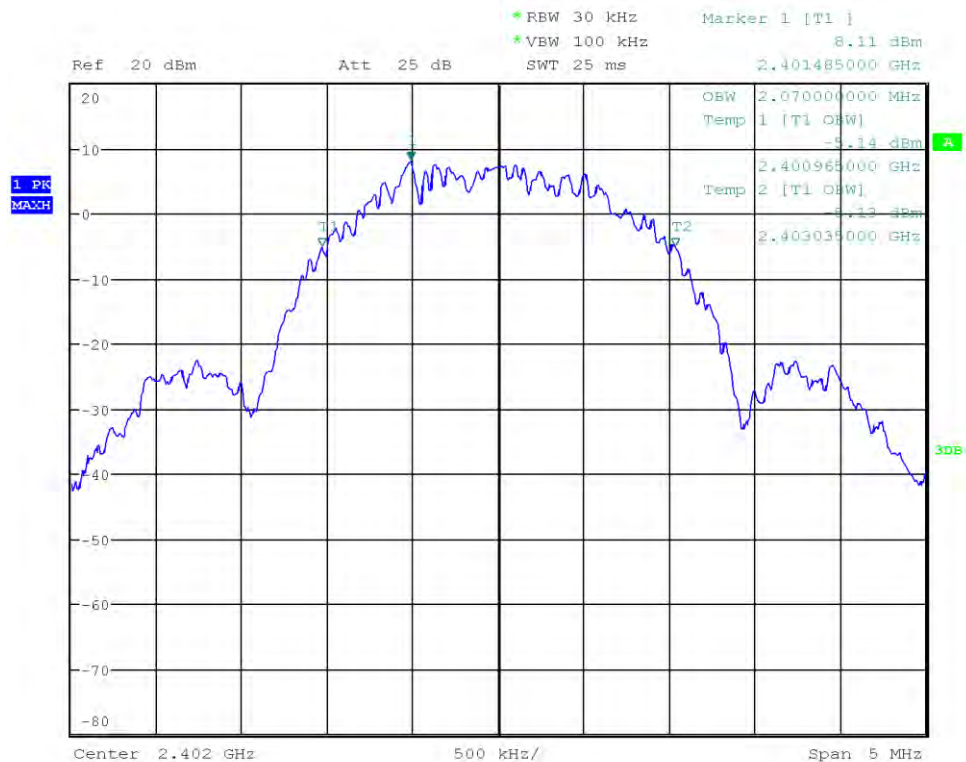

Date: 9.MAR.2023 10:25:53

Occupied Bandwidth


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-09
 Note: PHY 2 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Occupied Bandwidth [MHz]: 2.070

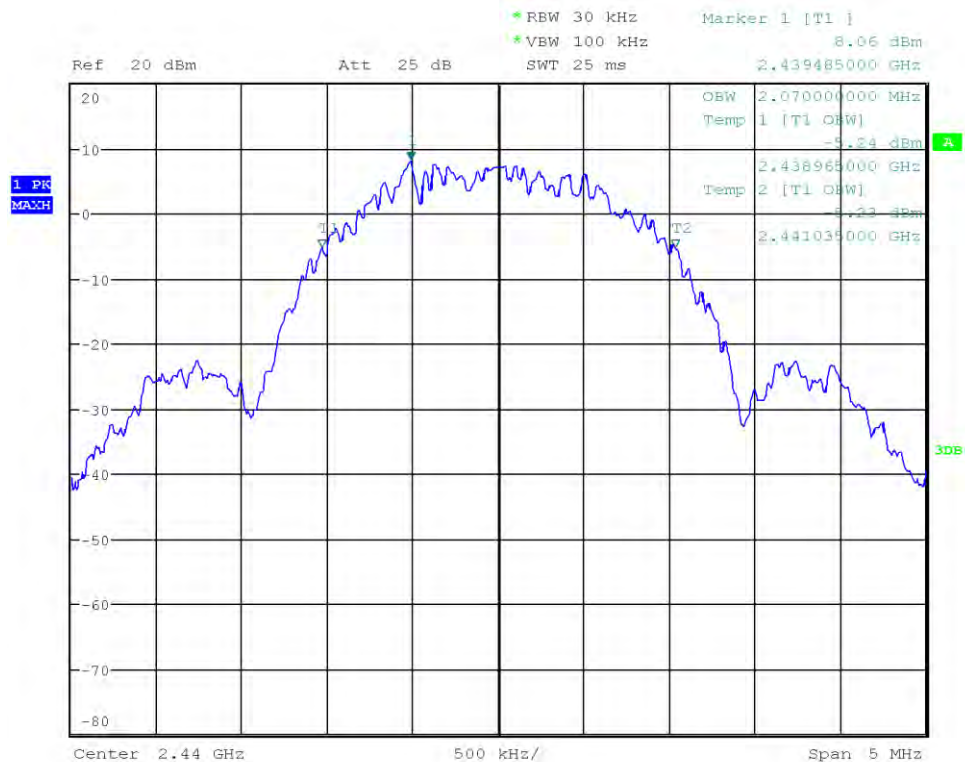

Date: 9.MAR.2023 10:28:23

Occupied Bandwidth

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-09
 Note: PHY 2 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Occupied Bandwidth [MHz]: 2.070

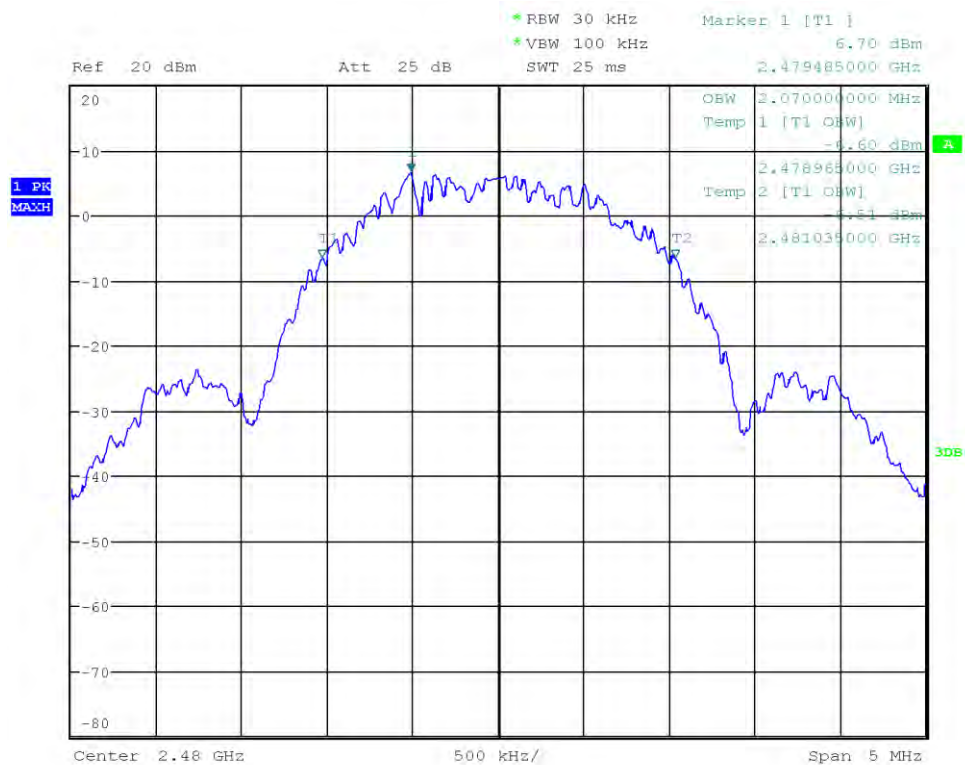

Date: 9.MAR.2023 10:30:53

3.2 Test Conditions and Results - 6 dB bandwidth


3.2.1 Information

Test Information	
Reference	FCC § 15.247(a)(2); ISED RSS-247, Issue 2 (section 5.2)
Measurement Method	ANSI C63.10 11.8
Measurement Uncertainty	± 1.26 %
Operator	Radwan Jaafar
Date	2023-03-09

3.2.2 Limits

Limits
≥ 500kHz

3.2.3 Setup

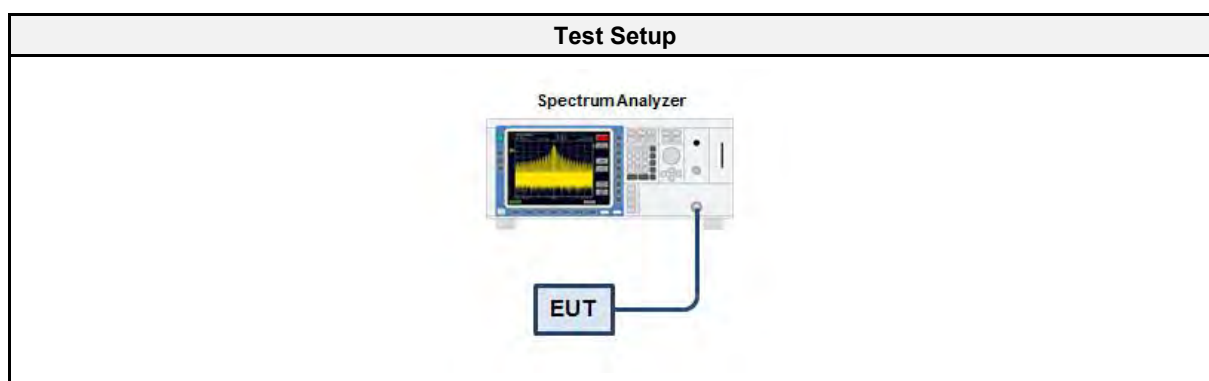

3.2.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyser	R&S	FSU 26	EF01003	2022-07	2023-07
Cable (CAABB)	Gigalane	GIGALANE 1730	EF00779	2023-03	2024-03

3.2.5 Procedure

Test Procedure
1. EUT set to test mode 2. Span set to at least twice the emission spectrum 3. Detector set to peak and max hold and RBW is set to 100 kHz 4. Envelope peak value of emission spectrum is selected 5. Marker on envelope of spectrum is set to level of -6 dB to the left of the peak 6. Marker on envelope of spectrum is set to level of -6 dB to the right of the peak 7. 6 dB Bandwidth is determined by marker frequency separation


3.2.6 Results

Test Results 1 Mbps				
Mode	Frequency [MHz]	Bandwidth [kHz]	Limit [kHz]	Verdict
GFSK	2402	725	500	PASS
GFSK	2440	740	500	PASS
GFSK	2480	735	500	PASS

Test Results 2 Mbps				
Mode	Frequency [MHz]	Bandwidth [kHz]	Limit [kHz]	Verdict
GFSK	2402	1290	500	PASS
GFSK	2440	1285	500	PASS
GFSK	2480	1290	500	PASS

DTS (6 dB) Bandwidth


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-09
 Note: PHY 1 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Lower Frequency [MHz]: 2401.625
 Upper Frequency [MHz]: 2402.350
 6 dB Bandwidth [kHz]: 725

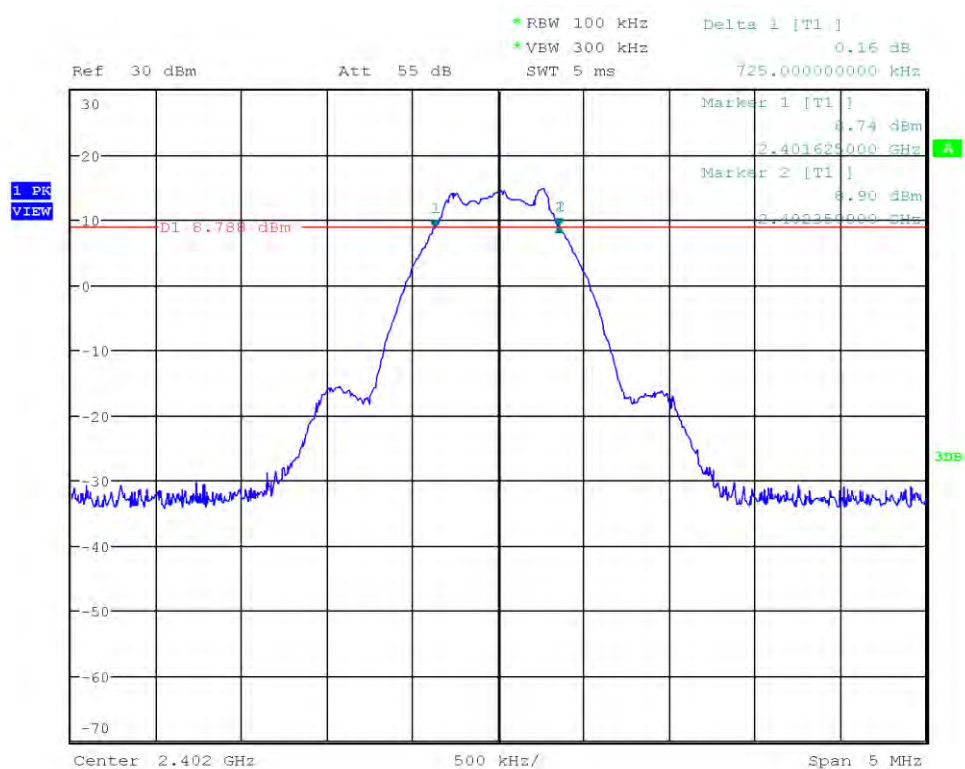

Date: 9.MAR.2023 10:58:10

DTS (6 dB) Bandwidth


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-09
 Note: PHY 1 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Lower Frequency [MHz]: 2439.615
 Upper Frequency [MHz]: 2440.355
 6 dB Bandwidth [kHz]: 740

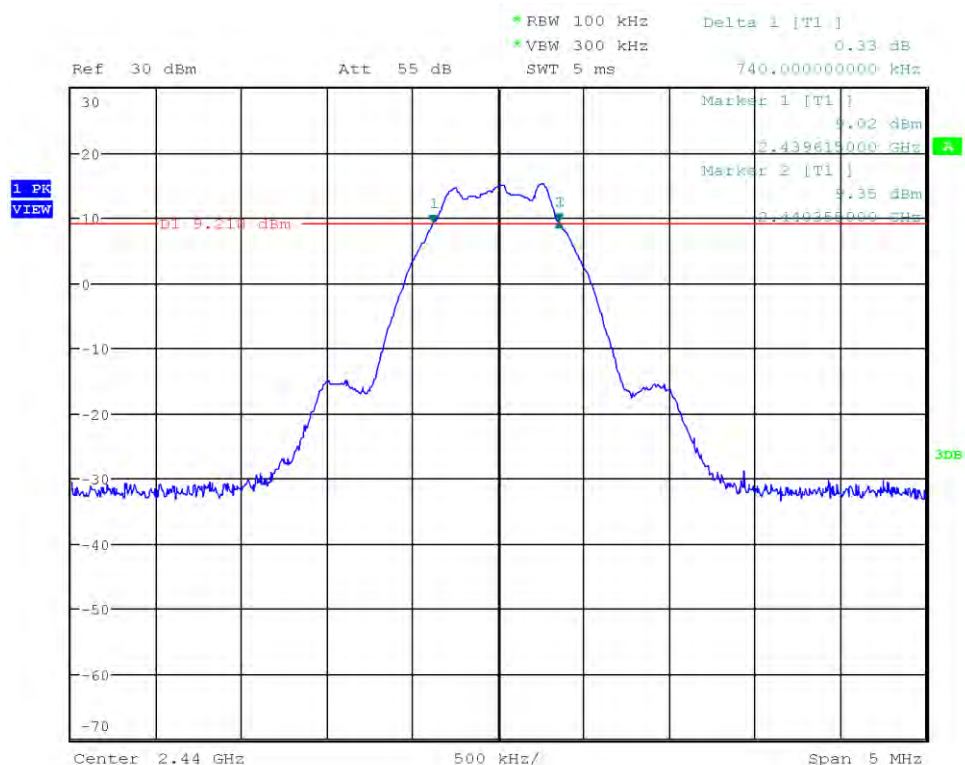

Date: 9.MAR.2023 11:01:29

DTS (6 dB) Bandwidth


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-09
 Note: PHY 1 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Lower Frequency [MHz]: 2479.620
 Upper Frequency [MHz]: 2480.355
 6 dB Bandwidth [kHz]: 735

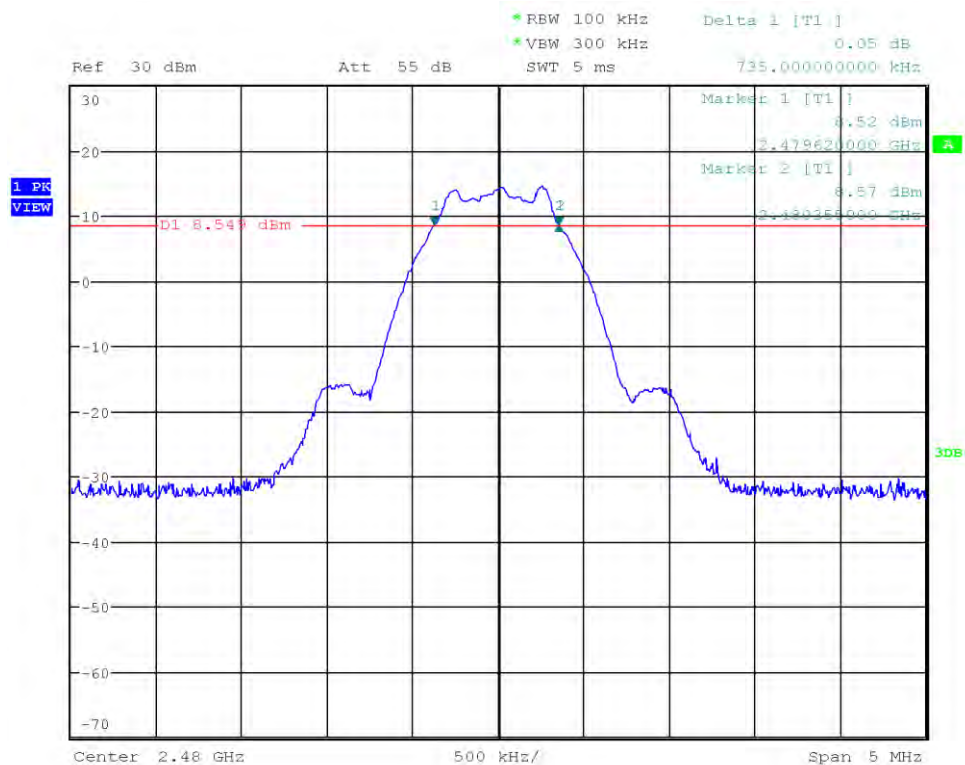

Date: 9.MAR.2023 11:15:52

DTS (6 dB) Bandwidth


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-09
 Note: PHY 2 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Lower Frequency [MHz]: 2401.320
 Upper Frequency [MHz]: 2402.610
 6 dB Bandwidth [kHz]: 1290

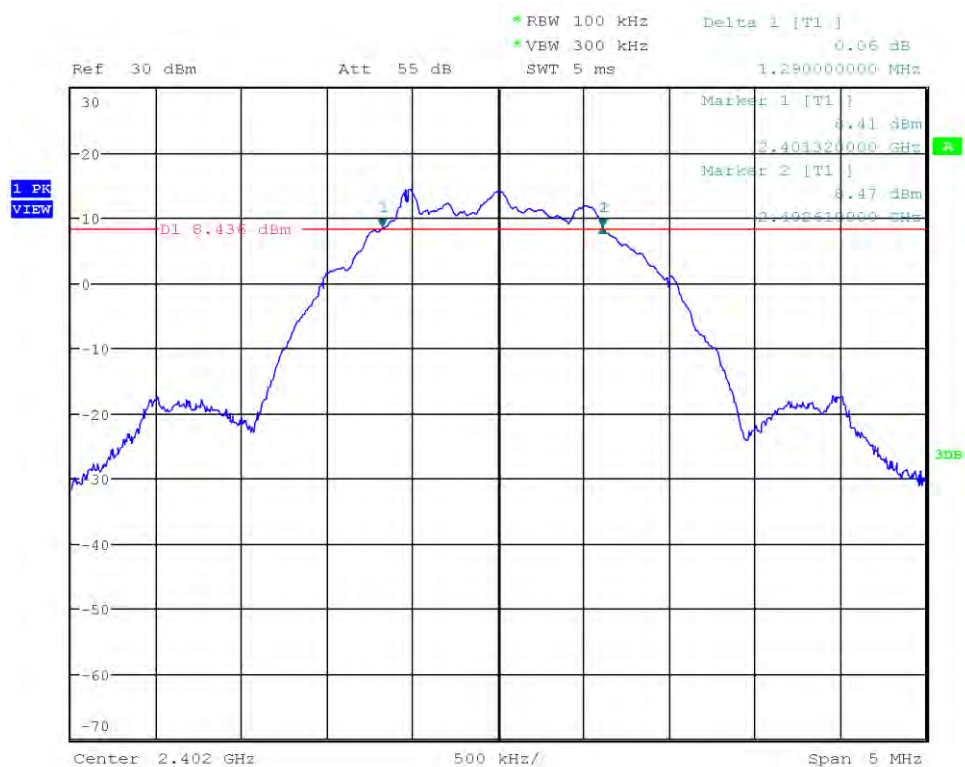

Date: 9.MAR.2023 11:05:30

DTS (6 dB) Bandwidth


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-09
 Note: PHY 2 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Lower Frequency [MHz]: 2439.320
 Upper Frequency [MHz]: 2440.605
 6 dB Bandwidth [kHz]: 1285

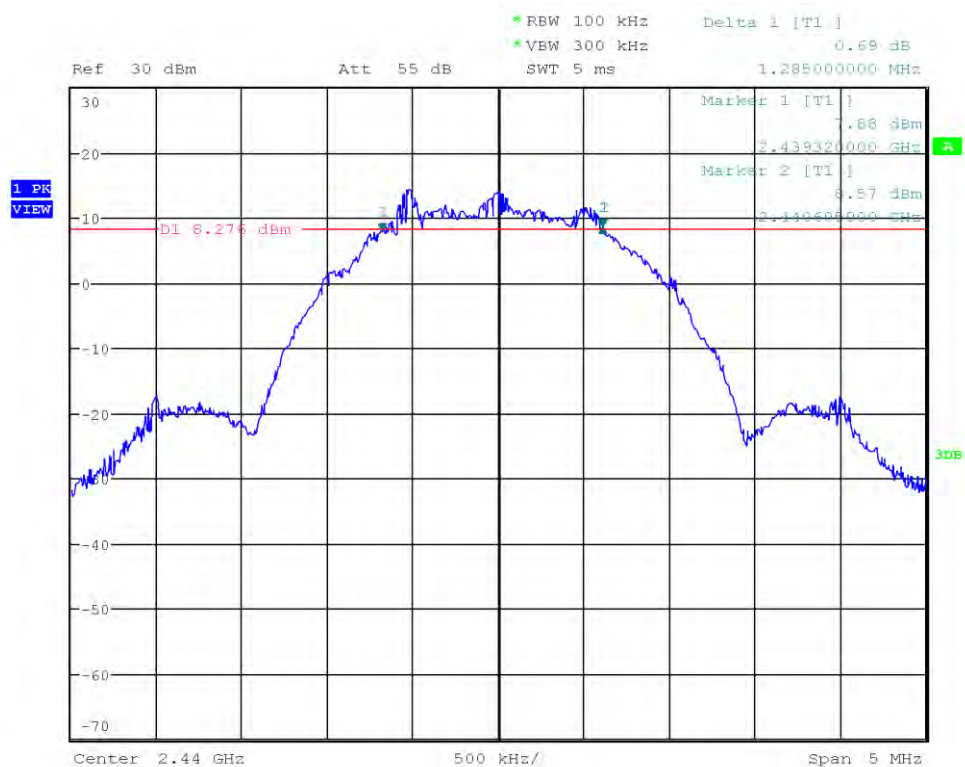

Date: 9.MAR.2023 11:08:12

DTS (6 dB) Bandwidth

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-09
 Note: PHY 2 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Lower Frequency [MHz]: 2479.320
 Upper Frequency [MHz]: 2480.610
 6 dB Bandwidth [kHz]: 1290

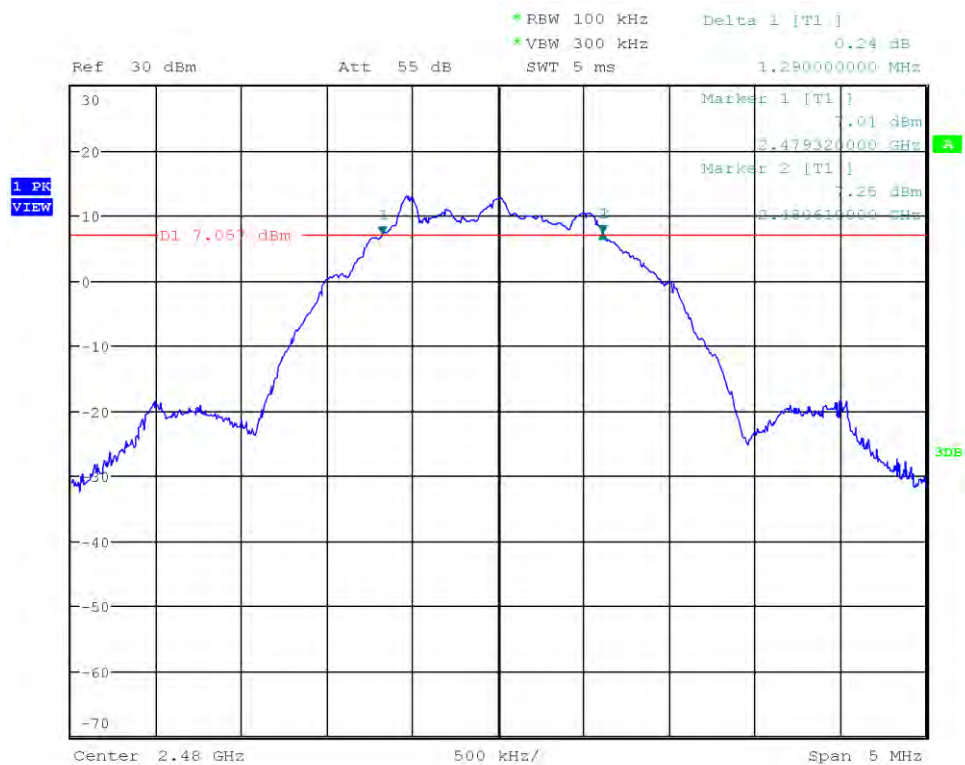

Date: 9.MAR.2023 11:09:56

3.3 Test Conditions and Results - Maximum peak conducted output power


3.3.1 Information

Test Information	
Reference	FCC § 15.247(b); ISED RSS-247, Issue 2 (section 5.4)
Measurement Method	ANSI C63.10 11.9.1
Measurement Uncertainty	± 2.86 dB
Operator	Radwan Jaafar
Date	2023-03-06

3.3.2 Limits

Limits
1 W (30 dBm)
FCC: The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
ISED: The maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W.

3.3.3 Setup

Test Setup
 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an Equipment Under Test (EUT) via a cable. The Spectrum Analyzer's screen displays a signal trace, and the EUT is represented by a blue box labeled 'EUT'.

3.3.4 Equipment

Test Equipment					
Spectrum Analyser	R&S	FSU 26	EF01003	2022-07	2023-07
Cable (CAABB)	Gigalane	GIGALANE 1730	EF00779	2023-03	2024-03

3.3.5 Procedure

Test Procedure
1. EUT set to test mode (Communication tester is used if needed) 2. Analyzer resolution bandwidth is set ≥ DTS bandwidth 3. Detector set to peak and max hold 4. Sweep time is set to auto 5. After the trace has stabilized a marker is set to peak of envelope

3.3.6 Results

Test Results 1 Mbps - FCC				
Channel [MHz]	Conducted Power [dBm]	Conducted Power [W]	Conducted Limit [W]	Verdict
2402	18.087	0.0644	1.0	PASS
2440	17.796	0.0602	1.0	PASS
2480	17.655	0.0583	1.0	PASS


Test Results 2 Mbps - FCC				
Channel [MHz]	Conducted Power [dBm]	Conducted Power [W]	Conducted Limit [W]	Verdict
2402	17.975	0.0627	1.0	PASS
2440	17.935	0.0622	1.0	PASS
2480	16.669	0.0464	1.0	PASS

Test Results 1 Mbps - ISED							
Channel [MHz]	Conducted Power [dBm]	Conducted Power [W]	Conducted Limit [W]	EIRP Power [dBm]	EIRP Power [W]	EIRP Limit [W]	Verdict
2402	18.087	0.0644	1.0	22.187	0.165	4.0	PASS
2440	17.796	0.0602	1.0	21.896	0.154	4.0	PASS
2480	17.655	0.0583	1.0	21.755	0.149	4.0	PASS

Test Results 2 Mbps - ISED							
Channel [MHz]	Conducted Power [dBm]	Conducted Power [W]	Conducted Limit [W]	EIRP Power [dBm]	EIRP Power [W]	EIRP Limit [W]	Verdict
2402	17.975	0.0627	1.0	22.075	0.161	4.0	PASS
2440	17.935	0.0622	1.0	22.035	0.159	4.0	PASS
2480	16.669	0.0464	1.0	20.769	0.119	4.0	PASS

Peak Conducted Output Power


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.9.1.1
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-06
 Note: PHY 1 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Peak Power [dBm]: 18.087
 Peak Power [W]: 0.0644

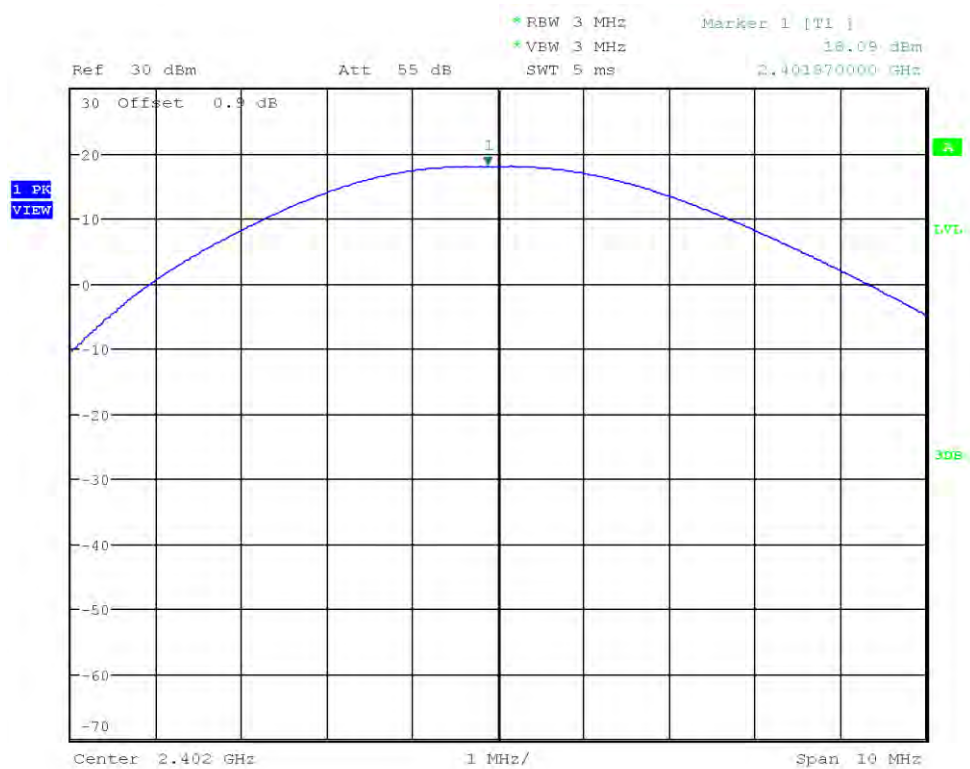

Date: 6.MAR.2023 08:50:38

Peak Conducted Output Power

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.9.1.1
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-06
 Note: PHY 1 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Peak Power [dBm]: 17.796
 Peak Power [W]: 0.0602

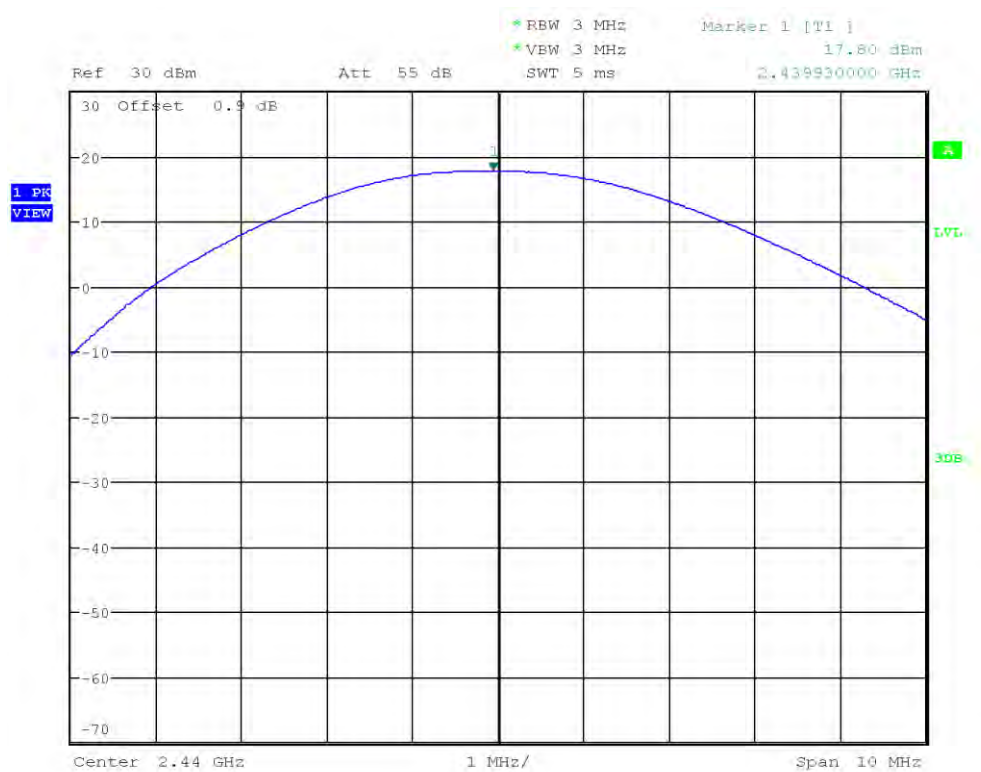

Date: 6.MAR.2023 08:55:41

Peak Conducted Output Power


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.9.1.1
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-06
 Note: PHY 1 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Peak Power [dBm]: 17.655
 Peak Power [W]: 0.0583



Date: 6.MAR.2023 08:57:01

Peak Conducted Output Power


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.9.1.1
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-06
 Note: PHY 2 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Peak Power [dBm]: 17.975
 Peak Power [W]: 0.0627

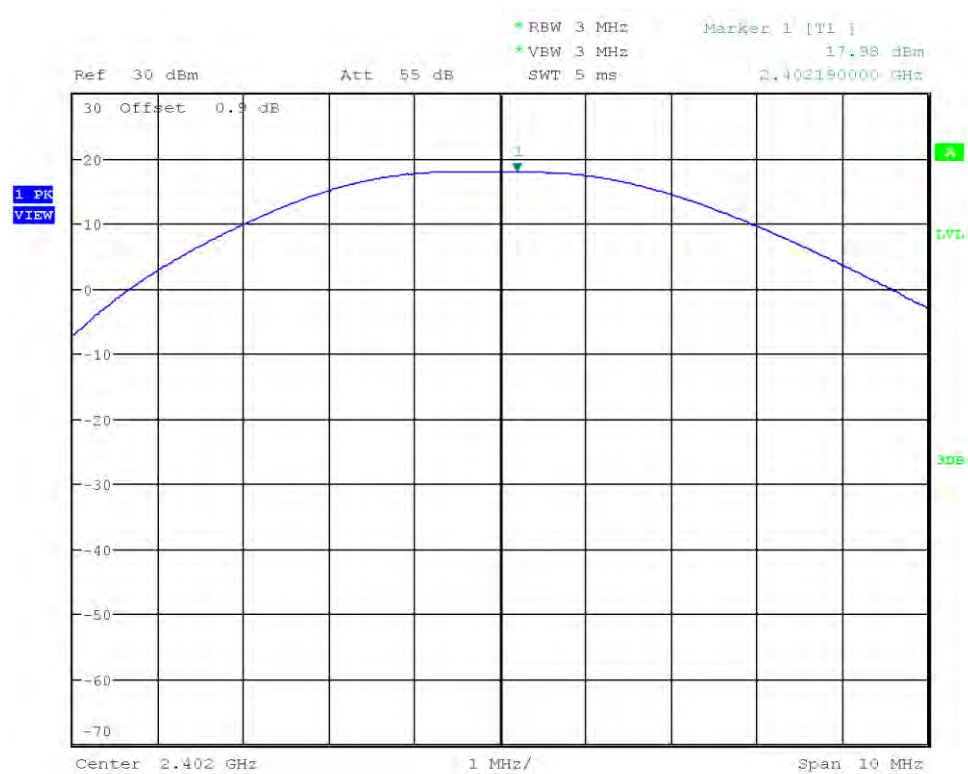

Date: 6.MAR.2023 08:59:13

Peak Conducted Output Power


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.9.1.1
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-06
 Note: PHY 2 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Peak Power [dBm]: 17.935
 Peak Power [W]: 0.0622

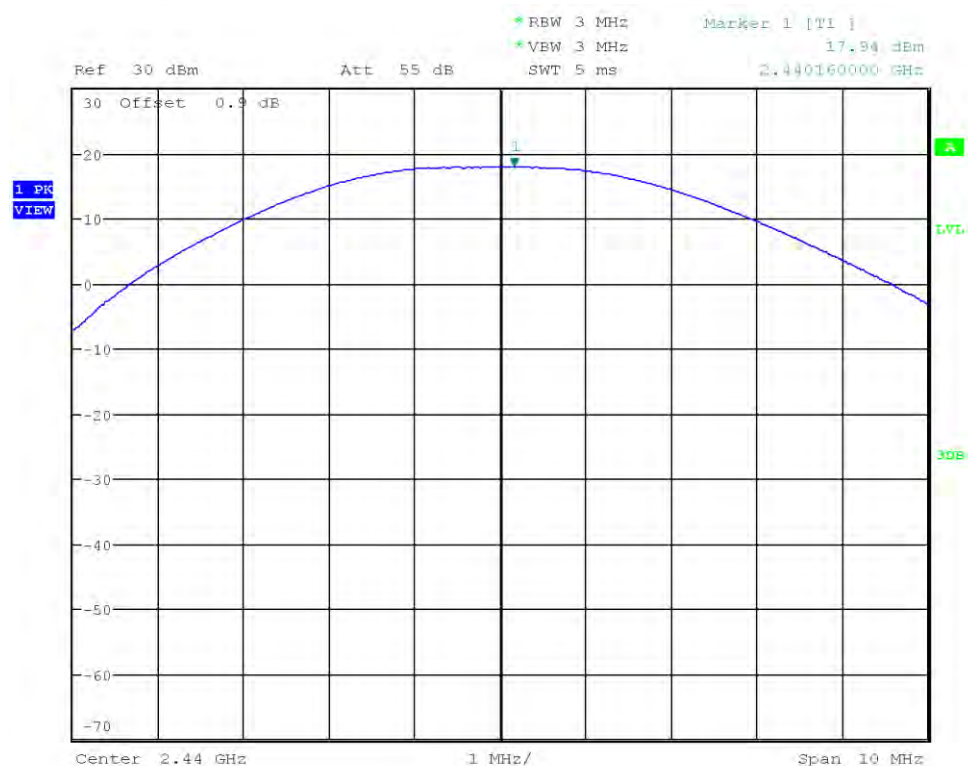

Date: 6.MAR.2023 09:00:35

Peak Conducted Output Power

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.9.1.1
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-06
 Note: PHY 2 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Peak Power [dBm]: 16.669
 Peak Power [W]: 0.0464

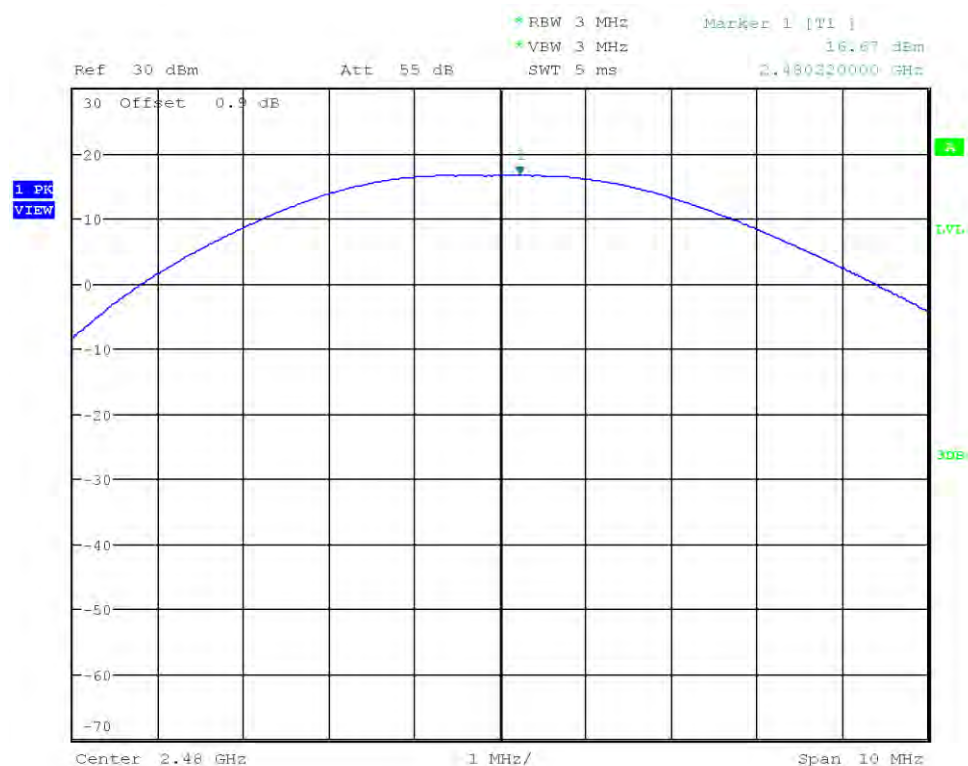

Date: 6.MAR.2023 09:01:53

3.4 Test Conditions and Results - Power spectral density


3.4.1 Information

Test Information	
Reference	FCC § 15.247(e); ISED RSS-247, Issue 2 (section 5.2)
Measurement Method	ANSI C63.10 11.10.2, 14.3.2
Measurement Uncertainty	± 2.86 dB
Operator	Radwan Jaafar
Date	2023-03-09

3.4.2 Limits

Limits
8 dBm / 3 kHz

3.4.3 Setup

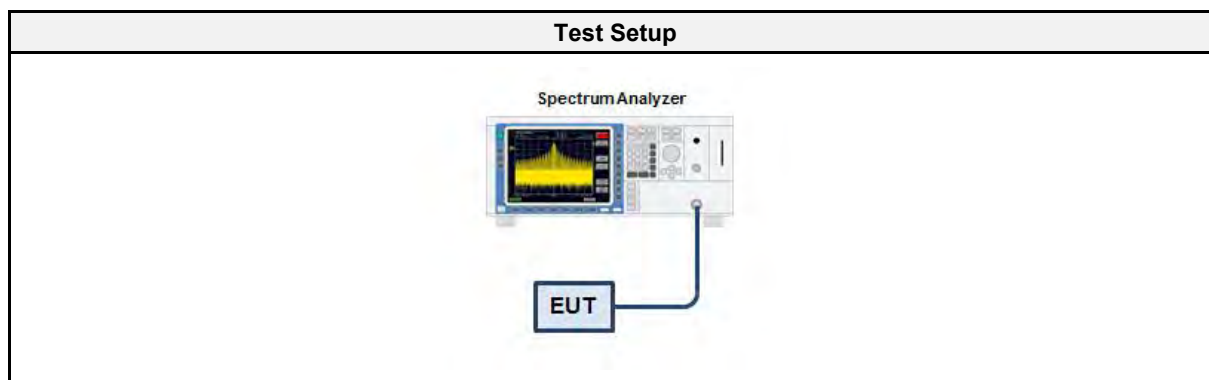

3.4.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyser	R&S	FSU 26	EF01003	2022-07	2023-07
Cable (CAABB)	Gigalane	GIGALANE 1730	EF00779	2023-03	2024-03

3.4.5 Procedure

Test Procedure
1. EUT set to test mode 2. The analyzer is set to DTS channel center frequency with a span of 1.5 times the DTS bandwidth 3. The RBW is set to 100 kHz with VBW ≥ RBW and the detector is set to peak with max hold 4. After the trace has stabilized a marker is set to the envelope maximum 5. If the power spectral density is above the limit the RBW is reduced (not lower than 3 kHz) and the measurement is repeated 6. If the EUT has more than one transmit chain the procedure is repeated for each transmit chain


3.4.6 Results

Test Results 1 Mbps			
Channel [MHz]	PSD [dBm/RBW*]	Limit [dBm/3kHz]	Verdict
2402	6.800	8.0	PASS
2440	7.212	8.0	PASS
2480	7.056	8.0	PASS
*RBW = 10 kHz			

Test Results 2 Mbps			
Channel [MHz]	PSD [dBm/RBW]	Limit [dBm/3kHz]	Verdict
2402	4.335	8.0	PASS
2440	4.159	8.0	PASS
2480	2.950	8.0	PASS
*RBW = 10 kHz			

Peak Power Spectral Density


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-09
 Note: PHY 1 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Peak Frequency [MHz]: 2401.740
 Spectral Density [dBm/RBW]: 6.800
 Resolution Bandwidth [kHz]: 10 kHz

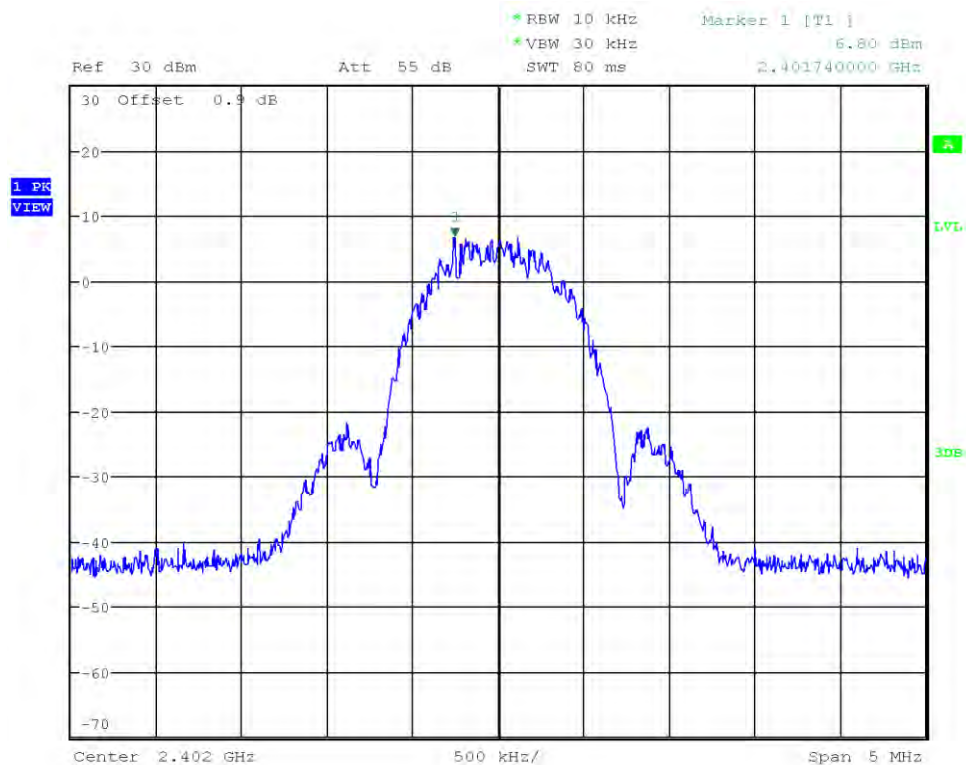

Date: 9.MAR.2023 12:00:35

Peak Power Spectral Density


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-09
 Note: PHY 1 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Peak Frequency [MHz]: 2439.740
 Spectral Density [dBm/RBW]: 7.212
 Resolution Bandwidth [kHz]: 10 kHz

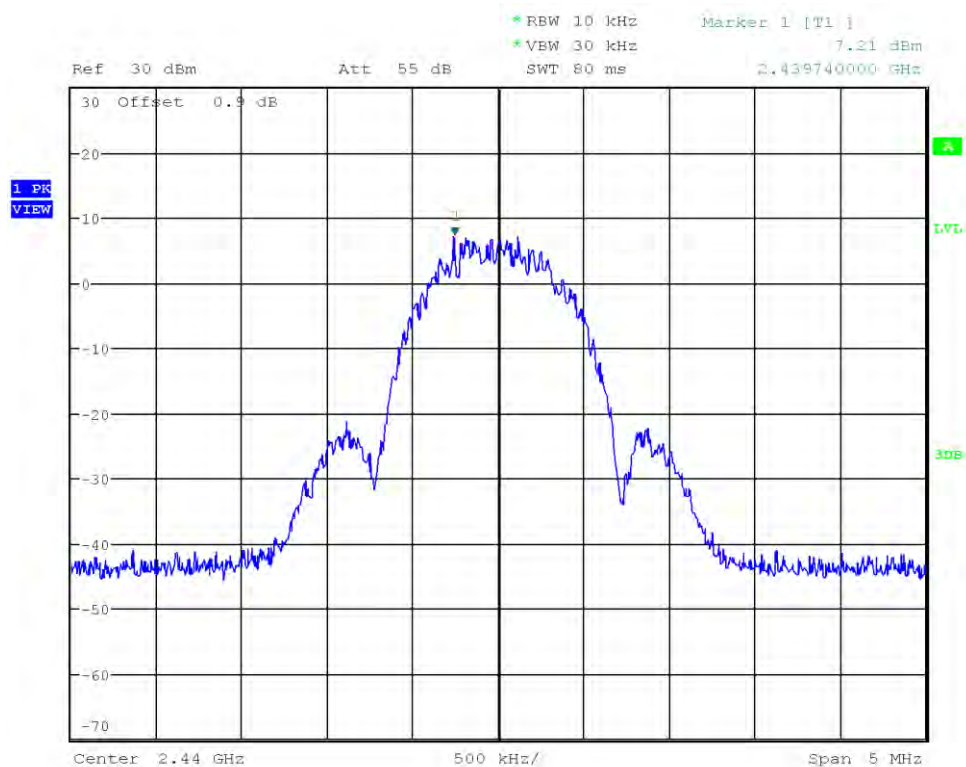

Date: 9.MAR.2023 12:02:54

Peak Power Spectral Density


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-09
 Note: PHY 1 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Peak Frequency [MHz]: 2479.740
 Spectral Density [dBm/RBW]: 7.056
 Resolution Bandwidth [kHz]: 10 kHz

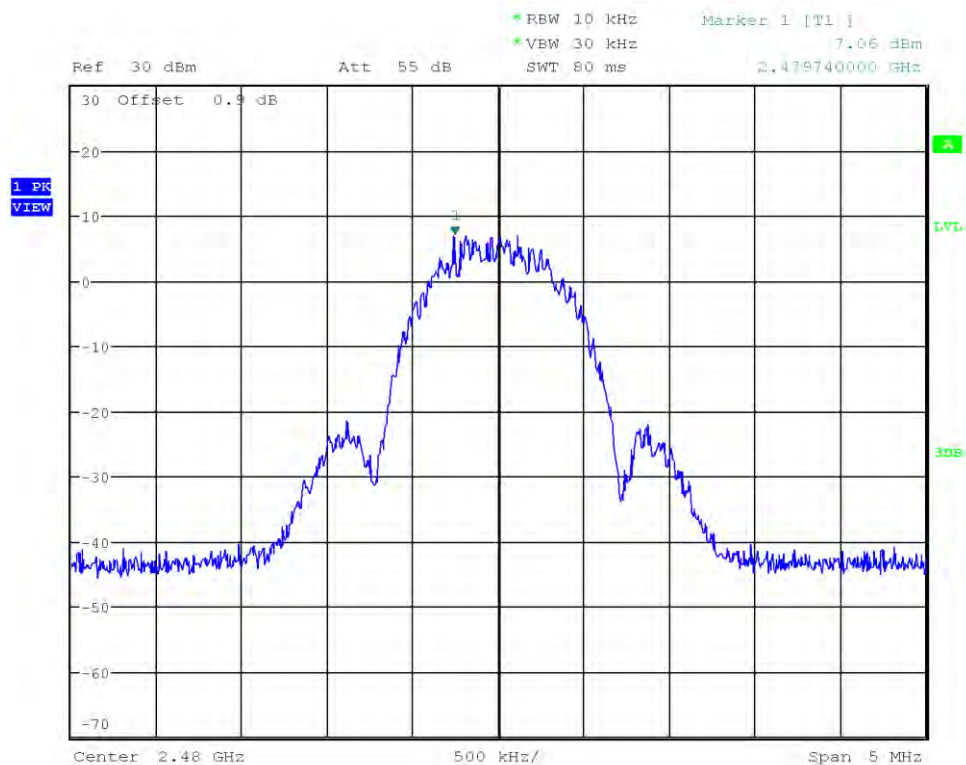

Date: 9.MAR.2023 12:07:34

Peak Power Spectral Density


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-09
 Note: PHY 2 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Peak Frequency [MHz]: 2402.240
 Spectral Density [dBm/RBW]: 4.335
 Resolution Bandwidth [kHz]: 10 kHz

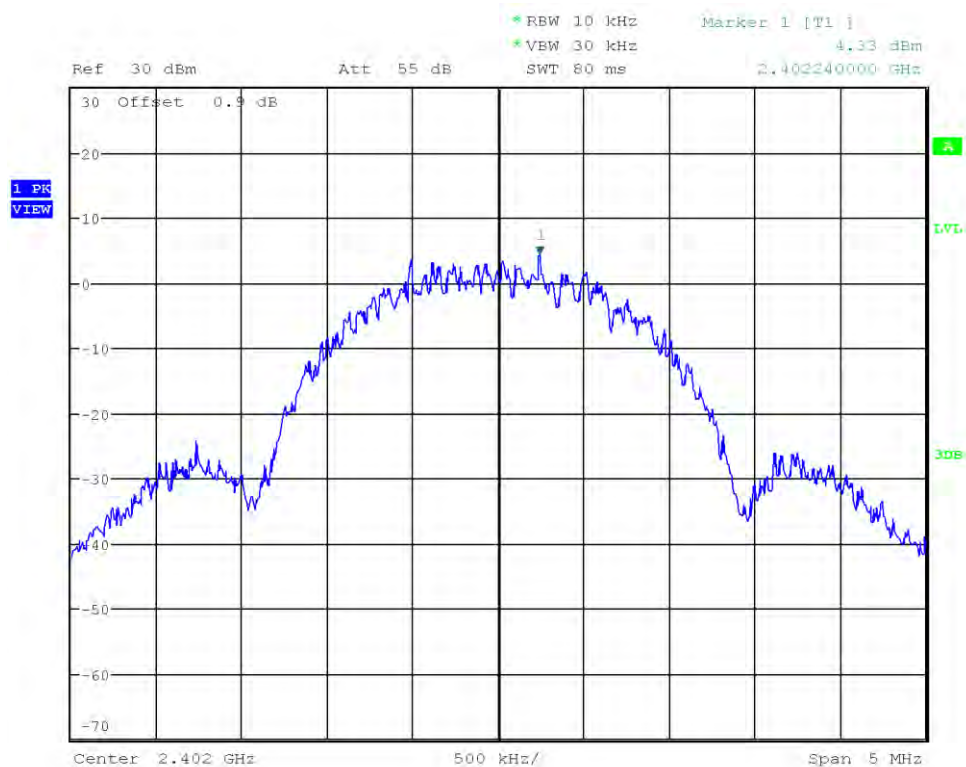

Date: 9.MAR.2023 12:57:36

Peak Power Spectral Density


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-09
 Note: PHY 2 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Peak Frequency [MHz]: 2440.240
 Spectral Density [dBm/RBW]: 4.159
 Resolution Bandwidth [kHz]: 10 kHz

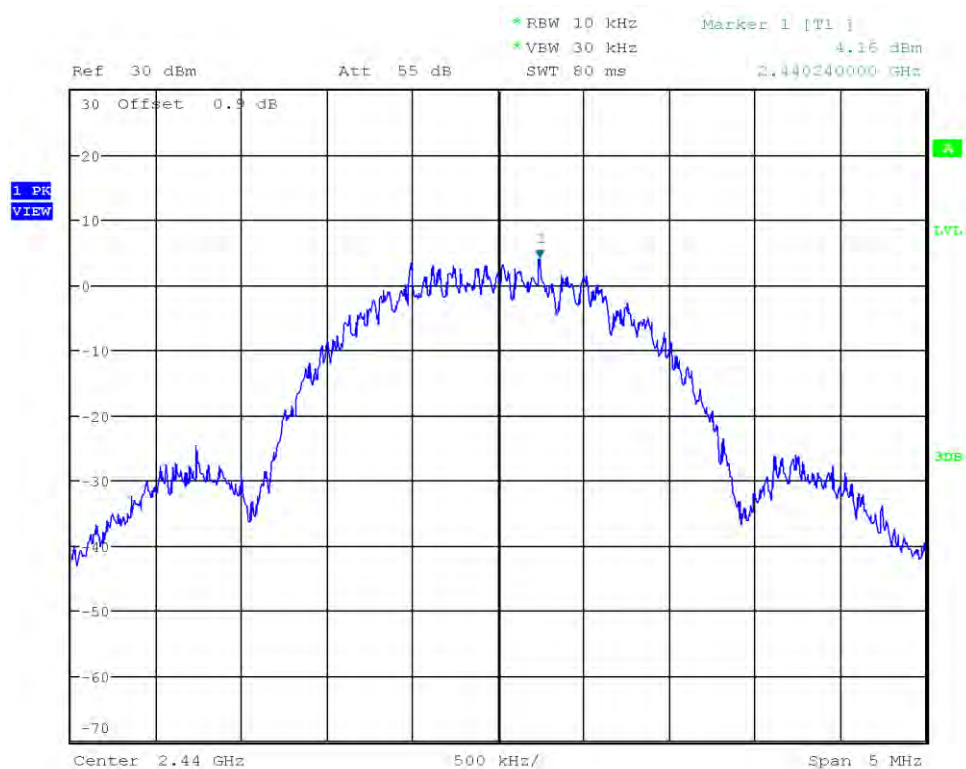

Date: 9.MAR.2023 13:00:12

Peak Power Spectral Density

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-09
 Note: PHY 2 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Peak Frequency [MHz]: 2479.485
 Spectral Density [dBm/RBW]: 2.950
 Resolution Bandwidth [kHz]: 10 kHz

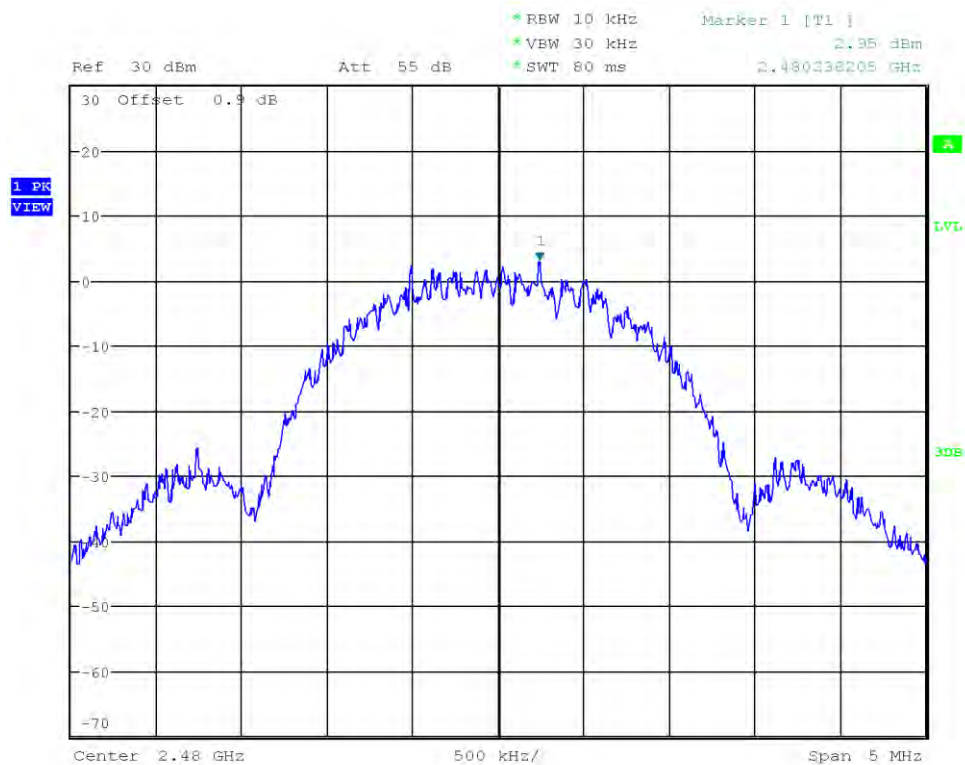

Date: 9.MAR.2023 13:38:13

3.5 Test Conditions and Results - AC powerline conducted emissions

3.5.1 Information


Test Information	
Reference	FCC § 15.207; ISED RSS-247, Issue 2 (section 3.1)
Measurement Method	ANSI C63.10 6.2
Measurement Uncertainty	± 3.82 dB
Operator	Odai Qawasmeh
Date	2023-04-26

3.5.2 Limits

Limits		
Frequency [MHz]	Quasi-Peak [dBµV]	Average [dBµV]
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5	56	46
5 - 30	60	50

* Limit decreases linearly with the logarithm of the frequency

3.5.3 Setup

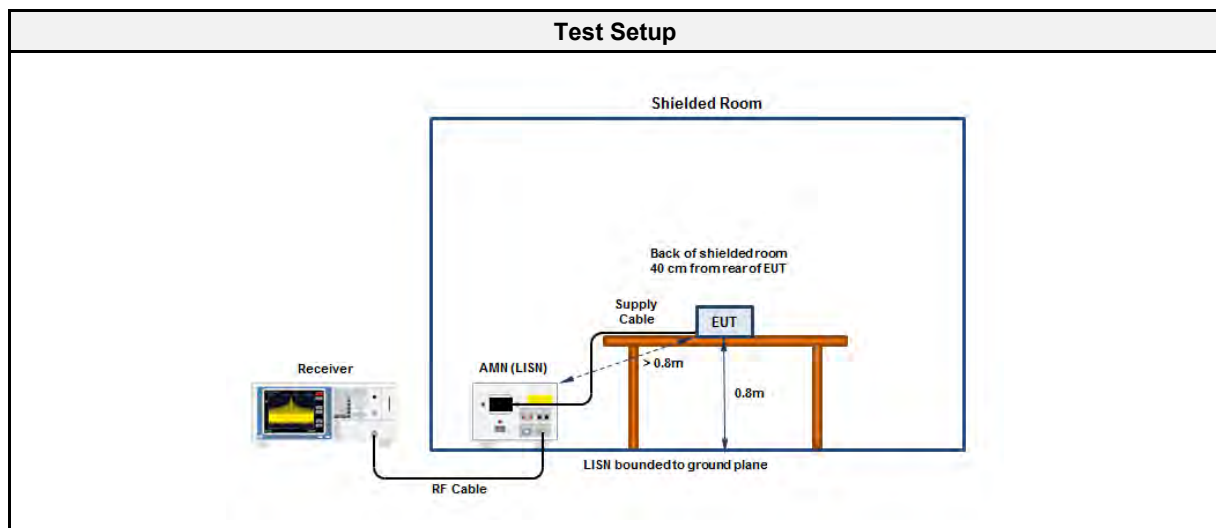

3.5.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2020.1.8

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
EMI Test Receiver	R&S	ESR7	EF00943	2022-07	2023-07
Pulse Limiter	R&S	ESH3-Z2	EF01222	2021-07	2023-07
LISN	R&S	ESH3-Z5	EF00036	2021-08	2023-08

3.5.5 Setup Photos

Setup for measurements 150 kHz - 30 MHz
--

Photos deleted.

Refer to separate photo exhibits.

EUT Test Setup


Photos deleted.
Refer to separate photo exhibits.

Conducted emissions at the mains power port according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Qawasmeh
 Test Date: 2023-04-26
 Operating Conditions: ambient temperature: 20 °Celsius
 power input: 3.3 VDC
 LISN: ESH3-Z5 (L)
 Operational Mode & EUT Configuration: Tx, BLE 5.3, 2440 MHz, PRBS9_193 Bytes, 1 Mbps, P = 19 dBm
 Applied to Port: 120 VAC / 60 Hz

Index 38

RadiMation

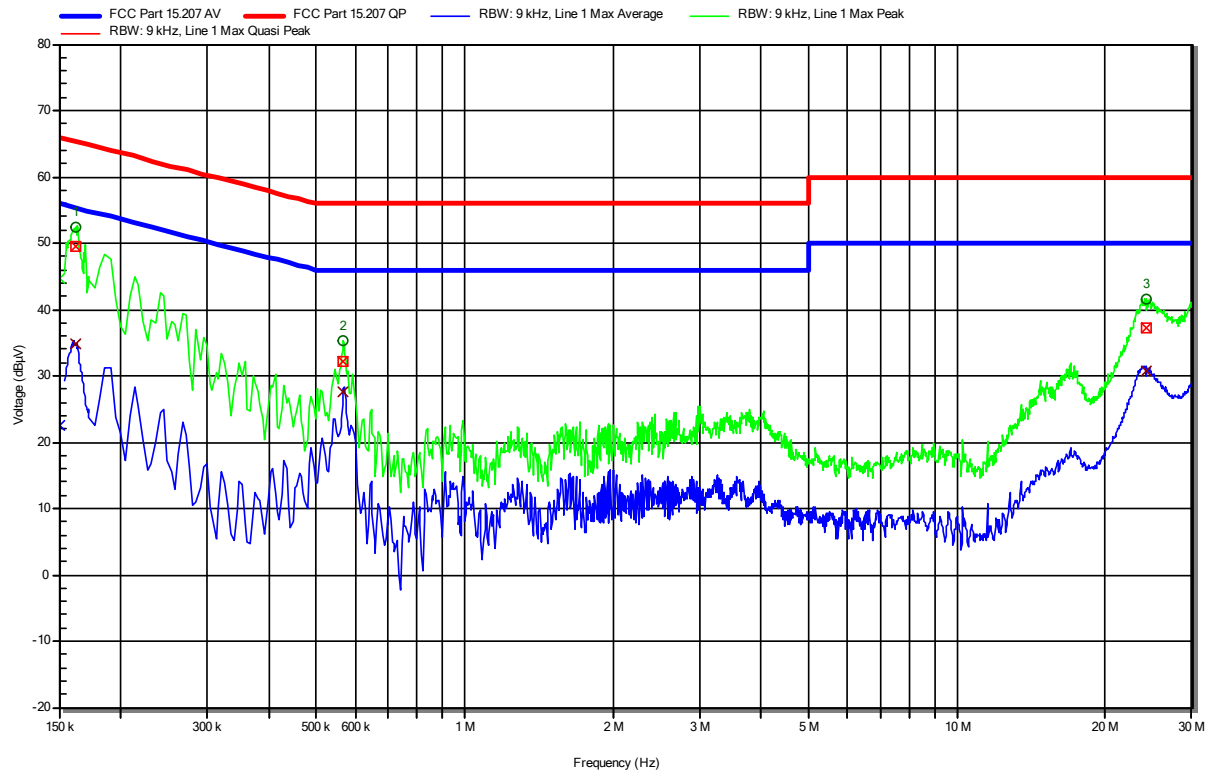

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	LISN
1	161.7 kHz	49.54 dBμV	65.38 dBμV	-15.83 dB	Pass	Line 1
2	566.7 kHz	32.27 dBμV	56 dBμV	-23.73 dB	Pass	Line 1
3	24.297 MHz	37.17 dBμV	60 dBμV	-22.83 dB	Pass	Line 1


Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	LISN
1	161.7 kHz	34.83 dBμV	55.38 dBμV	-20.55 dB	Pass	Line 1
2	566.7 kHz	27.5 dBμV	46 dBμV	-18.5 dB	Pass	Line 1
3	24.297 MHz	30.7 dBμV	50 dBμV	-19.3 dB	Pass	Line 1

Conducted emissions at the mains power port according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Qawasmeh
 Test Date: 2023-04-26
 Operating Conditions: ambient temperature: 20 °Celsius
 power input: 3.3 VDC
 LISN: ESH3-Z5 (N)
 Operational Mode & EUT Configuration: Tx, BLE 5.3, 2440 MHz, PRBS9_193 Bytes, 1 Mbps, P = 19 dBm
 Applied to Port: 120 VAC / 60 Hz

Index 39

RadiMation

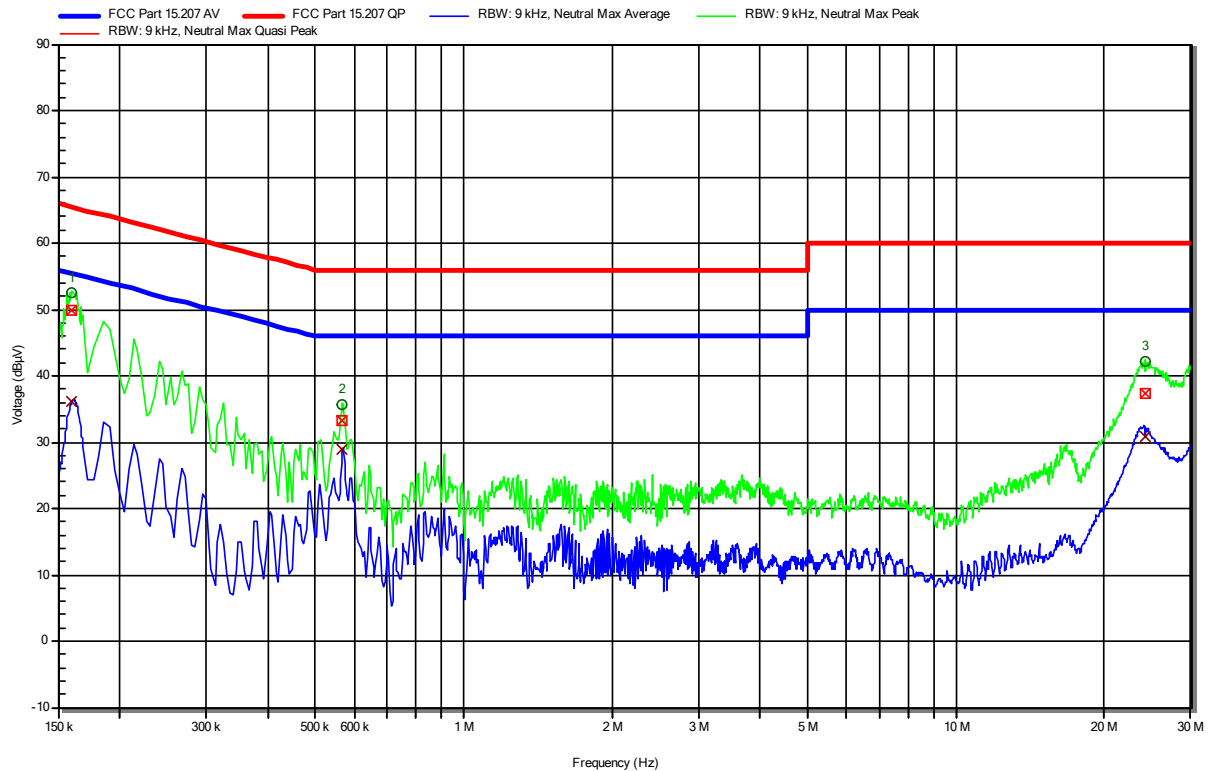

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	LISN
1	160.35 kHz	49.81 dBμV	65.45 dBμV	-15.64 dB	Pass	Neutral
2	567.15 kHz	33.18 dBμV	56 dBμV	-22.82 dB	Pass	Neutral
3	24.288 MHz	37.32 dBμV	60 dBμV	-22.68 dB	Pass	Neutral


Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	LISN
1	160.35 kHz	36.11 dBμV	55.45 dBμV	-19.34 dB	Pass	Neutral
2	567.15 kHz	28.8 dBμV	46 dBμV	-17.2 dB	Pass	Neutral
3	24.288 MHz	30.74 dBμV	50 dBμV	-19.26 dB	Pass	Neutral

Conducted emissions at the mains power port according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Qawasmeh
 Test Date: 2023-04-26
 Operating Conditions: ambient temperature: 23 °Celsius
 power input: 3.3 VDC
 LISN: ESH3-Z5 (L)
 Operational Mode & EUT Configuration: Rx, BT-LE 5.3, 2440 MHz
 Applied to Port: 120 VAC / 60 Hz
 Note 1:

Index 32

RadiMation

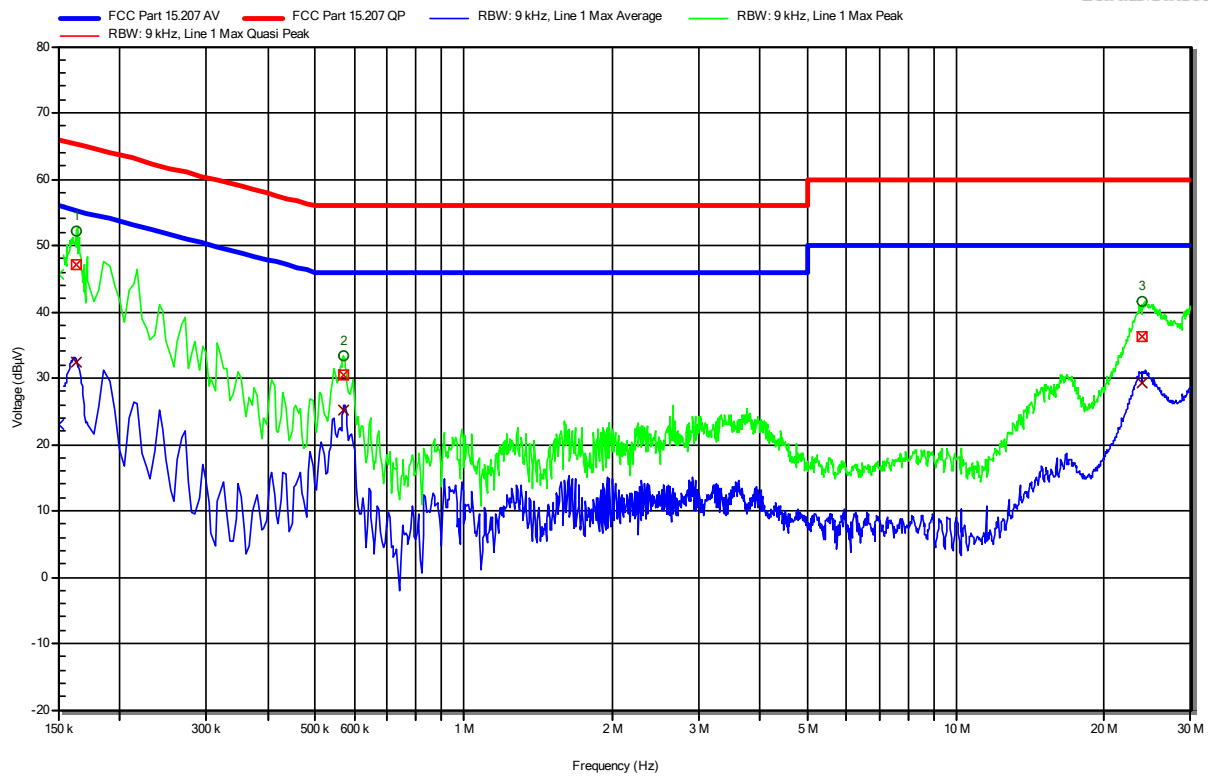

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	LISN
1	163.5 kHz	47 dBµV	65.28 dBµV	-18.29 dB	Pass	Line 1
2	568.95 kHz	30.4 dBµV	56 dBµV	-25.6 dB	Pass	Line 1
3	23.946 MHz	36.29 dBµV	60 dBµV	-23.71 dB	Pass	Line 1

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	LISN
1	163.5 kHz	32.3 dBµV	55.28 dBµV	-22.99 dB	Pass	Line 1
2	568.95 kHz	25.14 dBµV	46 dBµV	-20.86 dB	Pass	Line 1
3	23.946 MHz	29.36 dBµV	50 dBµV	-20.64 dB	Pass	Line 1

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted emissions at the mains power port according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Qawasmeh
 Test Date: 2023-04-26
 Operating Conditions: ambient temperature: 23 °Celsius
 power input: 3.3 VDC
 LISN: ESH3-Z5 (N)
 Operational Mode & EUT Configuration: Rx, BT-LE 5.3, 2440 MHz
 Applied to Port: 120 VAC / 60 Hz
 Note 1:

Index 31

RadiMation

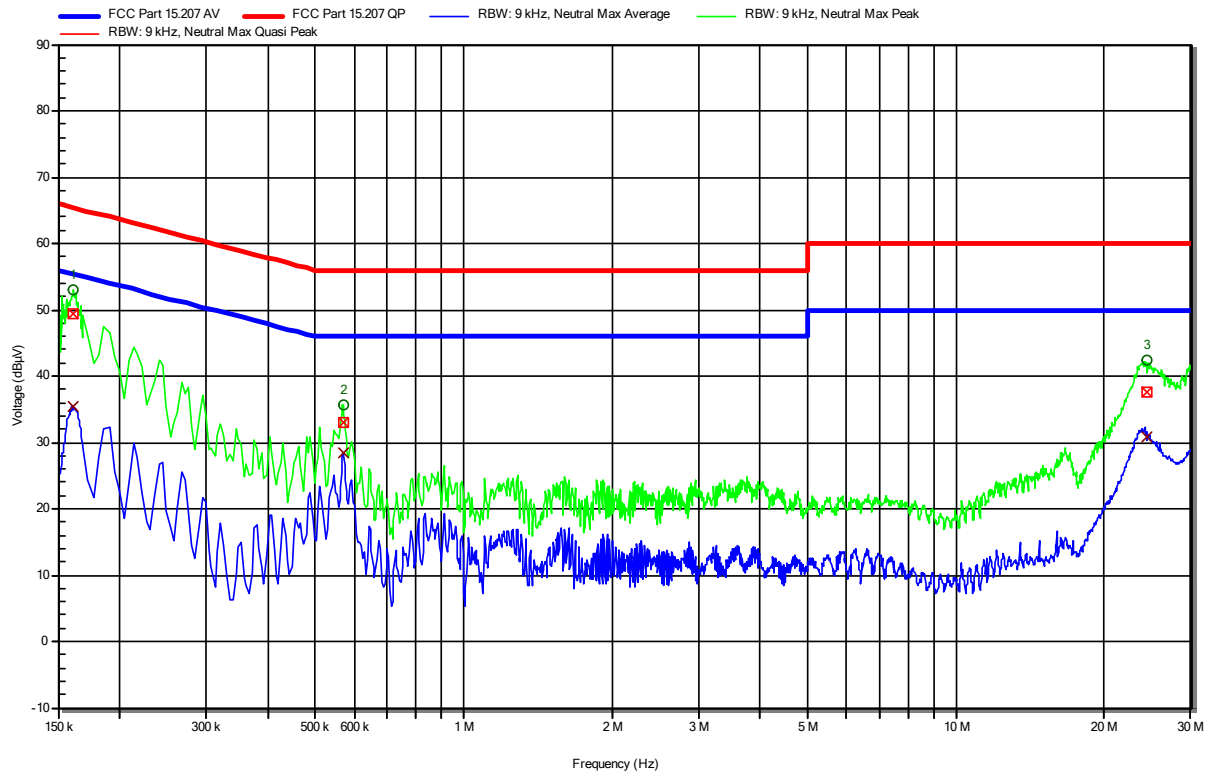

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	LISN
1	161.25 kHz	49.34 dBµV	65.4 dBµV	-16.06 dB	Pass	Neutral
2	568.95 kHz	33.05 dBµV	56 dBµV	-22.95 dB	Pass	Neutral
3	24.464 MHz	37.69 dBµV	60 dBµV	-22.31 dB	Pass	Neutral

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	LISN
1	161.25 kHz	35.49 dBµV	55.4 dBµV	-19.91 dB	Pass	Neutral
2	568.95 kHz	28.32 dBµV	46 dBµV	-17.68 dB	Pass	Neutral
3	24.464 MHz	30.78 dBµV	50 dBµV	-19.22 dB	Pass	Neutral

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.6 Test Conditions and Results - Band-edge compliance


3.6.1 Information

Test Information	
Reference	FCC § 15.247(d); ISSED RSS-247, Issue 2 (section 5.5)
Measurement Uncertainty	± 3.64 dB
Measurement Method	ANSI C63.10 11.13
Operator	Radwan Jaafar
Date	2023-03-06

3.6.2 Limits

Limits	
Power Measurement	Out-of-band attenuation [dB]
Peak	20
RMS	30

3.6.3 Setup

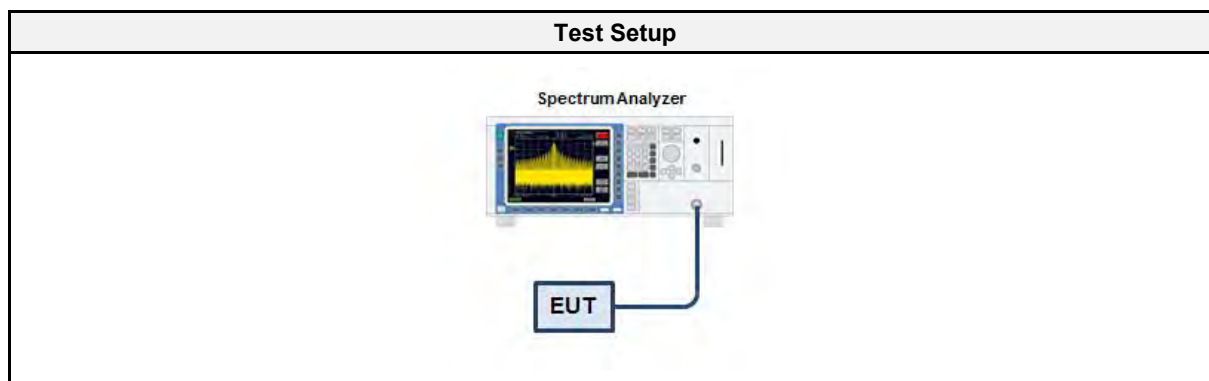

3.6.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyser	R&S	FSU 26	EF01003	2022-07	2023-07
Cable (CAABB)	Gigalane	GIGALANE 1730	EF00779	2023-03	2024-03

3.6.5 Procedure

Test Procedure
1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels within frequency band and outside frequency band 5. Band edge attenuation is determined from level difference


3.6.6 Results

Test Results 1 Mbps				
Mode	Channel [MHz]	Out-of-band Attenuation [dB]	Limit [dB]	Verdict
GFSK	2402	-46.15	-20	PASS
GFSK	2480	-45.85	-20	PASS

Test Results 2 Mbps				
Mode	Channel [MHz]	Out-of-band Attenuation [dB]	Limit [dB]	Verdict
GFSK	2402	-32.13	-20	PASS
GFSK	2480	-44.57	-20	PASS

Emissions in nonrestricted frequency bands at the Band-edge

Project Number:	G0M-2302-1881
Applicant:	u-blox AG
Model Description:	Host-based multiradio module
Model:	MAYA-W276-00B
Test Sample ID:	43211
Reference Standards:	FCC 15.247, RSS-247
Reference Method:	ANSI C63.10:2013, Section 7.8.6, 6.10.4
Operating Conditions:	Tnom/Vnom
Operator:	Radwan Jaafar
Test Site:	Eurofins Product Service GmbH
Test Date:	2023-03-06
Note:	PHY 1 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
Band-edge	Lower
In-band Frequency [MHz]:	2402.048
Max. in-band Level [dBm/100 kHz]:	16.745
Out-of-band Frequency [MHz]:	2400.0
Max. out-of-band Level [dBm/100 kHz]:	-29.403
Attenuation [dB]:	-46.15

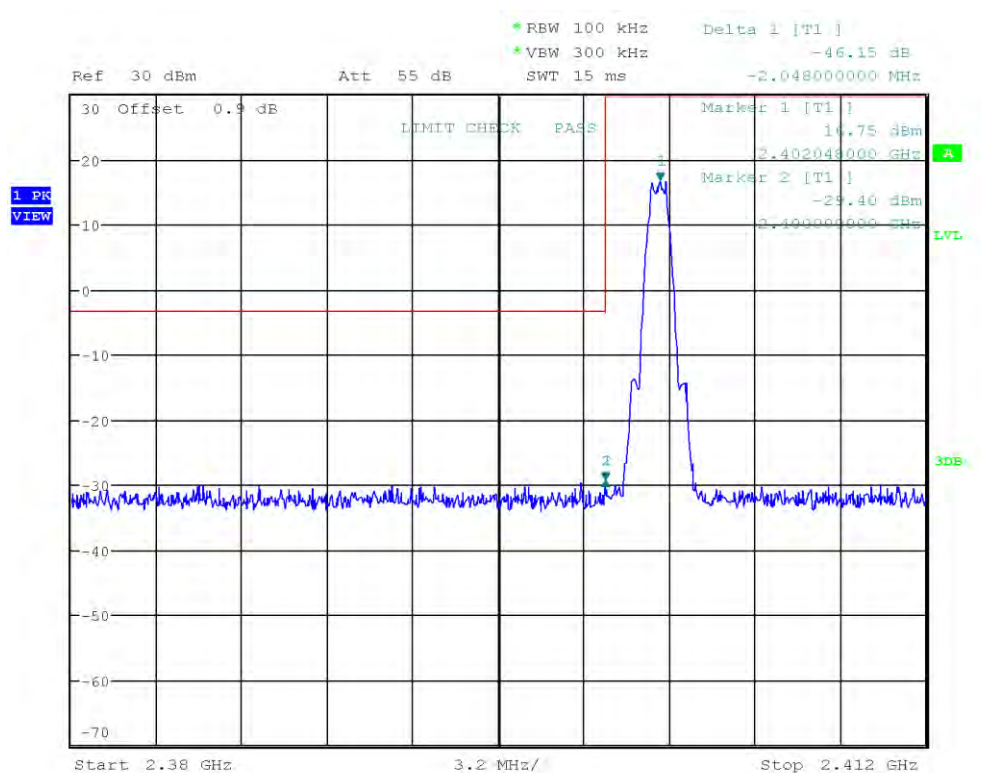


Date: 6.MAR.2023 10:09:26

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Emissions in nonrestricted frequency bands at the Band-edge

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 7.8.6, 6.10.4
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-06
 Note: PHY 1 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Band-edge: Upper
 In-band Frequency [MHz]: 2480.22
 Max. in-band Level [dBm/100 kHz]: 17.022
 Out-of-band Frequency [MHz]: 2499.365
 Max. out-of-band Level [dBm/100 kHz]: -28.824
 Attenuation [dB]: -45.85

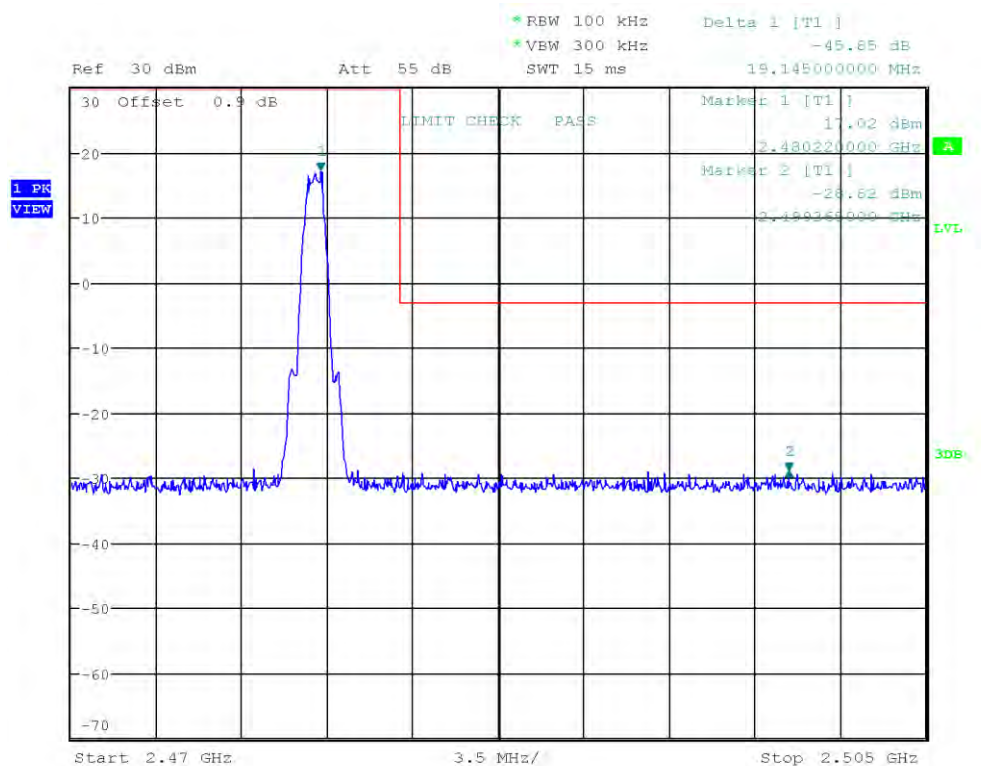


Date: 6.MAR.2023 10:12:21

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Emissions in nonrestricted frequency bands at the Band-edge

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 7.8.6, 6.10.4
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-06
 Note: PHY 2 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Band-edge: Lower
 In-band Frequency [MHz]: 2401.472
 Max. in-band Level [dBm/100 kHz]: 16.588
 Out-of-band Frequency [MHz]: 2400.0
 Max. out-of-band Level [dBm/100 kHz]: -15.542
 Attenuation [dB]: -32.13

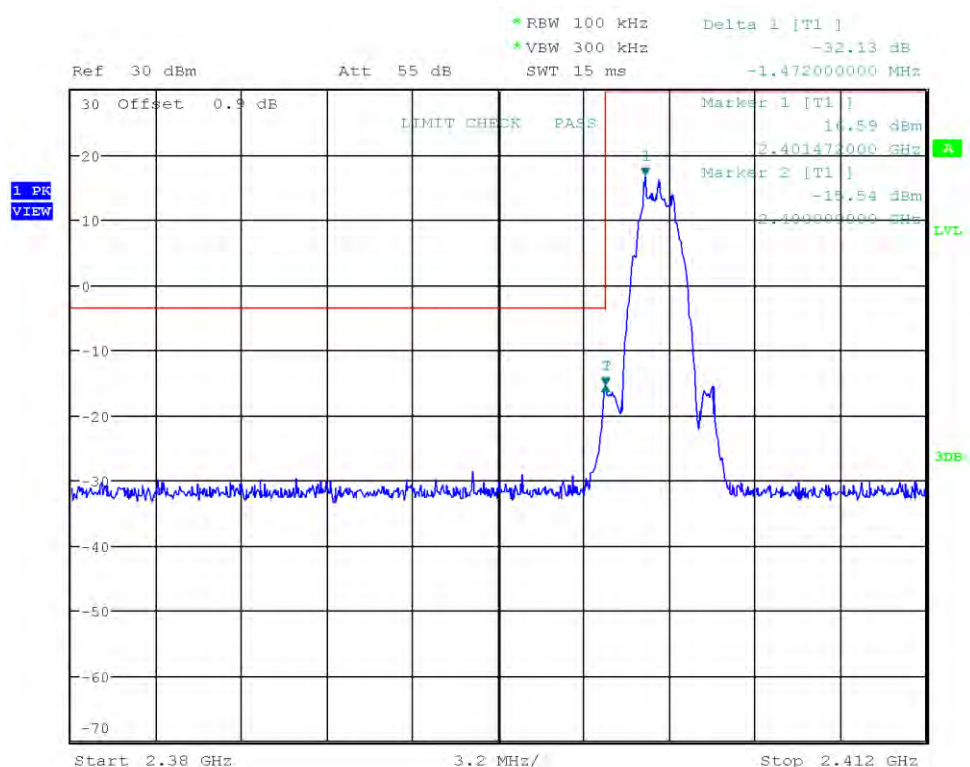


Date: 6.MAR.2023 10:27:15

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Emissions in nonrestricted frequency bands at the Band-edge

Project Number:	G0M-2302-1881
Applicant:	u-blox AG
Model Description:	Host-based multiradio module
Model:	MAYA-W276-00B
Test Sample ID:	43211
Reference Standards:	FCC 15.247, RSS-247
Reference Method:	ANSI C63.10:2013, Section 7.8.6, 6.10.4
Operating Conditions:	Tnom/Vnom
Operator:	Radwan Jaafar
Test Site:	Eurofins Product Service GmbH
Test Date:	2023-03-06
Note:	PHY 2 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
Band-edge	Upper
In-band Frequency [MHz]:	2479.45
Max. in-band Level [dBm/100 kHz]:	15.752
Out-of-band Frequency [MHz]:	2491.14
Max. out-of-band Level [dBm/100 kHz]:	-28.822
Attenuation [dB]:	-44.57

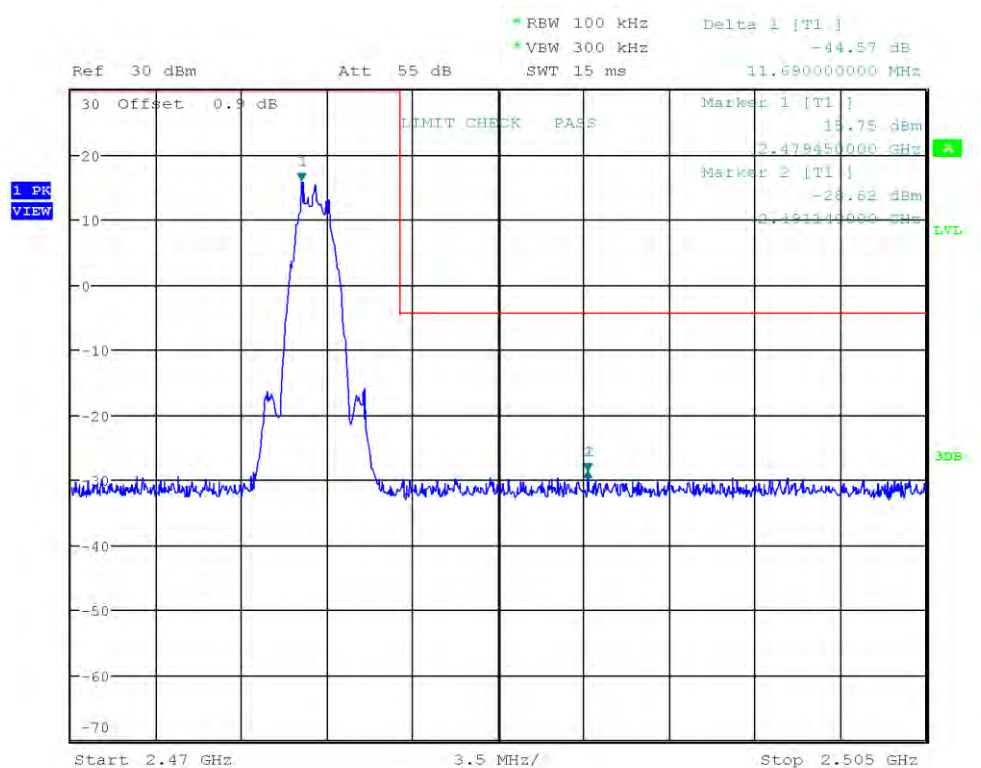

Date: 6.MAR.2023 10:36:42

3.7 Test Conditions and Results - Conducted spurious emissions


3.7.1 Information

Test Information	
Reference	FCC § 15.247(d); ISED RSS-247, Issue 2 (section 5.5)
Measurement Uncertainty	± 4.25 dB
Measurement Method	ANSI C63.10 11.11
Operator	Radwan Jaafar
Date	2023-03-10

3.7.2 Limits

Limits	
Power Measurement	Out-of-band attenuation [dB]
Peak	20
RMS	30

3.7.3 Setup

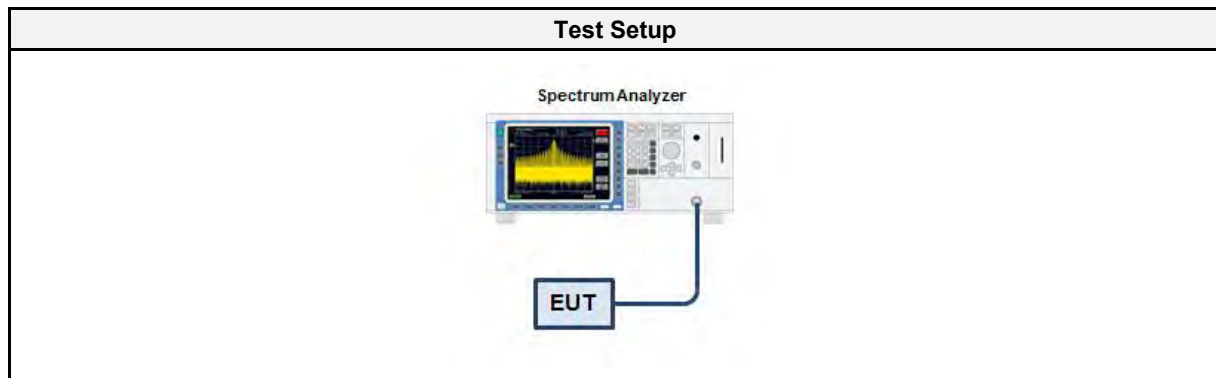

3.7.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyser	R&S	FSU 26	EF01003	2022-07	2023-07
Cable (CAABR)	Sucoflex	SUCOFLEX 1102EA	EF00779	2023-03	2024-03

3.7.5 Procedure

Test Procedure
1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels outside frequency band


3.7.6 Results

Test Results 1 Mbps		
Mode	Channel [MHz]	Verdict
GFSK	2402	PASS
GFSK	2440	PASS
GFSK	2480	PASS

Test Results 2 Mbps		
Mode	Channel [MHz]	Verdict
GFSK	2402	PASS
GFSK	2440	PASS
GFSK	2480	PASS

Conducted Spurious Emissions


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-10
 Note: PHY 1 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Max. in-band Frequency [MHz]: 2402.3
 Max. in-band Level [dBm/100 kHz]: 14.9
 Out-of-band Limit [dBm/100 kHz]: -5.1

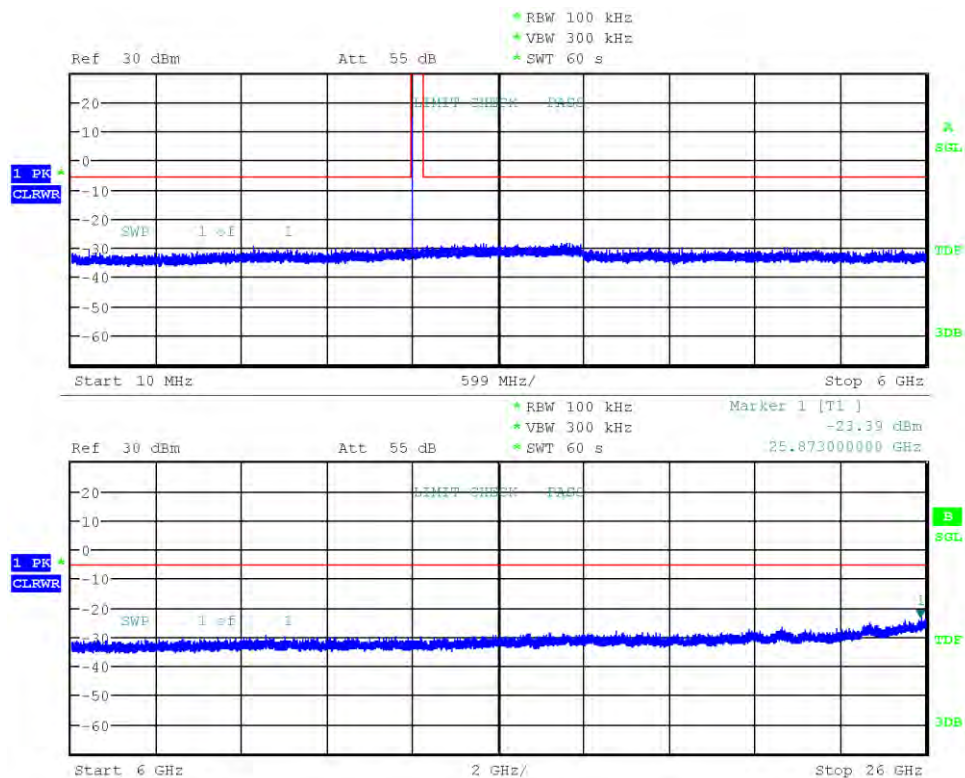

Date: 10.MAR.2023 09:38:11

Conducted Spurious Emissions


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-10
 Note: PHY 1 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Max. in-band Frequency [MHz]: 2440.3
 Max. in-band Level [dBm/100 kHz]: 14.9
 Out-of-band Limit [dBm/100 kHz]: -5.1

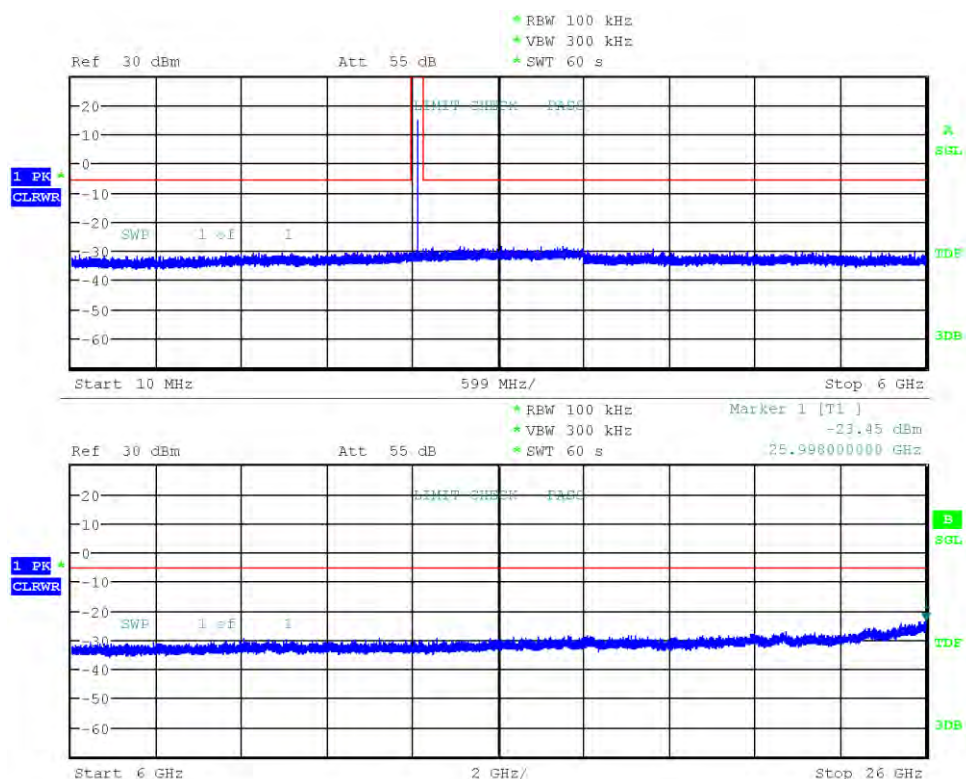

Date: 10.MAR.2023 09:44:47

Conducted Spurious Emissions


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-10
 Note: PHY 1 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Max. in-band Frequency [MHz]: 2480.2
 Max. in-band Level [dBm/100 kHz]: 15.3
 Out-of-band Limit [dBm/100 kHz]: -4.7

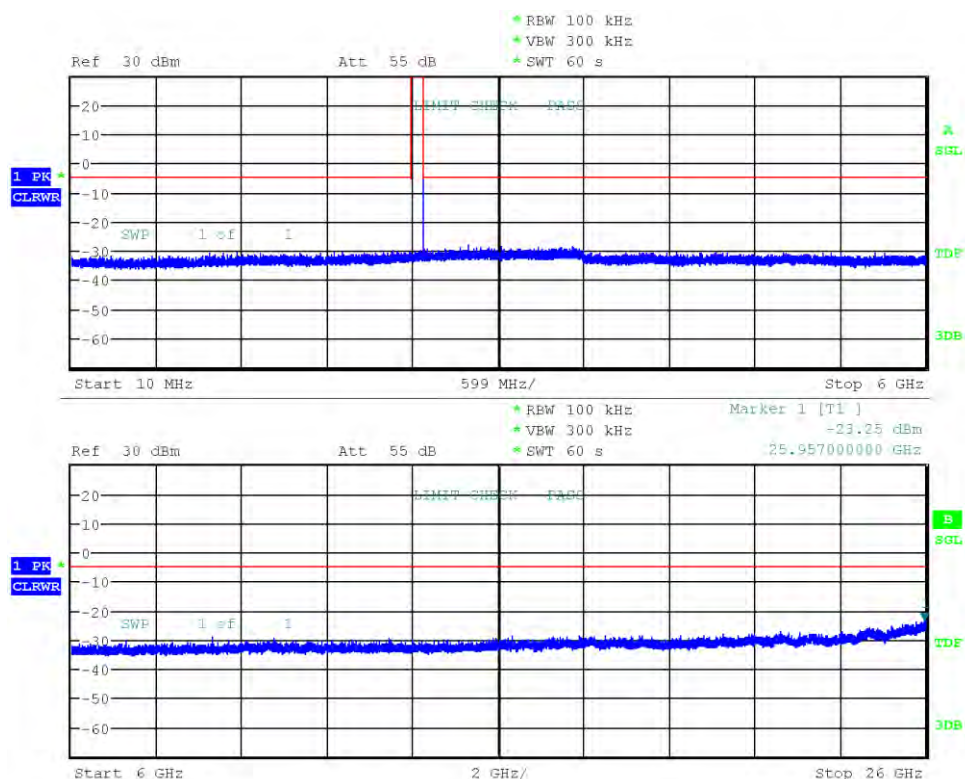

Date: 10.MAR.2023 09:50:21

Conducted Spurious Emissions


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-10
 Note: PHY 2 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Max. in-band Frequency [MHz]: 2401.5
 Max. in-band Level [dBm/100 kHz]: 14.6
 Out-of-band Limit [dBm/100 kHz]: -5.4

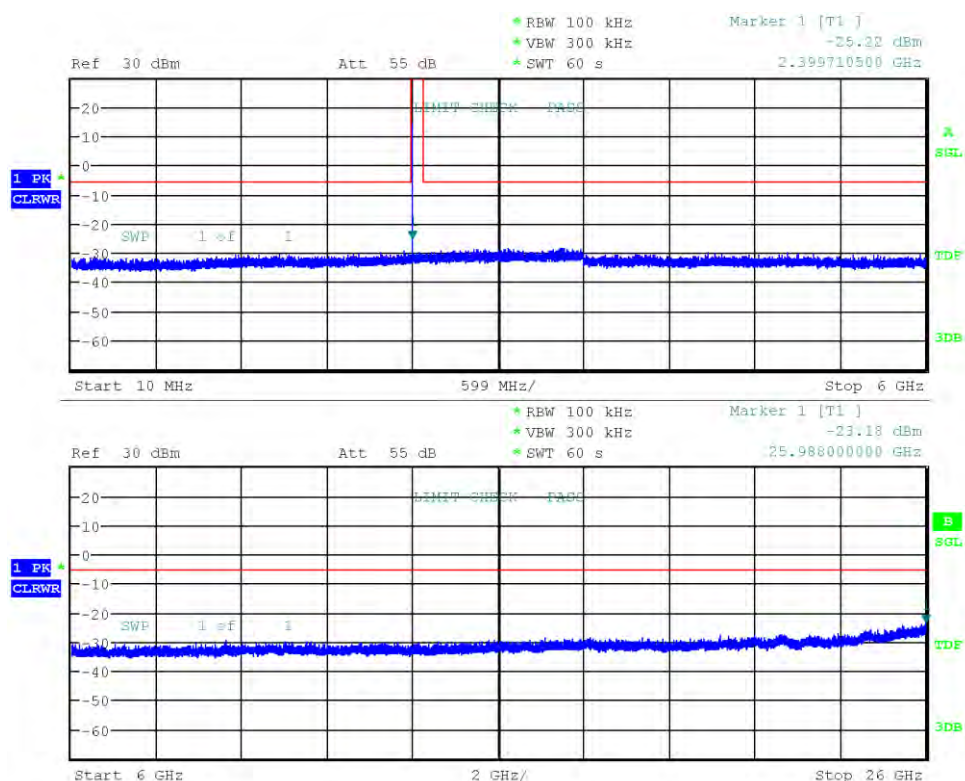

Date: 10.MAR.2023 09:55:14

Conducted Spurious Emissions


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-10
 Note: PHY 2 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Max. in-band Frequency [MHz]: 2439.5
 Max. in-band Level [dBm/100 kHz]: 14.6
 Out-of-band Limit [dBm/100 kHz]: -5.4

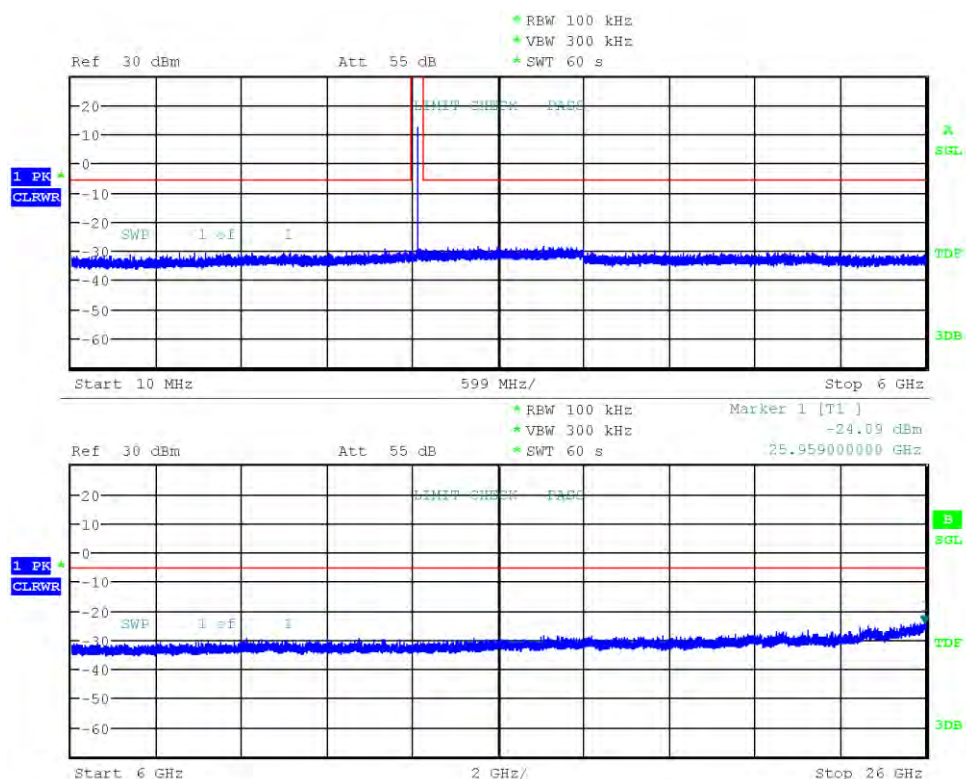

Date: 10.MAR.2023 10:00:06

Conducted Spurious Emissions

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Radwan Jaafar
 Test Site: Eurofins Product Service GmbH
 Test Date: 2023-03-10
 Note: PHY 2 Mbps, PRBS9, 193 bytes, Pmax (19 dBm)
 Max. in-band Frequency [MHz]: 2479.5
 Max. in-band Level [dBm/100 kHz]: 13.3
 Out-of-band Limit [dBm/100 kHz]: -6.7

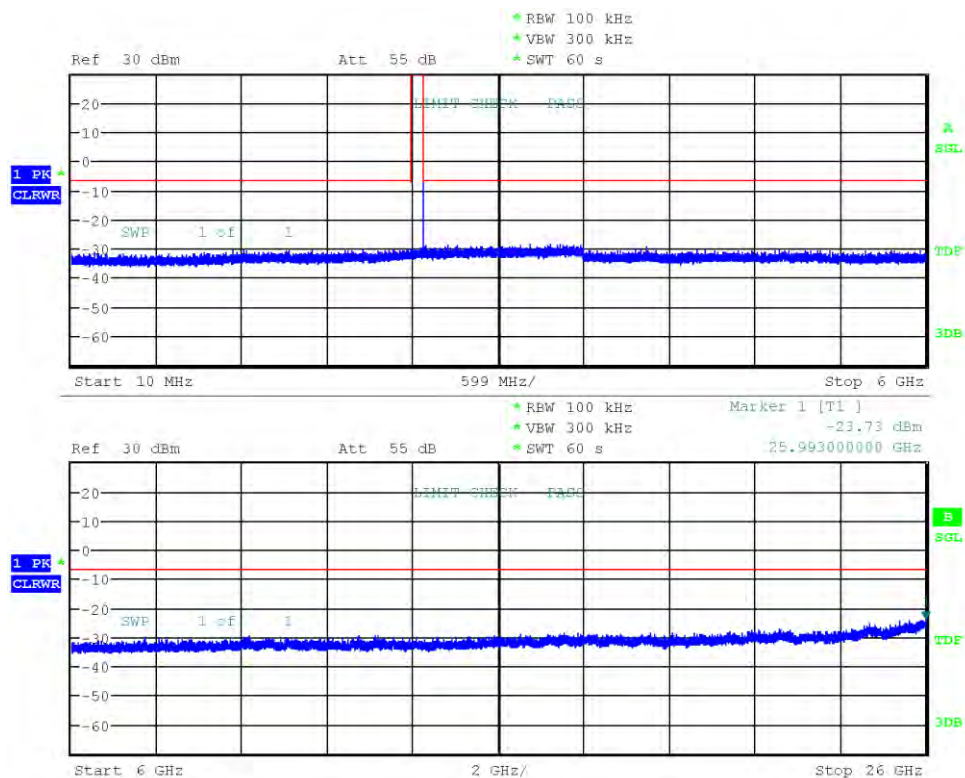

Date: 10.MAR.2023 10:04:28

3.8 Test Conditions and Results - Transmitter radiated emissions


3.8.1 Information


Test Information	
Reference	FCC § 15.247(d); FCC § 15.209; ISSED RSS-Gen, Issue 5 A2 (section 6.13)
Measurement Uncertainty	± 5.95 dB
Measurement Method	ANSI C63.10 6.4, 6.5, 6.6, 11.12
Operator	F. Voigt; R. Jaafar; G. Offorji
Date	2023-03-09 - 2023-04-06

3.8.2 Limits

Limits			
Frequency range [MHz]	Detector	Field strength [µV/m]	Measurement distance [m]
0.009 - 0.09	Average	2400/F[kHz]	300
0.09 - 0.110	Quasi-Peak	2400/F[kHz]	300
0.110 - 0.490	Average	2400/F[kHz]	300
0.490 - 1.705	Quasi-Peak	24000/F[kHz]	30
1.705 - 30.0	Quasi-Peak	30	30
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.8.3 Setup

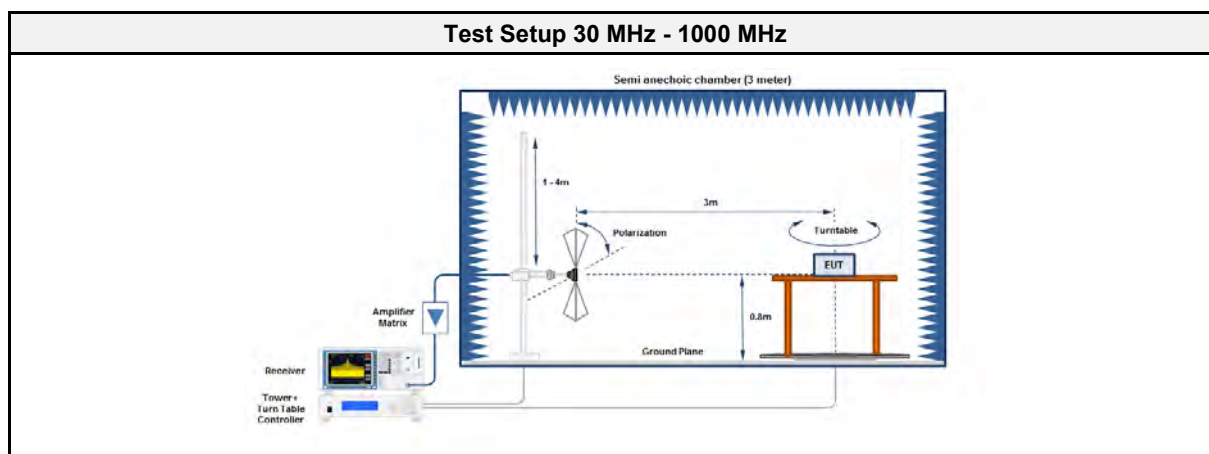

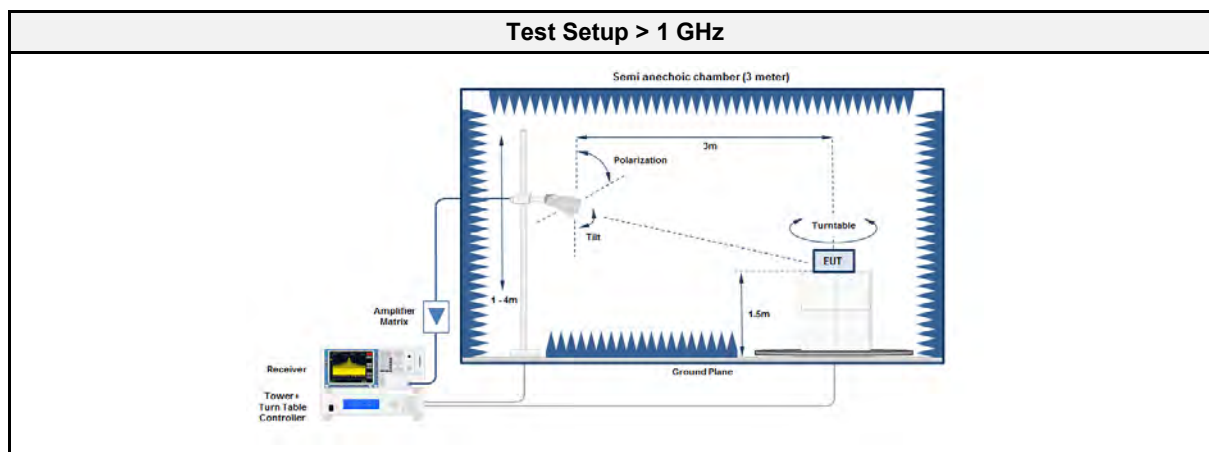

3.8.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2020.1.8

Test Equipment 30 MHz - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2022-11	2025-11
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2023-02	2024-02
Antenna	Schwarzbeck	VULB 9168	EF01824	2022-10	2023-10

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC2	EF01616	2022-10	2023-10
Spectrum analyzer	R&S	FSW43	EF00896	2022-08	2023-08
Antenna	Schwarzbeck	BBHA 9120B	EF01678	2021-03	2024-03
Antenna	Schwarzbeck	HWRD 650	EF01679	2021-03	2024-03
Antenna	Amplifier Research	AT4560	EF00302	2021-06	2023-06

3.8.5 Procedure

Test Procedure 30 MHz - 1000 MHz
1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector

Test Procedure > 1 GHz
1. EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector

3.8.6 Results

Test Results – 1 Mbps (with Antenna-1)						
Channel [MHz]	Emission [MHz]	Level [dBµV/m]	Det.	Pol.	Limit [dBµV/m]	Margin [dB]
2402	640.0088	32.90	pk	ver	95.00	-62.06
2402	2297.4	43.72	pk	hor	74.00	-30.28
2402	2297.4	33.57	avg	hor	54.00	-20.43
2402	2362.1	58.44	pk	hor	74.00	-15.56
2402	2362.1	43.40	avg	hor	54.00	-10.60
2402	4804.1	46.95	pk	ver	74.00	-27.05
2402	4804.1	42.69	avg	ver	54.00	-11.31
2440	7320.7	49.81	pk	ver	74.00	-24.19
2440	7320.7	41.56	avg	ver	54.00	-12.44
2480	2483.8	57.97	pk	ver	74.00	-16.03
2480	2483.8	58.88	pk	ver	74.00	-15.12
2480	2483.8	47.04	avg	ver	54.00	-06.96
2480	2483.8	44.47	avg	ver	54.00	-09.53
2480	2720	49.55	pk	ver	74.00	-24.45
2480	2720	33.62	avg	ver	54.00	-20.38
2480	4960	45.33	pk	ver	74.00	-28.67
2480	4960	39.24	avg	ver	54.00	-14.76
2480	7439	52.58	pk	ver	74.00	-21.42
2480	7439	47.18	avg	ver	54.00	-06.82
2480	7440	49.99	pk	hor	74.00	-24.01
2480	7440	43.32	avg	hor	54.00	-10.68

Test Results – 2 Mbps (with Antenna-1)						
Channel [MHz]	Emission [MHz]	Level [dBµV/m]	Det.	Pol.	Limit [dBµV/m]	Margin [dB]
2402	1440	38.10	pk	ver	74.00	-35.90
2402	1440	29.95	avg	ver	54.00	-24.05
2402	1553.6	53.07	pk	ver	74.00	-20.93
2402	1553.6	29.72	avg	ver	54.00	-24.28
2402	2371.4	50.97	pk	ver	74.00	-23.03
2402	2371.4	43.64	avg	ver	54.00	-10.36
2402	17812	44.69	pk	hor	74.00	-29.31
2402	17812	33.00	avg	hor	54.00	-21.00
2440	1440	34.45	pk	ver	74.00	-39.55
2440	1440	27.63	avg	ver	54.00	-26.37
2440	7321.2	48.00	pk	ver	74.00	-26.00
2440	7321.2	43.81	avg	ver	54.00	-10.19
2440	18095	46.37	pk	ver	74.00	-27.63
2440	18095	36.74	avg	ver	54.00	-17.26
2480	2483.5	55.79	pk	ver	74.00	-18.21
2480	2483.5	45.13	avg	ver	54.00	-08.87
2480	7439	49.46	pk	ver	74.00	-24.54
2480	7439	42.98	avg	ver	54.00	-11.02
2480	2480	47.91	pk	hor	74.00	-26.09
2480	2480	36.58	avg	hor	54.00	-17.42

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Test Results – 1 Mbps (with Antenna-2)						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2402	132.6987	26.70	pk	ver	43.50	-16.78
2402	2362.2	55.01	pk	hor	74.00	-18.99
2402	2362.2	41.62	avg	hor	54.00	-12.38
2402	4804.4	47.09	pk	ver	74.00	-26.91
2402	4804.4	41.89	avg	ver	54.00	-12.11
2402	17807	43.77	pk	ver	74.00	-30.23
2402	17807	32.60	avg	ver	54.00	-21.40
2440	132.723	27.00	pk	ver	43.50	-16.49
2440	4879.9	43.84	pk	ver	74.00	-30.16
2440	4879.9	40.21	avg	ver	54.00	-13.79
2440	7320.1	51.52	pk	ver	74.00	-22.48
2440	7320.1	46.10	avg	ver	54.00	-07.90
2440	12199	40.54	pk	ver	74.00	-33.46
2440	12199	34.03	avg	ver	54.00	-19.97
2480	132.723	27.20	pk	ver	43.50	-16.32
2480	1280	41.25	pk	hor	74.00	-32.75
2480	1280	36.36	avg	hor	54.00	-17.64
2480	7441	51.46	pk	ver	74.00	-22.54
2480	7441	45.78	avg	ver	54.00	-08.22
2480	12401	40.84	pk	ver	74.00	-33.16
2480	12401	33.17	avg	ver	54.00	-20.83

Test Results – 2 Mbps (with Antenna-2)						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2402	4803.2	46.07	pk	hor	74.00	-27.93
2402	4803.2	40.12	avg	hor	54.00	-13.88
2402	17815	42.07	pk	ver	74.00	-31.93
2402	17815	33.34	avg	ver	54.00	-20.66
2440	1440	35.40	pk	ver	74.00	-38.60
2440	1440	30.49	avg	ver	54.00	-23.51
2440	4881.1	45.06	pk	ver	74.00	-28.94
2440	4881.1	38.46	avg	ver	54.00	-15.54
2440	7319.1	42.66	pk	ver	74.00	-31.34
2440	7319.1	37.19	avg	ver	54.00	-16.81
2440	17785	42.64	pk	ver	74.00	-31.36
2440	17785	33.03	avg	ver	54.00	-20.97
2480	1280	41.81	pk	ver	74.00	-32.19
2480	1280	35.79	avg	ver	54.00	-18.21
2480	7439	47.09	pk	ver	74.00	-26.91
2480	7439	39.87	avg	ver	54.00	-14.13

3.8.7 Setup Photos

Setup for measurements below 1 GHz

Photos deleted.

Refer to separate photo exhibits.

EUT Test Setup

Photos deleted.

Refer to separate photo exhibits.

Setup for measurements above 1 GHz

Photos deleted.

Refer to separate photo exhibits.

3.9 Test Conditions and Results - Receiver radiated emissions



3.9.1 Information

Test Information	
Reference	ISED RSS-247, Issue 2 (section 3.1)
Measurement Uncertainty	± 5.95 dB
Measurement Method	ANSI C63.4-2014 8.1-8.3
Operator	F. Voigt; O. Qawasmeh
Date	2023-03-10 & 2023-04-04

3.9.2 Limits

Limits			
Frequency range [MHz]	Detector	Field strength [$\mu\text{V/m}$]	Measurement distance [m]
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.9.3 Setup

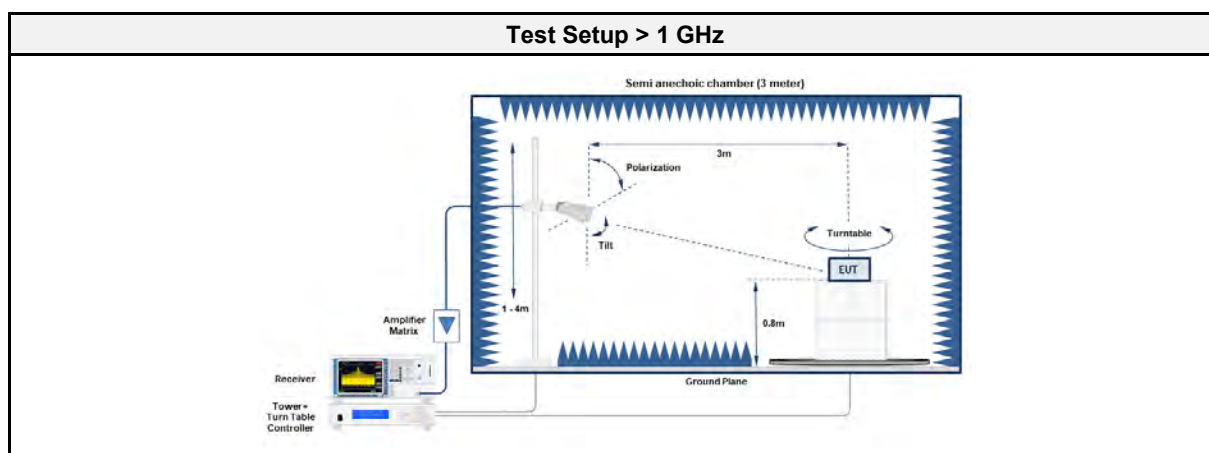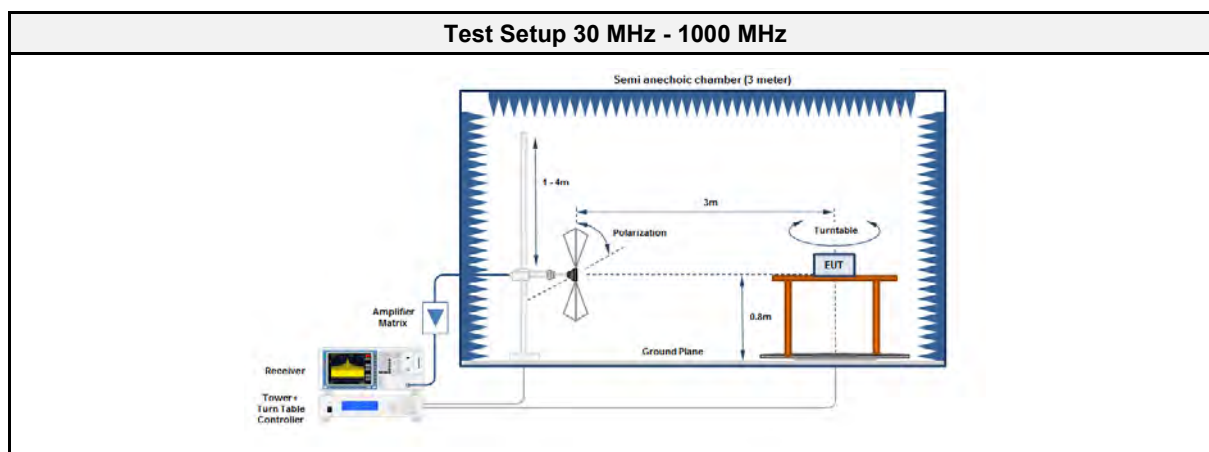

3.9.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2020.1.8

Test Equipment 30 MHz - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2021-02	2024-02
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2021-07	2023-01
Antenna	Schwarzbeck	VULB 9168	EF01824	2022-10	2023-10

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF01011	2022-06	2025-06
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2021-07	2023-01
Antenna	Schwarzbeck	BBHA 9120D	EF01561	2021-11	2024-11
Antenna	Schwarzbeck	HWRD 650	EF01679	2021-03	2024-03

3.9.5 Procedure

Test Procedure
1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT is set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector

3.9.6 Results

Test Results (with Antenna-1)						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2440	639.9951	37.30	pk	ver	46.00	-08.70
2440	639.9951	33.50	qpk	ver	46.00	-12.45
2440	1280	37.26	pk	ver	74.00	-36.74
2440	1280	33.04	avg	ver	53.98	-20.94
2440	17846	42.96	pk	ver	74.00	-31.04
2440	17846	30.83	avg	ver	53.98	-23.15

Test Results (with Antenna-2)						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2440	61.8292	35.50	pk	ver	40.00	-04.46
2440	61.8292	17.10	qpk	ver	40.00	-22.95
2440	6331	47.41	pk	ver	74.00	-26.59
2440	6331	34.82	avg	ver	53.98	-19.16
2440	16496	41.79	pk	ver	74.00	-32.21
2440	16496	26.16	avg	ver	53.98	-27.82

3.9.7 Setup Photos

Setup for measurements below 1 GHz

Photos deleted.
Refer to separate photo exhibits.

Setup for measurements above 1 GHz

Photos deleted.

Refer to separate photo exhibits.

EUT Test Setup


Photos deleted.

Refer to separate photo exhibits.

ANNEX A Transmitter spurious emissions (with Antenna-1)

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck VULB 9168
 Measurement distance: 3 m
 Mode: Tx; BT-LE 5.3, 2402 MHz, PRBS9, 193 Bytes, 1 Mbit/s, P = 19 dBm
 Test Date: 2023-03-10

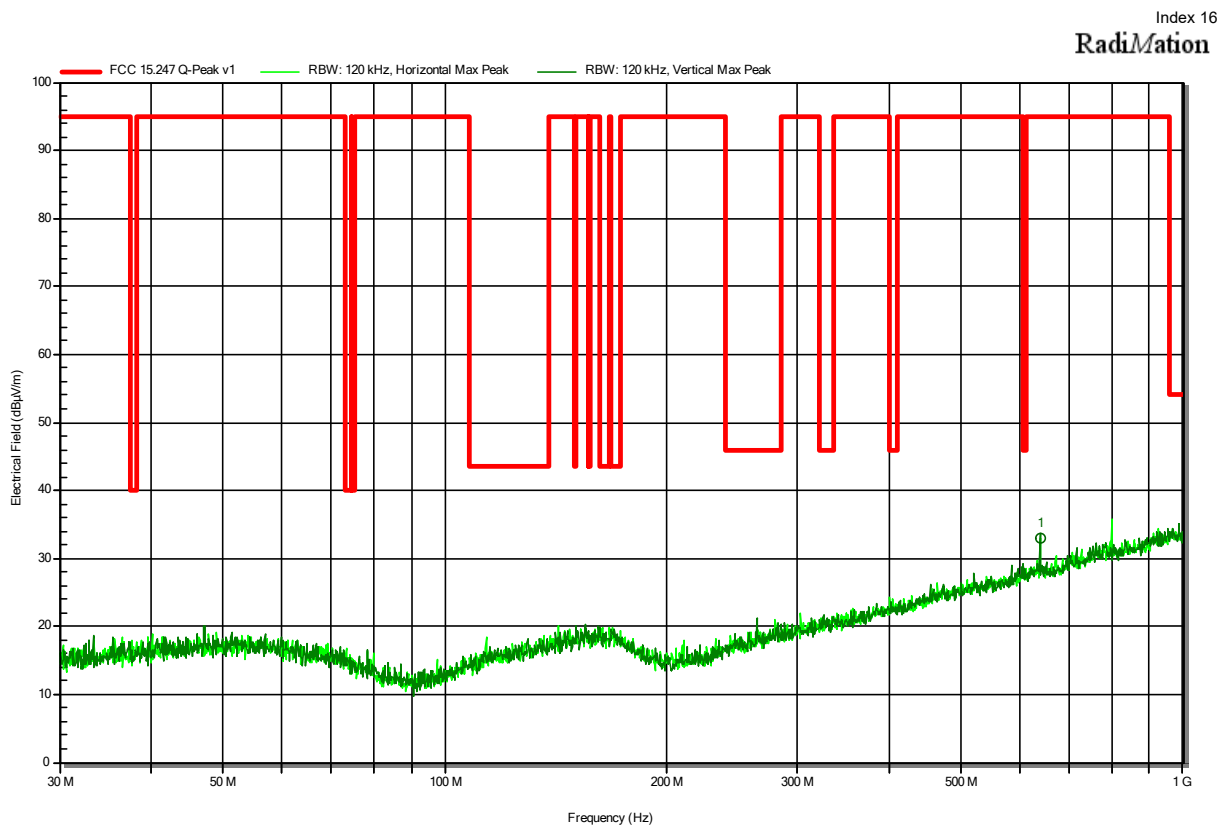

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
640.0088 MHz	32.9 dBμV/m	95 dBμV/m	-62.06 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: R. Jaafar
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; BT-LE 5.3, 2402 MHz, PRBS9, 193 Bytes, 1 Mbit/s, P = 19 dBm
 Test Date: 2023-03-31

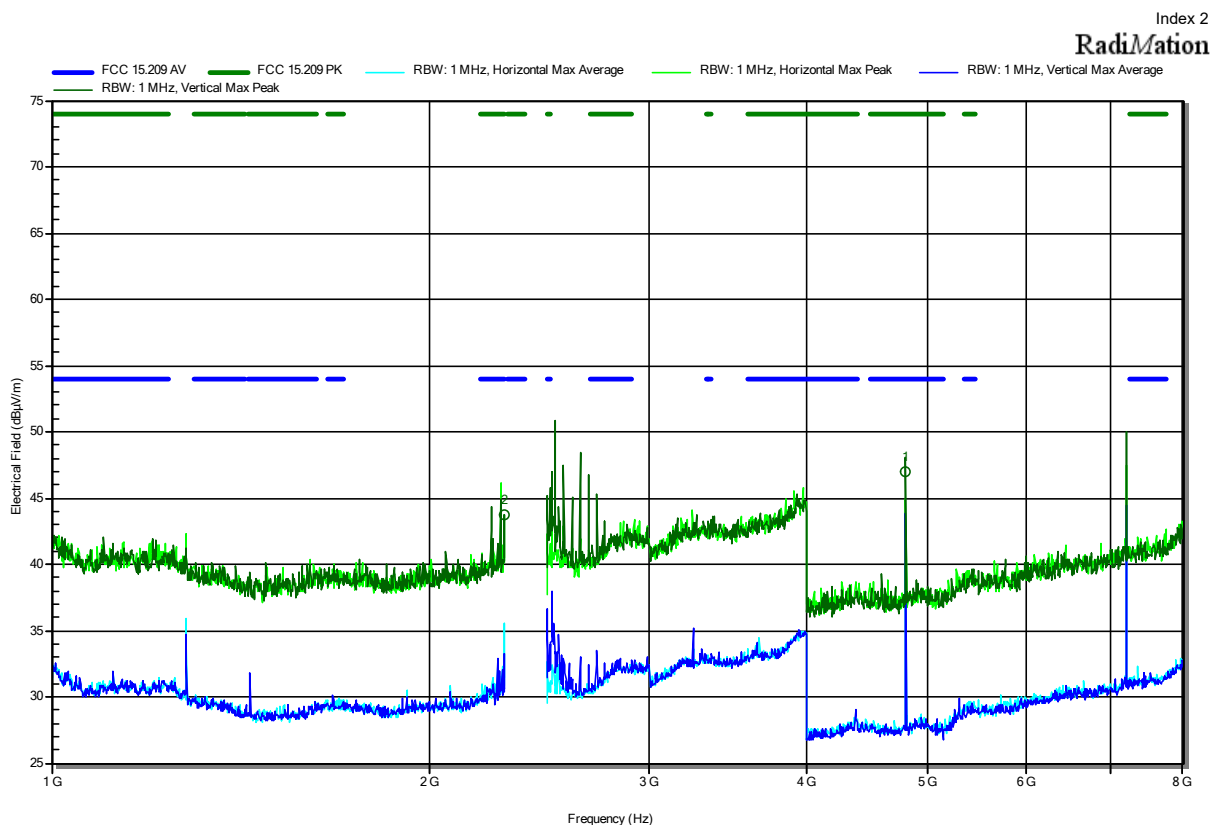

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
2.2974 GHz	43.72 dBµV/m	74 dBµV/m	-30.28 dB	Pass	Horizontal
4.8041 GHz	46.95 dBµV/m	74 dBµV/m	-27.05 dB	Pass	Vertical


Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
2.2974 GHz	33.57 dBµV/m	54 dBµV/m	-20.43 dB	Pass	Horizontal
4.8041 GHz	42.69 dBµV/m	54 dBµV/m	-11.31 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: R. Jaafar
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; BT-LE 5.3, 2402 MHz, PRBS9, 193 Bytes, 1 Mbit/s, P = 19 dBm
 Test Date: 2023-03-31
 Note: lower bandedge

Index 22

RadiMation

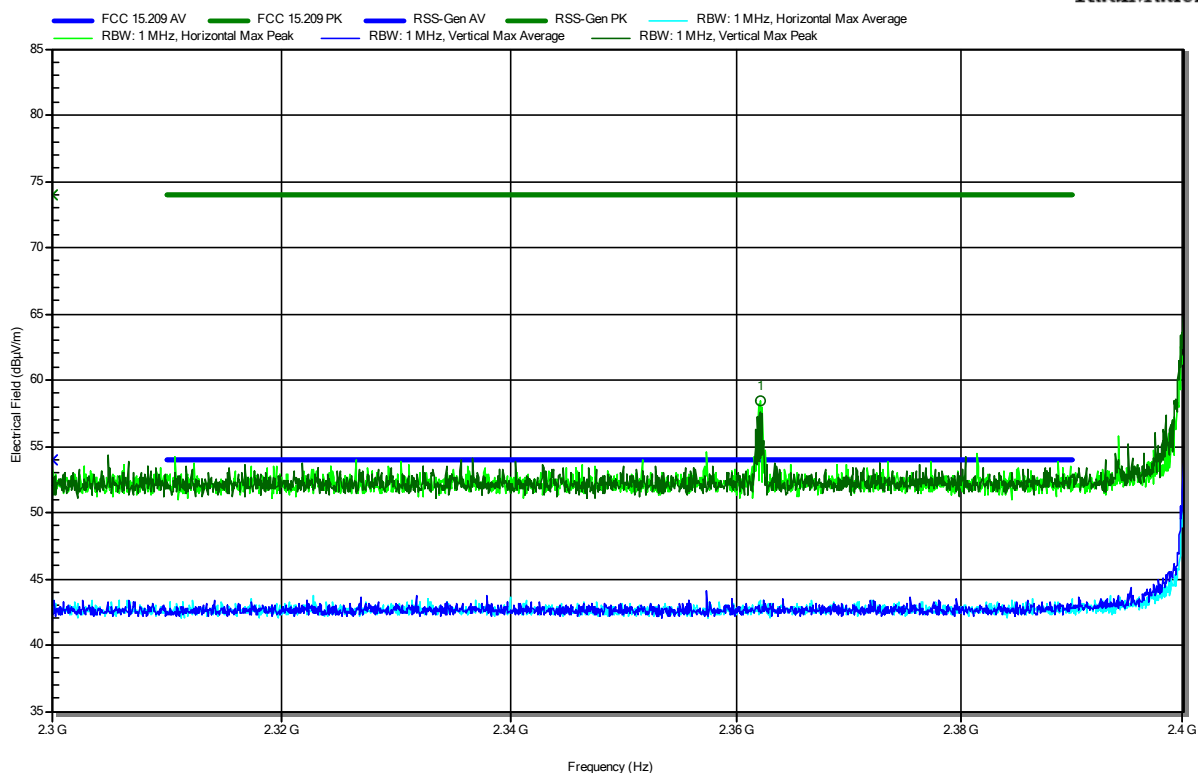


Frequency 2.3621 GHz	Peak 58.44 dBμV/m	Peak Limit 74 dBμV/m	Peak Difference -15.56 dB	Peak Status Pass	Polarization Horizontal
Frequency 2.3621 GHz	Average 43.4 dBμV/m	Average Limit 54 dBμV/m	Average Difference -10.6 dB	Average Status Pass	Polarization Horizontal

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; BT-LE 5.3, 2402 MHz, PRBS9, 193 Bytes, 1 Mbit/s, P = 19 dBm
 Test Date: 2023-03-09
 Note: EUT Hor

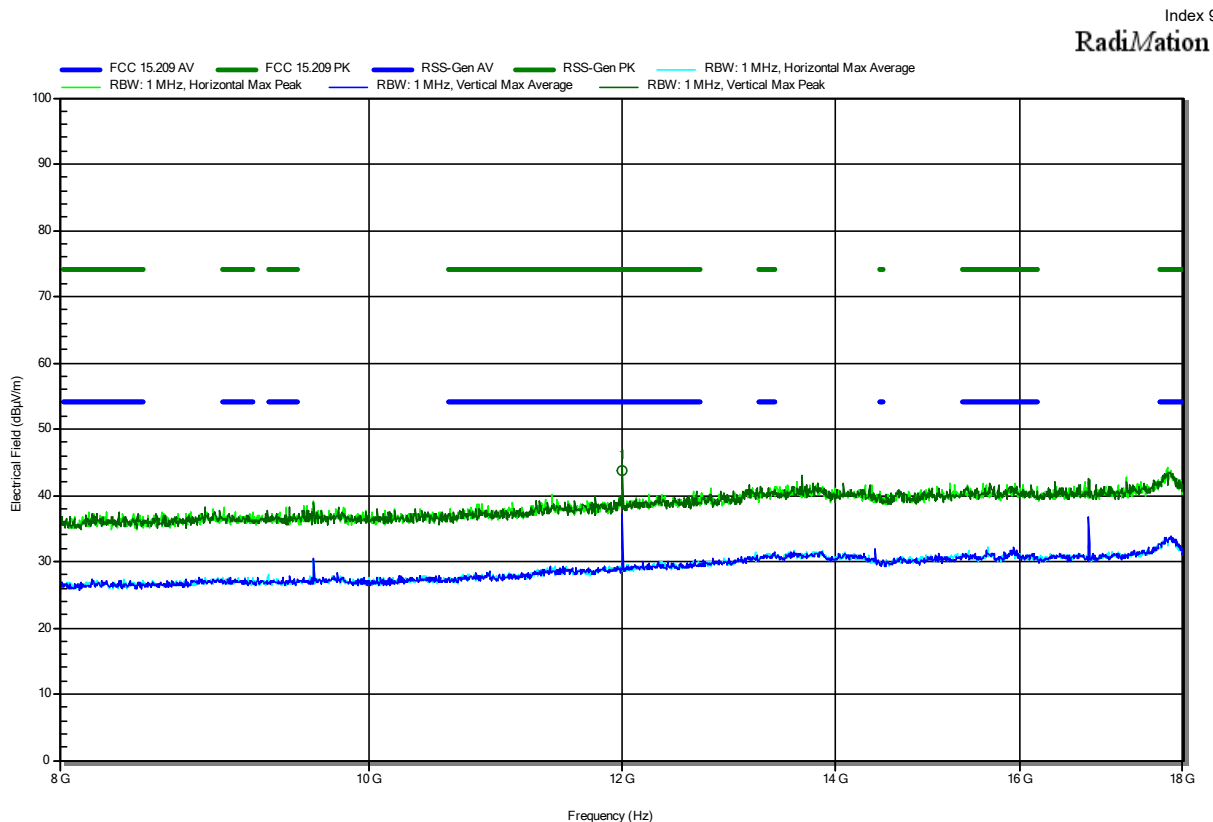

Frequency 12.009 GHz	Peak 43.77 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -30.23 dB	Peak Status Pass	Polarization Vertical
Frequency 12.009 GHz	Average 37.16 dBµV/m	Average Limit 54 dBµV/m	Average Difference -16.84 dB	Average Status Pass	Polarization Vertical


Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; BT-LE 5.3, 2402 MHz, PRBS9, 193 Bytes, 1 Mbit/s, P = 19 dBm
 Test Date: 2023-03-09
 Note: EUT Hor

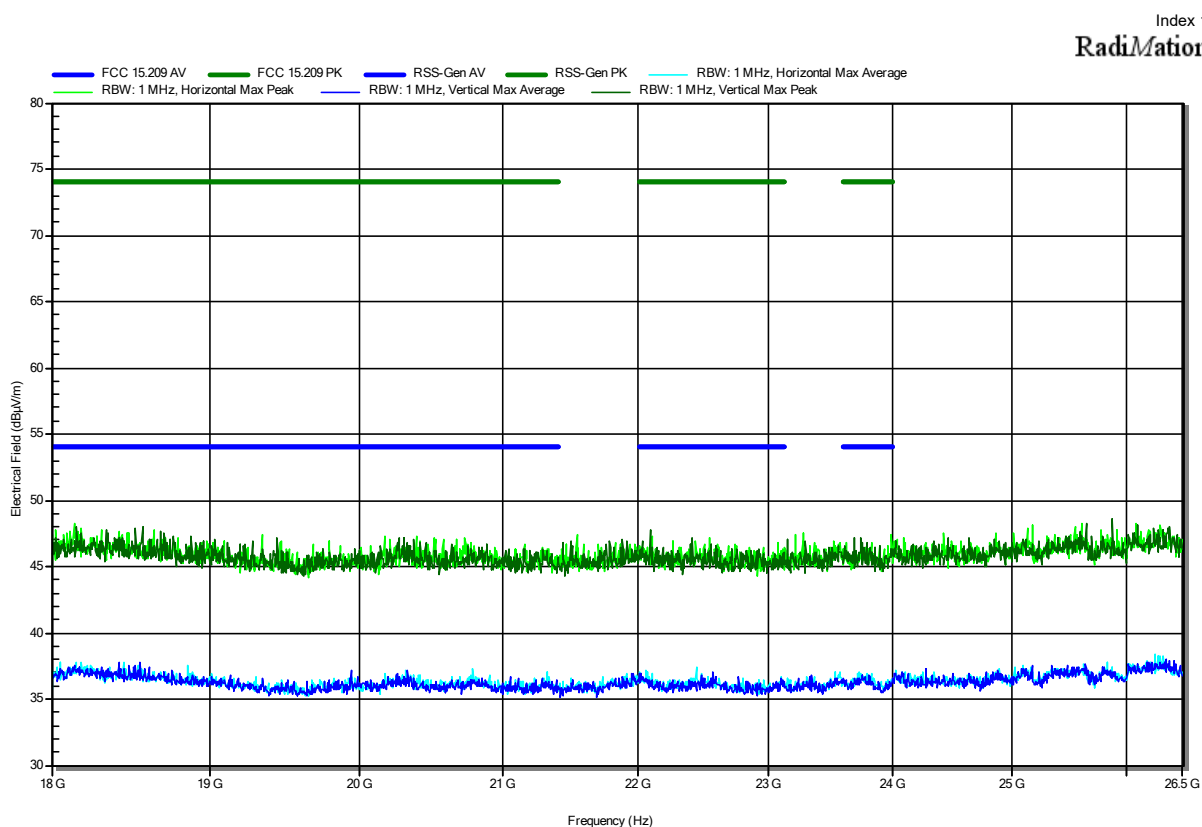

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck VULB 9168
 Measurement distance: 3 m
 Mode: Tx; BT-LE 5.3, 2440 MHz, PRBS9, 193 Bytes, 1 Mbit/s, P = 19 dBm
 Test Date: 2023-03-10

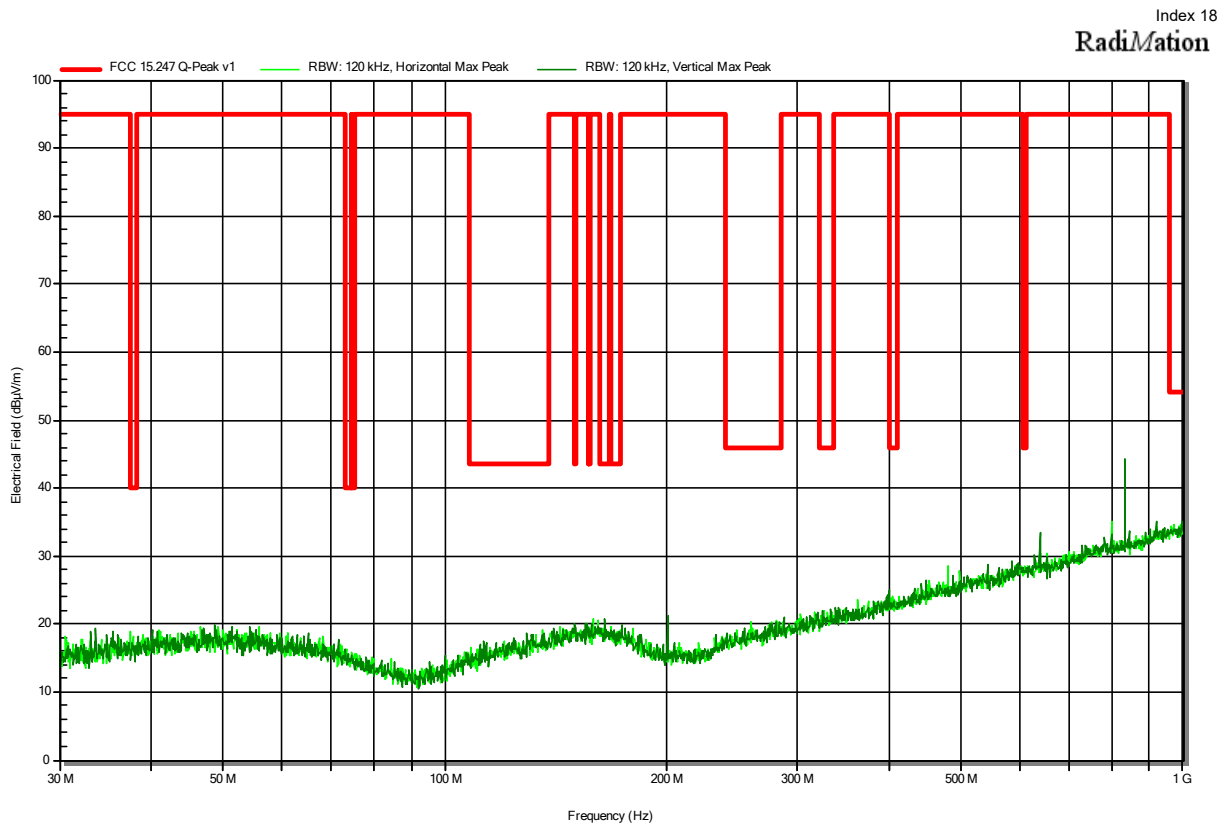


Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: R. Jaafar
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; BT-LE 5.3, 2440 MHz, PRBS9, 193 Bytes, 1 Mbit/s, P = 19 dBm
 Test Date: 2023-03-31

Index 23

RadiMation

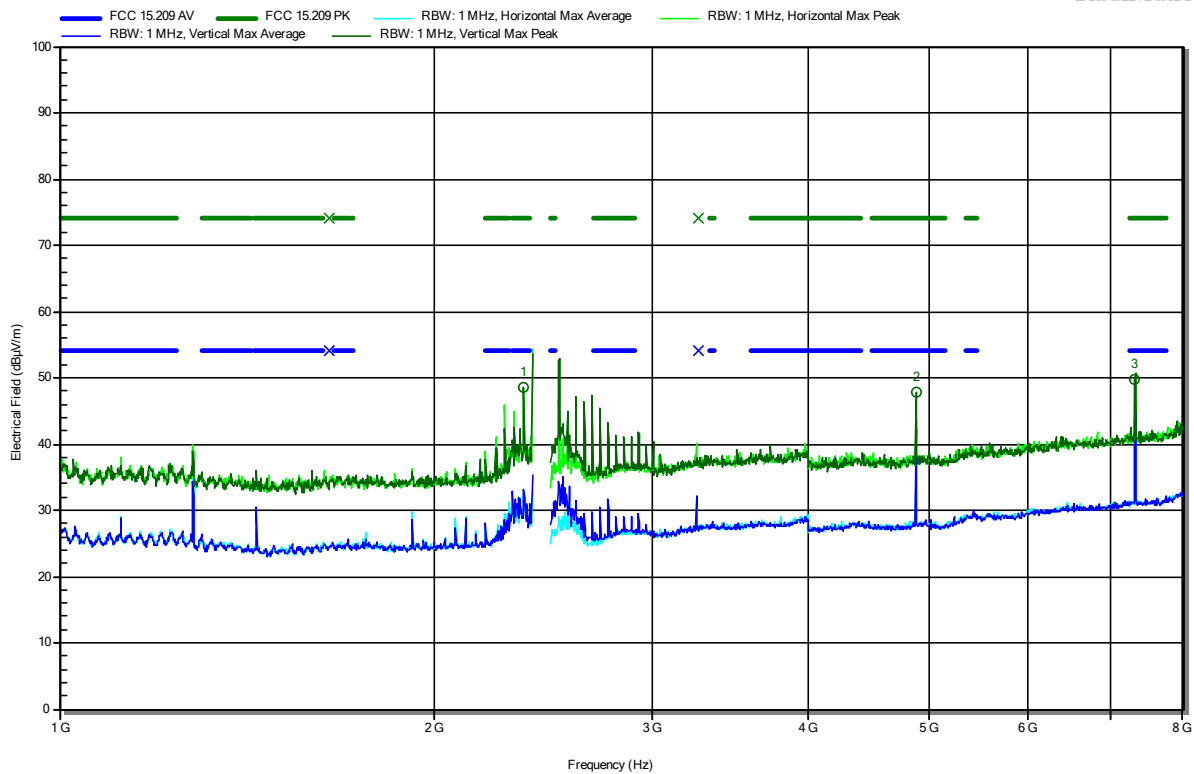

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
2.3599 GHz	48.55 dBμV/m	74 dBμV/m	-25.45 dB	Pass	Vertical
4.8799 GHz	47.87 dBμV/m	74 dBμV/m	-26.13 dB	Pass	Vertical
7.3207 GHz	49.81 dBμV/m	74 dBμV/m	-24.19 dB	Pass	Vertical

Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
2.3599 GHz	33.09 dBμV/m	54 dBμV/m	-20.91 dB	Pass	Vertical
4.8799 GHz	41.68 dBμV/m	54 dBμV/m	-12.32 dB	Pass	Vertical
7.3207 GHz	41.56 dBμV/m	54 dBμV/m	-12.44 dB	Pass	Vertical

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck VULB 9168
 Measurement distance: 3 m
 Mode: Tx; BT-LE 5.3, 2480 MHz, PRBS9, 193 Bytes, 1 Mbit/s, P = 19 dBm
 Test Date: 2023-03-10


Index 19

RadiMation

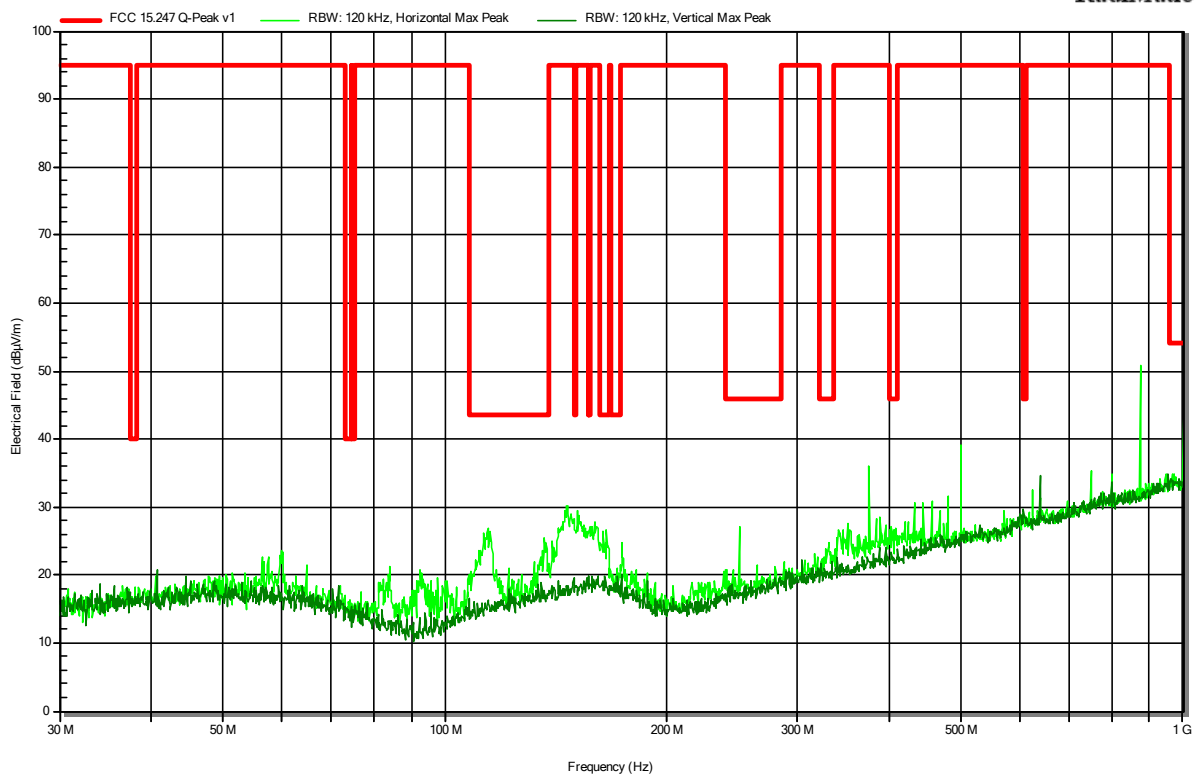

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: R. Jaafar
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; BT-LE 5.3, 2480 MHz, PRBS9, 193 Bytes, 1 Mbit/s, P = 19 dBm
 Test Date: 2023-03-31

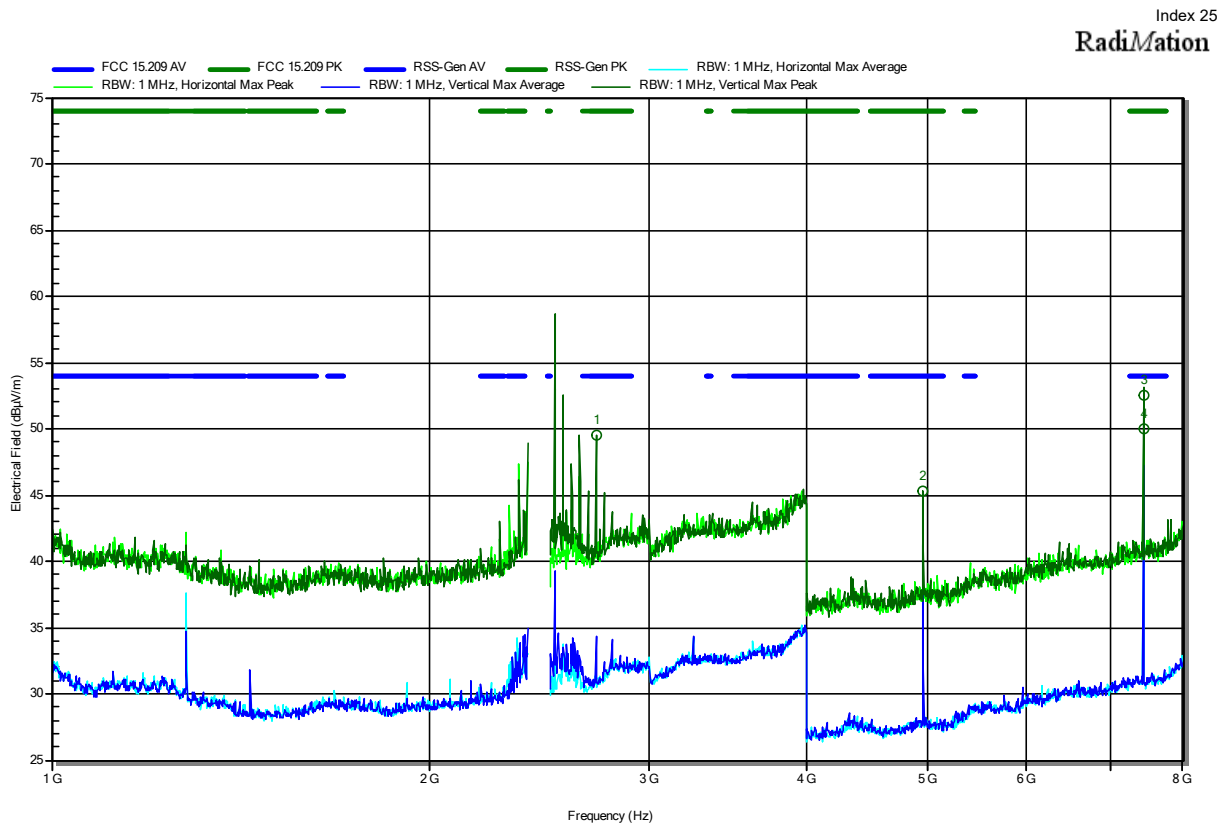

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
2.72 GHz	49.55 dBµV/m	74 dBµV/m	-24.45 dB	Pass	Vertical
4.96 GHz	45.33 dBµV/m	74 dBµV/m	-28.67 dB	Pass	Vertical
7.439 GHz	52.58 dBµV/m	74 dBµV/m	-21.42 dB	Pass	Vertical
7.44 GHz	49.99 dBµV/m	74 dBµV/m	-24.01 dB	Pass	Horizontal

Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
2.72 GHz	33.62 dBµV/m	54 dBµV/m	-20.38 dB	Pass	Vertical
4.96 GHz	39.24 dBµV/m	54 dBµV/m	-14.76 dB	Pass	Vertical
7.439 GHz	47.18 dBµV/m	54 dBµV/m	-6.82 dB	Pass	Vertical
7.44 GHz	43.32 dBµV/m	54 dBµV/m	-10.68 dB	Pass	Horizontal

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; BT-LE 5.3, 2480 MHz, PRBS9, 193 Bytes, 1 Mbit/s, P = 19 dBm
 Test Date: 2023-04-03
 Note: upper bandedge

Index 26

RadiMation

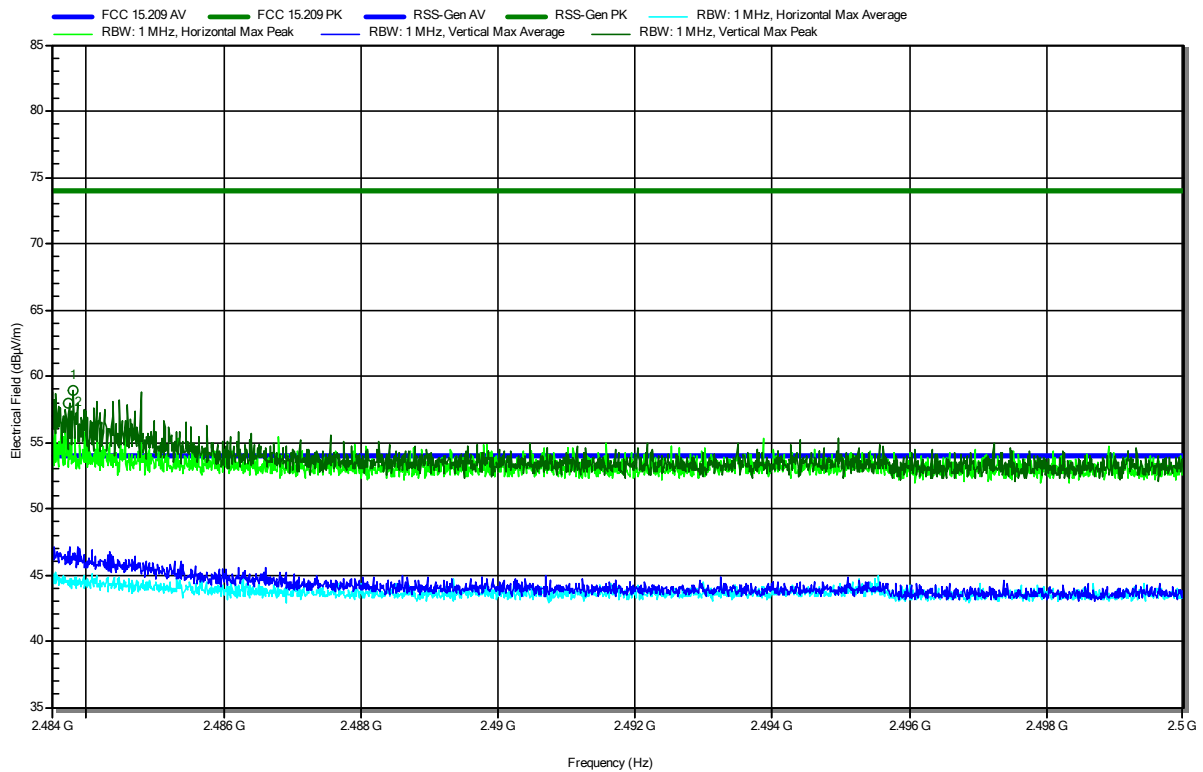

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
2.4838 GHz	57.97 dBμV/m	74 dBμV/m	-16.03 dB	Pass	Vertical
2.4838 GHz	58.88 dBμV/m	74 dBμV/m	-15.12 dB	Pass	Vertical


Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
2.4838 GHz	47.04 dBμV/m	54 dBμV/m	-6.96 dB	Pass	Vertical
2.4838 GHz	44.47 dBμV/m	54 dBμV/m	-9.53 dB	Pass	Vertical

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; BT-LE 5.3, 2480 MHz, PRBS9, 193 Bytes, 1 Mbit/s, P = 19 dBm
 Test Date: 2023-03-09
 Note:

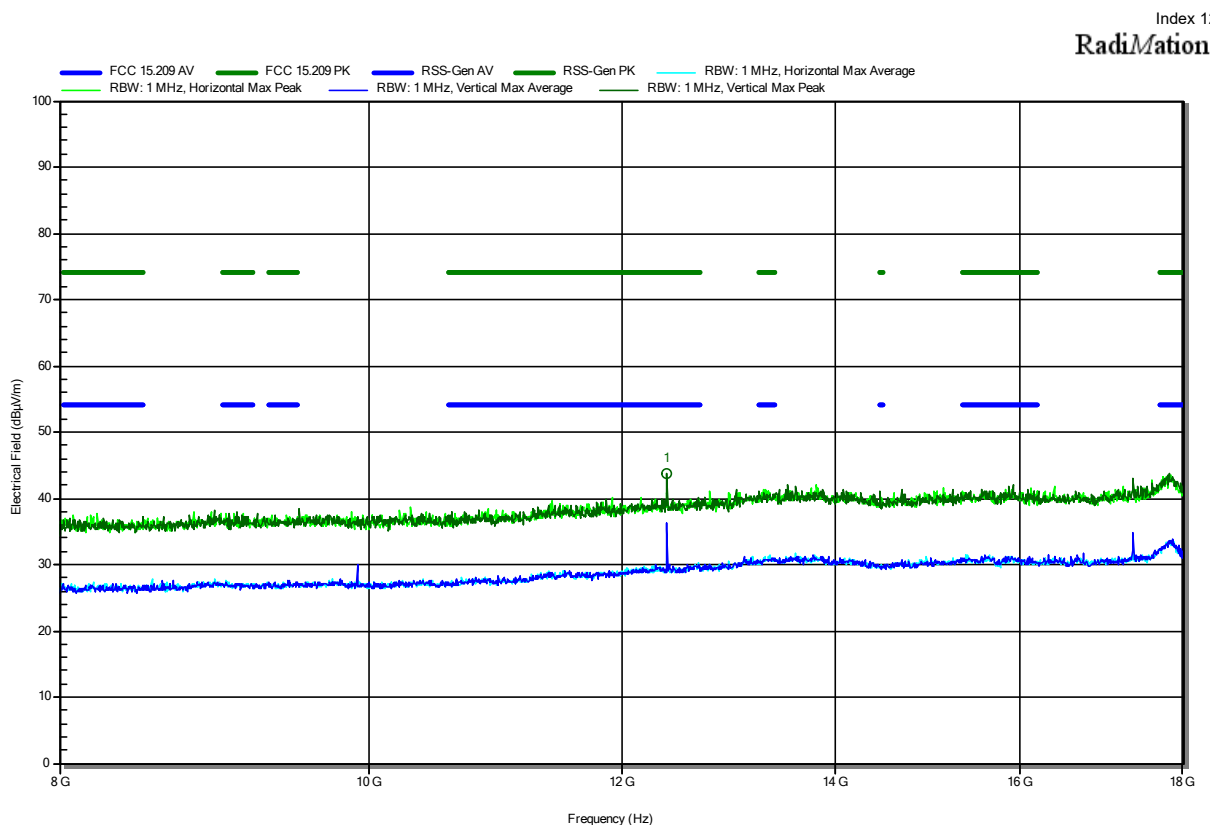


Frequency 12.399 GHz	Peak 43.76 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -30.24 dB	Peak Status Pass	Polarization Vertical
Frequency 12.399 GHz	Average 35.77 dBµV/m	Average Limit 54 dBµV/m	Average Difference -18.23 dB	Average Status Pass	Polarization Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; BT-LE 5.3, 2480 MHz, PRBS9, 193 Bytes, 1 Mbit/s, P = 19 dBm
 Test Date: 2023-03-09
 Note:


Index 11

RadiMation

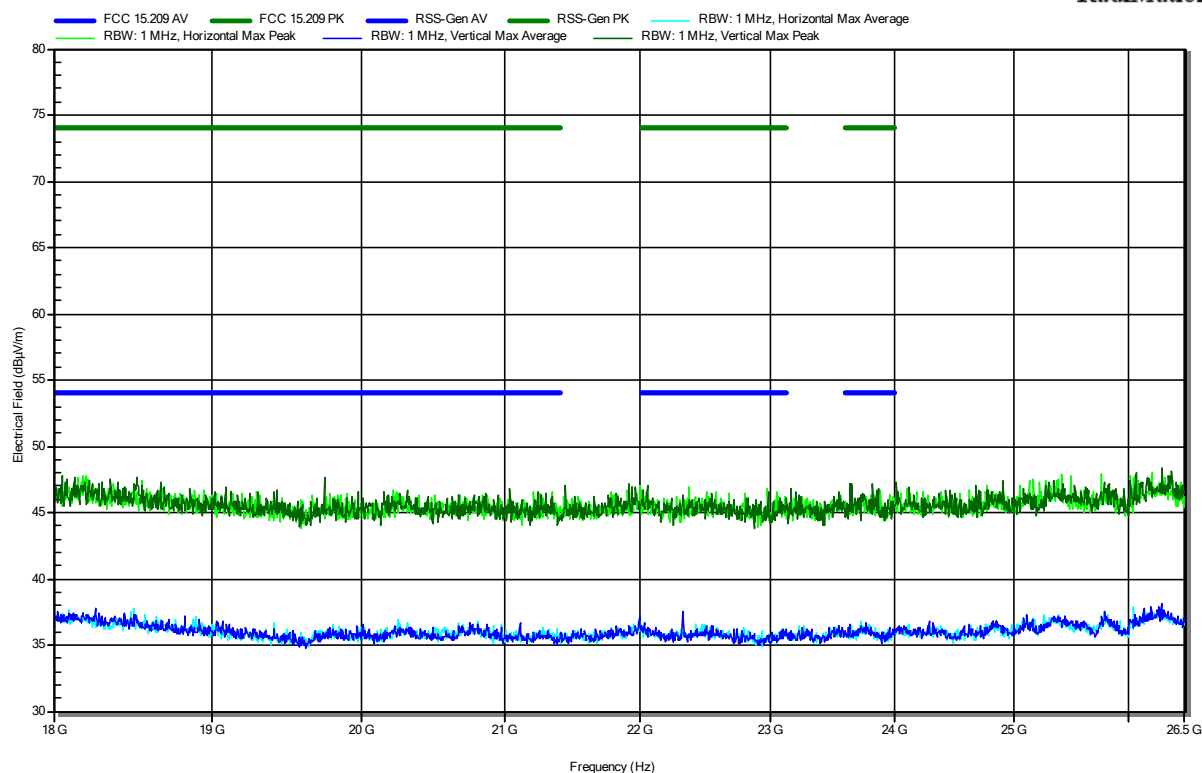

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2402 MHz, PRBS9, 250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-06
 Note:

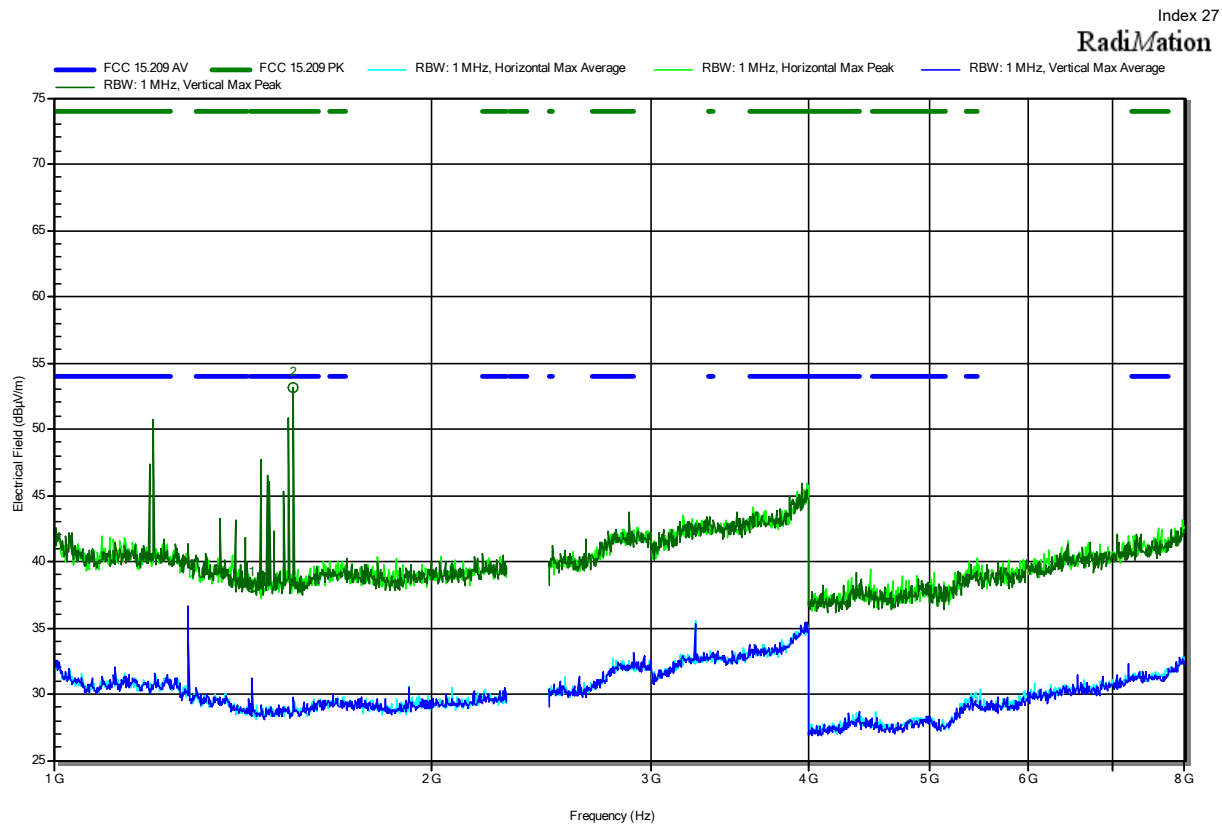


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
1.44 GHz	38.1 dBμV/m	74 dBμV/m	-35.9 dB	Pass	Vertical
1.5536 GHz	53.07 dBμV/m	74 dBμV/m	-20.93 dB	Pass	Vertical

Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
1.44 GHz	29.95 dBμV/m	54 dBμV/m	-24.05 dB	Pass	Vertical
1.5536 GHz	29.72 dBμV/m	54 dBμV/m	-24.28 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2402 MHz, PRBS9, 250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-06
 Note: lower bandedge

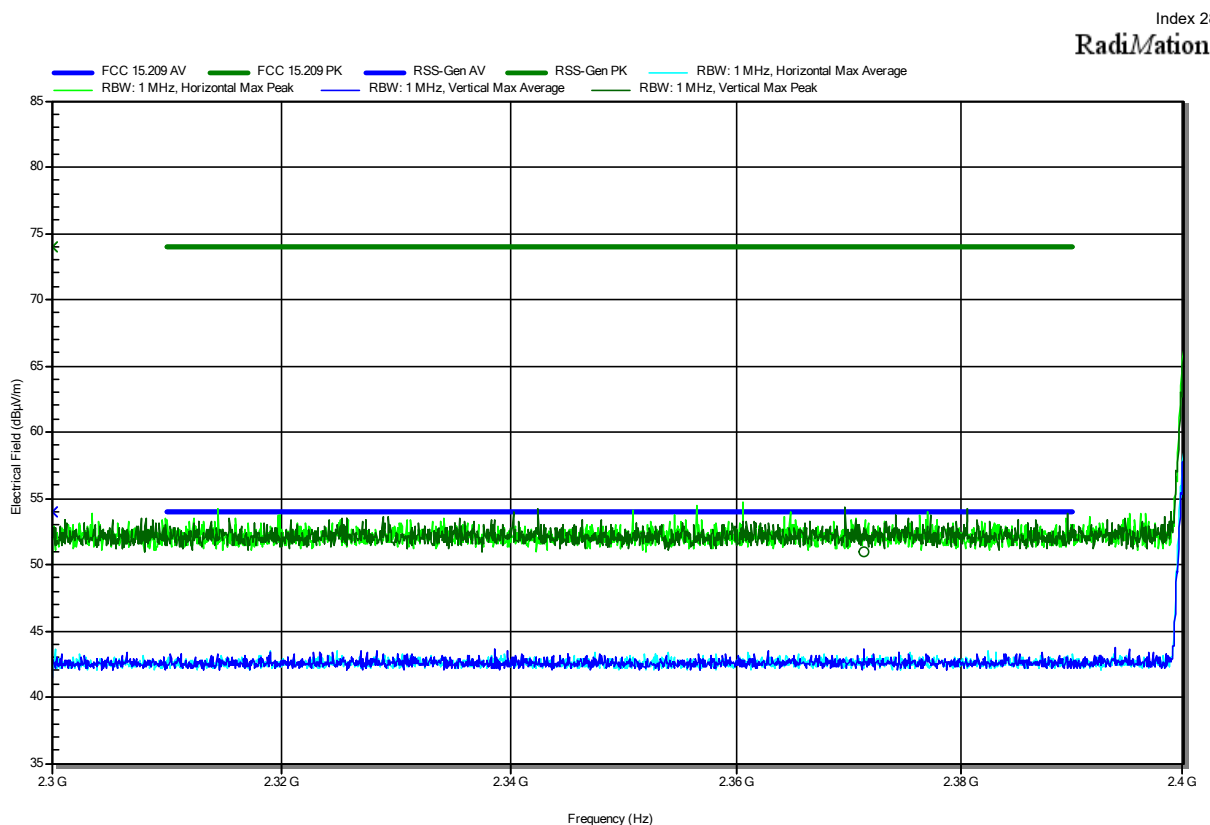


Frequency 2.3714 GHz	Peak 50.97 dBμV/m	Peak Limit 74 dBμV/m	Peak Difference -23.03 dB	Peak Status Pass	Polarization Vertical
Frequency 2.3714 GHz	Average 43.64 dBμV/m	Average Limit 54 dBμV/m	Average Difference -10.36 dB	Average Status Pass	Polarization Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2402 MHz, PRBS9, 250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-06

Index 34

RadiMation

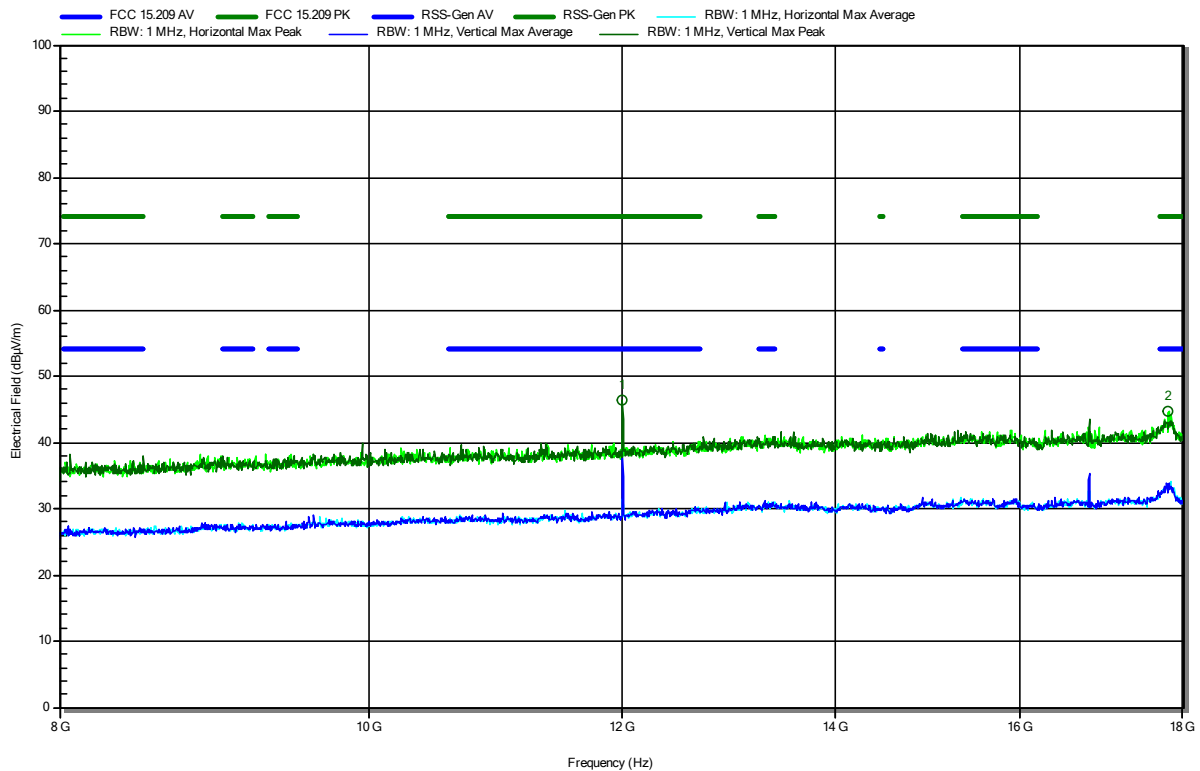


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
12.013 GHz	46.45 dBµV/m	74 dBµV/m	-27.55 dB	Pass	Vertical
17.812 GHz	44.69 dBµV/m	74 dBµV/m	-29.31 dB	Pass	Horizontal
Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
12.013 GHz	38.63 dBµV/m	54 dBµV/m	-15.37 dB	Pass	Vertical
17.812 GHz	33 dBµV/m	54 dBµV/m	-21 dB	Pass	Horizontal

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2402 MHz, PRBS9, 250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-06

Index 35

RadiMation

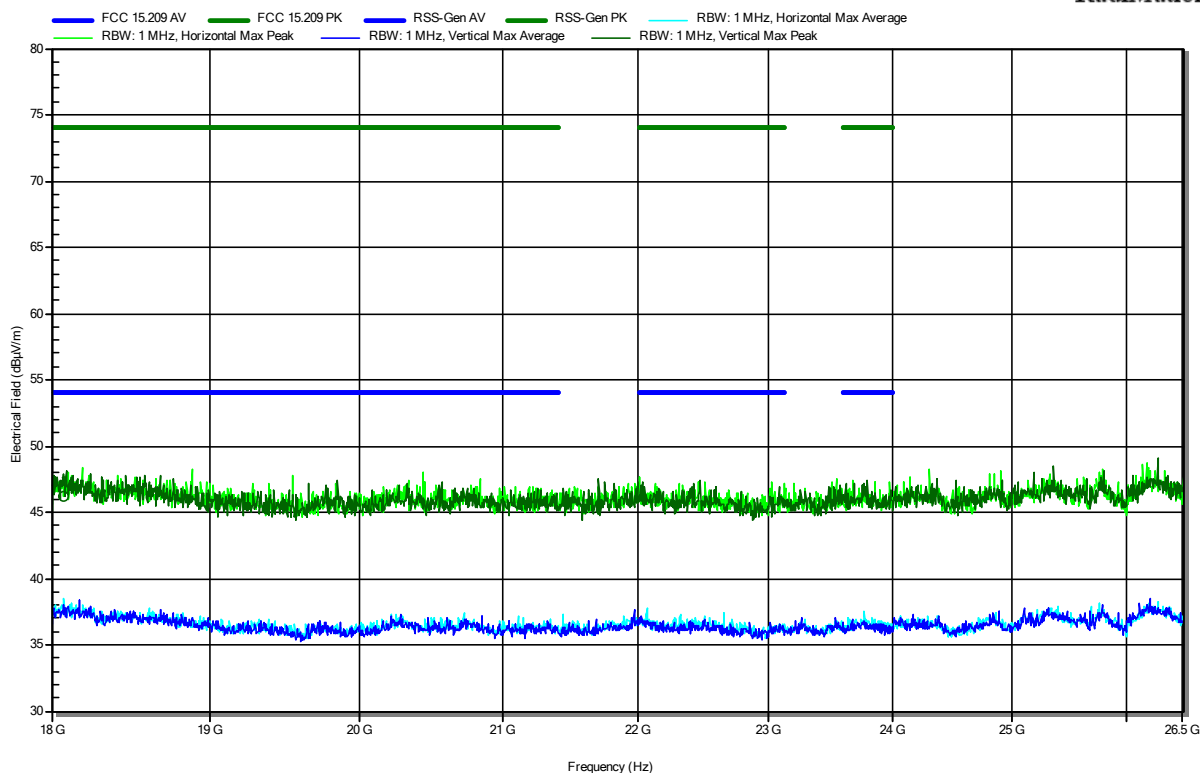

Frequency 18.075 GHz	Peak 46.21 dBμV/m	Peak Limit 74 dBμV/m	Peak Difference -27.79 dB	Peak Status Pass	Polarization Horizontal
Frequency 18.075 GHz	Average 37.02 dBμV/m	Average Limit 54 dBμV/m	Average Difference -16.98 dB	Average Status Pass	Polarization Horizontal

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2440 MHz, PRBS9, 250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-06
 Note:

Index 29

RadiMation

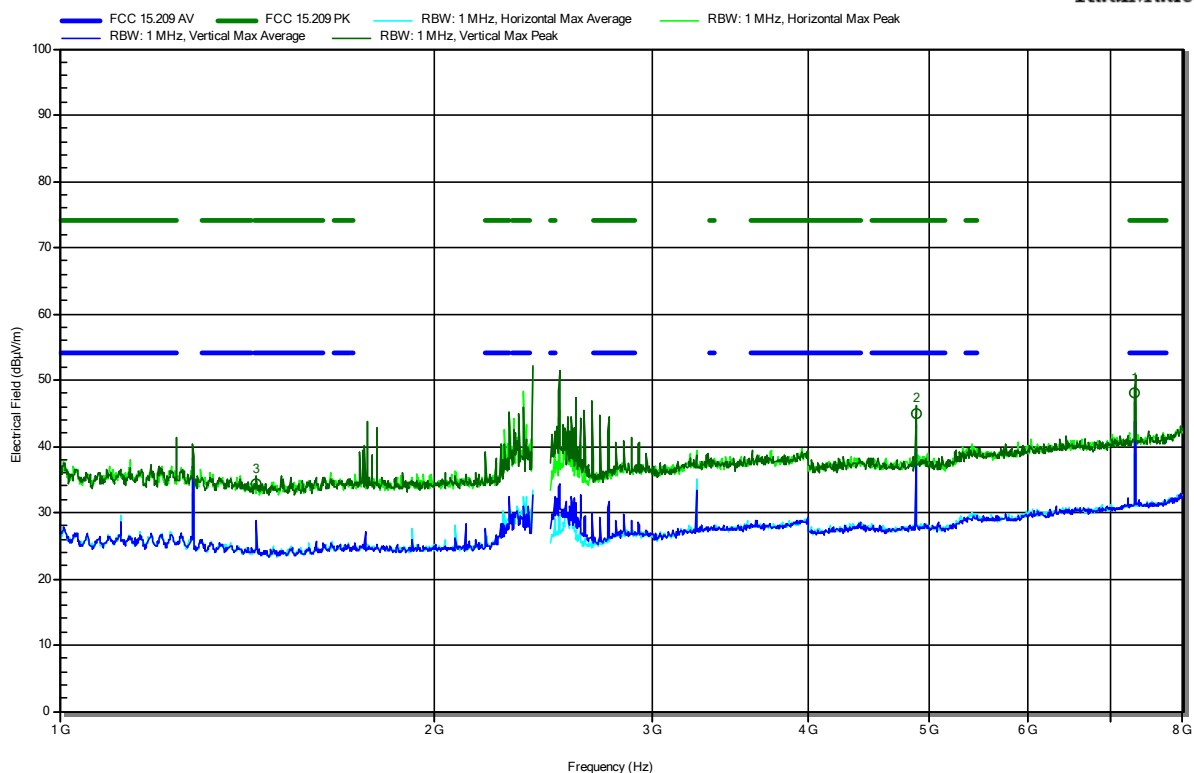

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
1.44 GHz	34.45 dBµV/m	74 dBµV/m	-39.55 dB	Pass	Vertical
4.8791 GHz	44.85 dBµV/m	74 dBµV/m	-29.15 dB	Pass	Vertical
7.3212 GHz	48 dBµV/m	74 dBµV/m	-26 dB	Pass	Vertical

Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
1.44 GHz	27.63 dBµV/m	54 dBµV/m	-26.37 dB	Pass	Vertical
4.8791 GHz	39.56 dBµV/m	54 dBµV/m	-14.44 dB	Pass	Vertical
7.3212 GHz	43.81 dBµV/m	54 dBµV/m	-10.19 dB	Pass	Vertical

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2440 MHz, PRBS9, 250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-06

Index 33

RadiMation

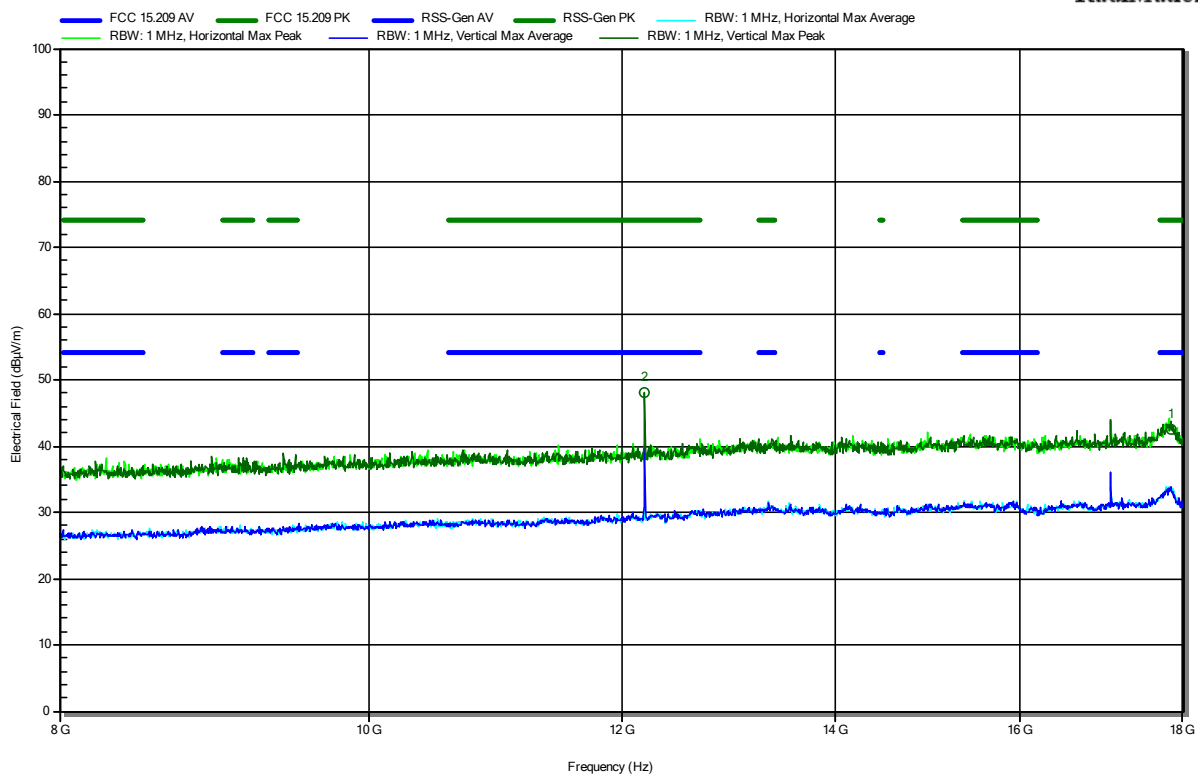

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
12.203 GHz	48.01 dBµV/m	74 dBµV/m	-25.99 dB	Pass	Vertical
17.836 GHz	42.49 dBµV/m	74 dBµV/m	-31.51 dB	Pass	Vertical
Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
12.203 GHz	39.63 dBµV/m	54 dBµV/m	-14.37 dB	Pass	Vertical
17.836 GHz	32.35 dBµV/m	54 dBµV/m	-21.65 dB	Pass	Vertical

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2440 MHz, PRBS9, 250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-06

Index 36

RadiMation

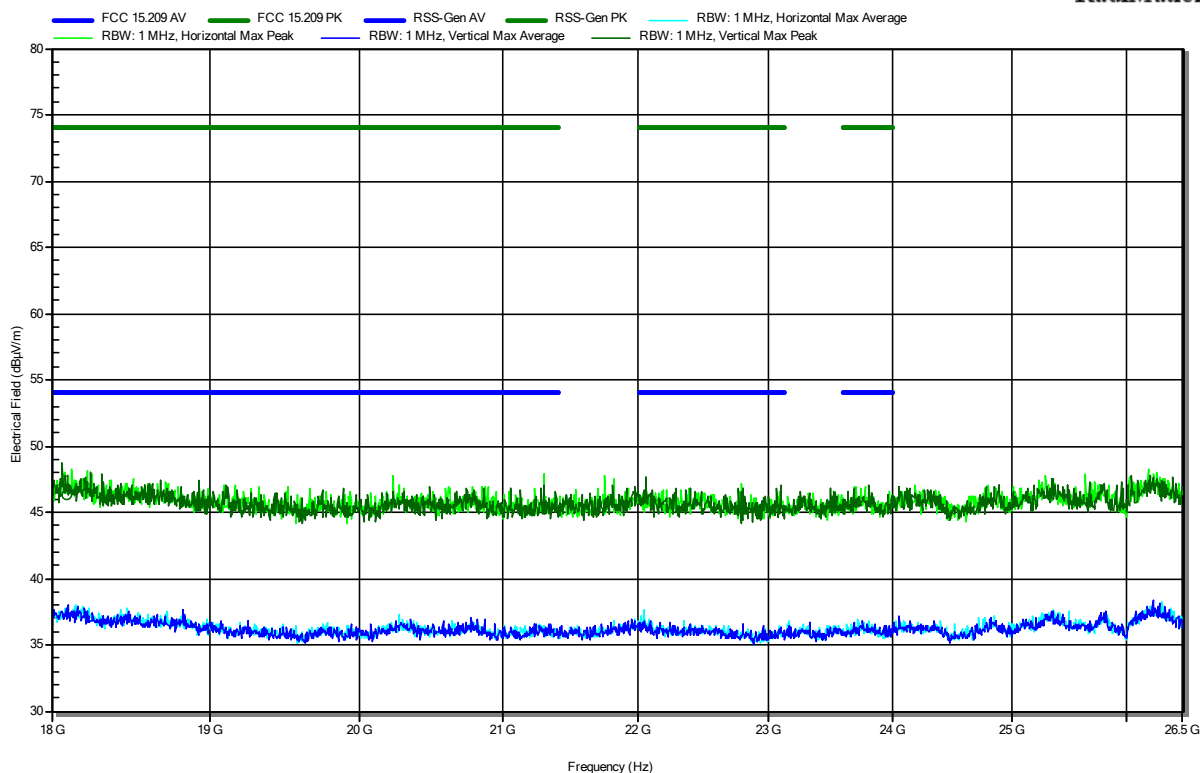


Frequency 18.095 GHz	Peak 46.37 dBμV/m	Peak Limit 74 dBμV/m	Peak Difference -27.63 dB	Peak Status Pass	Polarization Vertical
Frequency 18.095 GHz	Average 36.74 dBμV/m	Average Limit 54 dBμV/m	Average Difference -17.26 dB	Average Status Pass	Polarization Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2480 MHz, PRBS9, 250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-06

Index 31

RadiMation

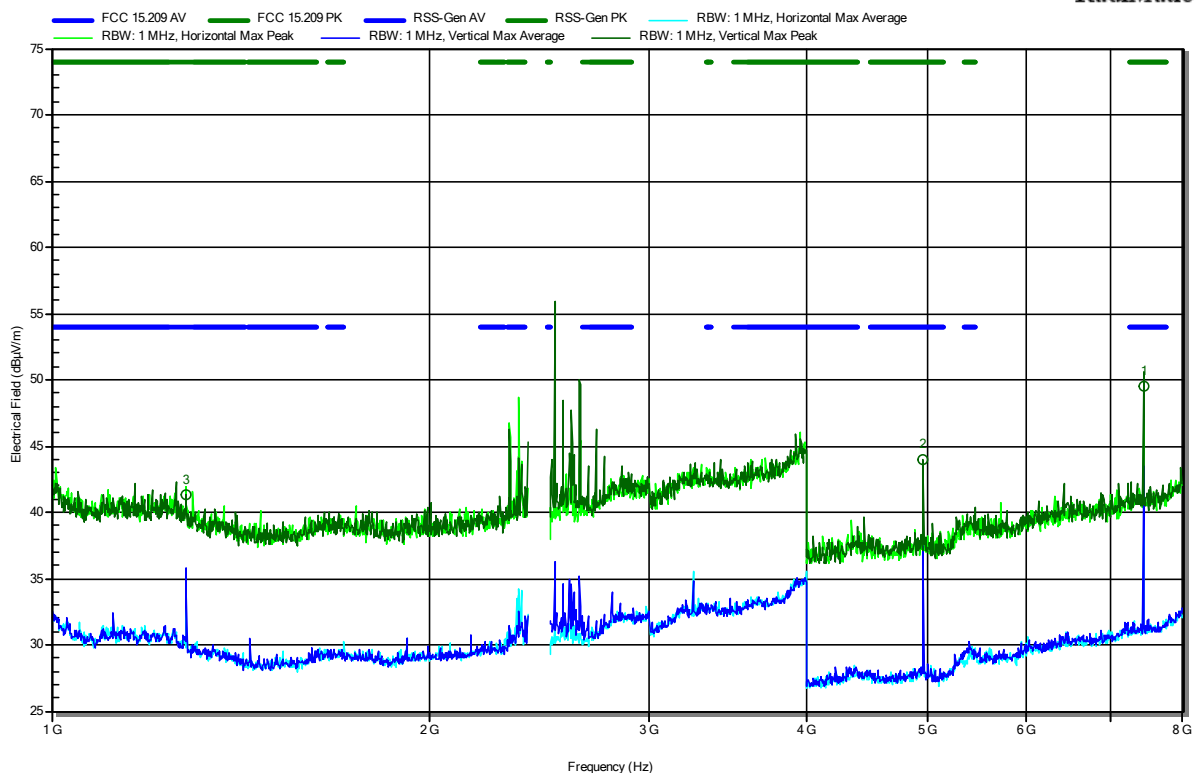

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
1.28 GHz	41.27 dBµV/m	74 dBµV/m	-32.73 dB	Pass	Vertical
4.961 GHz	44 dBµV/m	74 dBµV/m	-30 dB	Pass	Vertical
7.439 GHz	49.46 dBµV/m	74 dBµV/m	-24.54 dB	Pass	Vertical

Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
1.28 GHz	35.42 dBµV/m	54 dBµV/m	-18.58 dB	Pass	Vertical
4.961 GHz	37.49 dBµV/m	54 dBµV/m	-16.51 dB	Pass	Vertical
7.439 GHz	42.98 dBµV/m	54 dBµV/m	-11.02 dB	Pass	Vertical

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2480 MHz, PRBS9, 250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-06
 Note: upper bandedge

Index 30

RadiMation

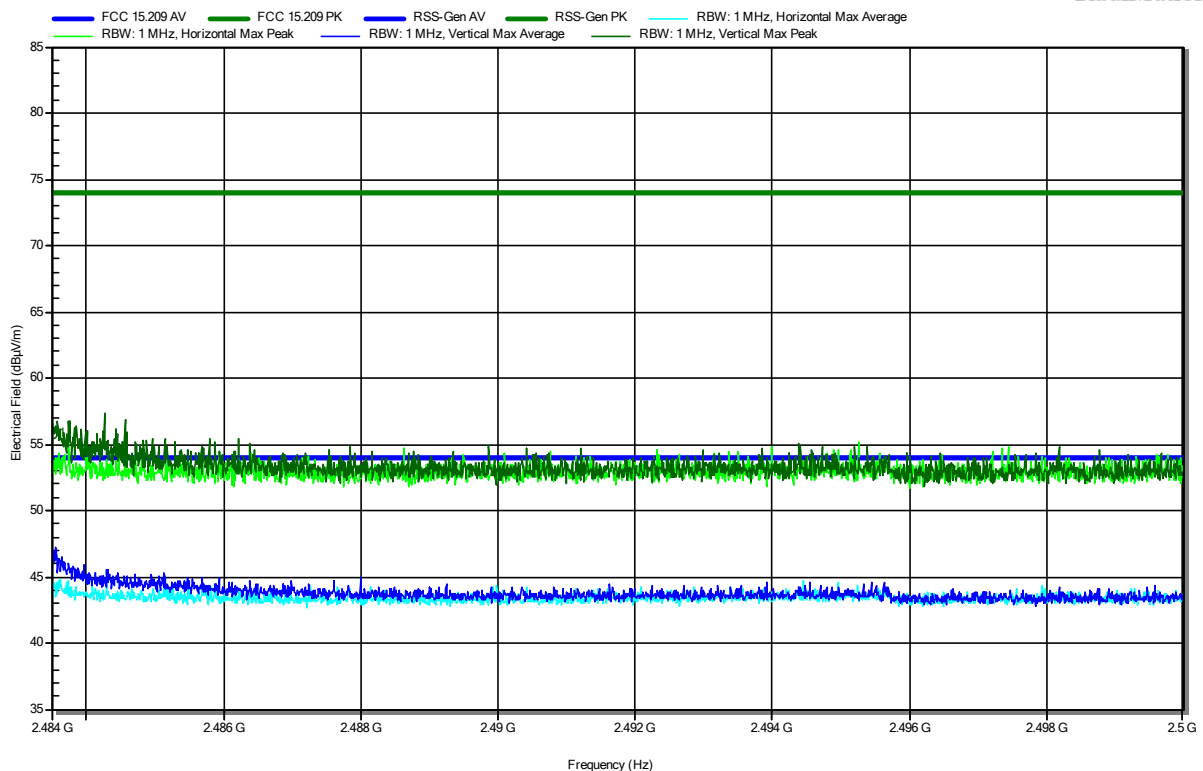

Frequency 2.4835 GHz	Peak 55.79 dBμV/m	Peak Limit 74 dBμV/m	Peak Difference -18.21 dB	Peak Status Pass	Polarization Vertical
Frequency 2.4835 GHz	Average 45.13 dBμV/m	Average Limit 54 dBμV/m	Average Difference -8.87 dB	Average Status Pass	Polarization Vertical

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2480 MHz, PRBS9, 250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-06

Index 32

RadiMation

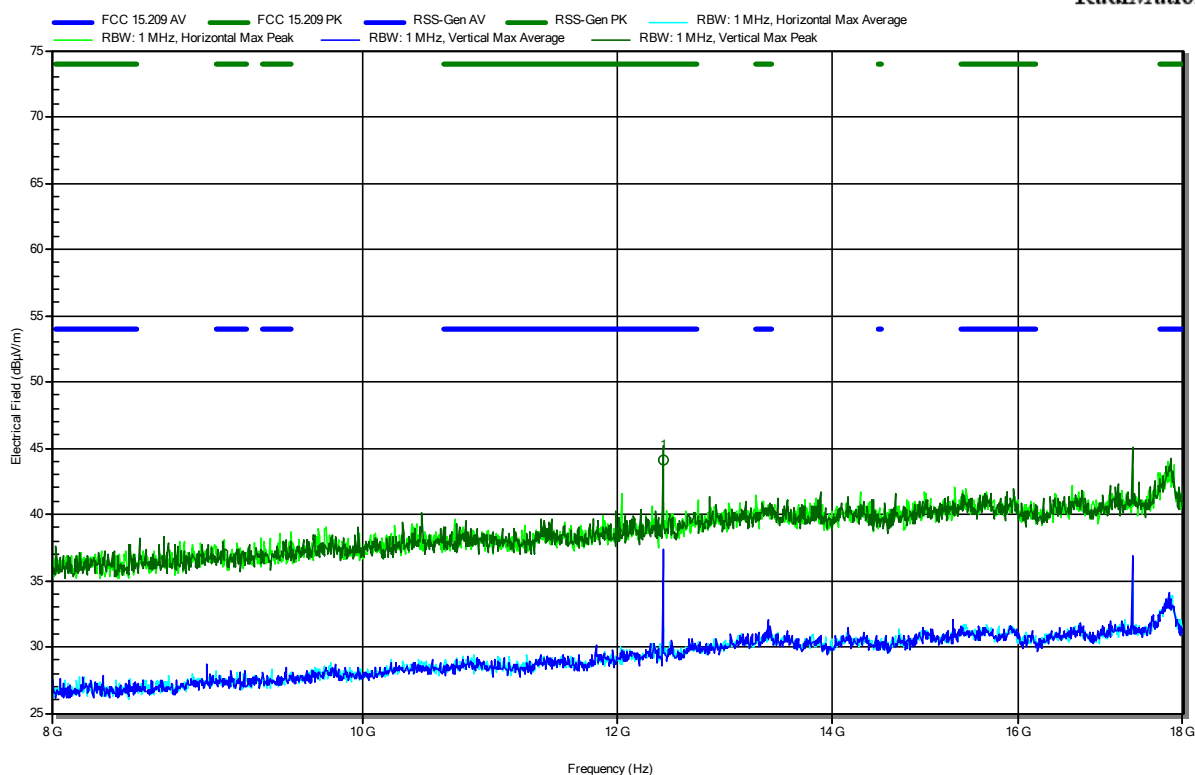


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
12.402 GHz	44.1 dBµV/m	74 dBµV/m	-29.9 dB	Pass	Vertical
Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
12.402 GHz	37.28 dBµV/m	54 dBµV/m	-16.72 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2480 MHz, PRBS9, 250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-06

Index 37

RadiMation

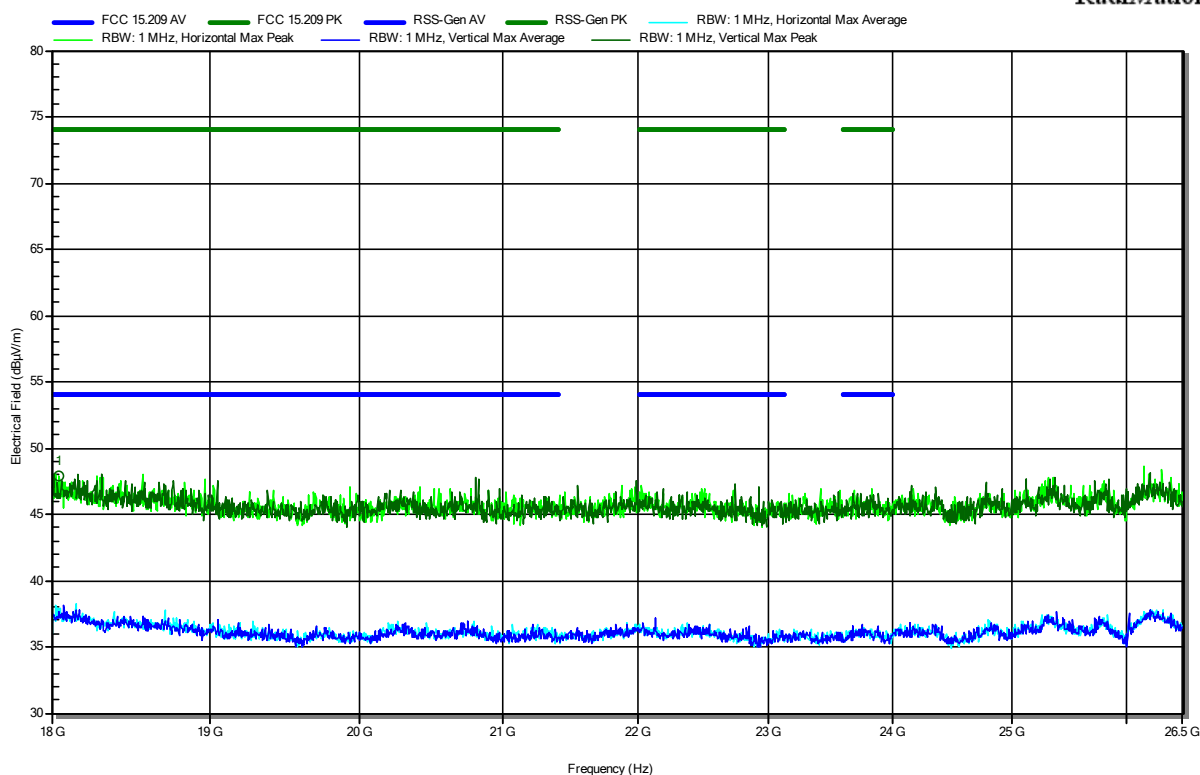

Frequency 18.044 GHz	Peak 47.91 dBμV/m	Peak Limit 74 dBμV/m	Peak Difference -26.09 dB	Peak Status Pass	Polarization Horizontal
Frequency 18.044 GHz	Average 36.58 dBμV/m	Average Limit 54 dBμV/m	Average Difference -17.42 dB	Average Status Pass	Polarization Horizontal


Test Report No.: G0M-2302-1881-TFC247BL-W276-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

ANNEX B Transmitter spurious emissions (With Antenna-2)

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Sohrabi
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck VULB 9168
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2402 MHz, PRBS9_193 Bytes, 1 Mbps, P = 19 dBm
 Test Date: 2023-06-02
 Note:

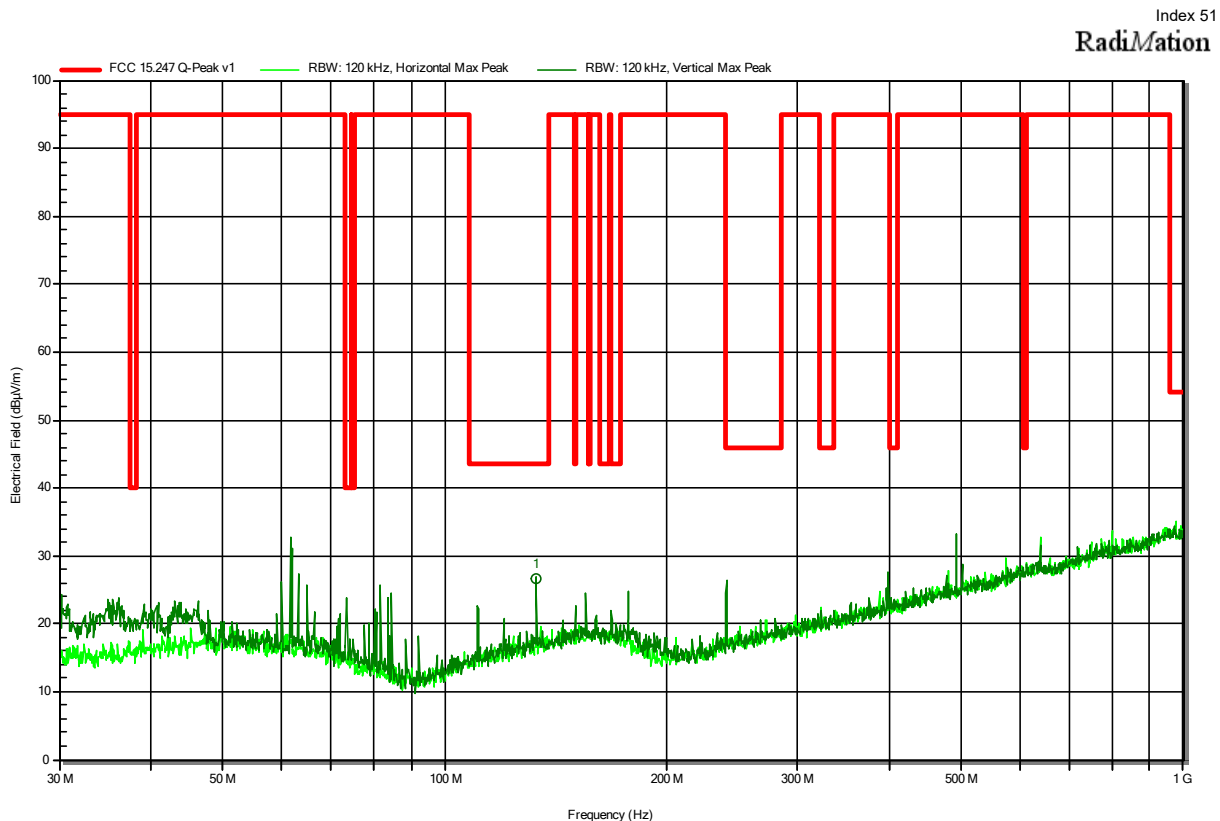


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
132.6987 MHz	26.7 dBµV/m	43.5 dBµV/m	-16.78 dB	Pass	Vertical

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2402 MHz, PRBS9, 193 Bytes, 1 Mbps, P = 19 dBm
 Test Date: 2023-04-19
 Note:

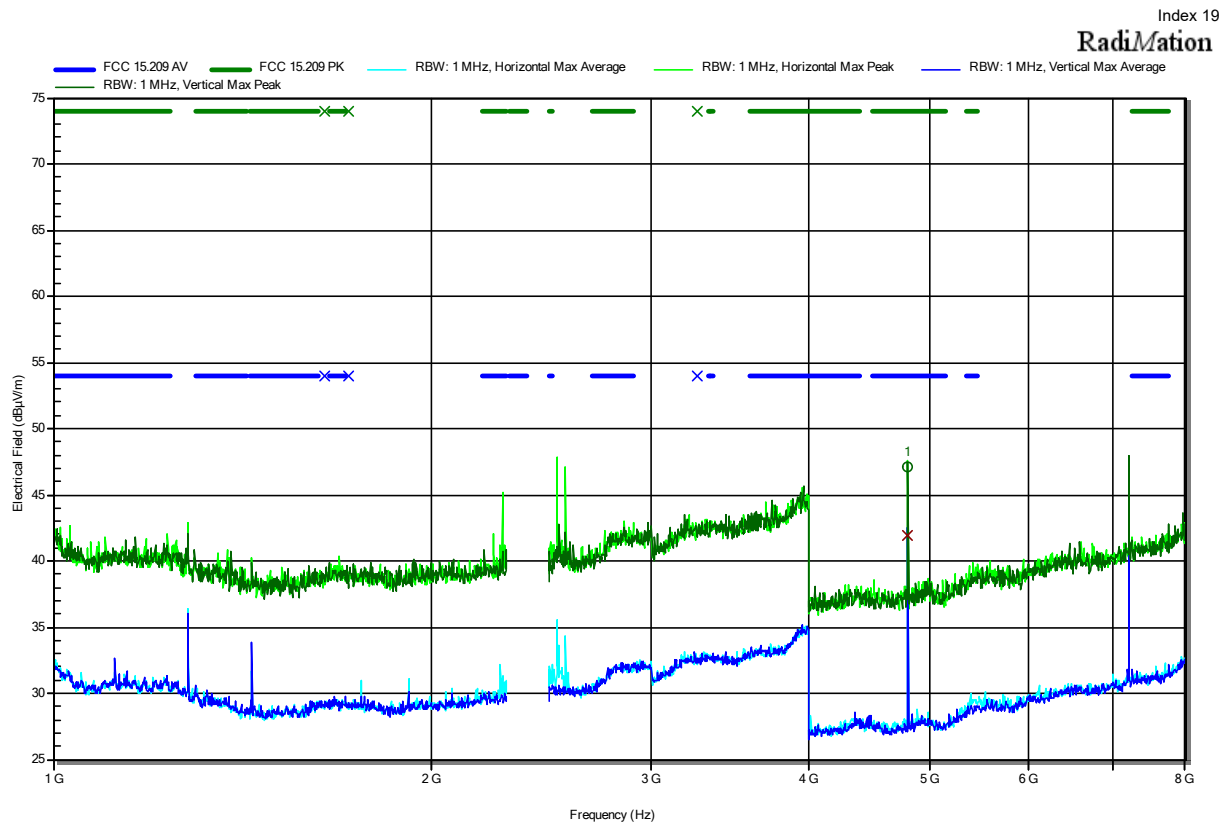


Frequency 4.8044 GHz	Peak 47.09 dBμV/m	Peak Limit 74 dBμV/m	Peak Difference -26.91 dB	Peak Status Pass	Polarization Vertical
Frequency 4.8044 GHz	Average 41.89 dBμV/m	Average Limit 54 dBμV/m	Average Difference -12.11 dB	Average Status Pass	Polarization Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2402 MHz, PRBS9, 193 Bytes, 1 Mbps, P = 19 dBm
 Test Date: 2023-04-19
 Note: lower bandedge

Index 20


RadiMation

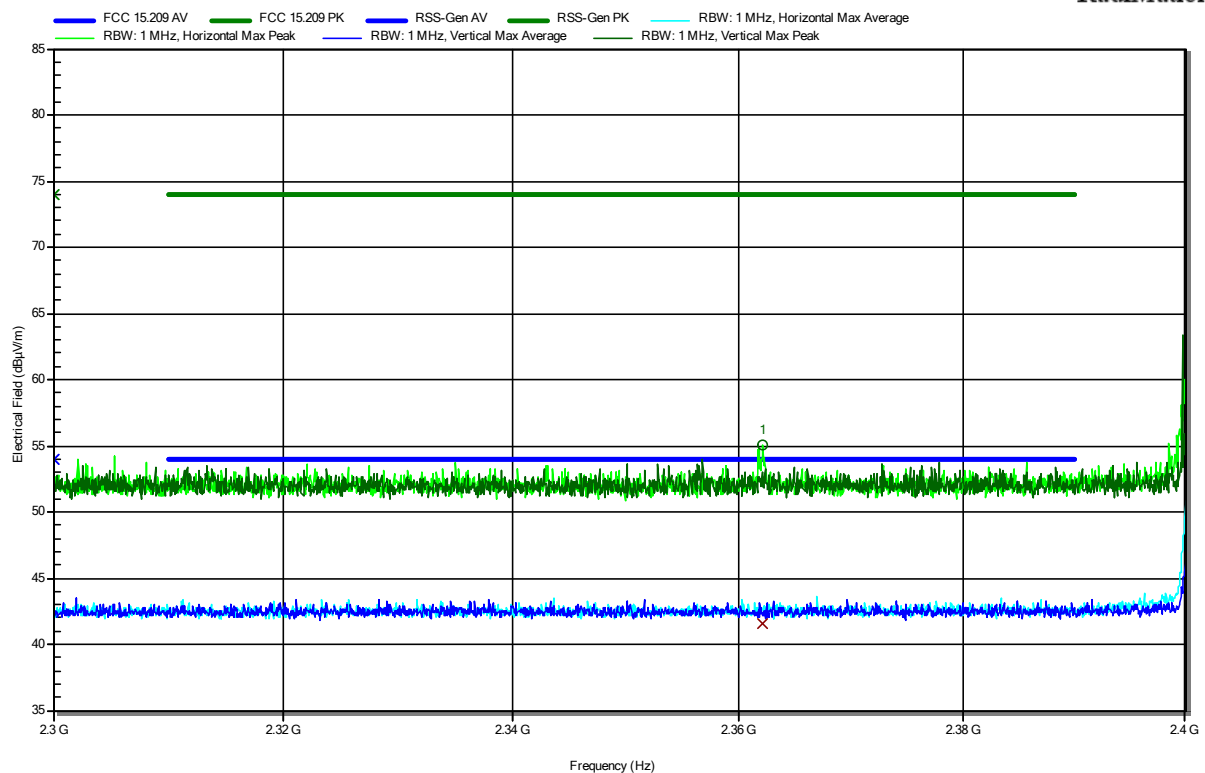

Frequency 2.3622 GHz	Peak 55.01 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -18.99 dB	Peak Status Pass	Polarization Horizontal
Frequency 2.3622 GHz	Average 41.62 dBµV/m	Average Limit 54 dBµV/m	Average Difference -12.38 dB	Average Status Pass	Polarization Horizontal

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2402 MHz, PRBS9, 193 Bytes, 1 Mbps, P = 19 dBm
 Test Date: 2023-04-19
 Note:

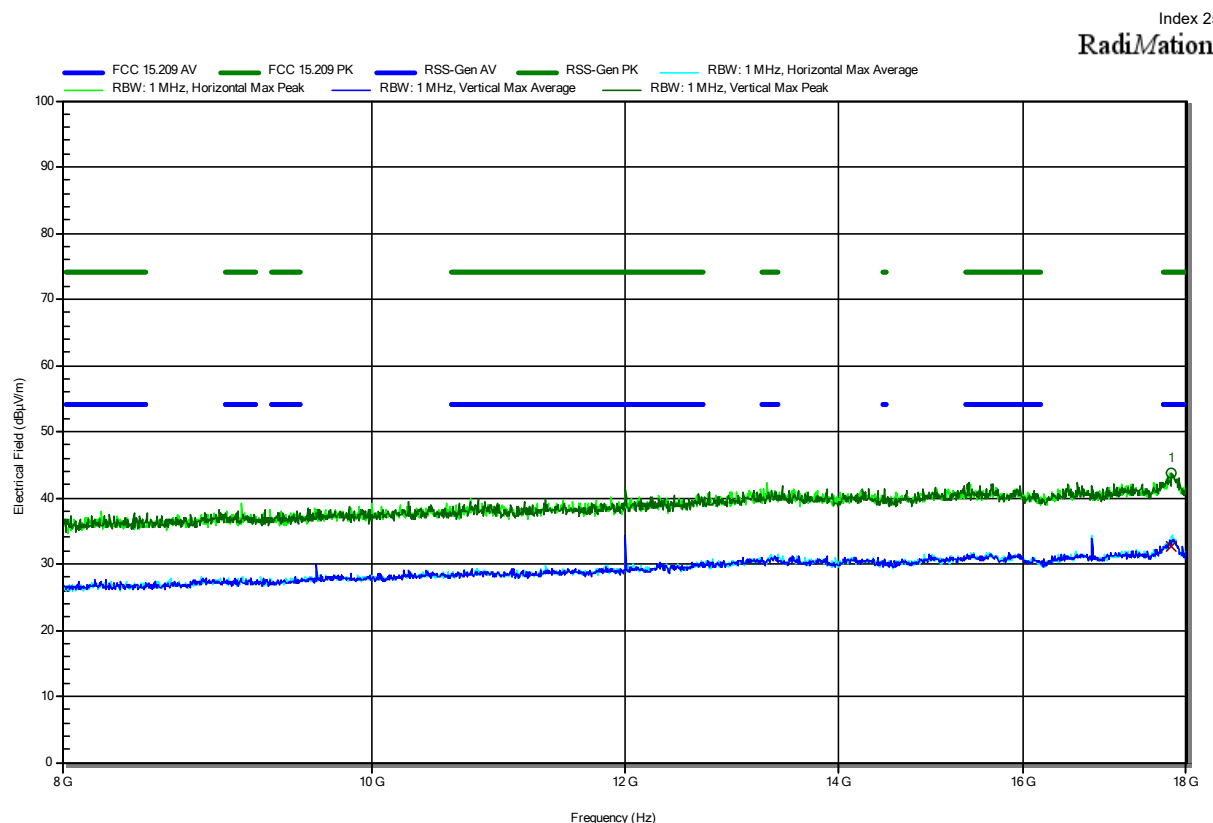

Frequency 17.807 GHz	Peak 43.77 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -30.23 dB	Peak Status Pass	Polarization Vertical
Frequency 17.807 GHz	Average 32.6 dBµV/m	Average Limit 54 dBµV/m	Average Difference -21.4 dB	Average Status Pass	Polarization Vertical


Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2402 MHz, PRBS9, 193 Bytes, 1 Mbps, P = 19 dBm
 Test Date: 2023-04-20
 Note:

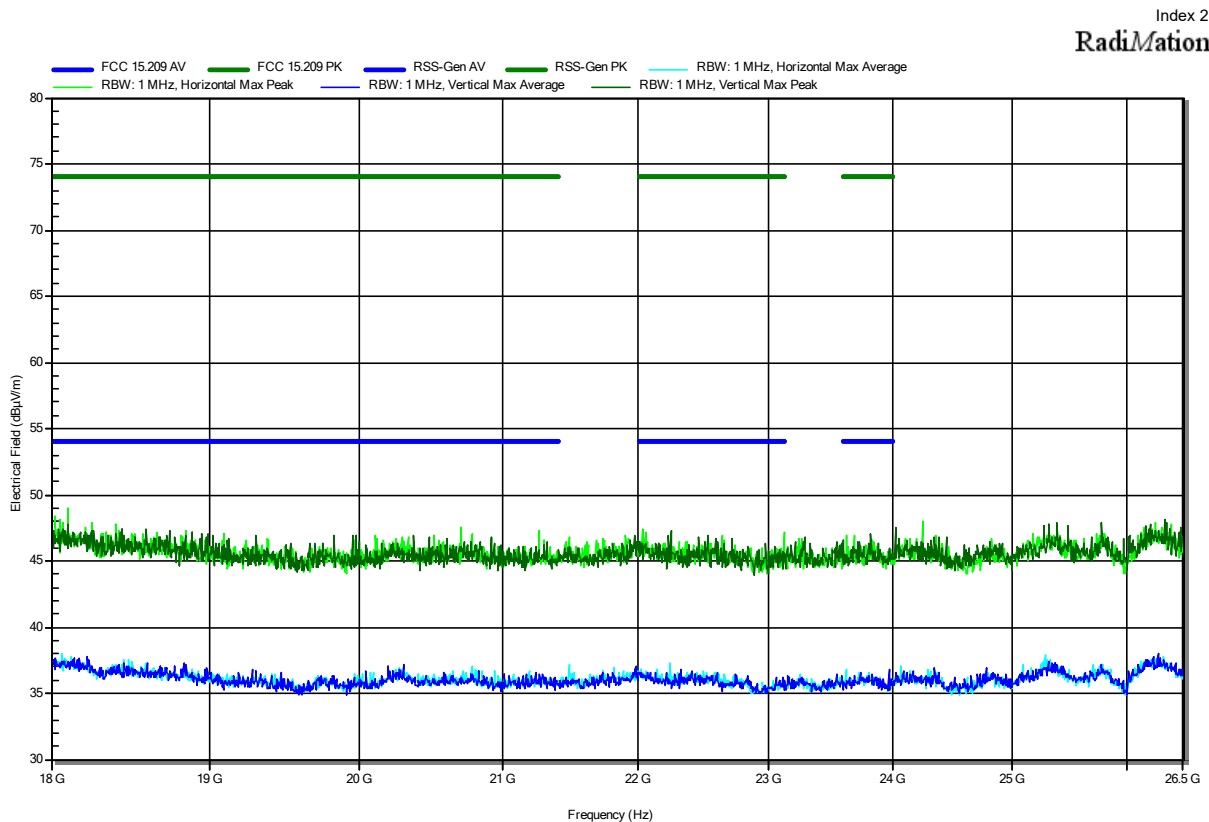

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Sohrabi
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck VULB 9168
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2440 MHz, PRBS9_193 Bytes, 1 Mbps, P = 19 dBm
 Test Date: 2023-06-02
 Note:

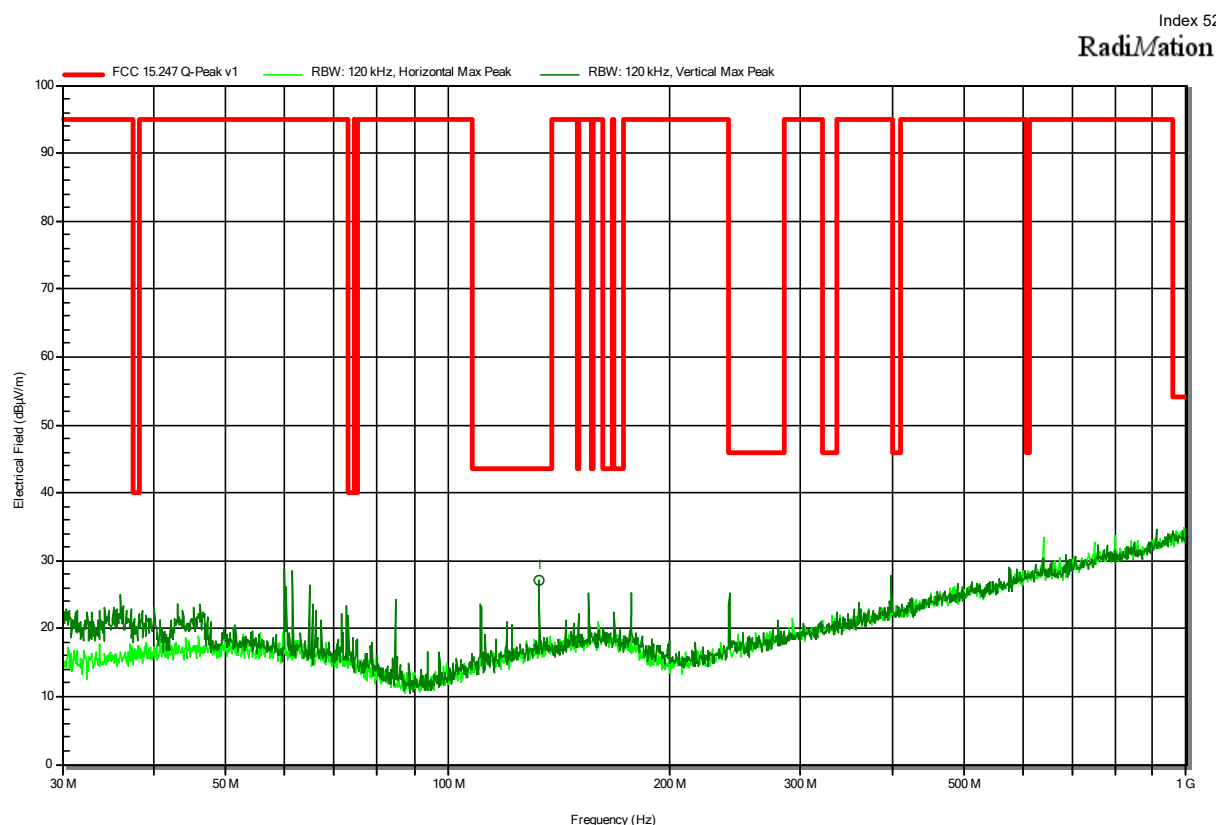


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
132.723 MHz	27 dBµV/m	43.5 dBµV/m	-16.49 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2440 MHz, PRBS9, 193 Bytes, 1 Mbps, P = 19 dBm
 Test Date: 2023-04-19
 Note:

Index 23

RadiMation

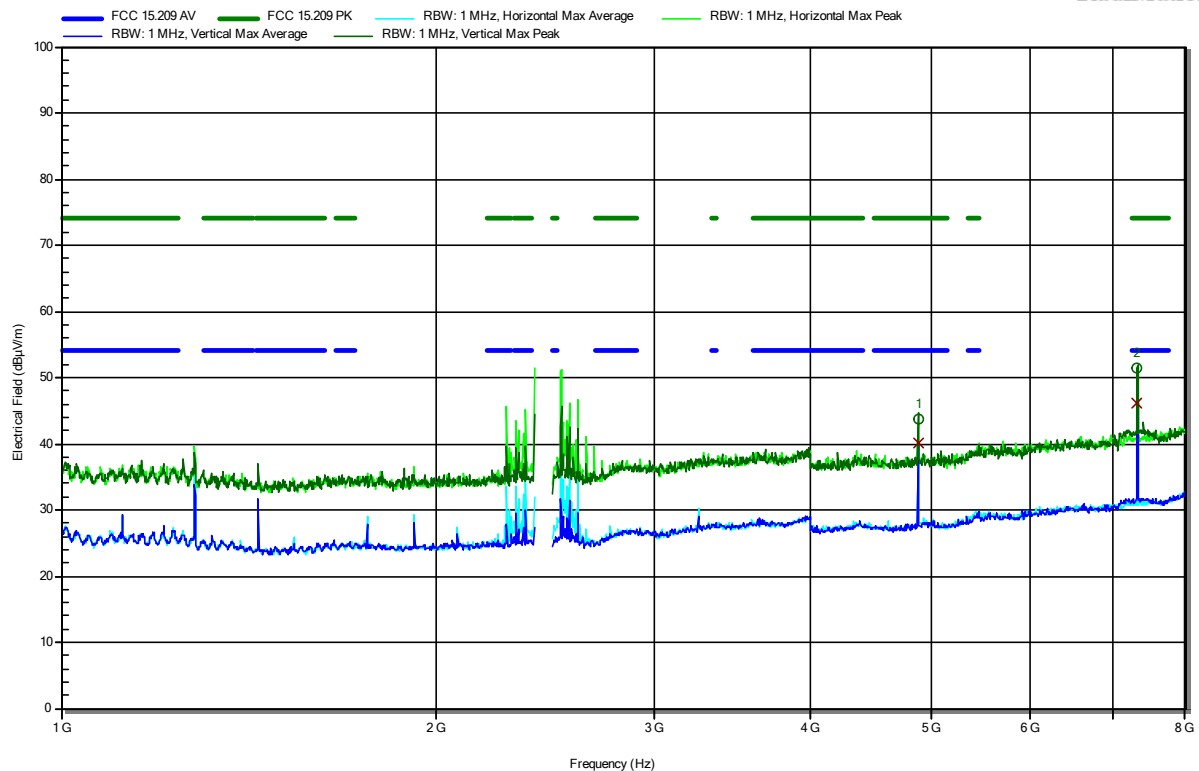

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
4.8799 GHz	43.84 dBµV/m	74 dBµV/m	-30.16 dB	Pass	Vertical
7.3201 GHz	51.52 dBµV/m	74 dBµV/m	-22.48 dB	Pass	Vertical


Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
4.8799 GHz	40.21 dBµV/m	54 dBµV/m	-13.79 dB	Pass	Vertical
7.3201 GHz	46.1 dBµV/m	54 dBµV/m	-7.9 dB	Pass	Vertical

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2440 MHz, PRBS9, 193 Bytes, 1 Mbps, P = 19 dBm
 Test Date: 2023-04-19
 Note:

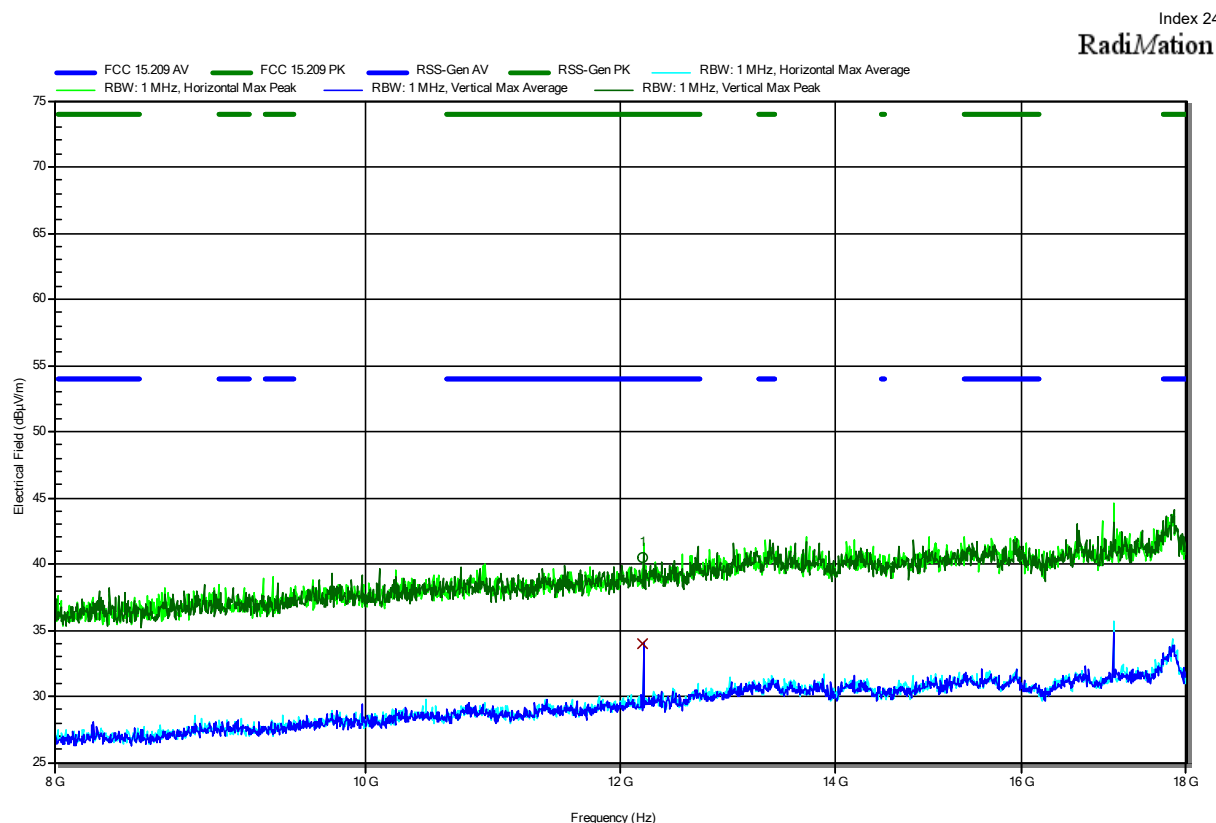

Frequency 12.199 GHz	Peak 40.54 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -33.46 dB	Peak Status Pass	Polarization Vertical
Frequency 12.199 GHz	Average 34.03 dBµV/m	Average Limit 54 dBµV/m	Average Difference -19.97 dB	Average Status Pass	Polarization Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2440 MHz, PRBS9, 193 Bytes, 1 Mbps, P = 19 dBm
 Test Date: 2023-04-20
 Note:

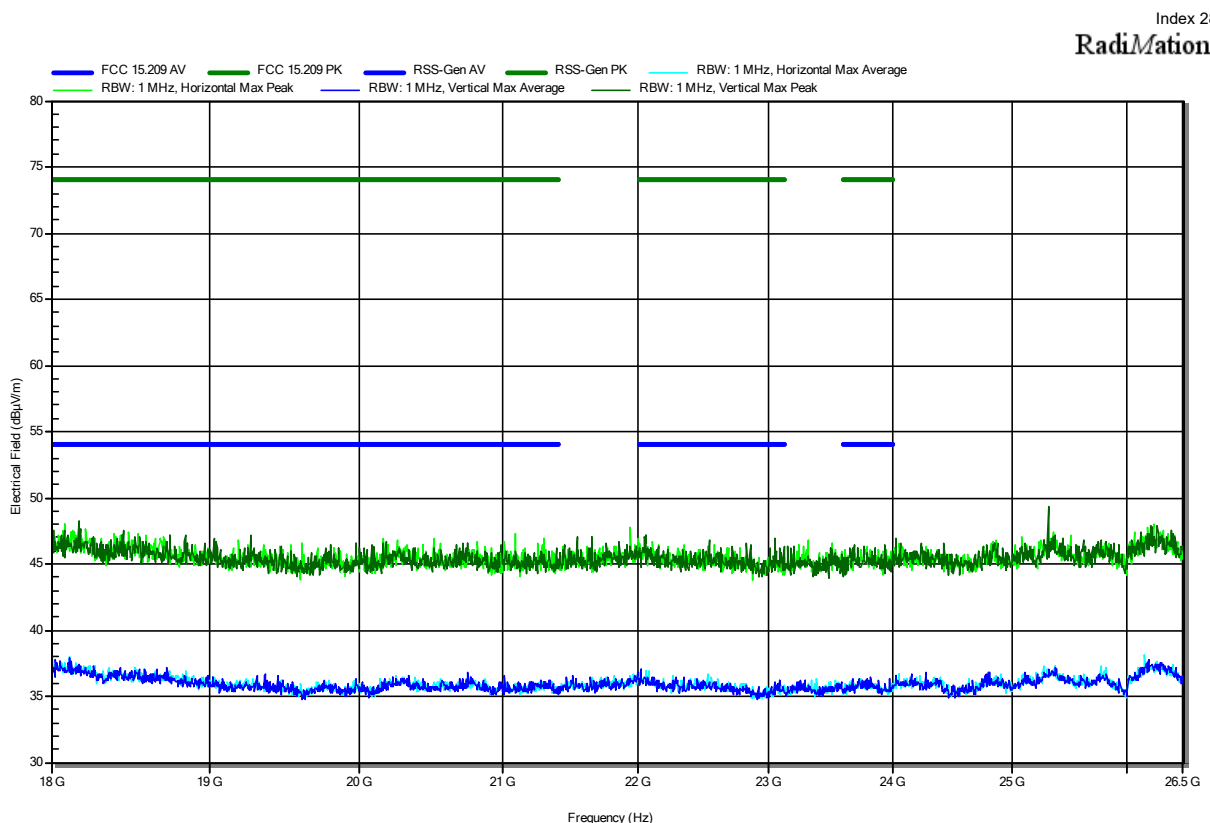


Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Sohrabi
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck VULB 9168
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2480 MHz, PRBS9_193 Bytes, 1 Mbps, P = 19 dBm
 Test Date: 2023-06-02
 Note:

Index 53


RadiMation

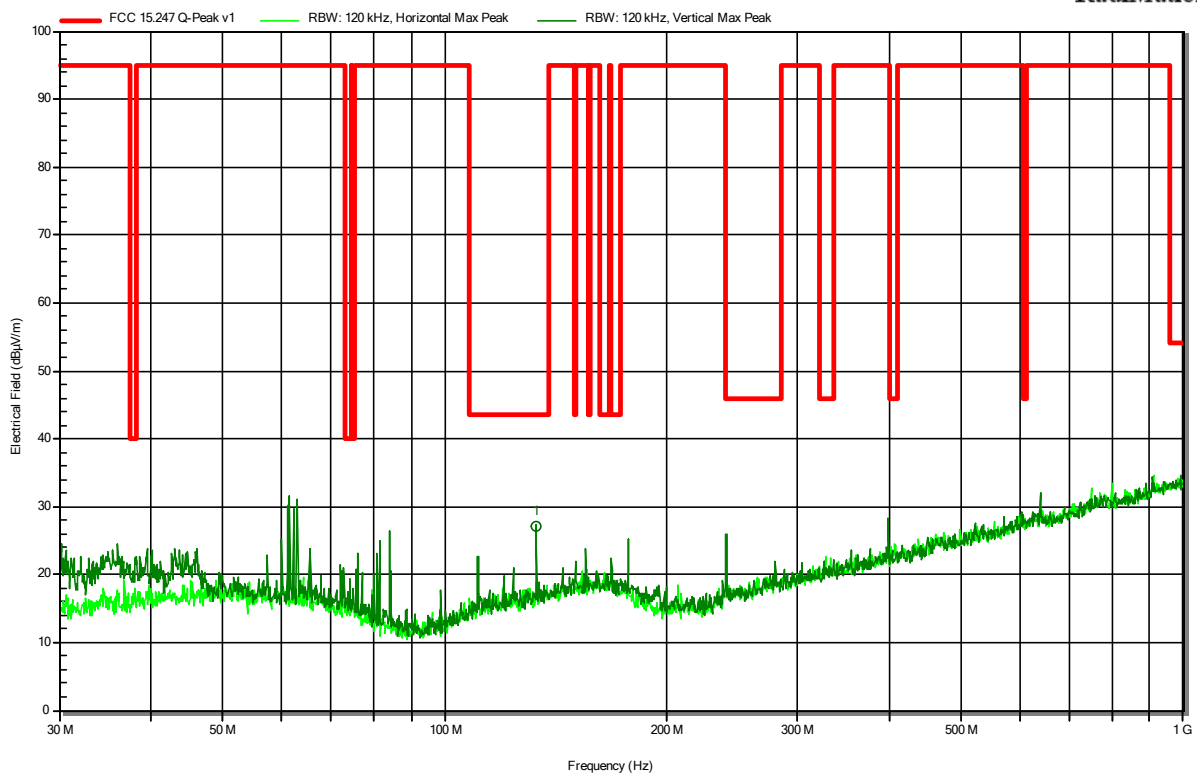

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
132.723 MHz	27.2 dBμV/m	43.5 dBμV/m	-16.32 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2480 MHz, PRBS9, 193 Bytes, 1 Mbps, P = 19 dBm
 Test Date: 2023-04-19
 Note:

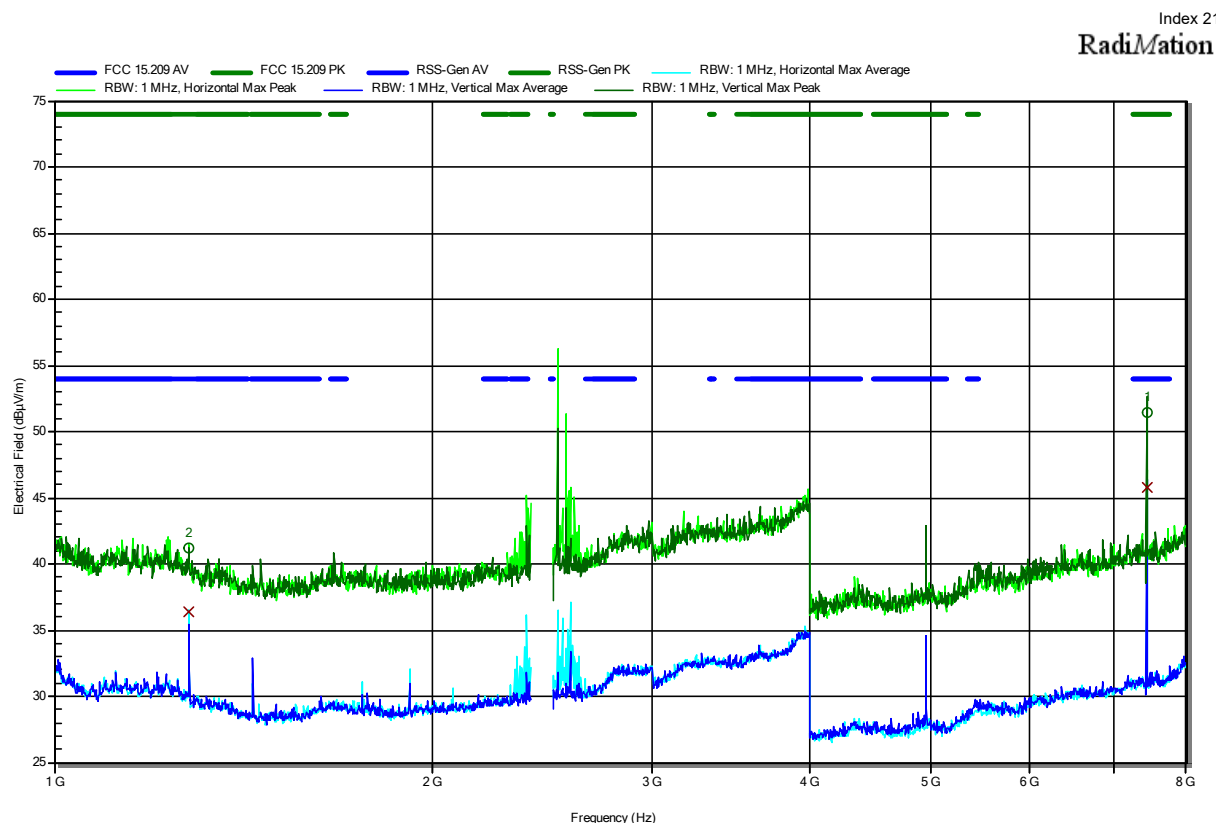


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
1.28 GHz	41.25 dBµV/m	74 dBµV/m	-32.75 dB	Pass	Horizontal
7.441 GHz	51.46 dBµV/m	74 dBµV/m	-22.54 dB	Pass	Vertical

Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
1.28 GHz	36.36 dBµV/m	54 dBµV/m	-17.64 dB	Pass	Horizontal
7.441 GHz	45.78 dBµV/m	54 dBµV/m	-8.22 dB	Pass	Vertical


Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2480 MHz, PRBS9, 193 Bytes, 1 Mbps, P = 19 dBm
 Test Date: 2023-04-19
 Note: upper bandedge

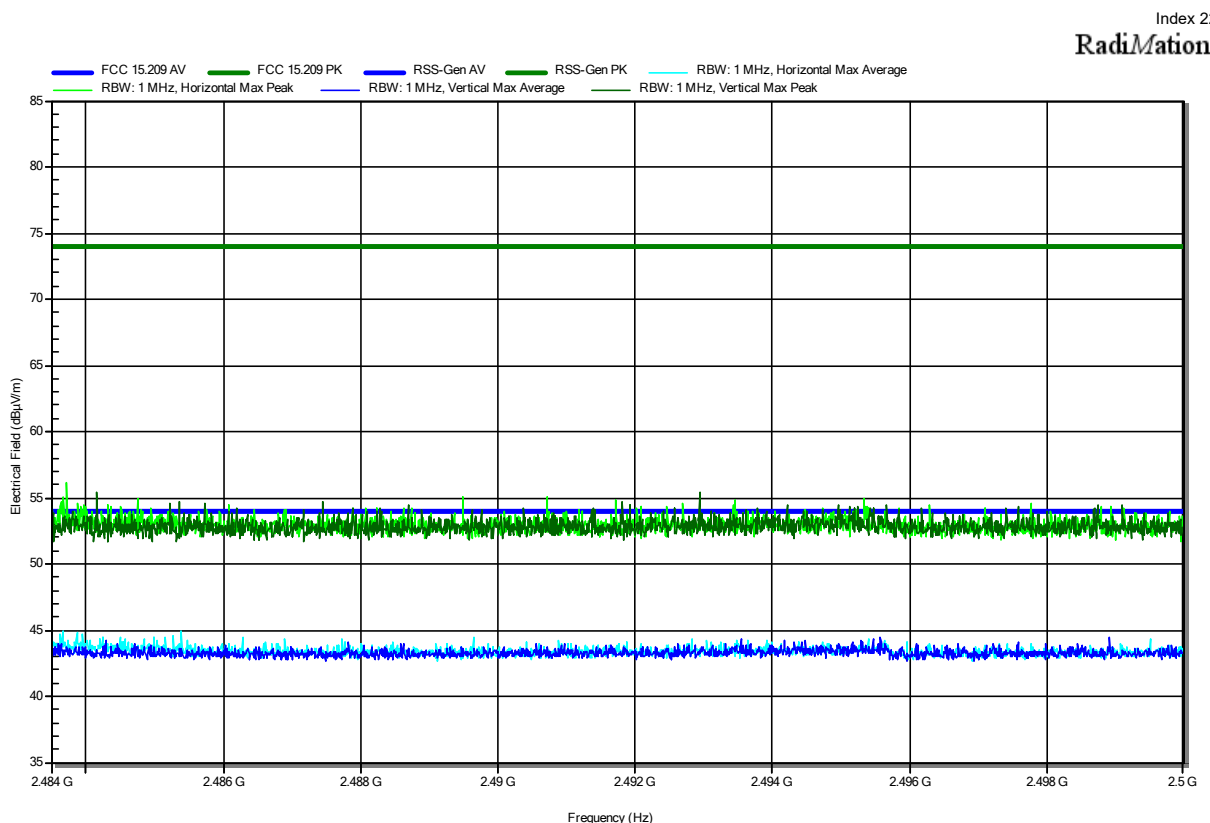

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2480 MHz, PRBS9, 193 Bytes, 1 Mbps, P = 19 dBm
 Test Date: 2023-04-19
 Note:

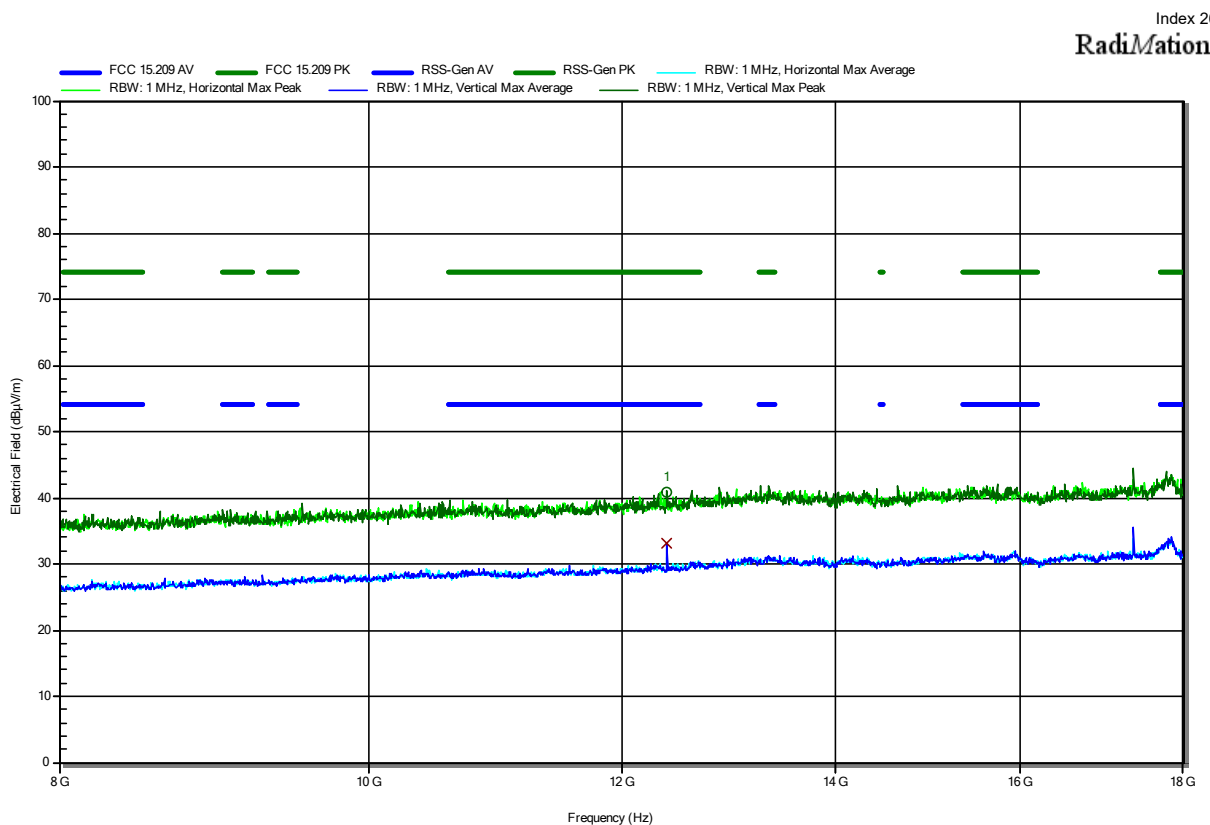

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
12.401 GHz	40.84 dBµV/m	74 dBµV/m	-33.16 dB	Pass	Vertical
Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
12.401 GHz	33.17 dBµV/m	54 dBµV/m	-20.83 dB	Pass	Vertical


Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2480 MHz, PRBS9, 193 Bytes, 1 Mbps, P = 19 dBm
 Test Date: 2023-04-20
 Note:

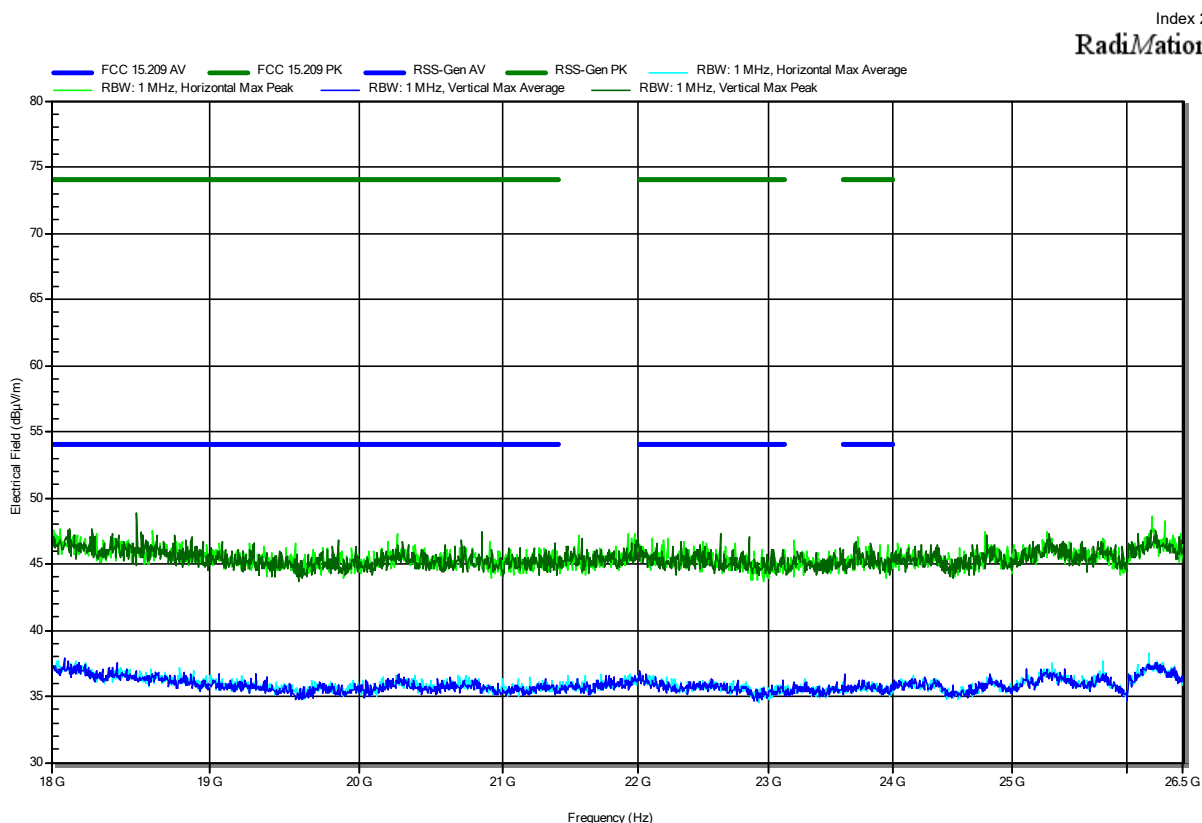

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Ibraimov Azamat
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2402 MHz, PRBS9_250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-24
 Note:

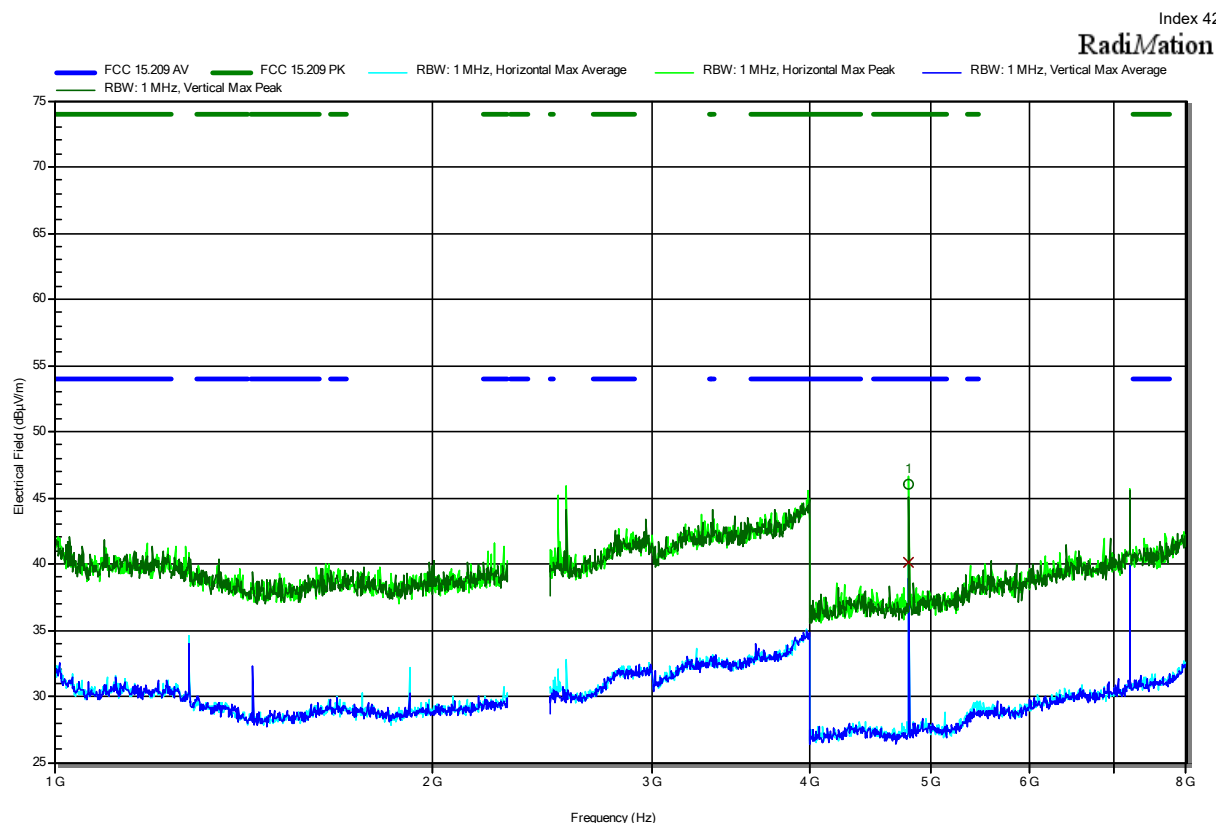


Frequency 4.8032 GHz	Peak 46.07 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -27.93 dB	Peak Status Pass	Polarization Horizontal
Frequency 4.8032 GHz	Average 40.12 dBµV/m	Average Limit 54 dBµV/m	Average Difference -13.88 dB	Average Status Pass	Polarization Horizontal

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Ibraimov Azamat
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2402 MHz, PRBS9_250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-24
 Note: lower bandedge

Index 43

RadiMation

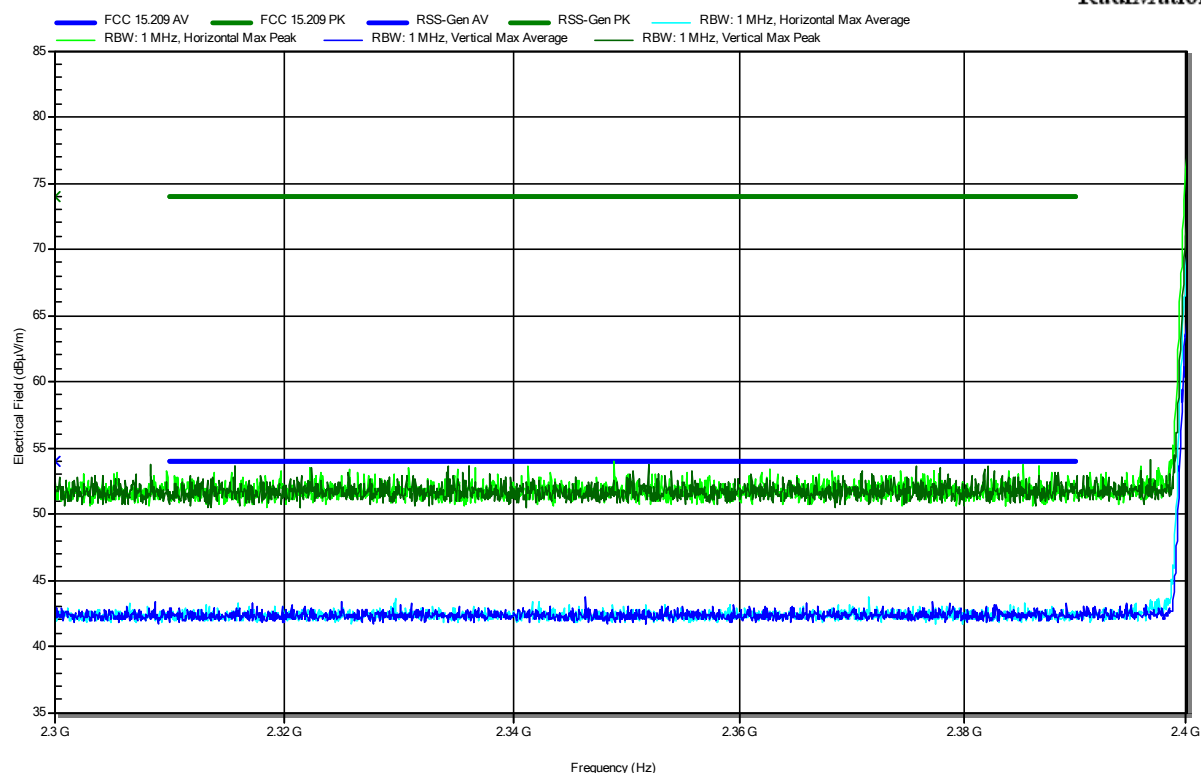


Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Ibraimov Azamat
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2402 MHz, PRBS9_250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-24
 Note:

Index 47


RadiMation

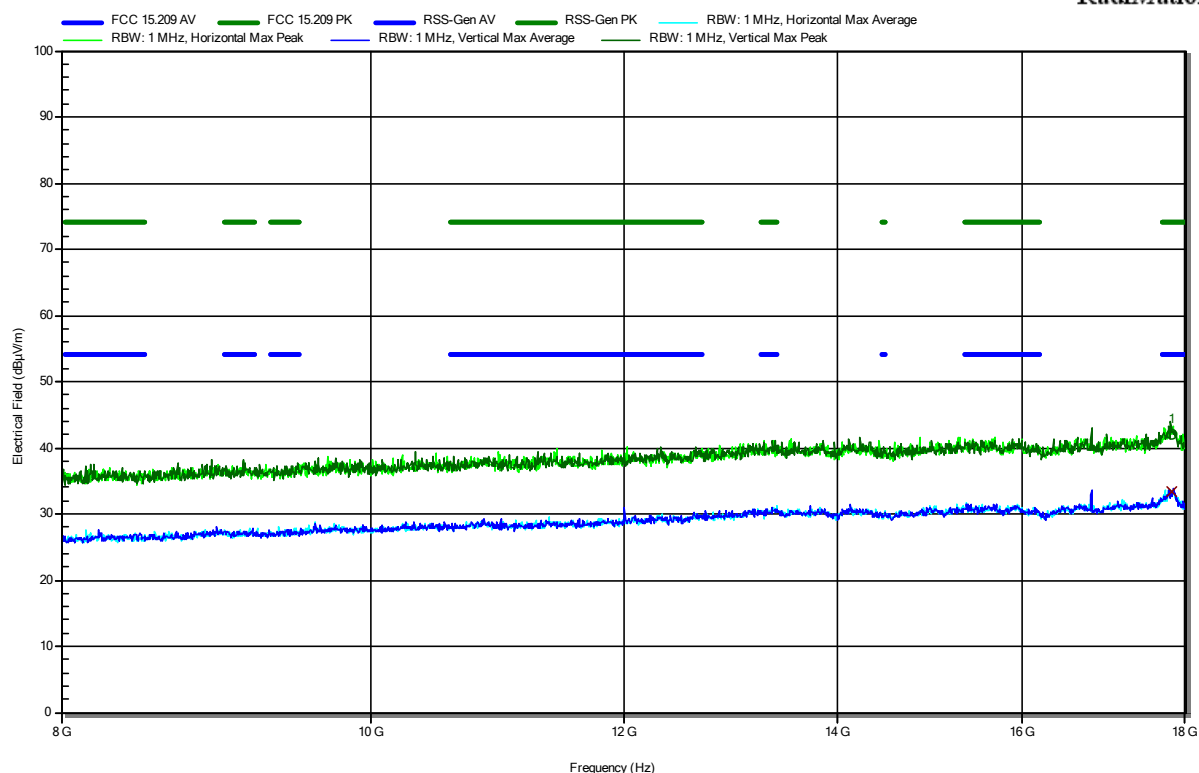

Frequency 17.815 GHz	Peak 42.07 dBμV/m	Peak Limit 74 dBμV/m	Peak Difference -31.93 dB	Peak Status Pass	Polarization Vertical
Frequency 17.815 GHz	Average 33.34 dBμV/m	Average Limit 54 dBμV/m	Average Difference -20.66 dB	Average Status Pass	Polarization Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2402 MHz, PRBS9_250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-21
 Note:

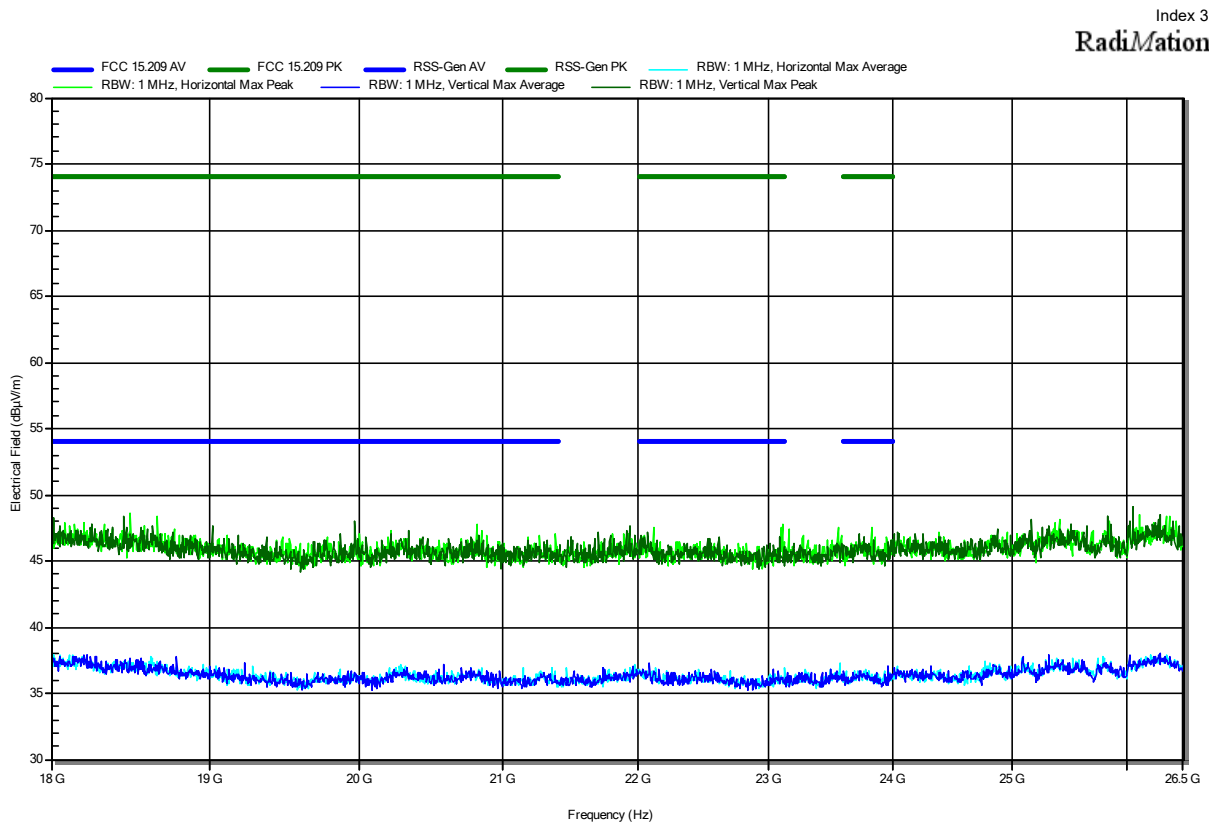


Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Ibraimov Azamat
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2440 MHz, PRBS9_250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-24
 Note:

Index 46

RadiMation

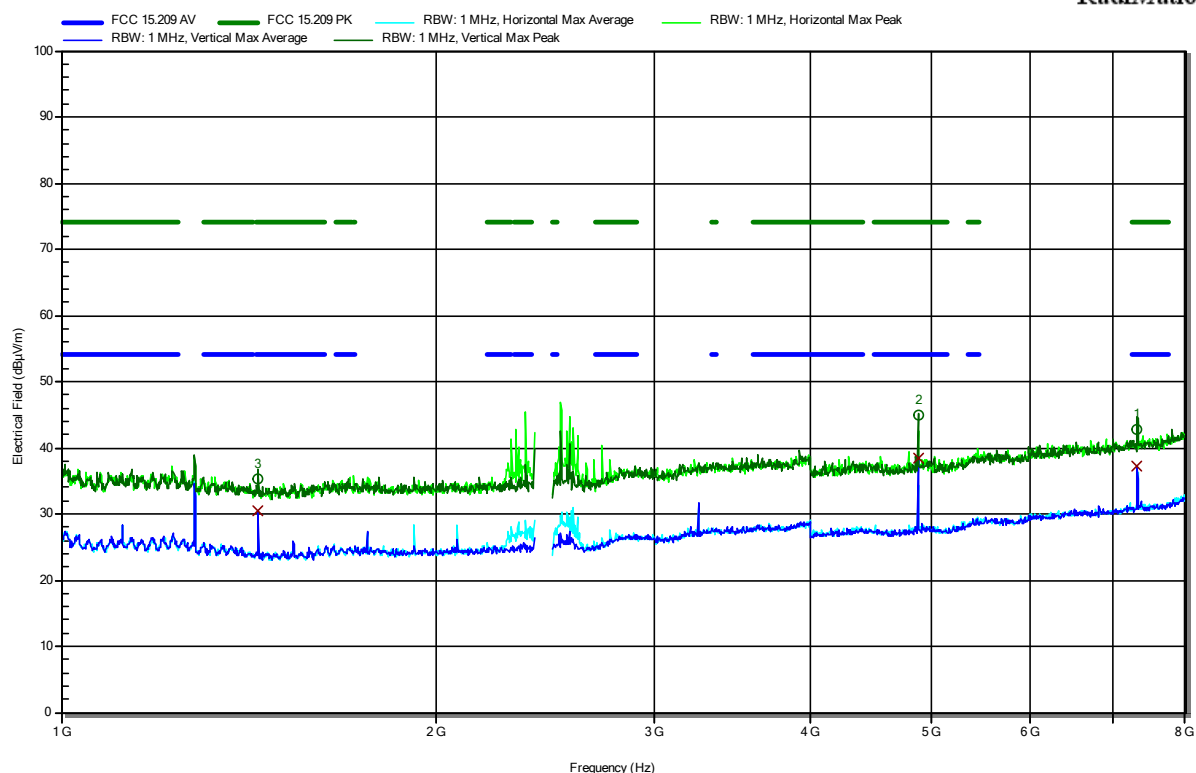

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
1.44 GHz	35.4 dBµV/m	74 dBµV/m	-38.6 dB	Pass	Vertical
4.8811 GHz	45.06 dBµV/m	74 dBµV/m	-28.94 dB	Pass	Vertical
7.3191 GHz	42.66 dBµV/m	74 dBµV/m	-31.34 dB	Pass	Vertical


Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
1.44 GHz	30.49 dBµV/m	54 dBµV/m	-23.51 dB	Pass	Vertical
4.8811 GHz	38.46 dBµV/m	54 dBµV/m	-15.54 dB	Pass	Vertical
7.3191 GHz	37.19 dBµV/m	54 dBµV/m	-16.81 dB	Pass	Vertical

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2440 MHz, PRBS9_250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-21
 Note:

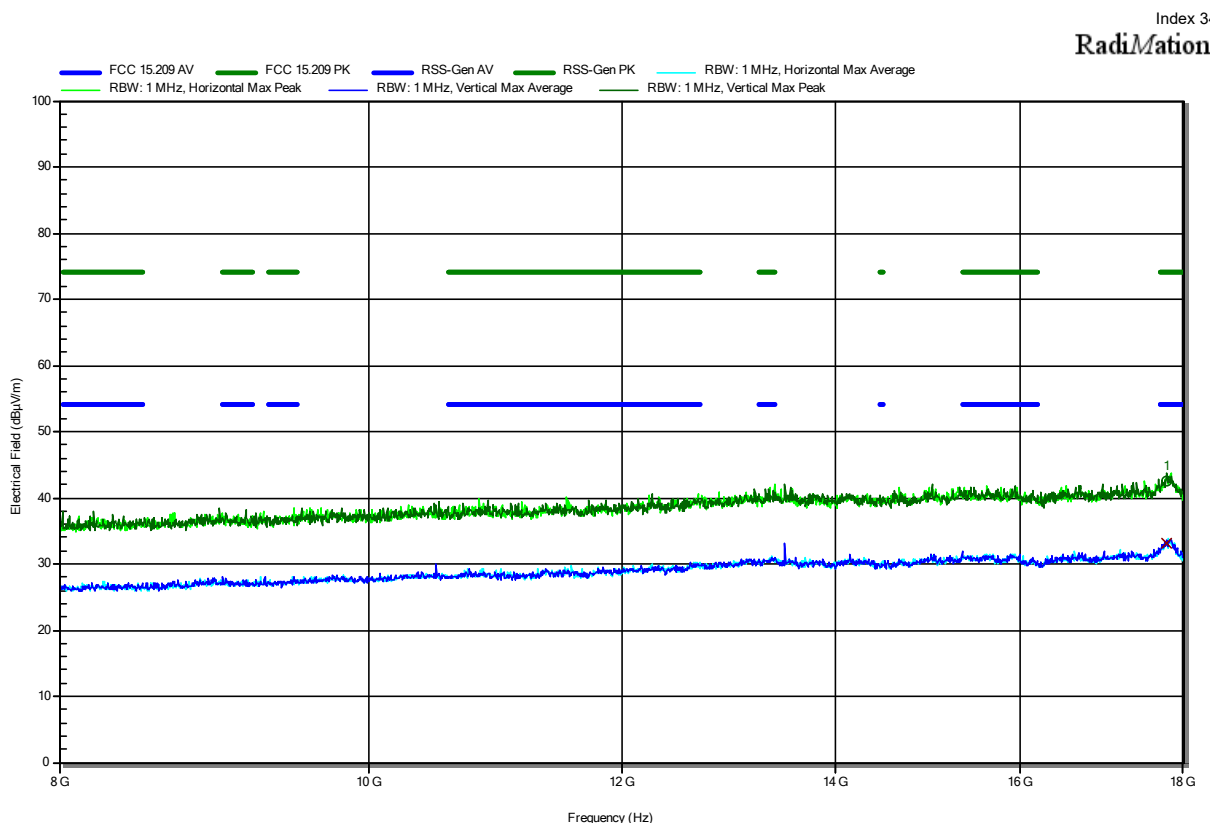

Frequency 17.785 GHz	Peak 42.64 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -31.36 dB	Peak Status Pass	Polarization Vertical
Frequency 17.785 GHz	Average 33.03 dBµV/m	Average Limit 54 dBµV/m	Average Difference -20.97 dB	Average Status Pass	Polarization Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Ibraimov Azamat
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2440 MHz, PRBS9_250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-24
 Note:

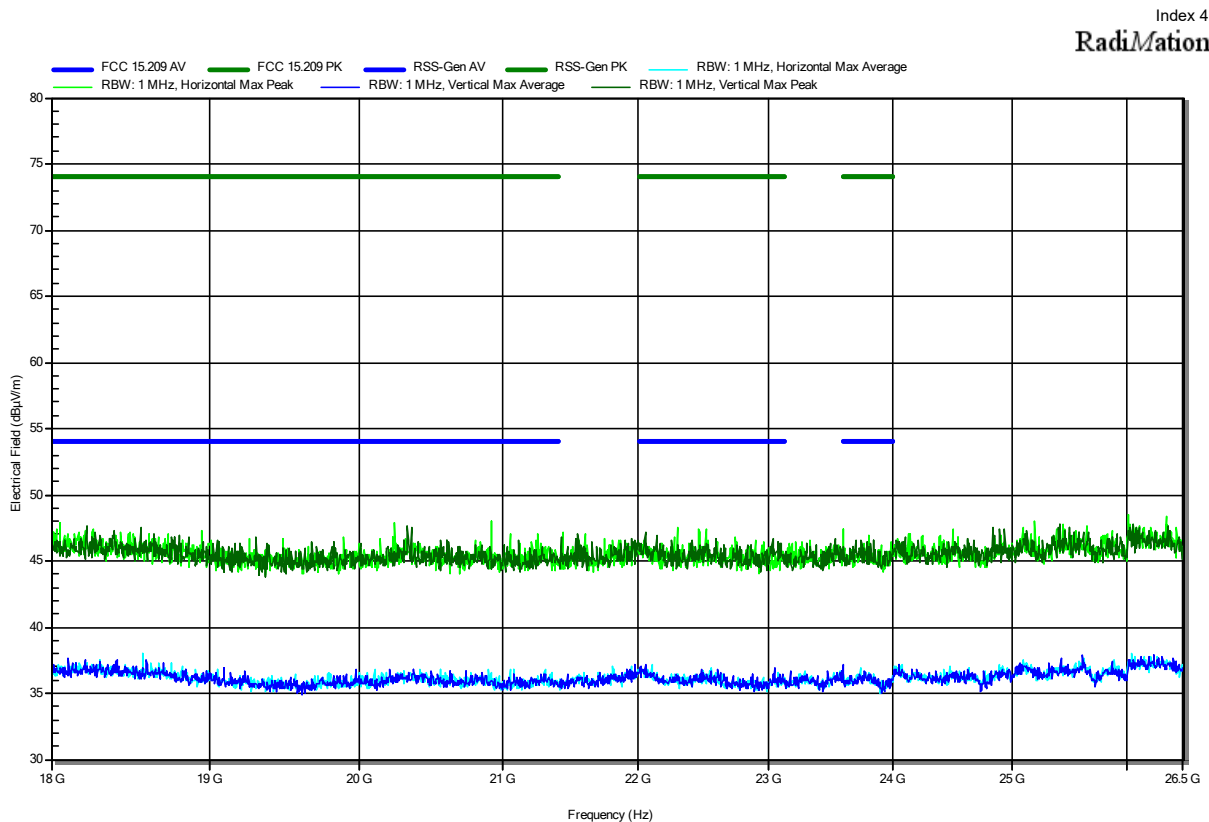


Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Ibraimov Azamat
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2480 MHz, PRBS9_250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-24
 Note:

Index 44

RadiMation

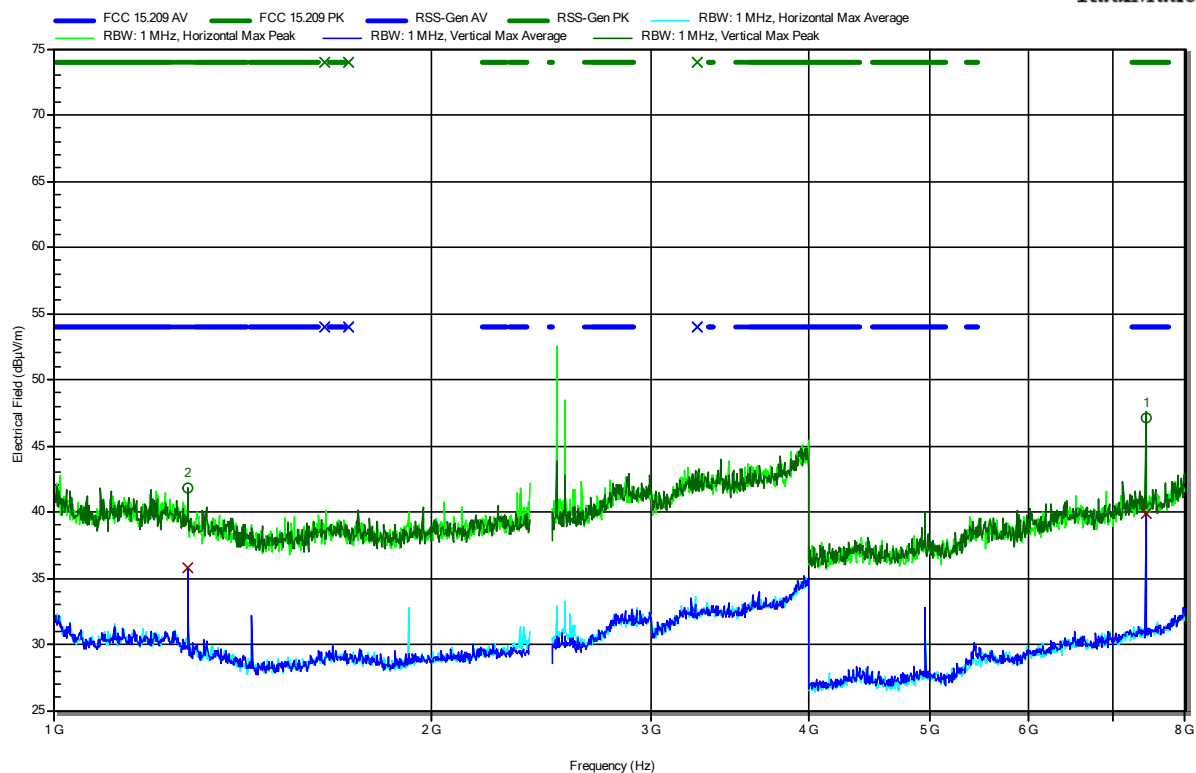

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
1.28 GHz	41.81 dBμV/m	74 dBμV/m	-32.19 dB	Pass	Vertical
7.439 GHz	47.09 dBμV/m	74 dBμV/m	-26.91 dB	Pass	Vertical


Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
1.28 GHz	35.79 dBμV/m	54 dBμV/m	-18.21 dB	Pass	Vertical
7.439 GHz	39.87 dBμV/m	54 dBμV/m	-14.13 dB	Pass	Vertical

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany


Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Ibraimov Azamat
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2480 MHz, PRBS9_250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-24
 Note: upper bandedge

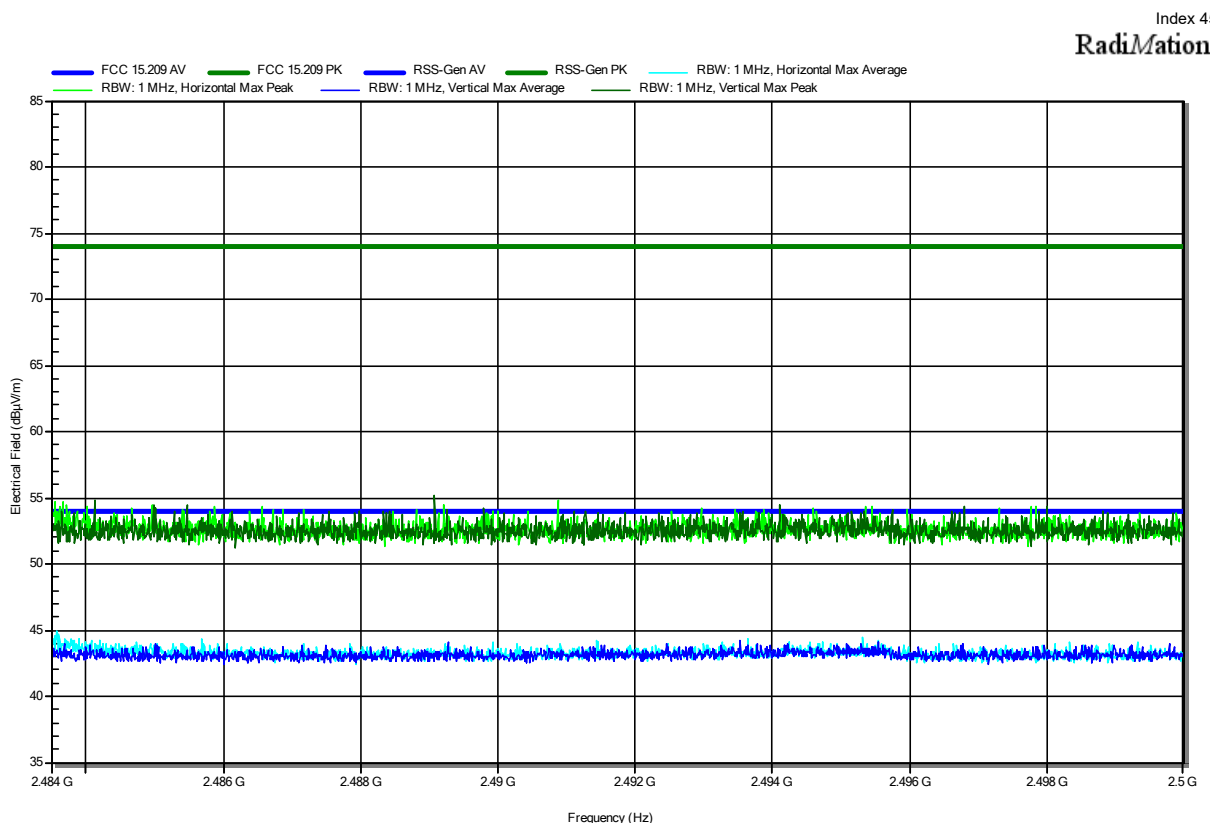


Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2480 MHz, PRBS9_250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-21
 Note:

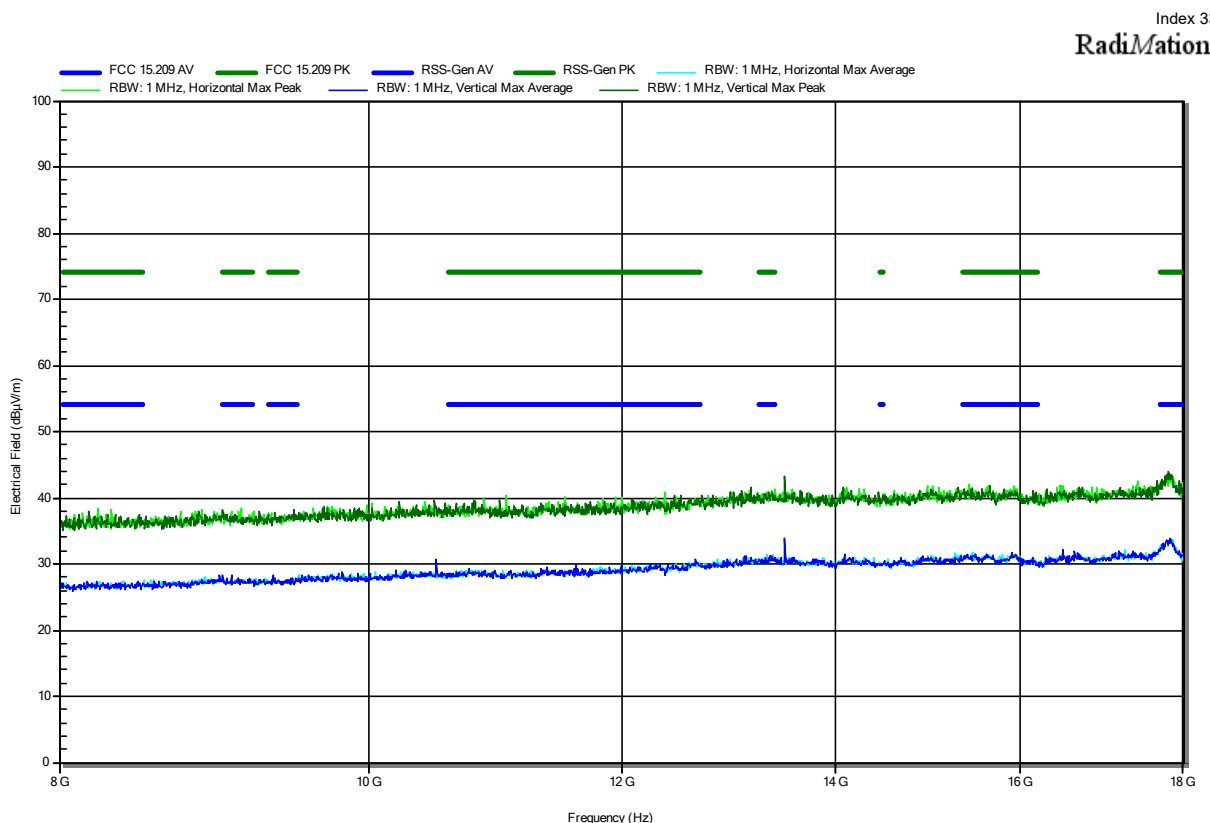

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Godson Offorji
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 3.3 VDC
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; BLE 5.3, 2480 MHz, PRBS9_250 Bytes, 2 Mbps, P = 19 dBm
 Test Date: 2023-04-21
 Note:

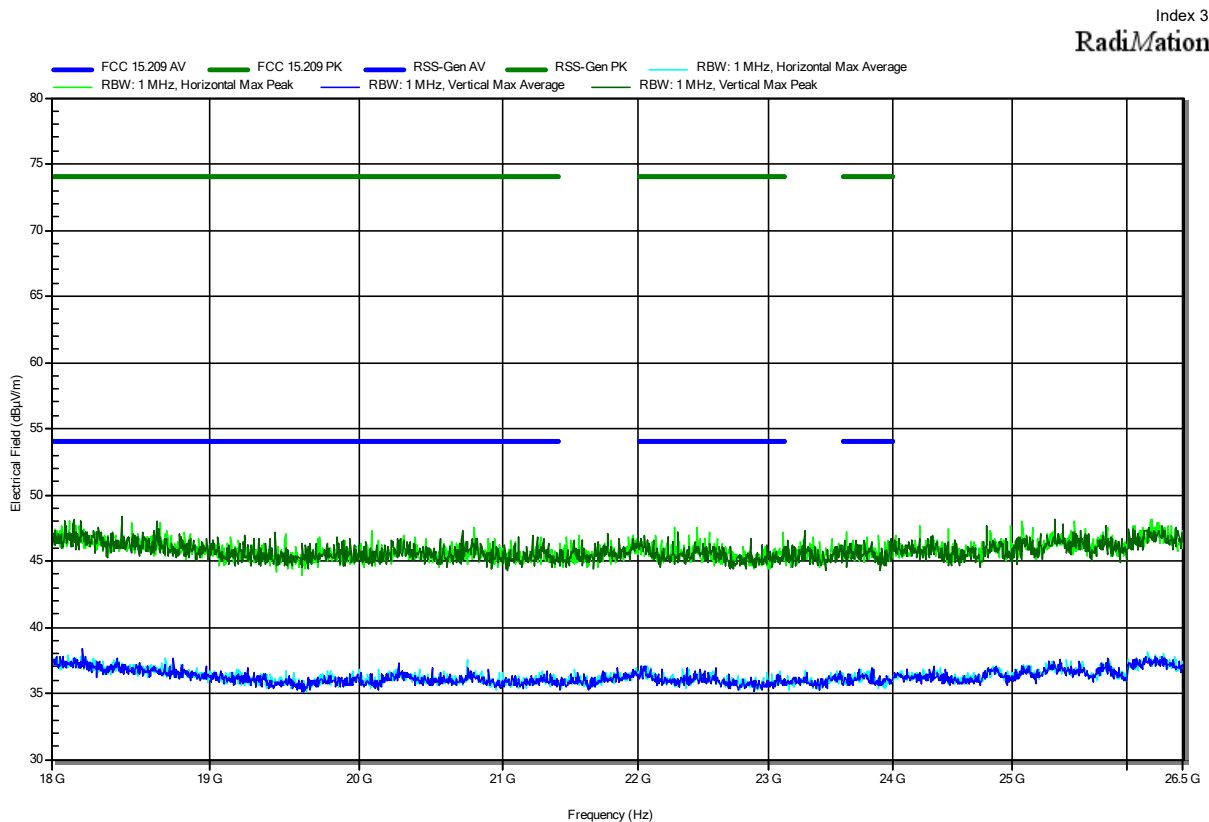

ANNEX C Receiver spurious emissions (with Antenna-1)

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck VULB 9168
 Measurement distance: 3 m
 Mode: Rx; BT-LE 5.3, 2440 MHz, 1 Mbit/s
 Test Date: 2023-03-10
 Note:

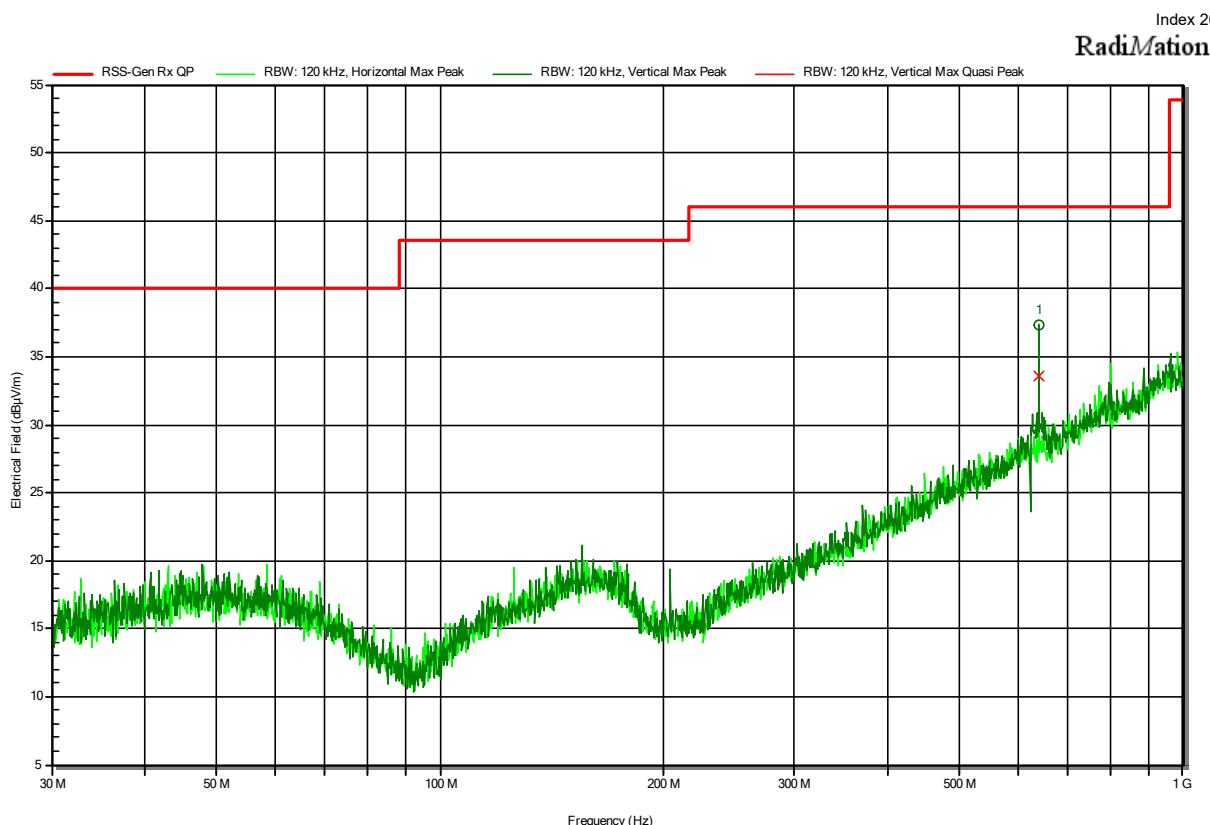

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
639.9951 MHz	37.3 dBµV/m	46 dBµV/m	-8.7 dB	Pass	Vertical
Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Polarization
639.9951 MHz	33.5 dBµV/m	46 dBµV/m	-12.45 dB	Pass	Vertical

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Qawasmeh
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120D
 Measurement distance: 3 m
 Mode: Rx; BT-LE 5.3, 2440 MHz, 1 Mbit/s
 Test Date: 2023-04-04
 Note:

Index 28

RadiMation

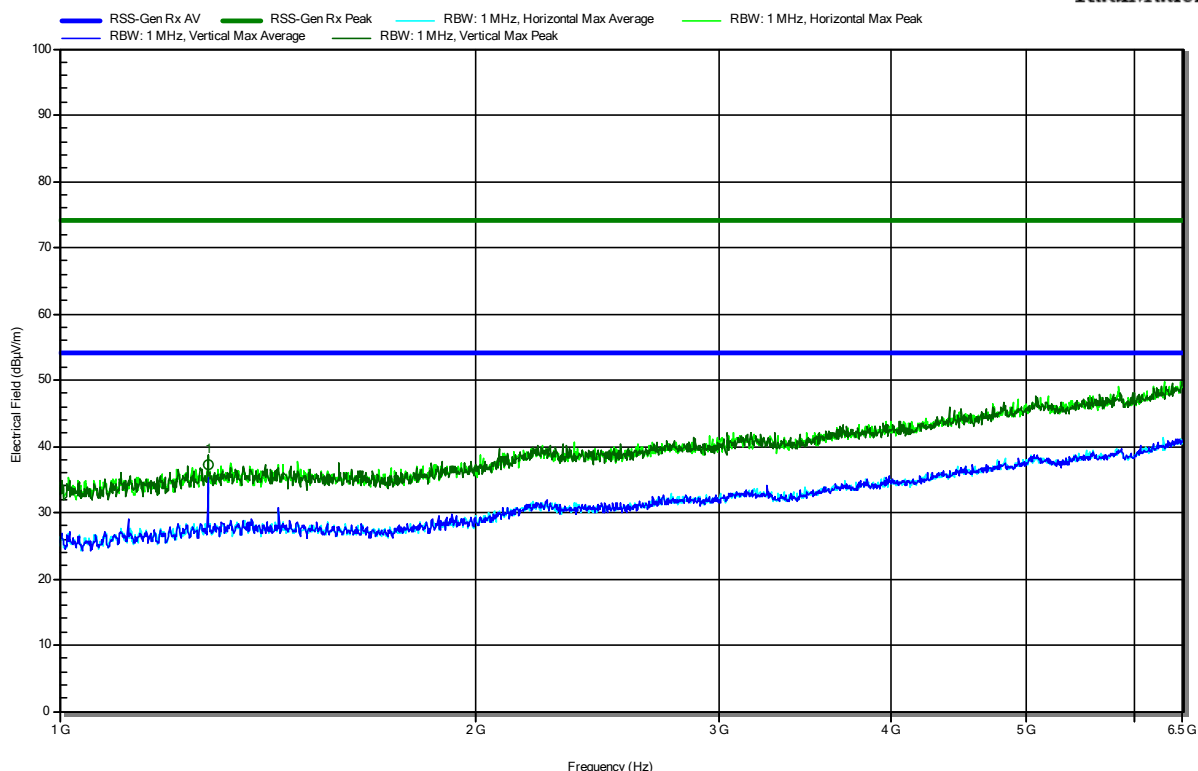

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
1.28 GHz	37.26 dBμV/m	74 dBμV/m	-36.74 dB	Pass	Vertical
Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
1.28 GHz	33.04 dBμV/m	53.98 dBμV/m	-20.94 dB	Pass	Vertical

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 43211
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Qawasmeh
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Rx; BT-LE 5.3, 2440 MHz, 1 Mbit/s
 Test Date: 2023-04-04
 Note:

Index 29

RadiMation

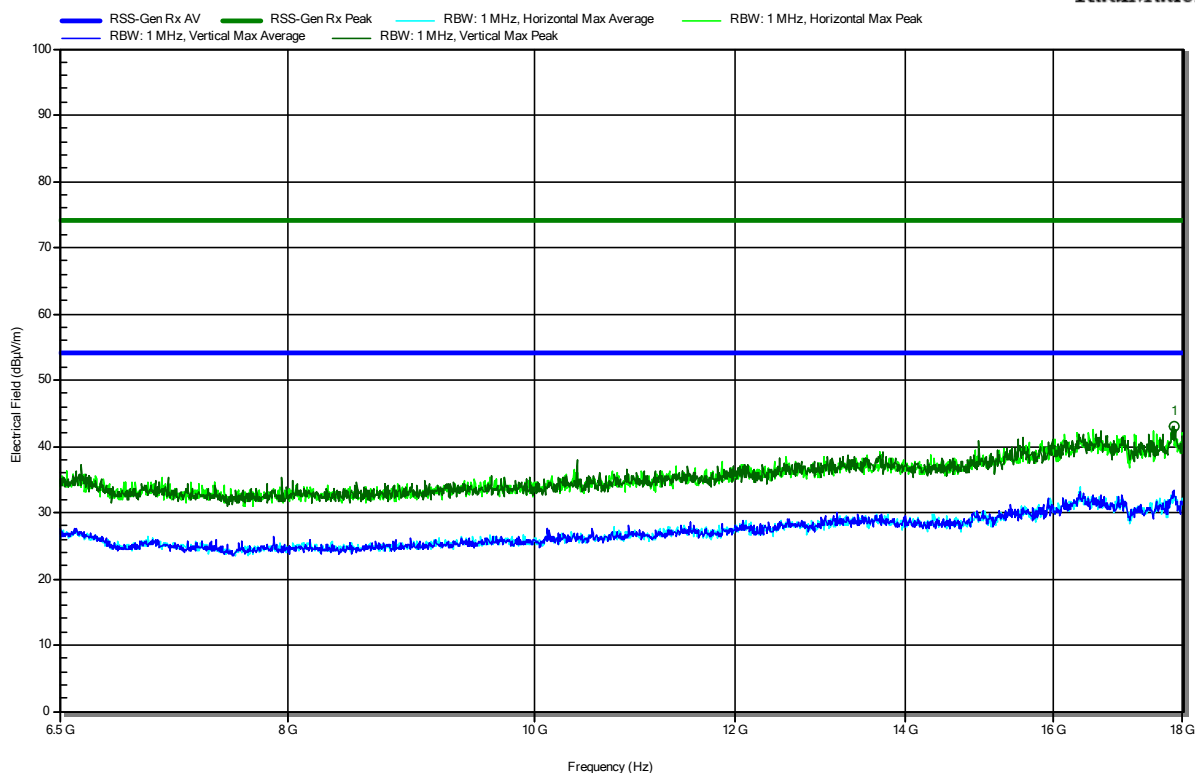


Frequency 17.846 GHz	Peak 42.96 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -31.04 dB	Peak Status Pass	Polarization Vertical
Frequency 17.846 GHz	Average 30.83 dBµV/m	Average Limit 53.98 dBµV/m	Average Difference -23.15 dB	Average Status Pass	Polarization Vertical

ANNEX D Receiver spurious emissions (with Antenna-2)

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Sohrabi
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck VULB 9168
 Measurement distance: 3 m
 Mode: Rx; BT-LE 5.3, 2440 MHz, 1 Mbit/s
 Test Date: 2023-06-02
 Note:

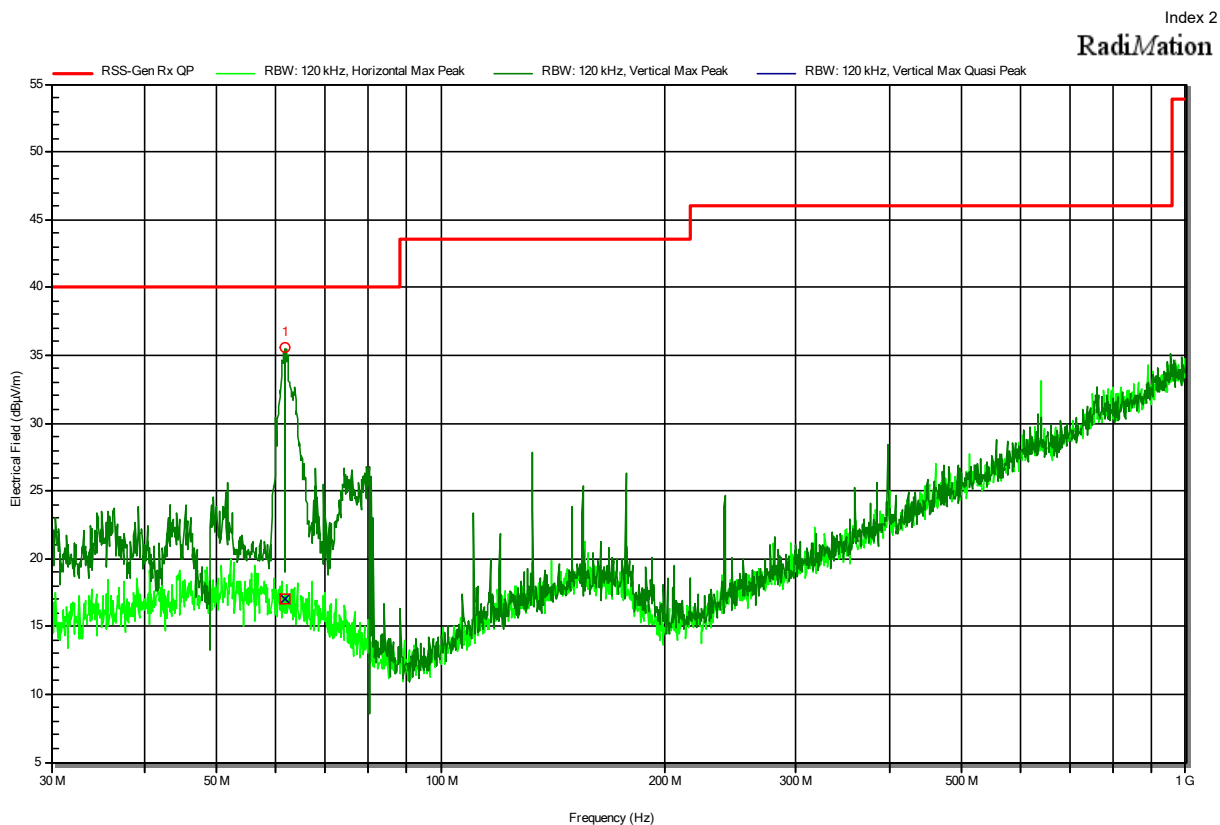


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
61.8292 MHz	35.5 dBµV/m	40 dBµV/m	-4.46 dB	Pass	Vertical
Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Polarization
61.8292 MHz	17.1 dBµV/m	40 dBµV/m	-22.95 dB	Pass	Vertical

Test Report No.: G0M-2302-1881-TFC247BL-W276-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247


Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Sohrabi
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck BBHA 9120D
 Measurement distance: 3 m
 Mode: Rx; BT-LE 5.3, 2440 MHz, 1 Mbit/s
 Test Date: 2023-06-02
 Note:

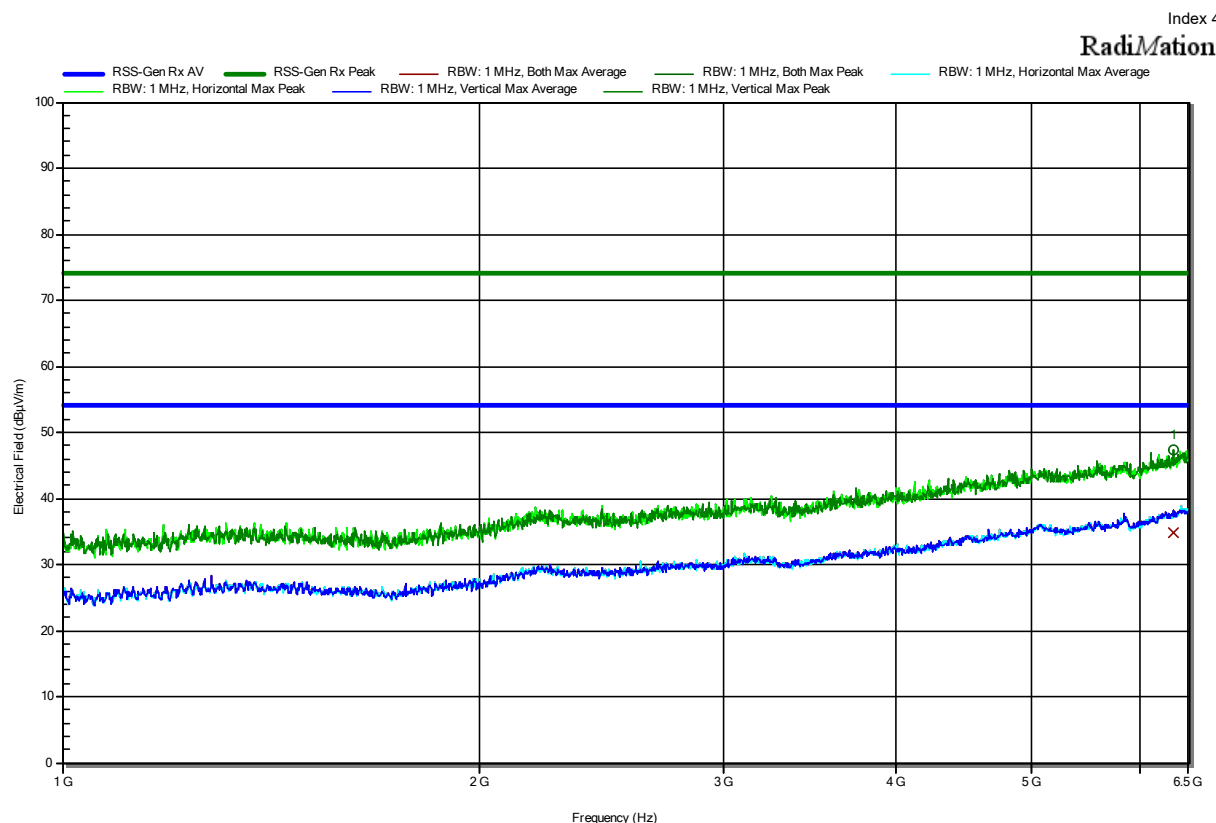

Frequency 6.331 GHz	Peak 47.41 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -26.59 dB	Peak Status Pass	Polarization Vertical
Frequency 6.331 GHz	Average 34.82 dBµV/m	Average Limit 53.98 dBµV/m	Average Difference -19.16 dB	Average Status Pass	Polarization Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247

Project Number: G0M-2302-1881
 Applicant: u-blox AG
 Model Description: Host-based multiradio module
 Model: MAYA-W276-00B
 Test Sample ID: 44078
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Sohrabi
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 3.3 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Rx; BT-LE 5.3, 2440 MHz, 1 Mbit/s
 Test Date: 2023-06-02
 Note:

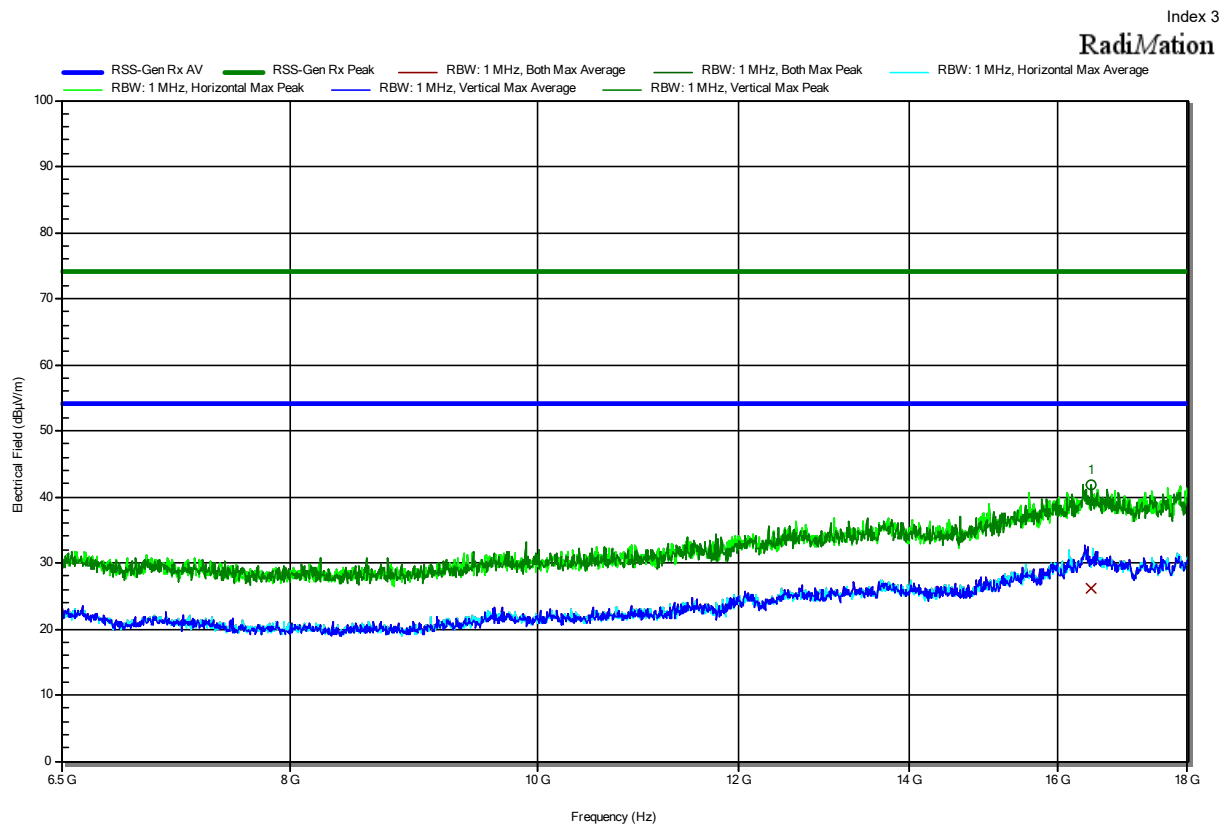

Frequency 16.496 GHz	Peak 41.79 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -32.21 dB	Peak Status Pass	Polarization Vertical
Frequency 16.496 GHz	Average 26.16 dBµV/m	Average Limit 53.98 dBµV/m	Average Difference -27.82 dB	Average Status Pass	Polarization Vertical

== END OF TEST REPORT ==