

TEST REPORT

ACCORDING TO:

FCC 47 CFR PART 15 subpart C, section 15.249 and subpart B

RSS-210 Issue 9:2016, RSS-Gen Issue 5:2018, ICES-003 Issue 6:2016

FOR:

ARAD TECHNOLOGIES

Water meter

Model: WMNTULG5

FCC ID: VIDWMNTLG5

IC: 10232A-WMNTULG5

This report is in conformity with ISO/IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

| | | |
|-----|---|----|
| 1 | Applicant information | 3 |
| 2 | Equipment under test attributes | 3 |
| 3 | Manufacturer information | 3 |
| 4 | Test details | 3 |
| 5 | Tests summary | 4 |
| 6 | EUT description | 5 |
| 6.1 | General information | 5 |
| 6.2 | Test configuration | 5 |
| 6.3 | Changes made in EUT | 5 |
| 6.4 | Transmitter characteristics | 6 |
| 7 | Transmitter tests according to 47CFR part 15 subpart C requirements | 7 |
| 7.1 | Field strength of emissions | 7 |
| 7.2 | Occupied bandwidth test | 24 |
| 7.3 | Band edge emission | 33 |
| 7.4 | Antenna requirements | 38 |
| 8 | Unintentional emission tests | 39 |
| 8.1 | Radiated emission measurements | 39 |
| 9 | APPENDIX A Test equipment and ancillaries used for tests | 42 |
| 10 | APPENDIX B Test equipment correction factors | 43 |
| 11 | APPENDIX C Measurement uncertainties | 46 |
| 12 | APPENDIX D Test laboratory description | 47 |
| 13 | APPENDIX E Specification references | 48 |
| 14 | APPENDIX F Abbreviations and acronyms | 49 |

1 Applicant information

Client name: ARAD TECHNOLOGIES
Address: POB 537, HaMada 4, Yokneam Ind. Zone, Yokneam Ilit 20692, Israel
Telephone: 04-9935222 Ext.277
Fax: 04-9935227
E-mail: viorel.negreanu@aradtec.com
Contact name: Mr.Vily Negreanu

2 Equipment under test attributes

Product name: Water meter
Product type: Transceiver
Model(s): WMNTULG5
Serial number: 18P00A5953
Hardware version: P4
Software release: 07.02/08.02
Receipt date 10-Apr-19

3 Manufacturer information

Manufacturer name: ARAD TECHNOLOGIES
Address: POB 537, HaMada 4, Yokneam Ind. Zone, Yokneam Ilit 20692, Israel
Telephone: 04-9935222 Ext.277
Fax: 04-9935227
E-Mail: viorel.negreanu@aradtec.com
Contact name: Mr.Vily Negreanu

4 Test details

Project ID: 33388
Location: Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel
Test started: 19-May-19
Test completed: 10-Jun-19
Test specification(s): FCC 47 CFR PART 15 subpart C, section 15.249 and subpart B
RSS-210 Issue 9:2016, RSS-Gen Issue 5:2018, ICES-003 Issue 6:2016

5 Tests summary

Test

Transmitter characteristics

| | |
|--|------|
| Section 15.249(a)(d) / RSS-210 section B.10, Field strength of emissions | Pass |
| Section 15.215(c), Occupied bandwidth | Pass |
| Section 15.249(d) / RSS-210 section C.4, Band edge emissions | Pass |
| Section 15.203, Antenna requirement | Pass |




Unintentional emissions

| | |
|--|------|
| Section 15.109 / RSS-Gen, section 7.3, ICES-003, Radiated emission | Pass |
|--|------|

This test report supersedes the previously issued test report identified by Doc ID: ARARAD_FCC.33388_W_M_Rev2

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

| | Name and Title | Date | Signature |
|---------------------|--|-----------------------|---|
| Tested by: | Mr. A. Morozov test engineer EMC & Radio | 26-May-19 – 10-Jun-19 |  |
| Reviewed by: | Mrs. S Peysahov Sheynin test engineer EMC & Radio | 29-Mar-20 |  |
| Approved by: | Mr. S. Samokha, technical manager, EMC and Radio | 29-Mar-20 |  |


6 EUT description

Note: The following data in this clause is provided by the customer and represents his sole responsibility

6.1 General information

Functions as booster, but is designed to be installed on walls (not in pits). The mains difference between the Wall mount and the booster is the mechanical enclosure.

6.2 Test configuration

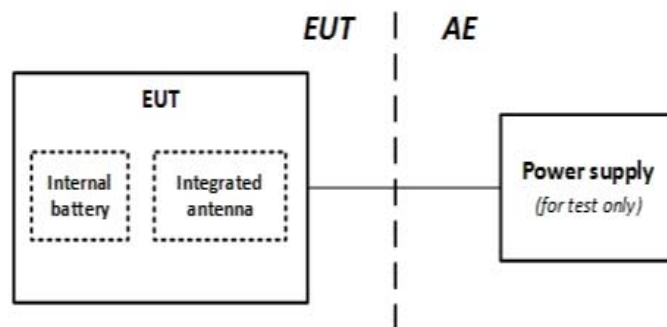

6.3 Changes made in EUT

No changes were performed in the EUT.

6.4 Transmitter characteristics

| | | | | | |
|---|--|---|------------------------|---|---------|
| Type of equipment | | | | | |
| V | Stand-alone (Equipment with or without its own control provisions) | | | | |
| | Combined equipment (Equipment where the radio part is fully integrated within another type of equipment) | | | | |
| | Plug-in card (Equipment intended for a variety of host systems) | | | | |
| Assigned frequency range | | 902 - 928 MHz | | | |
| Operating frequency range | | 902.3 – 927.8 MHz for 2FSK 9.6 kbps 902.3 – 927.8 MHz for 2FSK 19.2 kbps 902.4 – 927.6 MHz for 2FSK 38.4 kbps 903.8 – 927.4 MHz for GFSK 50.0 kbps | | | |
| Maximum field strength | | 93.50 dB(μV/m) at 3 m test distance for 2FSK 9.6 kbps 93.45 dB(μV/m) at 3 m test distance for 2FSK 19.2 kbps 93.89 dB(μV/m) at 3 m test distance for 2FSK 38.4 kbps 93.63 dB(μV/m) at 3 m test distance for GFSK 50.0 kbps | | | |
| Is transmitter output power variable? | | V | No | | |
| | | Yes | | continuous variable | |
| | | | | stepped variable with stepsize, software controlled | dB |
| | | | Maximum field strength | | |
| Antenna connection | | | | | |
| V | unique coupling | standard connector | Integral | with temporary RF connector without temporary RF connector | |
| Antenna/s technical characteristics | | | | | |
| Type | Manufacturer | | Model number | | Gain |
| Integrated | AT | | NA | | 3.5 dBi |
| Type of modulation / data rates | | 2FSK 9.6 kbps 2FSK 19.2 kbps 2FSK 38.4 kbps GFSK 50.0 kbps | | | |
| Transmitter duty cycle supplied for test | | 100% | | | |
| Transmitter power source | | | | | |
| V | Battery | Nominal rated voltage | 3.6 VDC | Battery type | Lithium |
| | DC | Nominal rated voltage | | | |
| | AC mains | Nominal rated voltage | | Frequency | |
| Common power source for transmitter and receiver | | | | V | yes no |



| | | | |
|--|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(a)(d)/RSS-210, section B.10, Field strength of emissions | | | |
| Test procedure: ANSI C63.10, Section 6.5, 6.6 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 19-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 47 % | Air Pressure: 1015 hPa | Power: 3.6 VDC |
| Remarks: | | | |

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Field strength of emissions

7.1.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.1.1, Table 7.1.2 and Table 7.1.3.

Table 7.1.1 Radiated fundamental emission limits

| Fundamental frequency, MHz | Field strength at 3 m, dB(μV/m) | | |
|----------------------------|---------------------------------|---------|------------|
| | Peak | Average | Quasi-Peak |
| 902 – 928 | NA | NA | 94 |
| 2400 – 2483.5 | 114.0 | 94.0 | NA |
| 5725 – 5875 | 114.0 | 94.0 | NA |
| 24000 – 24250* | 128.0 | 108.0 | NA |

* The band is not used according to RSS-210 section A2.9

Table 7.1.2 Harmonics limits

| Fundamental frequency, MHz | Field strength at 3 m, dB(μV/m) | |
|----------------------------|---------------------------------|---------|
| | Peak | Average |
| 902 – 928 | 74.0 | 54.0 |
| 2400 – 2483.5 | 74.0 | 54.0 |
| 5725 – 5875 | 74.0 | 54.0 |
| 24000 – 24250* | 88.0 | 68.0 |

* The band is not used according to RSS-210 section A2.9



| | | | |
|--|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(a)(d)/RSS-210, section B.10, Field strength of emissions | | | |
| Test procedure: ANSI C63.10, Section 6.5, 6.6 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 19-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 47 % | Air Pressure: 1015 hPa | Power: 3.6 VDC |
| Remarks: | | | |

Table 7.1.3 Radiated spurious emissions limits (other than harmonics)

| Frequency, MHz | Field strength at 3 m, dB(μV/m)* | | | |
|----------------|----------------------------------|-----------------|-----------------|--|
| | Peak | Quasi Peak | Average | Attenuation below carrier |
| 0.009 – 0.090 | 148.5 – 128.5 | NA | 128.5 – 108.5** | 50 dBc (whichever is the less stringent) |
| 0.090 – 0.110 | NA | 108.5 – 106.8** | NA | |
| 0.110 – 0.490 | 126.8 – 113.8 | NA | 106.8 – 93.8** | |
| 0.490 – 1.705 | NA | 73.8 – 63.0** | NA | |
| 1.705 – 30.0* | | 69.5 | | |
| 30 – 88 | | 40.0 | | |
| 88 – 216 | | 43.5 | | |
| 216 – 960 | | 46.0 | | |
| 960 - 1000 | | 54.0 | | |
| Above 1000 | 74.0 | NA | 54.0 | |

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

Note: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency but not exceeding 40 GHz for intentional radiators operated below 10 GHz and up to the fifth harmonic of the highest fundamental frequency but not exceeding 100 GHz for intentional radiators operated above 10 GHz.

7.1.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and the performance check was conducted.

7.1.2.2 The measurements were performed in typical EUT position.

7.1.2.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.1.3 Test procedure for spurious emission field strength measurements above 30 MHz


7.1.3.1 The EUT was set up as shown in Figure 7.1.2, energized and the performance check was conducted.

7.1.3.2 The measurements were performed in typical EUT position.

7.1.3.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

| | | | |
|--|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(a)(d)/RSS-210, section B.10, Field strength of emissions | | | |
| Test procedure: ANSI C63.10, Section 6.5, 6.6 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 19-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 47 % | Air Pressure: 1015 hPa | Power: 3.6 VDC |
| Remarks: | | | |

Figure 7.1.1 Setup for spurious emission field strength measurements below 30 MHz

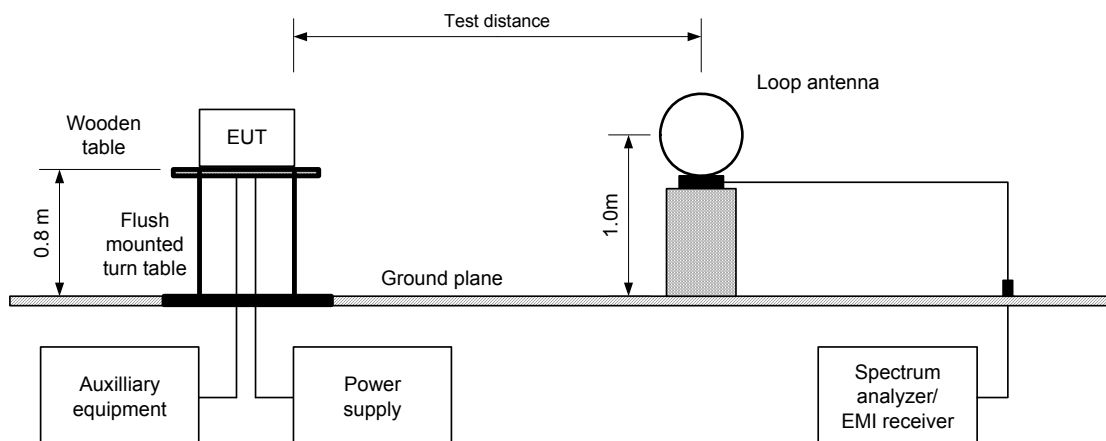

| | | | |
|--|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(a)(d)/RSS-210, section B.10, Field strength of emissions | | | |
| Test procedure: ANSI C63.10, Section 6.5, 6.6 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 19-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 47 % | Air Pressure: 1015 hPa | Power: 3.6 VDC |
| Remarks: | | | |

Figure 7.1.2 Setup for spurious emission field strength measurements in 30 -1000 MHz


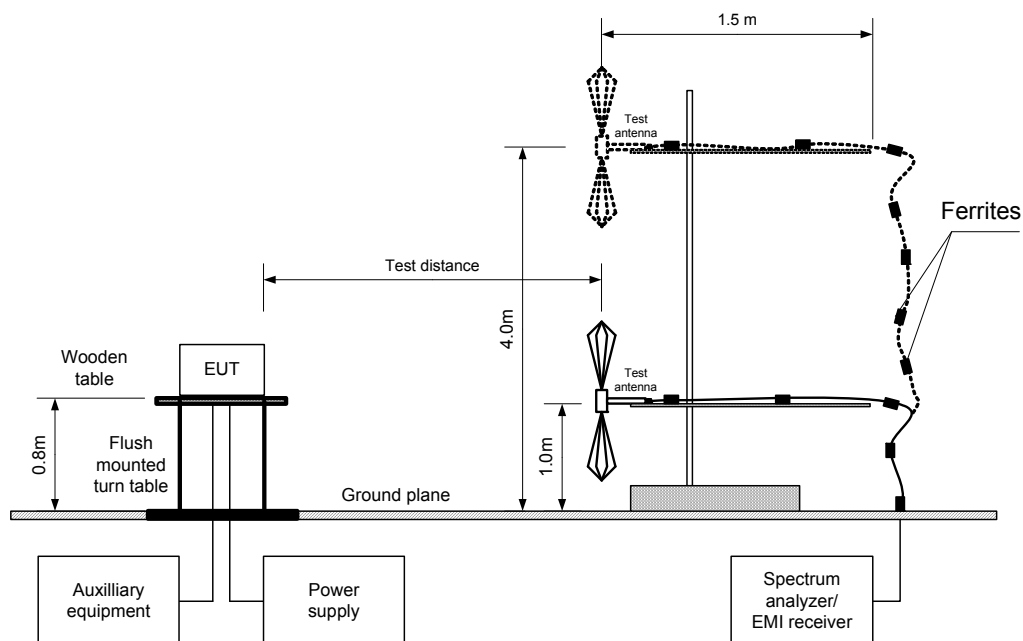


Figure 7.1.3 Setup for spurious emission field strength measurements above 1000 MHz



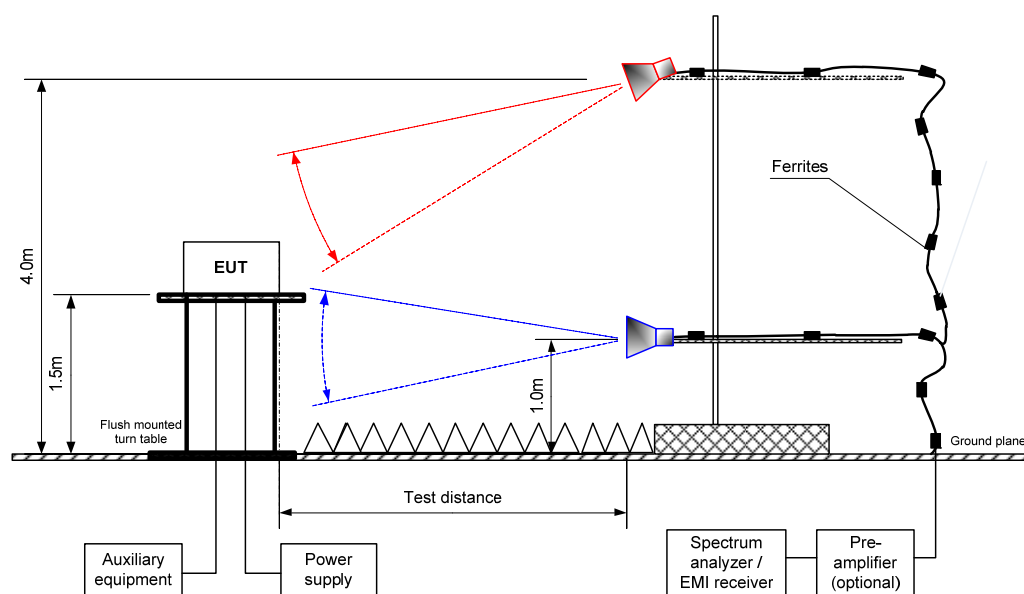

HERMON LABORATORIES

| | | | |
|--|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(a)(d)/RSS-210, section B.10, Field strength of emissions | | | |
| Test procedure: ANSI C63.10, Section 6.5, 6.6 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 19-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 47 % | Air Pressure: 1015 hPa | Power: 3.6 VDC |
| Remarks: | | | |



HERMON LABORATORIES

| | | | |
|--|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(a)(d)/RSS-210, section B.10, Field strength of emissions | | | |
| Test procedure: ANSI C63.10, Section 6.5, 6.6 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 19-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 47 % | Air Pressure: 1015 hPa | Power: 3.6 VDC |
| Remarks: | | | |

Table 7.1.4 Field strength of fundamental emission and spurious emissions

TEST DISTANCE: 3 m
EUT POSITION: Typical
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 1.0 kHz (9 kHz – 150 kHz)
9.0 kHz (150 kHz – 30 MHz)
120 kHz (30 MHz – 1000 MHz)
1.0 MHz (above 1000 MHz)
VIDEO BANDWIDTH: ≥ Resolution bandwidth
TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
Biconilog (30 MHz – 1000 MHz)
Double ridged guide (above 1000 MHz)

INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz

| INVESTIGATED FREQUENCY RANGE: 0.003 — 1000 MHz | | | | | | | | |
|--|---------|-----------|-------------------|-------------------------|-----------------------------|-----------------|--------------|---------|
| Frequency, MHz | Antenna | | Azimuth, degrees* | Peak emission, dB(μV/m) | Quasi-peak | | | Verdict |
| | Pol. | Height, m | | | Measured emission, dB(μV/m) | Limit, dB(μV/m) | Margin, dB** | |
| Fundamental emission with 2FSK 9.6 kbps | | | | | | | | |
| 902.3 | Ver | 1.00 | 6 | 93.50 | 93.50 | 94.0 | -0.50 | Pass |
| 915.0 | Ver | 1.00 | 6 | 92.62 | 92.62 | 94.0 | -1.38 | |
| 927.8 | Ver | 1.00 | 27 | 91.30 | 91.30 | 94.0 | -2.70 | |
| Fundamental emission with 2FSK 19.2 kbps | | | | | | | | |
| 902.3 | Ver | 1.00 | 341 | 93.45 | 93.45 | 94.0 | -0.55 | Pass |
| 915.0 | Ver | 1.00 | 12 | 92.99 | 92.99 | 94.0 | -1.01 | |
| 927.8 | Ver | 1.00 | 8 | 91.29 | 91.29 | 94.0 | -2.71 | |
| Fundamental emission with 2FSK 38.4 kbps | | | | | | | | |
| 902.4 | Ver | 1.00 | 326 | 93.89 | 93.89 | 94.0 | -0.11 | Pass |
| 915.0 | Ver | 1.00 | 342 | 92.11 | 92.11 | 94.0 | -1.89 | |
| 927.6 | Ver | 1.00 | 301 | 90.72 | 90.72 | 94.0 | -3.28 | |
| Fundamental emission with GFSK 50 kbps | | | | | | | | |
| 903.8 | Ver | 1.00 | 8 | 93.63 | 93.63 | 94.0 | -0.37 | Pass |
| 915.0 | Ver | 1.00 | 10 | 93.24 | 93.24 | 94.0 | -0.76 | |
| 927.4 | Ver | 1.00 | 40 | 91.23 | 91.23 | 94.0 | -2.77 | |
| Spurious emissions at low, mid, high frequencies | | | | | | | | |
| No emissions were found | | | | | | | | Pass |

INVESTIGATED FREQUENCY RANGE: 1000 – 9500 MHz

| F, MHz | Antenna | | Azimuth, degrees* | Peak field strength | | | Avr factor, dB | Average field strength | | | Verdict |
|--------------------------------------|---------|-----------|-------------------|---------------------|-----------------|--------------|----------------|------------------------|-----------------|--------------|---------|
| | Pol. | Height, m | | Measured, dB(μV/m) | Limit, dB(μV/m) | Margin, dB** | | Measured, dB(μV/m) | Limit, dB(μV/m) | Margin, dB** | |
| Spurious emissions at low frequency | | | | | | | | | | | |
| 1804.77 | Vert | 2.04 | 67 | 40.67 | 74.0 | -33.33 | NA | 32.26 | 54.0 | -21.74 | Pass |
| 3609.21 | Hor | 2.04 | 113 | 43.45 | 74.0 | -30.55 | NA | 33.99 | 54.0 | -20.01 | |
| Spurious emissions at mid frequency | | | | | | | | | | | |
| 1830.14 | Vert | 1.26 | 123 | 42.44 | 74.0 | -31.56 | NA | 36.66 | 54.0 | -17.34 | Pass |
| 3659.94 | Vert | 1.26 | 109 | 43.53 | 74.0 | -30.47 | NA | 33.48 | 54.0 | -20.52 | |
| Spurious emissions at high frequency | | | | | | | | | | | |
| 1855.50 | Vert | 2.04 | 325 | 41.48 | 74.0 | -32.52 | NA | 33.54 | 54.0 | -20.46 | Pass |
| 3711.44 | Vert | 2.04 | 109 | 43.01 | 74.0 | -30.99 | NA | 32.17 | 54.0 | -21.83 | |

*- EUT front panel refers to 0 degrees position of turntable.

** - Margin, dB = Measured value, dB(μV/m) - Limit, dB(μV/m).



HERMON LABORATORIES

| | | | |
|--|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(a)(d)/RSS-210, section B.10, Field strength of emissions | | | |
| Test procedure: ANSI C63.10, Section 6.5, 6.6 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 19-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 47 % | Air Pressure: 1015 hPa | Power: 3.6 VDC |
| Remarks: | | | |

Table 7.1.5 Average factor calculation

| Transmission pulse | | Transmission burst | | Transmission train duration, ms | Average factor, dB |
|--------------------|------------|--------------------|------------|---------------------------------|--------------------|
| Duration, ms | Period, ms | Duration, ms | Period, ms | | |
| NA | NA | NA | NA | NA | NA |

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|--|--|
| HL 0446 | HL 3903 | HL 4360 | HL 4933 | HL 5288 | HL 5405 | | |
|---------|---------|---------|---------|---------|---------|--|--|


Full description is given in Appendix A.

Plot 7.1.1 Radiated emission measurements at the low fundamental frequency with 2FSK 9.6 kbps

TEST SITE: Semi anechoic chamber

TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical and horizontal

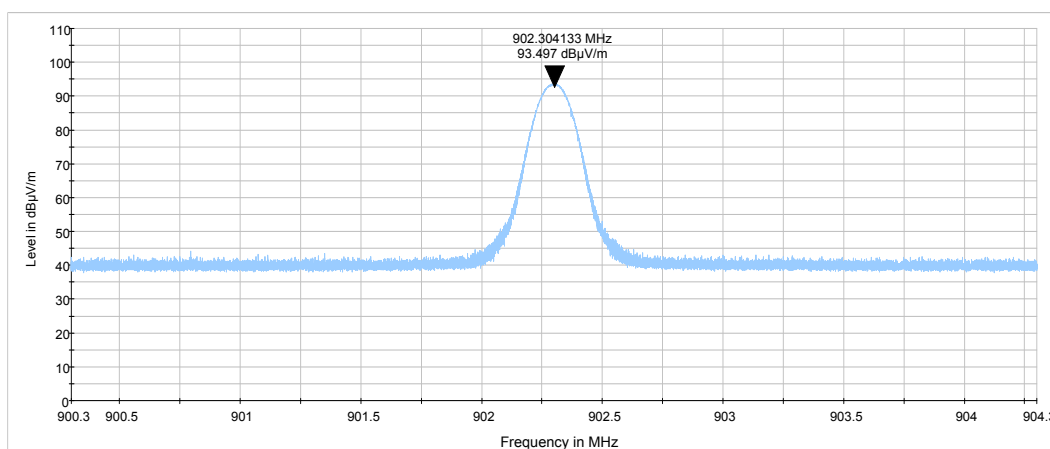




HERMON LABORATORIES

| | | | |
|---------------------|-------------------------|---|----------------|
| Test specification: | | Section 15.249(a)(d)/RSS-210, section B.10, Field strength of emissions | |
| Test procedure: | | ANSI C63.10, Section 6.5, 6.6 | |
| Test mode: | | Verdict: PASS | |
| Date(s): | | | |
| 19-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 47 % | Air Pressure: 1015 hPa | Power: 3.6 VDC |
| Remarks: | | | |


Plot 7.1.2 Radiated emission measurements at the mid fundamental frequency with 2FSK 9.6 kbps

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal

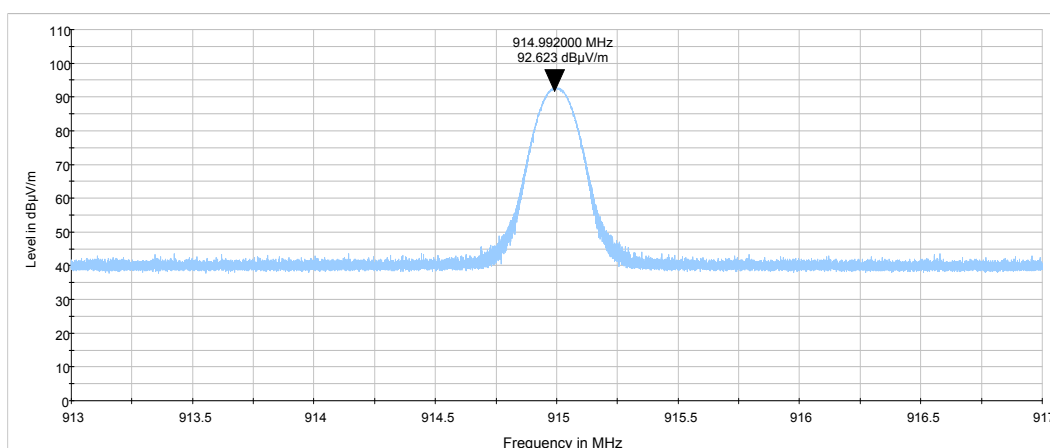

Plot 7.1.3 Radiated emission measurements at the high fundamental frequency with 2FSK 9.6 kbps


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal

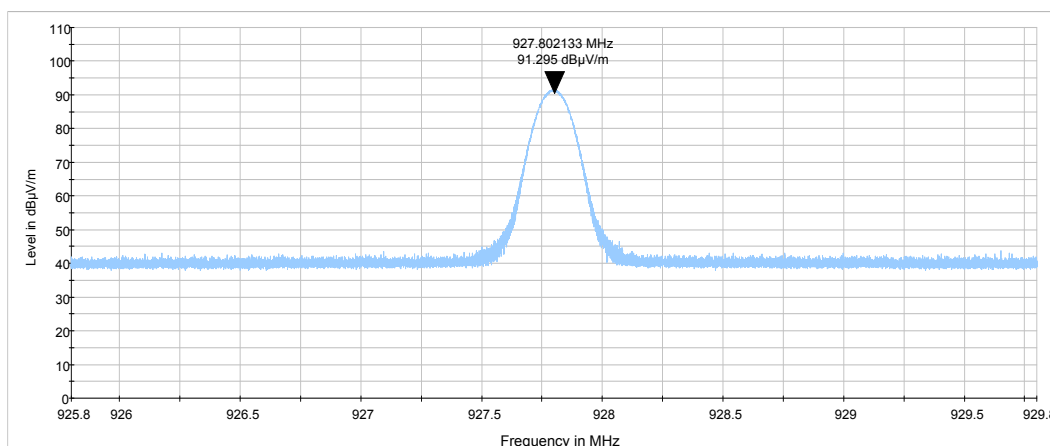

| | | | |
|--|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(a)(d)/RSS-210, section B.10, Field strength of emissions | | | |
| Test procedure: ANSI C63.10, Section 6.5, 6.6 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 19-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 47 % | Air Pressure: 1015 hPa | Power: 3.6 VDC |
| Remarks: | | | |


Plot 7.1.4 Radiated emission measurements at the low fundamental frequency with 2FSK 19.2 kbps

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal

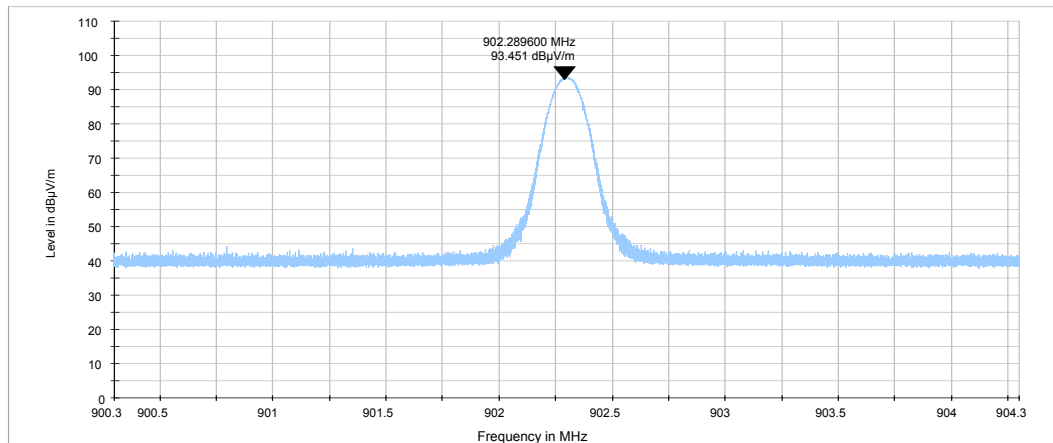

Plot 7.1.5 Radiated emission measurements at the mid fundamental frequency with 2FSK 19.2 kbps

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal

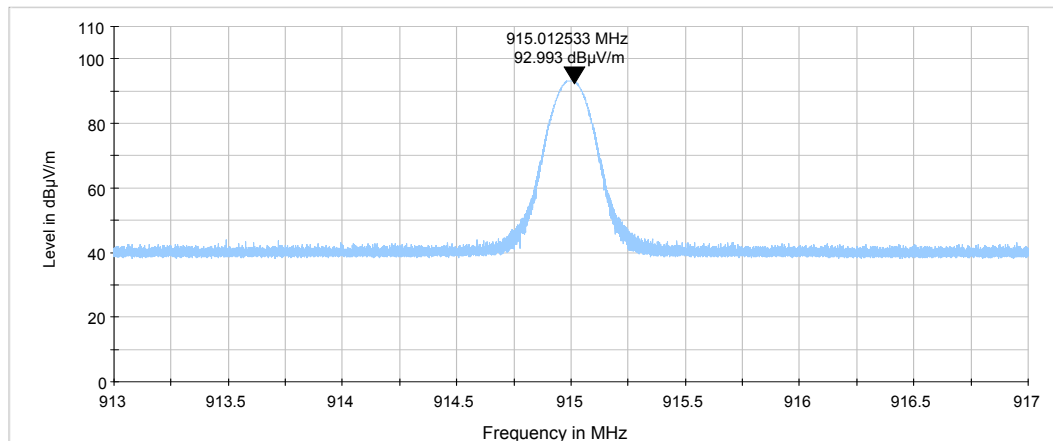




HERMON LABORATORIES

| | | | |
|---|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(a)(d)/RSS-210, section B.10, Field strength of emissions | | | |
| Test procedure: ANSI C63.10, Section 6.5, 6.6 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 19-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 47 % | Air Pressure: 1015 hPa | Power: 3.6 VDC |
| Remarks: | | | |


Plot 7.1.6 Radiated emission measurements at the high fundamental frequency with 2FSK 19.2 kbps

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal

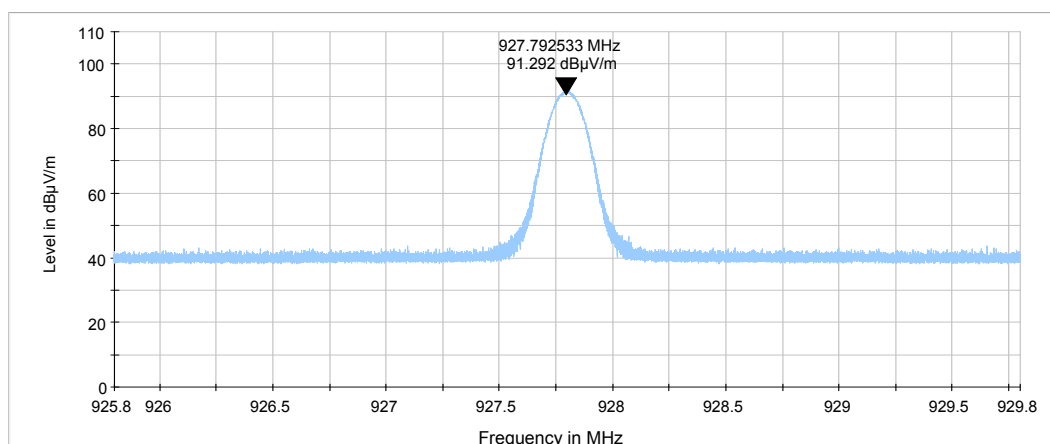

Plot 7.1.7 Radiated emission measurements at the low fundamental frequency with 2FSK 38.4 kbps

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal

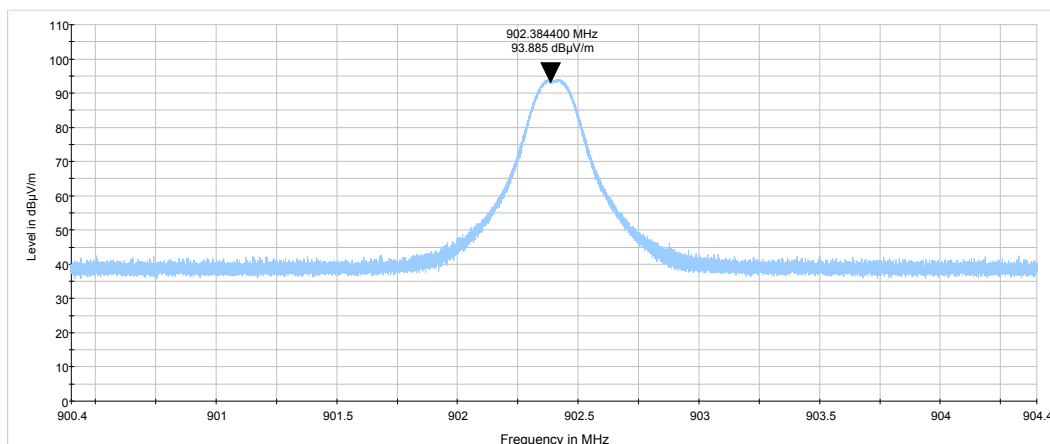




HERMON LABORATORIES

| | | | |
|--|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(a)(d)/RSS-210, section B.10, Field strength of emissions | | | |
| Test procedure: ANSI C63.10, Section 6.5, 6.6 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 19-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 47 % | Air Pressure: 1015 hPa | Power: 3.6 VDC |
| Remarks: | | | |


Plot 7.1.8 Radiated emission measurements at the mid fundamental frequency with 2FSK 38.4 kbps

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal

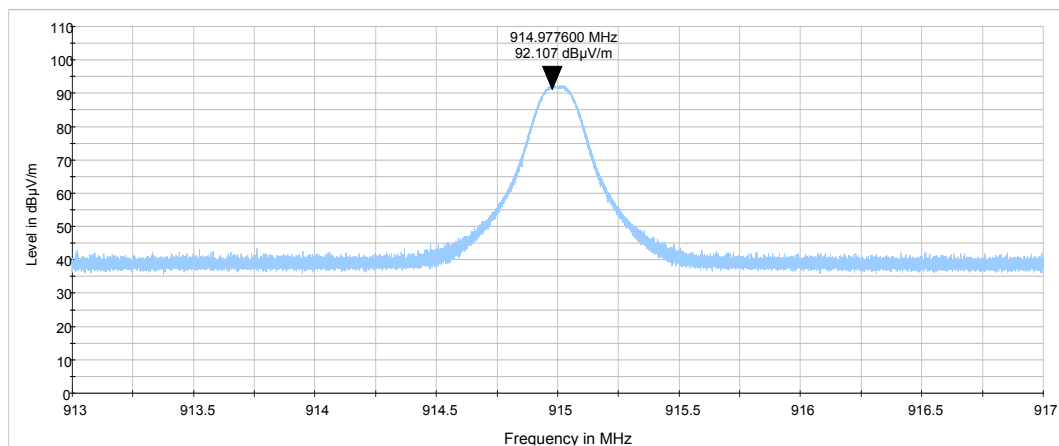

Plot 7.1.9 Radiated emission measurements at the high fundamental frequency with 2FSK 38.4 kbps

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal

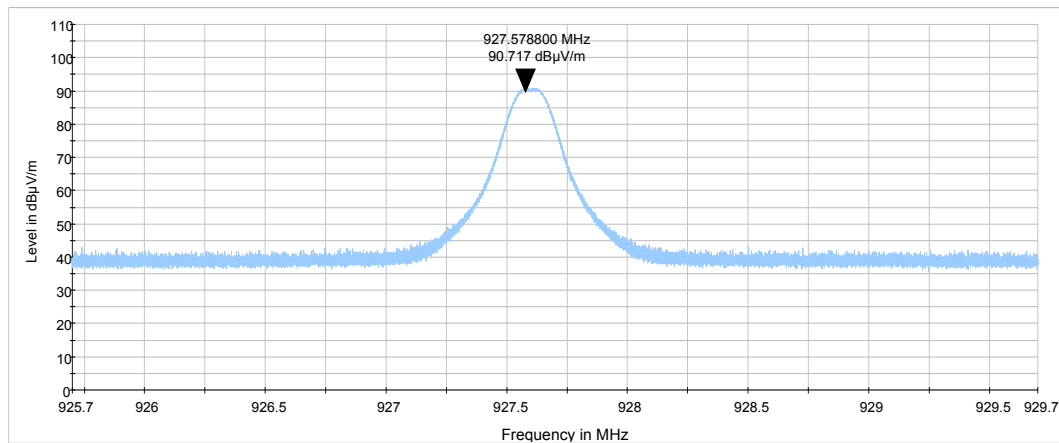




HERMON LABORATORIES

| | | | |
|--|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(a)(d)/RSS-210, section B.10, Field strength of emissions | | | |
| Test procedure: ANSI C63.10, Section 6.5, 6.6 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 19-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 47 % | Air Pressure: 1015 hPa | Power: 3.6 VDC |
| Remarks: | | | |


Plot 7.1.10 Radiated emission measurements at the low fundamental frequency with GFSK 50 kbps

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal

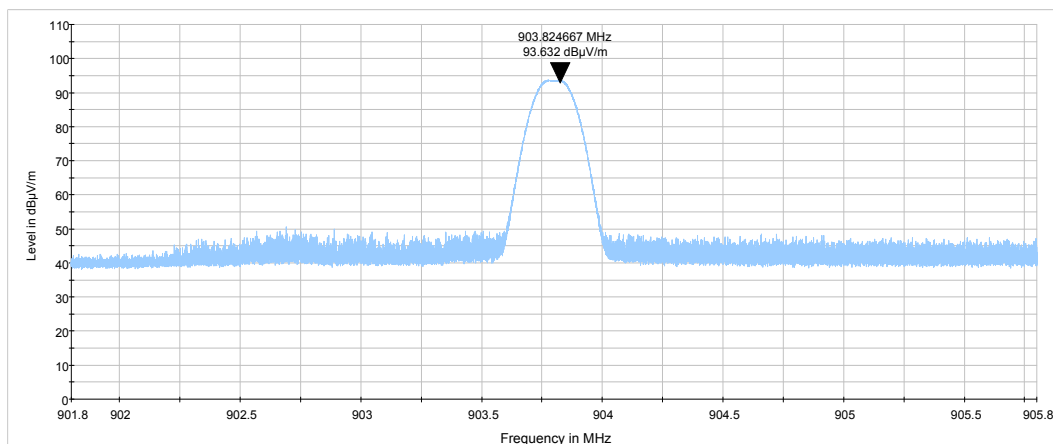

Plot 7.1.11 Radiated emission measurements at the mid fundamental frequency with GFSK 50 kbps


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal

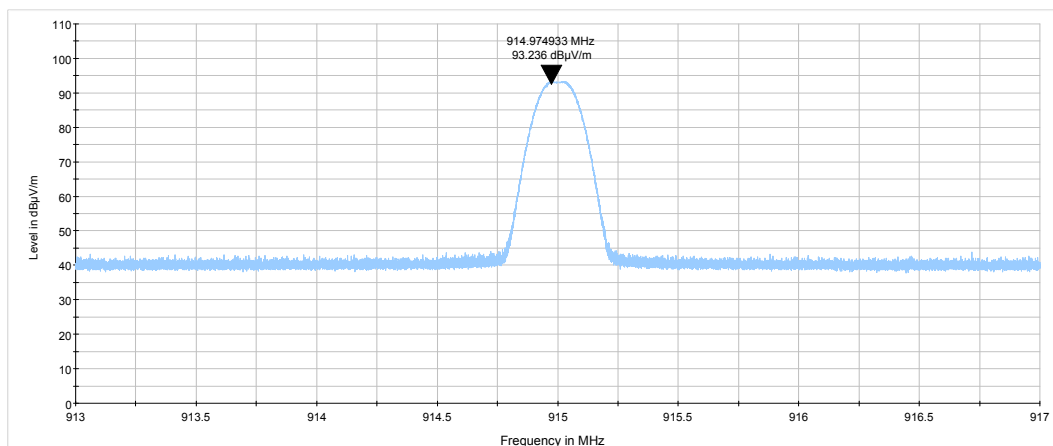

| | | | |
|--|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(a)(d)/RSS-210, section B.10, Field strength of emissions | | | |
| Test procedure: ANSI C63.10, Section 6.5, 6.6 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 19-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 47 % | Air Pressure: 1015 hPa | Power: 3.6 VDC |
| Remarks: | | | |


Plot 7.1.12 Radiated emission measurements at the high fundamental frequency with GFSK 50 kbps

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal

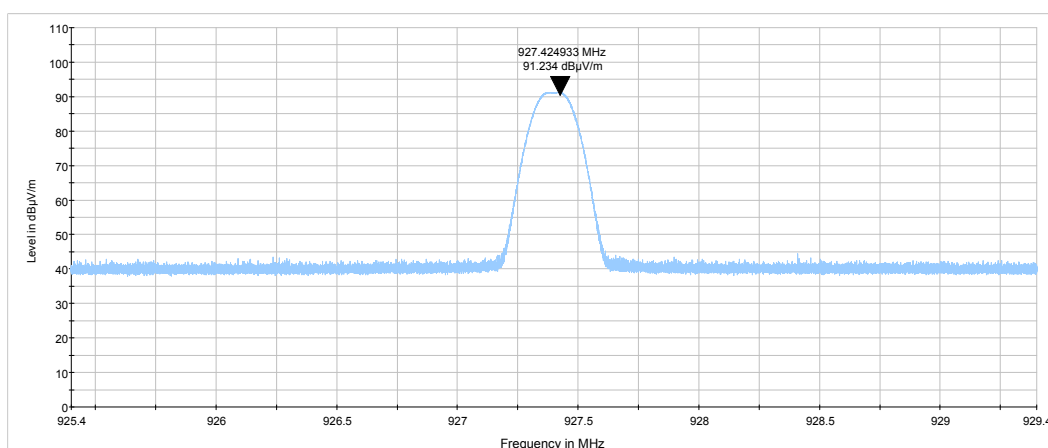

Plot 7.1.13 Radiated emission measurements from 9 kHz to 30 MHz at the low carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

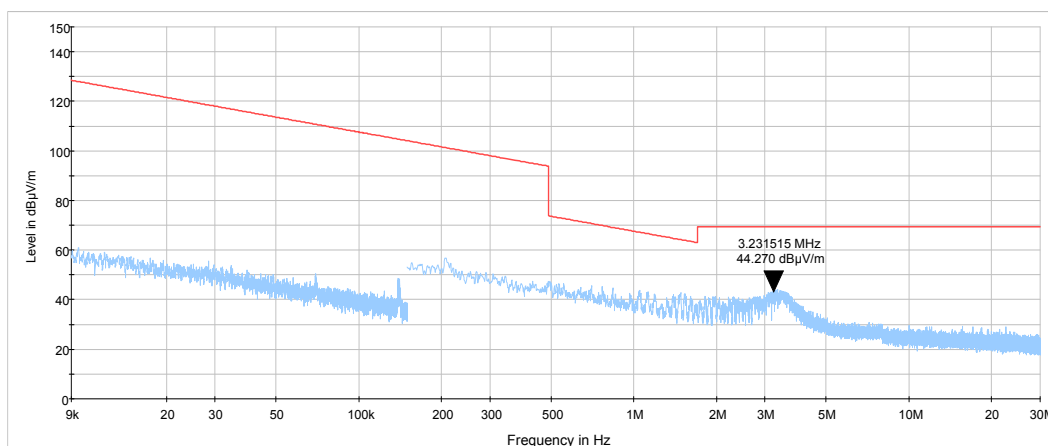

| | | | |
|--|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(a)(d)/RSS-210, section B.10, Field strength of emissions | | | |
| Test procedure: ANSI C63.10, Section 6.5, 6.6 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 19-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 47 % | Air Pressure: 1015 hPa | Power: 3.6 VDC |
| Remarks: | | | |


Plot 7.1.14 Radiated emission measurements from 9 kHz to 30 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

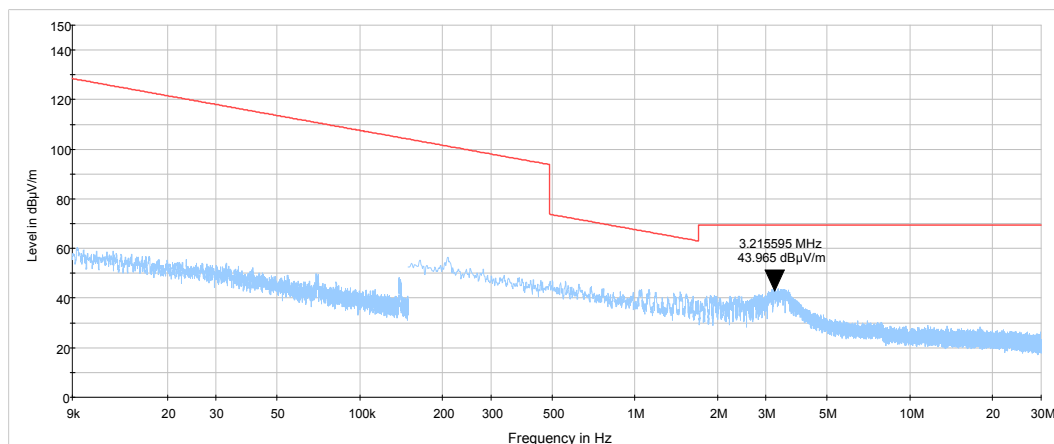

Plot 7.1.15 Radiated emission measurements from 9 kHz to 30 MHz at the high carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

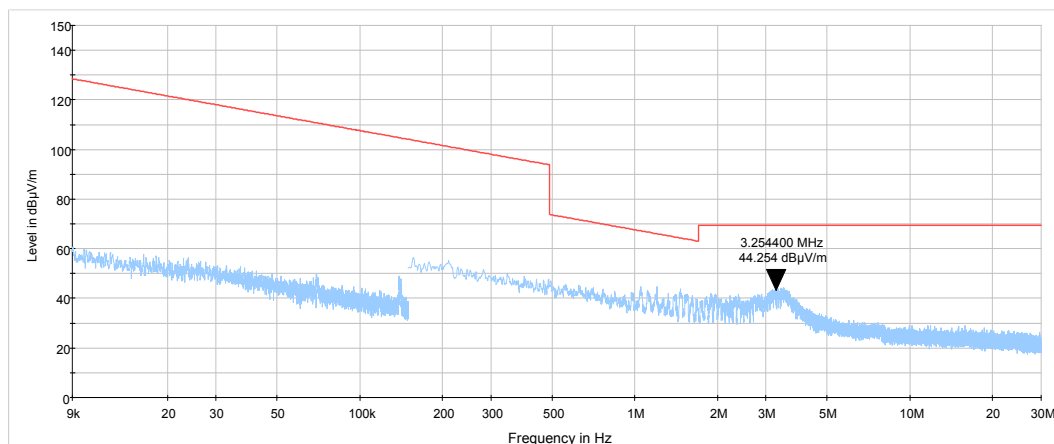

| | | | |
|--|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(a)(d)/RSS-210, section B.10, Field strength of emissions | | | |
| Test procedure: ANSI C63.10, Section 6.5, 6.6 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 19-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 47 % | Air Pressure: 1015 hPa | Power: 3.6 VDC |
| Remarks: | | | |


Plot 7.1.16 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

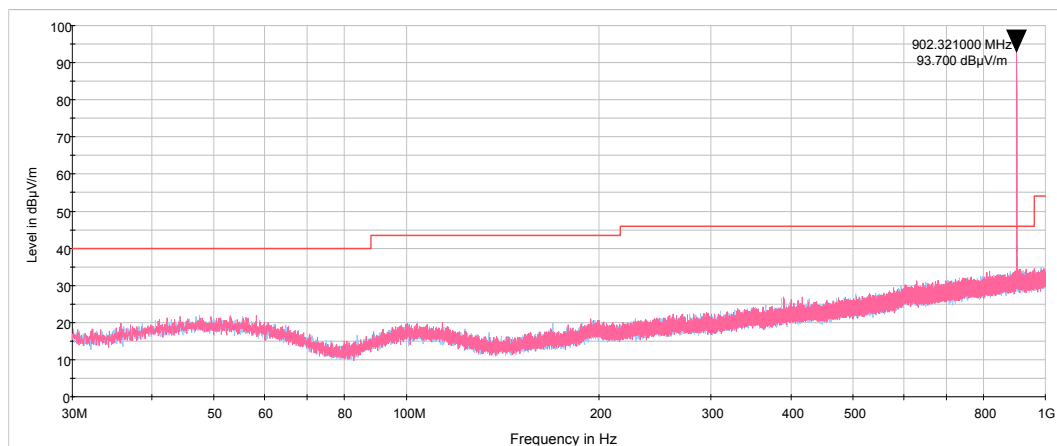

Plot 7.1.17 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

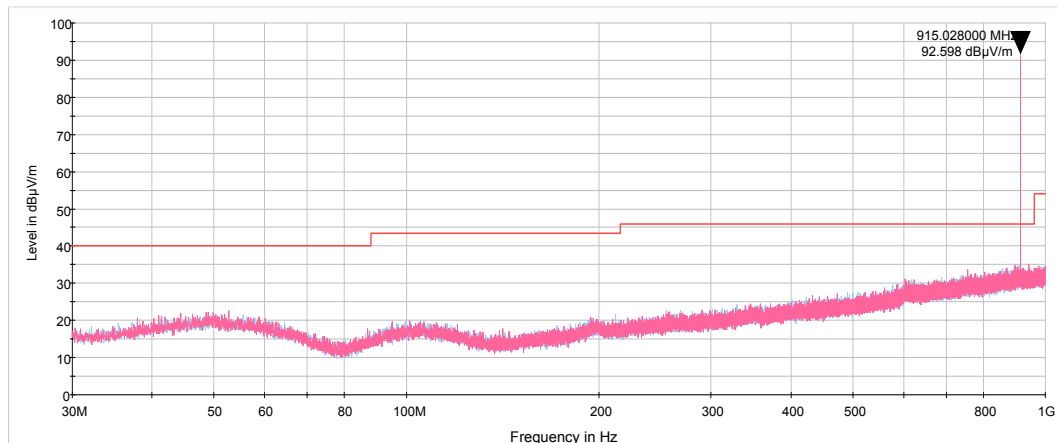




HERMON LABORATORIES

| | | | |
|--|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(a)(d)/RSS-210, section B.10, Field strength of emissions | | | |
| Test procedure: ANSI C63.10, Section 6.5, 6.6 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 19-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 47 % | Air Pressure: 1015 hPa | Power: 3.6 VDC |
| Remarks: | | | |


Plot 7.1.18 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

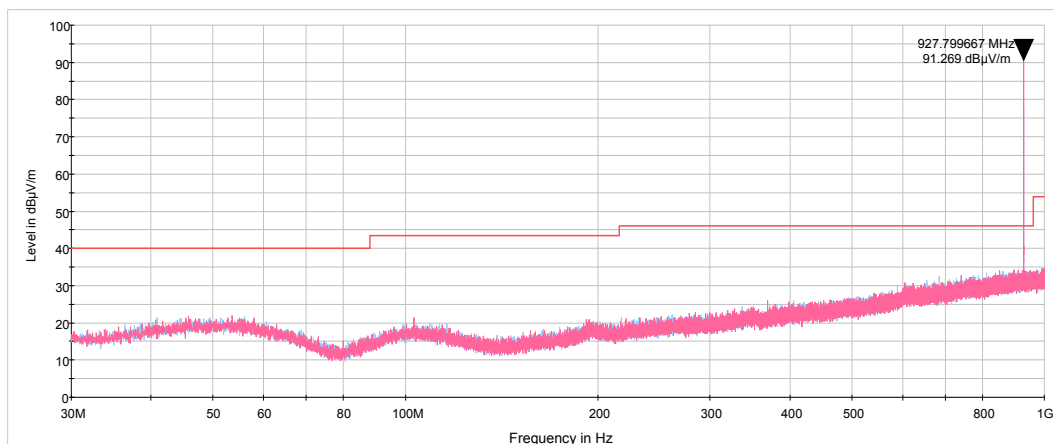

Plot 7.1.19 Radiated emission measurements from 1 – 9.5 GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

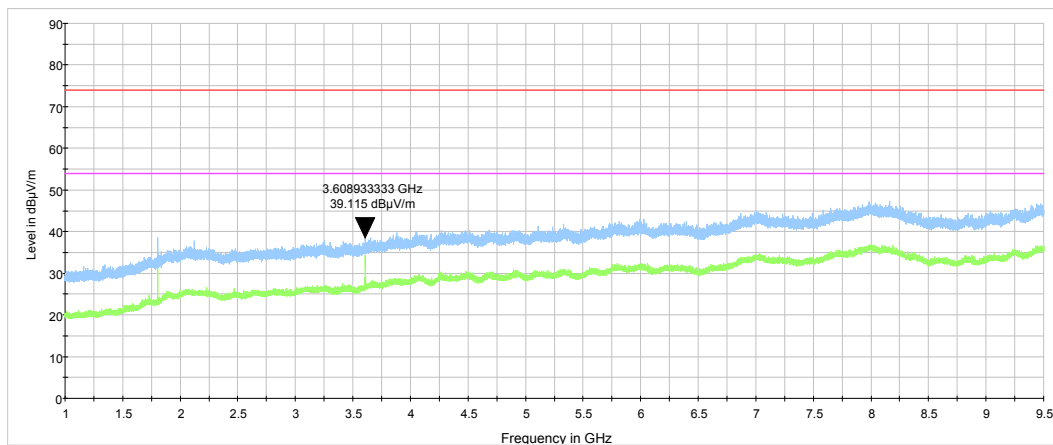




HERMON LABORATORIES

| | | | |
|--|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(a)(d)/RSS-210, section B.10, Field strength of emissions | | | |
| Test procedure: ANSI C63.10, Section 6.5, 6.6 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 19-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 47 % | Air Pressure: 1015 hPa | Power: 3.6 VDC |
| Remarks: | | | |


Plot 7.1.20 Radiated emission measurements from 1 – 9.5 GHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

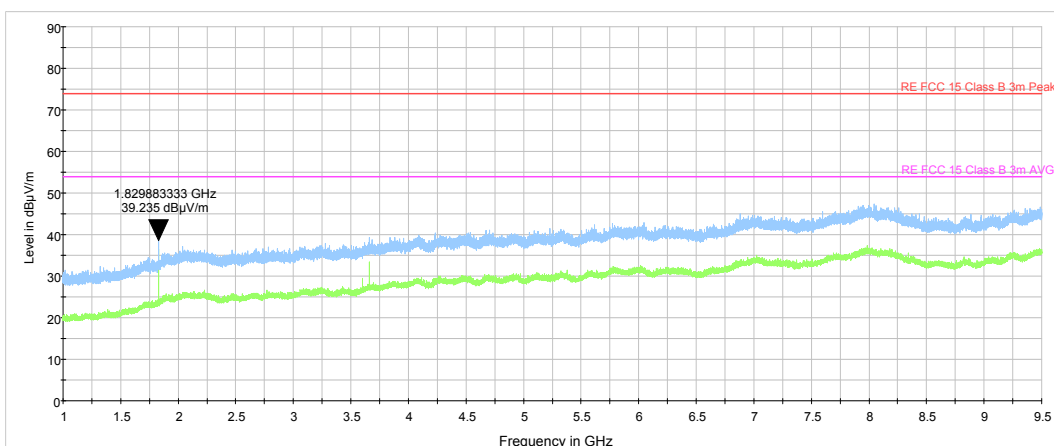

Plot 7.1.21 Radiated emission measurements from 1 – 9.5 GHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

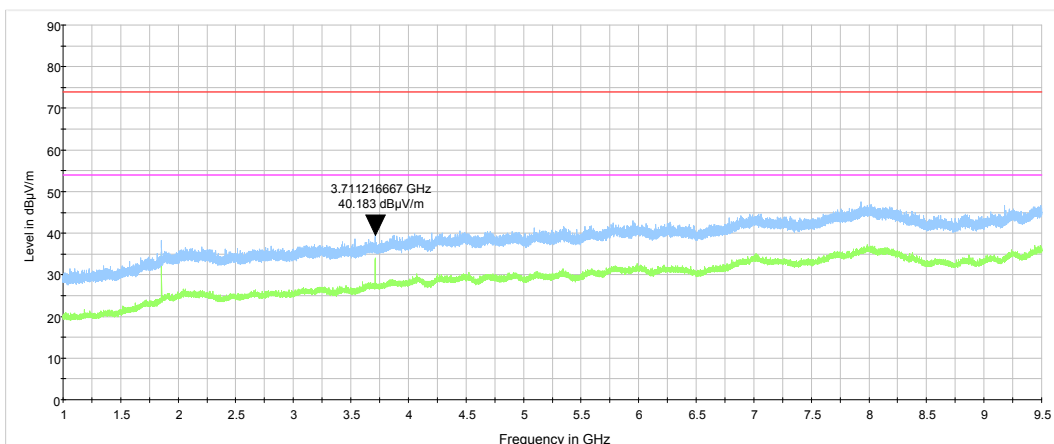

| | | | |
|---|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.215(c), Occupied bandwidth | | | |
| Test procedure: ANSI C63.10, Section 6.9.2 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 30-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 45 % | Air Pressure: 1009 hPa | Power: 3.6 VDC |
| Remarks: | | | |

7.2 Occupied bandwidth test

7.2.1 General

This test was performed to verify that the 20 dB bandwidth of the emissions was contained within the standard specified frequency band according to FCC §15.215 requirements. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Occupied bandwidth limits FCC 15.249

| Assigned frequency, MHz | Modulation envelope reference points*, dBc |
|-------------------------|--|
| 902 - 928 | 20.0 |
| 2400 – 2483.5 | |
| 5725 – 5875 | |
| 24000 – 24250 | |

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

Table 7.2.2 Occupied bandwidth limits RSS-210

| Assigned frequency, MHz | Modulation envelope reference points*, % |
|-------------------------|--|
| 902 - 928 | 99 |
| 2400 – 2483.5 | |
| 5725 – 5875 | |
| 24000 – 24250 | |

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The spectrum analyzer sweep time and bandwidth were set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.

7.2.2.3 The peak of emission was measured. The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.2.2 and associated plot.

Figure 7.2.1 Occupied bandwidth test setup





| | | | |
|---|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.215(c), Occupied bandwidth | | | |
| Test procedure: ANSI C63.10, Section 6.9.2 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 30-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 45 % | Air Pressure: 1009 hPa | Power: 3.6 VDC |
| Remarks: | | | |

Table 7.2.3 Occupied bandwidth test results RSS-210 & FCC 15.249

ASSIGNED FREQUENCY BAND: 902.0 – 928.0 MHz
 DETECTOR USED: Peak hold
 MODULATION: 2FSK
 BIT RATE: 9.6 kbps
 MODULATING SIGNAL: enable
 RESOLUTION BANDWIDTH: 1 kHz
 VIDEO BANDWIDTH: 3 kHz

| Carrier frequency, MHz | 99% Occupied bandwidth, kHz | 20 dBc OBW, kHz | Verdict |
|------------------------|-----------------------------|-----------------|---------|
| 902.3 | 21.149 | 21.967 | Pass |
| 915.0 | 21.204 | 22.221 | Pass |
| 927.8 | 20.990 | 21.983 | Pass |

MODULATION: 2FSK
 BIT RATE: 19.2 kbps
 MODULATING SIGNAL: enable
 RESOLUTION BANDWIDTH: 1 kHz
 VIDEO BANDWIDTH: 3 kHz

| Carrier frequency, MHz | 99% Occupied bandwidth, kHz | 20 dBc OBW, kHz | Verdict |
|------------------------|-----------------------------|-----------------|---------|
| 902.4 | 42.244 | 41.975 | Pass |
| 915.0 | 42.312 | 42.628 | Pass |
| 927.6 | 42.112 | 41.984 | Pass |

MODULATION: 2FSK
 BIT RATE: 38.4 kbps
 MODULATING SIGNAL: enable
 RESOLUTION BANDWIDTH: 3 kHz
 VIDEO BANDWIDTH: 10 kHz

| Carrier frequency, MHz | 99% Occupied bandwidth, kHz | 20 dBc OBW, kHz | Verdict |
|------------------------|-----------------------------|-----------------|---------|
| 902.4 | 85.483 | 88.105 | Pass |
| 915.0 | 85.450 | 87.815 | Pass |
| 927.6 | 84.713 | 87.203 | Pass |



HERMON LABORATORIES

| | | | |
|---|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.215(c), Occupied bandwidth | | | |
| Test procedure: ANSI C63.10, Section 6.9.2 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 30-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 45 % | Air Pressure: 1009 hPa | Power: 3.6 VDC |
| Remarks: | | | |


MODULATION: GFSK
 BIT RATE: 50.0 kbps
 MODULATING SIGNAL: enable
 RESOLUTION BANDWIDTH: 3 kHz
 VIDEO BANDWIDTH: 10 kHz

| Carrier frequency, MHz | 99% Occupied bandwidth, kHz | 20 dBc OBW, kHz | Verdict |
|------------------------|-----------------------------|-----------------|---------|
| 903.8 | 85.517 | 90.719 | Pass |
| 915.0 | 85.797 | 89.664 | Pass |
| 927.4 | 84.861 | 90.398 | Pass |

Reference numbers of test equipment used


| | | | | | | | | |
|---------|---------|---------|--|--|--|--|--|--|
| HL 0337 | HL 2909 | HL 4136 | | | | | | |
|---------|---------|---------|--|--|--|--|--|--|

Full description is given in Appendix A.

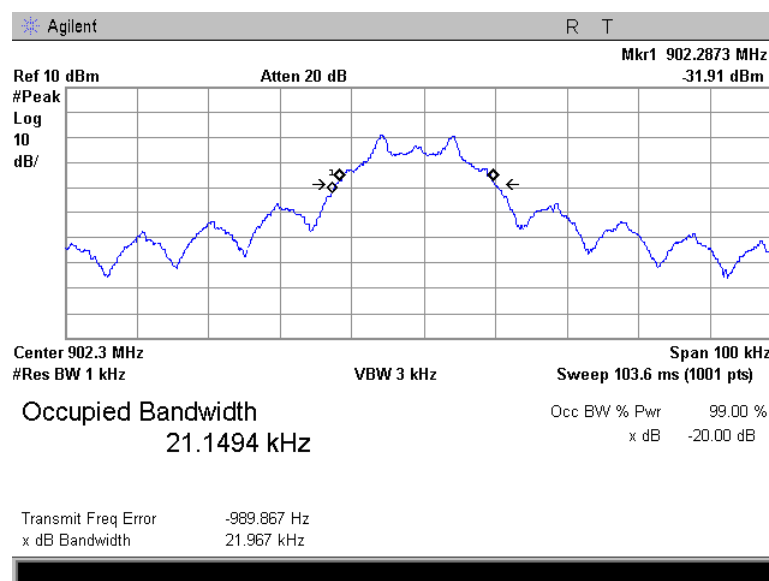
Plot 7.2.1 The 20 dB bandwidth test result at low frequency with 2FSK 9.6 kbps

| | | | |
|--|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.215(c), Occupied bandwidth | | | |
| Test procedure: ANSI C63.10, Section 6.9.2 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 30-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 45 % | Air Pressure: 1009 hPa | Power: 3.6 VDC |
| Remarks: | | | |

Plot 7.2.2 The 20 dB bandwidth test result at low frequency with 2FSK 19.2 kbps

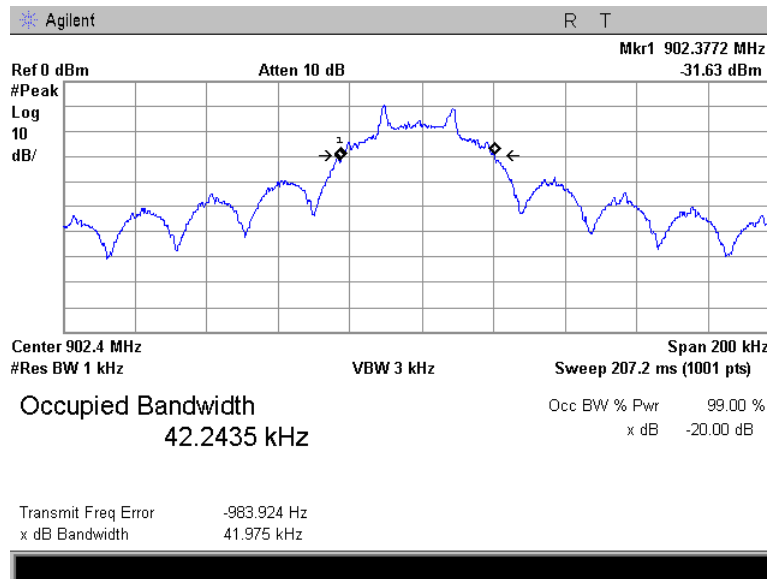

Plot 7.2.3 The 20 dB bandwidth test result at low frequency with 2FSK 38.4 kbps

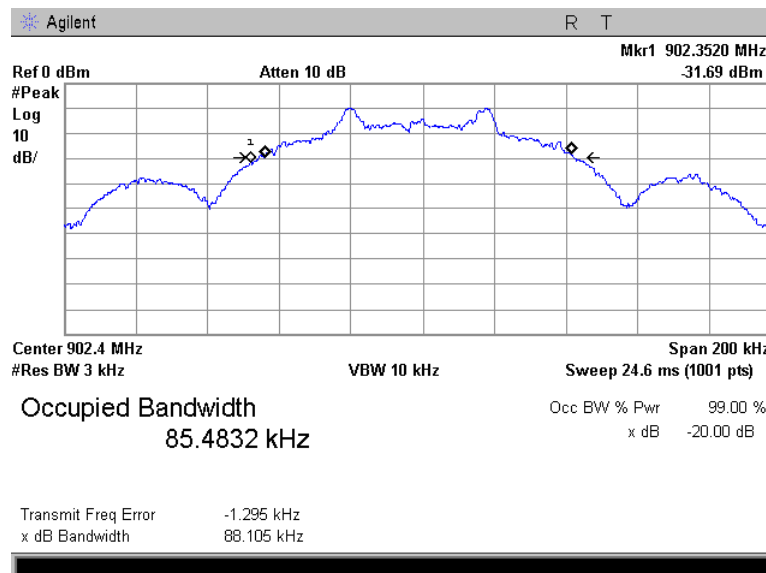





HERMON LABORATORIES

| | | | |
|---|-------------------------|------------------------|----------------|
| Test specification: Section 15.215(c), Occupied bandwidth | | | |
| Test procedure: ANSI C63.10, Section 6.9.2 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 30-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 45 % | Air Pressure: 1009 hPa | Power: 3.6 VDC |
| Remarks: | | | |

Plot 7.2.4 The 20 dB bandwidth test result at low frequency with QPSK 50.0 kbps

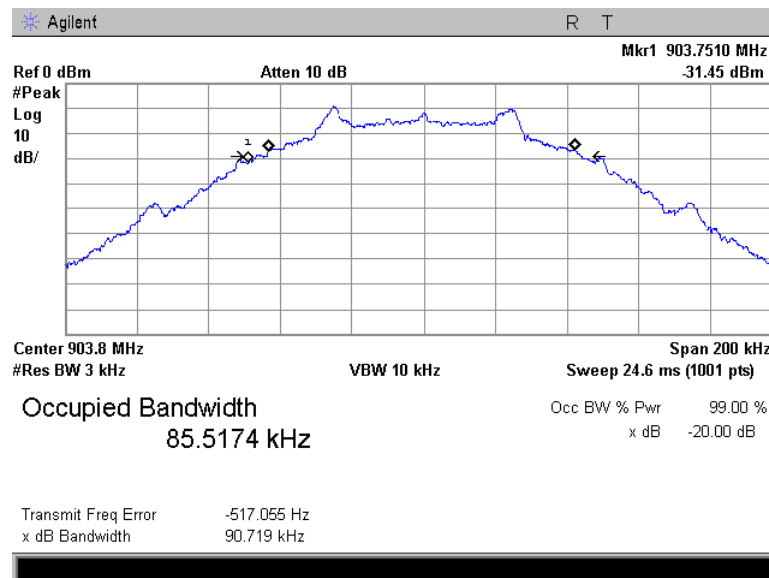


Plot 7.2.5 The 20 dB bandwidth test result at mid frequency with 2FSK 9.6 kbps

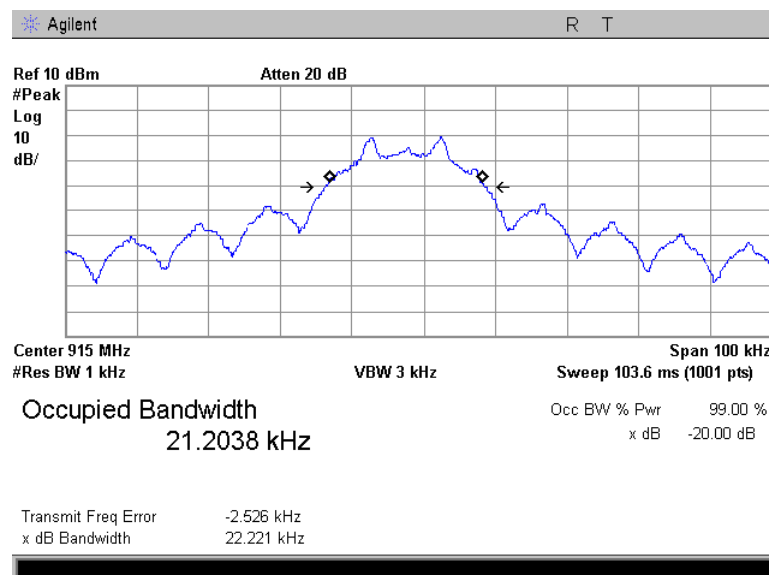


| | | | |
|---|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.215(c), Occupied bandwidth | | | |
| Test procedure: ANSI C63.10, Section 6.9.2 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 30-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 45 % | Air Pressure: 1009 hPa | Power: 3.6 VDC |
| Remarks: | | | |

Plot 7.2.6 The 20 dB bandwidth test result at mid frequency with 2FSK 19.2 kbps

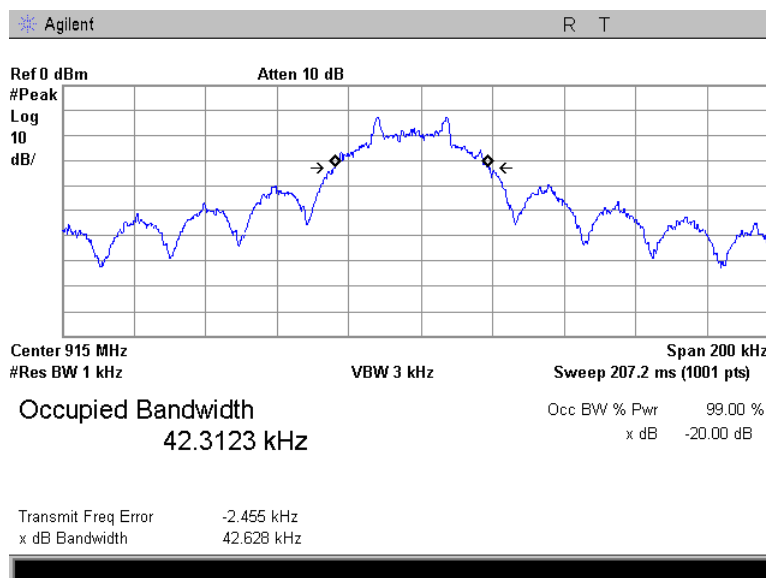

Plot 7.2.7 The 20 dB bandwidth test result at mid frequency with 2FSK 38.4 kbps

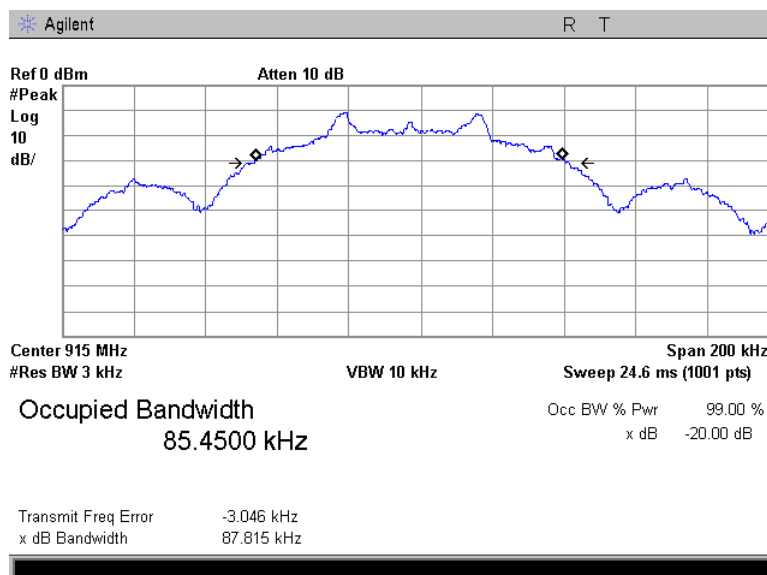





HERMON LABORATORIES

| | | | |
|---|-------------------------|------------------------|----------------|
| Test specification: Section 15.215(c), Occupied bandwidth | | | |
| Test procedure: ANSI C63.10, Section 6.9.2 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 30-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 45 % | Air Pressure: 1009 hPa | Power: 3.6 VDC |
| Remarks: | | | |

Plot 7.2.8 The 20 dB bandwidth test result at mid frequency with QPSK 50.0 kbps

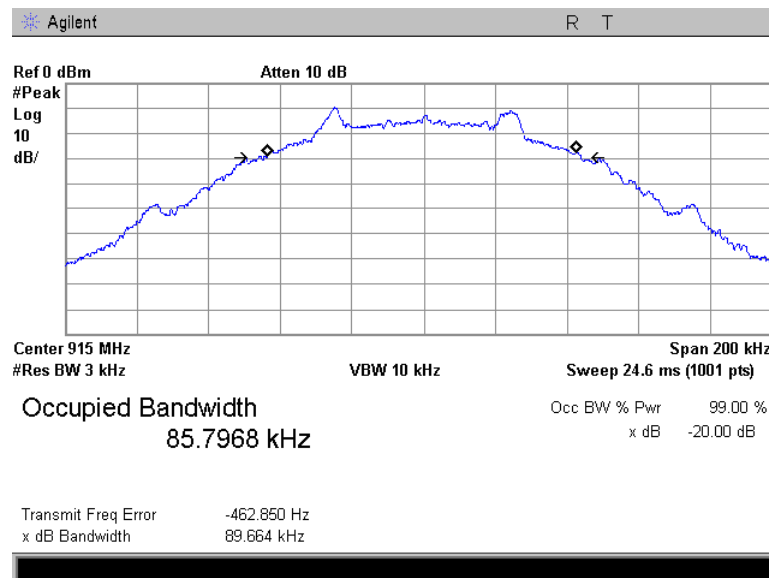

Plot 7.2.9 The 20 dB bandwidth test result at high frequency with 2FSK 9.6 kbps

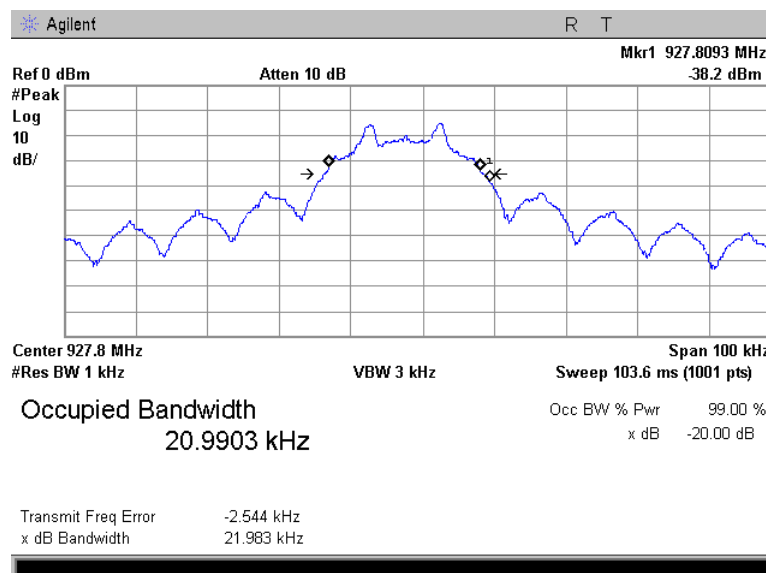





HERMON LABORATORIES

| | | | |
|---|-------------------------|------------------------|----------------|
| Test specification: Section 15.215(c), Occupied bandwidth | | | |
| Test procedure: ANSI C63.10, Section 6.9.2 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 30-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 45 % | Air Pressure: 1009 hPa | Power: 3.6 VDC |
| Remarks: | | | |

Plot 7.2.10 The 20 dB bandwidth test result at high frequency with 2FSK 19.2 kbps

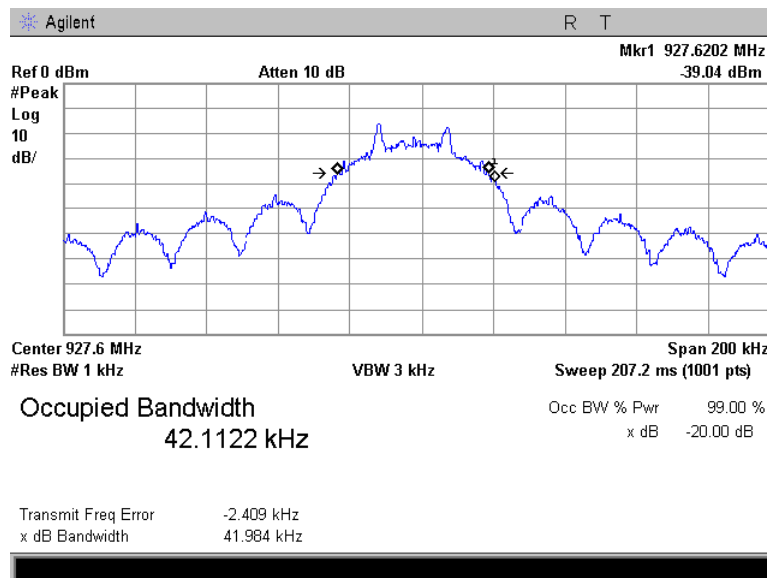

Plot 7.2.11 The 20 dB bandwidth test result at high frequency with 2FSK 38.4 kbps

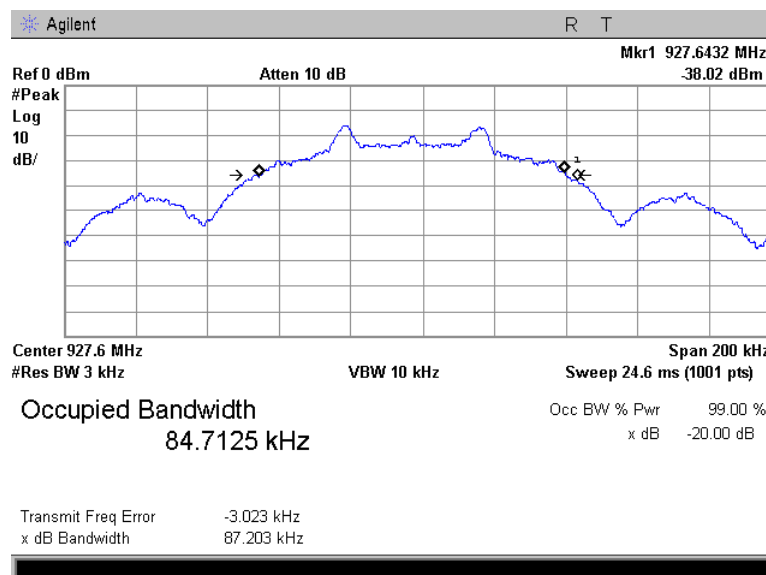




HERMON LABORATORIES

| | | | |
|---|-------------------------|------------------------|----------------|
| Test specification: Section 15.215(c), Occupied bandwidth | | | |
| Test procedure: ANSI C63.10, Section 6.9.2 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 30-May-19 | | | |
| Temperature: 26 °C | Relative Humidity: 45 % | Air Pressure: 1009 hPa | Power: 3.6 VDC |
| Remarks: | | | |

Plot 7.2.12 The 20 dB bandwidth test result at high frequency with QPSK 50.0 kbps

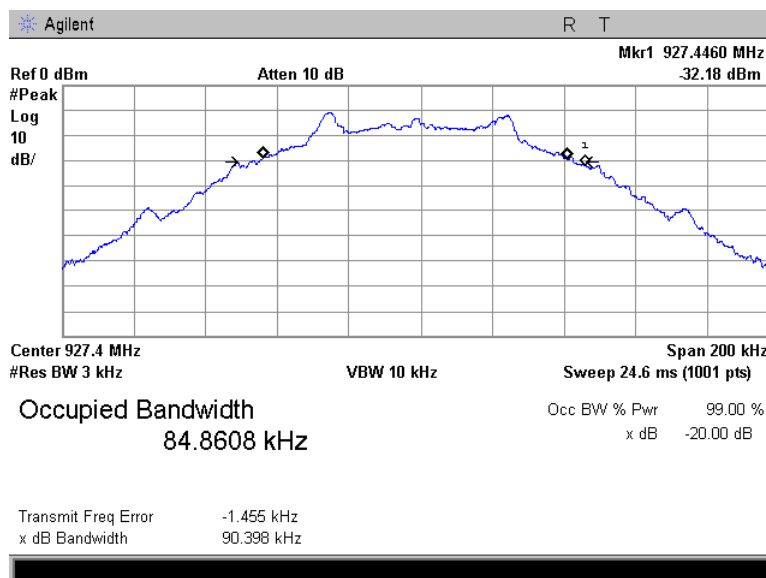

| | | | |
|--|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(d)/RSS-210, section C.4, Band edge emissions | | | |
| Test procedure: ANSI C63.10, Section 6.10 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 28-May-19 | | | |
| Temperature: 24 °C | Relative Humidity: 48 % | Air Pressure: 1012 hPa | Power: 3.6 VDC |
| Remarks: | | | |

7.3 Band edge emission

7.3.1 General

This test was performed to verify the EUT band edge emission including all associated side bands was attenuated at least 50 dB below the unmodulated carrier level or below the general spurious emission limit. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Band edge emission limits

| Frequency band, MHz | Field strength limit at 3 m, dBμV/m | | Attenuation below carrier, dBc |
|---------------------|-------------------------------------|------|--------------------------------|
| | Peak | QP | |
| 902.000 - 928.000 | NA | 46.0 | 50 |

7.3.2 Test procedure


7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.

7.3.2.2 The spectrum analyzer frequency span was set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.

7.3.2.3 The frequency of modulation envelope points beyond which power level drops below the band edge emission limit was measured.

7.3.2.4 The test results were recorded in Table 7.3.2 and shown in the associated plots.

Figure 7.3.1 Band edge emission measurement set up

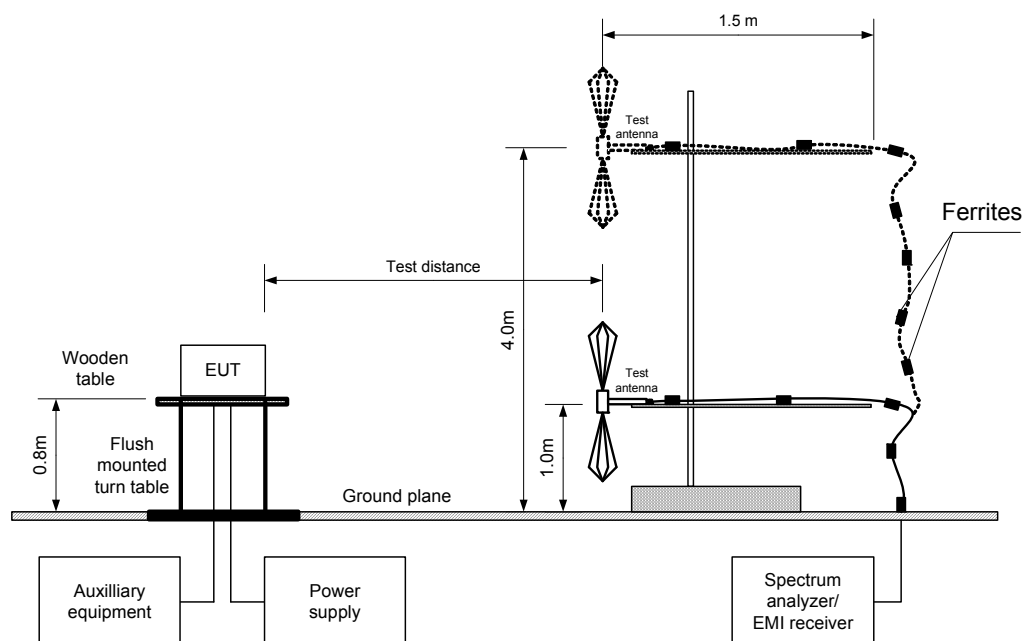



| | | | |
|---|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(d)/RSS-210, section C.4, Band edge emissions | | | |
| Test procedure: ANSI C63.10, Section 6.10 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 28-May-19 | | | |
| Temperature: 24 °C | Relative Humidity: 48 % | Air Pressure: 1012 hPa | Power: 3.6 VDC |
| Remarks: | | | |

Table 7.3.2 Band edge emission test results

OPERATING FREQUENCY RANGE: 902.0 – 928.0 MHz
 DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

MODULATION: 2FSK
 BIT RATE: 9.6 kbps
 LOW CARRIER FREQUENCY: 902.3 MHz
 HIGH CARRIER FREQUENCY: 927.8 MHz

| Modulation envelope | | Measured peak emission, dBµV/m | Measured QP emission, dBµV/m | QP limit, dBµV/m | Margin, dB * | Verdict |
|---------------------|----------------|--------------------------------|------------------------------|------------------|--------------|---------|
| Edge | Frequency, MHz | | | | | |
| Low | 896.990 | 36.57 | 32.12 | 46.0 | -13.88 | Pass |
| | 901.990 | 46.70 | 39.91 | 46.0 | -6.09 | |
| High | 928.003 | 51.23 | 44.67 | 46.0 | -1.33 | Pass |

MODULATION: 2FSK
 BIT RATE: 38.4 kbps
 LOW CARRIER FREQUENCY: 902.4 MHz
 HIGH CARRIER FREQUENCY: 927.6 MHz

| Modulation envelope | | Measured peak emission, dBµV/m | Measured QP emission, dBµV/m | QP limit, dBµV/m | Margin, dB * | Verdict |
|---------------------|----------------|--------------------------------|------------------------------|------------------|--------------|---------|
| Edge | Frequency, MHz | | | | | |
| Low | 901.996 | 47.26 | 42.34 | 46.0 | -3.66 | Pass |
| High | 928.007 | 44.80 | 39.31 | 46.0 | -6.69 | Pass |

MODULATION: GFSK
 BIT RATE: 50 kbps
 LOW CARRIER FREQUENCY: 903.8 MHz
 HIGH CARRIER FREQUENCY: 927.4 MHz

| Modulation envelope | | Measured peak emission, dBµV/m | Measured QP emission, dBµV/m | QP limit, dBµV/m | Margin, dB * | Verdict |
|---------------------|----------------|--------------------------------|------------------------------|------------------|--------------|---------|
| Edge | Frequency, MHz | | | | | |
| Low | 896.998 | 37.43 | 33.33 | 46.0 | -12.67 | Pass |
| High | 928.082 | 36.82 | 30.10 | 46.0 | -15.90 | Pass |

* - Margin = measured value – limit

The test shows compliance with 15.249(d) requirements.

Reference numbers of test equipment used


| | | | | | | |
|---------|---------|---------|---------|--|--|--|
| HL 3903 | HL 4360 | HL 5288 | HL 5405 | | | |
|---------|---------|---------|---------|--|--|--|

Full description is given in Appendix A.

| | | | |
|---|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(d)/RSS-210, section C.4, Band edge emissions | | | |
| Test procedure: ANSI C63.10, Section 6.10 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 28-May-19 | | | |
| Temperature: 24 °C | Relative Humidity: 48 % | Air Pressure: 1012 hPa | Power: 3.6 VDC |
| Remarks: | | | |


Plot 7.3.1 Low band edge emission test result

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
MODULATION: 2FSK
BIT RATE: 9.6 kbps

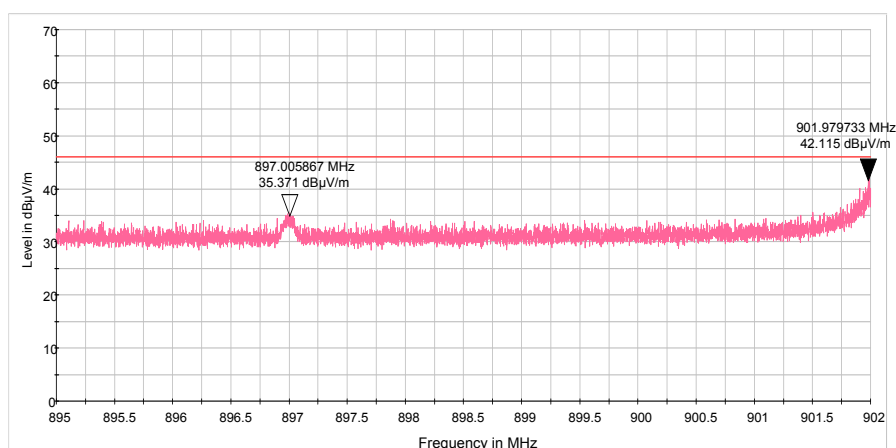

Plot 7.3.2 High band edge emission test result


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
MODULATION: 2FSK
BIT RATE: 9.6 kbps

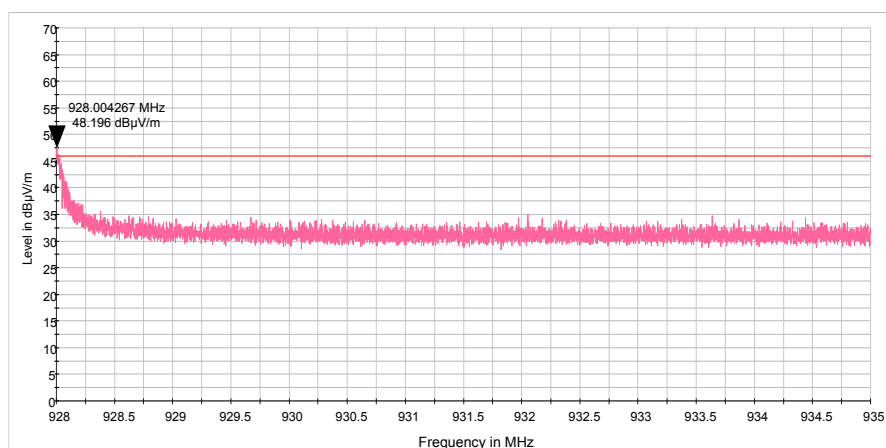

| | | | |
|--|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(d)/RSS-210, section C.4, Band edge emissions | | | |
| Test procedure: ANSI C63.10, Section 6.10 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 28-May-19 | | | |
| Temperature: 24 °C | Relative Humidity: 48 % | Air Pressure: 1012 hPa | Power: 3.6 VDC |
| Remarks: | | | |


Plot 7.3.3 Low band edge emission test result

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
MODULATION: 2FSK
BIT RATE: 38.4 kbps

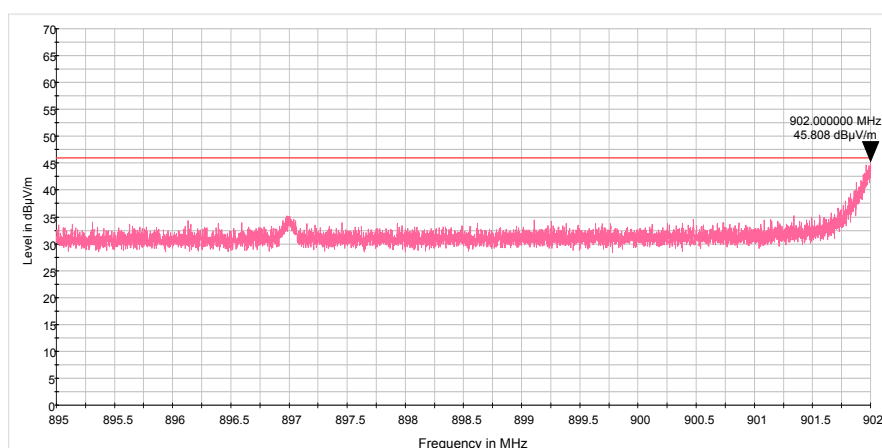

Plot 7.3.4 High band edge emission test result


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
MODULATION: 2FSK
BIT RATE: 38.4 kbps

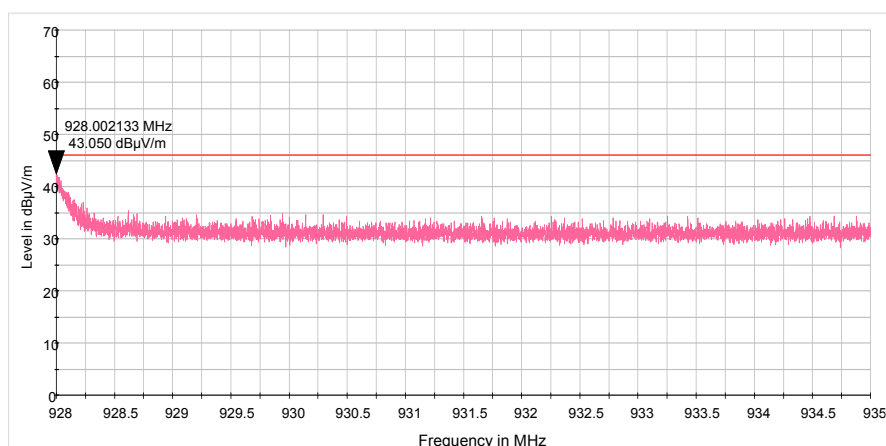

| | | | |
|--|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.249(d)/RSS-210, section C.4, Band edge emissions | | | |
| Test procedure: ANSI C63.10, Section 6.10 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 28-May-19 | | | |
| Temperature: 24 °C | Relative Humidity: 48 % | Air Pressure: 1012 hPa | Power: 3.6 VDC |
| Remarks: | | | |


Plot 7.3.5 Low band edge emission test result

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
MODULATION: GFSK
BIT RATE: 50 kbps

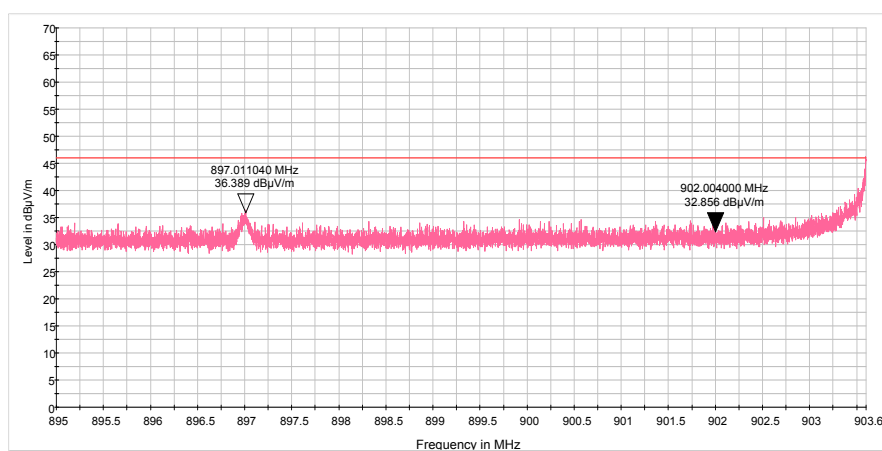

Plot 7.3.6 High band edge emission test result

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
MODULATION: GFSK
BIT RATE: 50 kbps

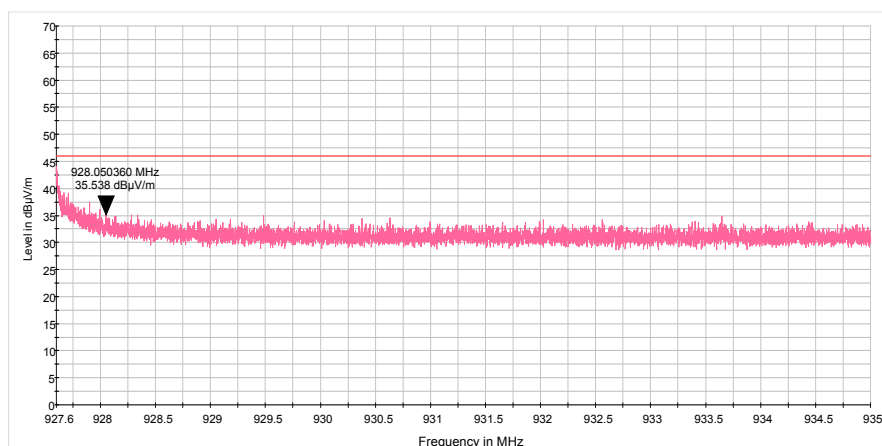



| | | | |
|---|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.203, Antenna requirement | | | |
| Test procedure: Visual inspection / supplier declaration | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 10-Jun-19 | | | |
| Temperature: 25 °C | Relative Humidity: 46 % | Air Pressure: 1008 hPa | Power: 3.6 VDC |
| Remarks: | | | |

7.4 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.4.1

Table 7.4.1 Antenna requirements

| Requirement | Rationale | Verdict |
|--|-------------------|---------|
| The transmitter antenna is permanently attached | Visual inspection | Comply |
| The transmitter employs a unique antenna connector | NA | |
| The transmitter requires professional installation | NA | |

| | | | |
|---|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.109 / RSS-Gen, section 7.3, ICES-003, Radiated emission | | | |
| Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 10-Jun-19 | | | |
| Temperature: 25 °C | Relative Humidity: 46 % | Air Pressure: 1008 hPa | Power: 3.6 VDC |
| Remarks: | | | |

8 Unintentional emission tests

8.1 Radiated emission measurements

8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1.

Table 8.1.1 Radiated emission test limits

| Frequency, MHz | Class B limit, dB(μV/m) | | Class A limit, dB(μV/m) | |
|----------------|-------------------------|--------------|-------------------------|--------------|
| | 10 m distance | 3 m distance | 10 m distance | 3 m distance |
| 30 - 88 | 29.5* | 40.0 | 39.0 | 49.5* |
| 88 - 216 | 33.0* | 43.5 | 43.5 | 54.0* |
| 216 - 960 | 35.5* | 46.0 | 46.4 | 56.9* |
| Above 960 | 43.5* | 54.0 | 49.5 | 60.0* |

* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S2} = \text{Lim}_{S1} + 20 \log(S1/S2)$, where $S1$ and $S2$ – standard defined and test distance respectively in meters.


8.1.2 Test procedure for measurements in semi-anechoic chamber

8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photograph/s, energized and the performance check was conducted.

8.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

8.1.2.3 The worst test results (the lowest margins) were recorded in Table 8.1.2 and shown in the associated plots.

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

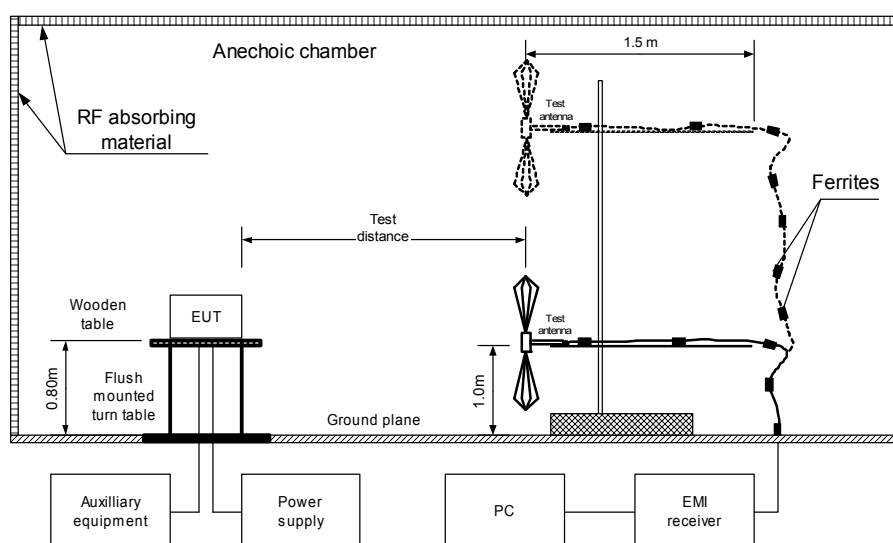



HERMON LABORATORIES

| | | | |
|--|-------------------------|------------------------|----------------|
| Test specification: Section 15.109 / RSS-Gen, section 7.3, ICES-003, Radiated emission | | | |
| Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 10-Jun-19 | | | |
| Temperature: 25 °C | Relative Humidity: 46 % | Air Pressure: 1008 hPa | Power: 3.6 VDC |
| Remarks: | | | |

Table 8.1.2 Radiated emission test results

EUT SET UP: TABLE-TOP
LIMIT: Class B
EUT OPERATING MODE: Receive
TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / QUASI-PEAK
FREQUENCY RANGE: 30 MHz – 1000 MHz
RESOLUTION BANDWIDTH: 120 kHz

| RECESSION BANDWIDTH: | | | | | 125 KHz | | | |
|------------------------|-------------------------------|-----------------------------------|--------------------|----------------|-------------------------|-------------------------|--------------------------------------|---------|
| Frequency, MHz | Peak emission, dB(μV/m) | Quasi-peak | | | Antenna polarization | Antenna height, m | Turn-table position**, degrees | Verdict |
| | | Measured emission, dB(μV/m) | Limit, dB(μV/m) | Margin, dB* | | | | |
| No emission were found | | | | | | | | Pass |

TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / AVERAGE
FREQUENCY RANGE: 1000 MHz – 5000 MHz
RESOLUTION BANDWIDTH: 1000 kHz

| Frequency, MHz | Peak | | | Average | | | Antenna polarization | Antenna height, m | Turn-table position**, degrees | Verdict |
|------------------------|-----------------------------------|--------------------|----------------|-----------------------------------|--------------------|----------------|-------------------------|-------------------------|--------------------------------------|---------|
| | Measured emission, dB(μV/m) | Limit, dB(μV/m) | Margin, dB* | Measured emission, dB(μV/m) | Limit, dB(μV/m) | Margin, dB* | | | | |
| No emission were found | | | | | | | | | | Pass |

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used


| | | | | | | | |
|---------|---------|---------|---------|---------|--|--|--|
| HL 3903 | HL 4360 | HL 4933 | HL 5288 | HL 5405 | | | |
|---------|---------|---------|---------|---------|--|--|--|

Full description is given in Appendix A.

| | | | |
|---|--------------------------------|-------------------------------|-----------------------|
| Test specification: Section 15.109 / RSS-Gen, section 7.3, ICES-003, Radiated emission | | | |
| Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4 | | | |
| Test mode: Compliance | | Verdict: PASS | |
| Date(s): 10-Jun-19 | | | |
| Temperature: 25 °C | Relative Humidity: 46 % | Air Pressure: 1008 hPa | Power: 3.6 VDC |
| Remarks: | | | |


Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range, vertical and horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

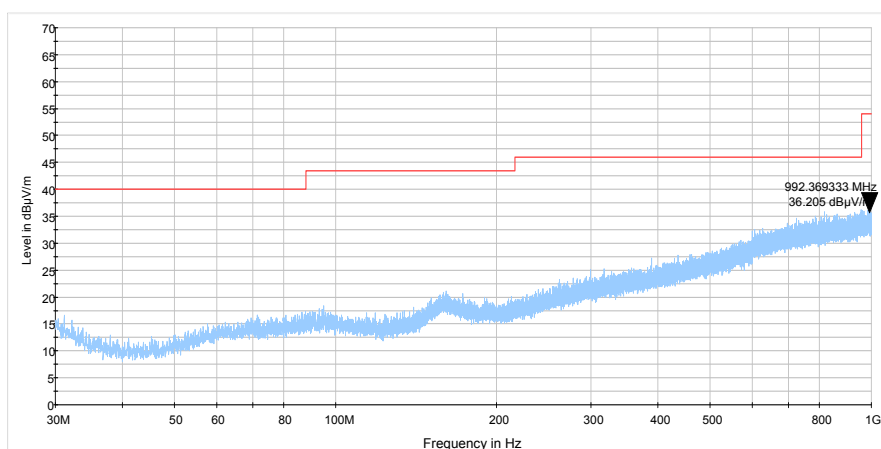

Plot 8.1.2 Radiated emission measurements in 1 - 5 GHz range, vertical and horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

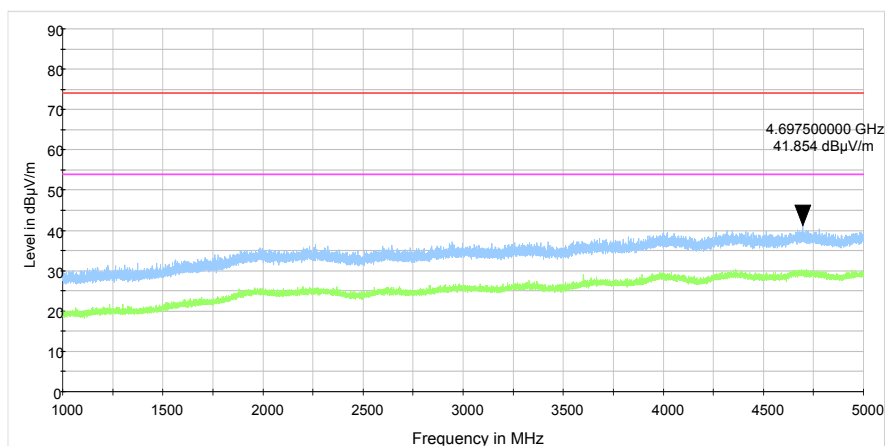

9 APPENDIX A Test equipment and ancillaries used for tests

| HL No | Description | Manufacturer | Model | Ser. No. | Last Cal./ Check | Due Cal./ Check |
|-------|--|-----------------------|----------------|--------------|------------------|-----------------|
| 0337 | Probe Set, Hand held, 5 probes | Electro-Metrics | EHFP-30 | 238 | 26-Jun-19 | 26-Jun-20 |
| 0446 | Antenna, Loop, Active, 10 (9) kHz - 30 MHz | EMCO | 6502 | 2857 | 24-Feb-19 | 24-Feb-20 |
| 2909 | Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz | Agilent Technologies | E4407B | MY414447 62 | 04-Apr-19 | 04-Apr-20 |
| 3903 | Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA | Huber-Suhner | SUCOFLEX 102A | 1226/2A | 07-Apr-19 | 07-Apr-20 |
| 4136 | Shield Box | TESCOM CO., LTD | TC-5916A | 5916A000 137 | 24-Apr-19 | 24-Apr-20 |
| 4360 | EMI Test Receiver, 20 Hz to 40 GHz. | Rohde & Schwarz | ESU40 | 100322 | 31-Dec-18 | 31-Dec-19 |
| 4933 | Active Horn Antenna, 1 GHz to 18 GHz | COM-POWER CORPORATION | AHA-118 | 701046 | 06-Jan-19 | 06-Jan-20 |
| 5288 | Trilog Antenna, 25 MHz - 8 GHz, 100W | Frankonia | ALX-8000E | 00809 | 08-Feb-19 | 08-Feb-22 |
| 5405 | RF cable, 18 GHz, N-N, 6 m | Huber-Suhner | SF118/11 N(x2) | 500023/11 8 | 11-Aug-19 | 11-Aug-20 |

10 APPENDIX B Test equipment correction factors

HL 0446: Active Loop Antenna
EMCO, model: 6502, s/n 2857

| Frequency, | Measured antenna factor, dBS/m | Measurement uncertainty, dB |
|------------|--------------------------------|-----------------------------|
| 10 | -33.4 | ±1.0 |
| 20 | -37.8 | ±1.0 |
| 50 | -40.5 | ±1.0 |
| 75 | -41.0 | ±1.0 |
| 100 | -41.2 | ±1.0 |
| 150 | -41.2 | ±1.0 |
| 250 | -41.1 | ±1.0 |
| 500 | -41.2 | ±1.0 |
| 750 | -41.3 | ±1.0 |
| 1000 | -41.3 | ±1.0 |

| Frequency, | Measured antenna factor, dBS/m | Measurement uncertainty, dB |
|------------|--------------------------------|-----------------------------|
| 2000 | -41.4 | ±1.0 |
| 3000 | -41.4 | ±1.0 |
| 4000 | -41.5 | ±1.0 |
| 5000 | -41.5 | ±1.0 |
| 10000 | -41.7 | ±1.0 |
| 15000 | -42.1 | ±1.0 |
| 20000 | -42.7 | ±1.0 |
| 25000 | -44.2 | ±1.0 |
| 30000 | -45.8 | ±1.0 |

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m

HL 4933: Active Horn Antenna
COM-POWER CORPORATION, model: AHA-118, s/n 701046

| Frequency, MHz | Measured antenna factor (with preamplifier), dB/m |
|----------------|---|
| 1000 | -16.1 |
| 1500 | -15.1 |
| 2000 | -10.9 |
| 2500 | -11.9 |
| 3000 | -11.1 |
| 3500 | -10.6 |
| 4000 | -8.6 |
| 4500 | -8.3 |
| 5000 | -5.9 |
| 5500 | -5.7 |
| 6000 | -3.3 |
| 6500 | -4.0 |
| 7000 | -2.2 |
| 7500 | -1.7 |
| 8000 | 1.1 |
| 8500 | -0.8 |
| 9000 | -1.5 |
| 9500 | -0.2 |

| Frequency, MHz | Measured antenna factor (with preamplifier), dB/m |
|----------------|---|
| 10000 | 1.8 |
| 10500 | 1.0 |
| 11000 | 0.3 |
| 11500 | -0.5 |
| 12000 | 3.1 |
| 12500 | 1.4 |
| 13000 | -0.3 |
| 13500 | -0.4 |
| 14000 | 2.5 |
| 14500 | 2.2 |
| 15000 | 1.9 |
| 15500 | 0.5 |
| 16000 | 2.1 |
| 16500 | 1.2 |
| 17000 | 0.6 |
| 17500 | 3.1 |
| 18000 | 4.2 |

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m

HL 5288: Trilog Antenna
Frankonia, model: ALX-8000E, s/n: 00809
30-1000 MHz

| Frequency, MHz | Antenna factor, dB/m |
|----------------|----------------------|
| 30 | 14.96 |
| 35 | 15.33 |
| 40 | 16.37 |
| 45 | 17.56 |
| 50 | 17.95 |
| 60 | 16.87 |
| 70 | 13.22 |
| 80 | 10.56 |
| 90 | 13.61 |
| 100 | 15.46 |
| 120 | 14.03 |
| 140 | 12.23 |

| Frequency, MHz | Antenna factor, dB/m |
|----------------|----------------------|
| 160 | 12.67 |
| 180 | 13.34 |
| 200 | 15.40 |
| 250 | 16.42 |
| 300 | 17.28 |
| 400 | 19.98 |
| 500 | 21.11 |
| 600 | 22.90 |
| 700 | 24.13 |
| 800 | 25.25 |
| 900 | 26.35 |
| 1000 | 27.18 |

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

above 1000 MHz

| Frequency, MHz | Antenna factor, dB/m |
|----------------|----------------------|
| 1000 | 26.9 |
| 1100 | 28.1 |
| 1200 | 28.4 |
| 1300 | 29.6 |
| 1400 | 29.1 |
| 1500 | 30.4 |
| 1600 | 30.7 |
| 1700 | 31.5 |
| 1800 | 32.3 |
| 1900 | 32.6 |
| 2000 | 32.5 |
| 2100 | 32.9 |
| 2200 | 33.5 |
| 2300 | 33.2 |
| 2400 | 33.7 |
| 2500 | 34.6 |
| 2600 | 34.7 |
| 2700 | 34.6 |
| 2800 | 35.0 |
| 2900 | 35.5 |
| 3000 | 36.2 |
| 3100 | 36.8 |
| 3200 | 36.8 |
| 3300 | 37.0 |
| 3400 | 37.5 |
| 3500 | 38.2 |

| Frequency, MHz | Antenna factor, dB/m |
|----------------|----------------------|
| 3600 | 38.9 |
| 3700 | 39.4 |
| 3800 | 39.4 |
| 3900 | 39.6 |
| 4000 | 39.7 |
| 4100 | 39.8 |
| 4200 | 40.5 |
| 4300 | 40.9 |
| 4400 | 41.1 |
| 4500 | 41.4 |
| 4600 | 41.3 |
| 4700 | 41.6 |
| 4800 | 41.9 |
| 4900 | 42.3 |
| 5000 | 42.7 |
| 5100 | 43.0 |
| 5200 | 42.9 |
| 5300 | 43.5 |
| 5400 | 43.6 |
| 5500 | 44.3 |
| 5600 | 44.7 |
| 5700 | 45.0 |
| 5800 | 45.0 |
| 5900 | 45.3 |
| 6000 | 45.9 |

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

HL 5405: RF Cable
Huber-Suhner, model: SF118/11N(x2), s/n: 500023/118
Calibration date: 01-Aug-2018

| Set / Applied, MHz | Measured, dB | Uncertainty, dB |
|-----------------------|-----------------|--------------------|
| 0.1 | 0.01 | ±0.07 |
| 50 | 0.23 | ±0.07 |
| 100 | 0.32 | ±0.07 |
| 200 | 0.45 | ±0.08 |
| 300 | 0.55 | ±0.08 |
| 400 | 0.64 | ±0.08 |
| 500 | 0.71 | ±0.08 |
| 600 | 0.78 | ±0.08 |
| 700 | 0.85 | ±0.08 |
| 800 | 0.91 | ±0.08 |
| 900 | 0.97 | ±0.08 |
| 1000 | 1.02 | ±0.08 |
| 1100 | 1.07 | ±0.08 |
| 1200 | 1.12 | ±0.08 |
| 1300 | 1.16 | ±0.08 |
| 1400 | 1.21 | ±0.08 |
| 1500 | 1.25 | ±0.08 |
| 1600 | 1.30 | ±0.08 |
| 1700 | 1.34 | ±0.08 |
| 1800 | 1.38 | ±0.08 |
| 1900 | 1.42 | ±0.08 |
| 2000 | 1.47 | ±0.08 |
| 2500 | 1.64 | ±0.10 |
| 3000 | 1.81 | ±0.10 |
| 3500 | 1.97 | ±0.10 |
| 4000 | 2.11 | ±0.10 |
| 4500 | 2.25 | ±0.10 |
| 5000 | 2.38 | ±0.10 |
| 5500 | 2.48 | ±0.10 |
| 6000 | 2.59 | ±0.10 |
| 6500 | 2.72 | ±0.10 |
| 7000 | 2.84 | ±0.13 |
| 7500 | 2.97 | ±0.13 |
| 8000 | 3.08 | ±0.13 |
| 8500 | 3.21 | ±0.13 |
| 9000 | 3.31 | ±0.13 |
| 9500 | 3.42 | ±0.13 |
| 10000 | 3.52 | ±0.13 |

11 APPENDIX C Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

| Test description | Expanded uncertainty |
|--|--|
| Radiated emissions at 10 m measuring distance Horizontal polarization | Biconilog antenna: ± 5.0 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.1 dB Double ridged horn antenna: ± 5.3 dB |
| Vertical polarization | Biconilog antenna: ± 5.5 dB Biconical antenna: ± 5.5 dB Log periodic antenna: ± 5.6 dB Double ridged horn antenna: ± 5.8 dB |
| Radiated emissions at 3 m measuring distance Horizontal polarization | Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB |
| Vertical polarization | Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB |
| Duty cycle, timing (Tx ON / OFF) and average factor measurements | ± 1.0 % |
| Occupied bandwidth | ± 8.0 % |

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

12 APPENDIX D Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for relevant parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; Recognized by Innovation, Science and Economic Development Canada for wireless and terminal testing (ISED), ISED #2186A, CAB identifier is IL1001; Certified by VCCI, Japan (the registration numbers are R-10808 for OATS, R-11082 for anechoic chamber, G-10869 for RE measurements above 1 GHz, C-10845 for conducted emissions site and T-11606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager

13 APPENDIX E

Specification references

47CFR part 15: 2018

ANSI C63.4:2014

ANSI C63.10:2013

RSS-210 Issue 9: 2016

RSS-Gen:2018, Issue 5

ICES-003:2016, Issue 6

Radio Frequency Devices.

American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

Licence-Exempt Radio Apparatus: Category I Equipment

General Requirements for Compliance of Radio Apparatus

Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement

14 APPENDIX F Abbreviations and acronyms

| | |
|----------------|---|
| A | ampere |
| AC | alternating current |
| A/m | ampere per meter |
| AM | amplitude modulation |
| AVRG | average (detector) |
| cm | centimeter |
| dB | decibel |
| dBm | decibel referred to one milliwatt |
| dB(μ V) | decibel referred to one microvolt |
| dB(μ V/m) | decibel referred to one microvolt per meter |
| dB(μ A) | decibel referred to one microampere |
| DC | direct current |
| EIRP | equivalent isotropically radiated power |
| ERP | effective radiated power |
| EUT | equipment under test |
| F | frequency |
| GHz | gigahertz |
| GND | ground |
| H | height |
| HL | Hermon laboratories |
| Hz | hertz |
| k | kilo |
| kHz | kilohertz |
| LO | local oscillator |
| m | meter |
| MHz | megahertz |
| min | minute |
| mm | millimeter |
| ms | millisecond |
| μ s | microsecond |
| NA | not applicable |
| NB | narrow band |
| OATS | open area test site |
| Ω | Ohm |
| PM | pulse modulation |
| PS | power supply |
| ppm | part per million (10^{-6}) |
| QP | quasi-peak |
| RE | radiated emission |
| RF | radio frequency |
| rms | root mean square |
| Rx | receive |
| s | second |
| T | temperature |
| Tx | transmit |
| V | volt |
| WB | wideband |

END OF DOCUMENT