



Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit - 802.11n-40BW\_15Mbps(5G Band)

| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5755                    | 36.81                              | >20                    | PASS   |

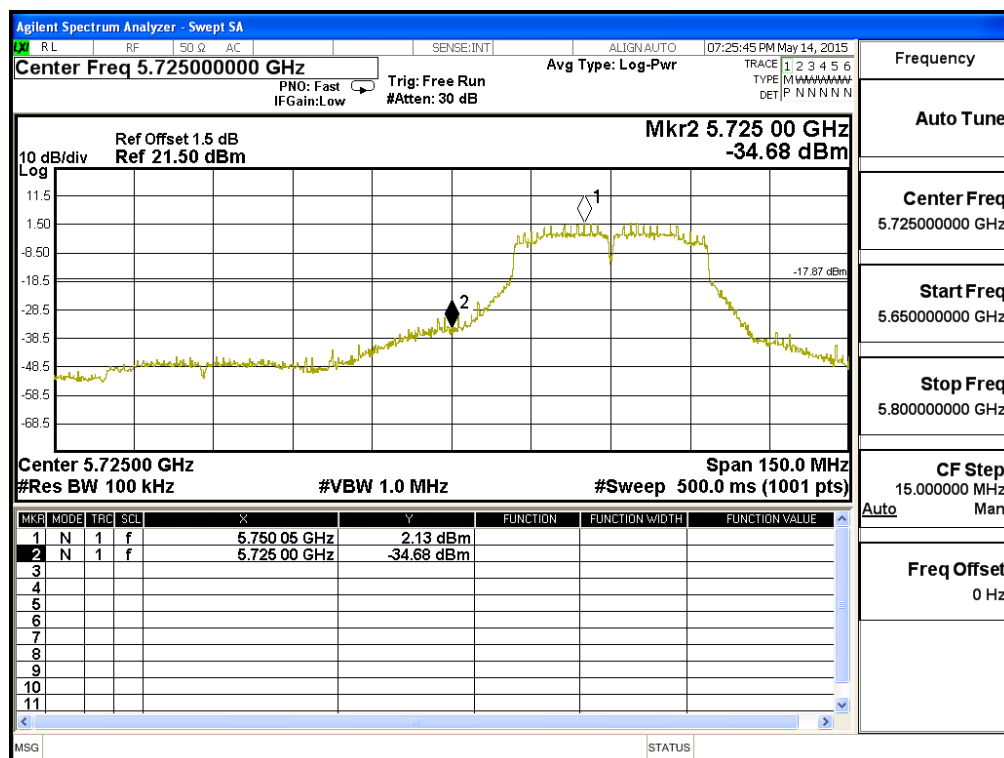


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit - 802.11n-40BW\_15Mbps(5G Band)

| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5795                    | 50.25                              | >20                    | PASS   |

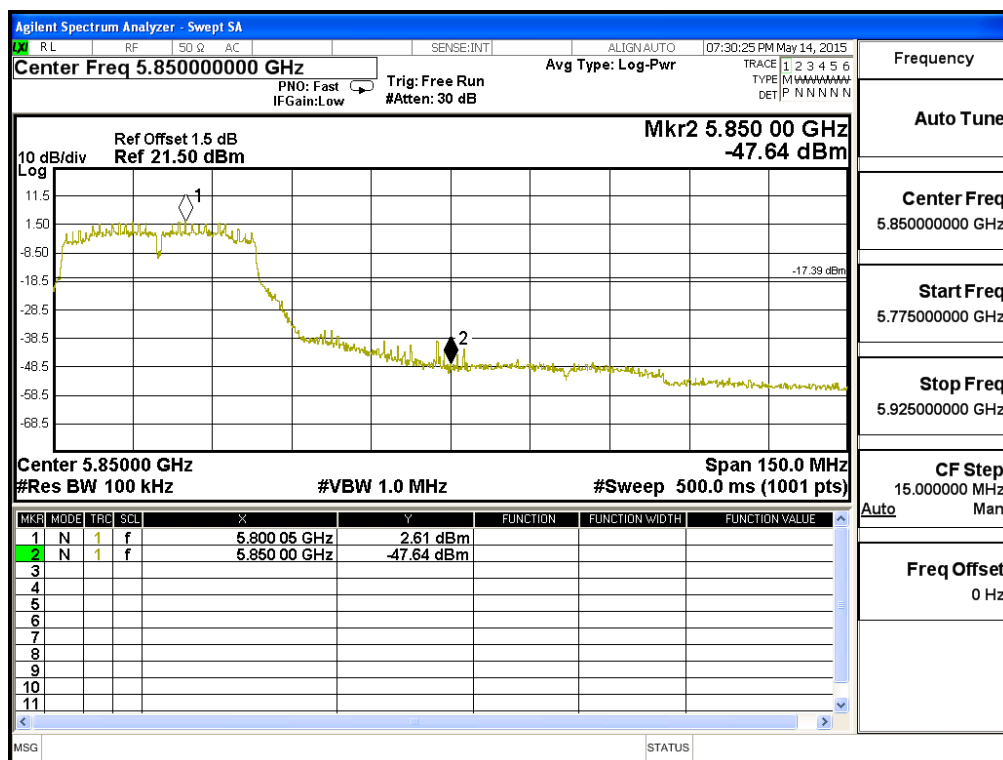

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit - 802.11ac-80BW\_32.5Mbps(5G Band)

| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5775                    | 39.09                              | >30                    | PASS   |

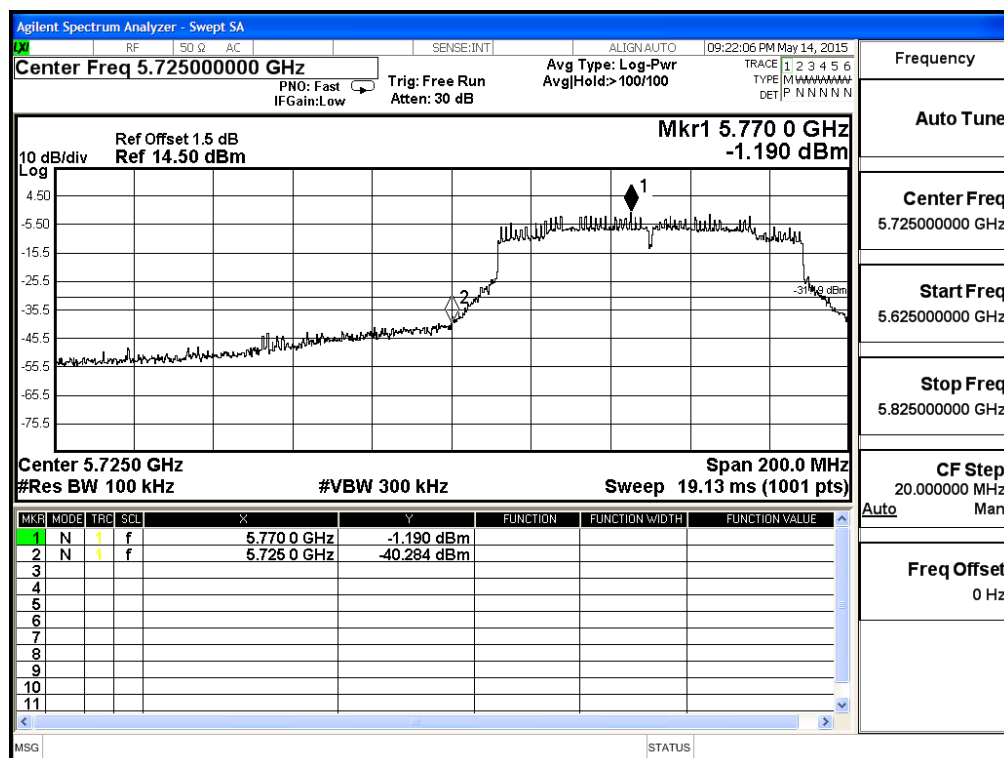


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

**RF Radiated Measurement (Horizontal):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 01 (Peak)    | 2390.000        | 31.509              | 34.898               | 66.407                  | 74.00               | 54.00                  | Pass   |
| 01 (Peak)    | 2400.000        | 31.561              | 52.077               | 83.638                  | 74.00               | 54.00                  | Pass   |
| 01 (Peak)    | 2415.800        | 31.667              | 78.153               | 109.820                 | --                  | --                     | Pass   |
| 01 (Average) | 2390.000        | 31.509              | 22.122               | 53.631                  | 74.00               | 54.00                  | Pass   |
| 01 (Average) | 2400.000        | 31.561              | 37.291               | 68.852                  | --                  | --                     | Pass   |


**Figure Channel 01:**

**Horizontal (Peak)**

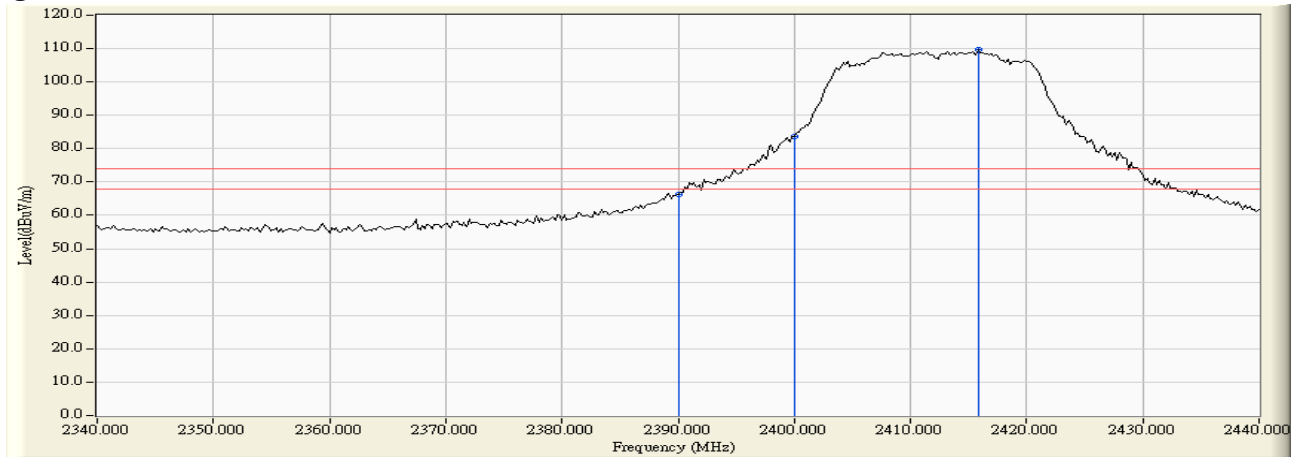

**Figure Channel 01:**

**Horizontal (Average)**

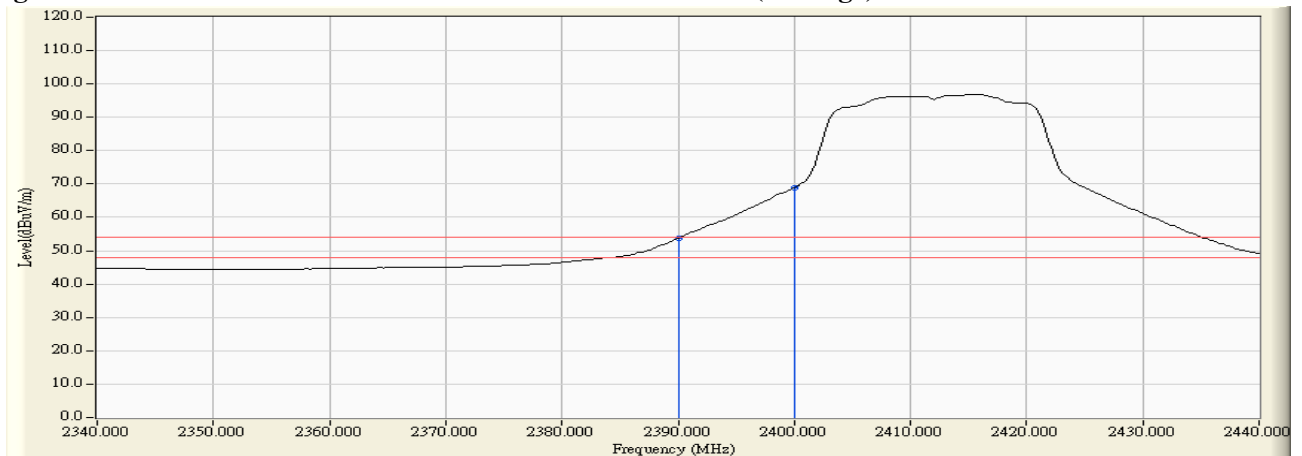



---

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

**RF Radiated Measurement (Vertical):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 01 (Peak)    | 2390.000        | 30.915              | 34.378               | 65.293                  | 74.00               | 54.00                  | Pass   |
| 01 (Peak)    | 2400.000        | 30.912              | 50.286               | 81.198                  | 74.00               | 54.00                  | Pass   |
| 01 (Peak)    | 2408.600        | 30.936              | 75.469               | 106.405                 | --                  | --                     | Pass   |
| 01 (Average) | 2390.000        | 30.915              | 19.606               | 50.521                  | 74.00               | 54.00                  | Pass   |
| 01 (Average) | 2400.000        | 30.912              | 34.617               | 65.529                  | 74.00               | 54.00                  | Pass   |
| 01 (Average) | 2409.600        | 30.939              | 62.197               | 93.136                  | --                  | --                     | Pass   |


**Figure Channel 01:**

**Vertical (Peak)**

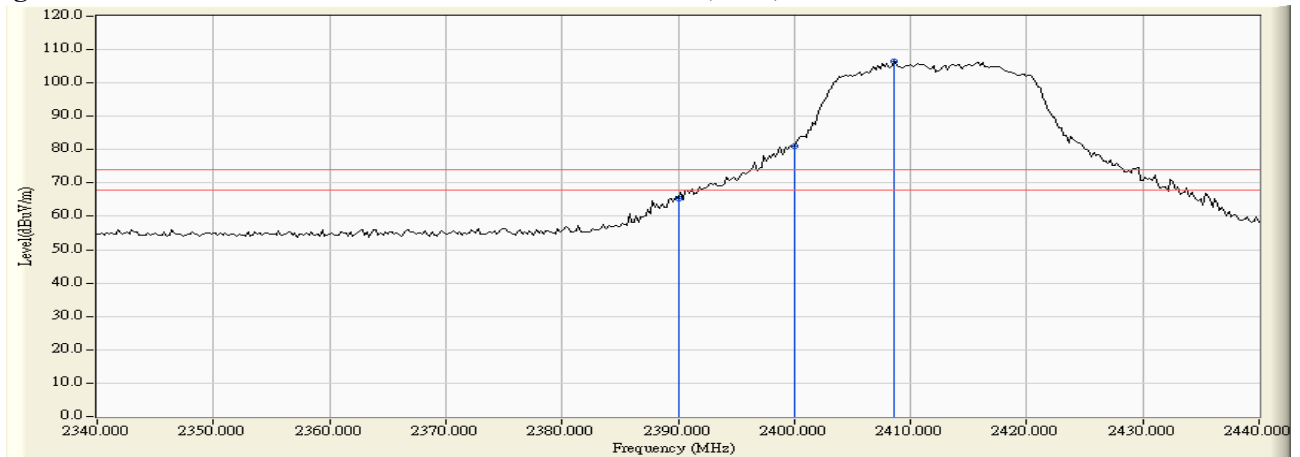

**Figure Channel 01:**

**Vertical (Average)**

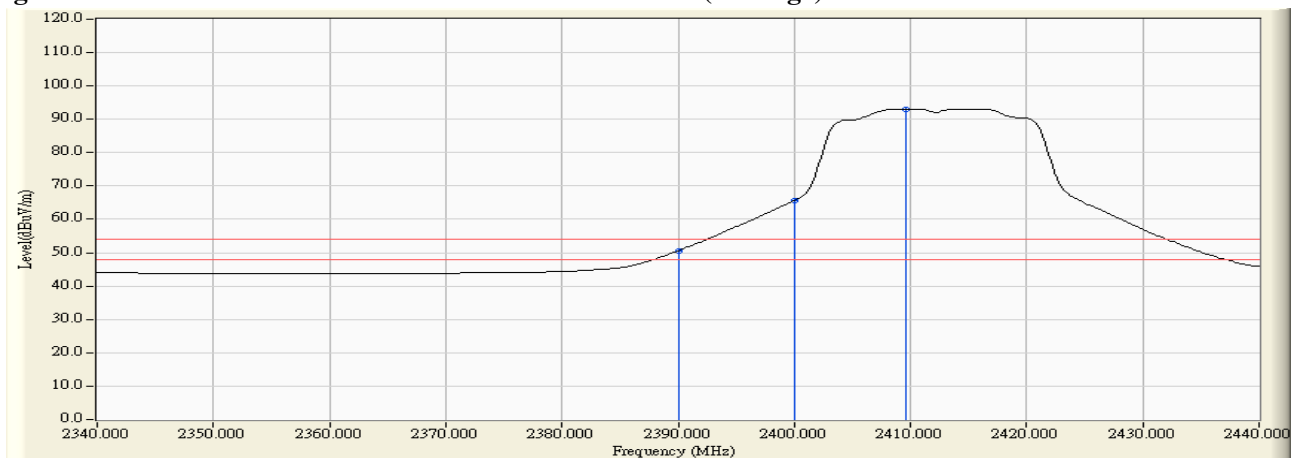

---

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

**RF Radiated Measurement (Horizontal):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 02 (Peak)    | 2386.600        | 31.496              | 36.686               | 68.182                  | 74.00               | 54.00                  | Pass   |
| 02 (Peak)    | 2390.000        | 31.509              | 35.245               | 66.754                  | 74.00               | 54.00                  | Pass   |
| 02 (Peak)    | 2400.000        | 31.561              | 48.416               | 79.977                  | 74.00               | 54.00                  | Pass   |
| 02 (Peak)    | 2419.600        | 31.697              | 80.894               | 112.590                 | --                  | --                     | Pass   |
| 02 (Average) | 2390.000        | 31.509              | 21.138               | 52.647                  | 74.00               | 54.00                  | Pass   |
| 02 (Average) | 2400.000        | 31.561              | 33.814               | 65.375                  | 74.00               | 54.00                  | Pass   |
| 02 (Average) | 2419.800        | 31.698              | 67.654               | 99.352                  | --                  | --                     | Pass   |


**Figure Channel 02:**

**Horizontal (Peak)**

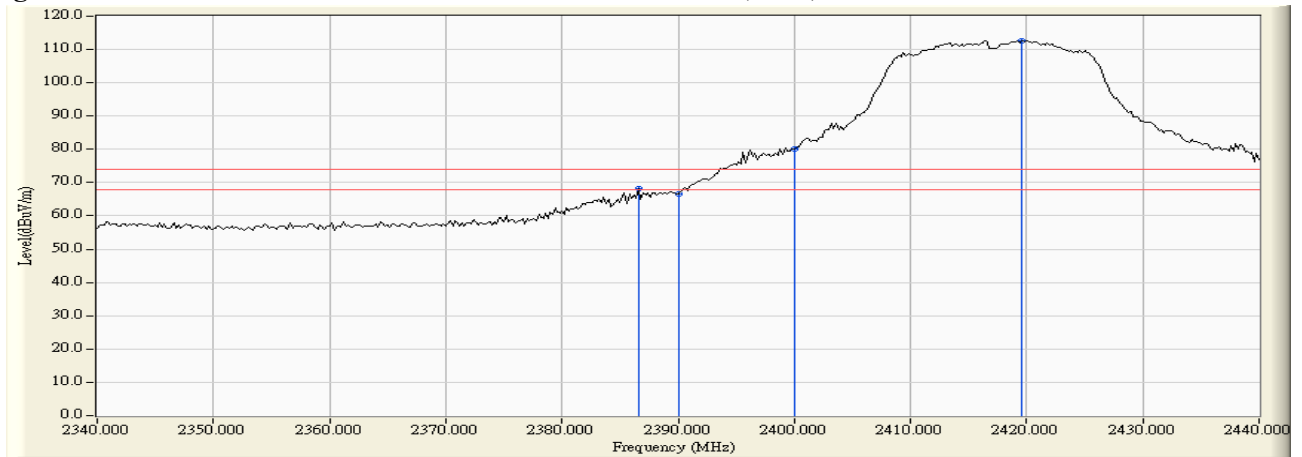

**Figure Channel 02:**

**Horizontal (Average)**

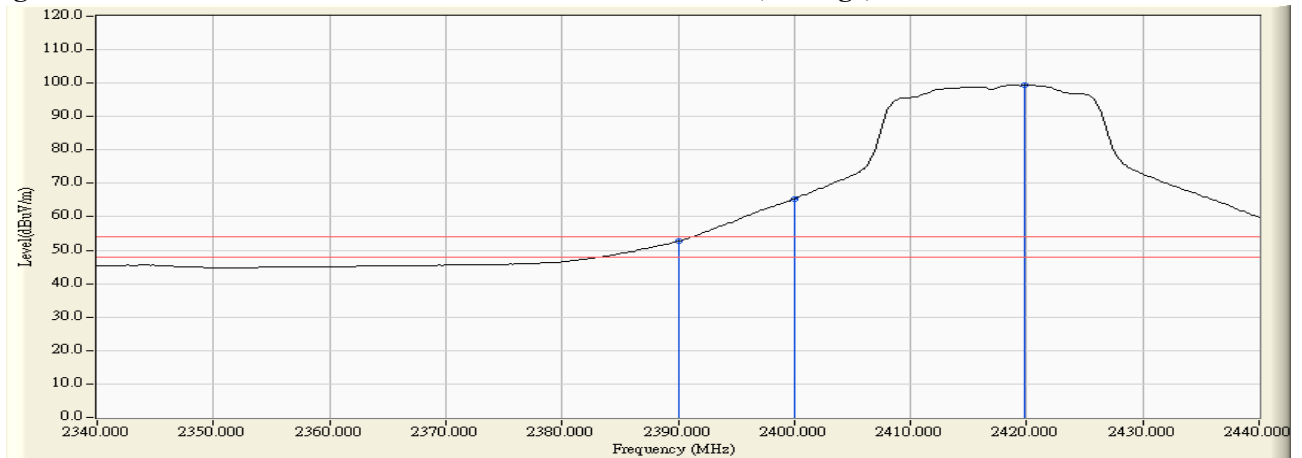

---

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

**RF Radiated Measurement (Vertical):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 02 (Peak)    | 2390.000        | 30.915              | 32.714               | 63.629                  | 74.00               | 54.00                  | Pass   |
| 02 (Peak)    | 2400.000        | 30.912              | 46.324               | 77.236                  | 74.00               | 54.00                  | Pass   |
| 02 (Peak)    | 2419.800        | 31.003              | 77.106               | 108.108                 | --                  | --                     | Pass   |
| 02 (Average) | 2390.000        | 30.915              | 18.509               | 49.424                  | 74.00               | 54.00                  | Pass   |
| 02 (Average) | 2400.000        | 30.912              | 31.529               | 62.441                  | 74.00               | 54.00                  | Pass   |
| 02 (Average) | 2420.400        | 31.006              | 64.328               | 95.334                  | --                  | --                     | Pass   |


**Figure Channel 02:**

**Vertical (Peak)**

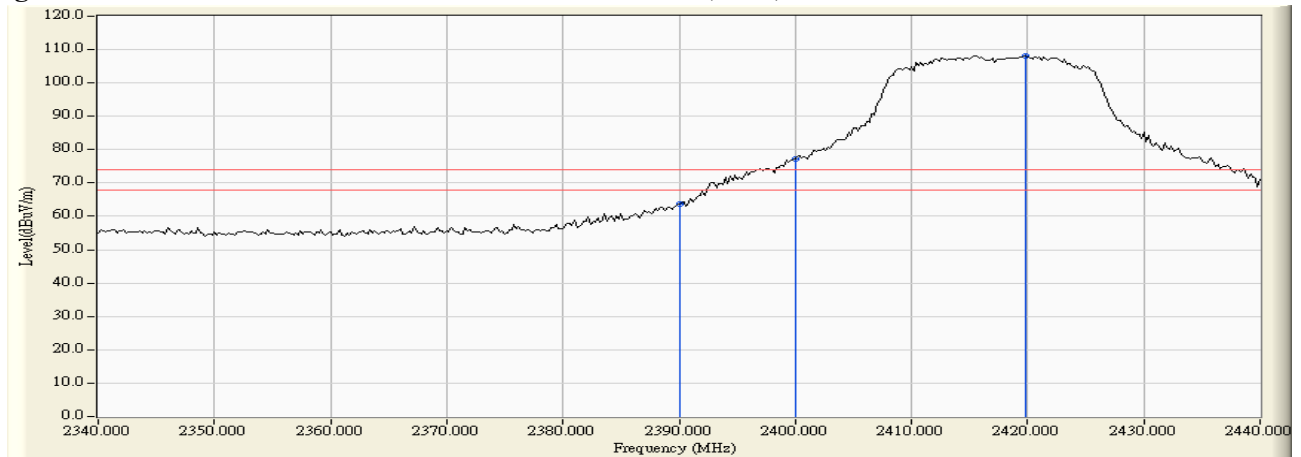

**Figure Channel 02:**

**Vertical (Average)**

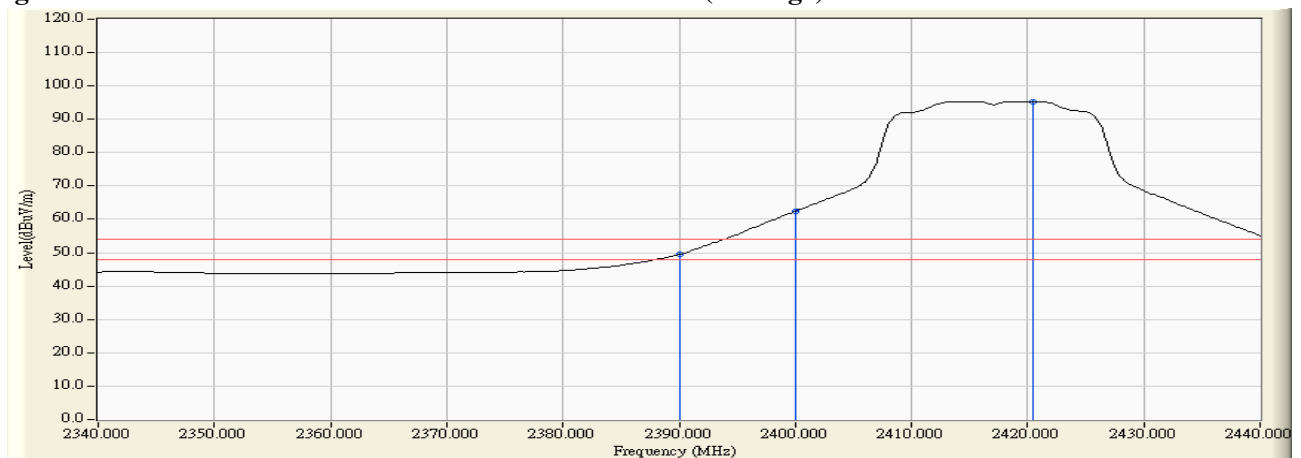

## Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

**RF Radiated Measurement (Horizontal):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 03 (Peak)    | 2390.000        | 31.509              | 34.247               | 65.756                  | 74.00               | 54.00                  | Pass   |
| 03 (Peak)    | 2400.000        | 31.561              | 46.544               | 78.105                  | 74.00               | 54.00                  | Pass   |
| 03 (Peak)    | 2425.800        | 31.745              | 81.979               | 113.723                 | --                  | --                     | Pass   |
| 03 (Average) | 2390.000        | 31.509              | 22.242               | 53.751                  | 74.00               | 54.00                  | Pass   |
| 03 (Average) | 2400.000        | 31.561              | 30.711               | 62.272                  | 74.00               | 54.00                  | Pass   |
| 03 (Average) | 2424.400        | 31.733              | 69.398               | 101.131                 | --                  | --                     | Pass   |


**Figure Channel 03:**

**Horizontal (Peak)**

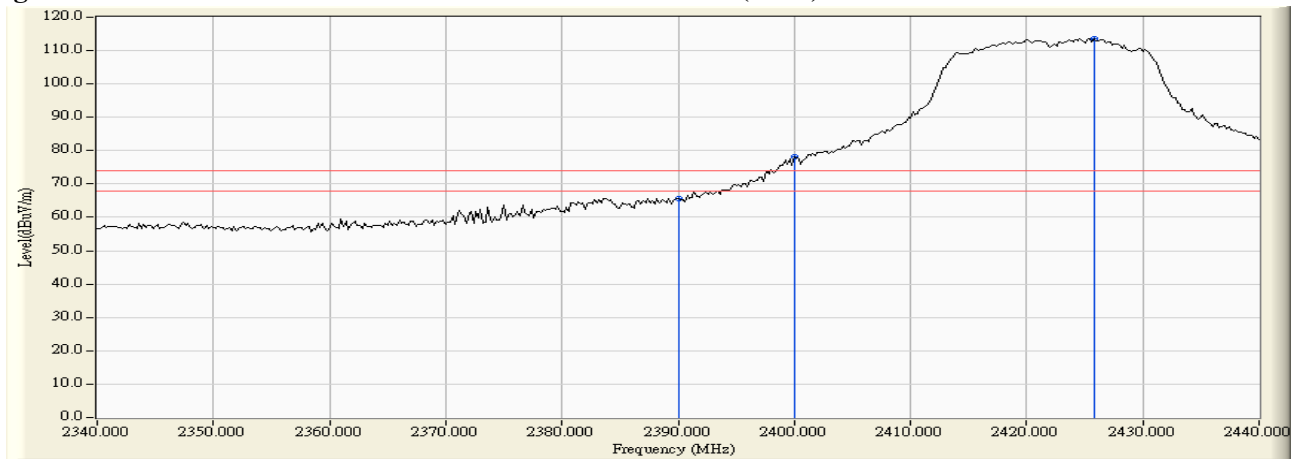

**Figure Channel 03:**

**Horizontal (Average)**

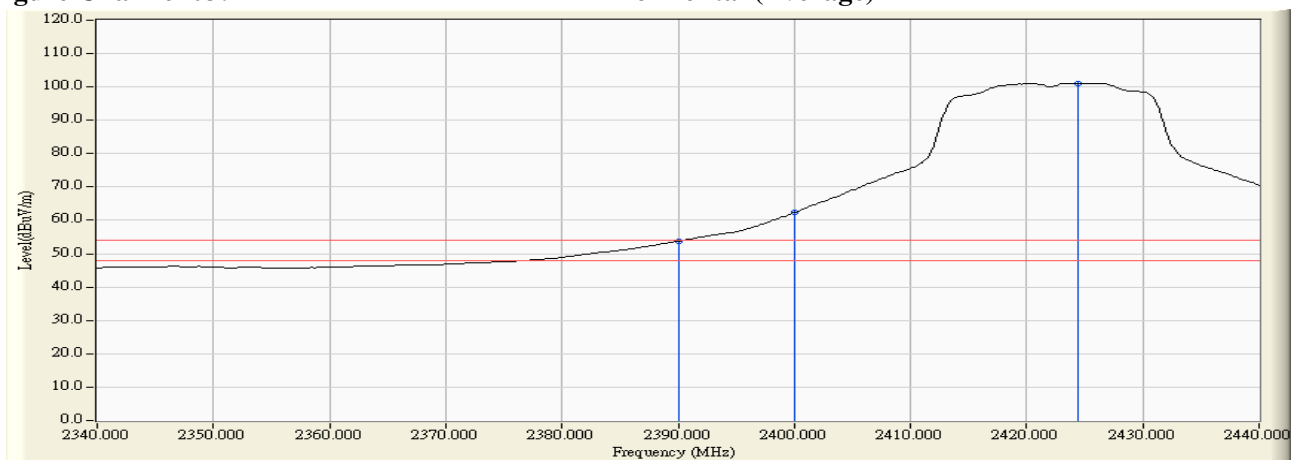



---

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

**RF Radiated Measurement (Vertical):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 03 (Peak)    | 2389.000        | 30.920              | 34.970               | 65.890                  | 74.00               | 54.00                  | Pass   |
| 03 (Peak)    | 2390.000        | 30.915              | 33.493               | 64.408                  | 74.00               | 54.00                  | Pass   |
| 03 (Peak)    | 2400.000        | 30.912              | 46.500               | 77.412                  | 74.00               | 54.00                  | Pass   |
| 03 (Peak)    | 2425.000        | 31.037              | 79.061               | 110.099                 | --                  | --                     | Pass   |
| 03 (Average) | 2390.000        | 30.915              | 19.890               | 50.805                  | 74.00               | 54.00                  | Pass   |
| 03 (Average) | 2400.000        | 30.912              | 28.589               | 59.501                  | 74.00               | 54.00                  | Pass   |
| 03 (Average) | 2419.800        | 31.003              | 66.273               | 97.275                  | --                  | --                     | Pass   |


**Figure Channel 03:**

**Vertical (Peak)**

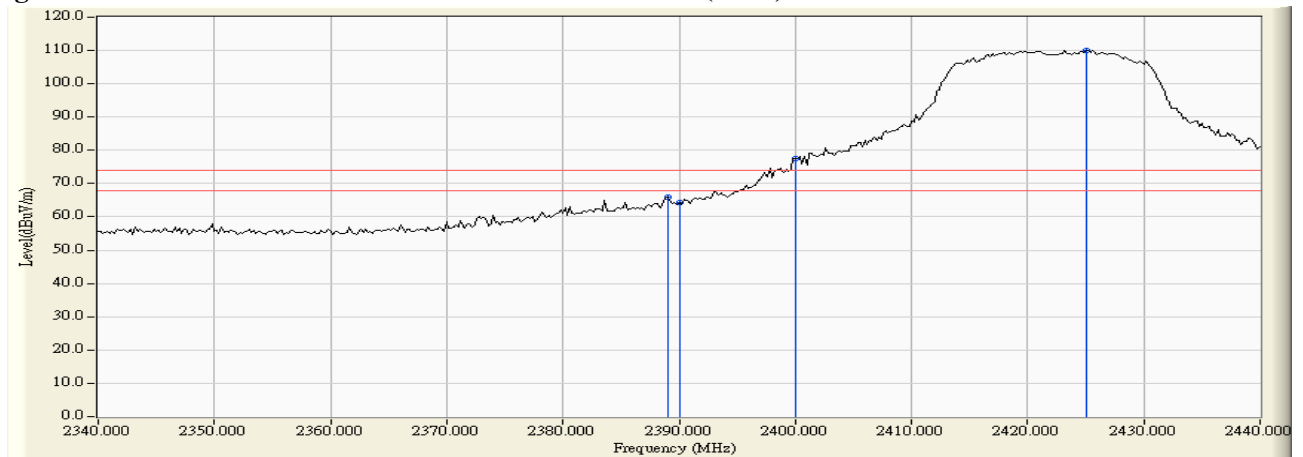

**Figure Channel 03:**

**Vertical (Average)**

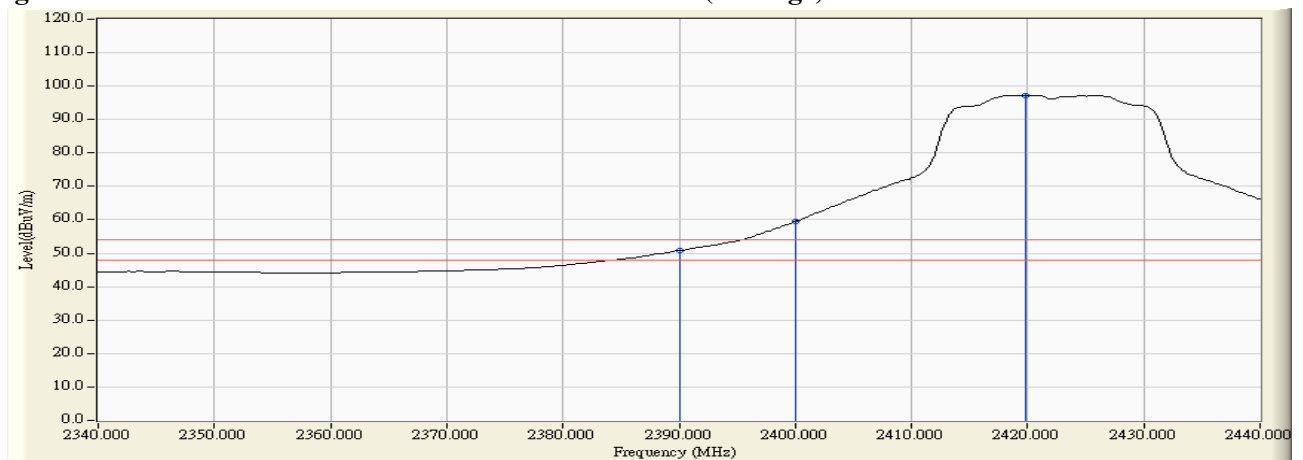

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

**RF Radiated Measurement (Horizontal):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 10 (Peak)    | 2454.900        | 31.966              | 83.589               | 115.555                 | --                  | --                     | Pass   |
| 10 (Peak)    | 2483.500        | 32.182              | 34.243               | 66.425                  | 74.00               | 54.00                  | Pass   |
| 10 (Average) | 2458.700        | 31.994              | 70.228               | 102.222                 | --                  | --                     | Pass   |
| 10 (Average) | 2483.500        | 32.182              | 21.181               | 53.363                  | 74.00               | 54.00                  | Pass   |


**Figure Channel 10:**

**Horizontal (Peak)**

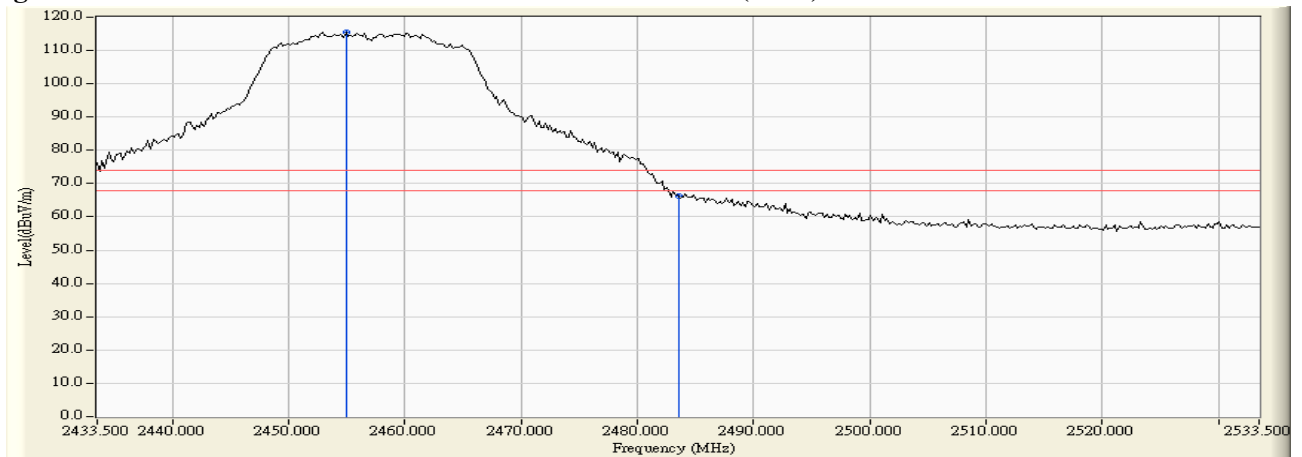

**Figure Channel 10:**

**Horizontal (Average)**

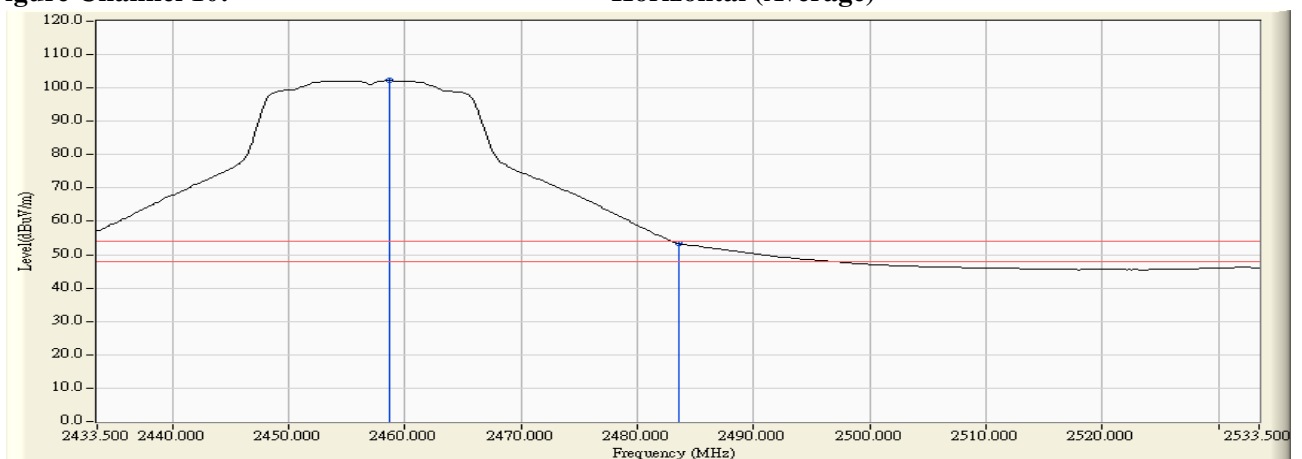

---

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

**RF Radiated Measurement (Vertical):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 10 (Peak)    | 2453.900        | 31.235              | 79.590               | 110.825                 | --                  | --                     | Pass   |
| 10 (Peak)    | 2483.500        | 31.435              | 31.348               | 62.783                  | 74.00               | 54.00                  | Pass   |
| 10 (Peak)    | 2484.300        | 31.440              | 33.620               | 65.061                  | 74.00               | 54.00                  | Pass   |
| 10 (Average) | 2455.500        | 31.246              | 66.408               | 97.654                  | --                  | --                     | Pass   |
| 10 (Average) | 2483.500        | 31.435              | 19.102               | 50.537                  | 74.00               | 54.00                  | Pass   |


**Figure Channel 10:**

**Vertical (Peak)**

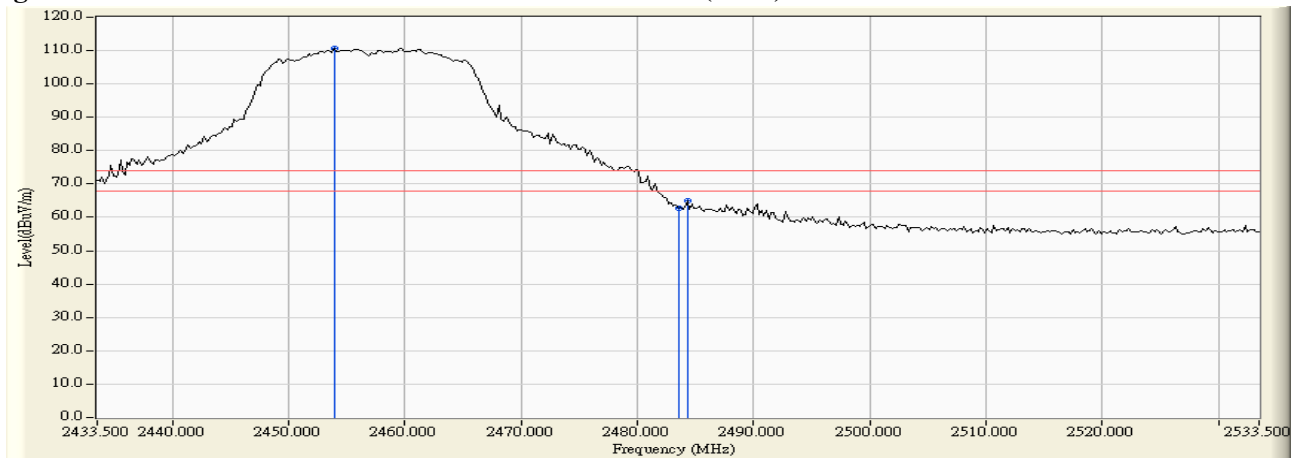

**Figure Channel 10:**

**Vertical (Average)**

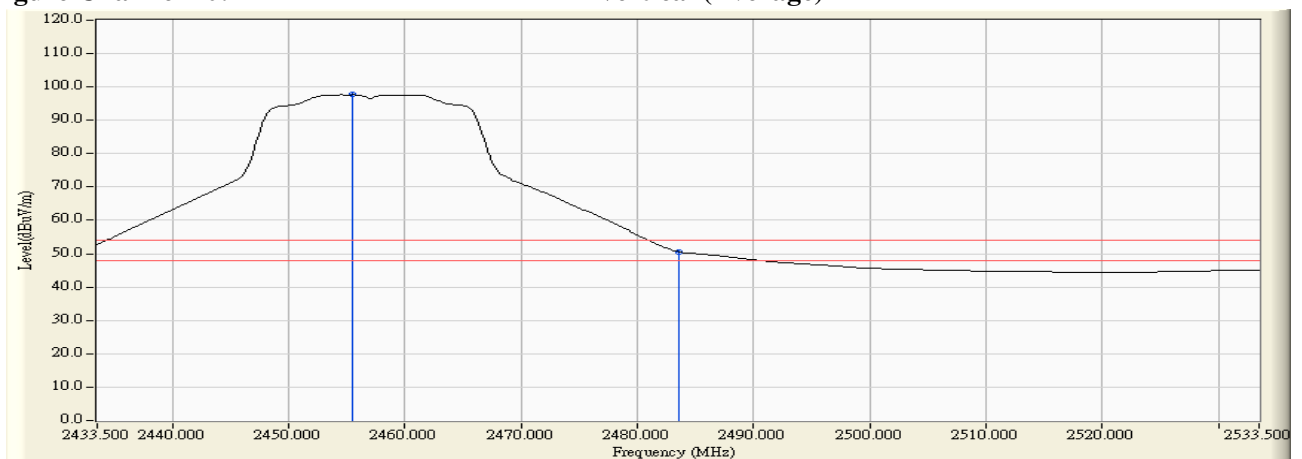

---

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)


**RF Radiated Measurement (Horizontal):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 11 (Peak)    | 2457.900        | 31.988              | 82.254               | 114.242                 | --                  | --                     | Pass   |
| 11 (Peak)    | 2483.500        | 32.182              | 40.936               | 73.118                  | 74.00               | 54.00                  | Pass   |
| 11 (Average) | 2460.100        | 32.005              | 67.917               | 99.922                  | --                  | --                     | Pass   |
| 11 (Average) | 2483.500        | 32.182              | 21.009               | 53.191                  | 74.00               | 54.00                  | Pass   |

**Figure Channel 11: Horizontal (Peak)**

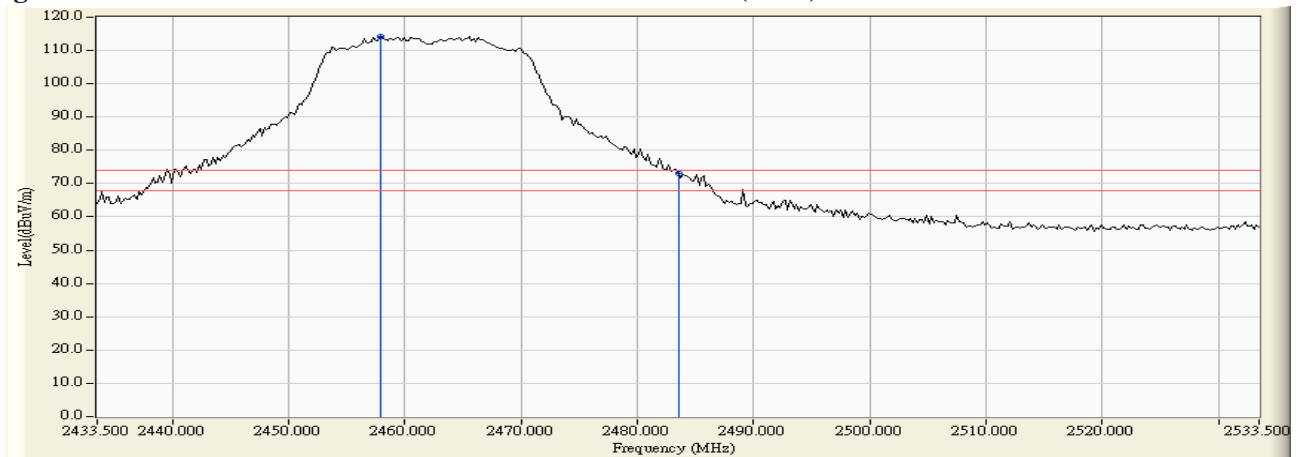

**Figure Channel 11: Horizontal (Average)**

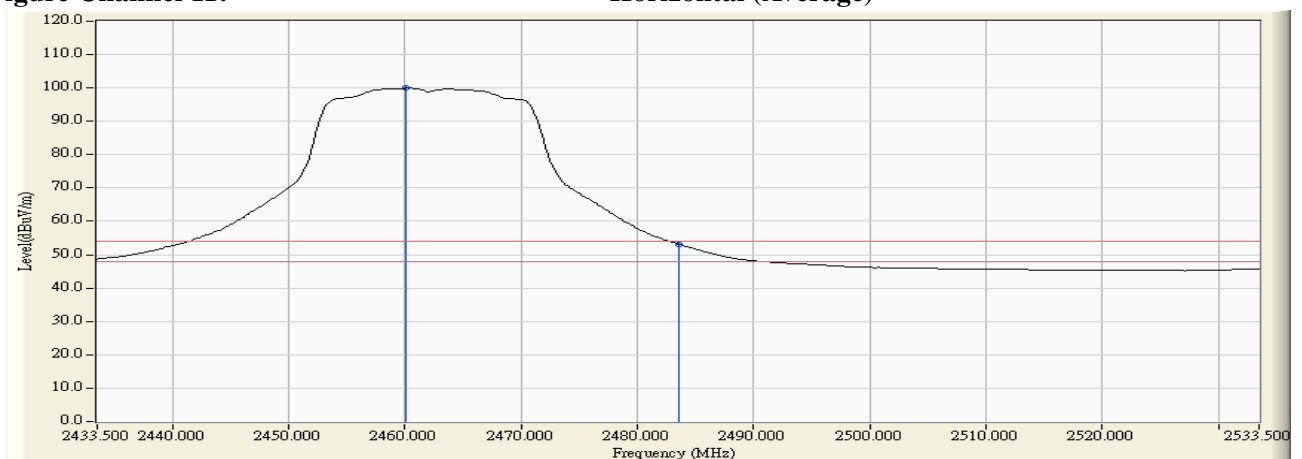



---

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

**RF Radiated Measurement (Vertical):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 11 (Peak)    | 2460.500        | 31.280              | 77.505               | 108.785                 | --                  | --                     | Pass   |
| 11 (Peak)    | 2483.500        | 31.435              | 32.610               | 64.045                  | 74.00               | 54.00                  | Pass   |
| 11 (Peak)    | 2484.500        | 31.442              | 34.694               | 66.136                  | 74.00               | 54.00                  | Pass   |
| 11 (Average) | 2459.700        | 31.275              | 64.320               | 95.595                  | --                  | --                     | Pass   |
| 11 (Average) | 2483.500        | 31.435              | 18.396               | 49.831                  | 74.00               | 54.00                  | Pass   |


**Figure Channel 11:**

**Vertical (Peak)**

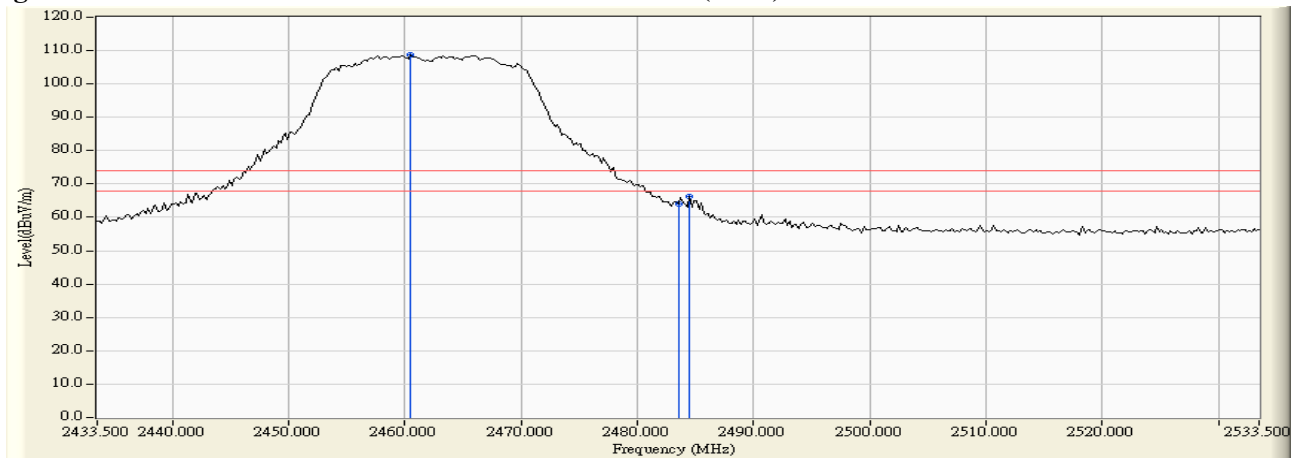

**Figure Channel 11:**

**Vertical (Average)**

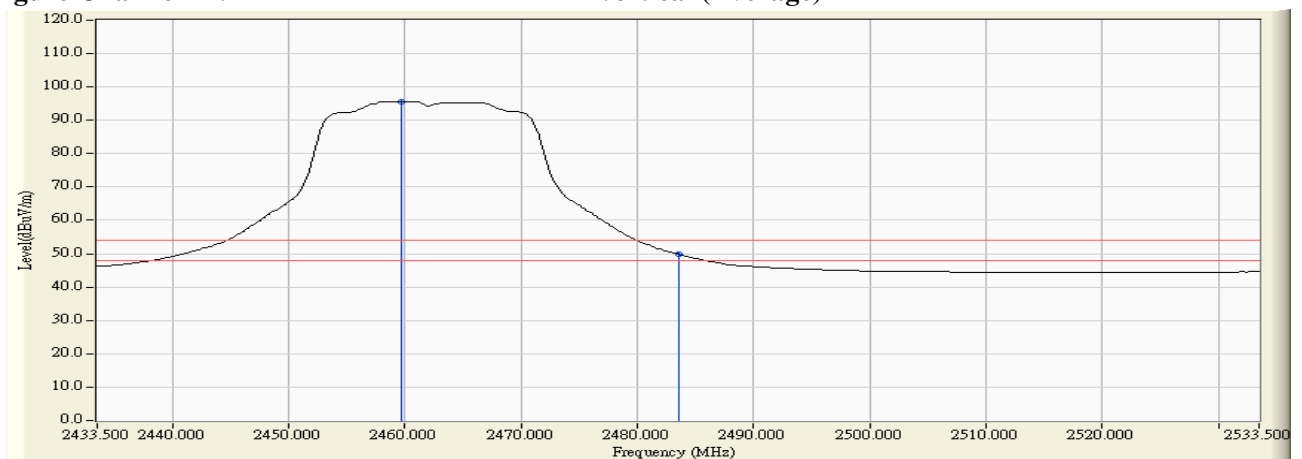

## Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

**RF Radiated Measurement (Horizontal):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 12 (Peak)    | 2463.900        | 32.033              | 78.980               | 111.014                 | --                  | --                     | Pass   |
| 12 (Peak)    | 2483.500        | 32.182              | 38.571               | 70.753                  | 74.00               | 54.00                  | Pass   |
| 12 (Peak)    | 2483.900        | 32.185              | 40.131               | 72.316                  | 74.00               | 54.00                  | Pass   |
| 12 (Average) | 2463.300        | 32.029              | 64.582               | 96.611                  | --                  | --                     | Pass   |
| 12 (Average) | 2483.500        | 32.182              | 21.295               | 53.477                  | 74.00               | 54.00                  | Pass   |


**Figure Channel 12:**

**Horizontal (Peak)**

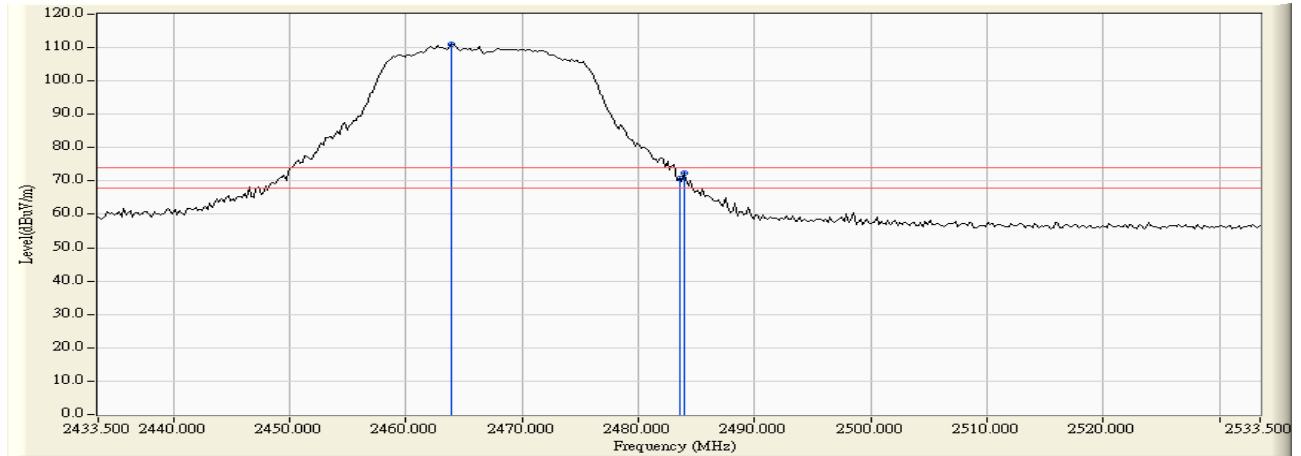

**Figure Channel 12:**

**Horizontal (Average)**

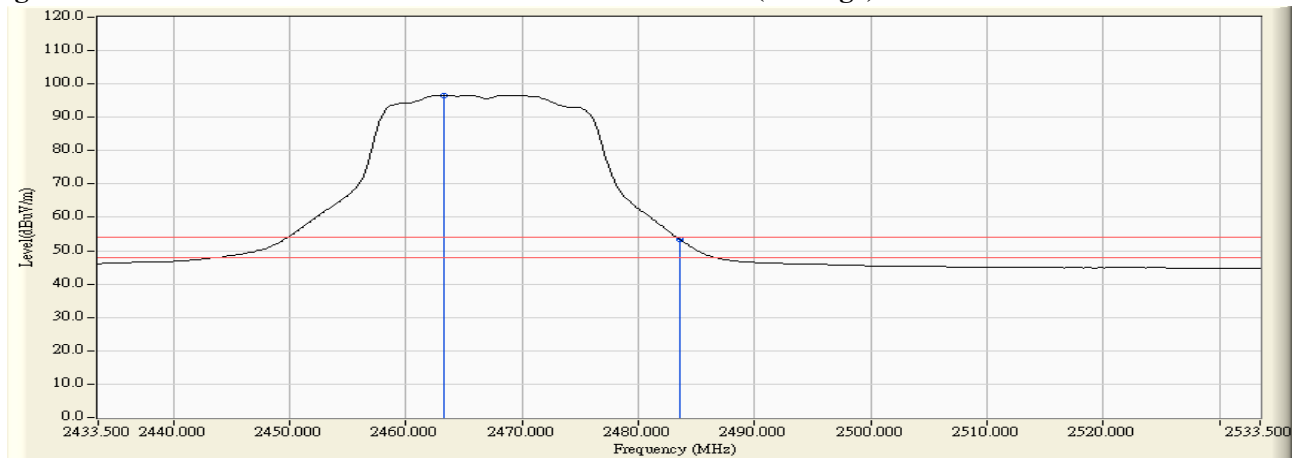

---

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)


**RF Radiated Measurement (Vertical):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 12 (Peak)    | 2470.500        | 31.348              | 73.898               | 105.246                 | --                  | --                     | Pass   |
| 12 (Peak)    | 2483.500        | 31.435              | 38.645               | 70.080                  | 74.00               | 54.00                  | Pass   |
| 12 (Average) | 2464.500        | 31.307              | 60.747               | 92.054                  | --                  | --                     | Pass   |
| 12 (Average) | 2483.500        | 31.435              | 19.252               | 50.687                  | 74.00               | 54.00                  | Pass   |

**Figure Channel 12: Vertical (Peak)**

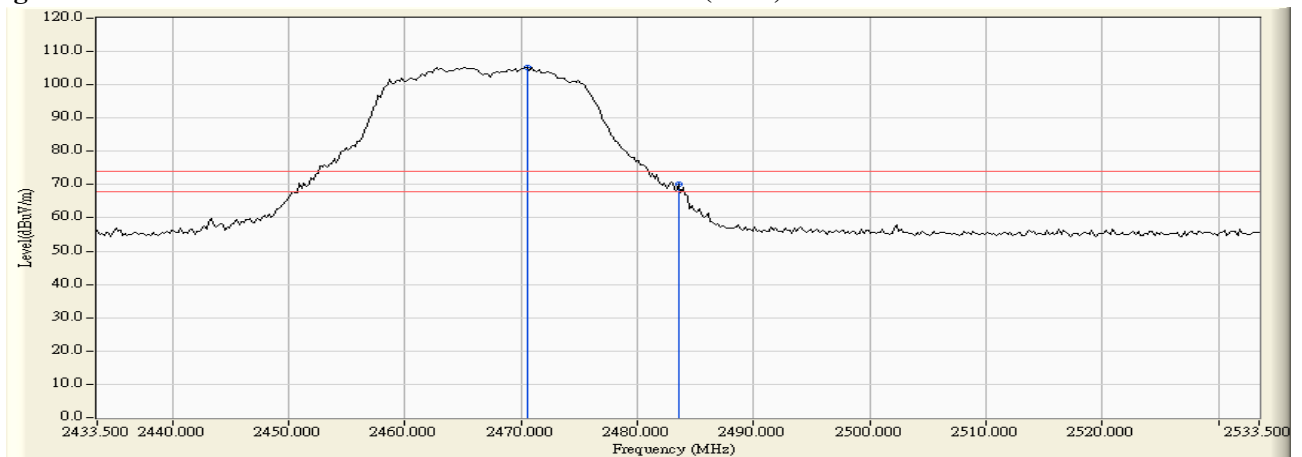

**Figure Channel 12: Vertical (Average)**

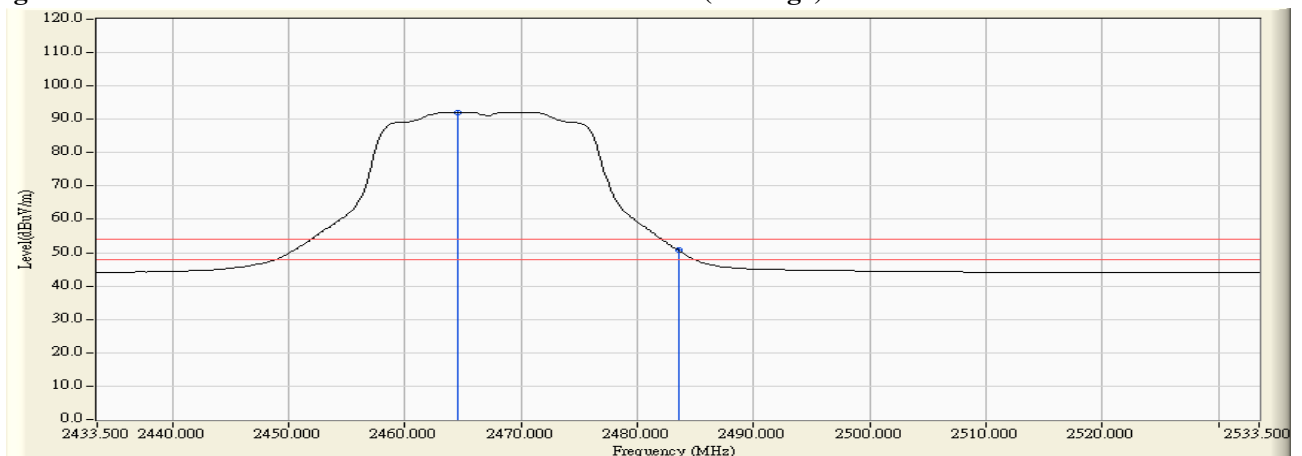

---

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

**RF Radiated Measurement (Horizontal):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 03 (Peak)    | 2390.000        | 31.509              | 36.544               | 68.053                  | 74.00               | 54.00                  | Pass   |
| 03 (Peak)    | 2400.000        | 31.561              | 50.265               | 81.826                  | 74.00               | 54.00                  | Pass   |
| 03 (Peak)    | 2429.600        | 31.773              | 77.128               | 108.901                 | --                  | --                     | Pass   |
| 03 (Average) | 2390.000        | 31.509              | 22.220               | 53.729                  | 74.00               | 54.00                  | Pass   |
| 03 (Average) | 2400.000        | 31.561              | 36.258               | 67.819                  | 74.00               | 54.00                  | Pass   |
| 03 (Average) | 2430.600        | 31.780              | 61.822               | 93.603                  | --                  | --                     | Pass   |


**Figure Channel 03:**

**Horizontal (Peak)**

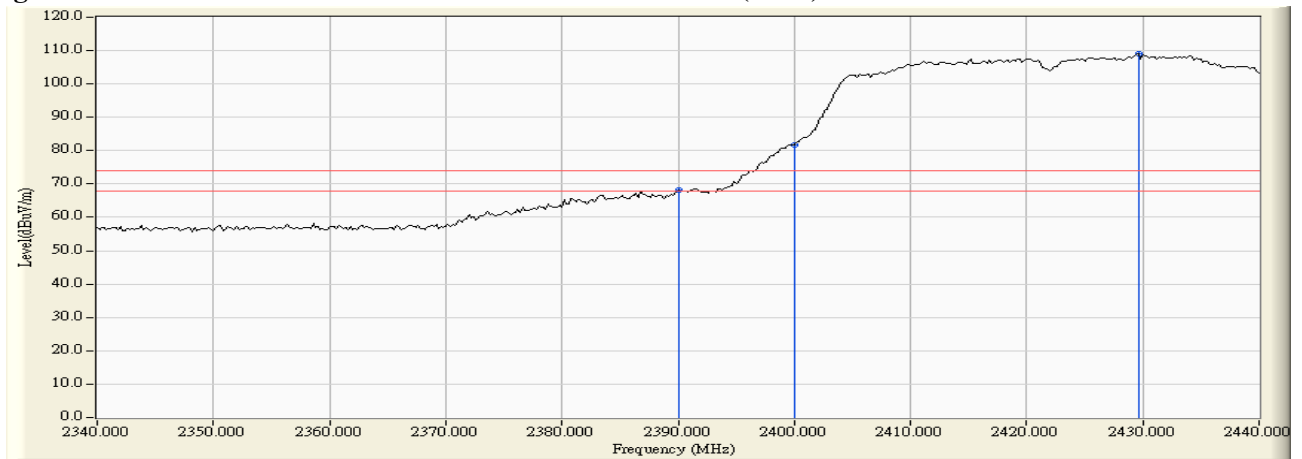

**Figure Channel 03:**

**Horizontal (Average)**

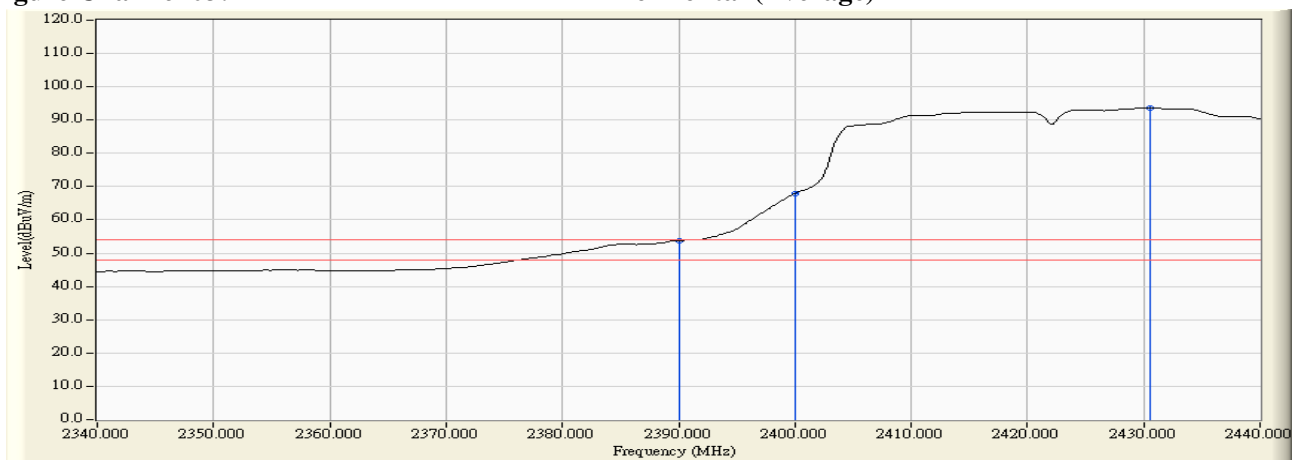



---

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

**RF Radiated Measurement (Vertical):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 03 (Peak)    | 2390.000        | 30.915              | 33.996               | 64.911                  | 74.00               | 54.00                  | Pass   |
| 03 (Peak)    | 2400.000        | 30.912              | 48.668               | 79.580                  | 74.00               | 54.00                  | Pass   |
| 03 (Peak)    | 2434.000        | 31.099              | 73.132               | 104.231                 | --                  | --                     | Pass   |
| 03 (Average) | 2390.000        | 30.915              | 20.300               | 51.215                  | 74.00               | 54.00                  | Pass   |
| 03 (Average) | 2400.000        | 30.912              | 33.933               | 64.845                  | 74.00               | 54.00                  | Pass   |
| 03 (Average) | 2428.400        | 31.060              | 58.448               | 89.509                  | --                  | --                     | Pass   |


**Figure Channel 03:**

**Vertical (Peak)**

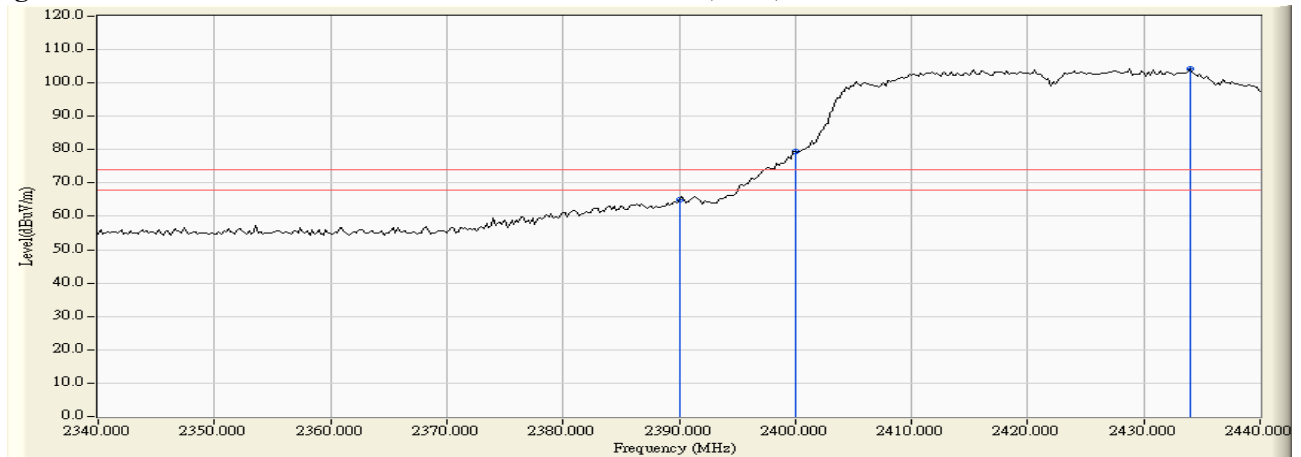

**Figure Channel 03:**

**Vertical (Average)**

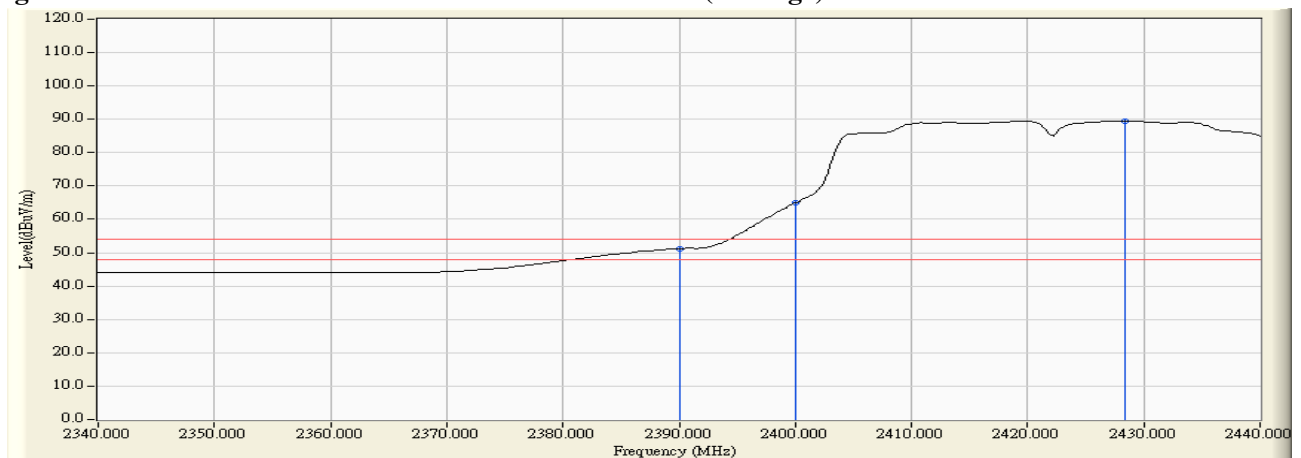

---

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

**RF Radiated Measurement (Horizontal):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBUV) | Emission Level (dBUV/m) | Peak Limit (dBUV/m) | Average Limit (dBUV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 04 (Peak)    | 2390.000        | 31.509              | 33.637               | 65.146                  | 74.00               | 54.00                  | Pass   |
| 04 (Peak)    | 2400.000        | 31.561              | 38.683               | 70.244                  | 74.00               | 54.00                  | Pass   |
| 04 (Peak)    | 2436.600        | 31.827              | 76.965               | 108.791                 | --                  | --                     | Pass   |
| 04 (Average) | 2390.000        | 31.509              | 21.418               | 52.927                  | 74.00               | 54.00                  | Pass   |
| 04 (Average) | 2400.000        | 31.561              | 26.234               | 57.795                  | 74.00               | 54.00                  | Pass   |
| 04 (Average) | 2435.800        | 31.820              | 62.426               | 94.246                  | --                  | --                     | Pass   |


**Figure Channel 04:**

**Horizontal (Peak)**

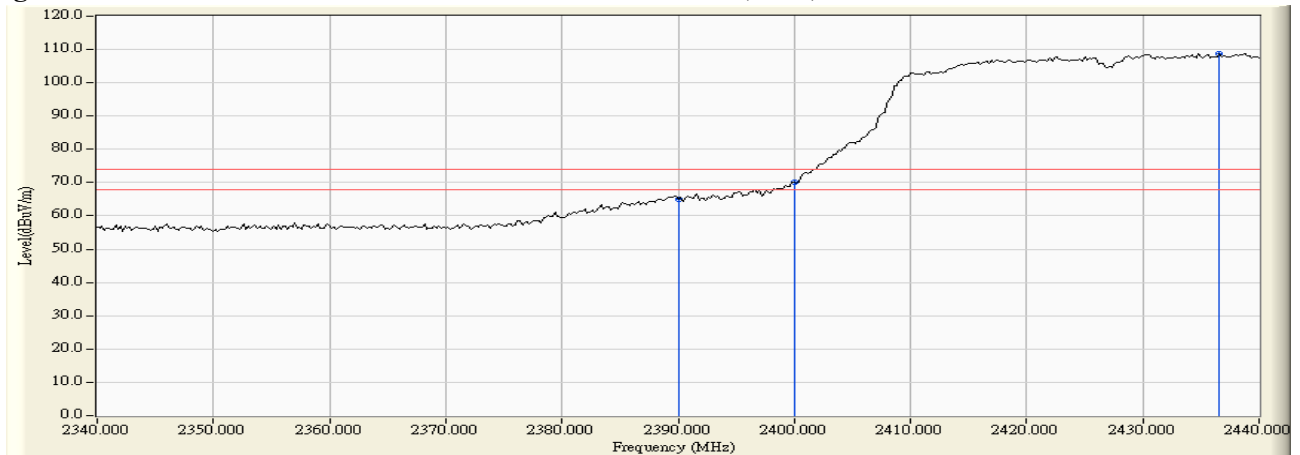

**Figure Channel 04:**

**Horizontal (Average)**

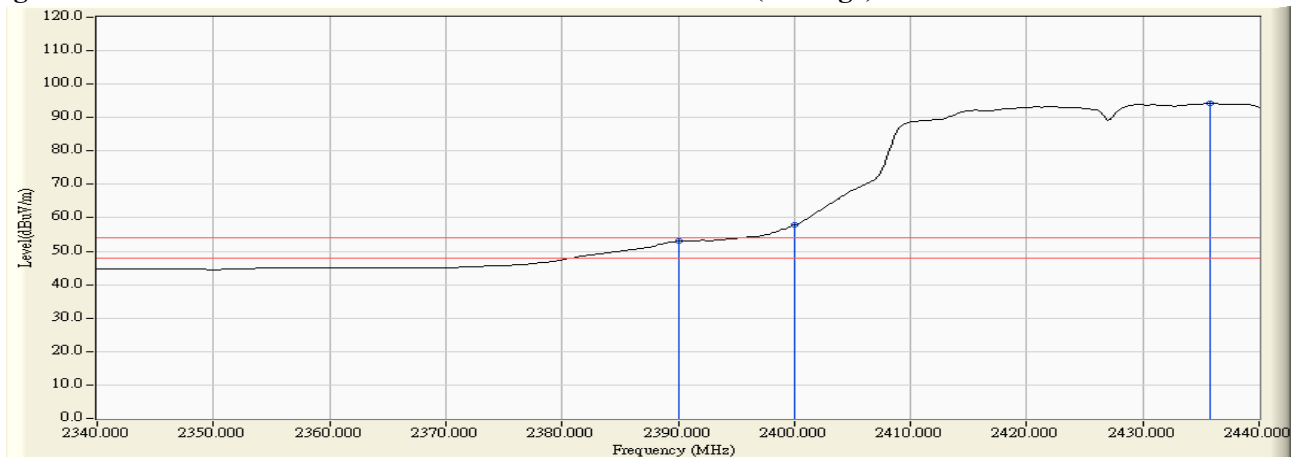

---

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

**RF Radiated Measurement (Vertical):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 04 (Peak)    | 2390.000        | 30.915              | 32.388               | 63.303                  | 74.00               | 54.00                  | Pass   |
| 04 (Peak)    | 2400.000        | 30.912              | 36.995               | 67.907                  | 74.00               | 54.00                  | Pass   |
| 04 (Peak)    | 2420.200        | 31.005              | 73.520               | 104.525                 | --                  | --                     | Pass   |
| 04 (Average) | 2390.000        | 30.915              | 19.077               | 49.992                  | 74.00               | 54.00                  | Pass   |
| 04 (Average) | 2400.000        | 30.912              | 24.579               | 55.491                  | 74.00               | 54.00                  | Pass   |
| 04 (Average) | 2433.400        | 31.094              | 58.511               | 89.606                  | --                  | --                     | Pass   |


**Figure Channel 04:**

**Vertical (Peak)**

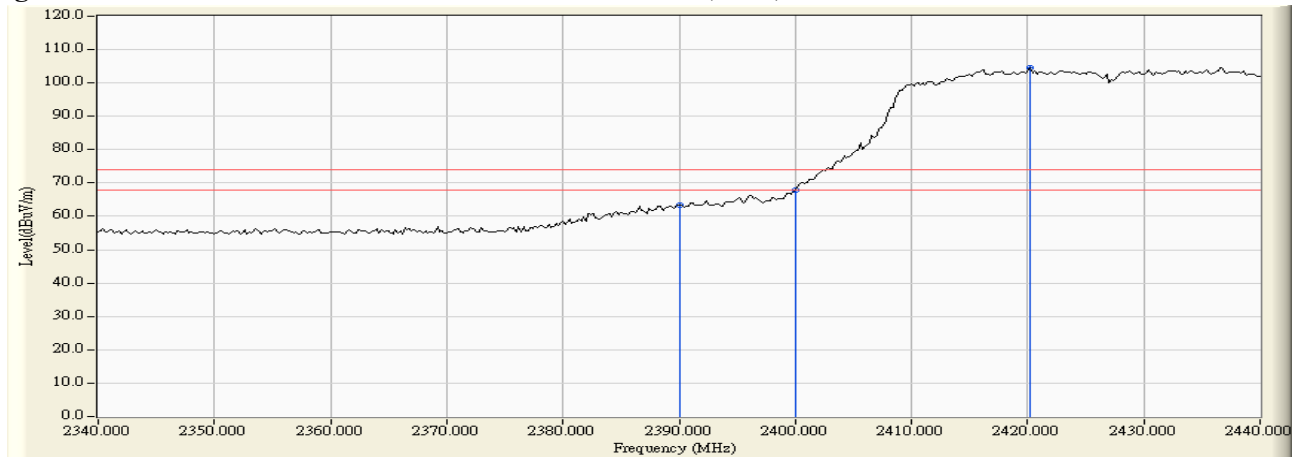

**Figure Channel 04:**

**Vertical (Average)**

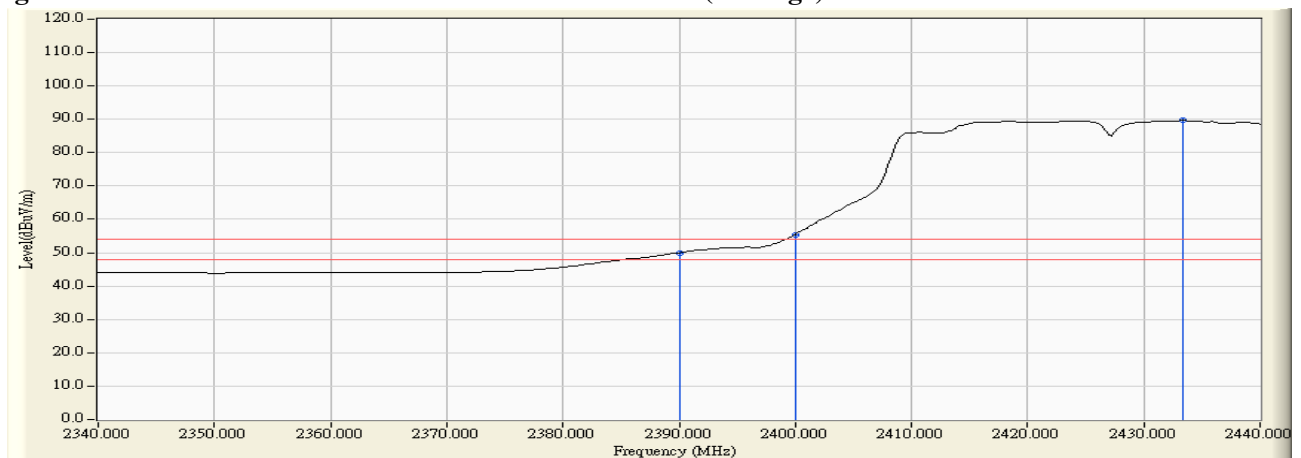

## Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

**RF Radiated Measurement (Horizontal):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 05 (Peak)    | 2390.000        | 31.509              | 37.056               | 68.565                  | 74.00               | 54.00                  | Pass   |
| 05 (Peak)    | 2400.000        | 31.561              | 41.009               | 72.570                  | 74.00               | 54.00                  | Pass   |
| 05 (Peak)    | 2433.600        | 31.803              | 78.767               | 110.571                 | --                  | --                     | Pass   |
| 05 (Average) | 2390.000        | 31.509              | 22.300               | 53.809                  | 74.00               | 54.00                  | Pass   |
| 05 (Average) | 2400.000        | 31.561              | 27.217               | 58.778                  | 74.00               | 54.00                  | Pass   |
| 05 (Average) | 2440.000        | 31.852              | 64.002               | 95.854                  | --                  | --                     | Pass   |


**Figure Channel 05:**

**Horizontal (Peak)**

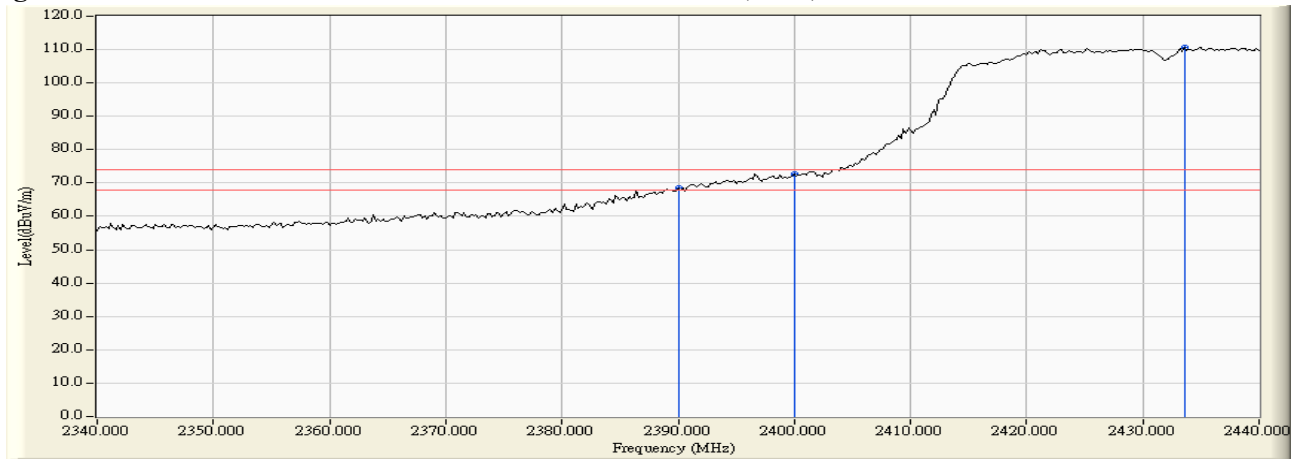

**Figure Channel 05:**

**Horizontal (Average)**

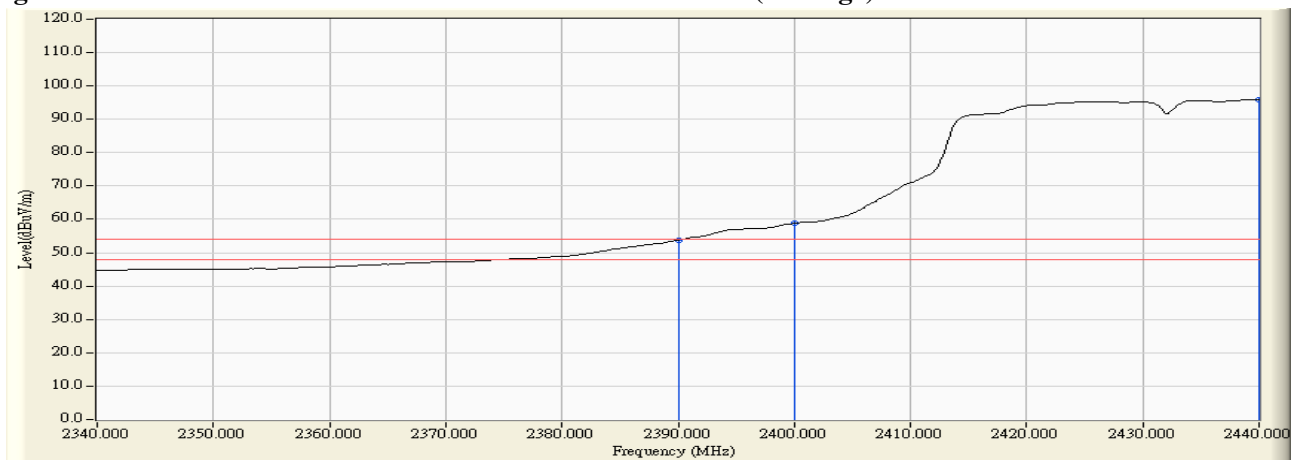



---

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

**RF Radiated Measurement (Vertical):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 05 (Peak)    | 2387.000        | 30.929              | 31.990               | 62.919                  | 74.00               | 54.00                  | Pass   |
| 05 (Peak)    | 2390.000        | 30.915              | 31.531               | 62.446                  | 74.00               | 54.00                  | Pass   |
| 05 (Peak)    | 2400.000        | 30.912              | 37.207               | 68.119                  | 74.00               | 54.00                  | Pass   |
| 05 (Peak)    | 2430.600        | 31.075              | 73.854               | 104.930                 | --                  | --                     | Pass   |
| 05 (Average) | 2390.000        | 30.915              | 19.281               | 50.196                  | 74.00               | 54.00                  | Pass   |
| 05 (Average) | 2400.000        | 30.912              | 23.806               | 54.718                  | 74.00               | 54.00                  | Pass   |
| 05 (Average) | 2438.600        | 31.130              | 59.054               | 90.184                  | --                  | --                     | Pass   |


**Figure Channel 05:**

**Vertical (Peak)**

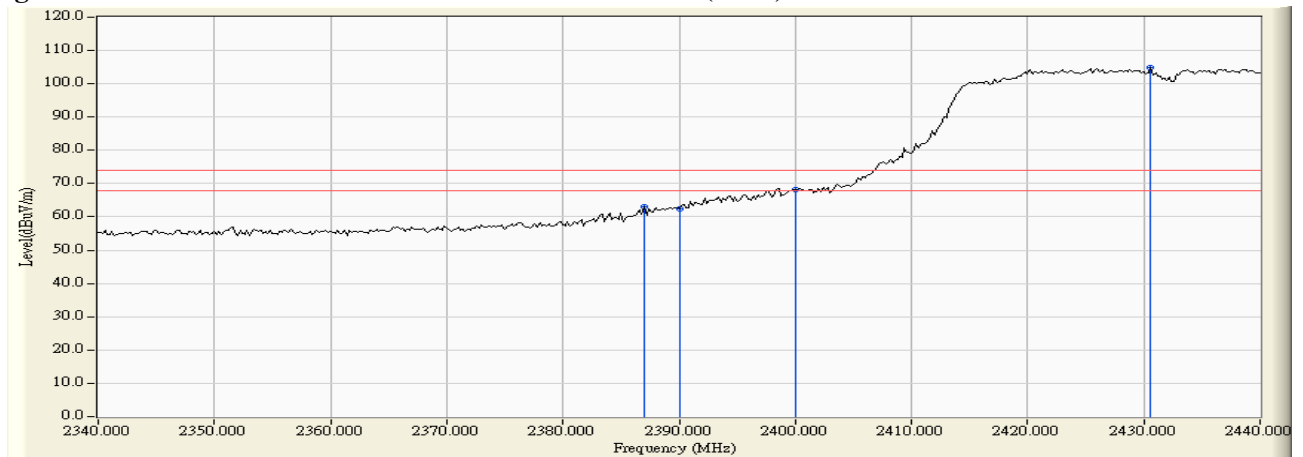

**Figure Channel 05:**

**Vertical (Average)**

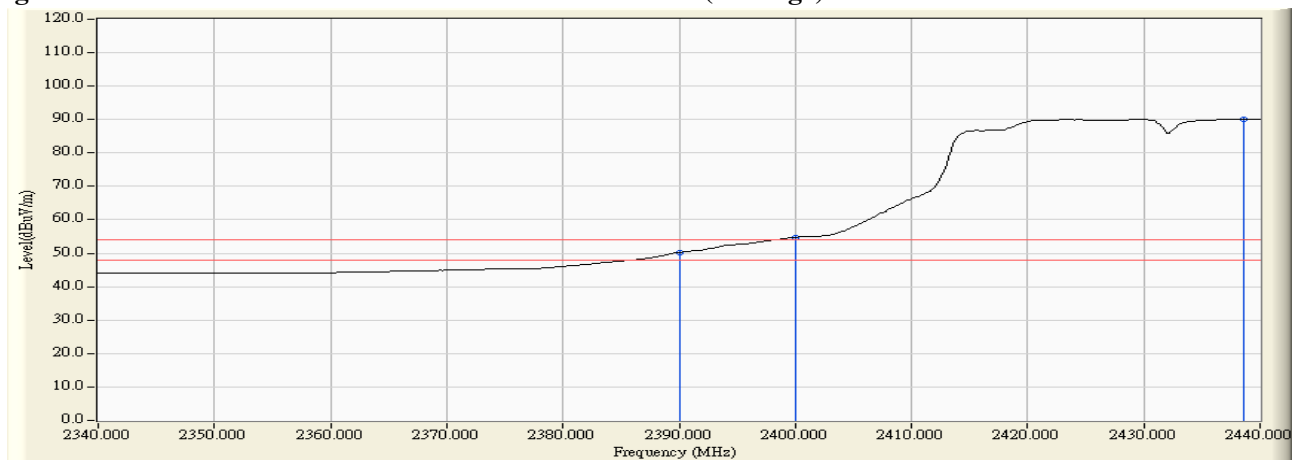

---

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

**RF Radiated Measurement (Horizontal):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 09 (Peak)    | 2445.100        | 31.891              | 78.766               | 110.657                 | --                  | --                     | Pass   |
| 09 (Peak)    | 2483.500        | 32.182              | 36.773               | 68.955                  | 74.00               | 54.00                  | Pass   |
| 09 (Peak)    | 2484.300        | 32.187              | 37.644               | 69.832                  | 74.00               | 54.00                  | Pass   |
| 09 (Average) | 2458.900        | 31.997              | 62.899               | 94.895                  | --                  | --                     | Pass   |
| 09 (Average) | 2483.500        | 32.182              | 21.716               | 53.898                  | 74.00               | 54.00                  | Pass   |


**Figure Channel 09:**

**Horizontal (Peak)**

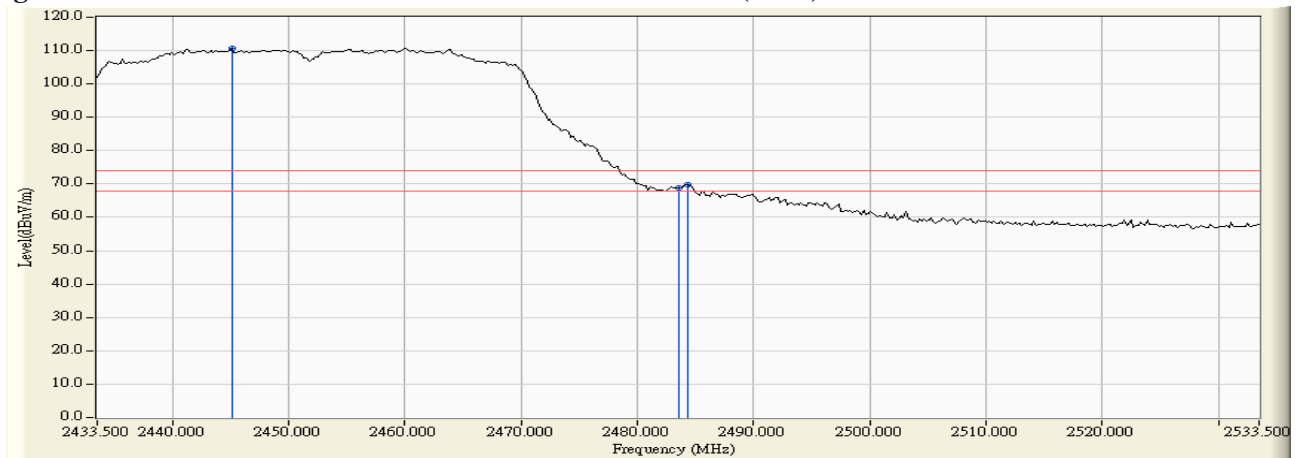

**Figure Channel 09:**

**Horizontal (Average)**

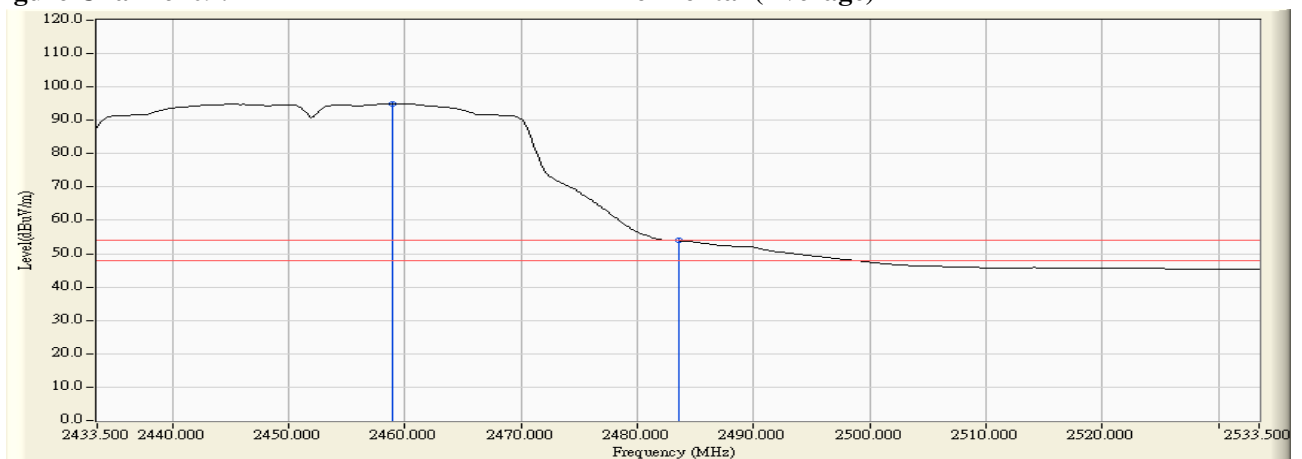

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

**RF Radiated Measurement (Vertical):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 09 (Peak)    | 2458.900        | 31.270              | 71.454               | 102.723                 | --                  | --                     | Pass   |
| 09 (Peak)    | 2483.500        | 31.435              | 29.469               | 60.904                  | 74.00               | 54.00                  | Pass   |
| 09 (Peak)    | 2484.300        | 31.440              | 30.852               | 62.293                  | 74.00               | 54.00                  | Pass   |
| 09 (Average) | 2458.100        | 31.263              | 57.314               | 88.578                  | --                  | --                     | Pass   |
| 09 (Average) | 2483.500        | 31.435              | 17.765               | 49.200                  | 74.00               | 54.00                  | Pass   |


**Figure Channel 09:**

**Vertical (Peak)**

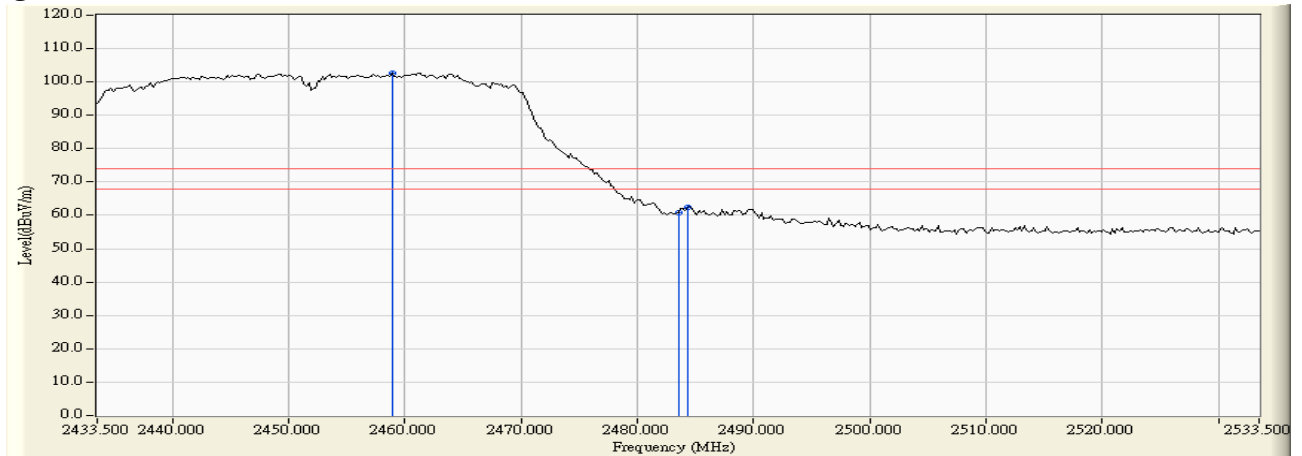

**Figure Channel 09:**

**Vertical (Average)**

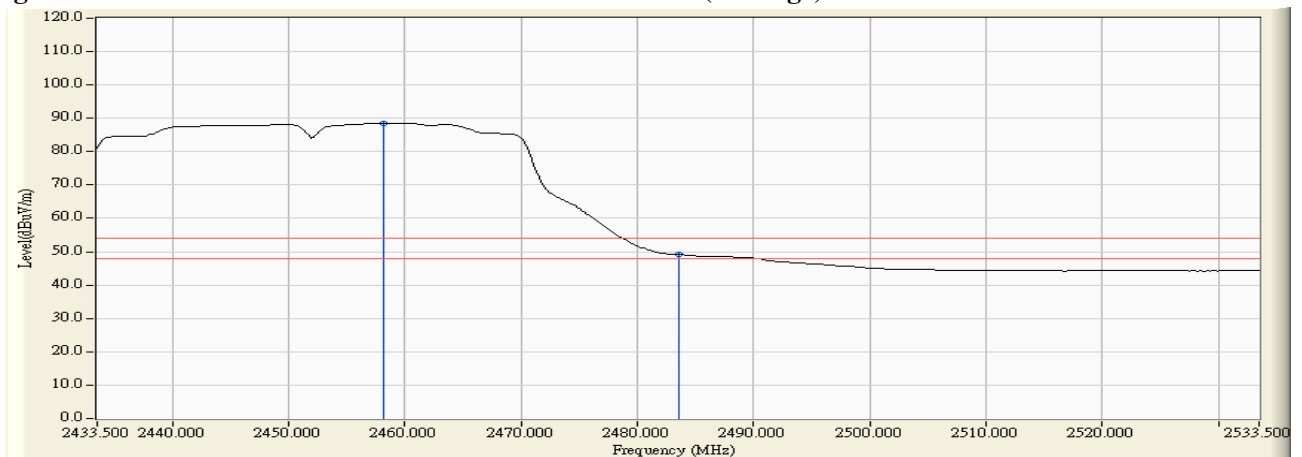

---

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)


**RF Radiated Measurement (Horizontal):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 10 (Peak)    | 2450.100        | 31.928              | 72.811               | 104.740                 | --                  | --                     | Pass   |
| 10 (Peak)    | 2483.500        | 32.182              | 32.646               | 64.828                  | 74.00               | 54.00                  | Pass   |
| 10 (Average) | 2450.300        | 31.931              | 59.669               | 91.600                  | --                  | --                     | Pass   |
| 10 (Average) | 2483.500        | 32.182              | 20.668               | 52.850                  | 74.00               | 54.00                  | Pass   |

**Figure Channel 10: Horizontal (Peak)**

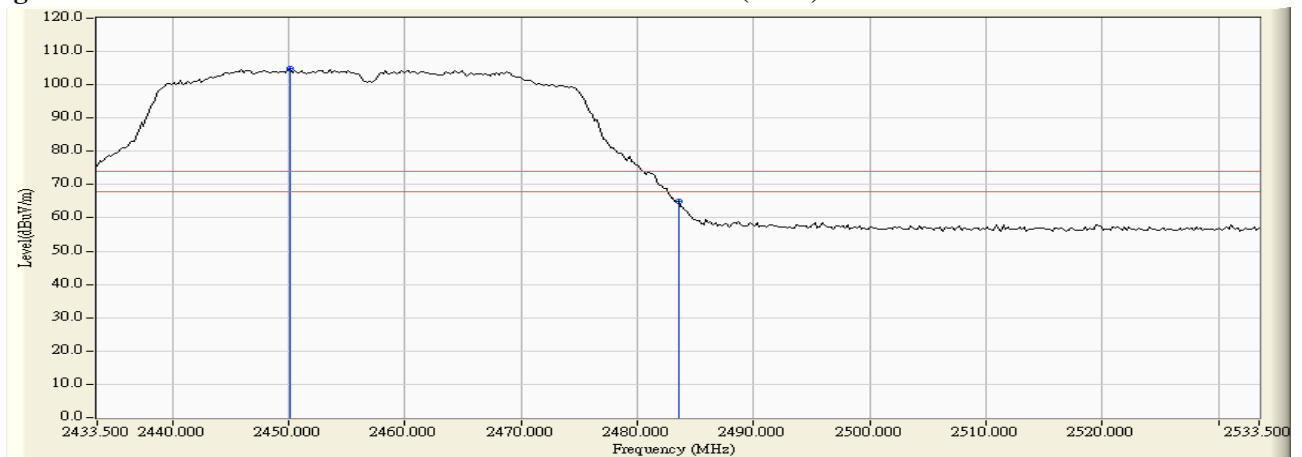

**Figure Channel 10: Horizontal (Average)**

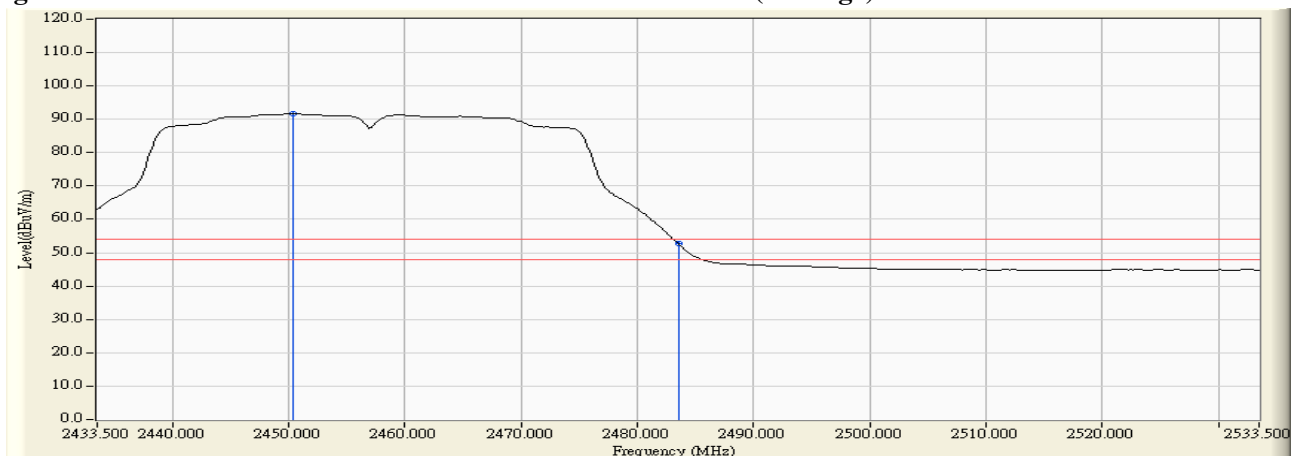



---

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)


**RF Radiated Measurement (Vertical):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 10 (Peak)    | 2446.100        | 31.181              | 67.636               | 98.817                  | --                  | --                     | Pass   |
| 10 (Peak)    | 2483.500        | 31.435              | 29.098               | 60.533                  | 74.00               | 54.00                  | Pass   |
| 10 (Average) | 2454.500        | 31.238              | 53.594               | 84.833                  | --                  | --                     | Pass   |
| 10 (Average) | 2483.500        | 31.435              | 16.885               | 48.320                  | 74.00               | 54.00                  | Pass   |

**Figure Channel 10: Vertical (Peak)**

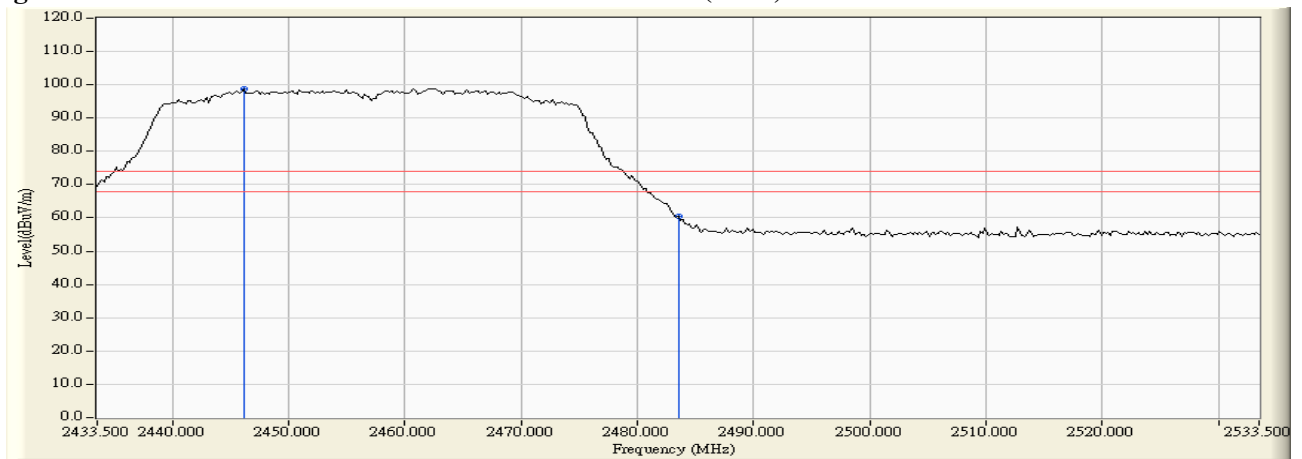

**Figure Channel 10: Vertical (Average)**

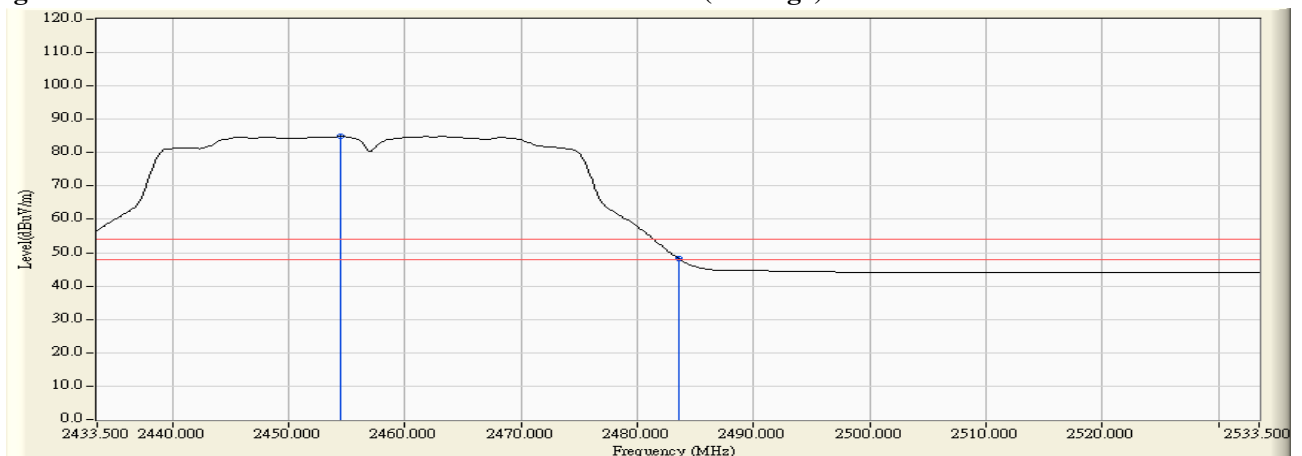

---


**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)

## Chaia A


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5745                    | 46.20                              | >20                    | PASS   |

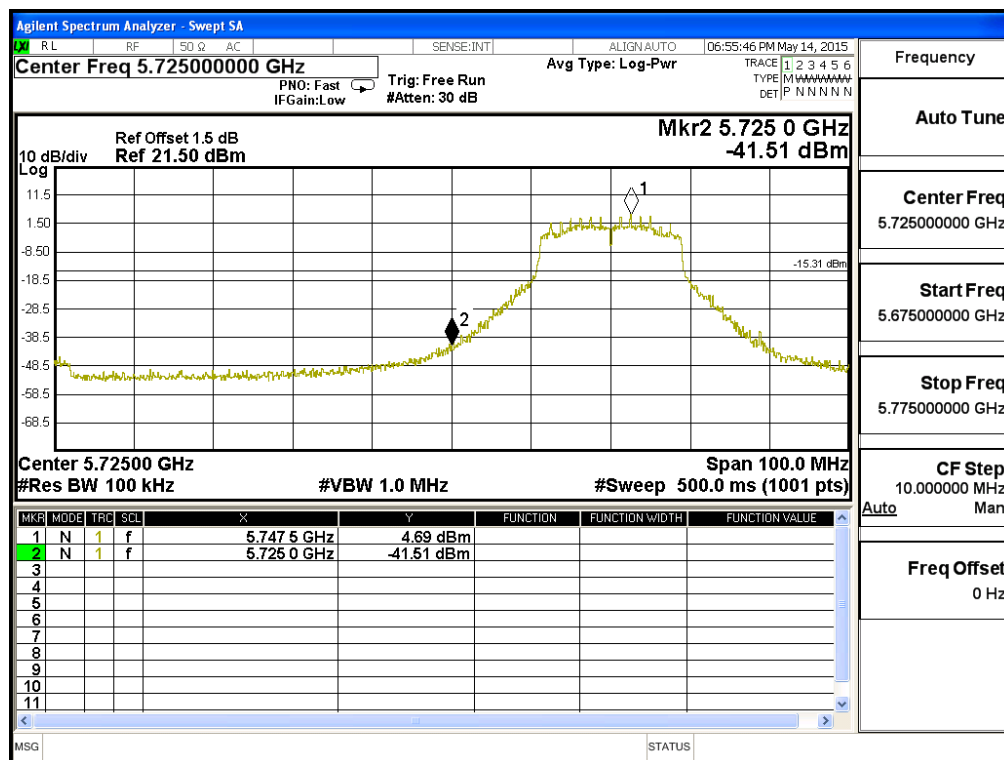

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)

## Chaia A


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5825                    | 52.94                              | >20                    | PASS   |

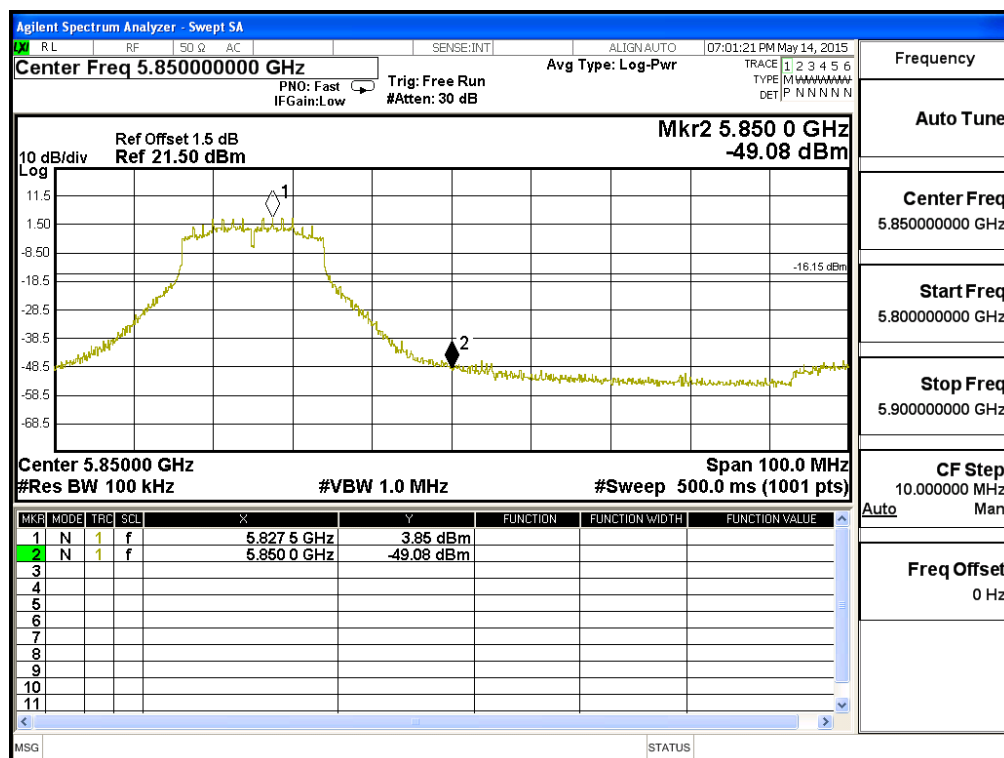

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)

## Chaia B


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5745                    | 45.64                              | >20                    | PASS   |

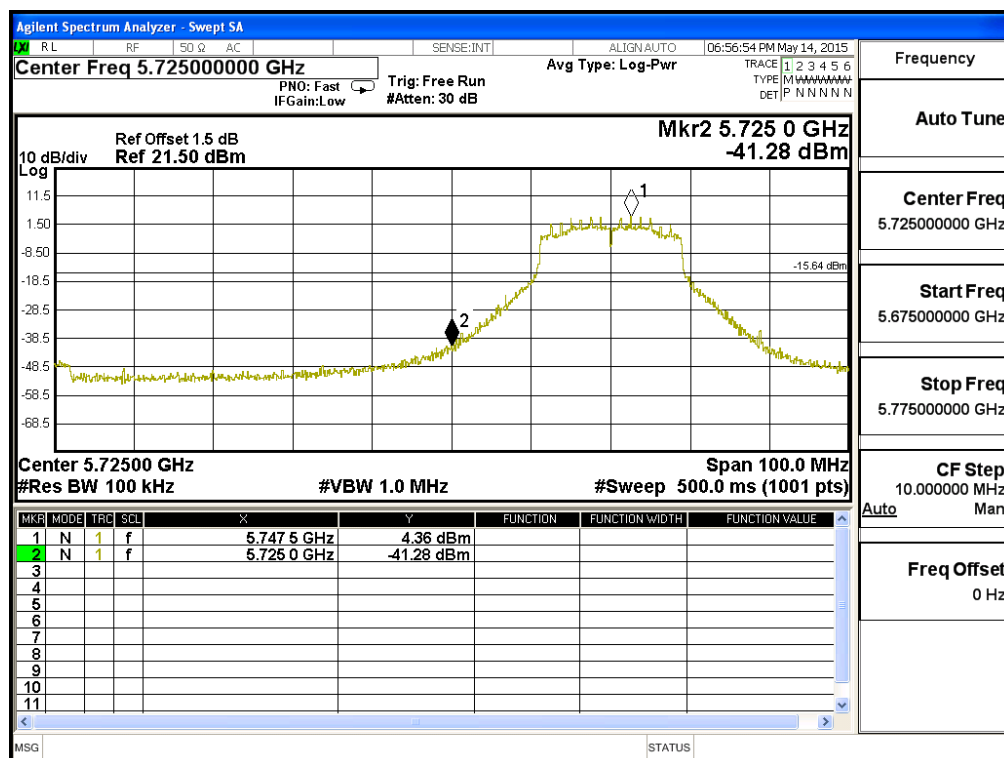

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)

## Chaia B


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5825                    | 53.30                              | >20                    | PASS   |

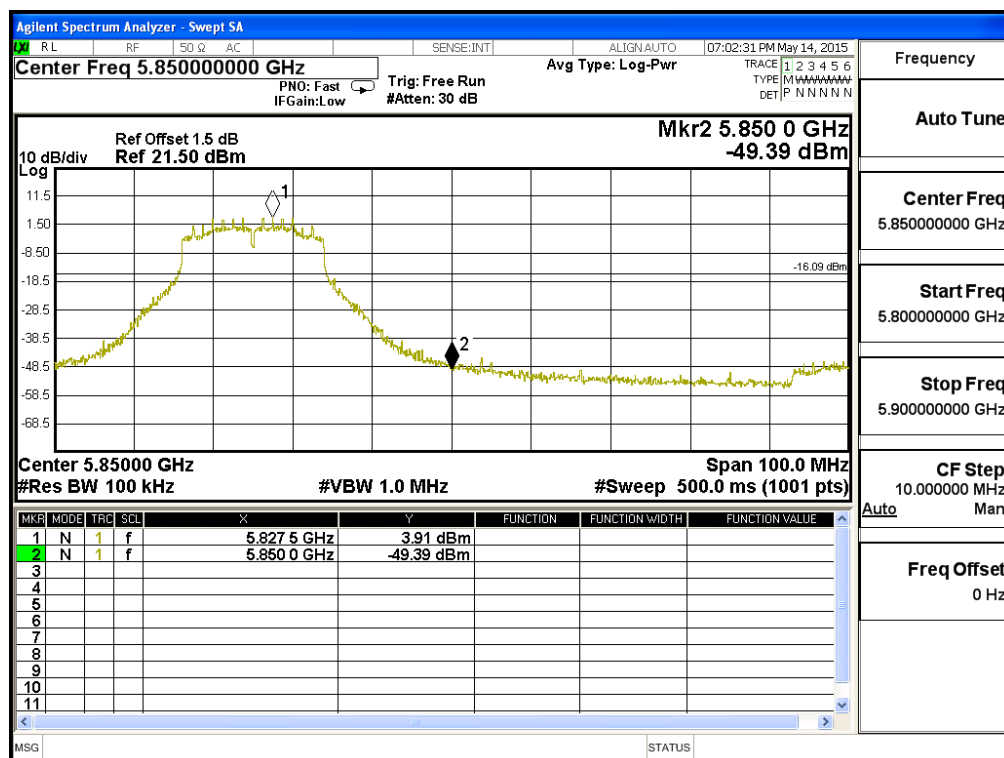

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-40BW\_30Mbps(5G Band)

## Chaia A

| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5755                    | 40.70                              | >20                    | PASS   |

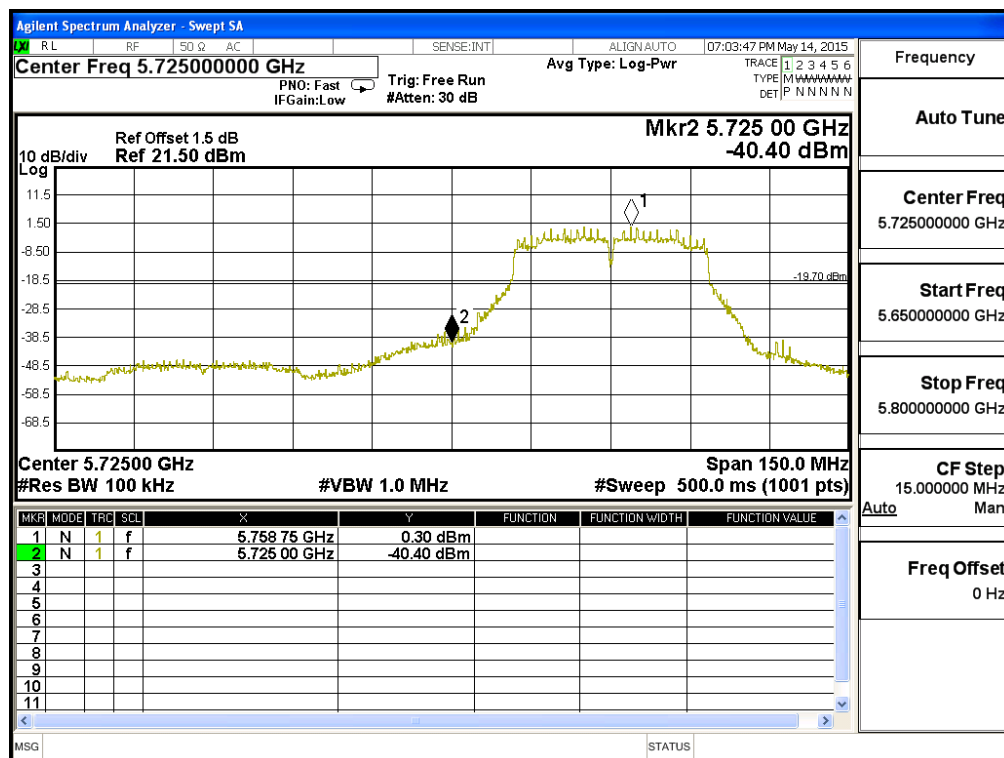




Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-40BW\_30Mbps(5G Band)

## Chaia A


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5795                    | 41.67                              | >20                    | PASS   |

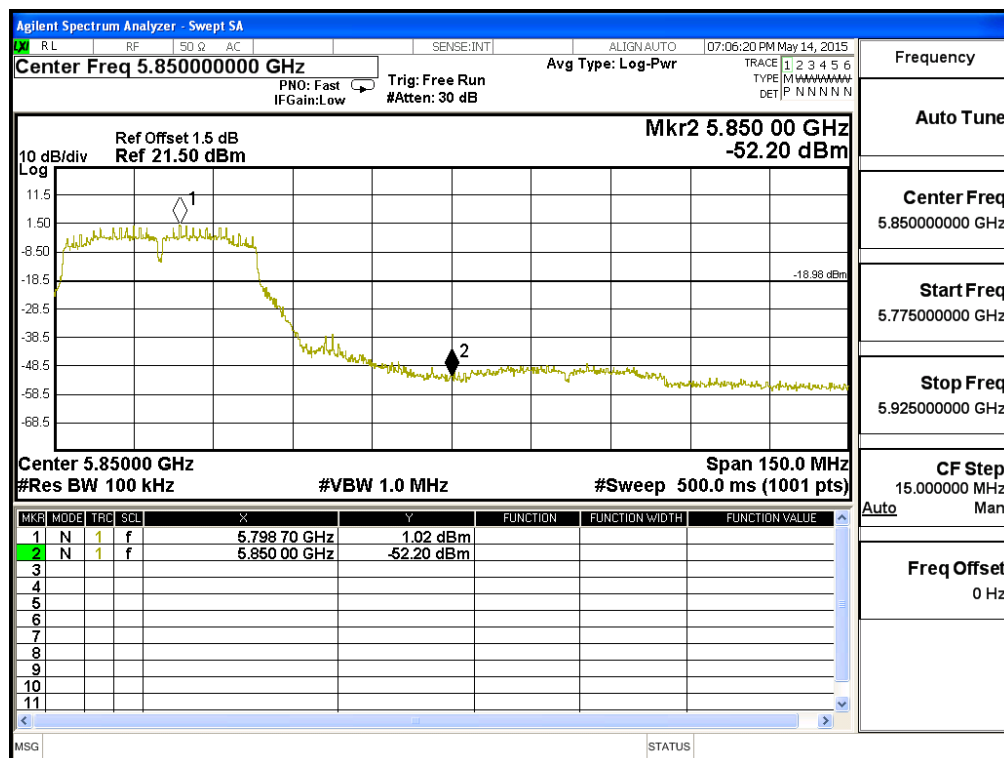

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-40BW\_30Mbps(5G Band)

## Chaia B


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5755                    | 53.22                              | >20                    | PASS   |

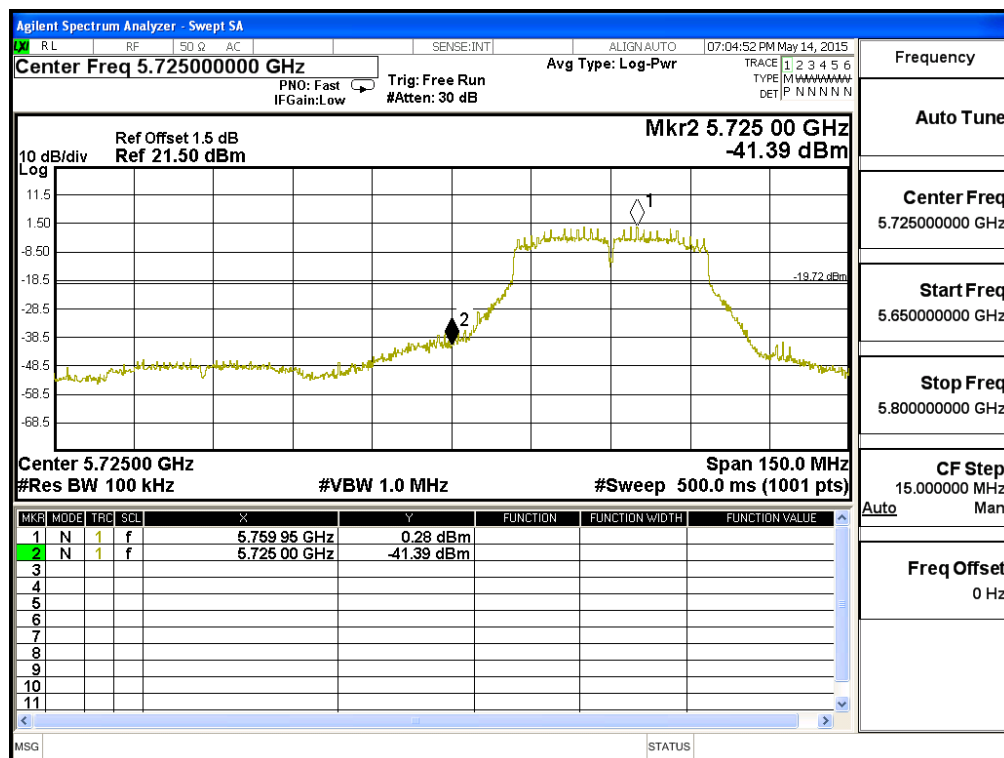

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-40BW\_30Mbps(5G Band)

## Chaia B


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5795                    | 52.43                              | >20                    | PASS   |

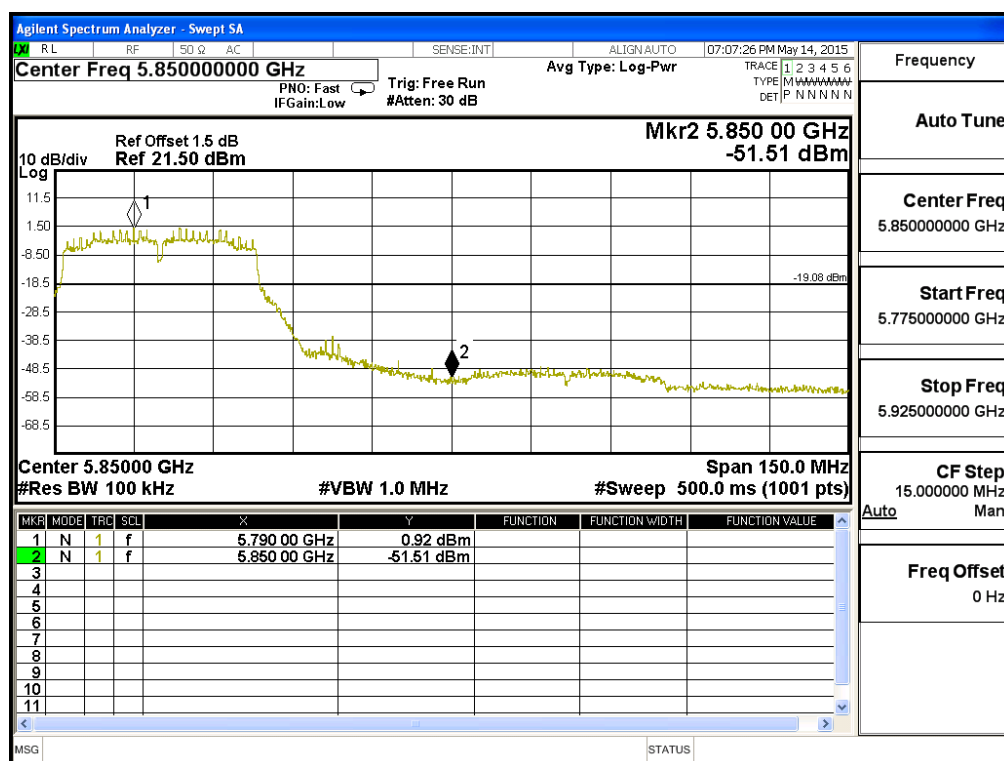

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11ac-80BW\_65Mbps(5G Band)

## Chaia A


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5775                    | 36.83                              | >30                    | PASS   |

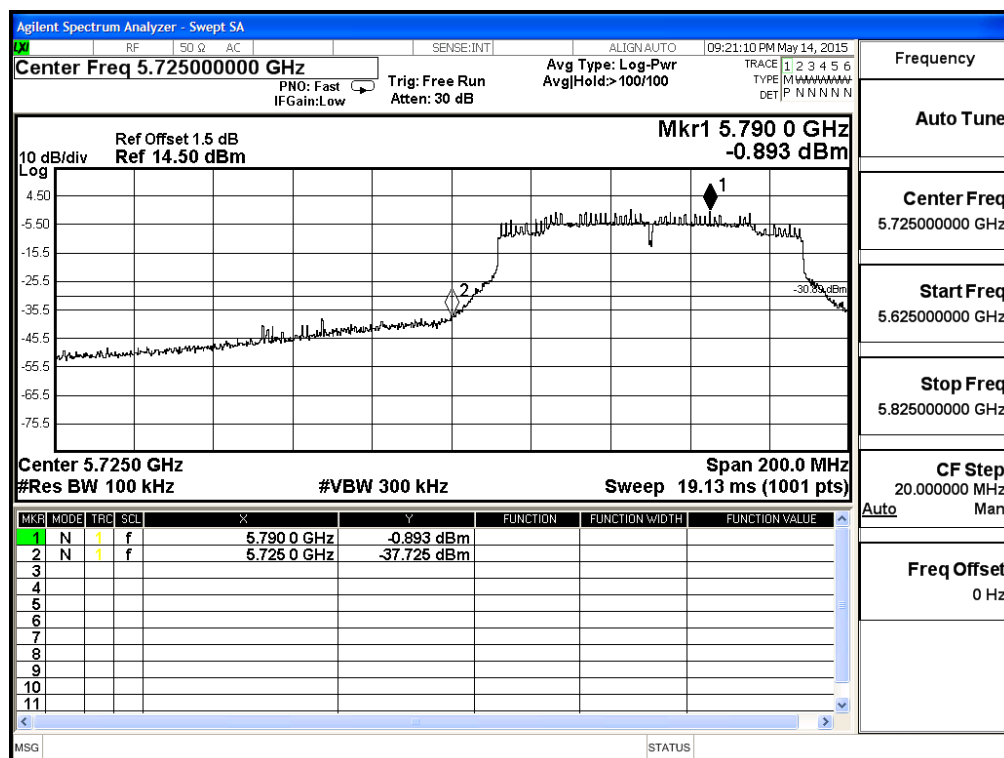

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11ac-80BW\_65Mbps(5G Band)

## Chaia B

| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5775                    | 37.67                              | >30                    | PASS   |

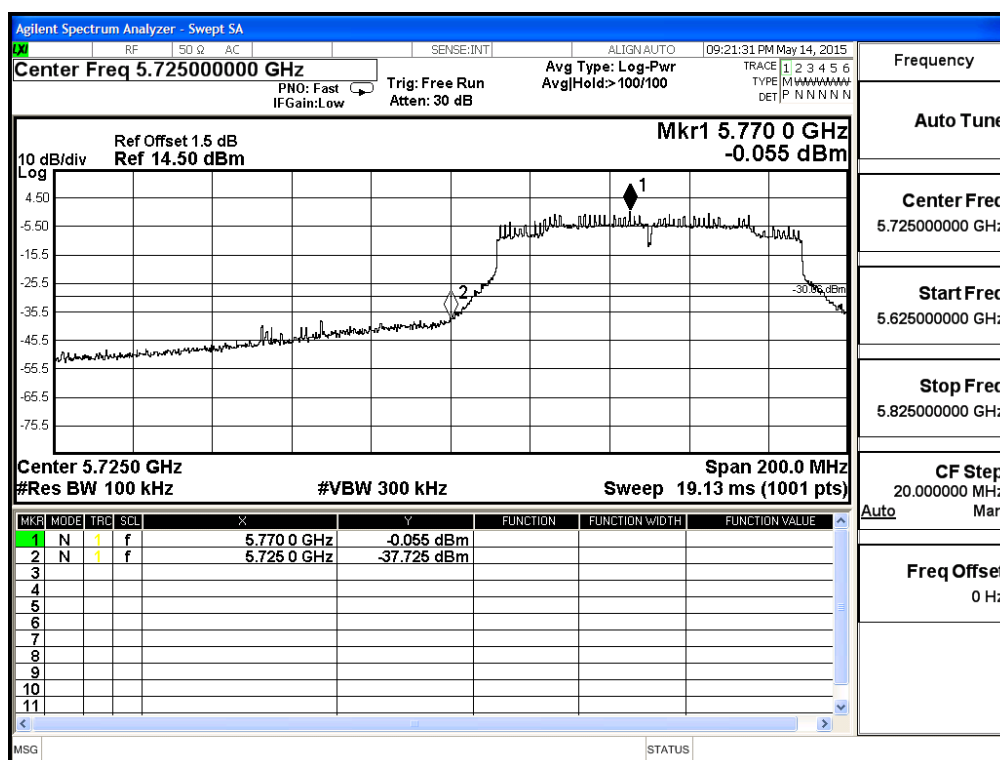


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

**RF Radiated Measurement (Horizontal):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 01 (Peak)    | 2390.000        | 31.509              | 40.384               | 71.893                  | 74.00               | 54.00                  | Pass   |
| 01 (Peak)    | 2400.000        | 31.561              | 58.357               | 89.918                  | 74.00               | 54.00                  | Pass   |
| 01 (Peak)    | 2410.400        | 31.627              | 80.929               | 112.556                 | --                  | --                     | Pass   |
| 01 (Average) | 2390.000        | 31.509              | 22.033               | 53.542                  | 74.00               | 54.00                  | Pass   |
| 01 (Average) | 2400.000        | 31.561              | 38.569               | 70.130                  | 74.00               | 54.00                  | Pass   |
| 01 (Average) | 2415.200        | 31.662              | 69.681               | 101.344                 | --                  | --                     | Pass   |


**Figure Channel 01:**

**Horizontal (Peak)**

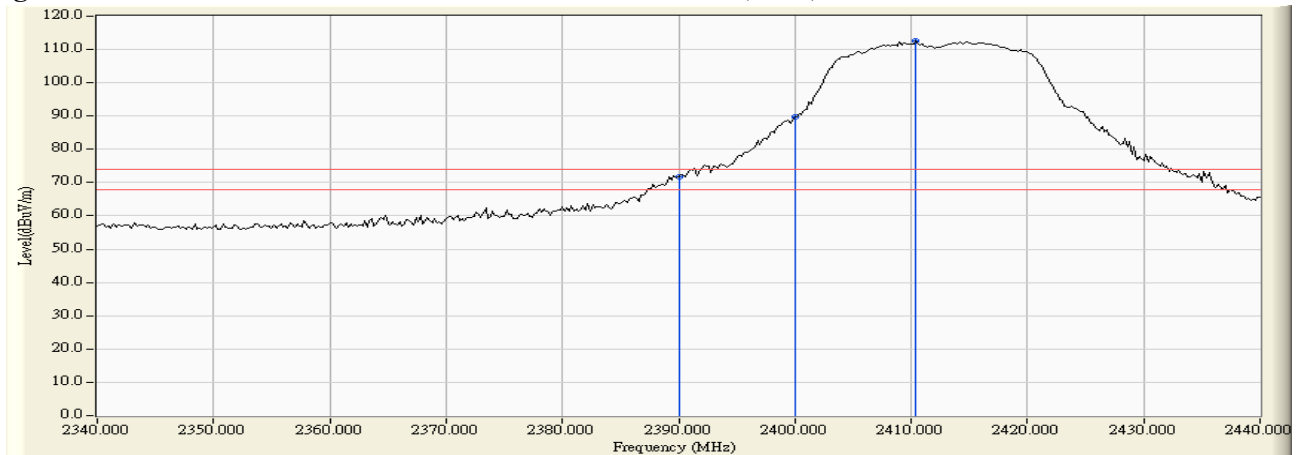

**Figure Channel 01:**

**Horizontal (Average)**

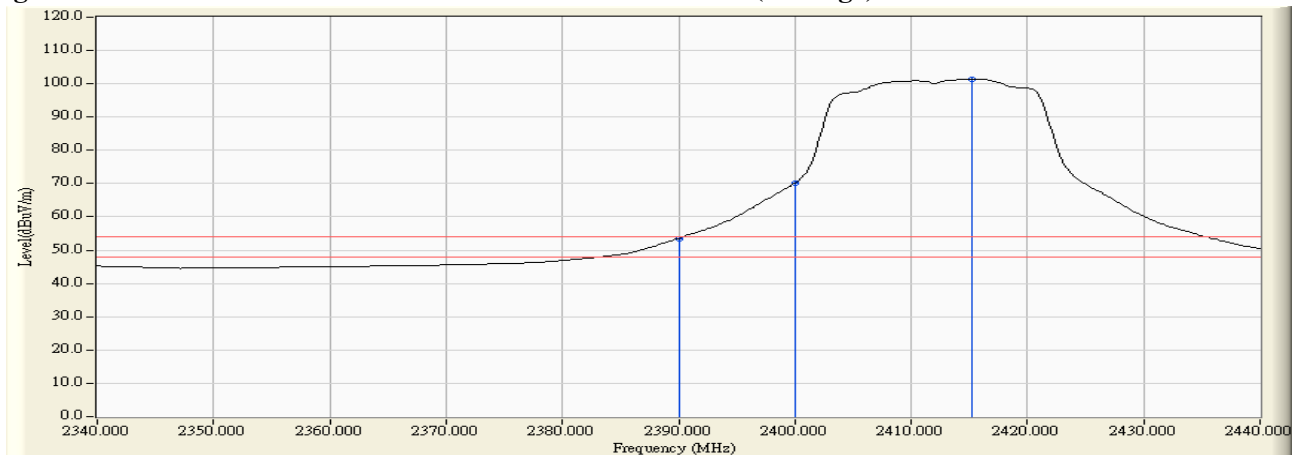

---

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

**RF Radiated Measurement (Vertical):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 01 (Peak)    | 2387.800        | 30.925              | 35.626               | 66.551                  | 74.00               | 54.00                  | Pass   |
| 01 (Peak)    | 2390.000        | 30.915              | 35.070               | 65.985                  | 74.00               | 54.00                  | Pass   |
| 01 (Peak)    | 2400.000        | 30.912              | 53.308               | 84.220                  | 74.00               | 54.00                  | Pass   |
| 01 (Peak)    | 2414.400        | 30.966              | 76.978               | 107.944                 | --                  | --                     | Pass   |
| 01 (Average) | 2390.000        | 30.915              | 19.314               | 50.229                  | 74.00               | 54.00                  | Pass   |
| 01 (Average) | 2400.000        | 30.912              | 35.391               | 66.303                  | 74.00               | 54.00                  | Pass   |
| 01 (Average) | 2415.200        | 30.971              | 66.086               | 97.057                  | --                  | --                     | Pass   |


**Figure Channel 01:**

**Vertical (Peak)**

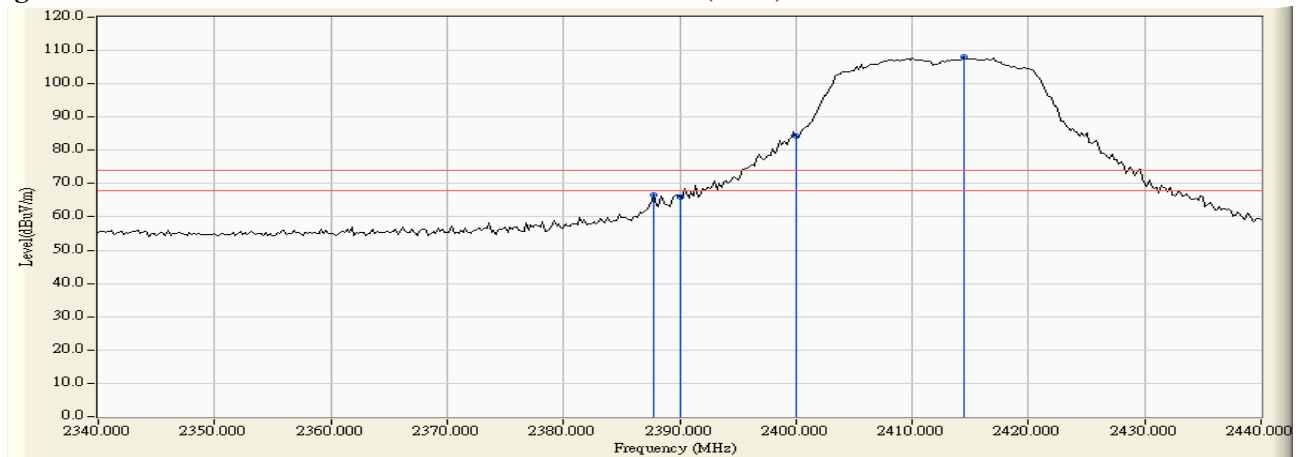

**Figure Channel 01:**

**Vertical (Average)**

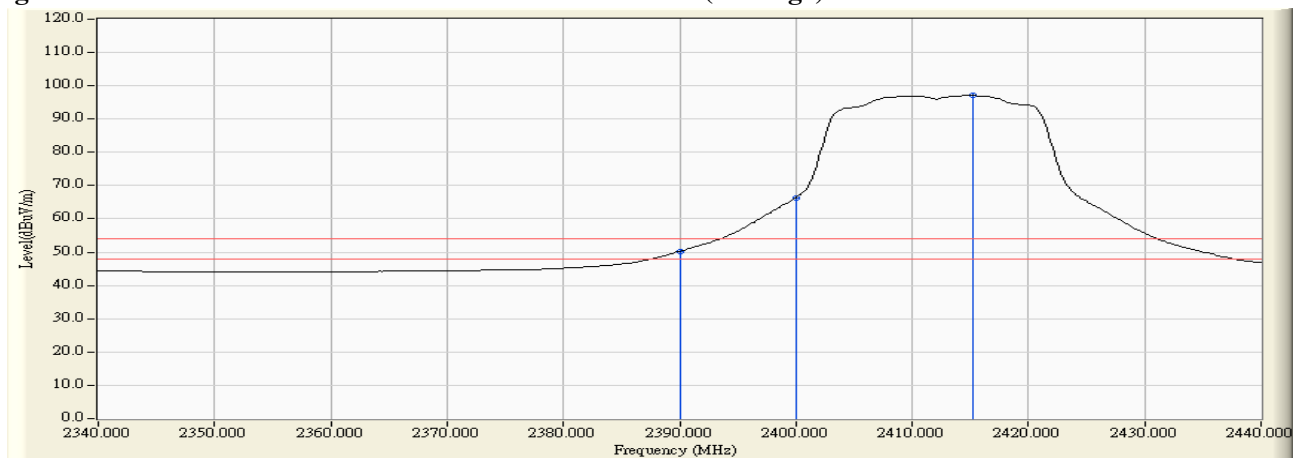



---

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

**RF Radiated Measurement (Horizontal):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 02 (Peak)    | 2389.400        | 31.507              | 38.979               | 70.486                  | 74.00               | 54.00                  | Pass   |
| 02 (Peak)    | 2390.000        | 31.509              | 37.207               | 68.716                  | 74.00               | 54.00                  | Pass   |
| 02 (Peak)    | 2400.000        | 31.561              | 55.950               | 87.511                  | 74.00               | 54.00                  | Pass   |
| 02 (Peak)    | 2414.000        | 31.654              | 85.531               | 117.184                 | --                  | --                     | Pass   |
| 02 (Average) | 2390.000        | 31.509              | 21.778               | 53.287                  | 74.00               | 54.00                  | Pass   |
| 02 (Average) | 2400.000        | 31.561              | 39.014               | 70.575                  | 74.00               | 54.00                  | Pass   |
| 02 (Average) | 2419.800        | 31.698              | 74.120               | 105.818                 | --                  | --                     | Pass   |


**Figure Channel 02:**

**Horizontal (Peak)**

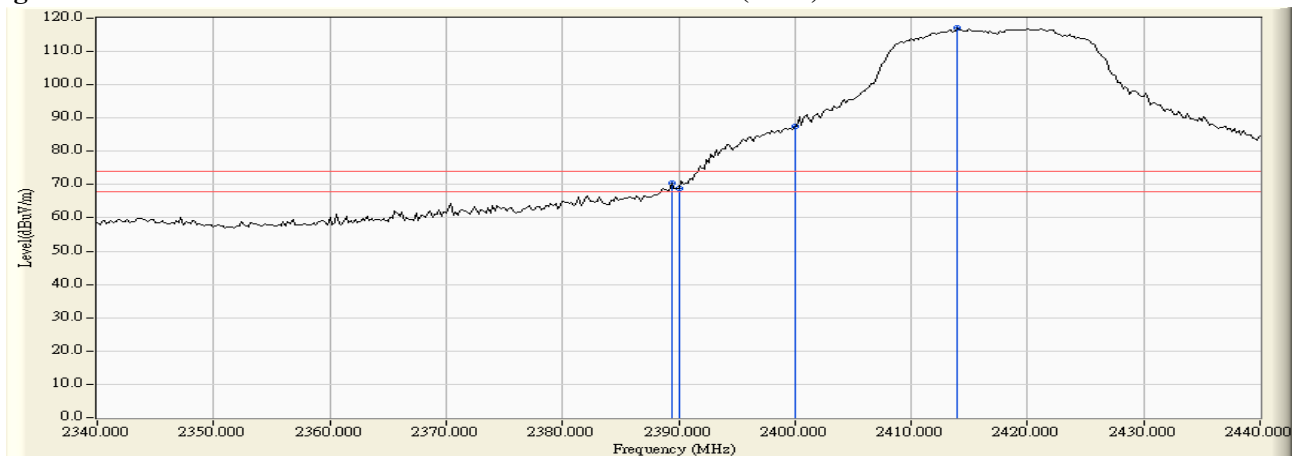

**Figure Channel 02:**

**Horizontal (Average)**

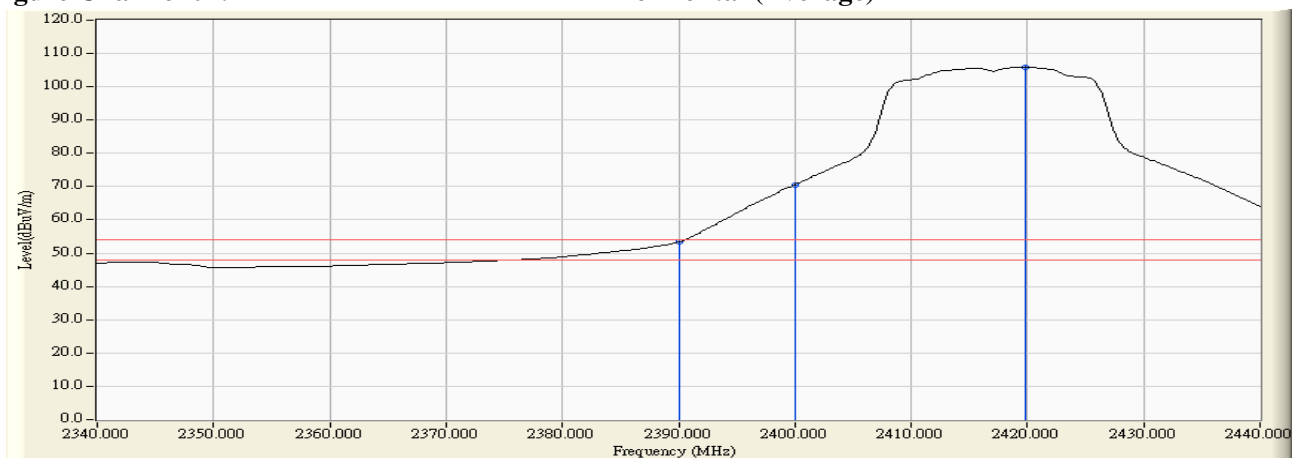

---

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

**RF Radiated Measurement (Vertical):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 02 (Peak)    | 2390.000        | 30.915              | 33.501               | 64.416                  | 74.00               | 54.00                  | Pass   |
| 02 (Peak)    | 2400.000        | 30.912              | 53.037               | 83.949                  | 74.00               | 54.00                  | Pass   |
| 02 (Peak)    | 2419.200        | 30.998              | 79.934               | 110.932                 | --                  | --                     | Pass   |
| 02 (Average) | 2390.000        | 30.915              | 17.559               | 48.474                  | 74.00               | 54.00                  | Pass   |
| 02 (Average) | 2400.000        | 30.912              | 34.410               | 65.322                  | 74.00               | 54.00                  | Pass   |
| 02 (Average) | 2419.400        | 30.999              | 69.304               | 100.304                 | --                  | --                     | Pass   |


**Figure Channel 02:**

**Vertical (Peak)**

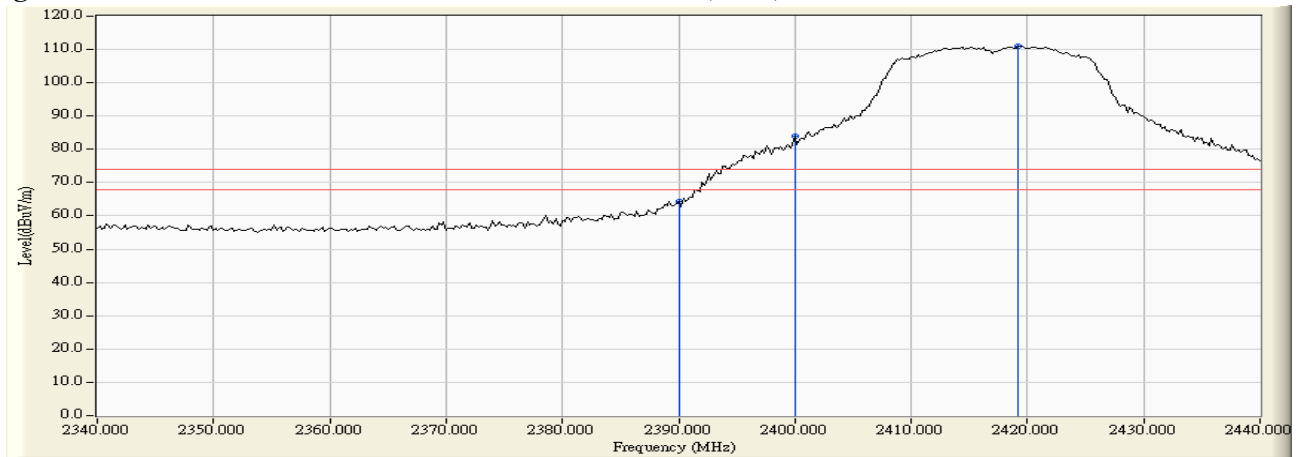

**Figure Channel 02:**

**Vertical (Average)**

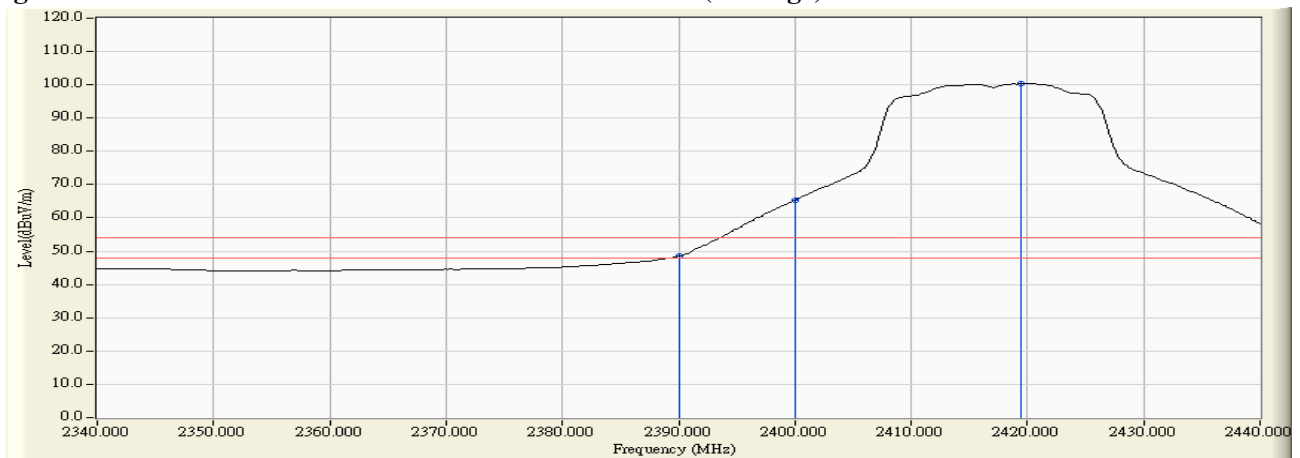

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

**RF Radiated Measurement (Horizontal):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 10 (Peak)    | 2459.700        | 32.002              | 84.815               | 116.817                 | --                  | --                     | Pass   |
| 10 (Peak)    | 2483.500        | 32.182              | 34.237               | 66.419                  | 74.00               | 54.00                  | Pass   |
| 10 (Peak)    | 2490.700        | 32.237              | 37.474               | 69.710                  | 74.00               | 54.00                  | Pass   |
| 10 (Average) | 2455.300        | 31.969              | 73.355               | 105.324                 | --                  | --                     | Pass   |
| 10 (Average) | 2483.500        | 32.182              | 21.224               | 53.406                  | 74.00               | 54.00                  | Pass   |


**Figure Channel 10:**

**Horizontal (Peak)**

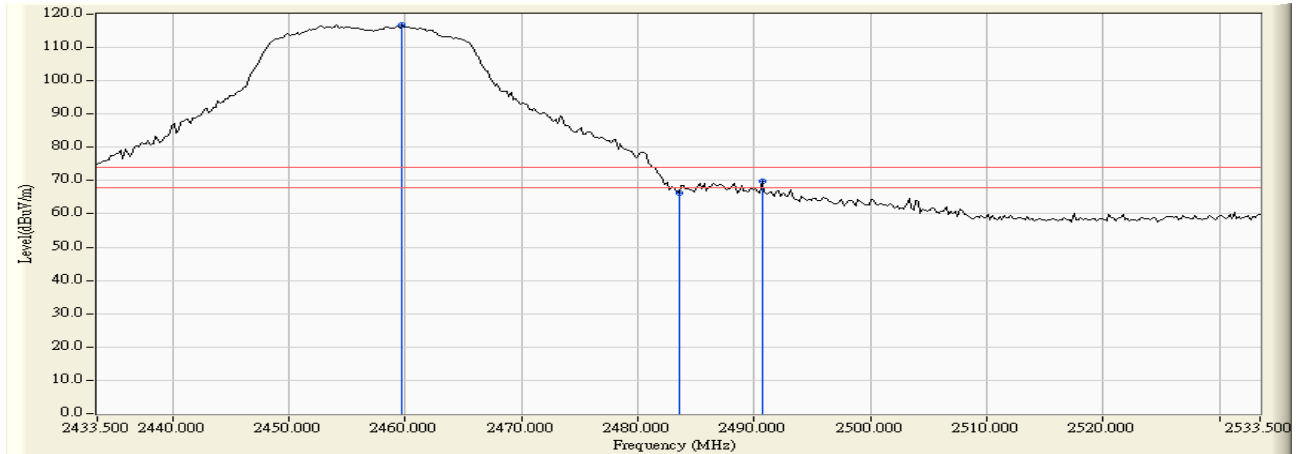

**Figure Channel 10:**

**Horizontal (Average)**

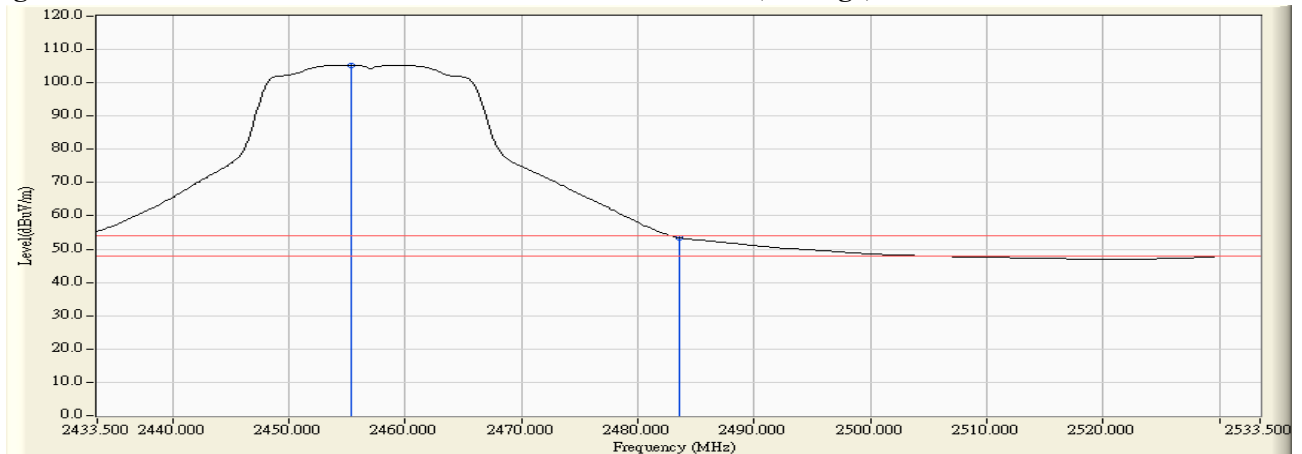

---

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

**RF Radiated Measurement (Vertical):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 10 (Peak)    | 2453.900        | 31.235              | 77.169               | 108.404                 | --                  | --                     | Pass   |
| 10 (Peak)    | 2483.500        | 31.435              | 29.727               | 61.162                  | 74.00               | 54.00                  | Pass   |
| 10 (Peak)    | 2490.100        | 31.480              | 26.862               | 58.342                  | 74.00               | 54.00                  | Pass   |
| 10 (Average) | 2453.900        | 31.235              | 66.670               | 97.905                  | --                  | --                     | Pass   |
| 10 (Average) | 2483.500        | 31.435              | 17.891               | 49.326                  | 74.00               | 54.00                  | Pass   |


**Figure Channel 10:**

**Vertical (Peak)**

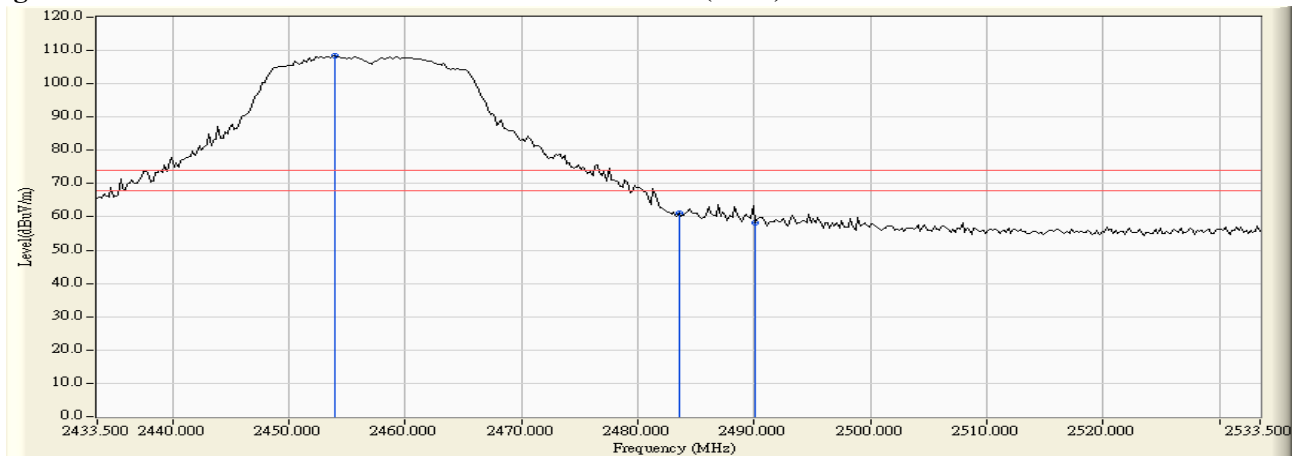

**Figure Channel 10:**

**Vertical (Average)**

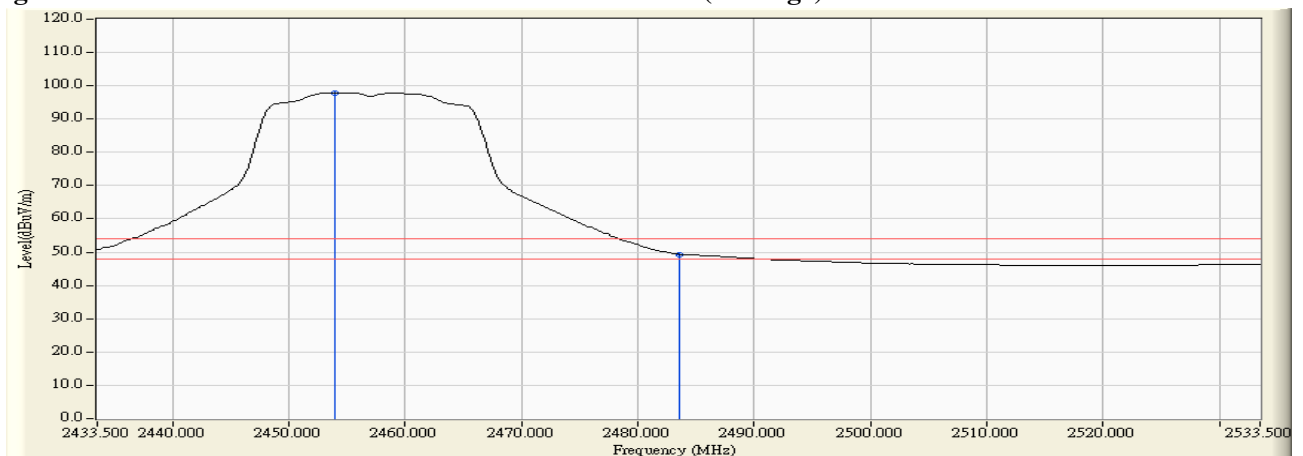



---

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)


**RF Radiated Measurement (Horizontal):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 11 (Peak)    | 2464.700        | 32.039              | 81.982               | 114.022                 | --                  | --                     | Pass   |
| 11 (Peak)    | 2483.500        | 32.182              | 40.382               | 72.564                  | 74.00               | 54.00                  | Pass   |
| 11 (Average) | 2459.500        | 32.001              | 70.983               | 102.983                 | --                  | --                     | Pass   |
| 11 (Average) | 2483.500        | 32.182              | 21.242               | 53.424                  | 74.00               | 54.00                  | Pass   |

**Figure Channel 11: Horizontal (Peak)**

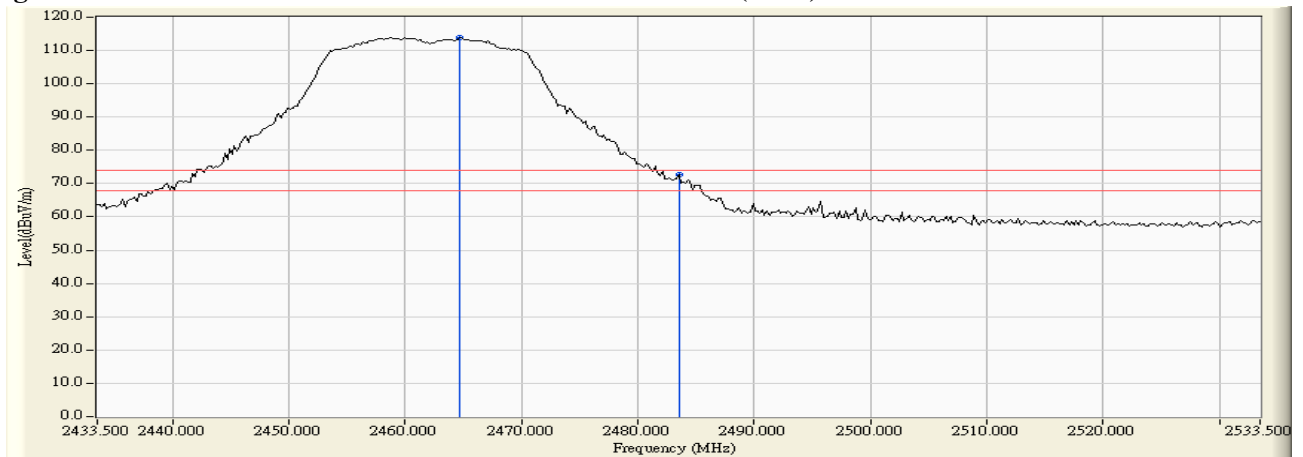

**Figure Channel 11: Horizontal (Average)**

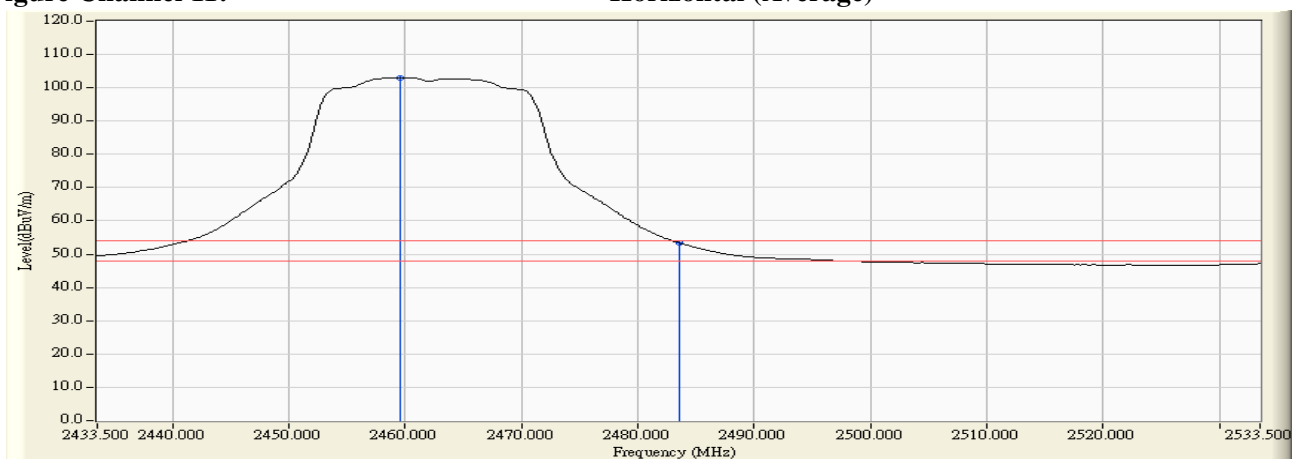

---

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)


**RF Radiated Measurement (Vertical):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 11 (Peak)    | 2459.900        | 31.276              | 74.959               | 106.235                 | --                  | --                     | Pass   |
| 11 (Peak)    | 2483.500        | 31.435              | 30.335               | 61.770                  | 74.00               | 54.00                  | Pass   |
| 11 (Peak)    | 2484.100        | 31.439              | 32.728               | 64.167                  | 74.00               | 54.00                  | Pass   |
| 11 (Average) | 2459.300        | 31.272              | 64.149               | 95.421                  | --                  | --                     | Pass   |
| 11 (Average) | 2483.500        | 31.435              | 16.837               | 48.272                  | 74.00               | 54.00                  | Pass   |

**Figure Channel 11: Vertical (Peak)**

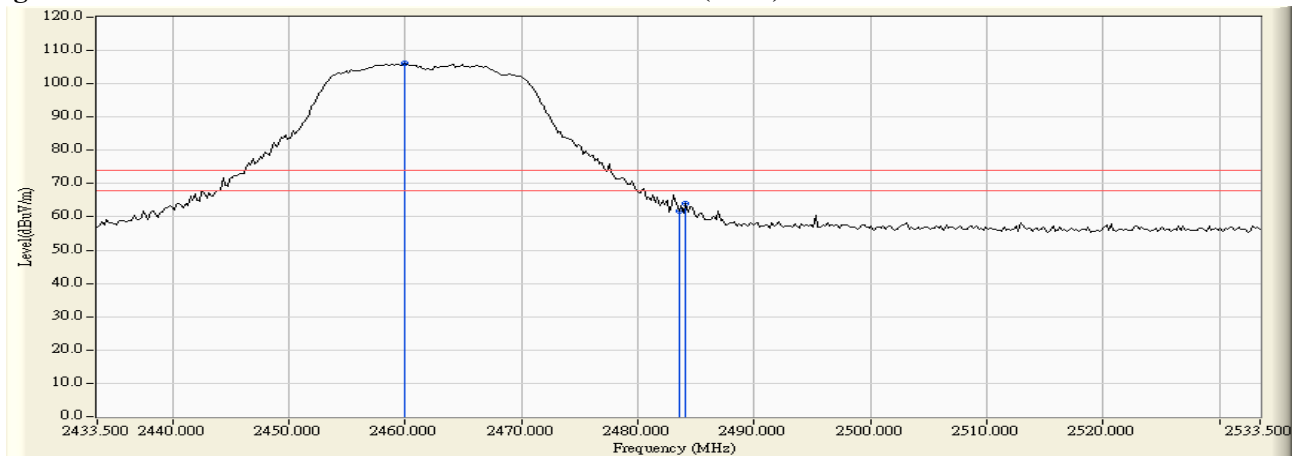

**Figure Channel 11: Vertical (Average)**

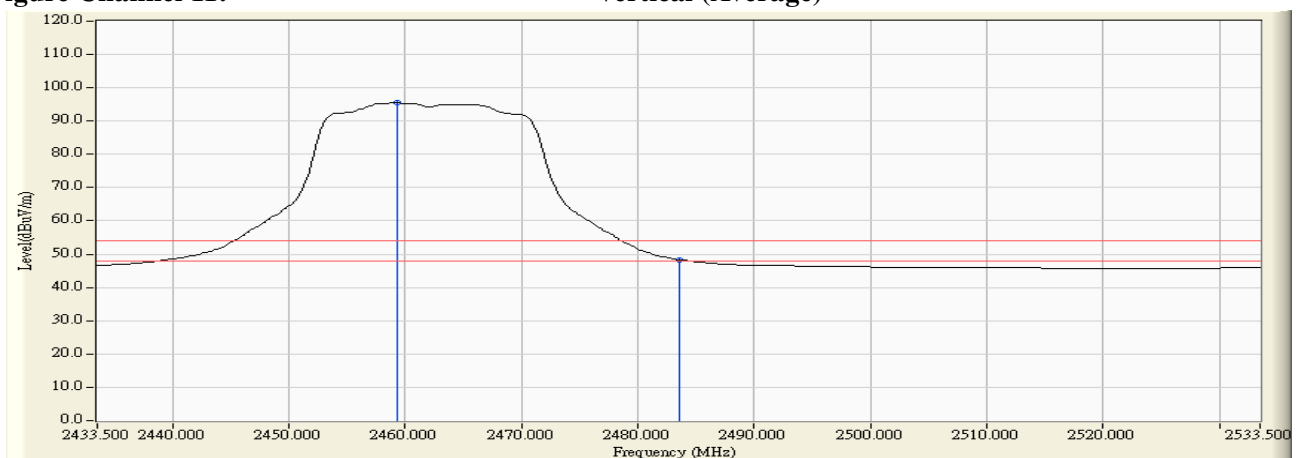

## Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

**RF Radiated Measurement (Horizontal):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 12 (Peak)    | 2469.700        | 32.078              | 76.935               | 109.013                 | --                  | --                     | Pass   |
| 12 (Peak)    | 2483.500        | 32.182              | 39.408               | 71.590                  | 74.00               | 54.00                  | Pass   |
| 12 (Average) | 2464.300        | 32.037              | 65.842               | 97.879                  | --                  | --                     | Pass   |
| 12 (Average) | 2483.500        | 32.182              | 21.344               | 53.526                  | 74.00               | 54.00                  | Pass   |


**Figure Channel 12:**

**Horizontal (Peak)**

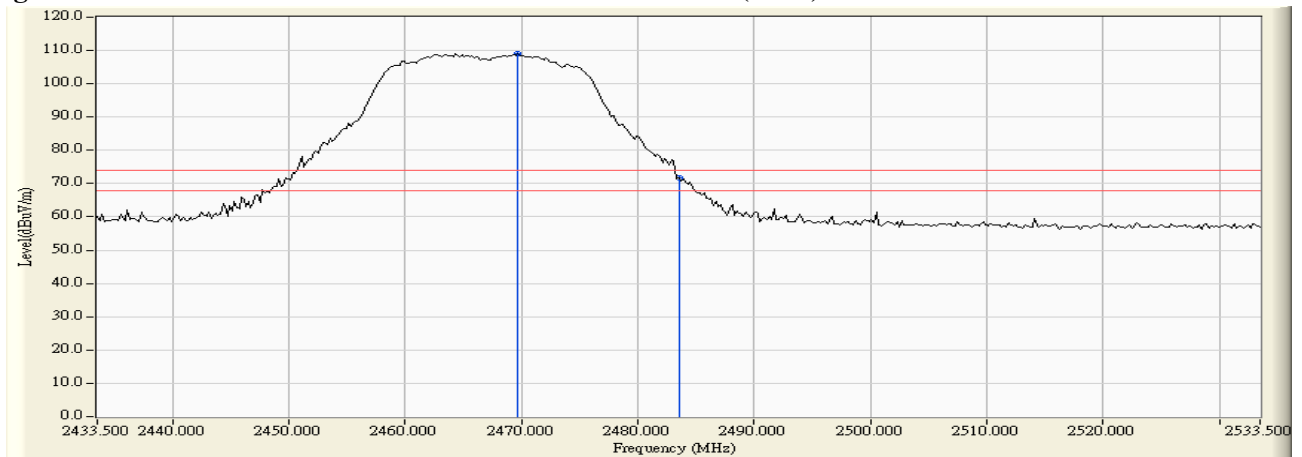

**Figure Channel 12:**

**Horizontal (Average)**

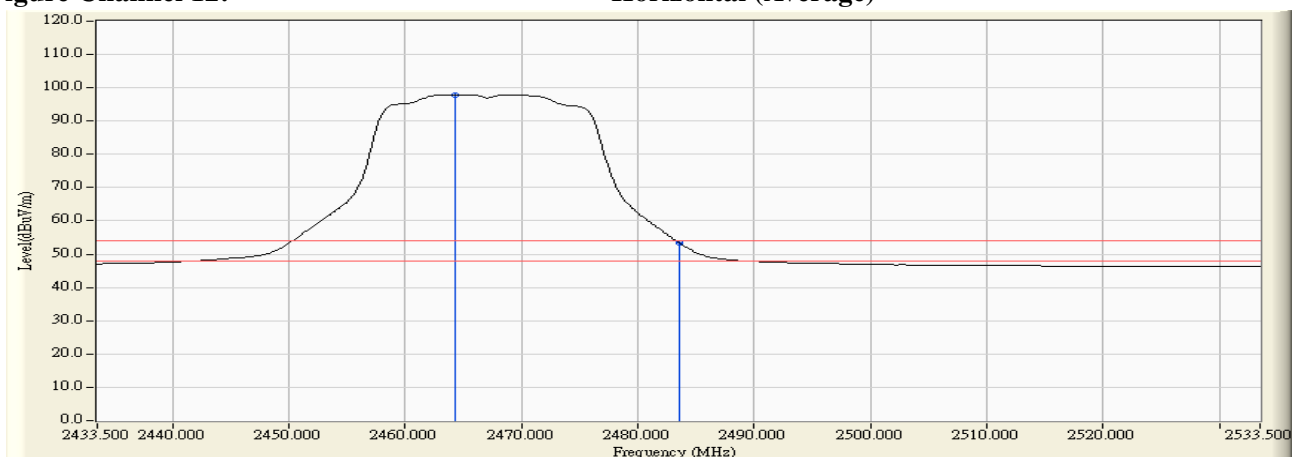

---

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)


**RF Radiated Measurement (Vertical):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 12 (Peak)    | 2462.500        | 31.294              | 70.101               | 101.395                 | --                  | --                     | Pass   |
| 12 (Peak)    | 2483.500        | 31.435              | 33.434               | 64.869                  | 74.00               | 54.00                  | Pass   |
| 12 (Average) | 2464.500        | 31.307              | 59.236               | 90.543                  | --                  | --                     | Pass   |
| 12 (Average) | 2483.500        | 31.435              | 17.610               | 49.045                  | 74.00               | 54.00                  | Pass   |

**Figure Channel 12: Vertical (Peak)**

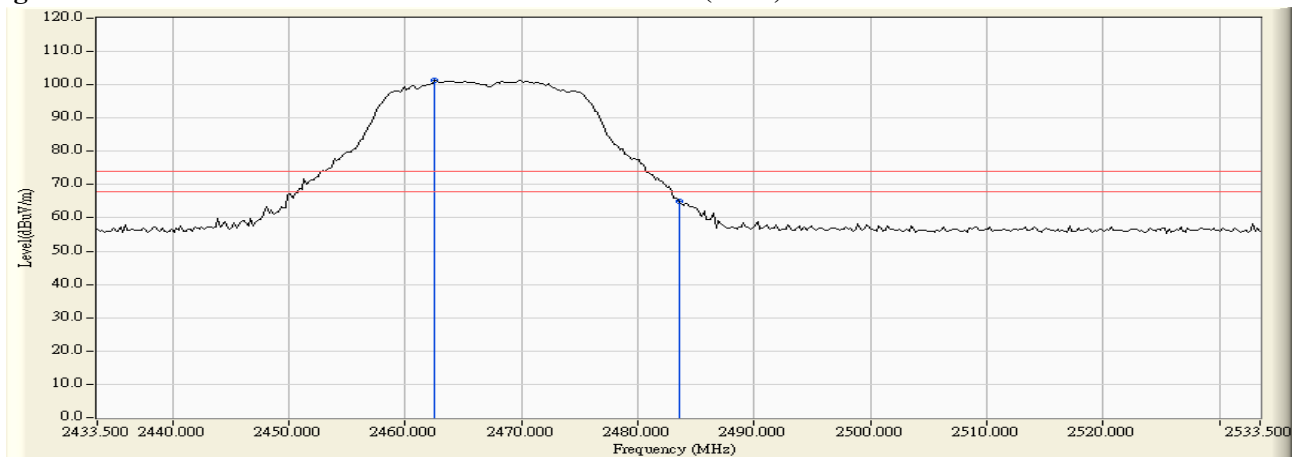

**Figure Channel 12: Vertical (Average)**

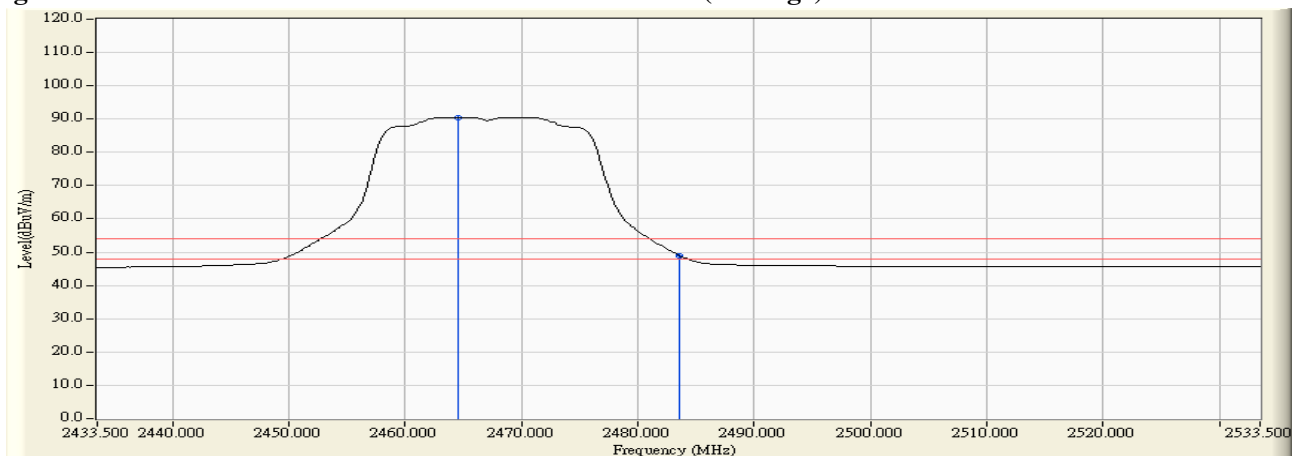



---

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

**RF Radiated Measurement (Horizontal):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBUV) | Emission Level (dBUV/m) | Peak Limit (dBUV/m) | Average Limit (dBUV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 03 (Peak)    | 2390.000        | 31.509              | 36.410               | 67.919                  | 74.00               | 54.00                  | Pass   |
| 03 (Peak)    | 2400.000        | 31.561              | 50.076               | 81.637                  | 74.00               | 54.00                  | Pass   |
| 03 (Peak)    | 2434.000        | 31.807              | 76.527               | 108.334                 | --                  | --                     | Pass   |
| 03 (Average) | 2390.000        | 31.509              | 21.609               | 53.118                  | 74.00               | 54.00                  | Pass   |
| 03 (Average) | 2400.000        | 31.561              | 36.401               | 67.962                  | 74.00               | 54.00                  | Pass   |
| 03 (Average) | 2429.400        | 31.772              | 61.669               | 93.441                  | --                  | --                     | Pass   |


**Figure Channel 03:**

**Horizontal (Peak)**

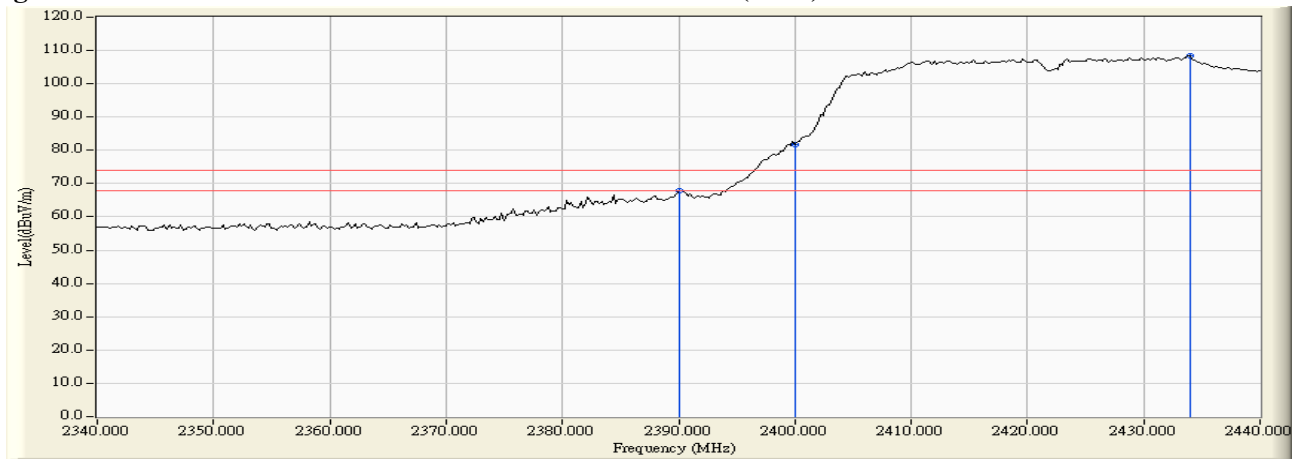

**Figure Channel 03:**

**Horizontal (Average)**

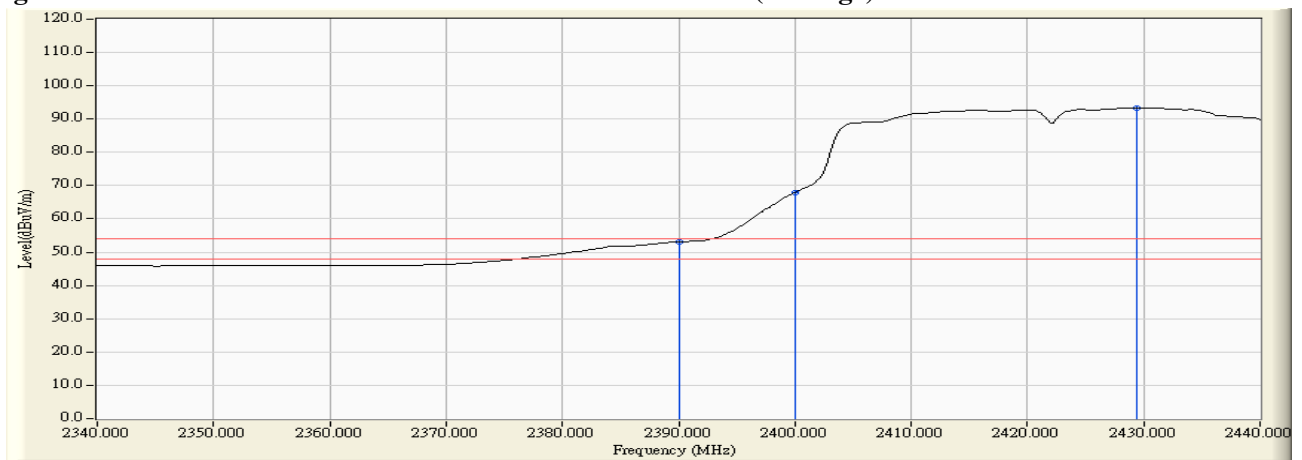

---

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

**RF Radiated Measurement (Vertical):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 03 (Peak)    | 2390.000        | 30.915              | 31.212               | 62.127                  | 74.00               | 54.00                  | Pass   |
| 03 (Peak)    | 2400.000        | 30.912              | 44.610               | 75.522                  | 74.00               | 54.00                  | Pass   |
| 03 (Peak)    | 2430.000        | 31.071              | 71.639               | 102.710                 | --                  | --                     | Pass   |
| 03 (Average) | 2390.000        | 30.915              | 17.529               | 48.444                  | 74.00               | 54.00                  | Pass   |
| 03 (Average) | 2400.000        | 30.912              | 31.772               | 62.684                  | 74.00               | 54.00                  | Pass   |
| 03 (Average) | 2428.400        | 31.060              | 57.267               | 88.328                  | --                  | --                     | Pass   |


**Figure Channel 03:**

**Vertical (Peak)**

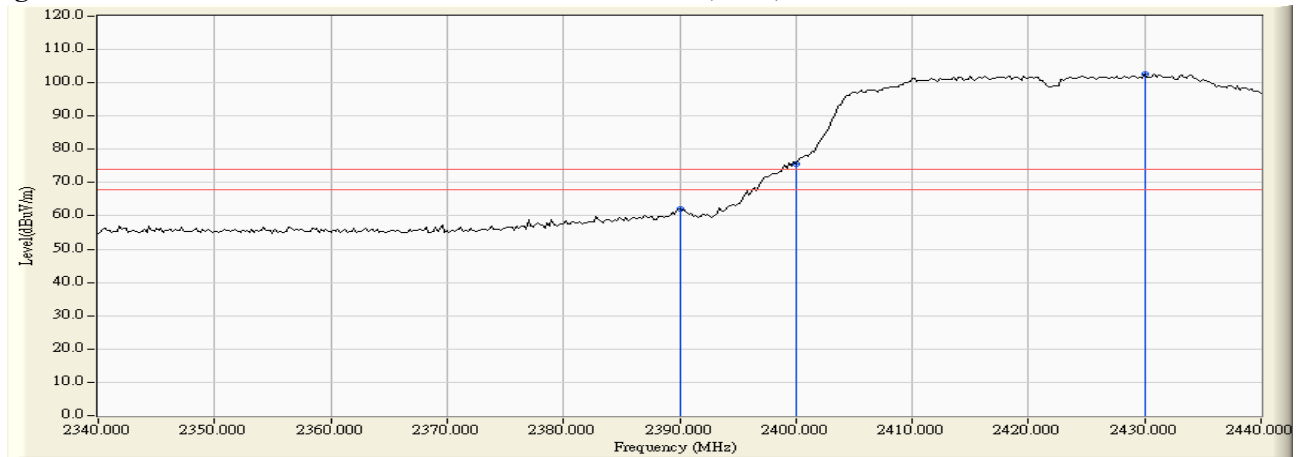

**Figure Channel 03:**

**Vertical (Average)**

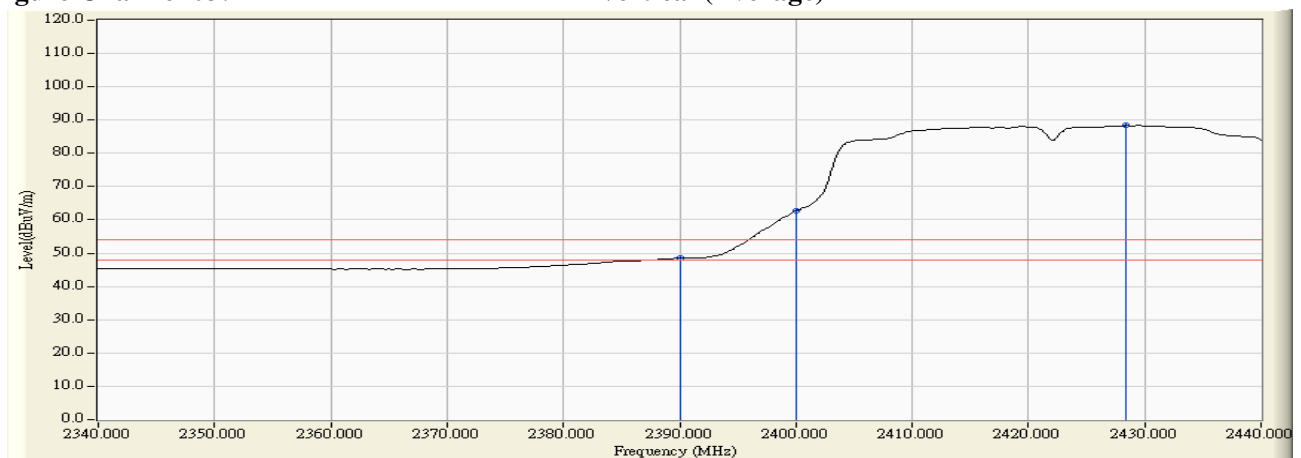

---

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

**RF Radiated Measurement (Horizontal):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 04 (Peak)    | 2390.000        | 31.509              | 35.601               | 67.110                  | 74.00               | 54.00                  | Pass   |
| 04 (Peak)    | 2400.000        | 31.561              | 40.682               | 72.243                  | 74.00               | 54.00                  | Pass   |
| 04 (Peak)    | 2439.000        | 31.845              | 76.976               | 108.821                 | --                  | --                     | Pass   |
| 04 (Average) | 2390.000        | 31.509              | 21.946               | 53.455                  | 74.00               | 54.00                  | Pass   |
| 04 (Average) | 2400.000        | 31.561              | 27.024               | 58.585                  | 74.00               | 54.00                  | Pass   |
| 04 (Average) | 2434.400        | 31.809              | 62.366               | 94.176                  | --                  | --                     | Pass   |


**Figure Channel 04:**

**Horizontal (Peak)**

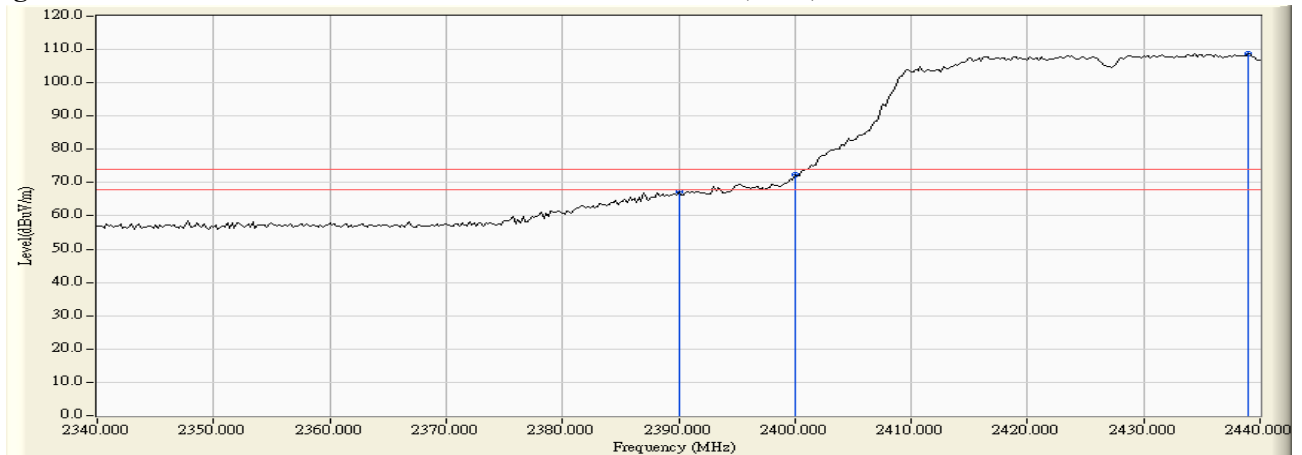

**Figure Channel 04:**

**Horizontal (Average)**

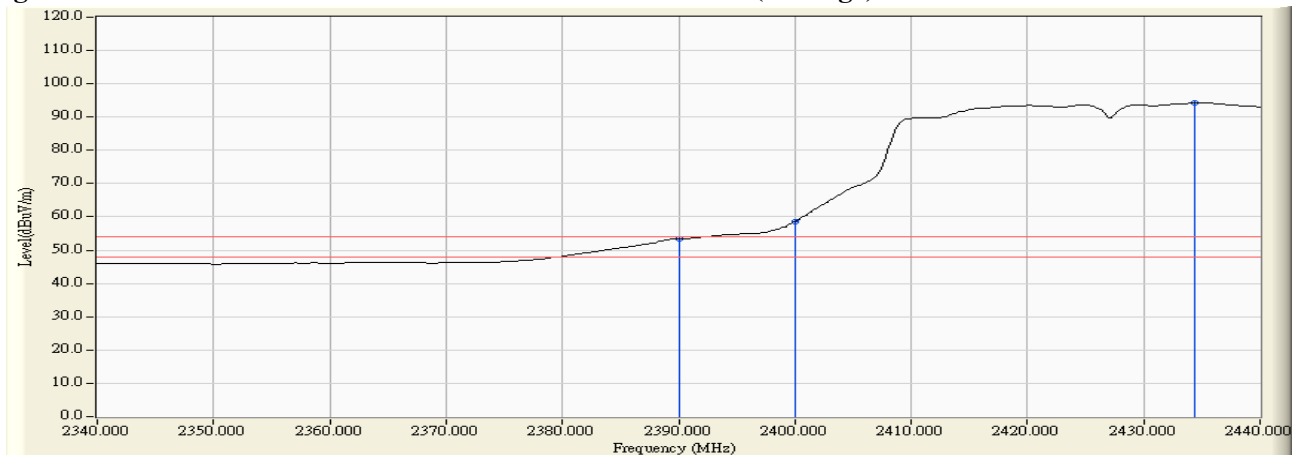

---

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

**RF Radiated Measurement (Vertical):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 04 (Peak)    | 2389.000        | 30.920              | 31.021               | 61.941                  | 74.00               | 54.00                  | Pass   |
| 04 (Peak)    | 2390.000        | 30.915              | 29.680               | 60.595                  | 74.00               | 54.00                  | Pass   |
| 04 (Peak)    | 2400.000        | 30.912              | 35.222               | 66.134                  | 74.00               | 54.00                  | Pass   |
| 04 (Peak)    | 2435.200        | 31.107              | 72.255               | 103.362                 | --                  | --                     | Pass   |
| 04 (Average) | 2390.000        | 30.915              | 17.655               | 48.570                  | 74.00               | 54.00                  | Pass   |
| 04 (Average) | 2400.000        | 30.912              | 22.757               | 53.669                  | 74.00               | 54.00                  | Pass   |
| 04 (Average) | 2434.600        | 31.102              | 57.937               | 89.040                  | --                  | --                     | Pass   |


**Figure Channel 04:**

**Vertical (Peak)**

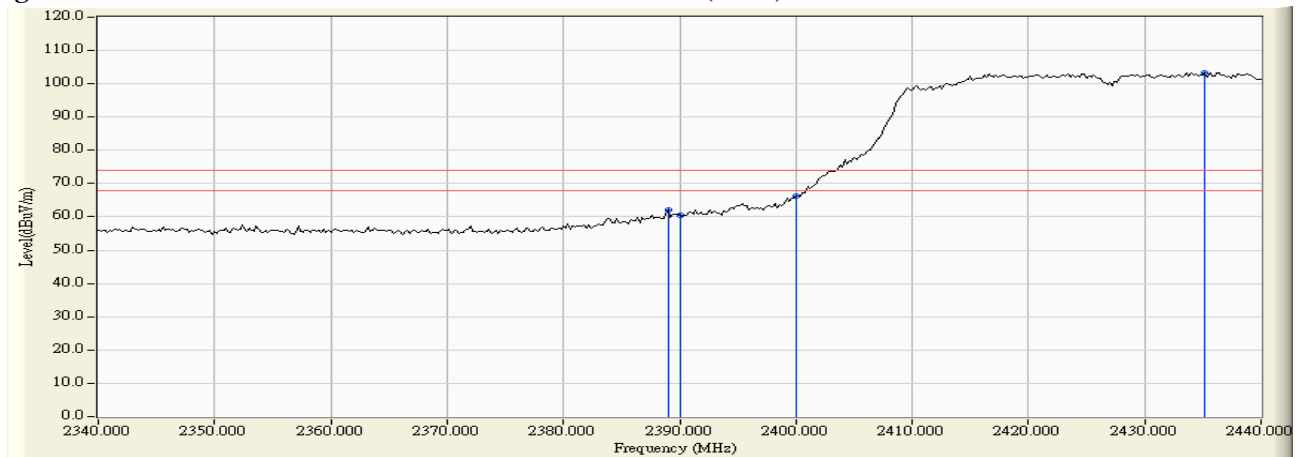

**Figure Channel 04:**

**Vertical (Average)**

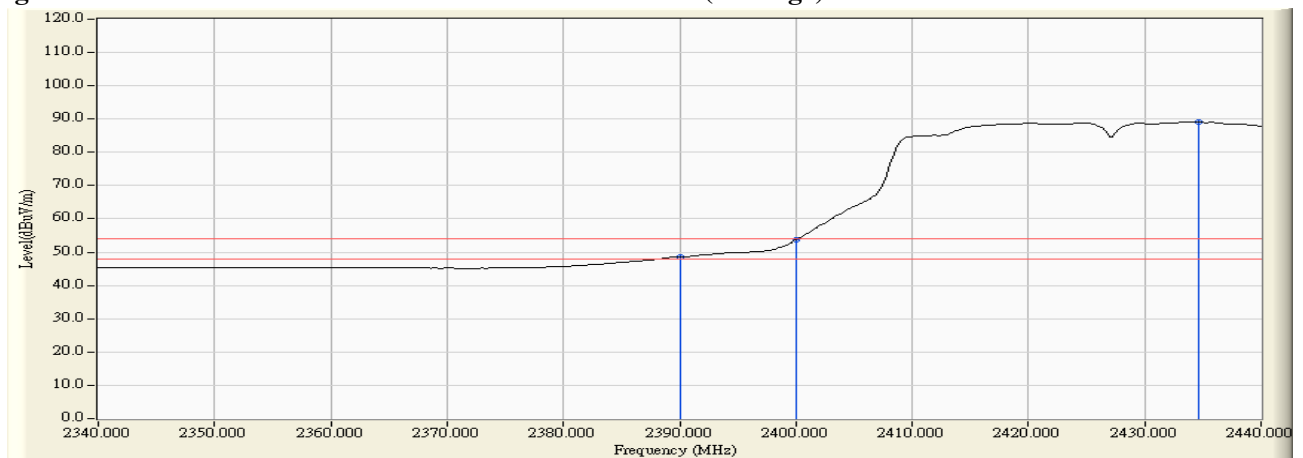



## Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

**RF Radiated Measurement (Horizontal):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 09 (Peak)    | 2455.900        | 31.973              | 78.045               | 110.018                 | --                  | --                     | Pass   |
| 09 (Peak)    | 2483.500        | 32.182              | 33.067               | 65.249                  | 74.00               | 54.00                  | Pass   |
| 09 (Peak)    | 2484.500        | 32.190              | 34.934               | 67.124                  | 74.00               | 54.00                  | Pass   |
| 09 (Average) | 2458.100        | 31.990              | 65.769               | 97.759                  | --                  | --                     | Pass   |
| 09 (Average) | 2483.500        | 32.182              | 21.190               | 53.372                  | 74.00               | 54.00                  | Pass   |


**Figure Channel 09:**

**Horizontal (Peak)**

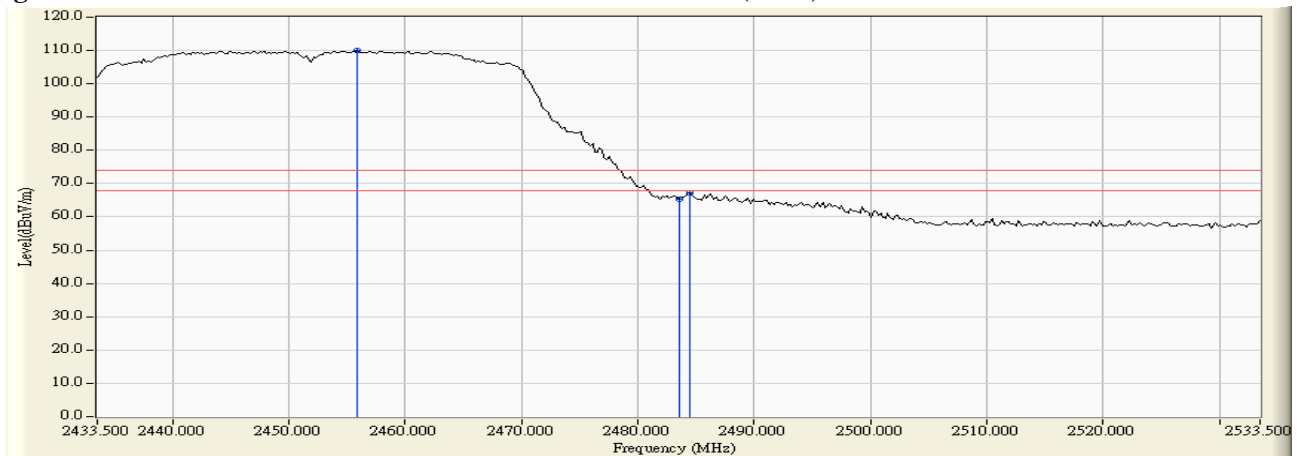

**Figure Channel 09:**

**Horizontal (Average)**

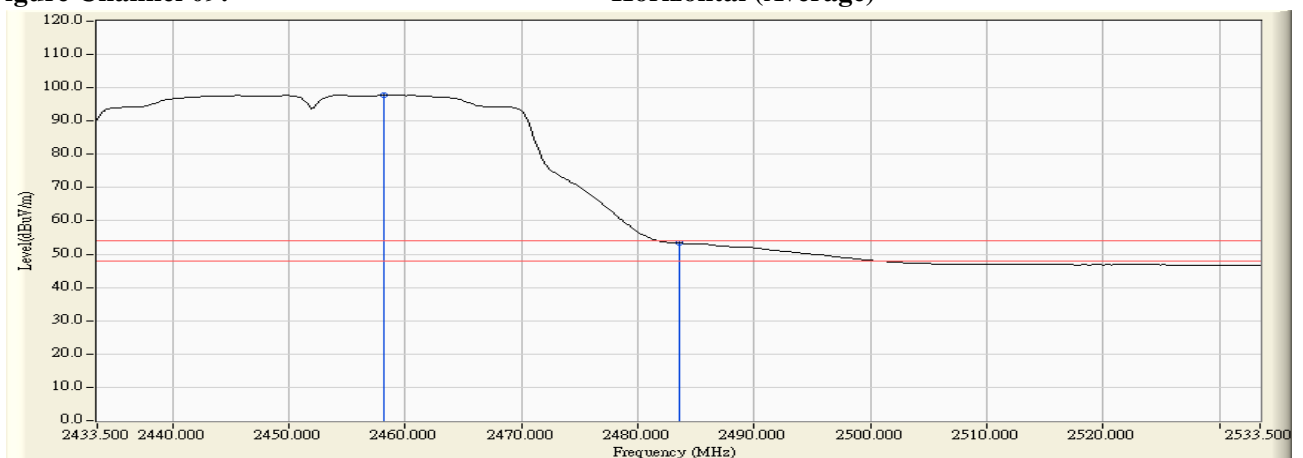

---

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

**RF Radiated Measurement (Vertical):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 09 (Peak)    | 2442.100        | 31.154              | 71.886               | 103.040                 | --                  | --                     | Pass   |
| 09 (Peak)    | 2483.500        | 31.435              | 28.572               | 60.007                  | 74.00               | 54.00                  | Pass   |
| 09 (Peak)    | 2483.900        | 31.438              | 30.239               | 61.677                  | 74.00               | 54.00                  | Pass   |
| 09 (Average) | 2443.300        | 31.161              | 60.033               | 91.195                  | --                  | --                     | Pass   |
| 09 (Average) | 2483.500        | 31.435              | 17.025               | 48.460                  | 74.00               | 54.00                  | Pass   |


**Figure Channel 09:**

**Vertical (Peak)**

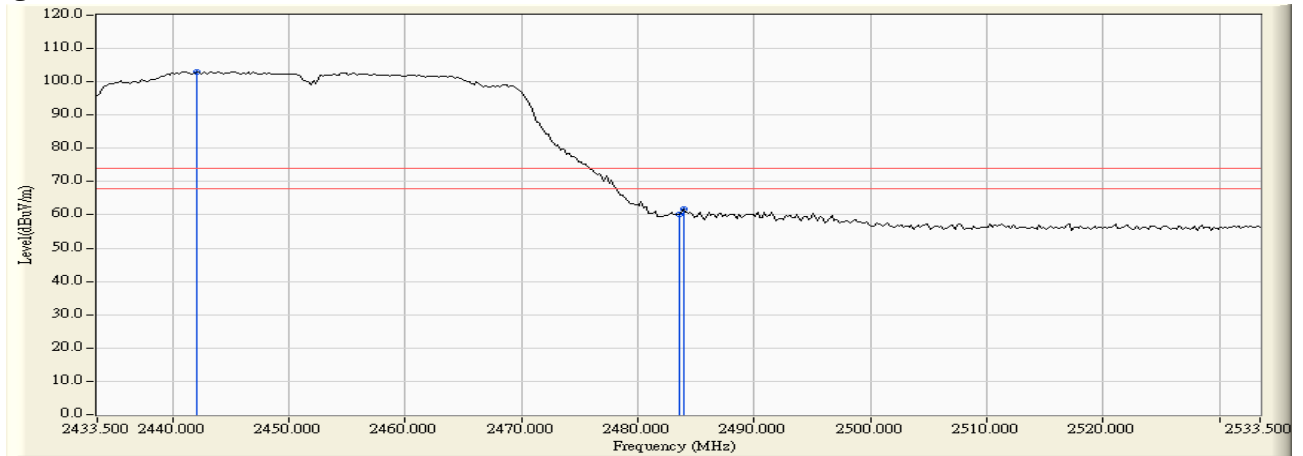

**Figure Channel 09:**

**Vertical (Average)**

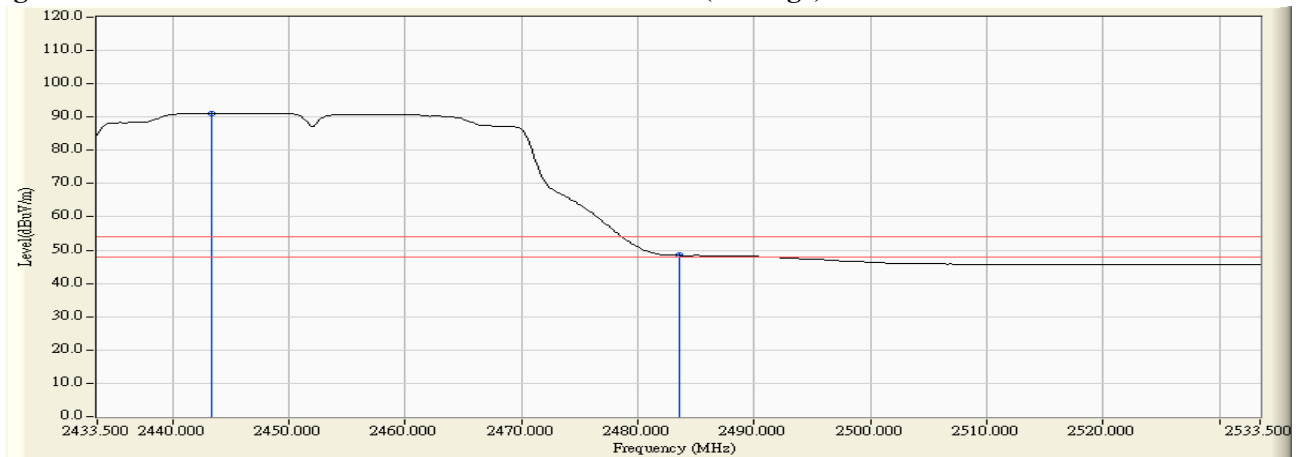

## Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)


**RF Radiated Measurement (Horizontal):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 10 (Peak)    | 2450.100        | 31.928              | 72.811               | 104.740                 | --                  | --                     | Pass   |
| 10 (Peak)    | 2483.500        | 32.182              | 32.646               | 64.828                  | 74.00               | 54.00                  | Pass   |
| 10 (Average) | 2450.300        | 31.931              | 59.669               | 91.600                  | --                  | --                     | Pass   |
| 10 (Average) | 2483.500        | 32.182              | 20.668               | 52.850                  | 74.00               | 54.00                  | Pass   |

**Figure Channel 10: Horizontal (Peak)**

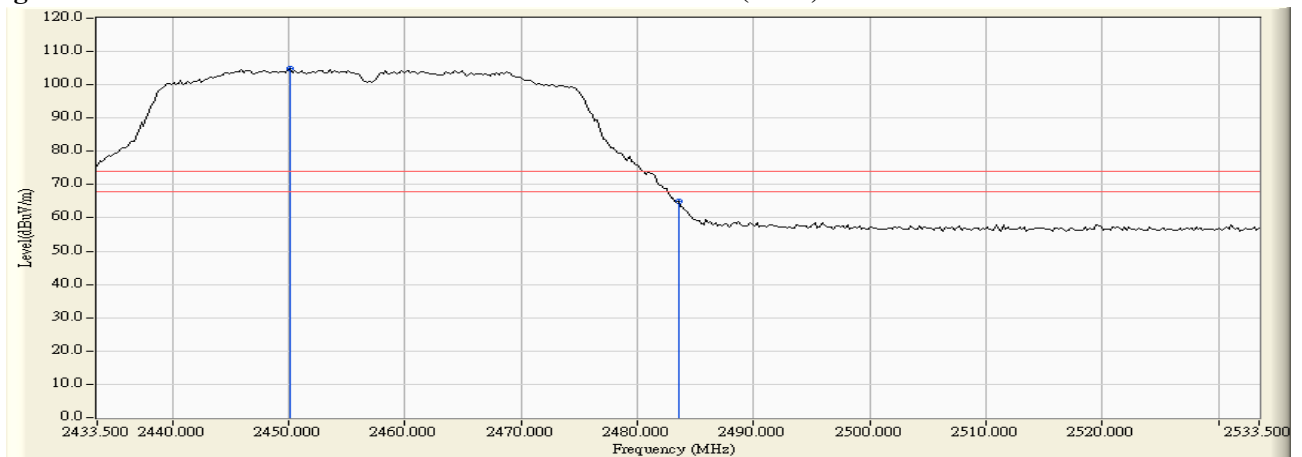

**Figure Channel 10: Horizontal (Average)**

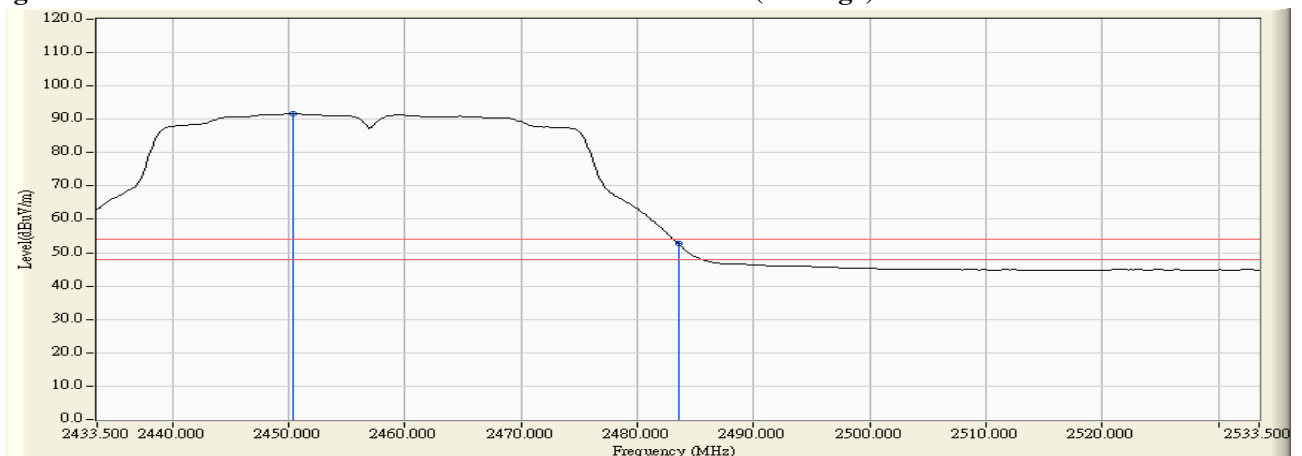

---

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)


**RF Radiated Measurement (Vertical):**

| Channel No.  | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Peak Limit (dBuV/m) | Average Limit (dBuV/m) | Result |
|--------------|-----------------|---------------------|----------------------|-------------------------|---------------------|------------------------|--------|
| 10 (Peak)    | 2446.100        | 31.181              | 67.636               | 98.817                  | --                  | --                     | Pass   |
| 10 (Peak)    | 2483.500        | 31.435              | 29.098               | 60.533                  | 74.00               | 54.00                  | Pass   |
| 10 (Average) | 2454.500        | 31.238              | 53.594               | 84.833                  | --                  | --                     | Pass   |
| 10 (Average) | 2483.500        | 31.435              | 16.885               | 48.320                  | 74.00               | 54.00                  | Pass   |

**Figure Channel 10: Vertical (Peak)**

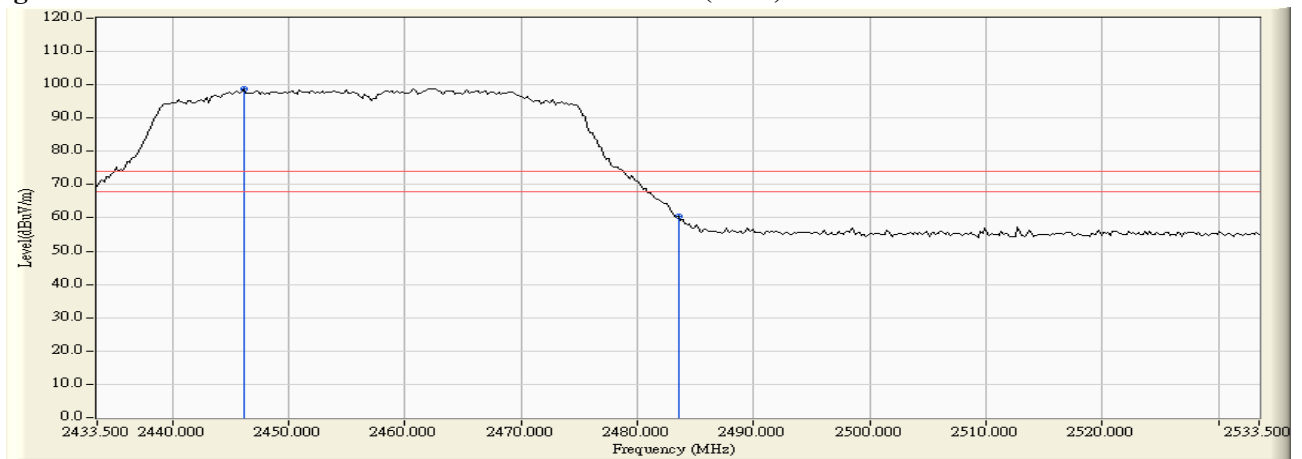

**Figure Channel 10: Vertical (Average)**

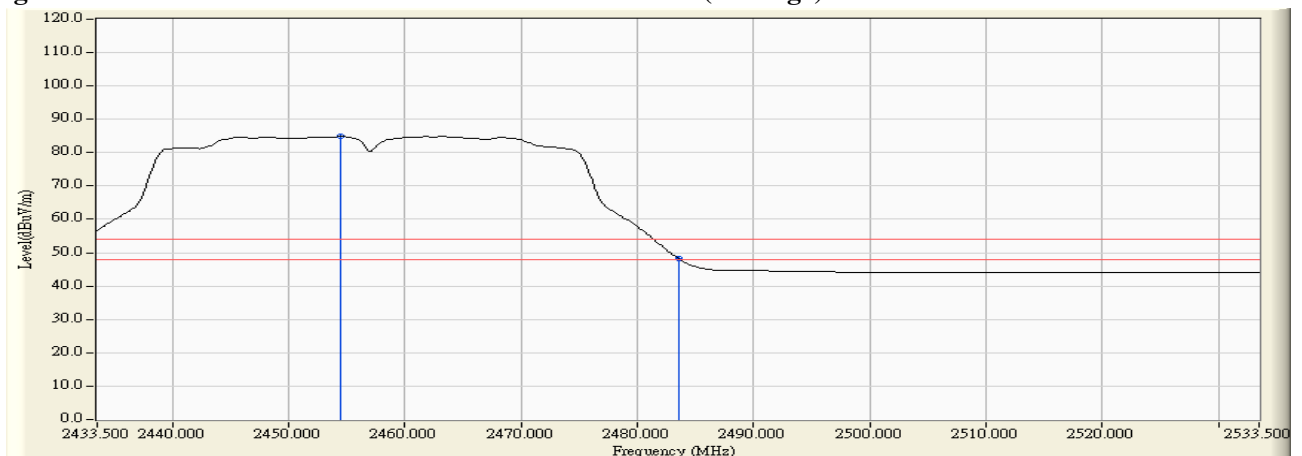



---


**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)

## Chain A


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5745                    | 43.21                              | >20                    | PASS   |

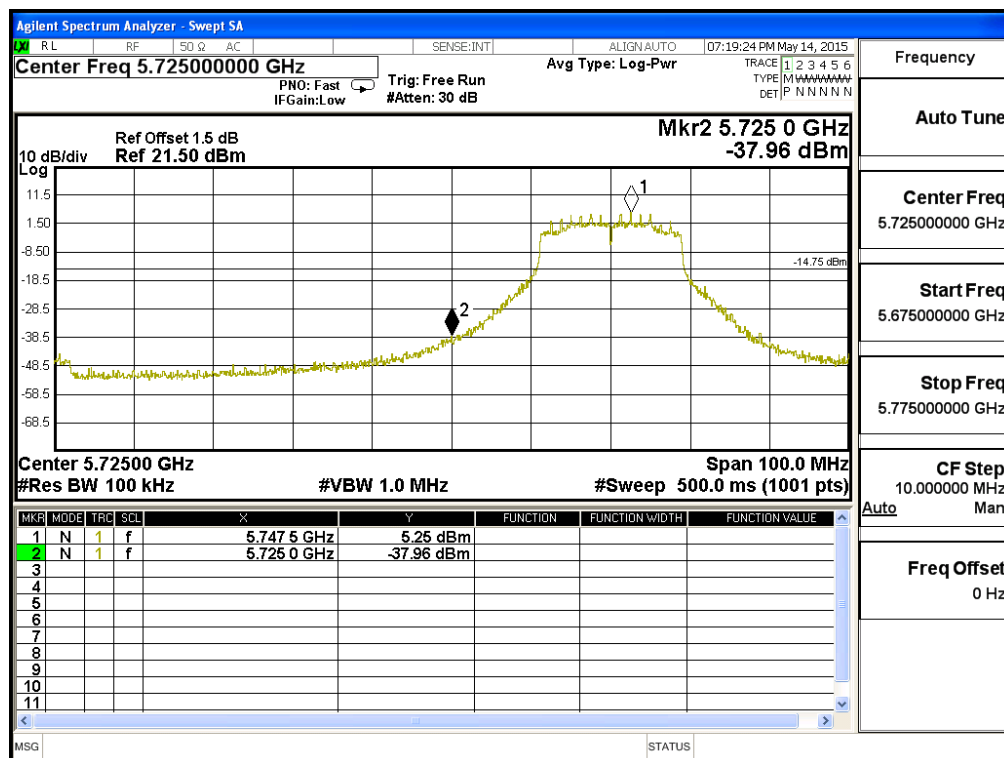

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)

## Chain A


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5825                    | 48.03                              | >20                    | PASS   |

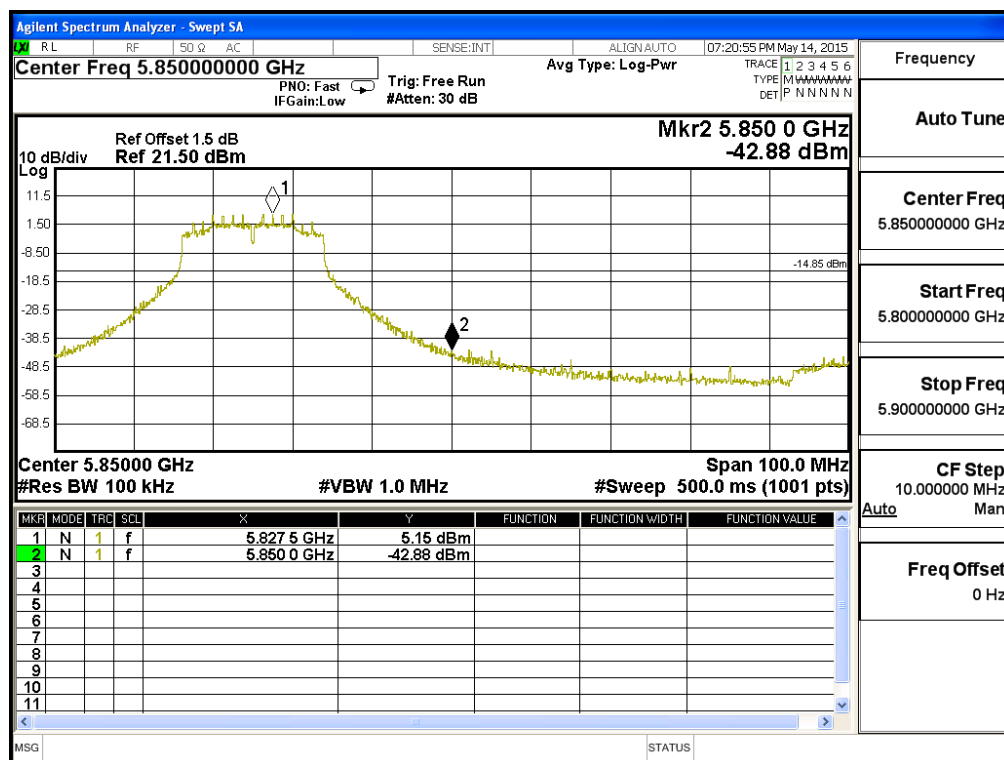

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)

## Chain B


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5745                    | 42.76                              | >20                    | PASS   |

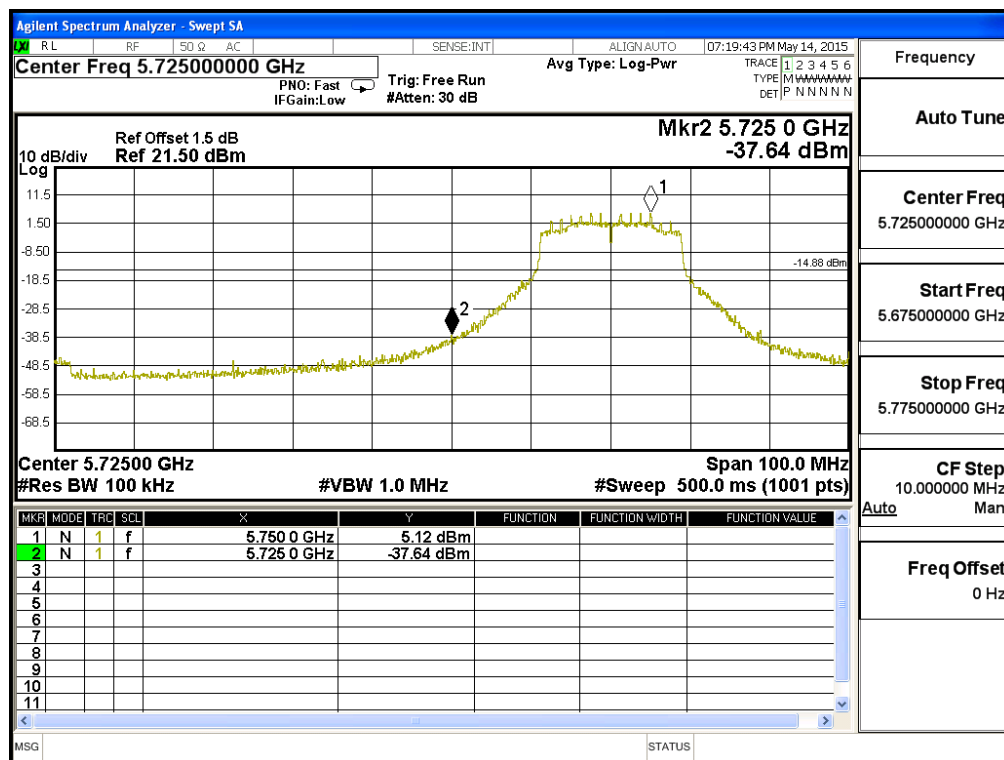

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit - 802.11n-20BW\_14.4Mbps(5G Band)

## Chain B


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5825                    | 48.54                              | >20                    | PASS   |

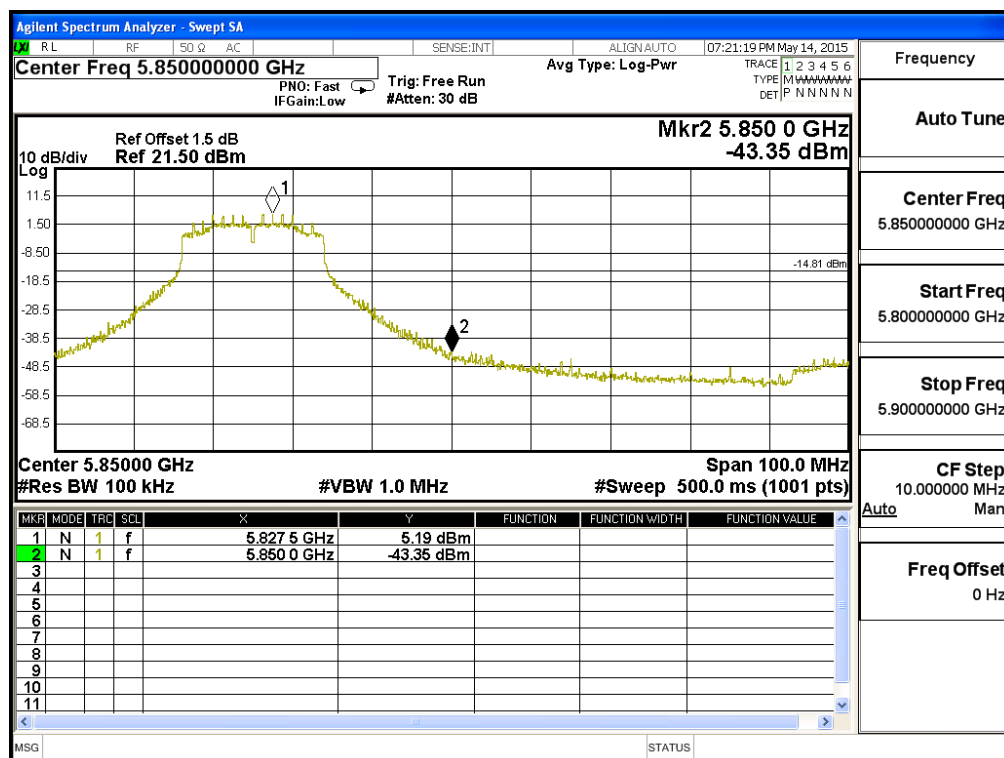

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit - 802.11n-40BW\_30Mbps(5G Band)

## Chain A


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5755                    | 36.81                              | >20                    | PASS   |

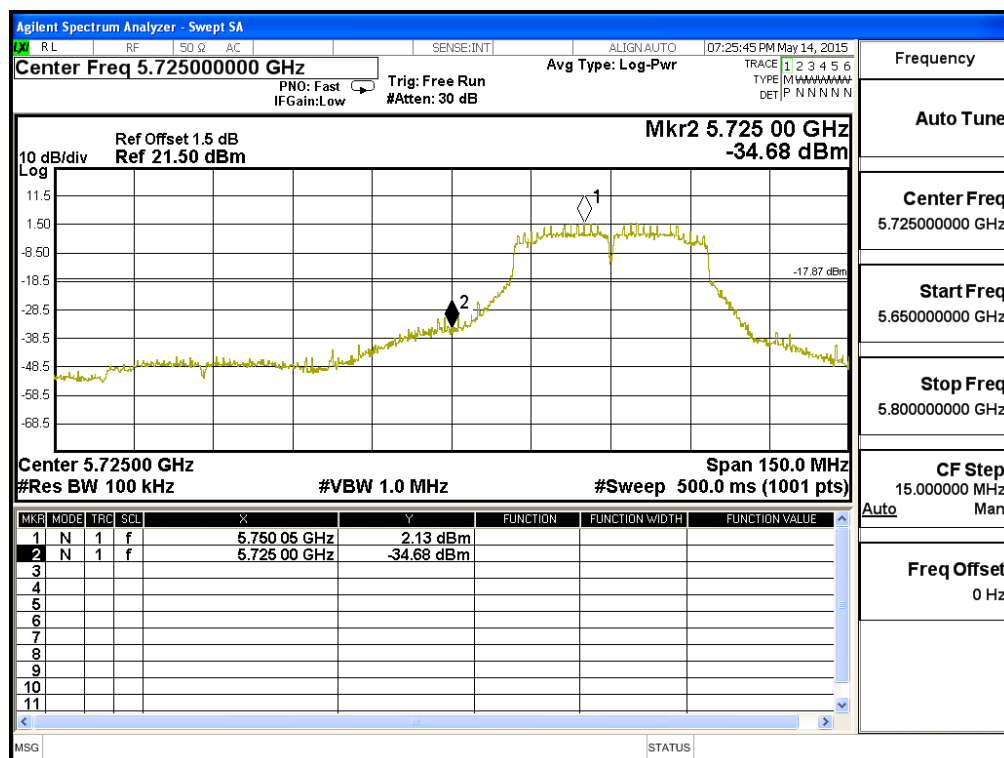

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit - 802.11n-40BW\_30Mbps(5G Band)

## Chain A


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5795                    | 50.25                              | >20                    | PASS   |

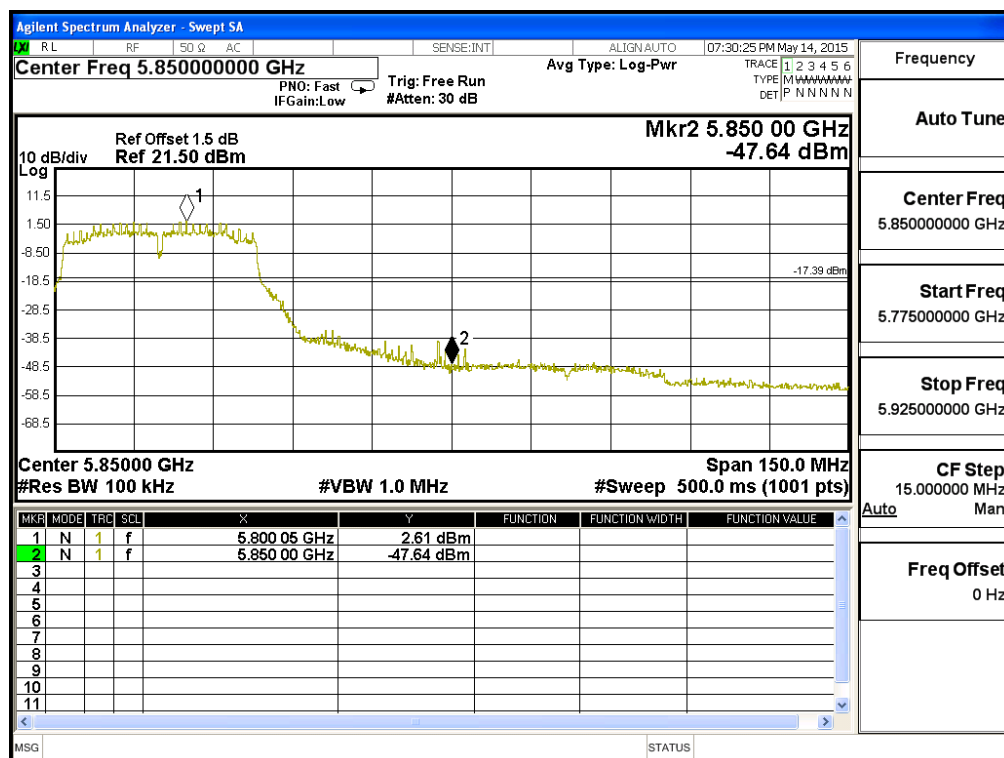

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit - 802.11n-40BW\_30Mbps(5G Band)

## Chain B

| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5755                    | 38.47                              | >20                    | PASS   |

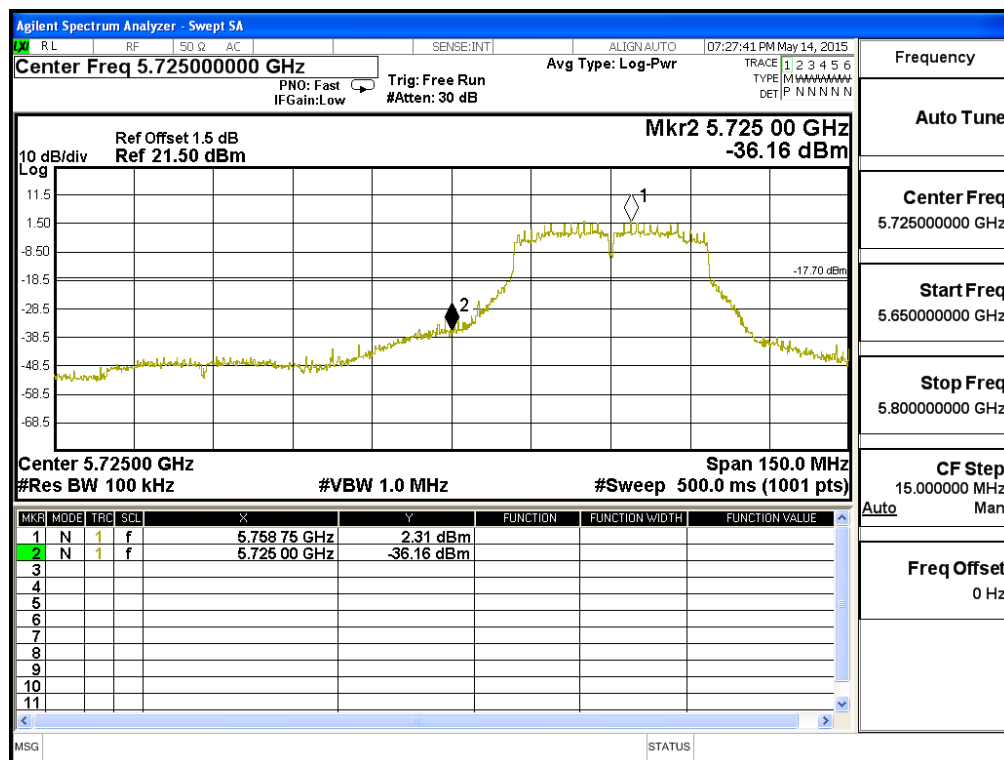




Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit - 802.11n-40BW\_30Mbps(5G Band)

## Chain B


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5795                    | 49.50                              | >20                    | PASS   |

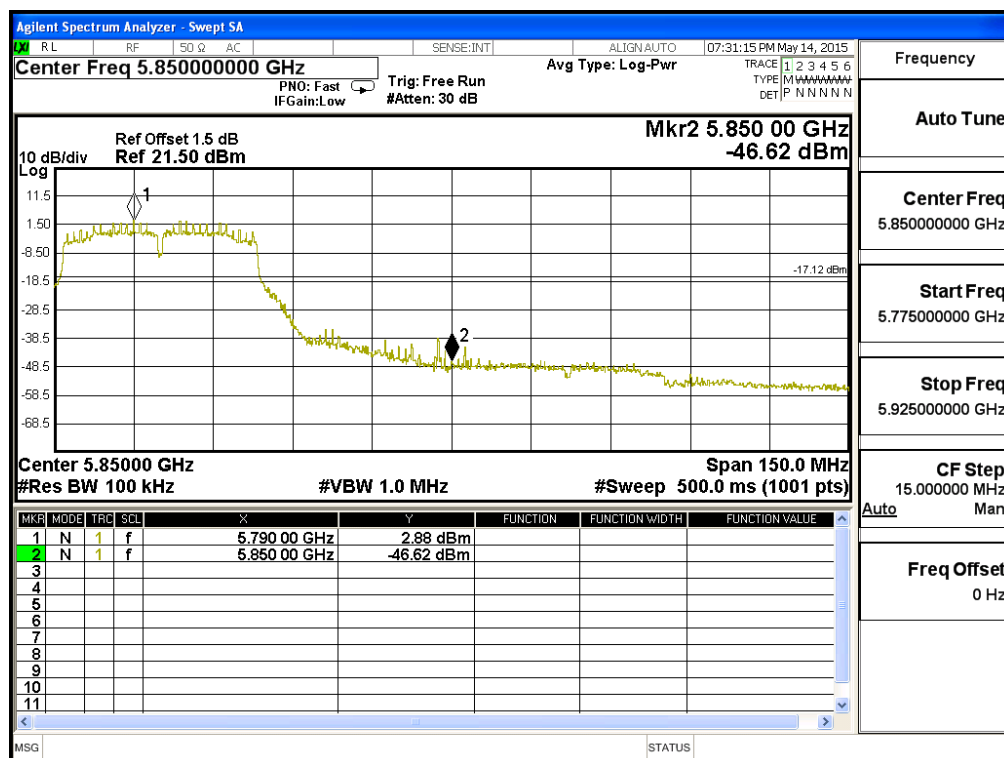

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit - 802.11ac-80BW\_65Mbps(5G Band)

## Chain A


| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5775                    | 39.09                              | >30                    | PASS   |

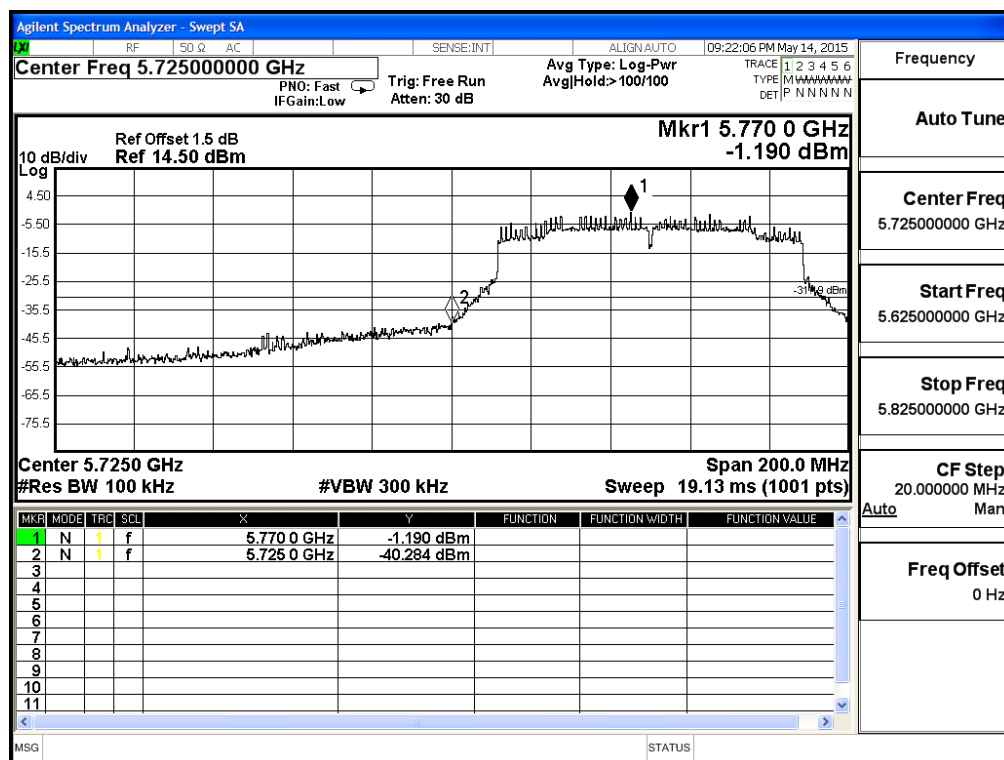

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit - 802.11ac-80BW\_65Mbps(5G Band)

## Chain B

| Test Frequency<br>(MHz) | Measurement Level<br>$\Delta$ (dB) | Limit<br>$\Delta$ (dB) | Result |
|-------------------------|------------------------------------|------------------------|--------|
| 5775                    | 37.85                              | >30                    | PASS   |

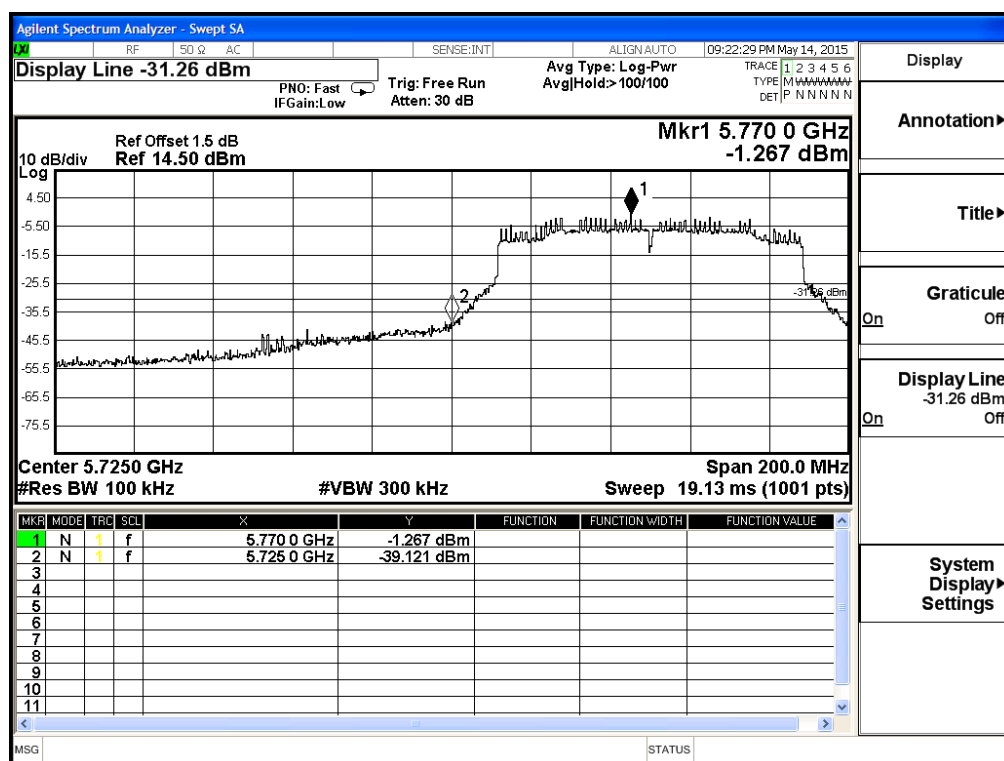

## 7. Occupied Bandwidth


### 7.1. Test Equipment

|   | Equipment         | Manufacturer | Model No./Serial No. | Last Cal.  |
|---|-------------------|--------------|----------------------|------------|
|   | Spectrum Analyzer | R&S          | FSP40 / 100170       | Jun, 2014  |
|   | Spectrum Analyzer | Agilent      | E4407B / US39440758  | Jun, 2014  |
| X | Spectrum Analyzer | Agilent      | N9010A / MY48030495  | Apr., 2015 |

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

### 7.2. Test Setup



### 7.3. Limits

The minimum bandwidth shall be at least 500 kHz.

### 7.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009; tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

### 7.5. Uncertainty


$\pm 150\text{Hz}$

## 7.6. Test Result of Occupied Bandwidth

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit (802.11b 1Mbps) (2412MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 1           | 2412.00         | 10200                   | >500                 | Pass   |


Figure Channel 1:

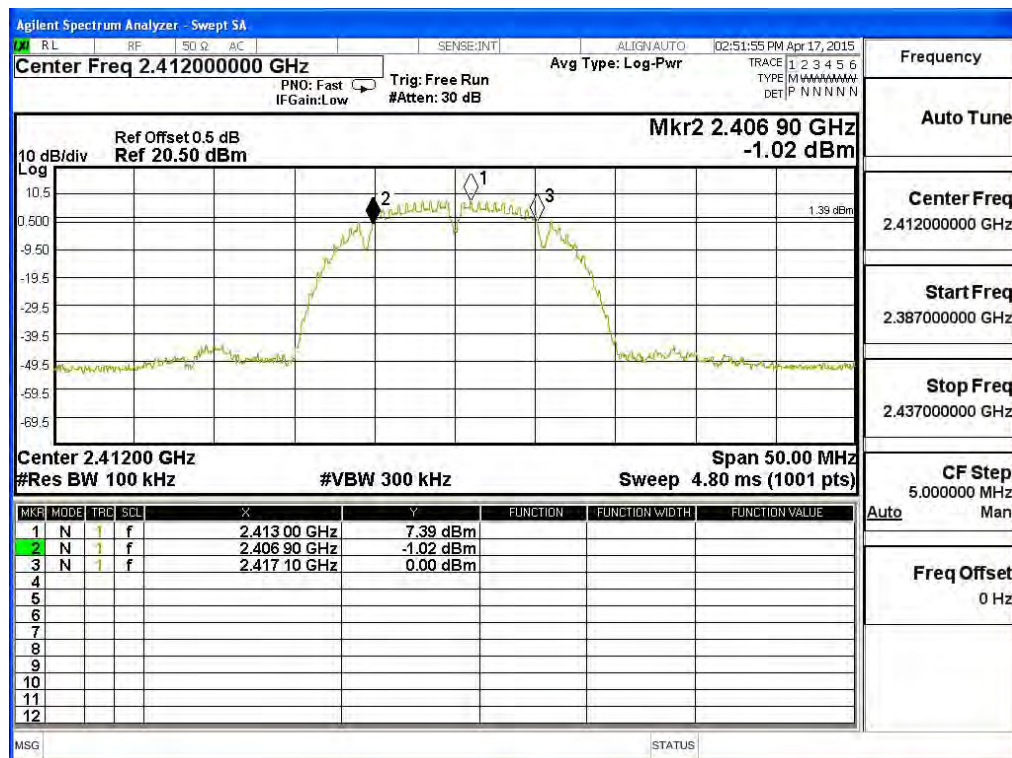

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit (802.11b 1Mbps) (2437MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 6           | 2437.00         | 10200                   | >500                 | Pass   |


**Figure Channel 6:**

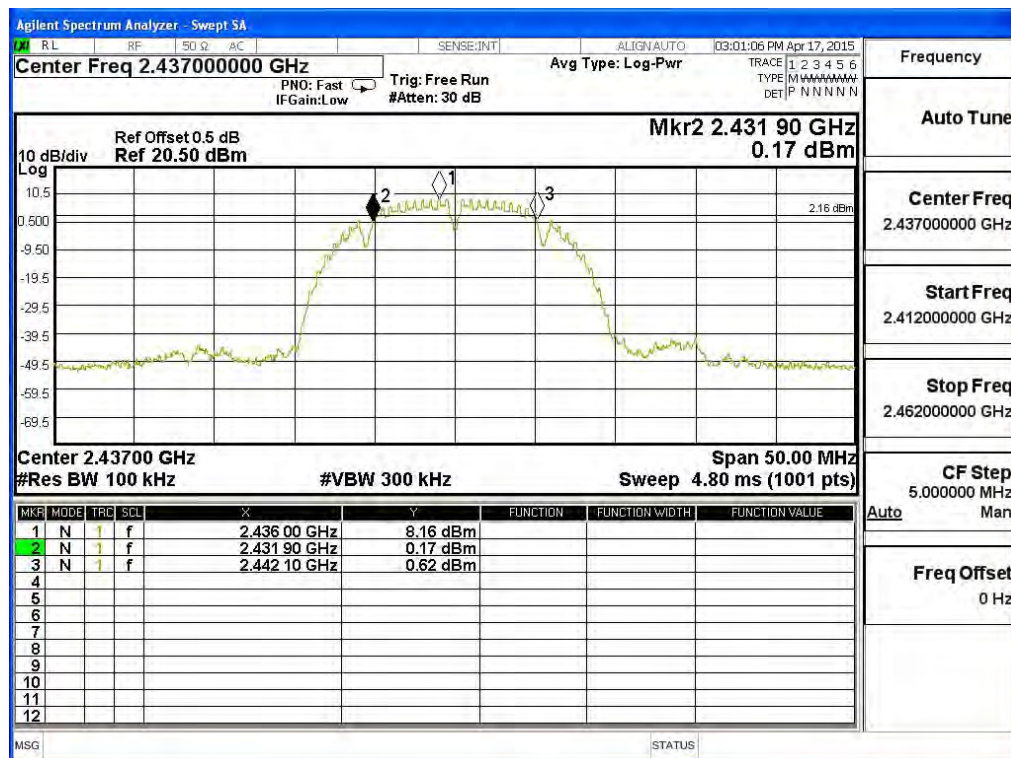

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit (802.11b 1Mbps) (2462MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 11          | 2462.00         | 10200                   | >500                 | Pass   |


Figure Channel 11:

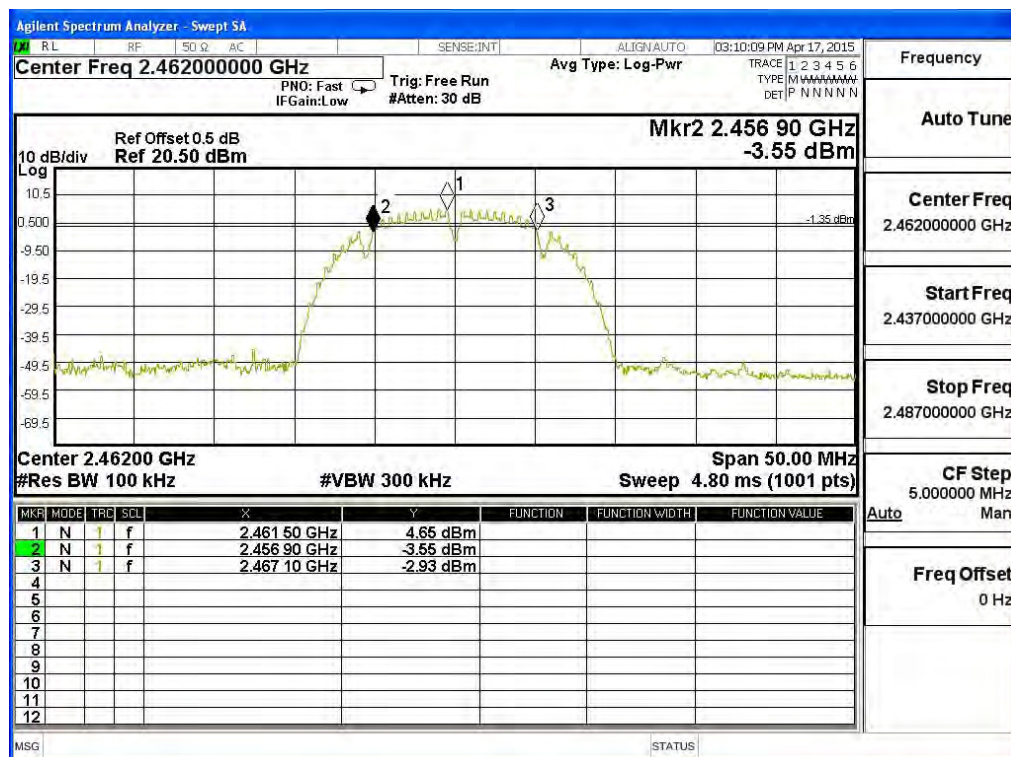

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit (802.11b 1Mbps) (2467MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 12          | 2467.00         | 10200                   | >500                 | Pass   |

Figure Channel 12:

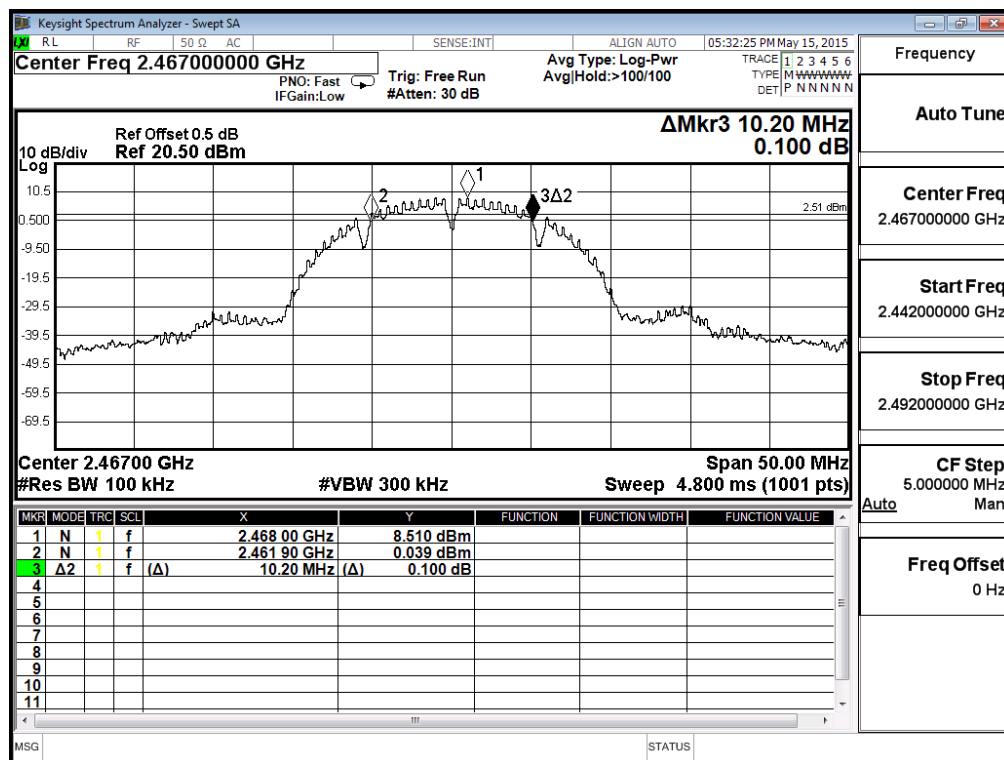




Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit (802.11g 6Mbps) (2412MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 1           | 2412.00         | 16450                   | >500                 | Pass   |


Figure Channel 1:

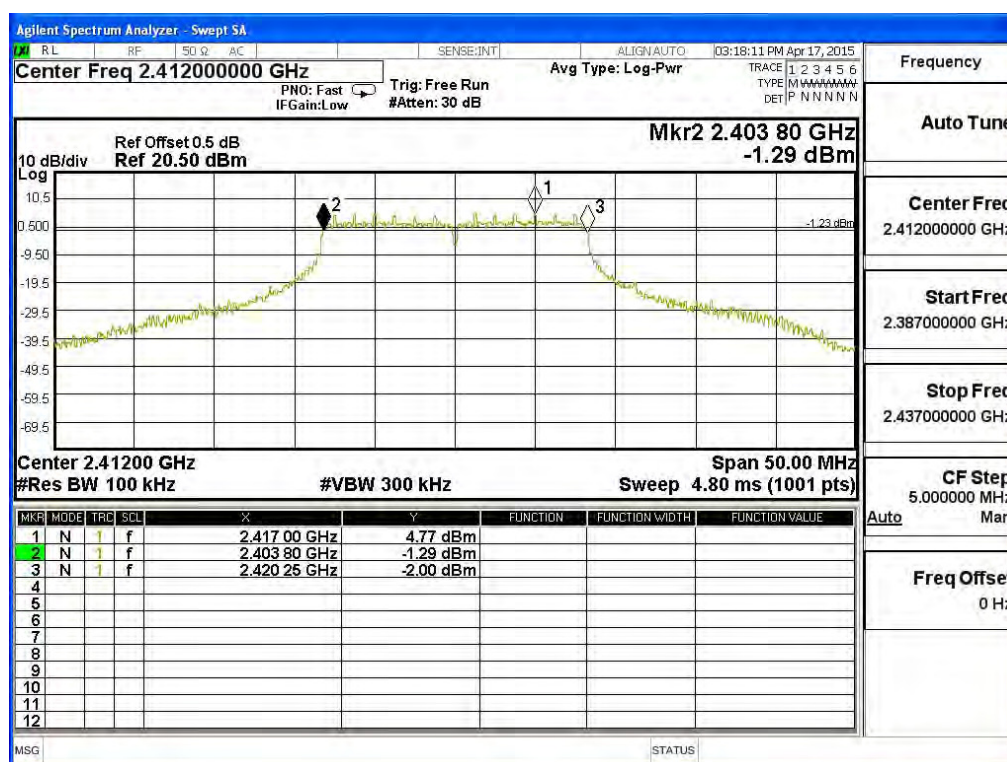

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit (802.11g 6Mbps) (2437MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 6           | 2437.00         | 16450                   | >500                 | Pass   |


Figure Channel 6:

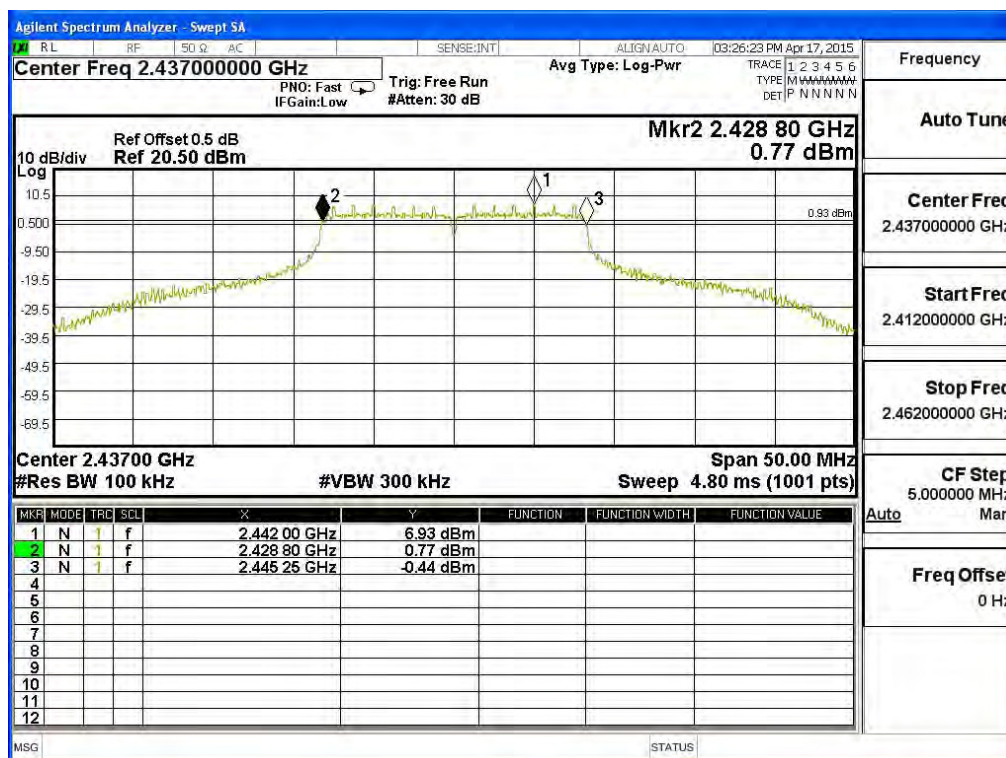

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit (802.11g 6Mbps) (2462MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 11          | 2462.00         | 16450                   | >500                 | Pass   |


Figure Channel 11:

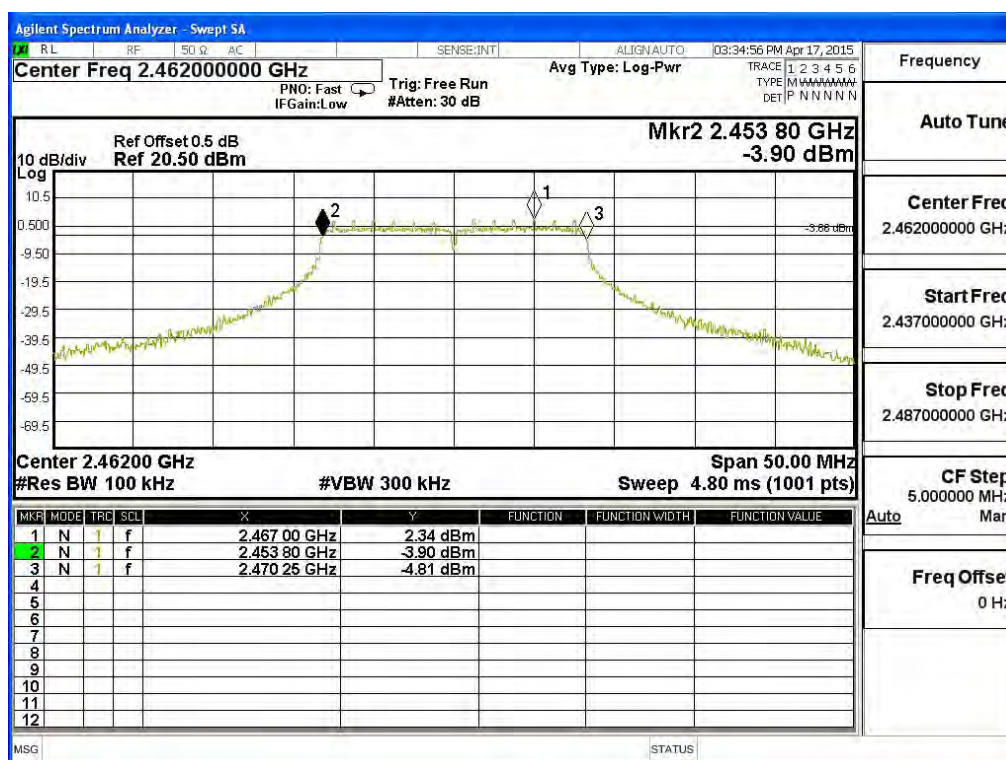

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Occupied Bandwidth Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11g 6Mbps) (2467MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 12          | 2467.00         | 15800                   | >500                 | Pass   |


Figure Channel 12:

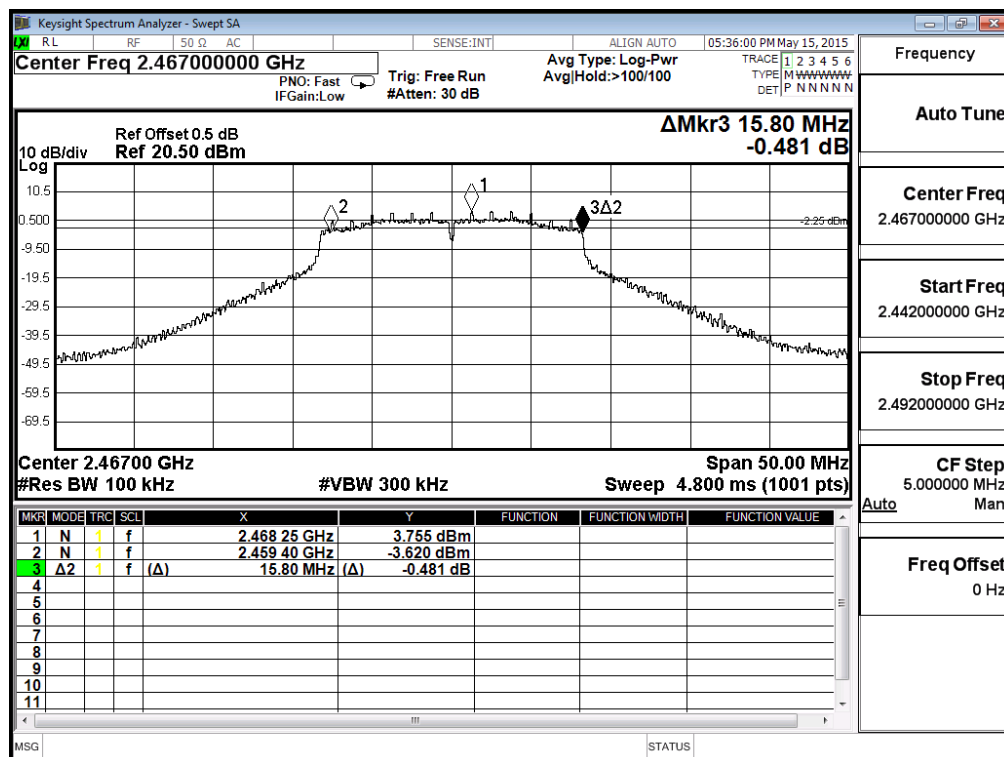

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit - 802.11a 6Mbps (5745MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 149         | 5745.00         | 15400                   | >500                 | Pass   |


Figure Channel 149:

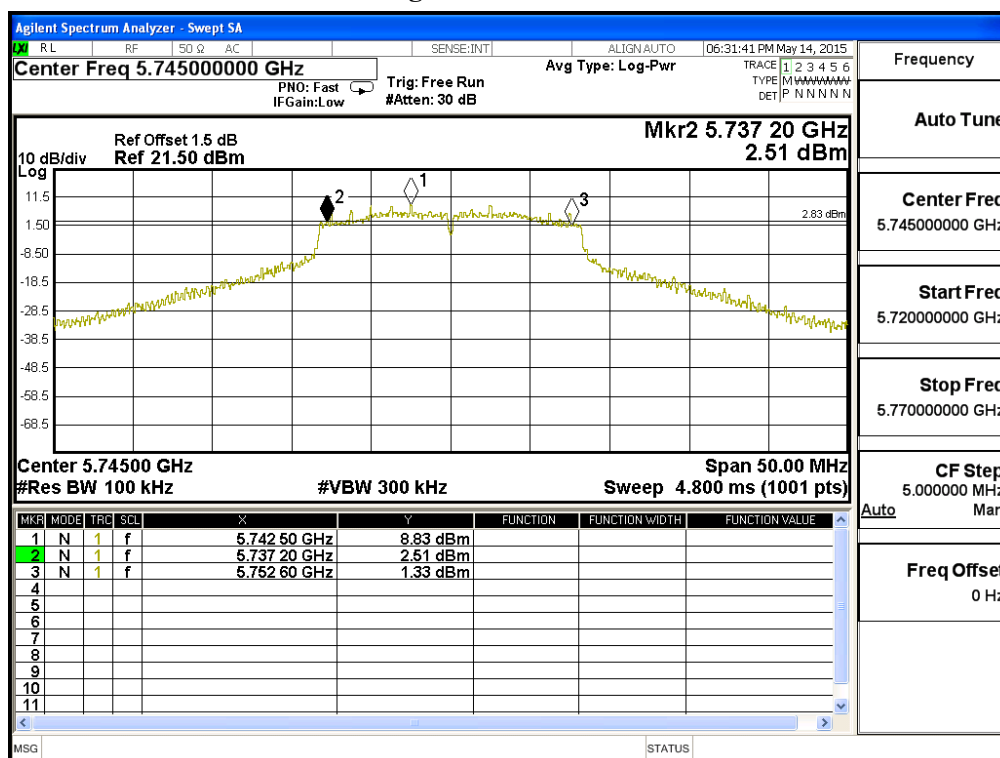

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit - 802.11a 6Mbps (5785MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 157         | 5785.00         | 15800                   | >500                 | Pass   |


Figure Channel 157:

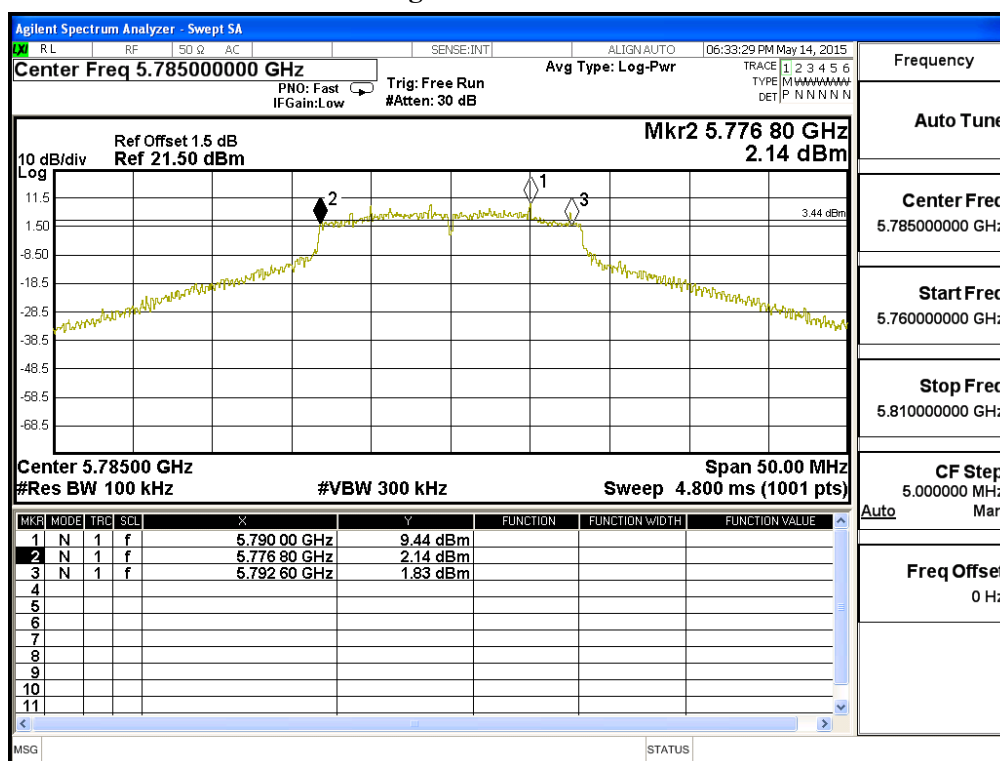

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit - 802.11a 6Mbps (5825MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 165         | 5825.00         | 15200                   | >500                 | Pass   |

Figure Channel 165:

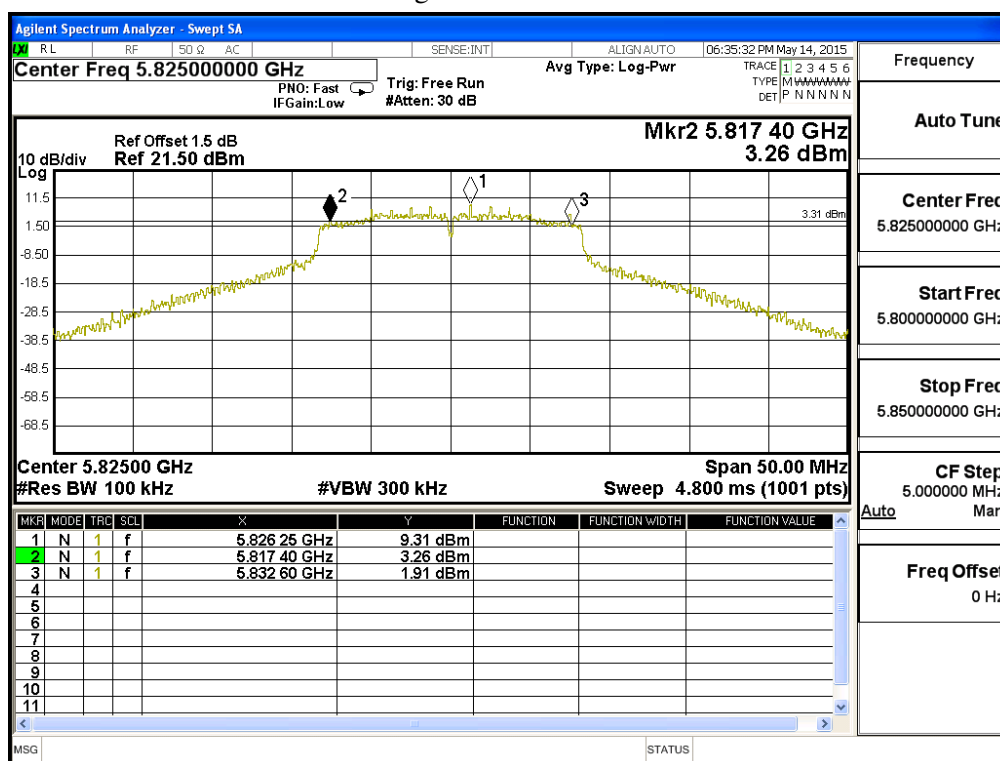




Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit - 802.11n-20BW\_7.2Mbps(2.4G Band) (2412MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 1           | 2412.00         | 17700                   | >500                 | Pass   |

Figure Channel 1:

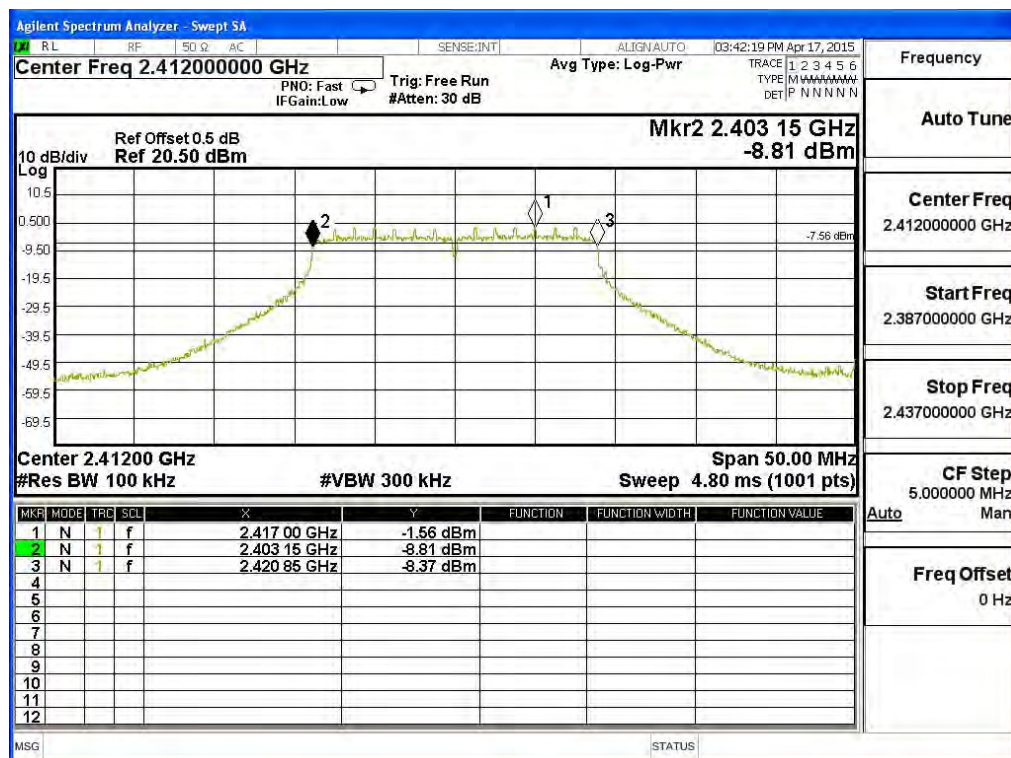




Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit - 802.11n-20BW\_7.2Mbps(2.4G Band) (2437MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 6           | 2437.00         | 17700                   | >500                 | Pass   |


Figure Channel 6:

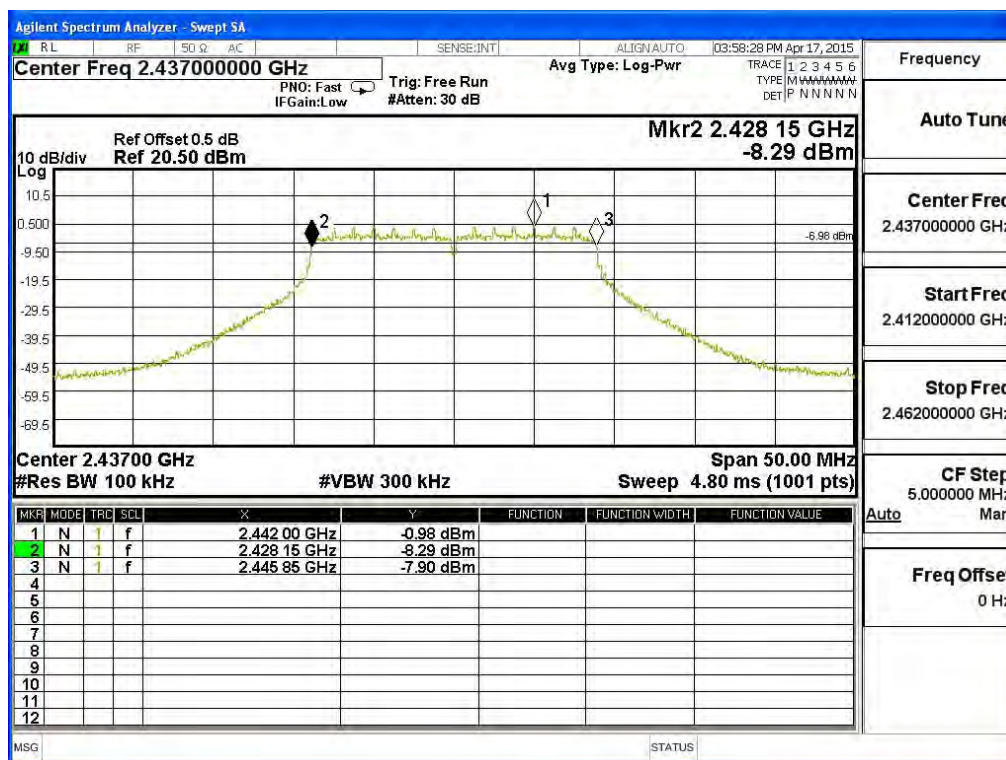

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit - 802.11n-20BW\_7.2Mbps(2.4G Band) (2462MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 11          | 2462.00         | 17700                   | >500                 | Pass   |


**Figure Channel 11:**

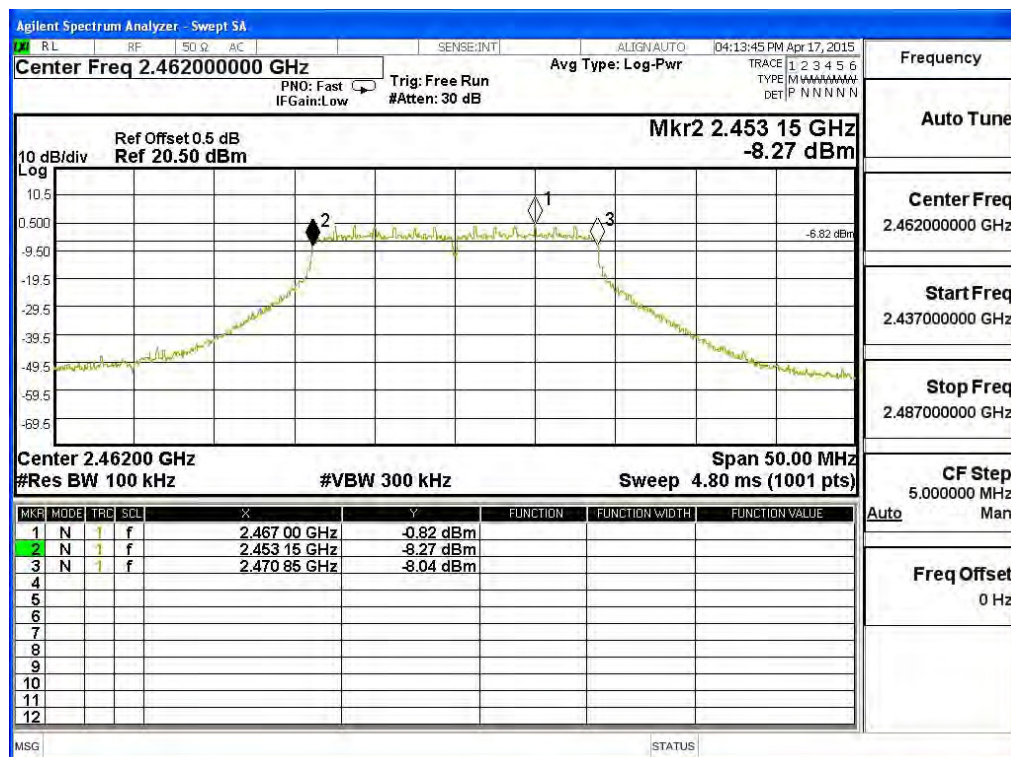

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit - 802.11n-20BW\_7.2Mbps(2.4G Band) (2467MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 12          | 2467.00         | 15250                   | >500                 | Pass   |


Figure Channel 12:

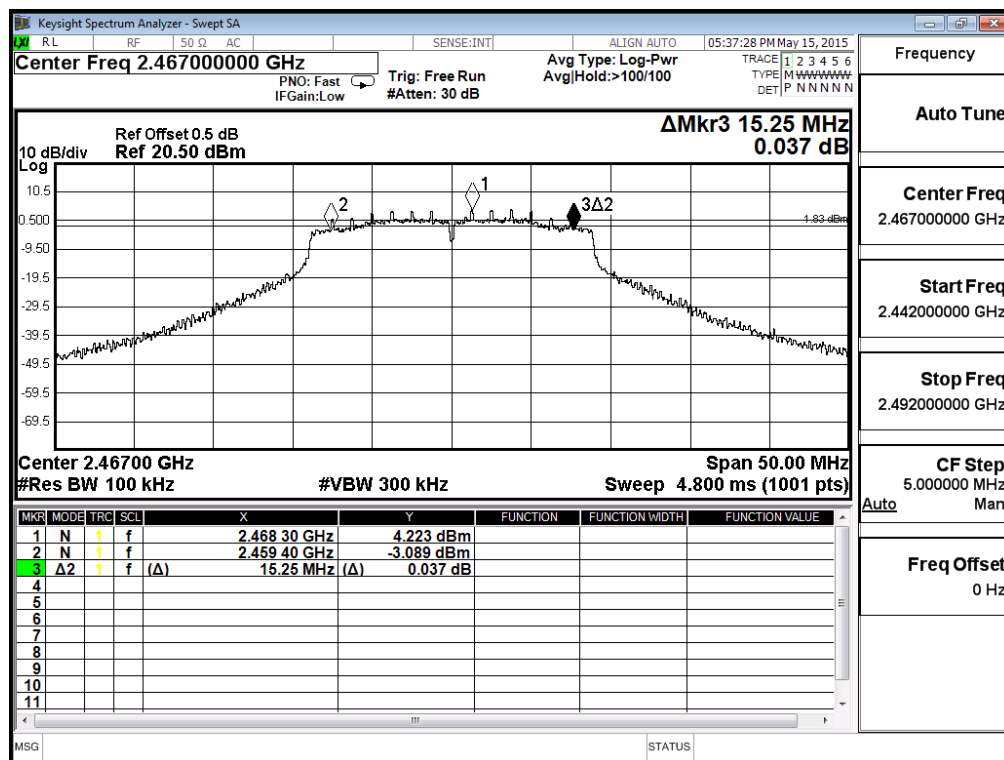

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit - 802.11n-40BW\_15Mbps(2.4G Band) (2422MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 3           | 2422.00         | 36600                   | >500                 | Pass   |


**Figure Channel 3:**

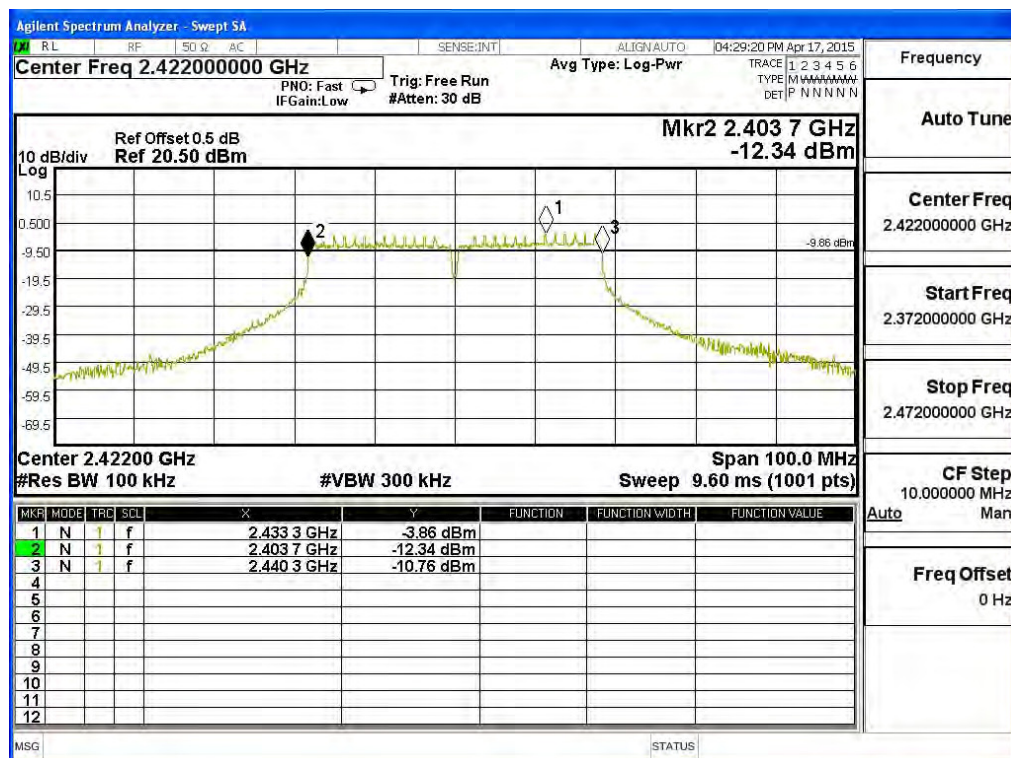

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit - 802.11n-40BW\_15Mbps(2.4G Band) (2437MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 6           | 2437.00         | 36600                   | >500                 | Pass   |

Figure Channel 6:

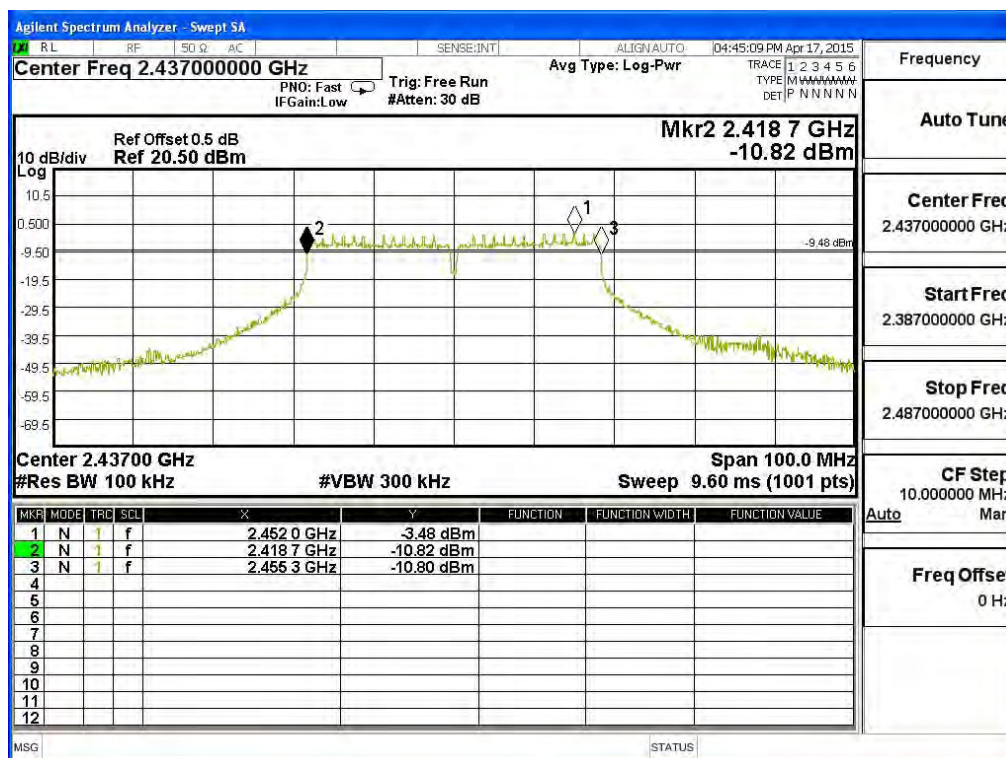




Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit - 802.11n-40BW\_15Mbps(2.4G Band) (2452MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 9           | 2452.00         | 36600                   | >500                 | Pass   |


Figure Channel 9:

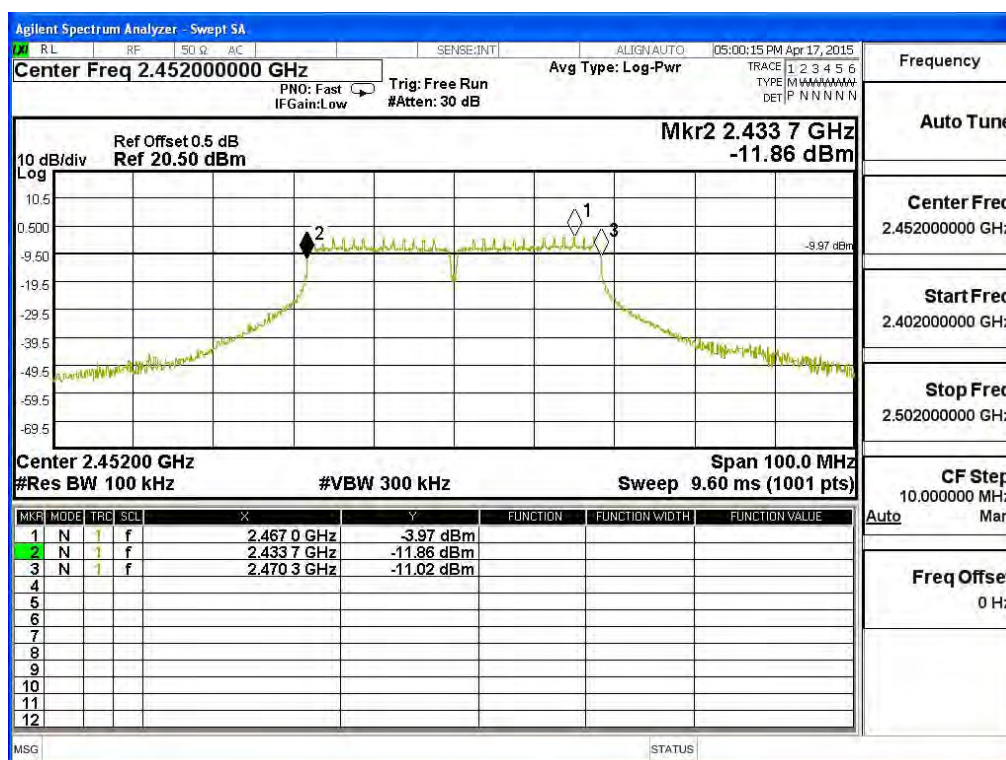

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit - 802.11n-40BW\_15Mbps(2.4G Band) (2457MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 10          | 2457.00         | 35200                   | >500                 | Pass   |


Figure Channel 10:

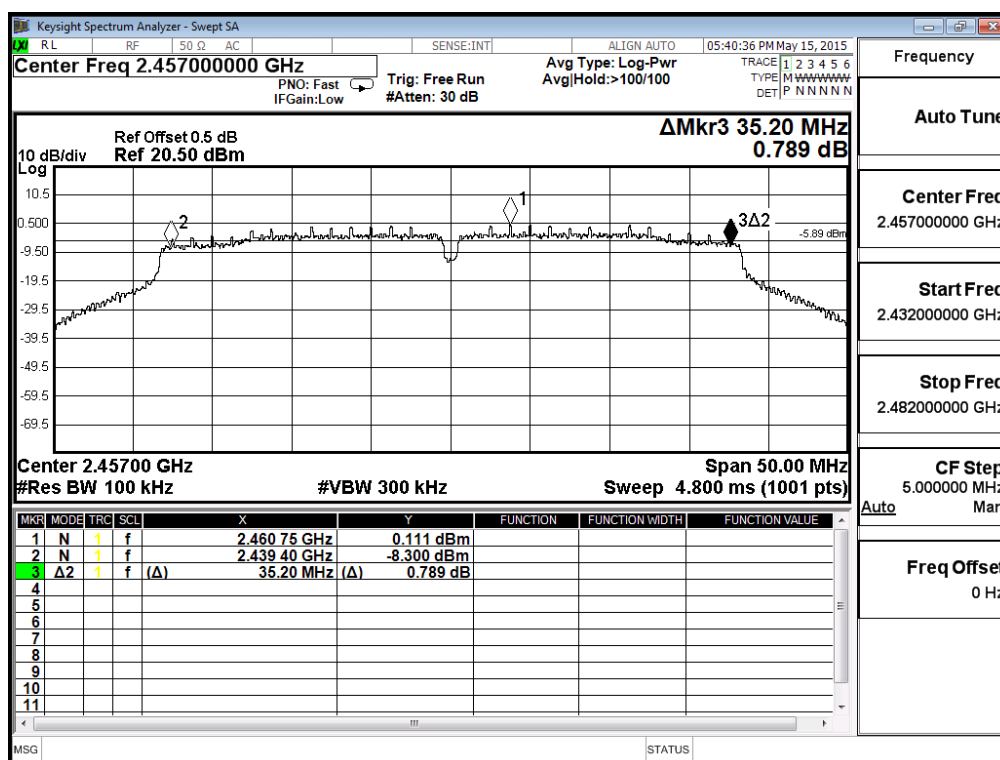

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Occupied Bandwidth Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit - 802.11n-20BW\_7.2Mbps(5G Band) (5745MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 149         | 5745.00         | 15200                   | >500                 | Pass   |

Figure Channel 149:

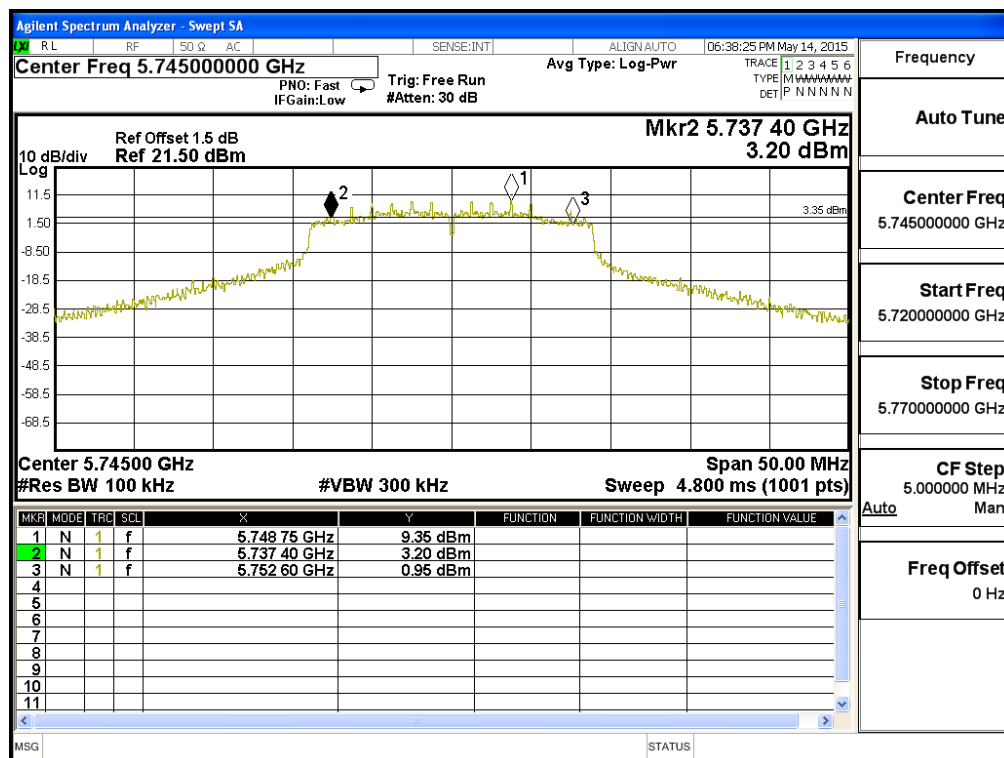




Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit - 802.11n-20BW\_7.2Mbps(5G Band) (5785MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 157         | 5785.00         | 15200                   | >500                 | Pass   |


Figure Channel 157:

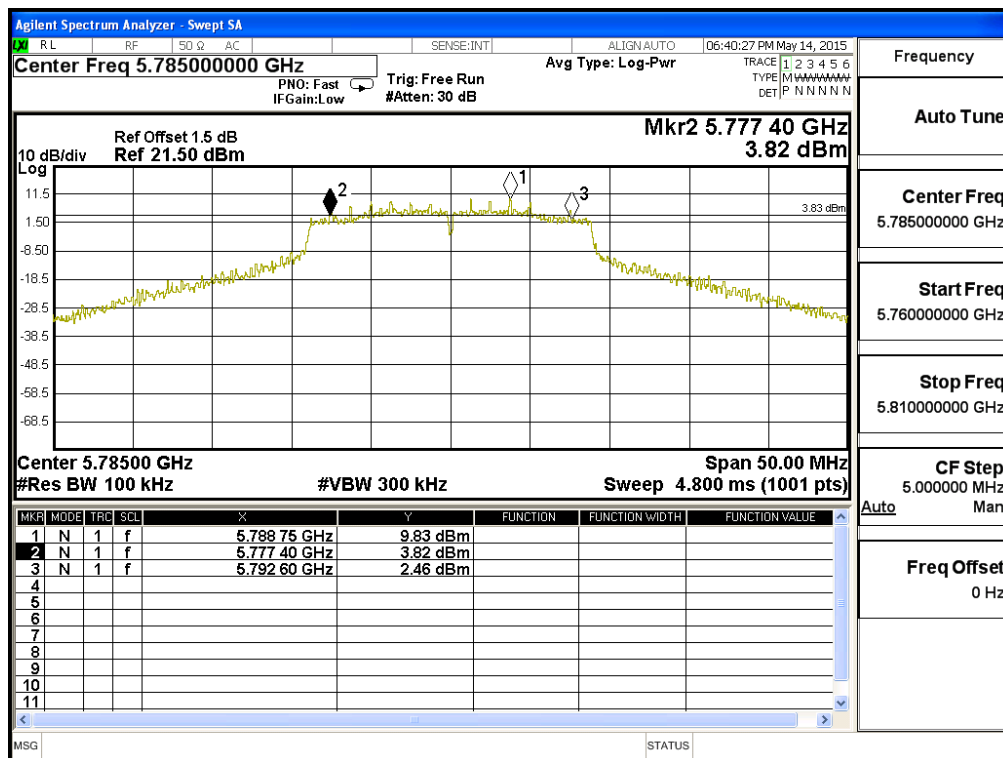

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit - 802.11n-20BW\_7.2Mbps(5G Band) (5825MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 165         | 5825.00         | 15250                   | >500                 | Pass   |


Figure Channel 165:

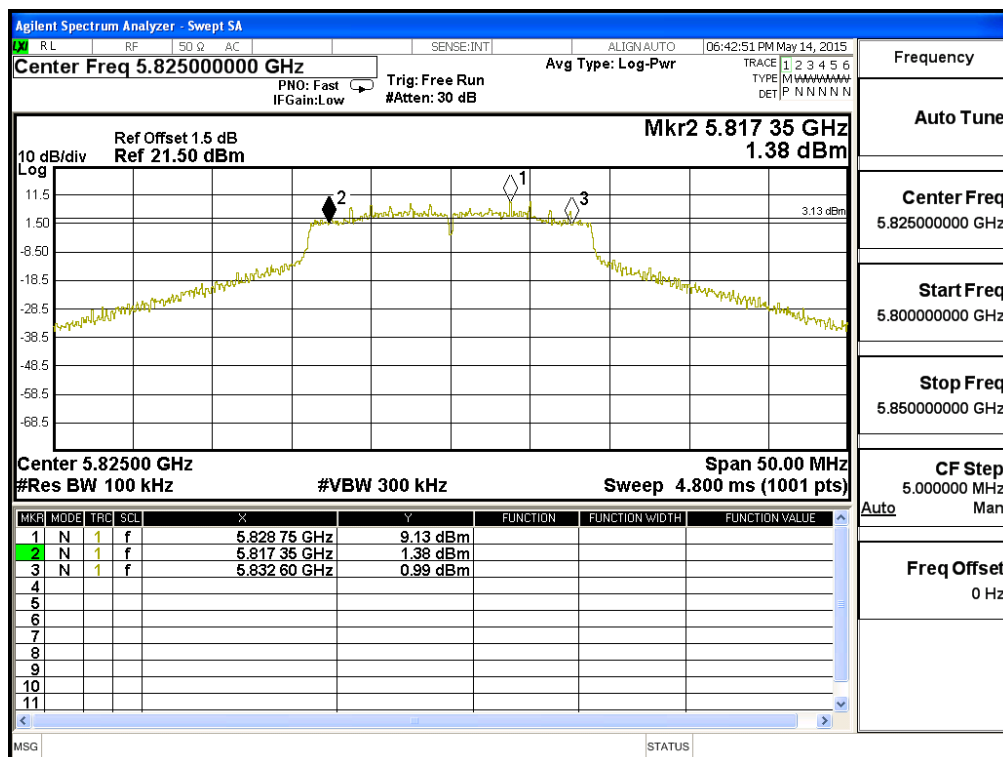

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit - 802.11n-40BW\_15Mbps(5G Band) (5755MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 151         | 5755.00         | 34000                   | >500                 | Pass   |


Figure Channel 151:

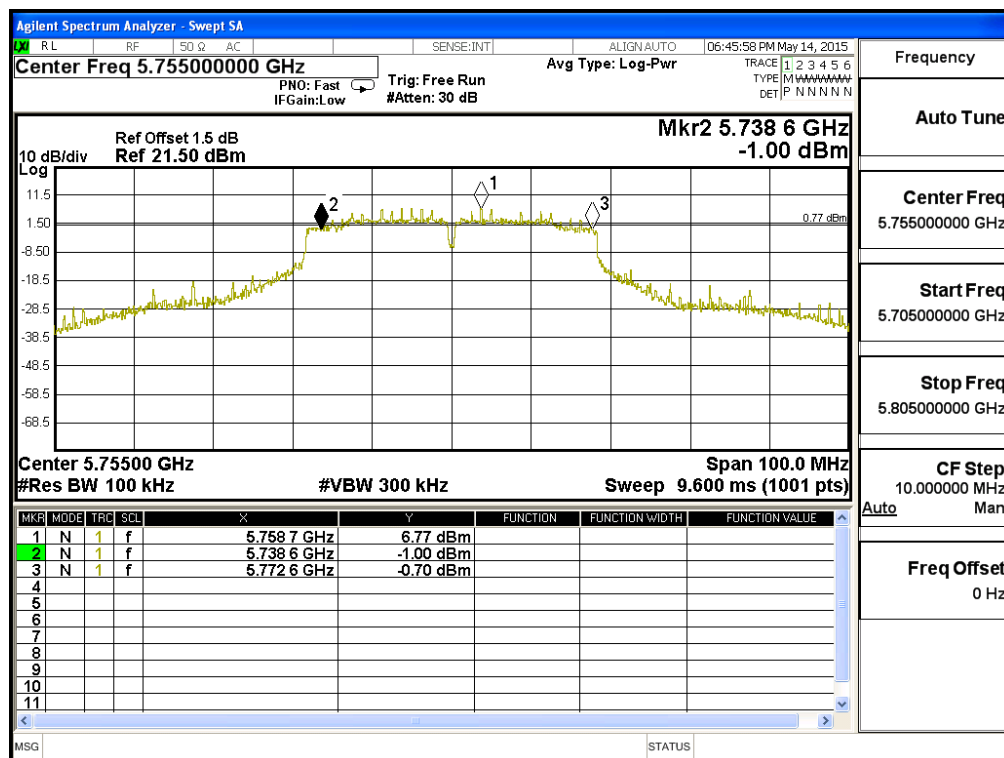

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit - 802.11n-40BW\_15Mbps(5G Band) (5795MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 159         | 5795.00         | 34000                   | >500                 | Pass   |


Figure Channel 159:

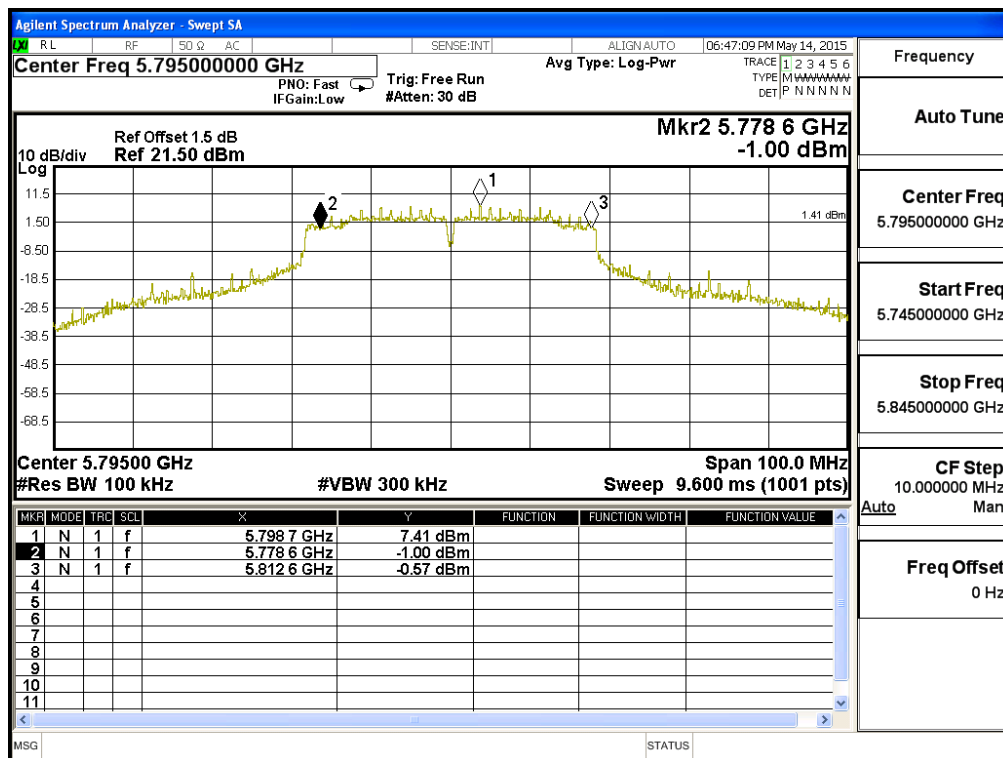

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit - 802.11ac-80BW\_32.5Mbps(5G Band) (5775MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 155         | 5775.00         | 72750                   | >500                 | Pass   |


Figure Channel 155:

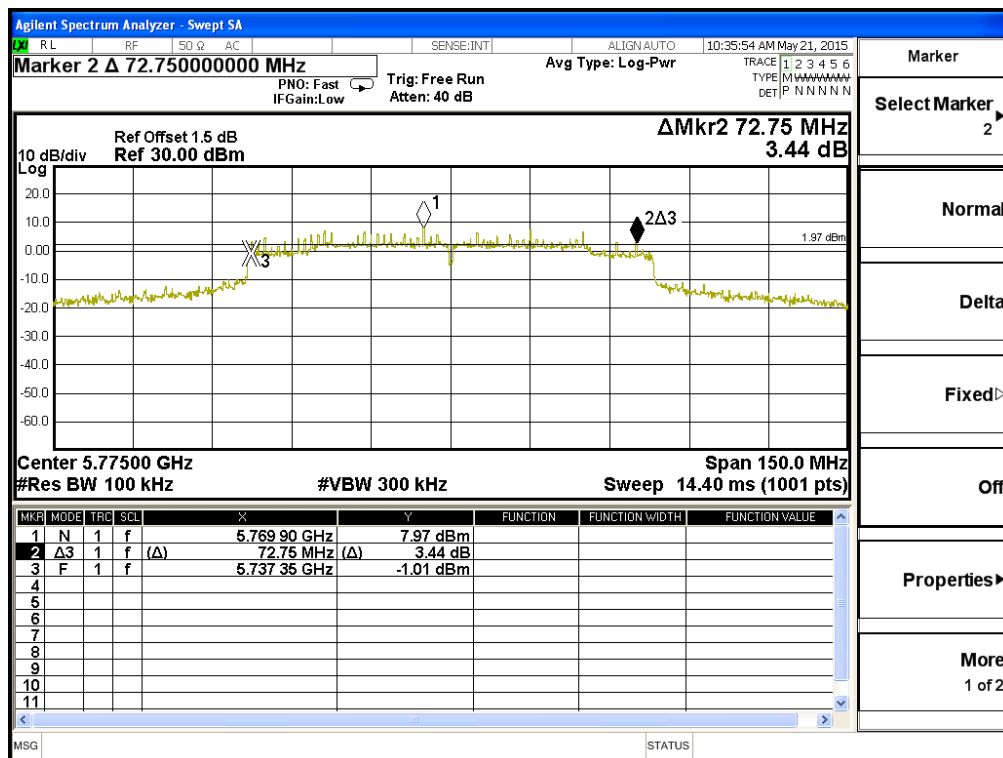

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Occupied Bandwidth Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11b 1Mbps) (2412MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 1           | 2412.00         | 10200                   | >500                 | Pass   |


Figure Channel 1:

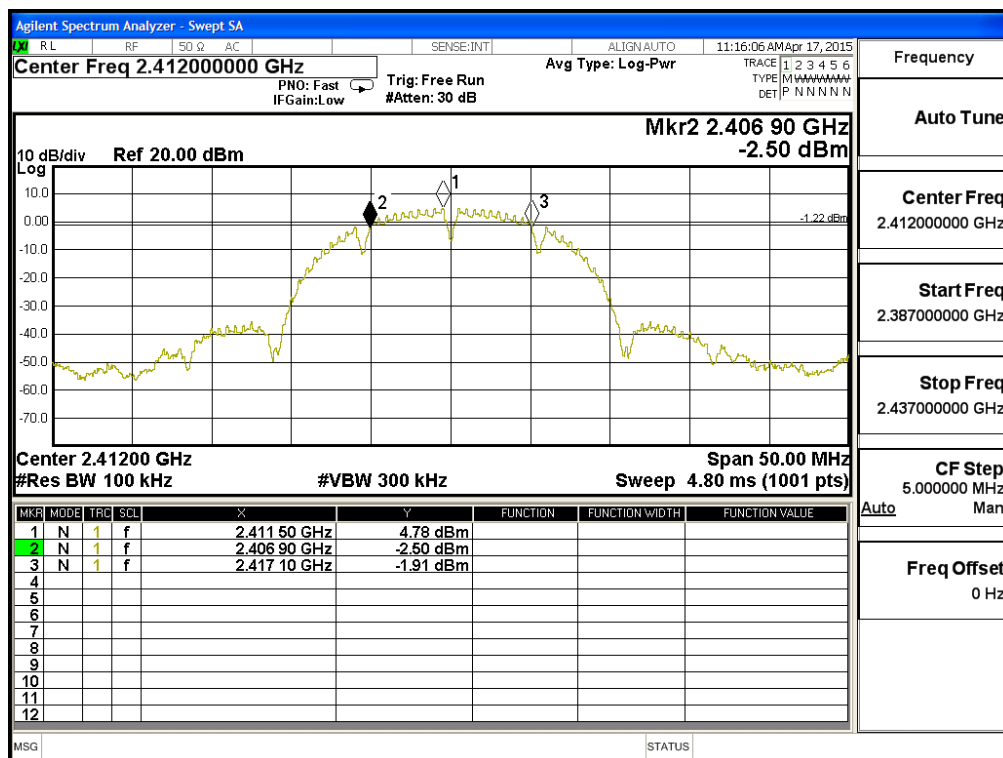

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit (802.11b 1Mbps) (2437MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 6           | 2437.00         | 10200                   | >500                 | Pass   |


**Figure Channel 6:**

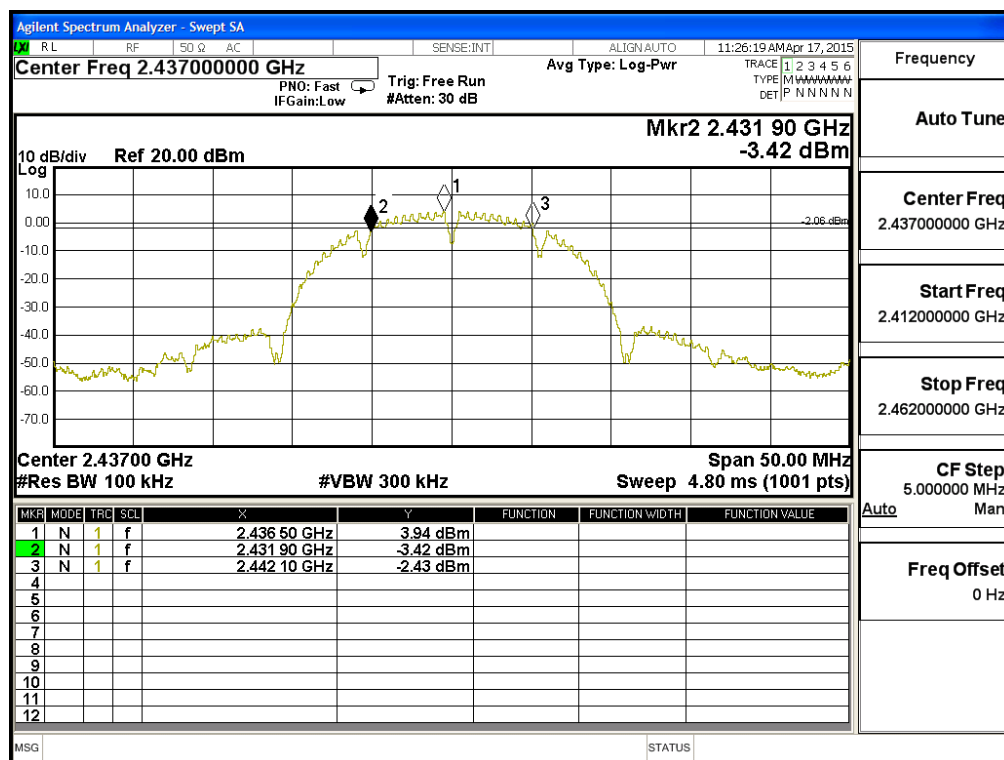

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit (802.11b 1Mbps) (2462MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 11          | 2462.00         | 10200                   | >500                 | Pass   |

Figure Channel 11:

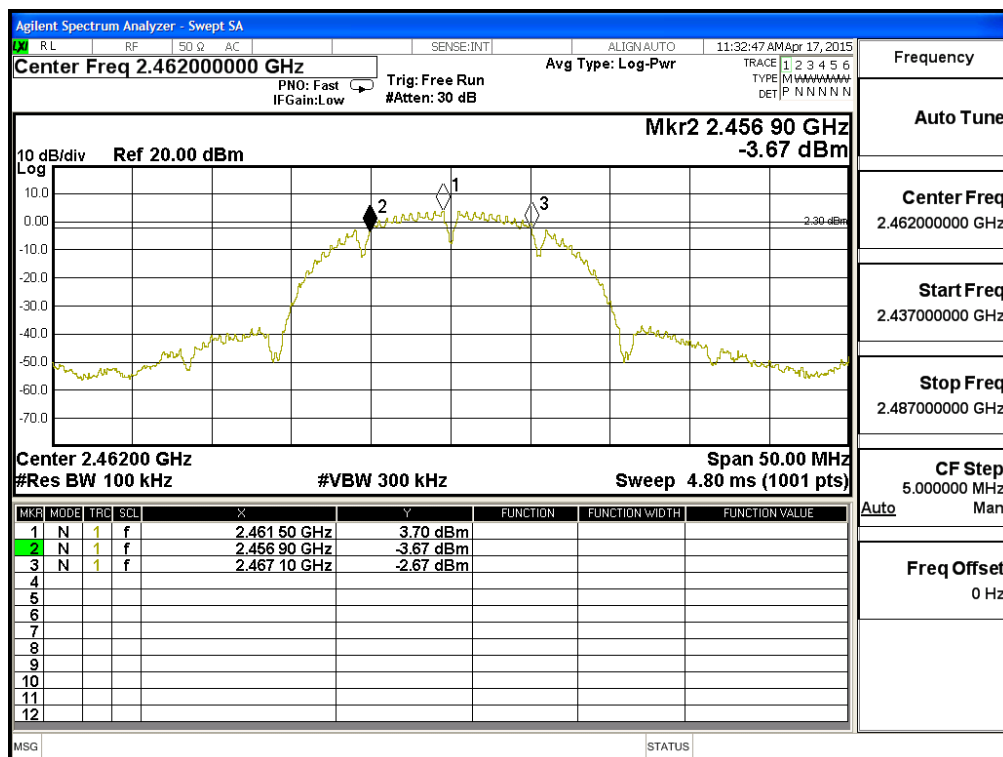




Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit (802.11b 1Mbps) (2467MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 12          | 2467.00         | 10200                   | >500                 | Pass   |


Figure Channel 12:

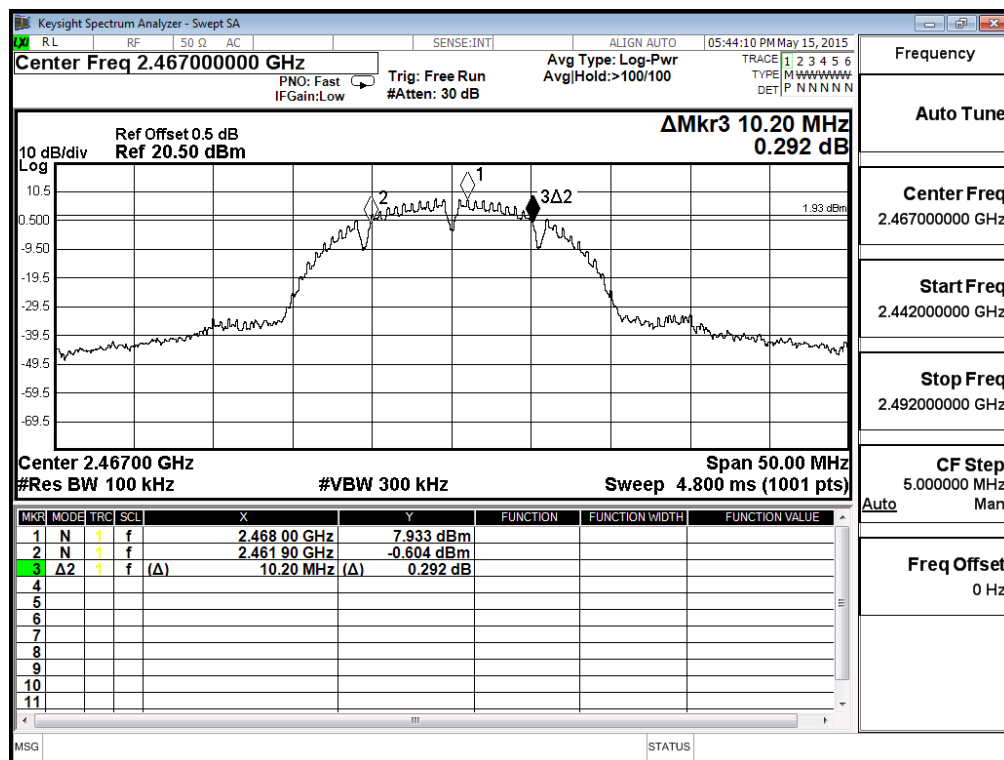

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit (802.11g 6Mbps) (2412MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 1           | 2412.00         | 16650                   | >500                 | Pass   |


Figure Channel 1:

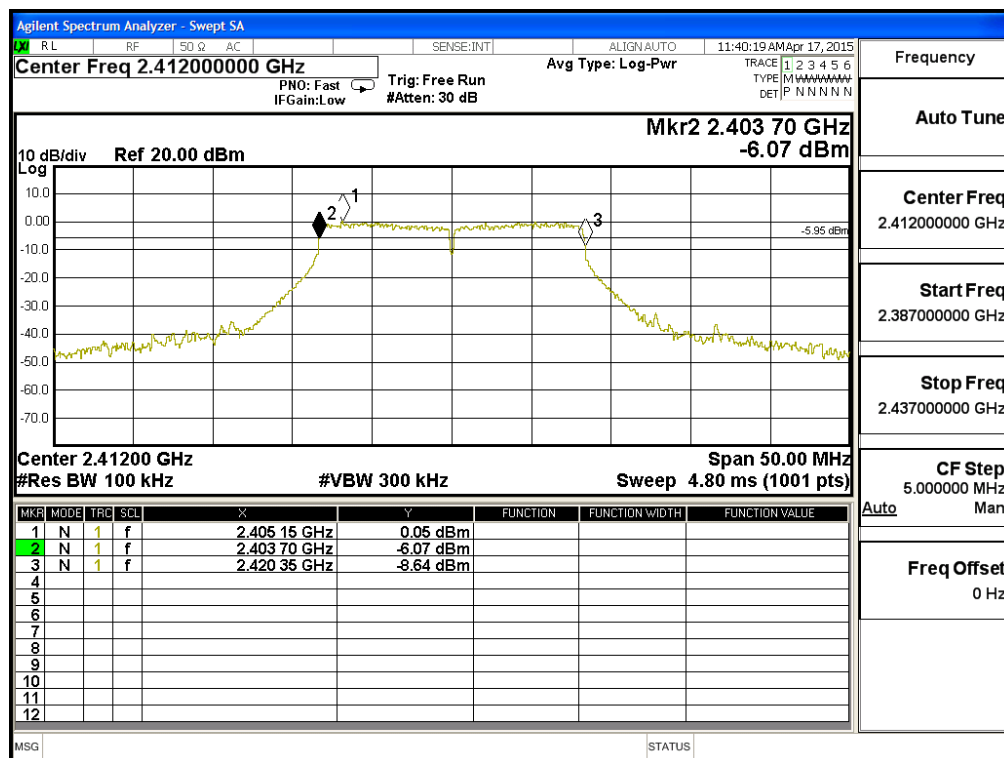

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit (802.11g 6Mbps) (2437MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 6           | 2437.00         | 16650                   | >500                 | Pass   |


Figure Channel 6:

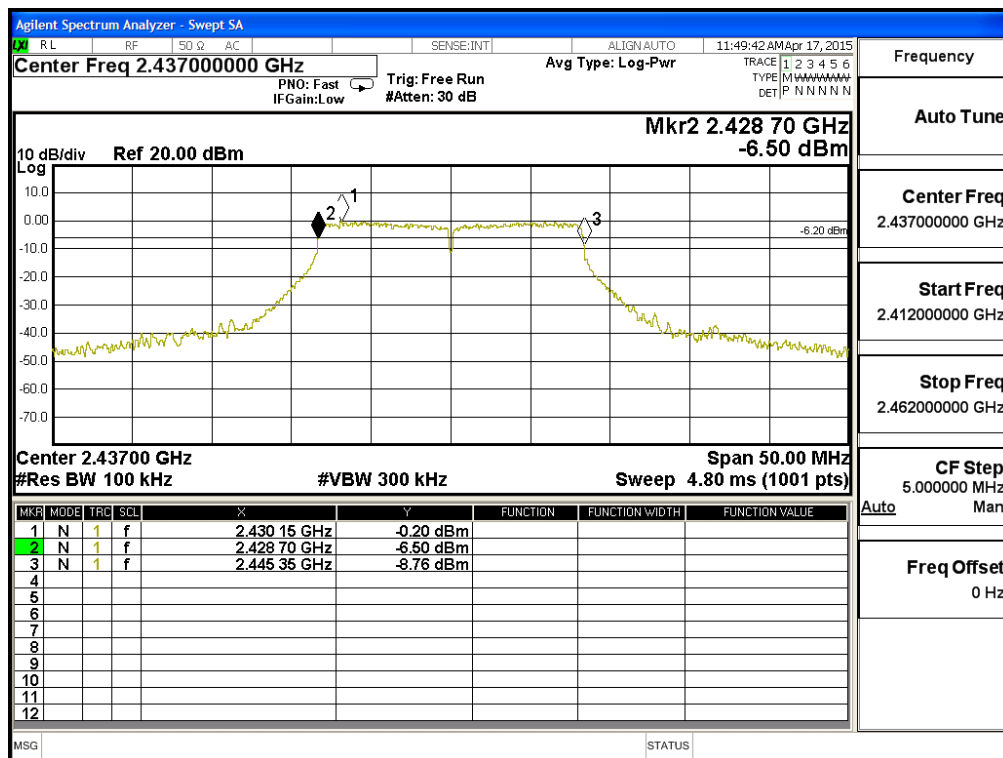

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit (802.11g 6Mbps) (2462MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 11          | 2462.00         | 16650                   | >500                 | Pass   |


Figure Channel 11:

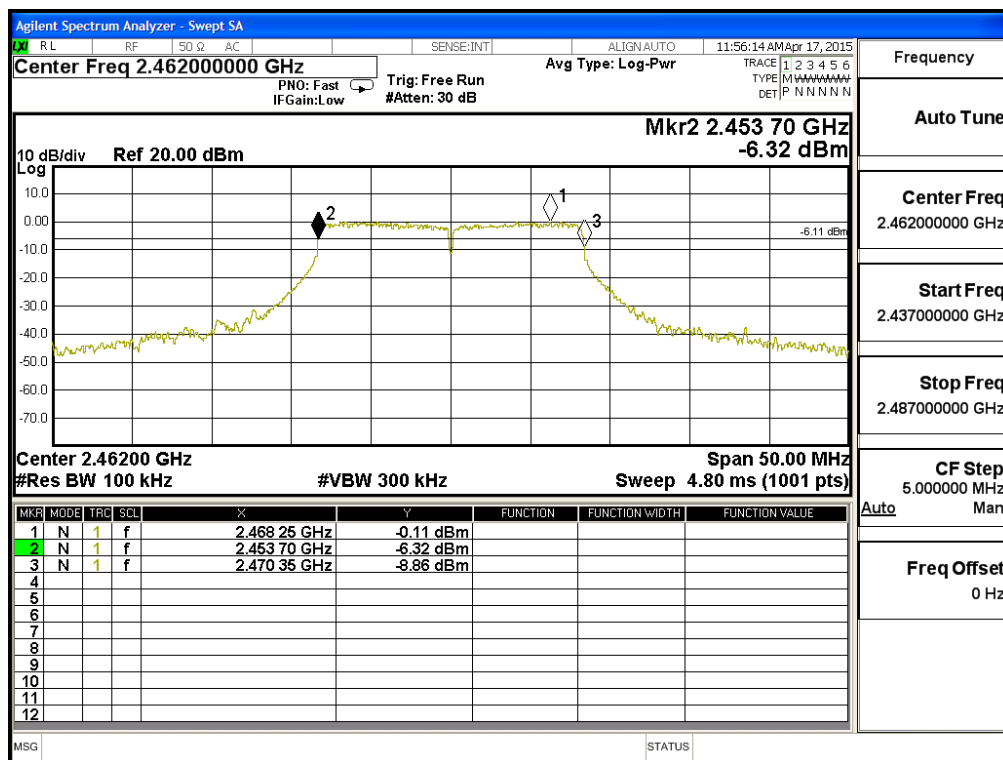

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit (802.11g 6Mbps) (2467MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 12          | 2467.00         | 15250                   | >500                 | Pass   |


Figure Channel 12:

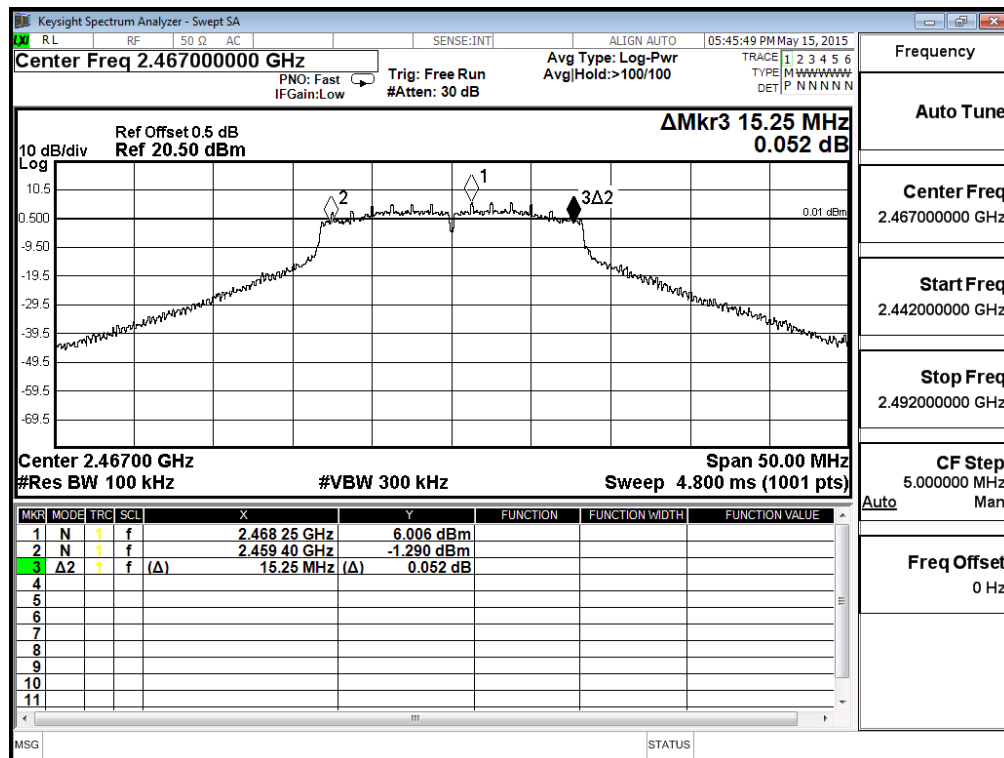

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit - 802.11a 6Mbps (5745MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 149         | 5745.00         | 15450                   | >500                 | Pass   |


**Figure Channel 149:**

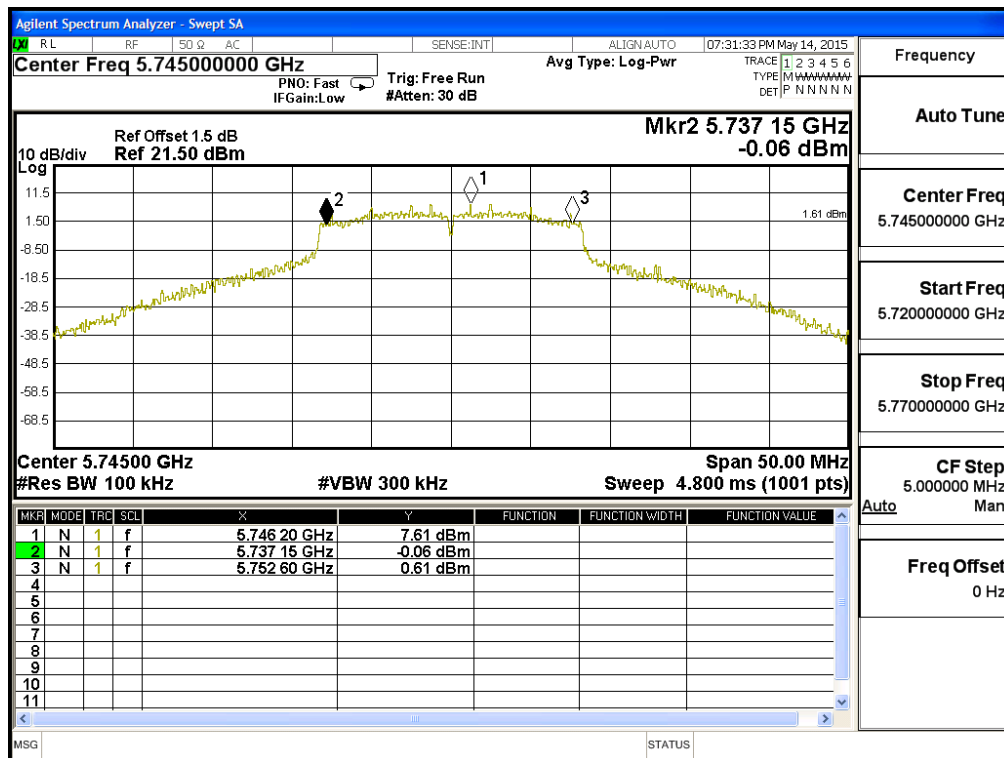

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit - 802.11a 6Mbps (5785MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 157         | 5785.00         | 15250                   | >500                 | Pass   |


Figure Channel 157:

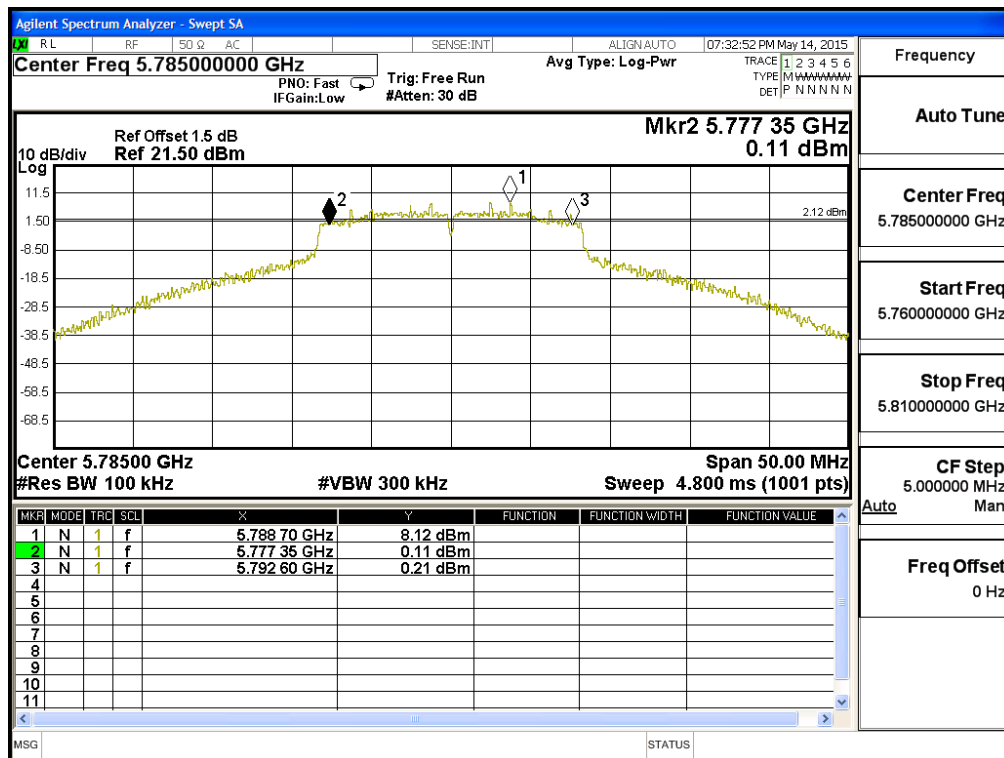

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit - 802.11a 6Mbps (5825MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 165         | 5825.00         | 15200                   | >500                 | Pass   |

Figure Channel 165:

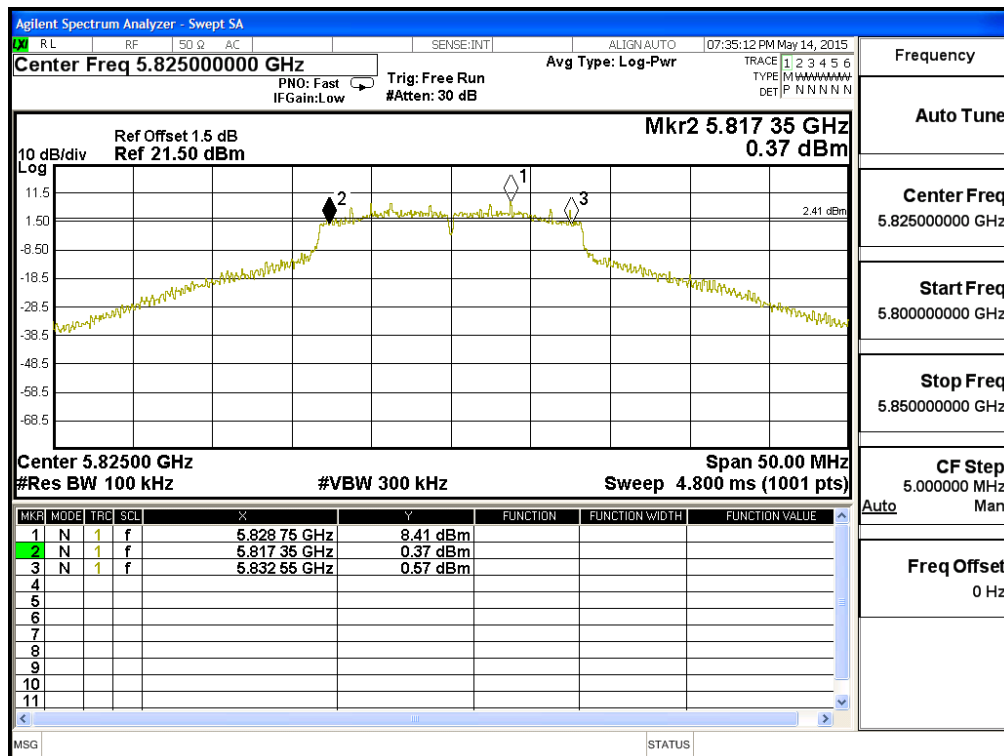




Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit - 802.11n-20BW\_7.2Mbps(2.4G Band) (2412MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 1           | 2412.00         | 17850                   | >500                 | Pass   |


Figure Channel 1:

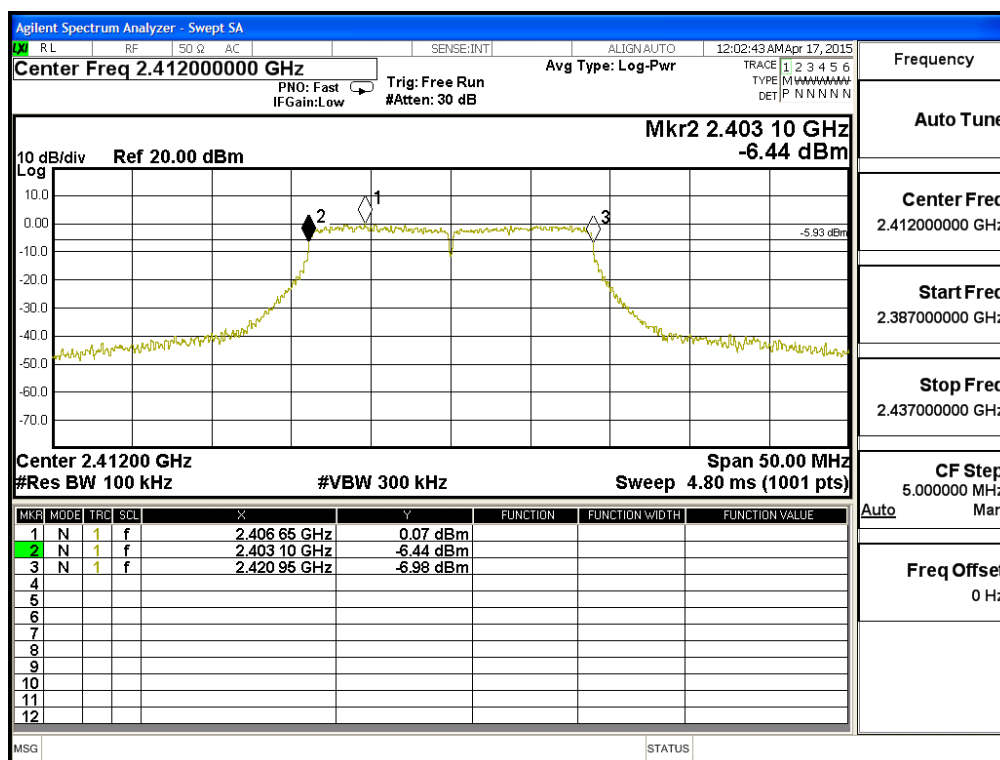

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit - 802.11n-20BW\_7.2Mbps(2.4G Band) (2437MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 6           | 2437.00         | 17850                   | >500                 | Pass   |


Figure Channel 6:

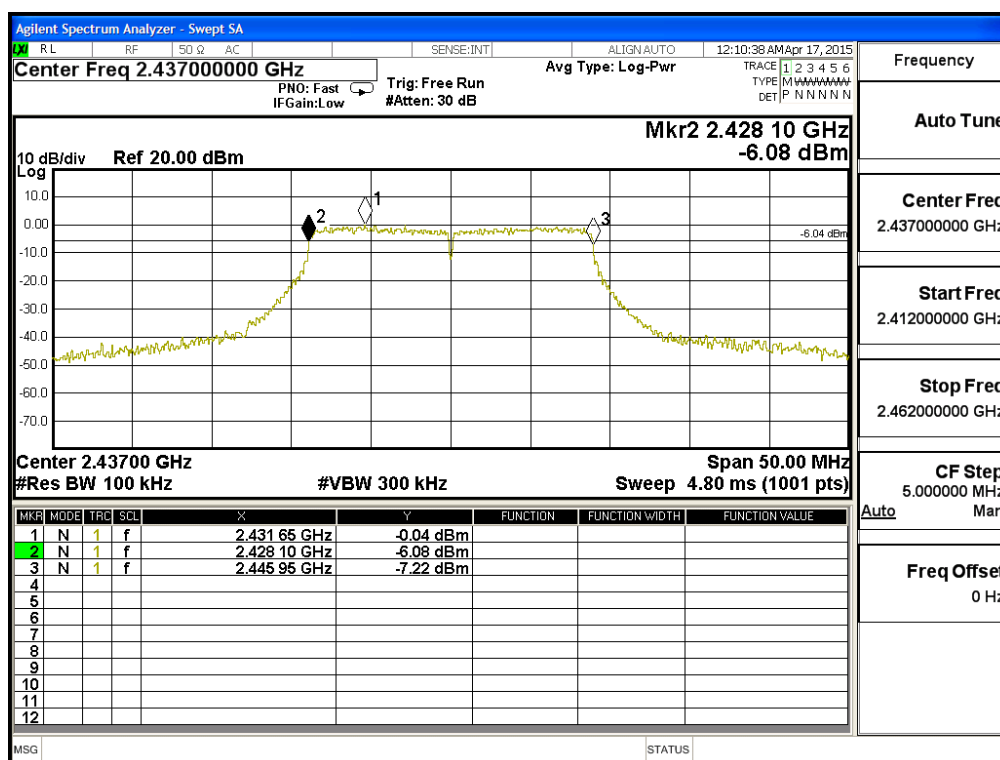

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit - 802.11n-20BW\_7.2Mbps(2.4G Band) (2462MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 11          | 2462.00         | 17850                   | >500                 | Pass   |


Figure Channel 11:

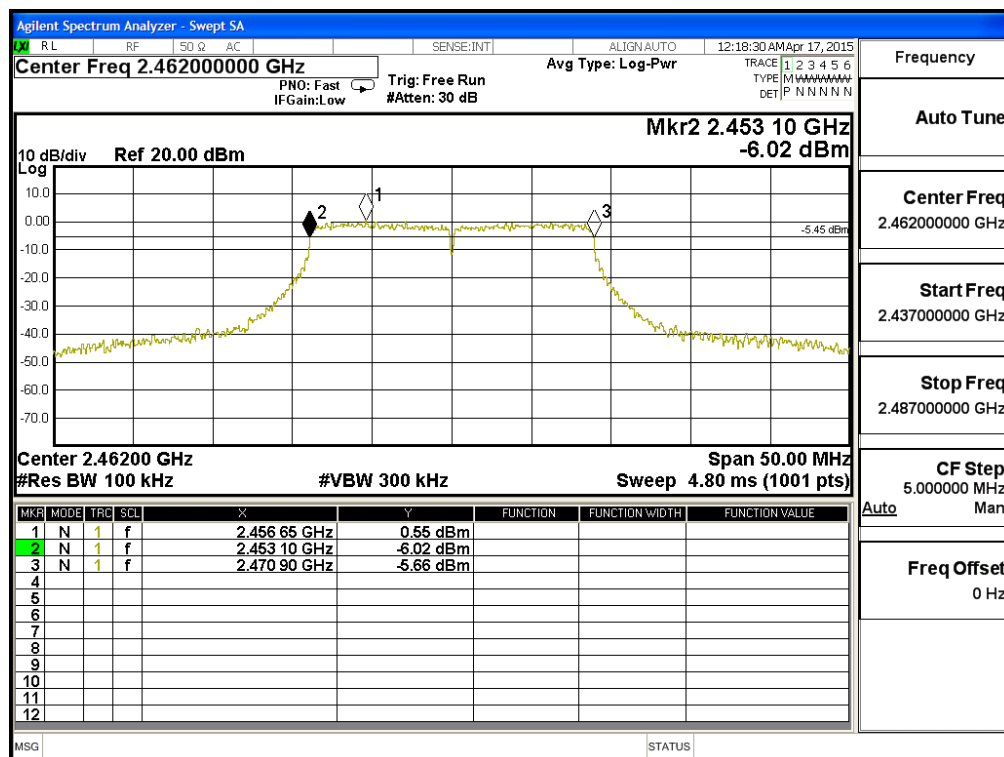

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit - 802.11n-20BW\_7.2Mbps(2.4G Band) (2467MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 12          | 2467.00         | 15200                   | >500                 | Pass   |


Figure Channel 12:

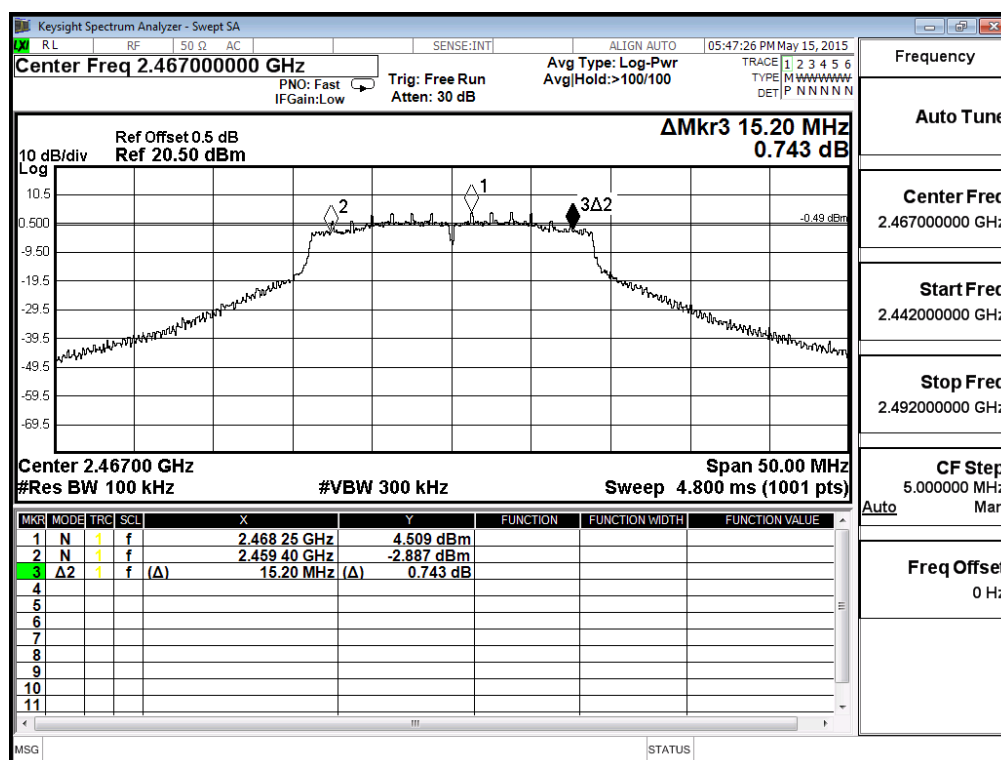

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit - 802.11n-40BW\_15Mbps(2.4G Band) (2422MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 3           | 2422.00         | 36800                   | >500                 | Pass   |


Figure Channel 3:

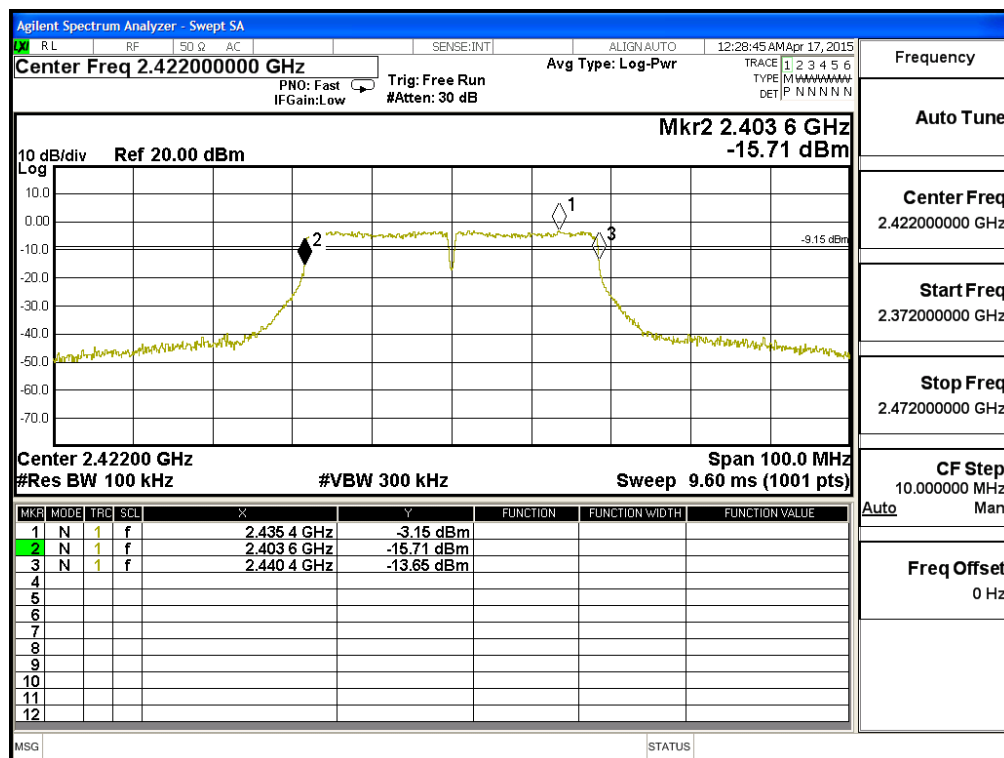

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit - 802.11n-40BW\_15Mbps(2.4G Band) (2437MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 6           | 2437.00         | 36700                   | >500                 | Pass   |


Figure Channel 6:

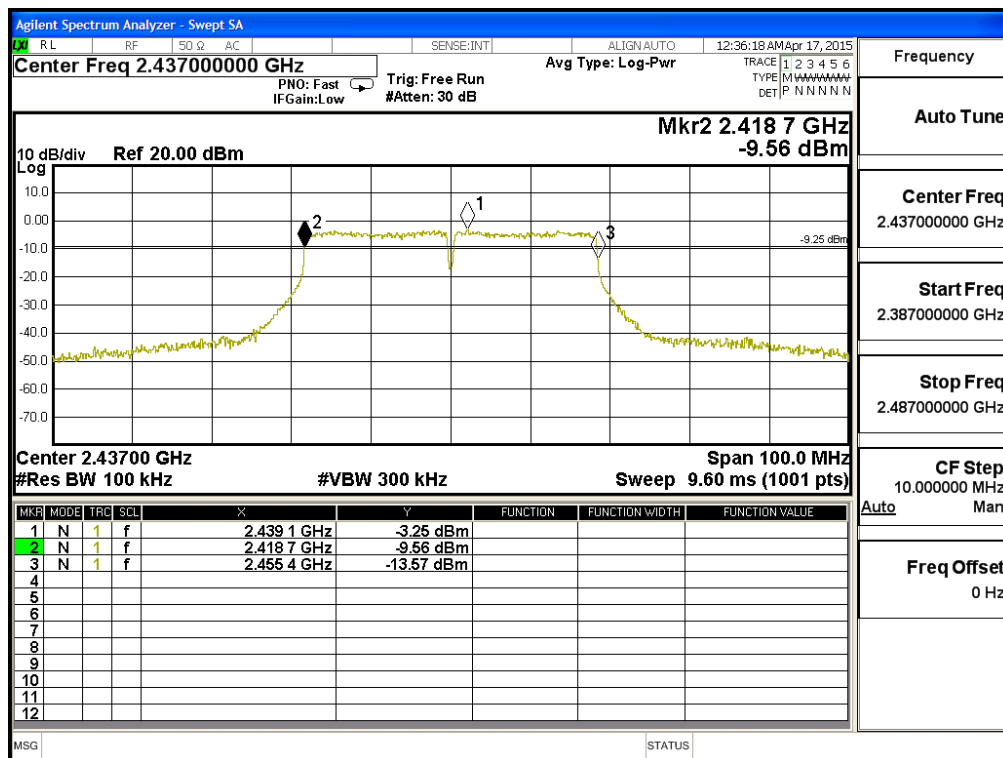

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit - 802.11n-40BW\_15Mbps(2.4G Band) (2452MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 9           | 2452.00         | 36700                   | >500                 | Pass   |


Figure Channel 9:

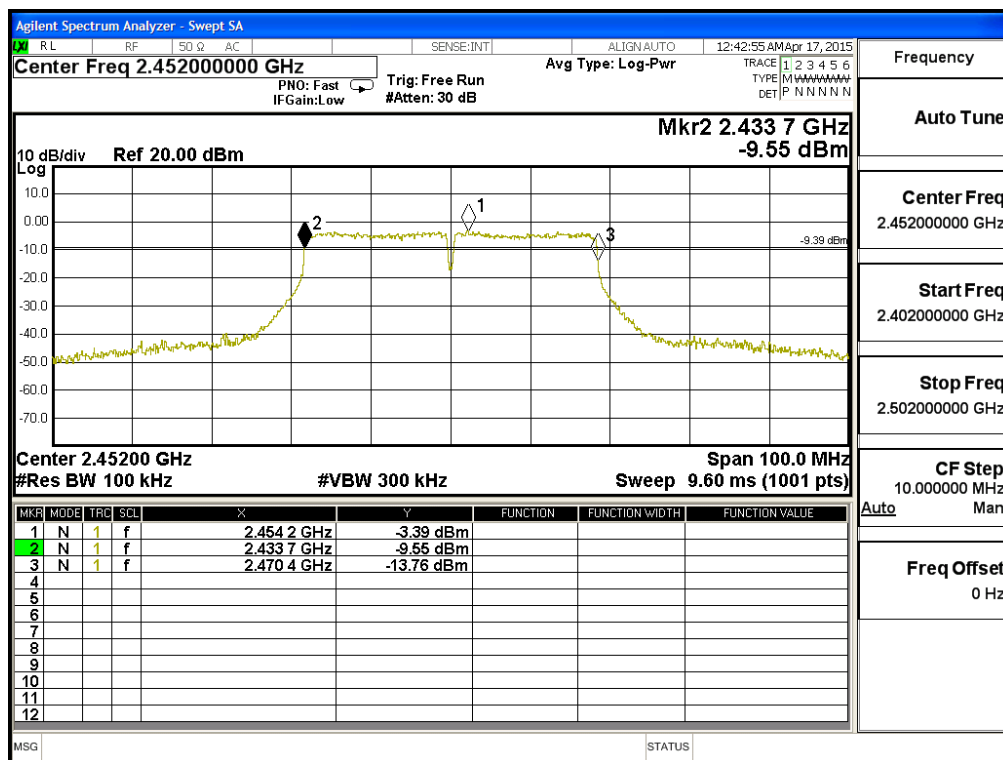

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit - 802.11n-40BW\_15Mbps(2.4G Band) (2457MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 10          | 2457.00         | 35200                   | >500                 | Pass   |

Figure Channel 10:

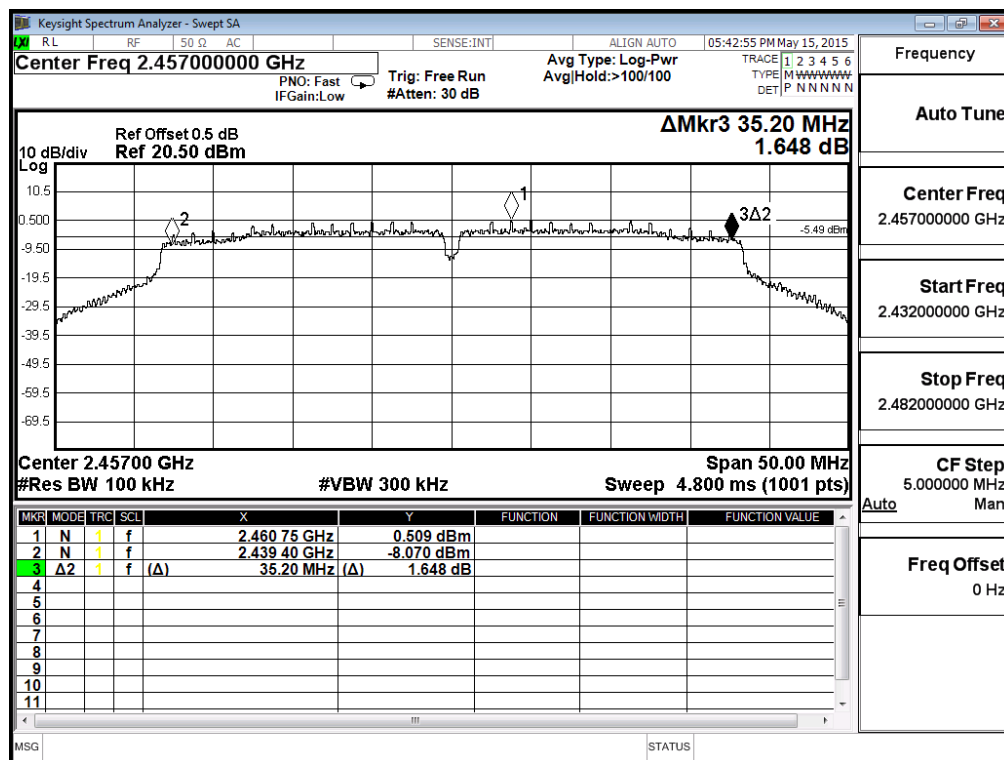




Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit - 802.11n-20BW\_7.2Mbps(5G Band) (5745MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 149         | 5745.00         | 15250                   | >500                 | Pass   |


Figure Channel 149:

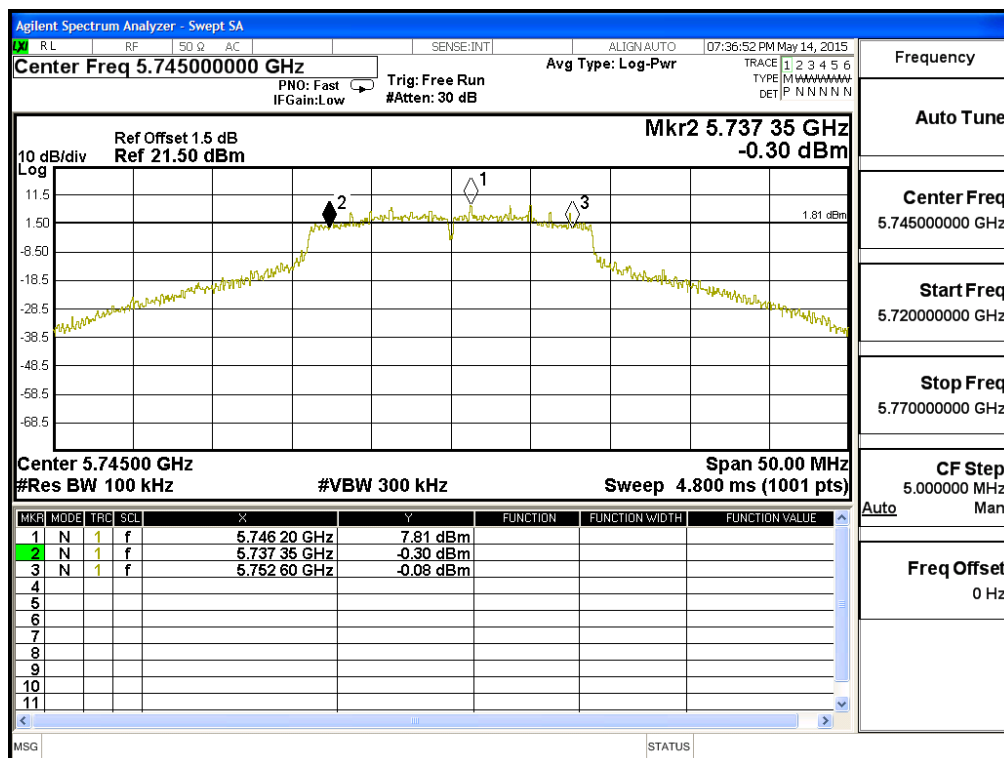

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit - 802.11n-20BW\_7.2Mbps(5G Band) (5785MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 157         | 5785.00         | 15750                   | >500                 | Pass   |


Figure Channel 157:

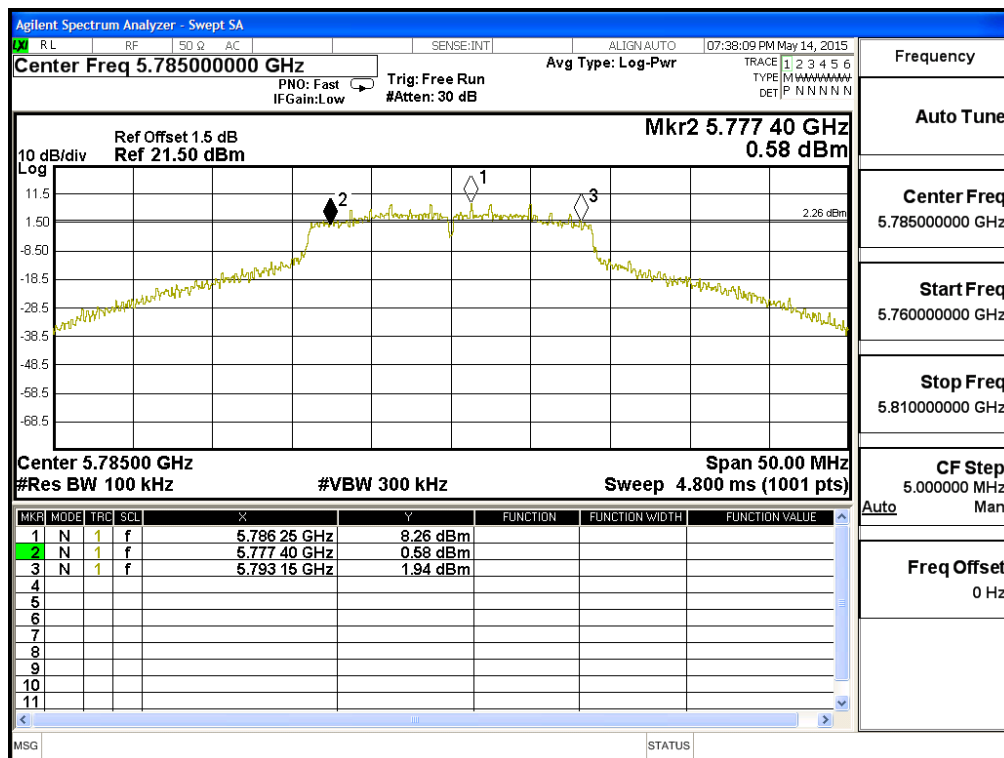

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit - 802.11n-20BW\_7.2Mbps(5G Band) (5825MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 165         | 5825.00         | 15200                   | >500                 | Pass   |


Figure Channel 165:

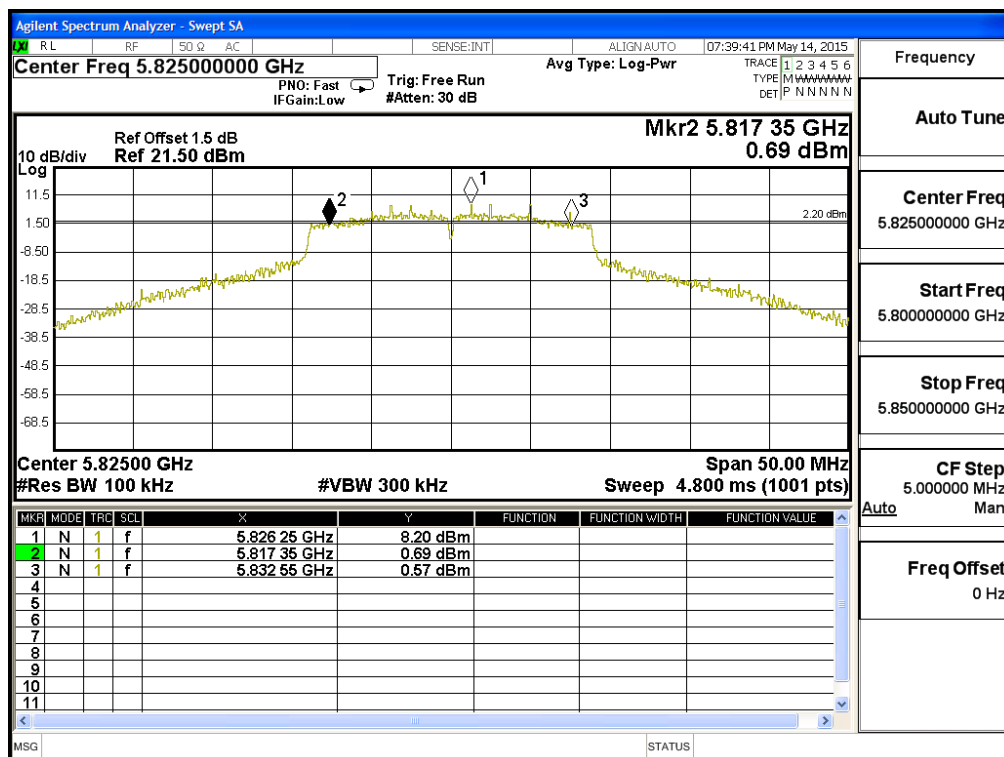

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit - 802.11n-40BW\_15Mbps(5G Band) (5755MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 151         | 5755.00         | 32800                   | >500                 | Pass   |


Figure Channel 151:

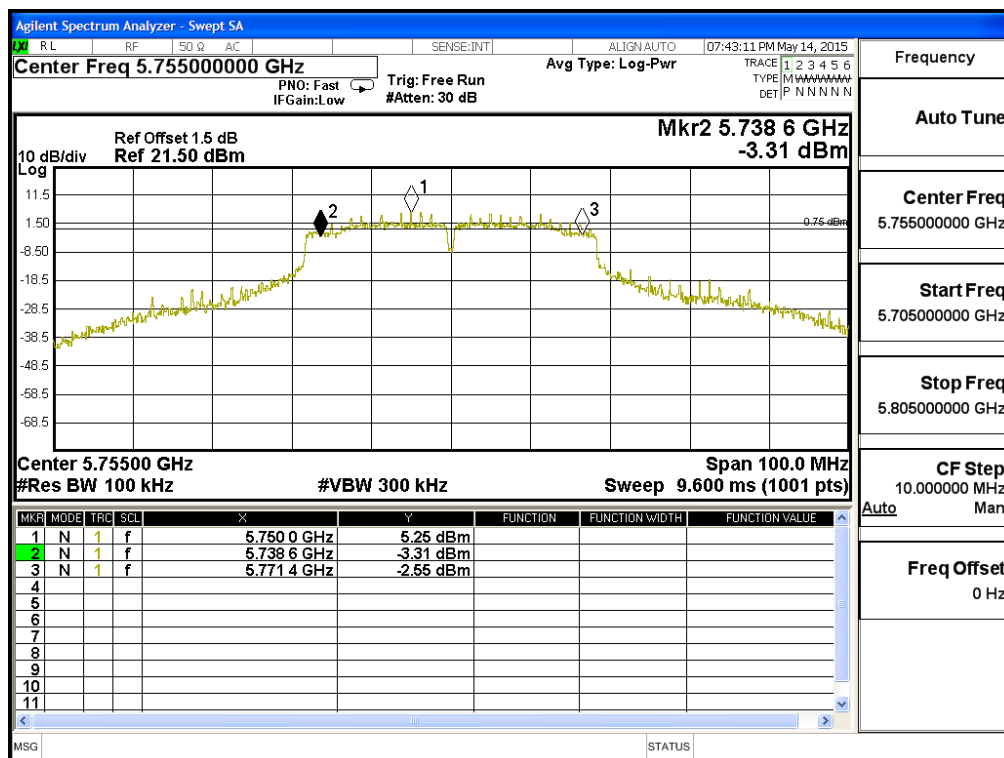

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit - 802.11n-40BW\_15Mbps(5G Band) (5795MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 159         | 5795.00         | 35300                   | >500                 | Pass   |


Figure Channel 159:

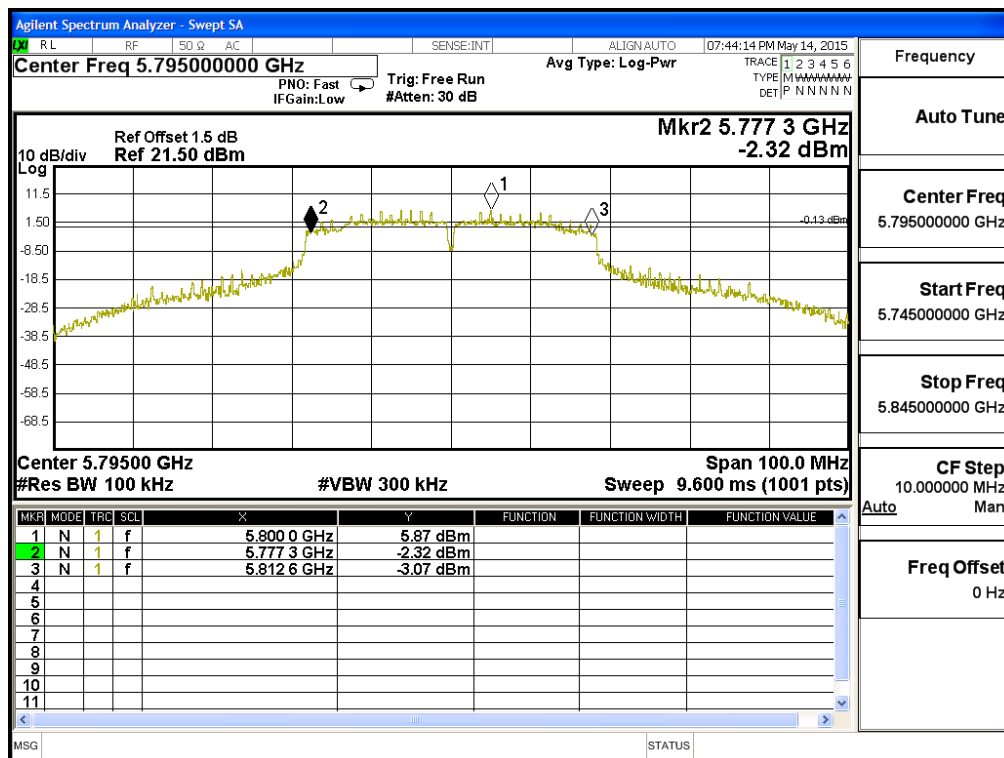

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit - 802.11ac-80BW\_32.5Mbps(5G Band) (5775MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 155         | 5775.00         | 73950                   | >500                 | Pass   |

**Figure Channel 155:**

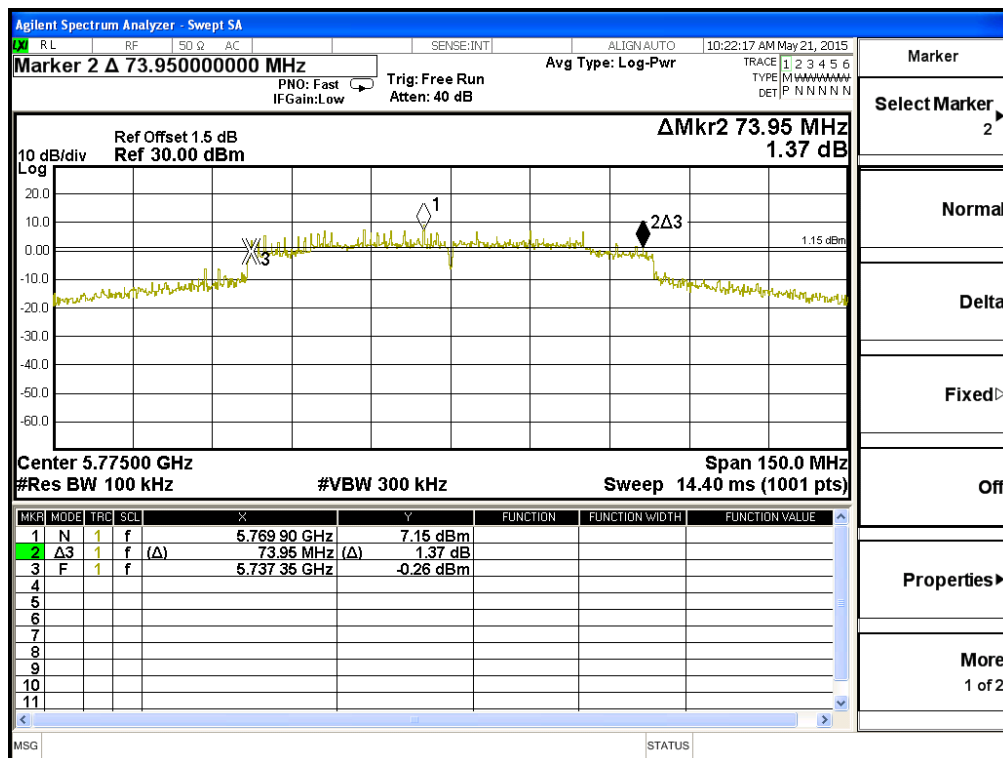


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2412MHz)

Chain A

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 1           | 2412.00         | 15200                   | >500                 | Pass   |


Figure Channel 1:

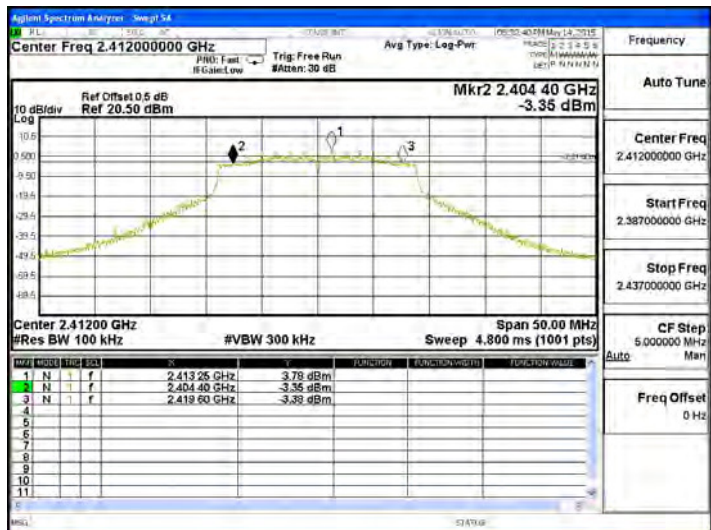

Chain B

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 1           | 2412.00         | 15200                   | >500                 | Pass   |

Figure Channel 1:

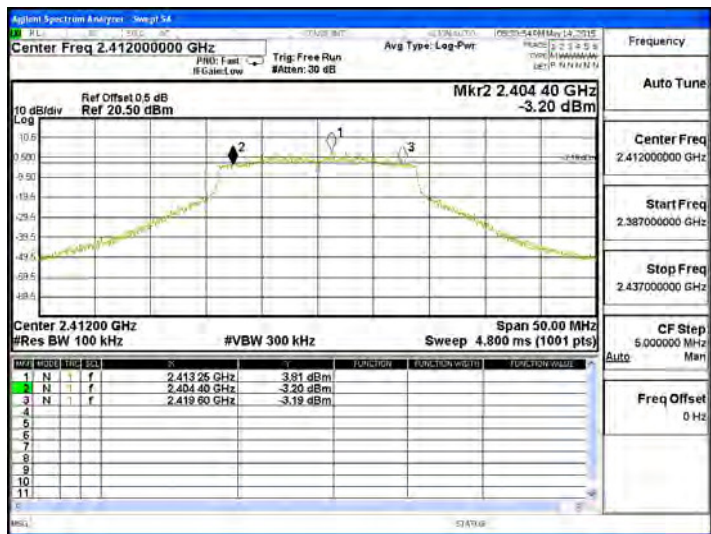


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2437MHz)

Chain A

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 6           | 2437.00         | 15200                   | >500                 | Pass   |

Figure Channel 6:

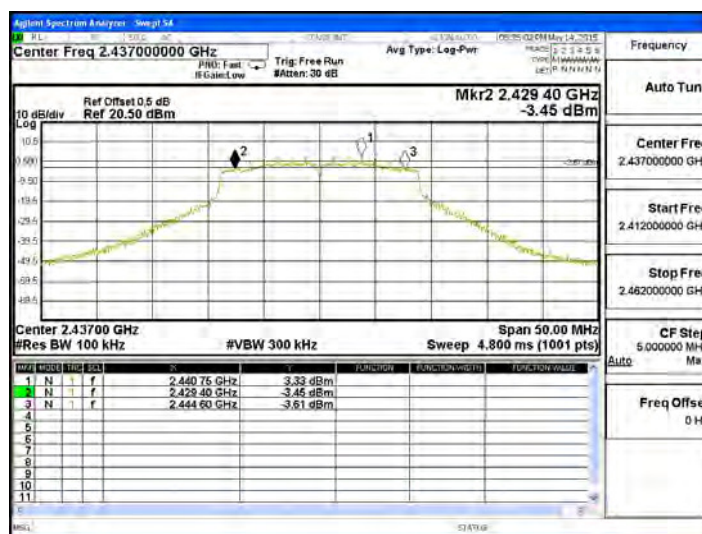

Chain B

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 6           | 2437.00         | 15200                   | >500                 | Pass   |

Figure Channel 6:






Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2462MHz)

Chain A

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 11          | 2462.00         | 15200                   | >500                 | Pass   |


Figure Channel 11:

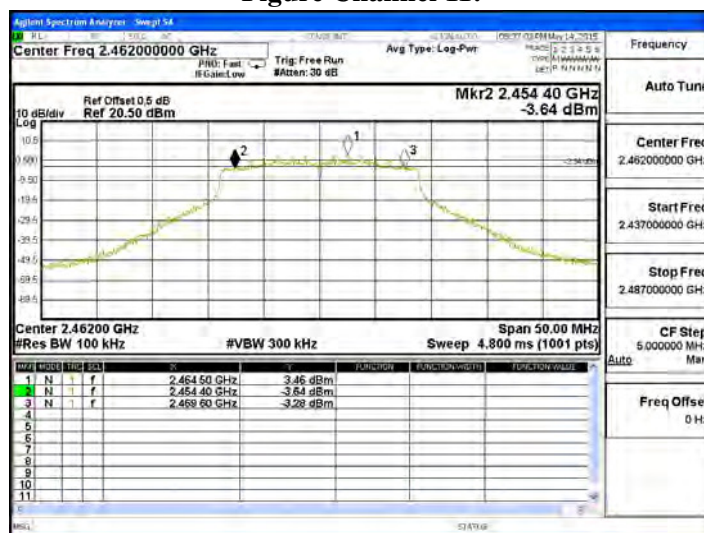

Chain B

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 11          | 2462.00         | 15200                   | >500                 | Pass   |

Figure Channel 11:

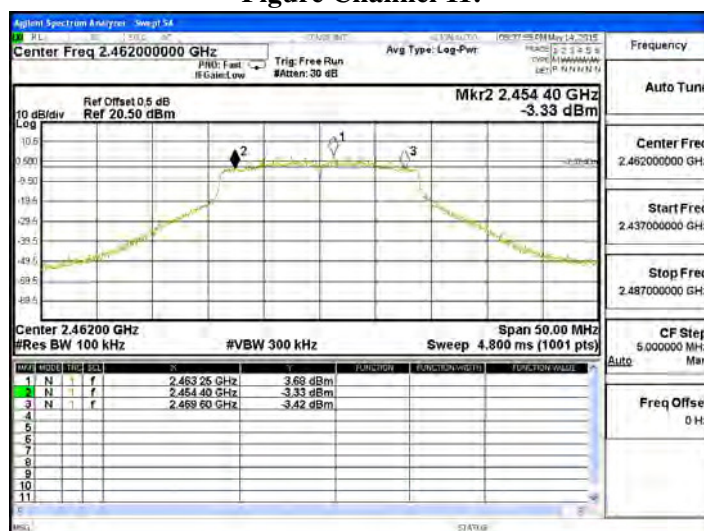


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2467MHz)

Chain A

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 12          | 2467.00         | 16450                   | >500                 | Pass   |


Figure Channel 12:

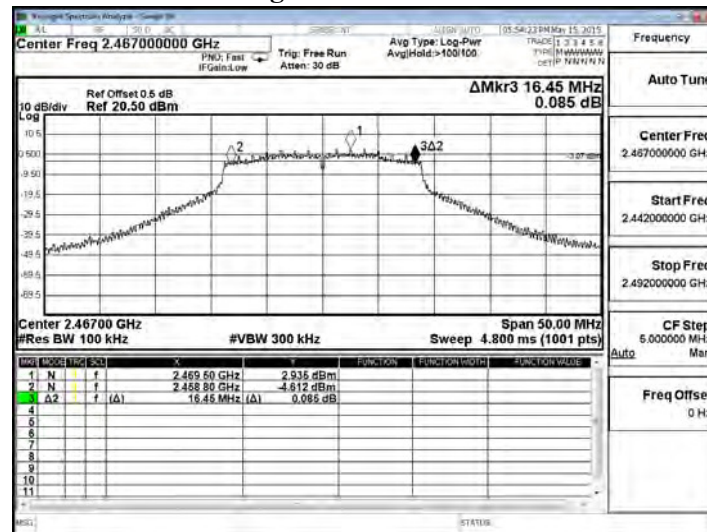

Chain B

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 12          | 2467.00         | 16400                   | >500                 | Pass   |

Figure Channel 12:

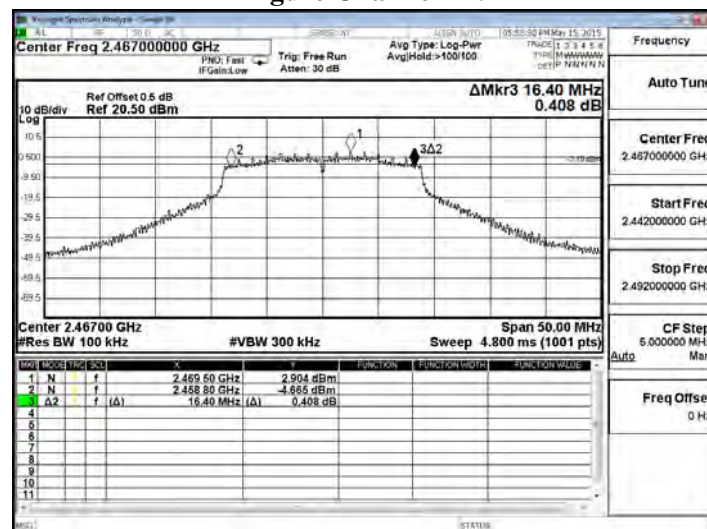


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2422MHz)

Chain A

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 3           | 2422.00         | 35300                   | >500                 | Pass   |

Figure Channel 3:

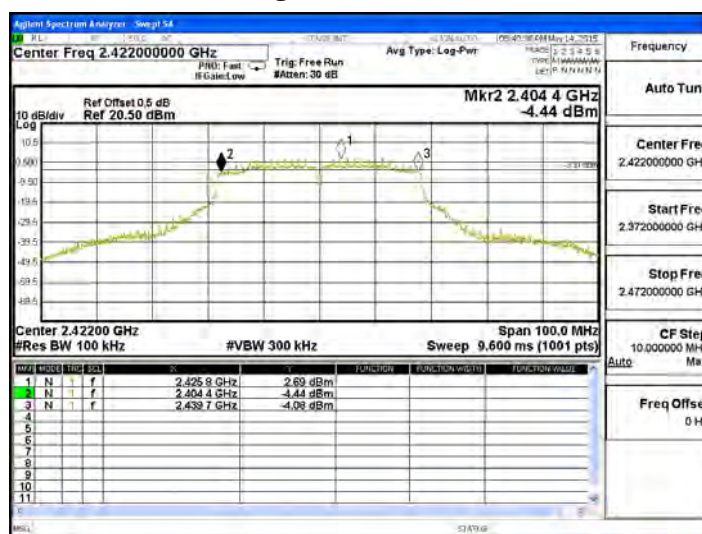

Chain B

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 3           | 2422.00         | 35200                   | >500                 | Pass   |

Figure Channel 3:








Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2452MHz)

Chain A

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 9           | 2452.00         | 35300                   | >500                 | Pass   |


Figure Channel 9:

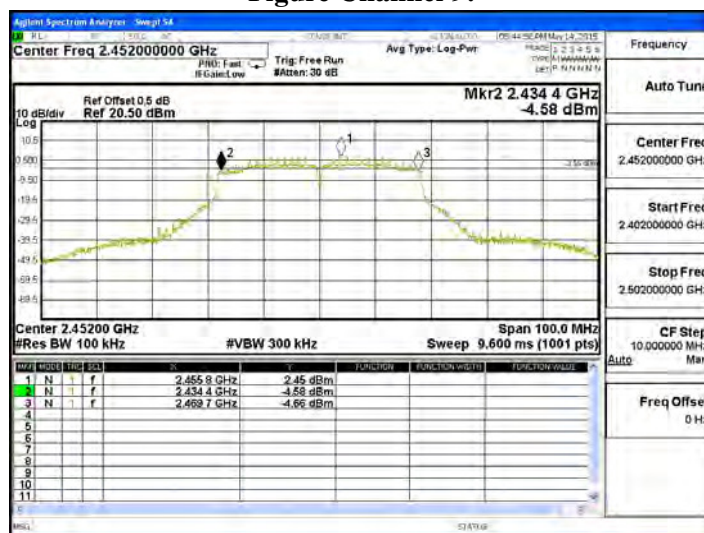

Chain B

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 9           | 2452.00         | 35300                   | >500                 | Pass   |

Figure Channel 9:

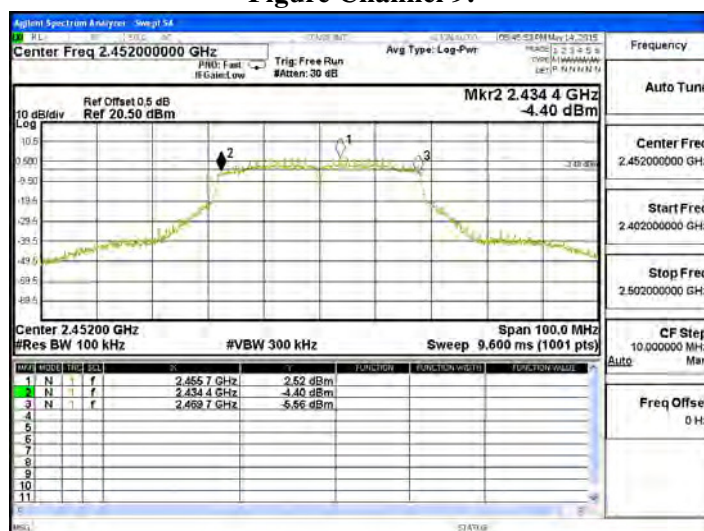


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2457MHz)

Chain A

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 10          | 2457.00         | 35200                   | >500                 | Pass   |


Figure Channel 10:

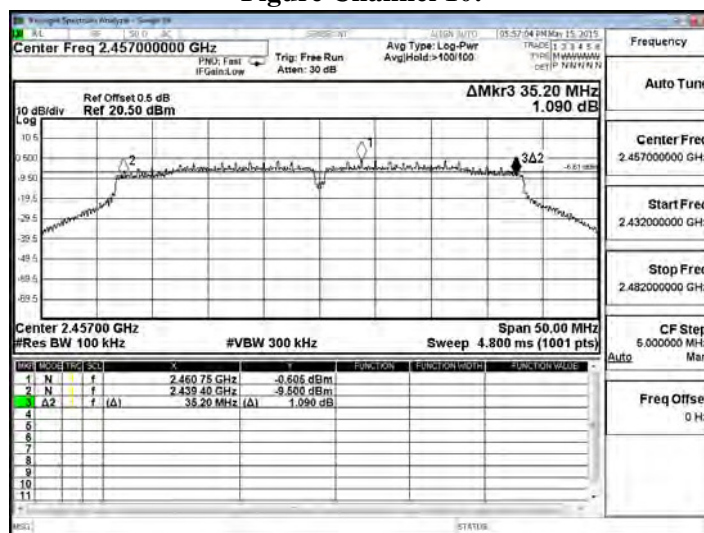

Chain B

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 10          | 2457.00         | 35200                   | >500                 | Pass   |

Figure Channel 10:

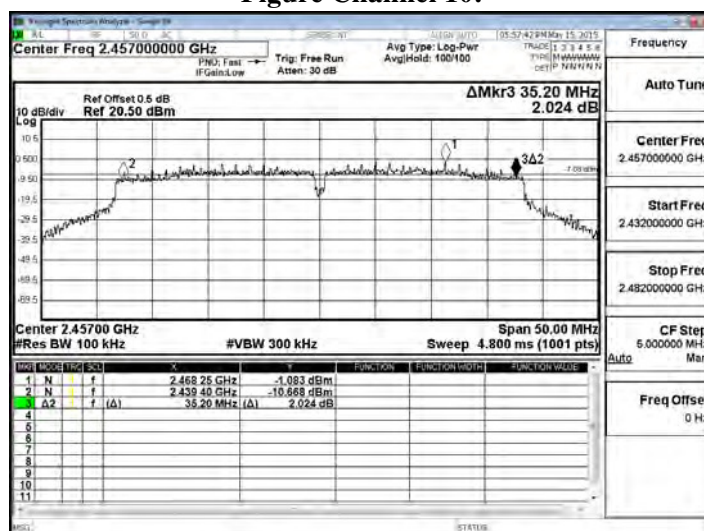


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(5G Band) (5745MHz)

Chain A

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 149         | 5745.00         | 15250                   | >500                 | Pass   |


Figure Channel 149:

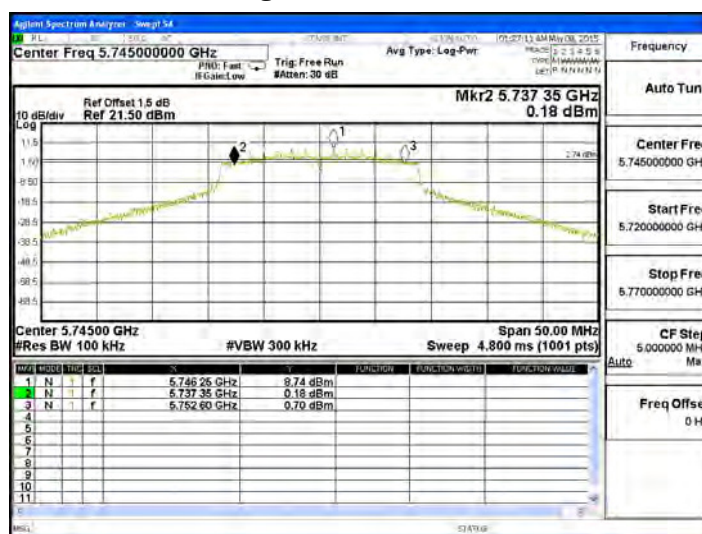

Chain B

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 149         | 5745.00         | 15150                   | >500                 | Pass   |

Figure Channel 149:

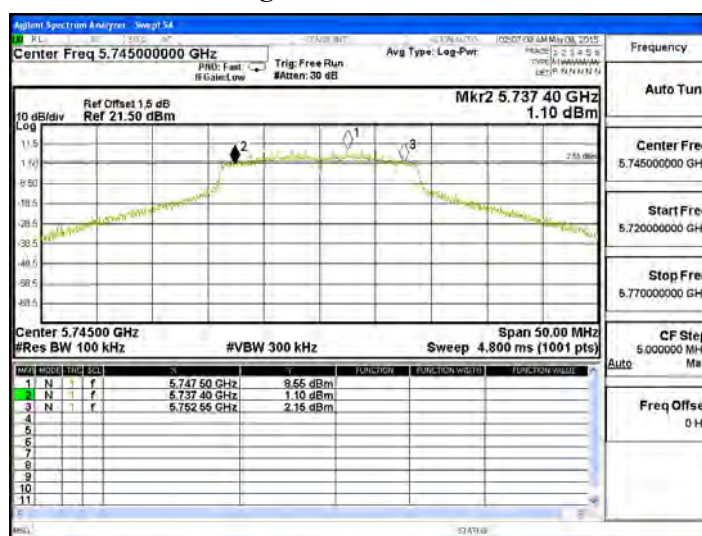


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(5G Band) (5785MHz)

Chain A

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 157         | 5785.00         | 15200                   | >500                 | Pass   |


Figure Channel 157:

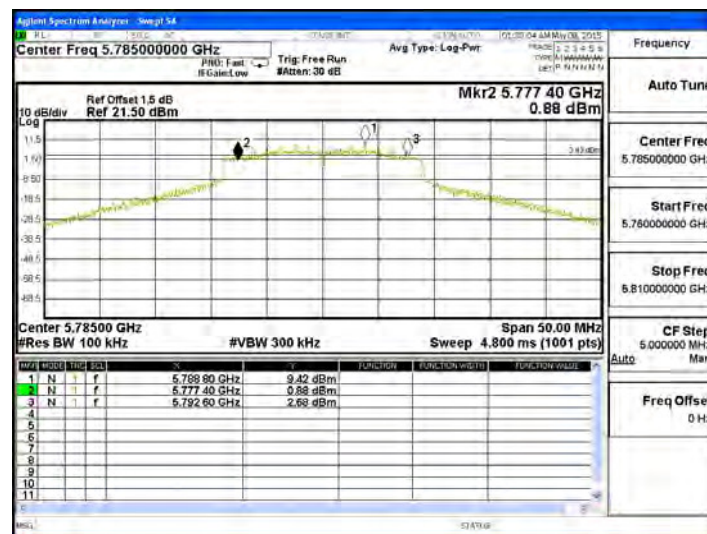

Chain B

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 157         | 5785.00         | 15200                   | >500                 | Pass   |

Figure Channel 157:

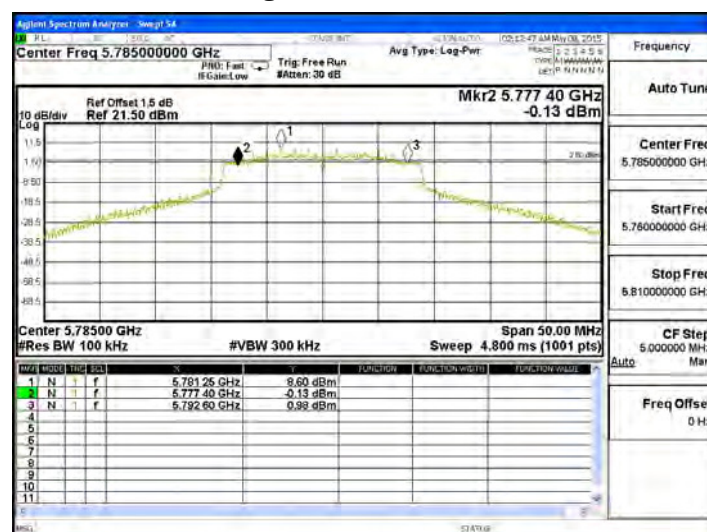




Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-20BW\_14.4Mbps(5G Band) (5825MHz)

Chain A

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 165         | 5825.00         | 15200                   | >500                 | Pass   |


Figure Channel 165:

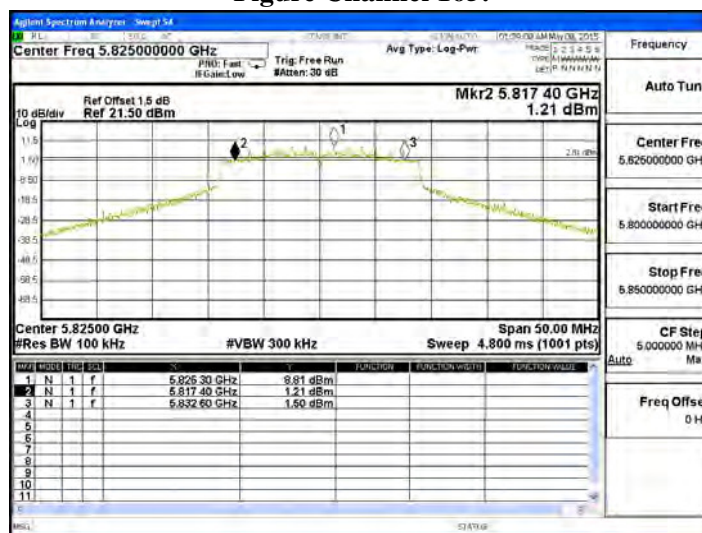

Chain B

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 165         | 5825.00         | 15800                   | >500                 | Pass   |

Figure Channel 165:

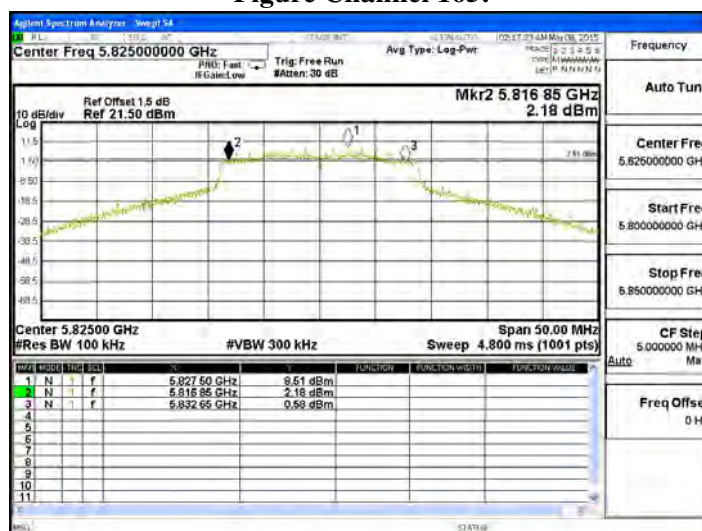


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-40BW\_30Mbps(5G Band) (5755MHz)

Chain A

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 151         | 5755.00         | 35300                   | >500                 | Pass   |


Figure Channel 151:

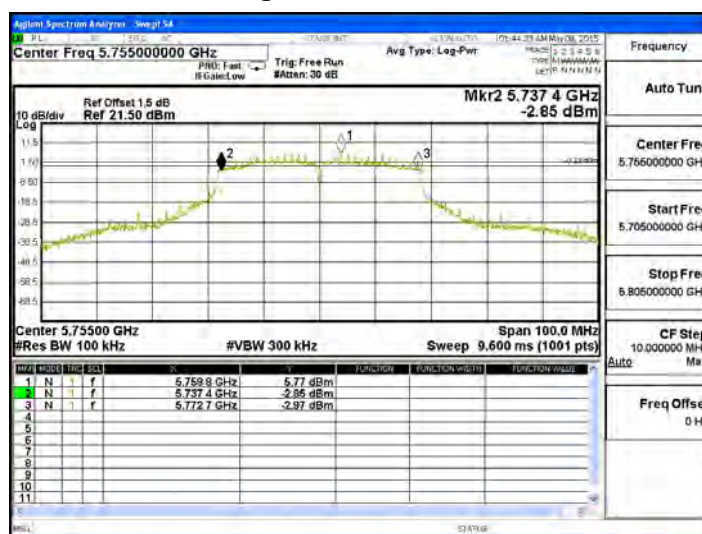

Chain B

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 151         | 5755.00         | 35300                   | >500                 | Pass   |

Figure Channel 151:

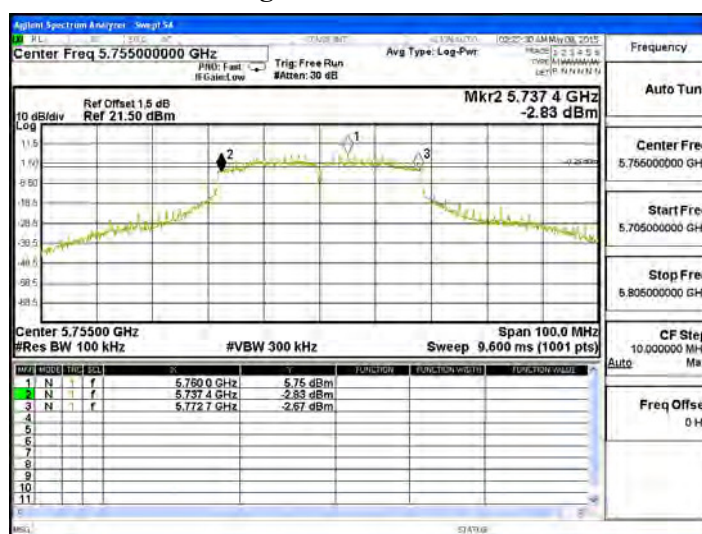


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11n-40BW\_30Mbps(5G Band) (5795MHz)

Chain A

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 159         | 5795.00         | 35300                   | >500                 | Pass   |


Figure Channel 159:

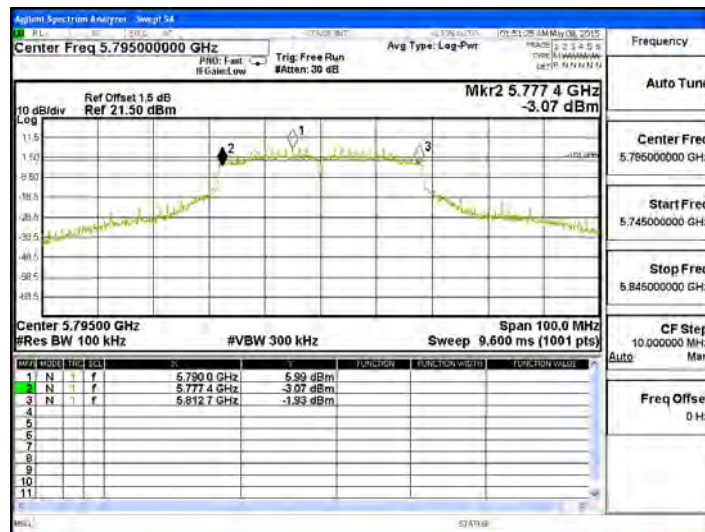

Chain B

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 159         | 5795.00         | 35300                   | >500                 | Pass   |

Figure Channel 159:

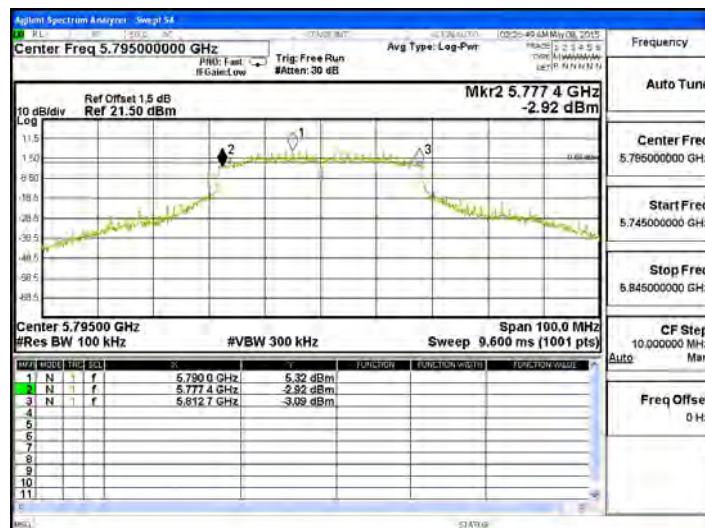


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit - 802.11ac-80BW\_65Mbps(5G Band) (5775MHz)

Chain A

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 155         | 5775.00         | 72750                   | >500                 | Pass   |

Figure Channel 155:

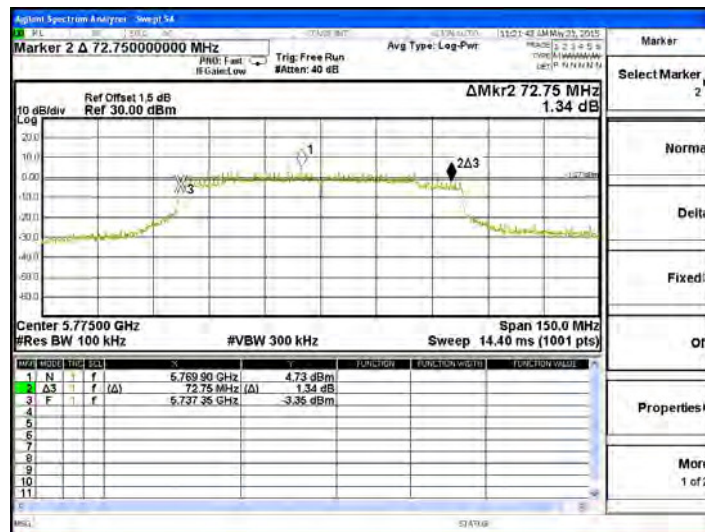

Chain B

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 155         | 5775.00         | 75150                   | >500                 | Pass   |

Figure Channel 155:

