



FCC RF Test Report

APPLICANT : Sonim Technologies, Inc.
EQUIPMENT : GSM, WCDMA, LTE Cell Phone
BRAND NAME : Sonim
MODEL NAME : XP5900(P14500)
XP5900(P14600)
XP5900(P14510)
XP5900(P14610)
XP5900(P14501)
XP5900(P14601)
FCC ID : WYPP14510
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Jan. 06, 2022 ~ Feb. 01, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

Alex Wang

Approved by: Alex Wang / Manager



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	7
1.6 Testing Location	7
1.7 Test Software.....	7
1.8 Applicable Standards.....	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Carrier Frequency and Channel	9
2.2 Test Mode.....	10
2.3 Connection Diagram of Test System.....	11
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	12
2.6 Measurement Results Explanation Example.....	12
3 TEST RESULT	13
3.1 26dB & 99% Occupied Bandwidth Measurement	13
3.2 Maximum Conducted Output Power Measurement	17
3.3 Power Spectral Density Measurement	19
3.4 Unwanted Emissions Measurement.....	21
3.5 AC Conducted Emission Measurement.....	26
3.6 Antenna Requirements.....	28
4 LIST OF MEASURING EQUIPMENT	29
5 UNCERTAINTY OF EVALUATION	30
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR210804D	Rev. 01	Initial issue of report	Mar. 07, 2022

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Report only	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 3.18 dB at 5150.000 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.52 dB at 0.174 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Sonim Technologies, Inc.

6500 River Place Blvd. Building 7, Suite 250, Austin, TX 78730, USA

1.2 Manufacturer

Sonim Technologies, Inc.

6500 River Place Blvd. Building 7, Suite 250, Austin, TX 78730, USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	GSM, WCDMA, LTE Cell Phone
Brand Name	Sonim
Model Name	XP5900(P14500) XP5900(P14600) XP5900(P14510) XP5900(P14610) XP5900(P14501) XP5900(P14601)
FCC ID	WYPP14510
IMEI Code	Conducted: 357855510003391/357855510008390 Conduction: 016107000012711 Radiation: 016107000012646 for Sample 1 004400152020002 for Sample 2
HW Version	1.0
SW Version	5P.2.0-01-11.0.0-10.22.14
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The different model names are for different market purpose.
3. There are two types of EUT, the sample 1 is 1st source with different Carriers and the sample 2 is 2nd source with different Carriers. The difference could refer to the XP5900_Operational Description of Product Equality Declaration which is exhibit separately. According to the difference, we evaluate the sample 1 to perform full test and the sample 2 is verified for RSE testing.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 15.06 dBm / 0.0321 W 802.11n HT20 : 14.82 dBm / 0.0303 W 802.11n HT40 : 15.76 dBm / 0.0377 W 802.11ac VHT20 : 12.83 dBm / 0.0192 W 802.11ac VHT40 : 13.75 dBm / 0.0237 W 802.11ac VHT80 : 9.19 dBm / 0.0083 W <5260 MHz ~ 5320 MHz> 802.11a : 15.37 dBm / 0.0344 W 802.11n HT20 : 15.10 dBm / 0.0324 W 802.11n HT40 : 15.78 dBm / 0.0378 W 802.11ac VHT20 : 13.13 dBm / 0.0206 W 802.11ac VHT40 : 14.13 dBm / 0.0259 W 802.11ac VHT80 : 10.22 dBm / 0.0105 W <5500 MHz ~ 5700 MHz > 802.11a : 14.84 dBm / 0.0305 W 802.11n HT20 : 14.68 dBm / 0.0294 W 802.11n HT40 : 15.66 dBm / 0.0368 W 802.11ac VHT20 : 13.56 dBm / 0.0227 W 802.11ac VHT40 : 14.47 dBm / 0.0280 W 802.11ac VHT80 : 14.02 dBm / 0.0252 W
99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 16.73 MHz 802.11n HT20 : 17.93 MHz 802.11n HT40 : 36.66 MHz 802.11ac VHT80 : 75.88 MHz <5260 MHz ~ 5320 MHz> 802.11a : 16.68 MHz 802.11n HT20 : 17.88 MHz 802.11n HT40 : 36.46 MHz 802.11ac VHT80 : 75.76 MHz <5500 MHz ~ 5700 MHz > 802.11a : 16.73 MHz 802.11n HT20 : 17.88 MHz 802.11n HT40 : 36.66 MHz 802.11ac VHT80 : 75.76 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> PIFA Antenna with gain 3.95 dBi <5260 MHz ~ 5320 MHz> PIFA Antenna with gain 3.94 dBi <5500 MHz ~ 5700 MHz> PIFA Antenna with gain 4.65 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

Note: Note: For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing



have assessed only 802.11n HT20/HT40 by referring to their maximum conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5500- 5700 MHz MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "#" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN Link(5G) + USB Cable (Charging from Adapter) + Earphone
Remark: 1. For Radiated Test Cases, The tests were performance with Adapter, Earphone and USB Cable 2. All test modes of the Radiated Spurious Emission (RSE) were tested; only the worst data in each bandwidth are shown in the reported.	

Simultaneous transmission
802.11n HT40 CH38(5190MHz)+LTE_B13(BW=5M) for sample 1 802.11ac VHT80 CH42(5210MHz)+LTE_B13(BW=5M) for sample 2


Ch. #		U-NII-1 : 5180-5240 MHz	U-NII-2A : 5260-5320 MHz	U-NII-2C : 5500- 5700 MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		U-NII-1 : 5180-5240 MHz	U-NII-2A : 5260-5320 MHz	U-NII-2C : 5500- 5700 MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		U-NII-1 : 5180-5240 MHz	U-NII-2A : 5260-5320 MHz	U-NII-2C : 5500- 5700 MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134

Ch. #		U-NII-1 : 5180-5240 MHz	U-NII-2A : 5260-5320 MHz	U-NII-2C : 5500- 5700 MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	122

2.3 Connection Diagram of Test System

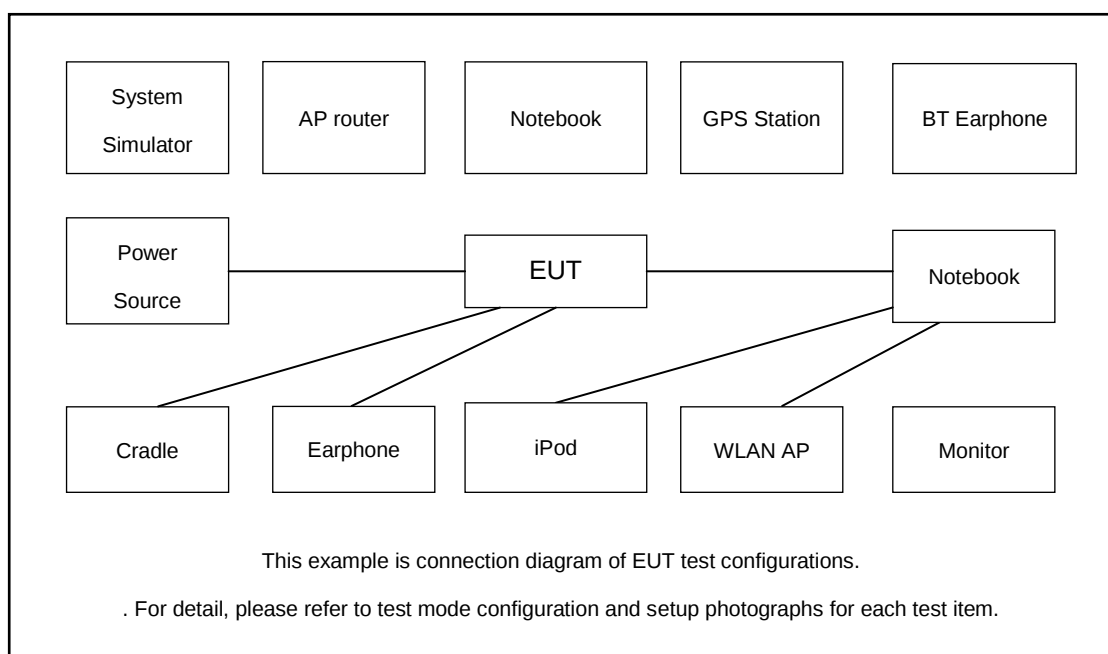

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
3.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
4.	SD Card	Kingston	8GB	N/A	N/A	N/A
5.	Earphone	Lenovo	P121	N/A	N/A	Unshielded,1.2m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 7.0 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 7.0 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the OBW and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.



3.1.4 Test Setup


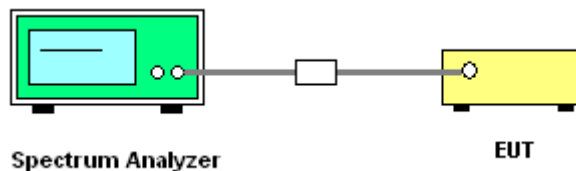






3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

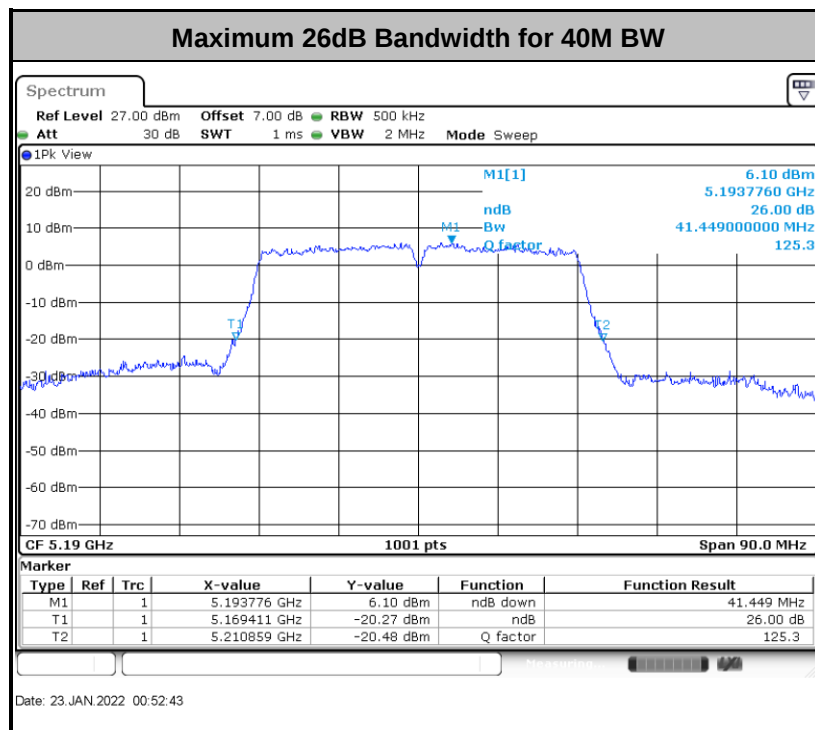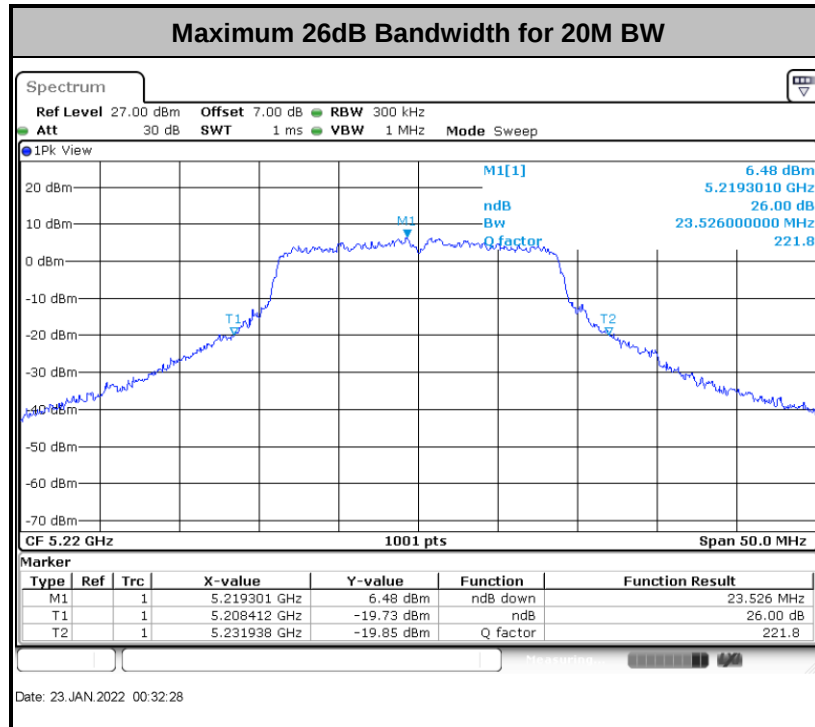

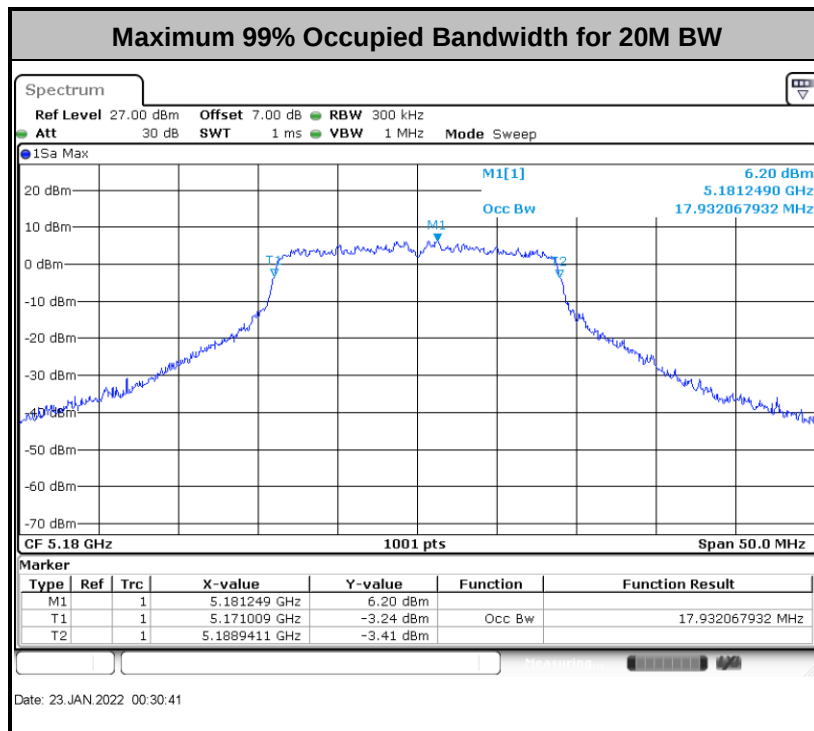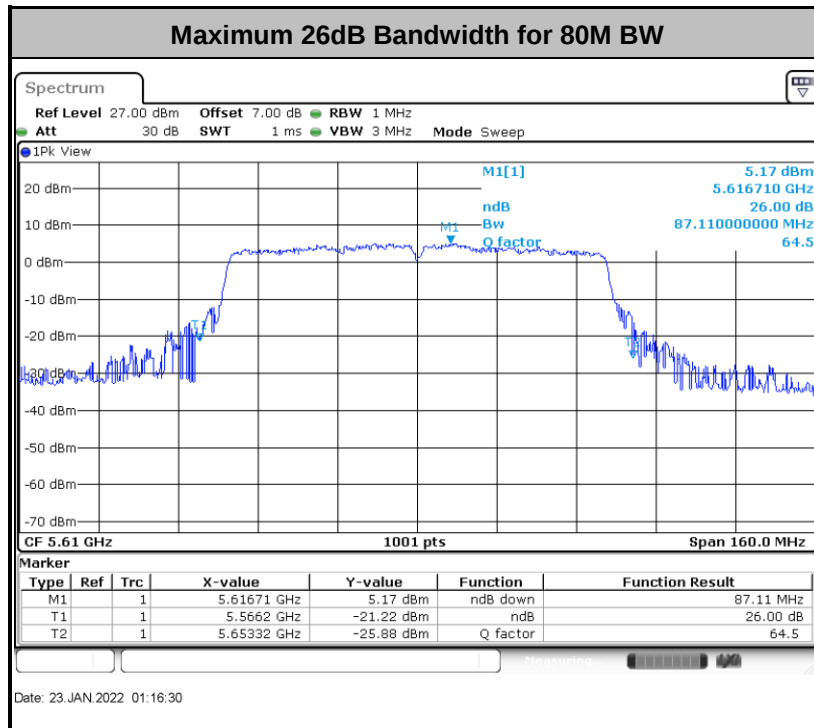

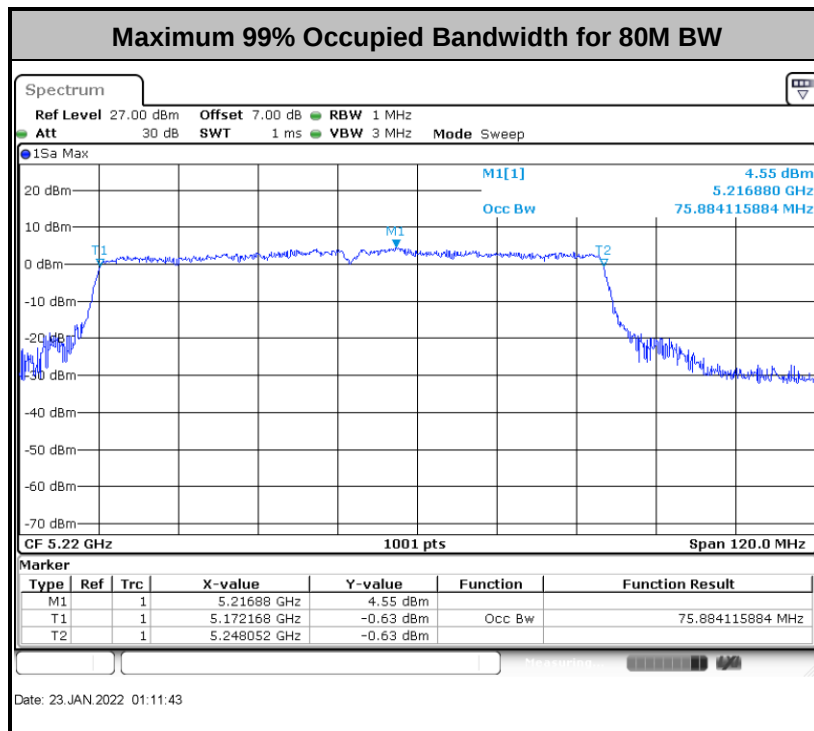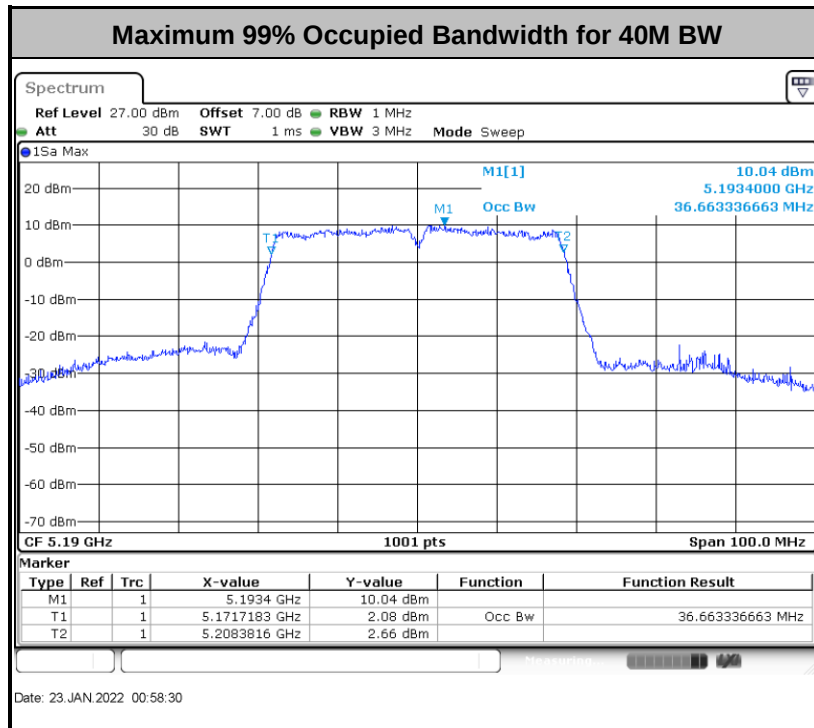

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.700 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the 5.47–5.6 GHz and 5.65–5.700 GHz band, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

3.2.4 Test Setup

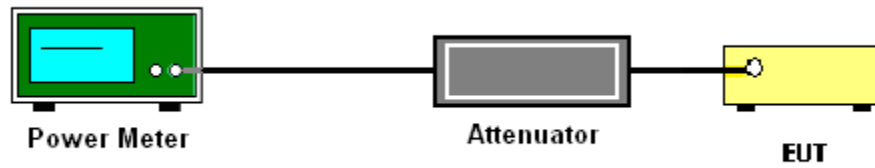

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For the 5.25–5.700 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.


1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

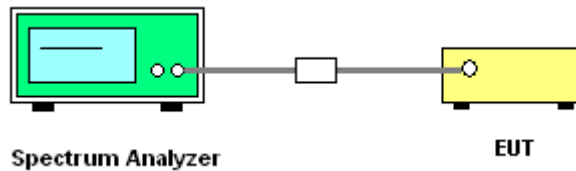

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

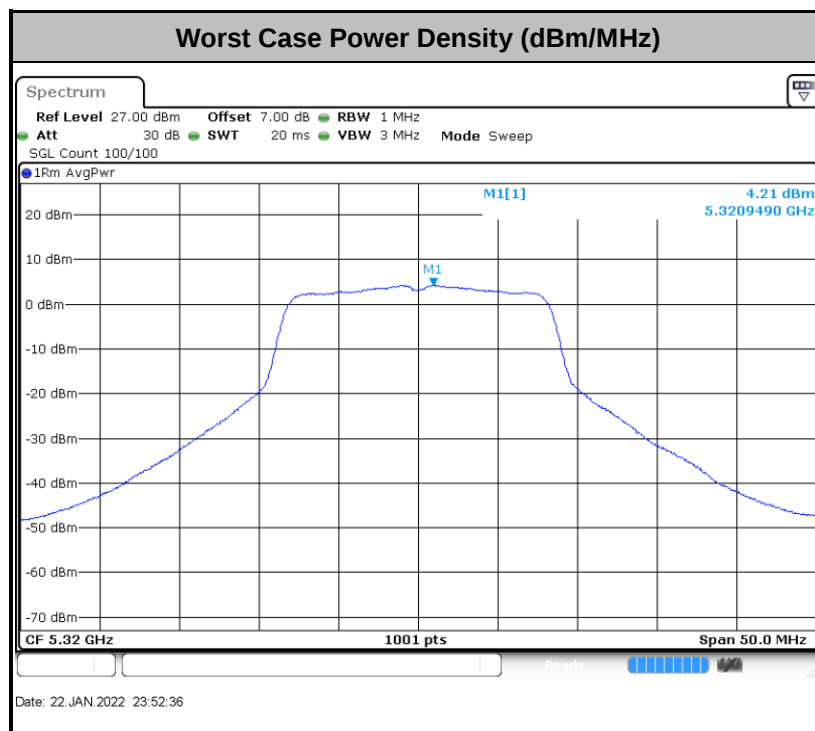

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5725 MHz band: all emissions outside of the 5470-5725 MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

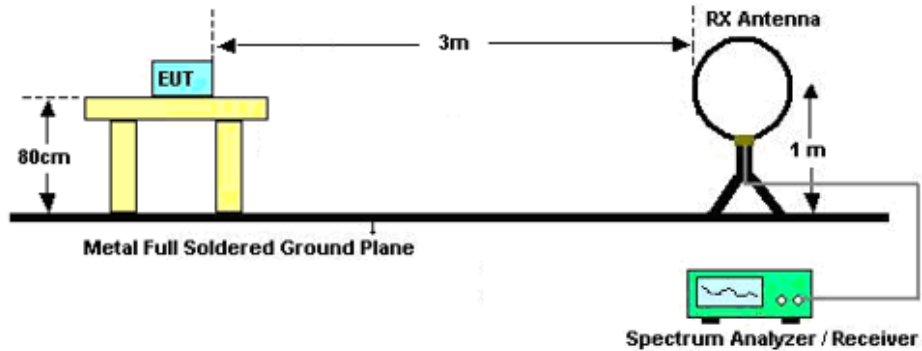

For radiated emissions from 30MHz to 1GHz

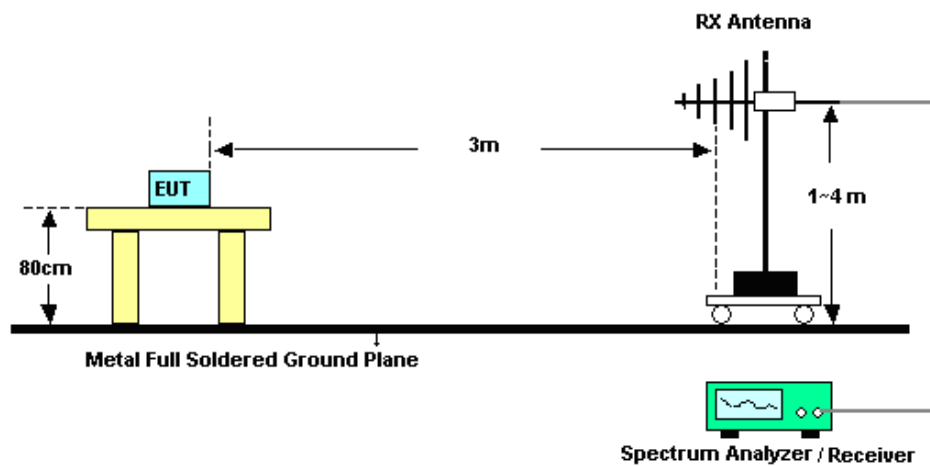

For radiated emissions above 1GHz

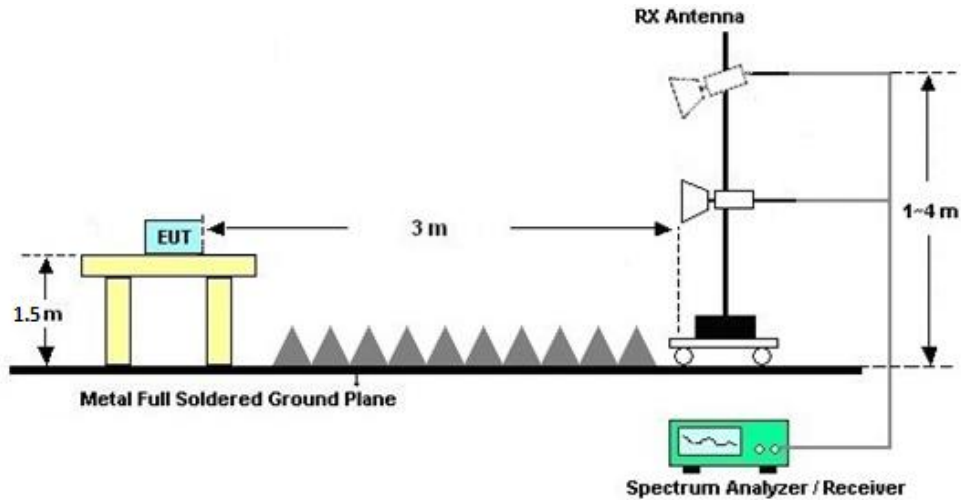

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

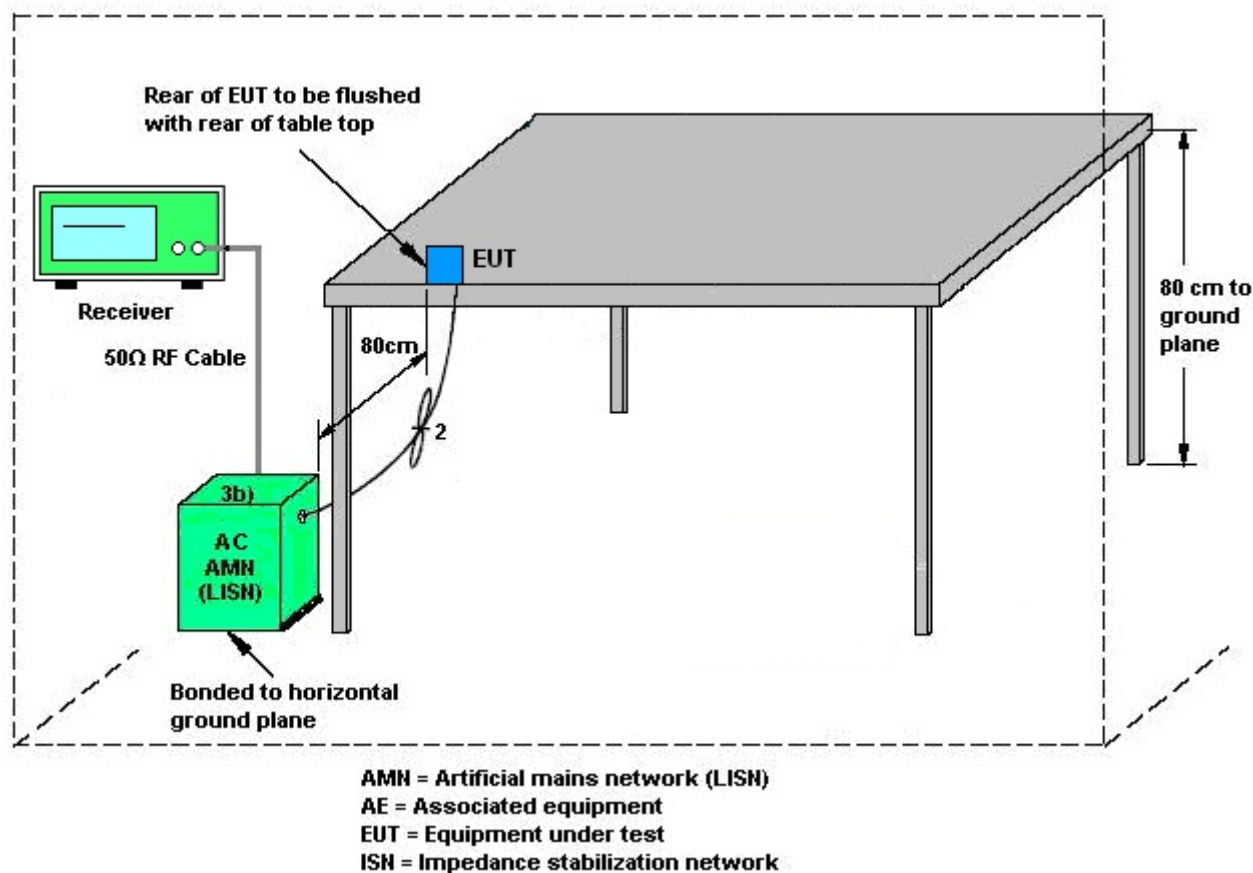

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Jan. 22, 2022~ Jan. 23, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2021	Jan. 22, 2022~ Jan. 23, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2021	Jan. 22, 2022~ Jan. 23, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 12, 2021	Jan. 22, 2022~ Jan. 23, 2022	Jul. 11, 2022	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 16, 2021	Jan. 06, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G, MAX 30dB	Apr. 13, 2021	Jan. 06, 2022	Apr. 12, 2022	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Jan. 06, 2022	Oct. 29, 2022	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	Jun. 04, 2021	Jan. 06, 2022	Jun. 03, 2022	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 24, 2021	Jan. 06, 2022	Apr. 23, 2022	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Jan. 06, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Apr. 12, 2021	Jan. 06, 2022	Apr. 11, 2022	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Jan. 06, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2012228	1Ghz~18Ghz	Oct. 16, 2021	Jan. 06, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 16, 2021	Jan. 06, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jan. 06, 2022	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jan. 06, 2022	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jan. 06, 2022	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 21, 2021	Feb. 01, 2022	Apr. 20, 2022	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Feb. 01, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Apr. 13, 2021	Feb. 01, 2022	Apr. 12, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Feb. 01, 2022	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Alan He	Temperature:	21~25	°C
Test Date:	2022/1/22~2022/1/23	Relative Humidity:	51~54	%
Tool & Version		Test Site		

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 single antenna													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	36	5180	16.73	-	21.73	-	-	-	22.24	-	
11a	6Mbps	1	44	5220	16.73	-	22.38	-	-	-	22.24	-	
11a	6Mbps	1	48	5240	16.73	-	21.83	-	-	-	22.24	-	
HT20	MCS0	1	36	5180	17.93	-	22.93	-	-	-	22.54	-	
HT20	MCS0	1	44	5220	17.88	-	23.53	-	-	-	22.52	-	
HT20	MCS0	1	48	5240	17.88	-	23.43	-	-	-	22.52	-	
HT40	MCS0	1	38	5190	36.66	-	41.45	-	-	-	23.01	-	
HT40	MCS0	1	46	5230	36.56	-	40.91	-	-	-	23.01	-	
VHT80	MCS0	1	42	5210	75.88	-	85.35	-	-	-	23.01	-	

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 single antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	36	5180	14.81	-		24.00	-	3.95	-		Pass
11a	6Mbps	1	44	5220	15.06	-		24.00	-	3.95	-		Pass
11a	6Mbps	1	48	5240	15.00	-		24.00	-	3.95	-		Pass
HT20	MCS0	1	36	5180	14.69	-		24.00	-	3.95	-		Pass
HT20	MCS0	1	44	5220	14.75	-		24.00	-	3.95	-		Pass
HT20	MCS0	1	48	5240	14.82	-		24.00	-	3.95	-		Pass
HT40	MCS0	1	38	5190	12.18	-		24.00	-	3.95	-		Pass
HT40	MCS0	1	46	5230	15.76	-		24.00	-	3.95	-		Pass
VHT20	MCS0	1	36	5180	12.63	-		24.00	-	3.95	-		Pass
VHT20	MCS0	1	44	5220	12.78	-		24.00	-	3.95	-		Pass
VHT20	MCS0	1	48	5240	12.83	-		24.00	-	3.95	-		Pass
VHT40	MCS0	1	38	5190	13.31	-		24.00	-	3.95	-		Pass
VHT40	MCS0	1	46	5230	13.75	-		24.00	-	3.95	-		Pass
VHT80	MCS0	1	42	5210	9.19	-		24.00	-	3.95	-		Pass

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 single antenna													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	36	5180	3.59	-		11.00	-	3.95	-		Pass
11a	6Mbps	1	44	5220	3.53	-		11.00	-	3.95	-		Pass
11a	6Mbps	1	48	5240	3.51	-		11.00	-	3.95	-		Pass
HT20	MCS0	1	36	5180	3.21	-		11.00	-	3.95	-		Pass
HT20	MCS0	1	44	5220	3.14	-		11.00	-	3.95	-		Pass
HT20	MCS0	1	48	5240	3.19	-		11.00	-	3.95	-		Pass
HT40	MCS0	1	38	5190	-1.68	-		11.00	-	3.95	-		Pass
HT40	MCS0	1	46	5230	1.50	-		11.00	-	3.95	-		Pass
VHT80	MCS0	1	42	5210	-8.15	-		11.00	-	3.95	-		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	52	5260	16.68	-	21.78	-	23.22	-	29.22	-	23.98	-	
11a	6Mbps	1	60	5300	16.68	-	21.93	-	23.22	-	29.22	-	23.98	-	
11a	6Mbps	1	64	5320	16.68	-	21.78	-	23.22	-	29.22	-	23.98	-	
HT20	MCS0	1	52	5260	17.88	-	23.28	-	23.52	-	29.52	-	23.98	-	
HT20	MCS0	1	60	5300	17.88	-	23.33	-	23.52	-	29.52	-	23.98	-	
HT20	MCS0	1	64	5320	17.88	-	23.18	-	23.52	-	29.52	-	23.98	-	
HT40	MCS0	1	54	5270	36.46	-	41.18	-	23.98	-	30.00	-	23.98	-	
HT40	MCS0	1	62	5310	36.46	-	41.45	-	23.98	-	30.00	-	23.98	-	
VHT80	MCS0	1	58	5290	75.76	-	86.31	-	23.98	-	30.00	-	23.98	-	

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A single antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	52	5260	14.99	-		23.98	-	3.94	-	26.99	Pass
11a	6Mbps	1	60	5300	15.37	-		23.98	-	3.94	-	26.99	Pass
11a	6Mbps	1	64	5320	15.20	-		23.98	-	3.94	-	26.99	Pass
HT20	MCS0	1	52	5260	14.73	-		23.98	-	3.94	-	26.99	Pass
HT20	MCS0	1	60	5300	14.96	-		23.98	-	3.94	-	26.99	Pass
HT20	MCS0	1	64	5320	15.10	-		23.98	-	3.94	-	26.99	Pass
HT40	MCS0	1	54	5270	15.78	-		23.98	-	3.94	-	26.99	Pass
HT40	MCS0	1	62	5310	12.72	-		23.98	-	3.94	-	26.99	Pass
VHT20	MCS0	1	52	5260	12.68	-		23.98	-	3.94	-	26.99	Pass
VHT20	MCS0	1	60	5300	12.79	-		23.98	-	3.94	-	26.99	Pass
VHT20	MCS0	1	64	5320	13.13	-		23.98	-	3.94	-	26.99	Pass
VHT40	MCS0	1	54	5270	13.72	-		23.98	-	3.94	-	26.99	Pass
VHT40	MCS0	1	62	5310	14.13	-		23.98	-	3.94	-	26.99	Pass
VHT80	MCS0	1	58	5290	10.22	-		23.98	-	3.94	-	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2A single antenna													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	52	5260	3.92	-		11.00	-	3.94	-		Pass
11a	6Mbps	1	60	5300	3.75	-		11.00	-	3.94	-		Pass
11a	6Mbps	1	64	5320	4.21	-		11.00	-	3.94	-		Pass
HT20	MCS0	1	52	5260	3.66	-		11.00	-	3.94	-		Pass
HT20	MCS0	1	60	5300	3.45	-		11.00	-	3.94	-		Pass
HT20	MCS0	1	64	5320	3.83	-		11.00	-	3.94	-		Pass
HT40	MCS0	1	54	5270	1.70	-		11.00	-	3.94	-		Pass
HT40	MCS0	1	62	5310	-1.74	-		11.00	-	3.94	-		Pass
VHT80	MCS0	1	58	5290	-7.09	-		11.00	-	3.94	-		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C single antenna																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
11a	6Mbps	1	100	5500	16.73	-	22.28	-	23.24	-	29.24	-	23.98	-	----	----
11a	6Mbps	1	116	5580	16.63	-	22.23	-	23.21	-	29.21	-	23.98	-	----	----
11a	6Mbps	1	140	5700	16.73	-	21.83	-	23.24	-	29.24	-	23.98	-	----	----
HT20	MCS0	1	100	5500	17.88	-	22.98	-	23.52	-	29.52	-	23.98	-	----	----
HT20	MCS0	1	116	5580	17.83	-	22.88	-	23.51	-	29.51	-	23.98	-	----	----
HT20	MCS0	1	140	5700	17.88	-	22.93	-	23.52	-	29.52	-	23.98	-	----	----
HT40	MCS0	1	102	5510	36.66	-	41.27	-	23.98	-	30.00	-	23.98	-	----	----
HT40	MCS0	1	110	5550	36.46	-	41.36	-	23.98	-	30.00	-	23.98	-	----	----
HT40	MCS0	1	134	5670	36.56	-	41.45	-	23.98	-	30.00	-	23.98	-	----	----
VHT80	MCS0	1	106	5530	75.76	-	84.24	-	23.98	-	30.00	-	23.98	-	----	----
VHT80	MCS0	1	122	5610	75.76	-	87.11	-	23.98	-	30.00	-	23.98	-	----	----

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C single antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	100	5500	14.69	-		23.98	-	4.65	-	26.99	Pass
11a	6Mbps	1	116	5580	14.84	-		23.98	-	4.65	-	26.99	Pass
11a	6Mbps	1	140	5700	14.31	-		23.98	-	4.65	-	26.99	Pass
HT20	MCS0	1	100	5500	14.68	-		23.98	-	4.65	-	26.99	Pass
HT20	MCS0	1	116	5580	14.65	-		23.98	-	4.65	-	26.99	Pass
HT20	MCS0	1	140	5700	14.09	-		23.98	-	4.65	-	26.99	Pass
HT40	MCS0	1	102	5510	13.05	-		23.98	-	4.65	-	26.99	Pass
HT40	MCS0	1	110	5550	15.66	-		23.98	-	4.65	-	26.99	Pass
HT40	MCS0	1	134	5670	15.24	-		23.98	-	4.65	-	26.99	Pass
VHT20	MCS0	1	100	5500	13.52	-		23.98	-	4.65	-	26.99	Pass
VHT20	MCS0	1	116	5580	13.56	-		23.98	-	4.65	-	26.99	Pass
VHT20	MCS0	1	140	5700	12.58	-		23.98	-	4.65	-	26.99	Pass
VHT40	MCS0	1	102	5510	14.47	-		23.98	-	4.65	-	26.99	Pass
VHT40	MCS0	1	110	5550	14.41	-		23.98	-	4.65	-	26.99	Pass
VHT40	MCS0	1	134	5670	14.23	-		23.98	-	4.65	-	26.99	Pass
VHT80	MCS0	1	106	5530	11.60	-		23.98	-	4.65	-	26.99	Pass
VHT80	MCS0	1	122	5610	14.02	-		23.98	-	4.65	-	26.99	Pass


TEST RESULTS DATA
Power Spectral Density

U-NII-2C single antenna													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	100	5500	3.85	-		11.00	-	4.65	-		Pass
11a	6Mbps	1	116	5580	3.46	-		11.00	-	4.65	-		Pass
11a	6Mbps	1	140	5700	3.27	-		11.00	-	4.65	-		Pass
HT20	MCS0	1	100	5500	3.44	-		11.00	-	4.65	-		Pass
HT20	MCS0	1	116	5580	3.49	-		11.00	-	4.65	-		Pass
HT20	MCS0	1	140	5700	3.23	-		11.00	-	4.65	-		Pass
HT40	MCS0	1	102	5510	-1.23	-		11.00	-	4.65	-		Pass
HT40	MCS0	1	110	5550	1.48	-		11.00	-	4.65	-		Pass
HT40	MCS0	1	134	5670	0.82	-		11.00	-	4.65	-		Pass
VHT80	MCS0	1	106	5530	-5.59	-		11.00	-	4.65	-		Pass
VHT80	MCS0	1	122	5610	-3.54	-		11.00	-	4.65	-		Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

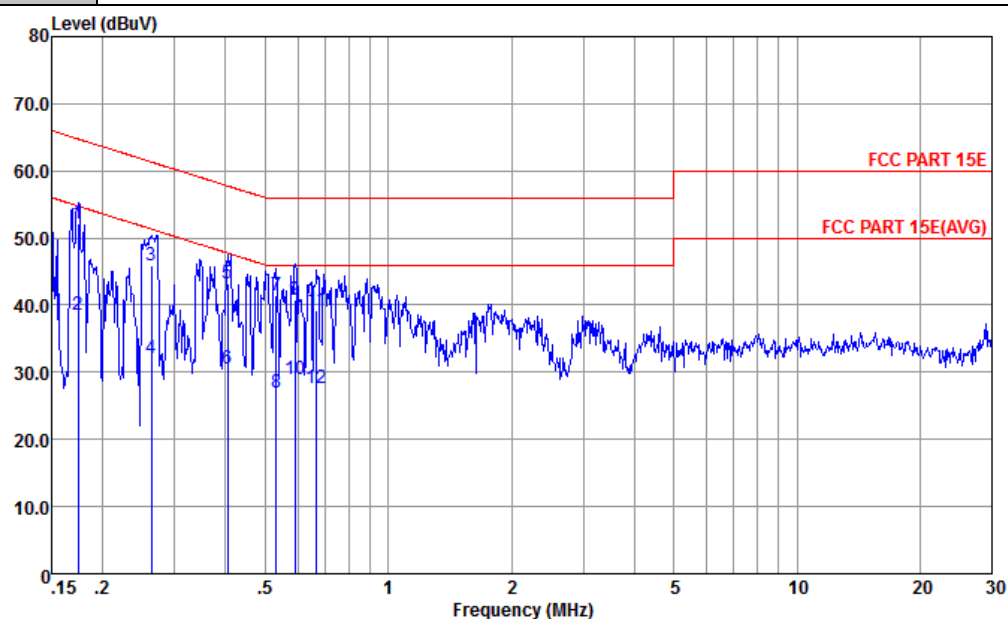


Site : CO01-KS
Condition : FCC PART 15E LISN-060105-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.174	52.25	-12.52	64.77	41.80	0.03	10.42	QP
2	0.174	38.65	-16.12	54.77	28.20	0.03	10.42	Average
3	0.263	45.89	-15.45	61.34	35.50	0.06	10.33	QP
4	0.263	31.99	-19.35	51.34	21.60	0.06	10.33	Average
5	0.404	43.25	-14.52	57.77	32.90	0.09	10.26	QP
6	0.404	30.55	-17.22	47.77	20.20	0.09	10.26	Average
7	0.532	41.54	-14.46	56.00	31.20	0.10	10.24	QP
8	0.532	26.94	-19.06	46.00	16.60	0.10	10.24	Average
9	0.592	40.84	-15.16	56.00	30.49	0.11	10.24	QP
10	0.592	28.94	-17.06	46.00	18.59	0.11	10.24	Average
11	0.668	39.15	-16.85	56.00	28.80	0.11	10.24	QP
12	0.668	27.55	-18.45	46.00	17.20	0.11	10.24	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

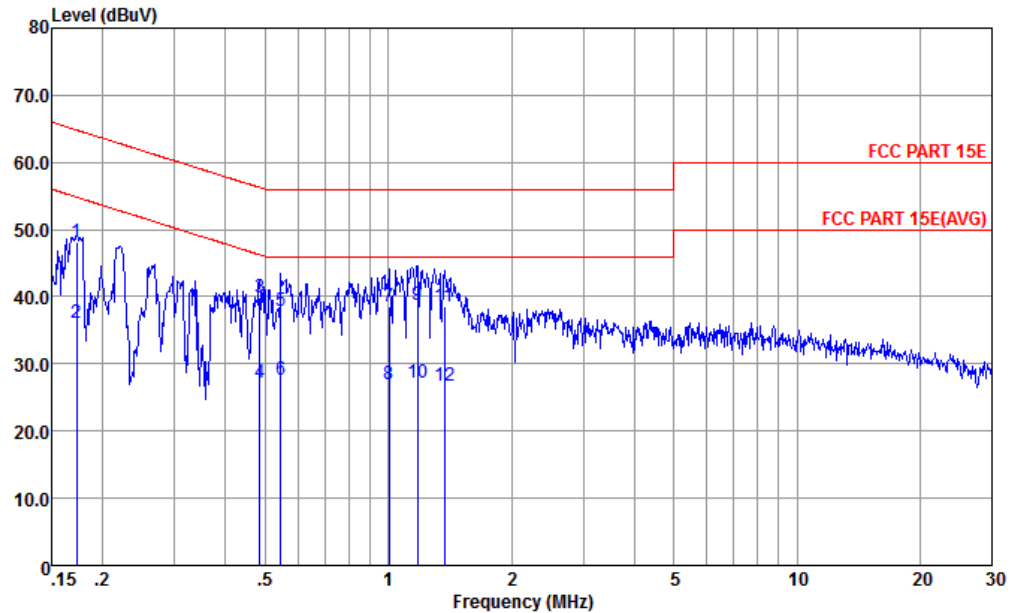

Site : CO01-KS
Condition : FCC PART 15E LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBμV	Limit	Line	Level	Factor	Loss	
			dB	dBμV	dBμV	dB	dB	
1	0.173	48.03	-16.78	64.81	37.50	0.11	10.42	QP
2	0.173	36.03	-18.78	54.81	25.50	0.11	10.42	Average
3 *	0.484	39.95	-16.32	56.27	29.60	0.11	10.24	QP
4	0.484	27.25	-19.02	46.27	16.90	0.11	10.24	Average
5	0.546	37.95	-18.05	56.00	27.60	0.11	10.24	QP
6	0.546	27.65	-18.35	46.00	17.30	0.11	10.24	Average
7	1.005	38.55	-17.45	56.00	28.20	0.12	10.23	QP
8	1.005	26.95	-19.05	46.00	16.60	0.12	10.23	Average
9	1.178	38.86	-17.14	56.00	28.51	0.12	10.23	QP
10	1.178	27.26	-18.74	46.00	16.91	0.12	10.23	Average
11	1.374	38.56	-17.44	56.00	28.20	0.13	10.23	QP
12	1.374	26.66	-19.34	46.00	16.30	0.13	10.23	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Henry Li	Temperature :	22~23°C
		Relative Humidity :	41~42%

UNII-1 - 5150~5250MHz---Sample 1

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preampl Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5149.92	56.12	-17.88	74	47.22	35.03	10.6	36.73	100	298	P	H
		5149.6	46.94	-7.06	54	38.04	35.03	10.6	36.73	100	298	A	H
	*	5176	109.19	-	-	100.18	35.06	10.64	36.69	100	298	P	H
		5176	101.91	-	-	92.9	35.06	10.64	36.69	100	298	A	H
		5149.12	57.03	-16.97	74	48.13	35.03	10.6	36.73	100	82	P	V
		5150	47.54	-6.46	54	38.64	35.03	10.6	36.73	100	82	A	V
	*	5176	111.1	-	-	102.09	35.06	10.64	36.69	100	82	P	V
		5176	103.45	-	-	94.44	35.06	10.64	36.69	100	82	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**UNII-1 5150~5250MHz---Sample 1****WIFI 802.11a (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a		10355	45.85	-22.45	68.3	59.12	38.32	15.44	67.03	300	0	P	H
CH 36		10355	45.81	-22.49	68.3	59.08	38.32	15.44	67.03	100	0	P	V
5180MHz													
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-1 5150~5250MHz--Sample 1

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		5147.36	59.19	-14.81	74	50.29	35.03	10.6	36.73	100	298	P	H
		5150	49.88	-4.12	54	40.98	35.03	10.6	36.73	100	298	A	H
	*	5194	104.37	-	-	95.31	35.08	10.66	36.68	100	298	P	H
		5194	96.29	-	-	87.23	35.08	10.66	36.68	100	298	A	H
		5385.06	49.2	-24.8	74	39.66	35.26	10.77	36.49	100	298	P	H
		5395.32	40.59	-13.41	54	31.02	35.27	10.77	36.47	100	298	A	H
		5149.76	59.25	-14.75	74	50.35	35.03	10.6	36.73	100	106	P	V
		5150	50.82	-3.18	54	41.92	35.03	10.6	36.73	100	106	A	V
	*	5176	105.75	-	-	96.74	35.06	10.64	36.69	100	106	P	V
		5176	97.64	-	-	88.63	35.06	10.64	36.69	100	106	A	V
		5394.24	50.51	-23.49	74	40.97	35.26	10.77	36.49	100	106	P	V
		5396.4	40.88	-13.12	54	31.31	35.27	10.77	36.47	100	106	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-1 5150~5250MHz--Sample 1
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40		10377	45.31	-22.99	68.3	58.52	38.33	15.47	67.01	300	0	P	H
CH 38 5190MHz		10377	45.36	-22.94	68.3	58.57	38.33	15.47	67.01	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2A - 5250~5350MHz--Sample 1

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 58 5290MHz		5102.4	50.41	-23.59	74	41.65	34.98	10.56	36.78	285	45	P	H
		5100.16	41.66	-12.34	54	32.9	34.98	10.56	36.78	285	45	A	H
	*	5296	97.44	-	-	88.12	35.18	10.71	36.57	285	45	P	H
		5296	89.72	-	-	80.4	35.18	10.71	36.57	285	45	A	H
		5353.7	56.6	-17.4	74	47.15	35.22	10.75	36.52	285	45	P	H
		5350.2	46.55	-7.45	54	37.1	35.22	10.75	36.52	285	45	A	H
		5128.96	51.76	-22.24	74	42.91	35.01	10.58	36.74	100	104	P	V
		5110.08	41.79	-12.21	54	32.99	35	10.56	36.76	100	104	A	V
	*	5296	100.38	-	-	91.06	35.18	10.71	36.57	100	104	P	V
		5296	92.36	-	-	83.04	35.18	10.71	36.57	100	104	A	V
		5356.1	67.21	-6.79	74	57.76	35.22	10.75	36.52	100	104	P	V
		5350.2	50.59	-3.41	54	41.14	35.22	10.75	36.52	100	104	A	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



UNII-2A 5250~5350MHz--Sample 1
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		7055	55.48	-12.82	68.3	71.32	36.78	12.53	65.15	300	0	P	H
VHT80		10575	45.37	-22.93	68.3	58.22	38.39	15.65	66.89	300	0	P	H
CH 58		7055	55.59	-12.71	68.3	71.43	36.78	12.53	65.15	100	0	P	V
5290MHz		10580	45.39	-22.91	68.3	58.21	38.4	15.65	66.87	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-1 - 5150~5250MHz---Sample 2

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5148.96	56.63	-17.37	74	47.73	35.03	10.6	36.73	144	37	P	H
		5150	45.96	-8.04	54	37.06	35.03	10.6	36.73	144	37	A	H
	*	5182	109.98	-	-	100.97	35.06	10.64	36.69	144	37	P	H
		5182	102.2	-	-	93.19	35.06	10.64	36.69	144	37	A	H
		5128.8	52.57	-21.43	74	43.72	35.01	10.58	36.74	113	271	P	V
		5141.6	42.44	-11.56	54	33.54	35.03	10.6	36.73	113	271	A	V
	*	5182	106.27	-	-	97.26	35.06	10.64	36.69	113	271	P	V
		5182	98.15	-	-	89.14	35.06	10.64	36.69	113	271	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**UNII-1 5150~5250MHz---Sample 2****WIFI 802.11a (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a		10355	45.71	-22.59	68.3	58.98	38.32	15.44	67.03	300	0	P	H
CH 36		10355	45.76	-22.54	68.3	59.03	38.32	15.44	67.03	100	0	P	V
5180MHz													
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-1 5150~5250MHz---Sample 2
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		5150	59.03	-14.97	74	50.13	35.03	10.6	36.73	104	52	P	H
		5149.76	50.19	-3.81	54	41.29	35.03	10.6	36.73	104	52	A	H
	*	5194	105.71	-	-	96.65	35.08	10.66	36.68	104	52	P	H
		5194	97.74	-	-	88.68	35.08	10.66	36.68	104	52	A	H
		5357.16	49.4	-24.6	74	39.95	35.22	10.75	36.52	104	52	P	H
		5397.3	40.08	-13.92	54	30.51	35.27	10.77	36.47	104	52	A	H
		5146.88	55.26	-18.74	74	46.36	35.03	10.6	36.73	114	277	P	V
		5150	45.79	-8.21	54	36.89	35.03	10.6	36.73	114	277	A	V
	*	5194	102.19	-	-	93.13	35.08	10.66	36.68	114	277	P	V
		5194	94.47	-	-	85.41	35.08	10.66	36.68	114	277	A	V
		5393.7	49.56	-24.44	74	40.02	35.26	10.77	36.49	114	277	P	V
		5396.4	40.29	-13.71	54	30.72	35.27	10.77	36.47	114	277	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-1 5150~5250MHz---Sample 2
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40		10377	45.47	-22.83	68.3	58.68	38.33	15.47	67.01	300	0	P	H
CH 38 5190MHz		10377	45.3	-23	68.3	58.51	38.33	15.47	67.01	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-1 5150~5250MHz---Sample 2
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz		5149.12	63.47	-10.53	74	54.57	35.03	10.6	36.73	300	44	P	H
		5145.12	50.47	-3.53	54	41.57	35.03	10.6	36.73	300	44	A	H
	*	5218	101.48	-	-	92.38	35.09	10.67	36.66	300	44	P	H
		5218	93.3	-	-	84.2	35.09	10.67	36.66	300	44	A	H
		5399.1	50.23	-23.77	74	40.65	35.27	10.78	36.47	300	44	P	H
		5390.1	40.91	-13.09	54	31.37	35.26	10.77	36.49	300	44	A	H
		5149.92	59.91	-14.09	74	51.01	35.03	10.6	36.73	100	277	P	V
		5148.32	46.54	-7.46	54	37.64	35.03	10.6	36.73	100	277	A	V
	*	5218	98.5	-	-	89.4	35.09	10.67	36.66	100	277	P	V
		5218	90.62	-	-	81.52	35.09	10.67	36.66	100	277	A	V
		5375.16	49.38	-24.62	74	39.89	35.24	10.76	36.51	100	277	P	V
		5387.22	40.91	-13.09	54	31.37	35.26	10.77	36.49	100	277	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-1 5150~5250MHz---Sample 2
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		10421	45.45	-22.85	68.3	58.59	38.34	15.51	66.99	300	0	P	H
CH 42 5210MHz		10421	45.98	-22.32	68.3	59.12	38.34	15.51	66.99	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11n HT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 LF		88.2	26.86	-16.64	43.5	43.18	14.56	1.34	32.22	-	-	P	H
		154.16	27.91	-15.59	43.5	41.33	16.86	1.82	32.1	-	-	P	H
		189.08	29.01	-14.49	43.5	44.26	14.83	2.02	32.1	-	-	P	H
		304.51	29.81	-16.19	46	39.9	19.45	2.57	32.11	-	-	P	H
		344.28	33.05	-12.95	46	42.19	20.32	2.73	32.19	-	-	P	H
		436.43	29.53	-16.47	46	35.88	22.78	3.1	32.23	-	-	P	H
		30.97	31.18	-8.82	40	38.05	24.57	0.76	32.2	-	-	P	V
		38.73	29.84	-10.16	40	40.81	20.33	0.84	32.14	-	-	P	V
		80.44	24.78	-15.22	40	42.07	13.6	1.31	32.2	-	-	P	V
		200.72	26.96	-16.54	43.5	41.86	15.11	2.09	32.1	-	-	P	V
		302.57	28.3	-17.7	46	38.4	19.43	2.57	32.1	-	-	P	V
		647.89	29.58	-16.42	46	31.59	26.47	3.72	32.2	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Co-location

UNII-1 - 5150~5250MHz---Sample 1

WIFI 802.11n HT40&Part 27F---LTE_B13_BW_5M (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 38 5190MHz + LTE Band 13		5149.92	60.17	-13.83	74	51.27	35.03	10.6	36.73	320	39	P	H
		5150	49.68	-4.32	54	40.78	35.03	10.6	36.73	320	39	A	H
	*	5194	103.79	-	-	94.73	35.08	10.66	36.68	320	39	P	H
		5194	95.17	-	-	86.11	35.08	10.66	36.68	320	39	A	H
		5361.84	49.12	-24.88	74	39.63	35.24	10.76	36.51	320	39	P	H
		5389.02	40.2	-13.8	54	30.66	35.26	10.77	36.49	320	39	A	H
		5147.04	59.78	-14.22	74	50.88	35.03	10.6	36.73	100	71	P	V
		5150	50.16	-3.84	54	41.26	35.03	10.6	36.73	100	71	A	V
	*	5194	103.84	-	-	94.78	35.08	10.66	36.68	100	71	P	V
		5194	96.13	-	-	87.07	35.08	10.66	36.68	100	71	A	V
		5395.5	49.27	-24.73	74	39.7	35.27	10.77	36.47	100	71	P	V
		5398.74	40.16	-13.84	54	30.58	35.27	10.78	36.47	100	71	A	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												

**UNII-1 5150~5250MHz--Sample 1****WIFI 802.11n HT40&Part 27F---LTE_B13_BW_5M (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz + LTE Band 13		10377	45.85	-22.45	68.3	59.06	38.33	15.47	67.01	300	0	P	H
		10377	45.54	-22.76	68.3	58.75	38.33	15.47	67.01	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-1 - 5150~5250MHz---Sample 2

WIFI 802.11ac VHT80&Part 27F---LTE_B13_BW_5M (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 CH 42 5210MHz + LTE Band 13		5149.76	62.42	-11.58	74	53.52	35.03	10.6	36.73	299	39	P	H
		5149.12	49.58	-4.42	54	40.68	35.03	10.6	36.73	299	39	A	H
	*	5212	100.37	-	-	91.27	35.09	10.67	36.66	299	39	P	H
		5212	92.82	-	-	83.72	35.09	10.67	36.66	299	39	A	H
		5389.2	49.34	-24.66	74	39.8	35.26	10.77	36.49	299	39	P	H
		5380.02	40.64	-13.36	54	31.1	35.26	10.77	36.49	299	39	A	H
		5146.56	60.48	-13.52	74	51.58	35.03	10.6	36.73	102	279	P	V
		5145.76	47.93	-6.07	54	39.03	35.03	10.6	36.73	102	279	A	V
	*	5200	97.34	-	-	88.28	35.08	10.66	36.68	102	279	P	V
		5200	89.85	-	-	80.79	35.08	10.66	36.68	102	279	A	V
		5360.76	49.37	-24.63	74	39.88	35.24	10.76	36.51	102	279	P	V
		5364.9	40.83	-13.17	54	31.34	35.24	10.76	36.51	102	279	A	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



UNII-1 5150~5250MHz---Sample 2

WIFI 802.11ac VHT80&Part 27F---LTE_B13_BW_5M (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz + LTE Band 13		10421	46.53	-21.77	68.3	59.67	38.34	15.51	66.99	300	0	P	H
		10421	47.58	-20.72	68.3	60.72	38.34	15.51	66.99	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
 = 55.45 (dBμV/m)
2. Over Limit(dB)
 = Level(dBμV/m) – Limit Line(dBμV/m)
 = 55.45(dBμV/m) – 74(dBμV/m)
 = -18.55(dB)

For Average Limit @ 2390MHz:


1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
 = 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
 = 43.54(dBμV/m) – 54(dBμV/m)
 = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.


Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	98.28	-	-	10Hz
802.11n HT20	98.16	-	-	10Hz
802.11n HT40	96.32	0.949	1.053	1.1KHz
802.11ac VHT80	92.20	0.462	2.163	2.2KHz


802.11a

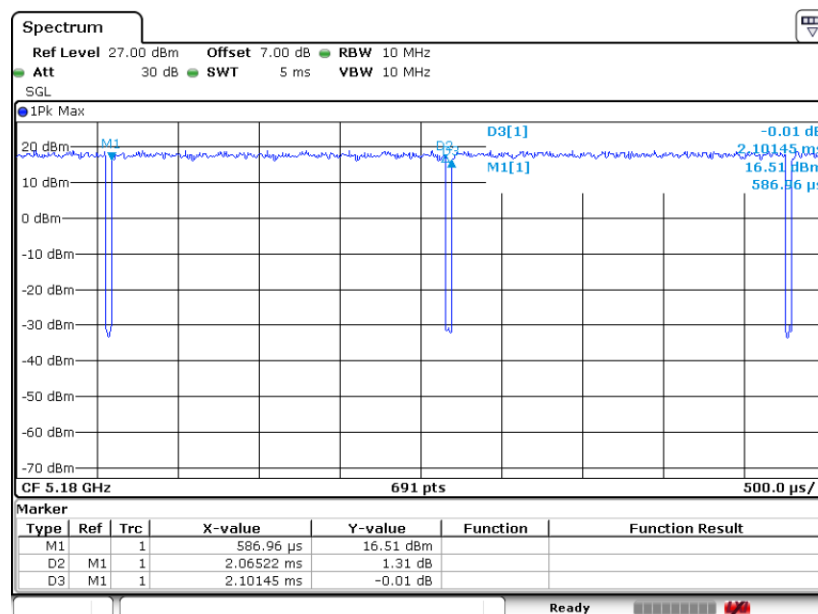

802.11n HT20

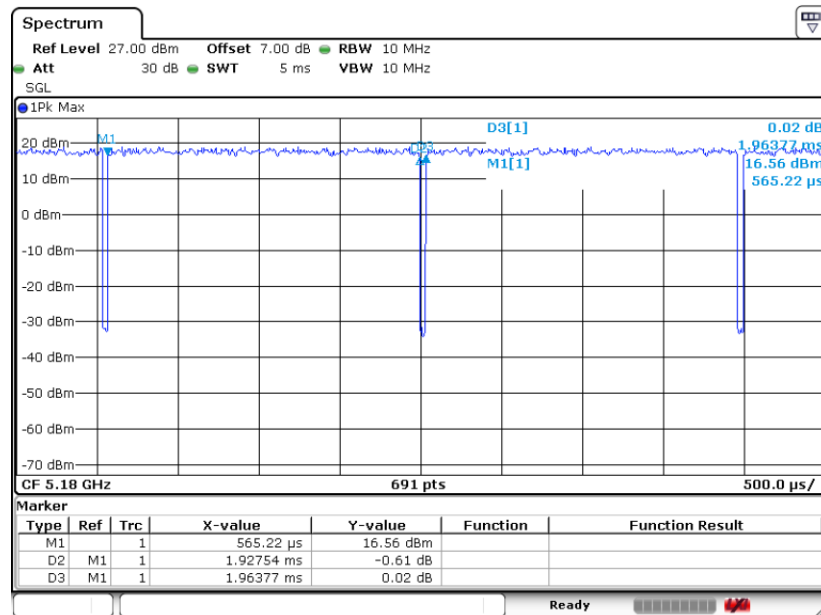

802.11n HT40

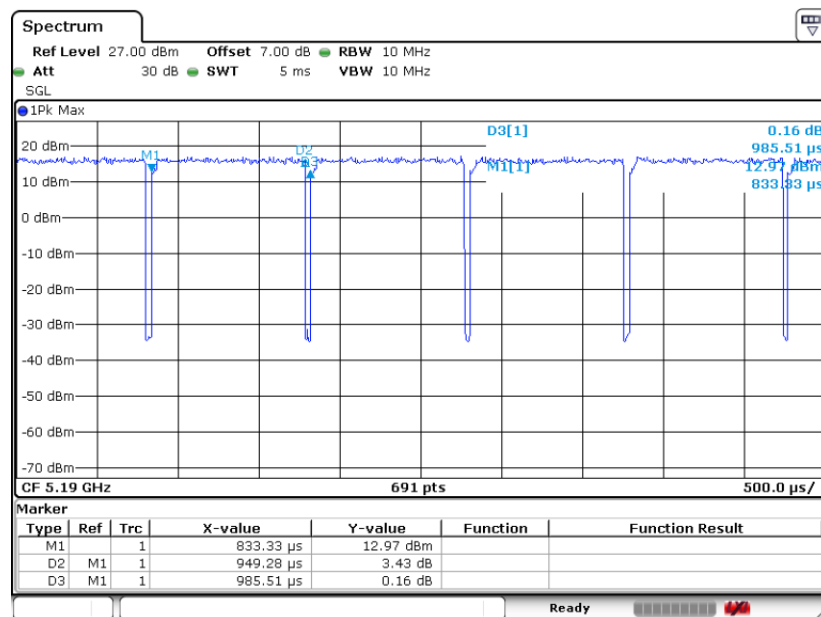

802.11ac VHT80

