



FCC Test Report

Report No.: AAOG-ESH-P21092087B-1

FCC ID: 2ABEU-YLYTD-0003

Product: Yeelight LED Screen Light Bar Pro

Model: YLYTD-0003

Received Date: Sep.27, 2021

Test Date: Sep.28 to Nov.24, 2021

Issued Date: Nov.25, 2021

Applicant: Qingdao Yeelink Information Technology Co., Ltd.

Address: F10-B4, Building B, International Innovation Park, 1# Keyuan Weiyi Road,
Laoshan, Qingdao, Shandong, China

Manufacturer: Qingdao Yeelink Information Technology Co., Ltd.

Address: F10-B4, Building B, International Innovation Park, 1# Keyuan Weiyi Road,
Laoshan, Qingdao, Shandong, China

Issued By: BUREAU VERITAS ADT (Shanghai) Corporation

Lab Address: No. 829, Xinzhuan Road, Shanghai, P.R.China (201612)

**FCC Registration /
Designation Number:** 176467/ CN1213



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Test Instruments	7
2.2 Measurement Uncertainty	8
2.3 Modification Record	8
3 General Information	9
3.1 General Description of EUT	9
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability:	11
3.2.2 Test Condition:	12
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	17
3.5 General Description of Applied Standards	17
4 Test Procedure and Results	18
4.1 AC Power Conducted Emission	18
4.1.1 Limits	18
4.1.2 Test Procedures	18
4.1.3 Deviation from Test Standard	18
4.1.4 Test Setup	19
4.1.5 EUT Operating Conditions	19
4.1.6 Test Results	20
4.2 Minimum 6dB Bandwidth	20
4.2.1 Limit	24
4.2.2 Test Setup	24
4.2.3 Test Procedures	24
4.2.4 Deviation of Test Standard	24
4.2.5 Test Results	25
4.3 Conducted Output Power	29
4.3.1 Limit	29
4.3.2 Test Setup	29
4.3.3 Test Procedures	29
4.3.4 Deviation of Test Standard	29



4.3.5	Test Results	30
4.4	Power Spectral Density	34
4.4.1	Limit	34
4.4.2	Test Setup.....	34
4.4.3	Test Procedures.....	34
4.4.4	Deviation of Test Standard.....	34
4.4.5	Test Results	35
4.5	Conducted Band Edges Measurement	39
4.5.1	Limit	39
4.5.2	Test Setup.....	39
4.5.3	Test Procedures.....	39
4.5.4	Deviation of Test Standard.....	39
4.5.5	Test Results	40
4.6	Conducted Spurious Emissions	43
4.6.1	Limit	43
4.6.2	Test Setup.....	43
4.6.3	Test Procedures.....	43
4.6.4	Deviation of Test Standard.....	43
4.6.5	Test Results	44
4.7	Emissions in restricted frequency bands	54
4.7.1	Test Limit	54
4.7.2	Test Procedure Reference.....	55
4.7.3	Test Procedures.....	55
4.7.4	Test Setup.....	56
4.7.5	Test Results	57
4.8	Radiated Emission Measurement	67
4.8.1	Limits	67
4.8.2	Test Procedures.....	67
4.8.3	Deviation from Test Standard	68
4.8.4	Test Setup.....	69
4.8.5	EUT Operating Conditions.....	70
4.8.6	Test Results	70
5	Pictures of Test Arrangements	79



Release Control Record

Issue No.	Description	Date Issued
AAOG-ESH-P21092087B-1	Original release	Nov.25, 2021



1 Certificate of Conformity

Product: Yeelight LED Screen Light Bar Pro

Brand: YEELIGHT

Model: YLYTD-0003

Applicant: Qingdao Yeelink Information Technology Co., Ltd.

Test Date: Sep.28 to Nov.24, 2021

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **BUREAU VERITAS ADT (Shanghai) Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :

, Date:

Nov.25, 2021

Yuan ZHANG

Project Engineer

Approved by :

, Date:

Nov.25, 2021

Daniel SUN

EMC Lab Manager



2 Summary of Test Results

The EUT has been tested according to the following specifications:

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.203	Antenna Requirement	PASS	No antenna connector is used.
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	Minimum 6dB Bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output Power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.247(d)	Conducted Band Edges Measurement	PASS	Meet the requirement of limit.
15.247(d)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
15.247(d)	Emissions in restricted frequency bands	PASS	Meet the requirement of limit.
15.205 / 15.209 / 15.247(d)	Radiated Emissions Measurement	PASS	Meet the requirement of limit.



2.1 Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Double Ridged Broadband Horn (30MHz-1.5GHz)	Schwarzbeck	VULB9168	E1A1036	Feb.07,21	Feb.06,22
Horn Antenna (1GHz -18GHz)	Schwarzbeck	BBHA9120D	E1A1017	Aug.25,20	Aug.24,22
Pre-Amplifier(9kHz-1GHz)	SONOMA	310	E1A2007	Apr.19,21	Apr.18,22
Pre-Amplifier(1GHz-26.5GHz)	Agilent	8449B	E1A2002	Mar.02,21	Mar.01,22
Signal Generator	ANRITSU	MG3692B	E1S9006	Mar.02,21	Mar.01,22
Signal Generator	Keysight	N5171B	E1S9016	Apr.19,21	Apr.18,22
Signal Generator	Keysight	N5182B	E1S9017	Apr.19,21	Apr.18,22
Wireless Connectivity Tester	R&S	CMW270	E1S9021	NCR	NCR
Spectrum Analyzer	R&S	FSP30	E1S1002	Aug.02,21	Aug.03,22
Spectrum Analyzer	Keysight	N9030B	E1S1003	Jul.23, 21	Jul.22, 22
Spectrum Analyzer	Keysight	N9020A	E1S1004	Mar.02, 21	Mar.01, 22
RF Control Unit	Toscend	JS0806-2	E1C5003	NCR	NCR
DC Power supply	Chroma	62024p-80-60	S1S1009	Mar.24,21	Mar.23,22
Humidity&Temp Programmable Tester	ESPEC	SE TH-Z-042U	C1TH002	Jun.25,21	Jun.24,22
Test Software	Toscend	JS1120-3	N/A	N/A	N/A
Test Software	Toscend	JS36-RSE	N/A	N/A	N/A

2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Frequency	Expanded Uncertainty ($k=2$) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.83 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.36 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.47 dB
	6GHz ~ 18GHz	3.75 dB
	18GHz ~ 40GHz	3.30 dB

2.3 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Yeelight LED Screen Light Bar Pro
Brand	YEELIGHT
Test Model	YLYTD-0003
Model Difference	--
Power Rating	100-240V~, 50/60Hz for LED driver 5V ---2A for Light Bar
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Operating Frequency	2412MHz-2462MHz
Number of Channel	802.11b, 802.11g and 802.11n (HT20):11
Antenna Type	PCB Antenna
Antenna Connector	--
Antenna Gain	1dBi

Note:

1. For more details, please refer to the User's manual of the EUT.

Modulation Mode	TX /RX Function
802.11b	1TX / 1RX
802.11g	1TX / 1RX
802.11n (HT20)	1TX / 1RX



3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20).

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz	-	-



3.2.1 Test Mode Applicability:

EUT Configure Mode	Applicable to				Description
	RE ≥ 1G	RE < 1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz **RE≤1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.
- ☒ For different antenna gain, select high gain antenna for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.
- ☒ For different antenna gain, select high gain antenna for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1	DSSS	DBPSK	1.0



Power Line Conducted Emission Test:

- ☐ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☐ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1	DSSS	DBPSK	1.0

Antenna Port Conducted Measurement

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

3.2.2 Test Condition:

Applicable to	Normal Environmental Conditions	Normal Input Power
RE ≥ 1G	25deg. C, 60%RH	AC 120V, 60Hz
RE < 1G	25deg. C, 60%RH	AC 120V, 60Hz
PLC	25deg. C, 60%RH	AC 120V, 60Hz
APCM	25deg. C, 60%RH	AC 120V, 60Hz




3.3 Duty Cycle of Test Signal


Test Mode	Antenna	Channel [MHz]	Duty Cycle [%]	10log(1/x) Factor[dB]
11B	Ant1	2412	99.89	0.00
		2437	99.89	0.00
		2462	99.89	0.00
11G	Ant1	2412	99.64	0.02
		2437	99.64	0.02
		2462	99.64	0.02
11N20SISO	Ant1	2412	99.61	0.02
		2437	99.61	0.02
		2462	99.61	0.02




11B_Ant1_2412

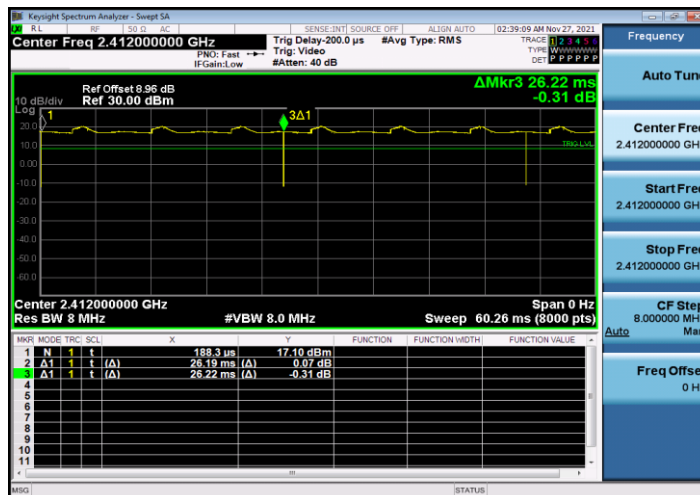

11B_Ant1_2437

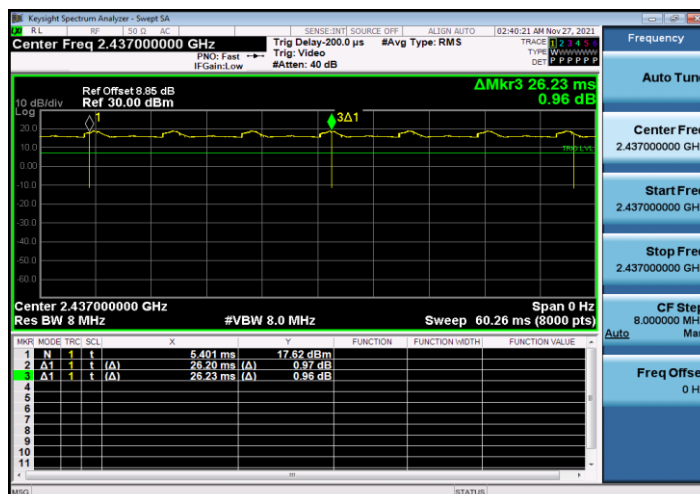


11B_Ant1_2462

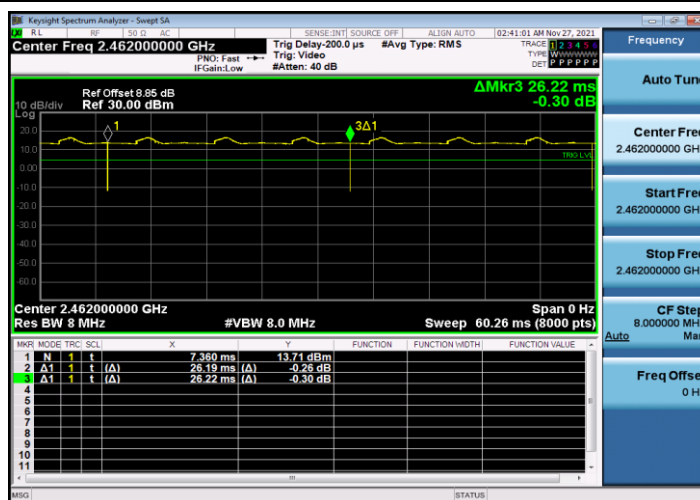





11G_Ant1_2412

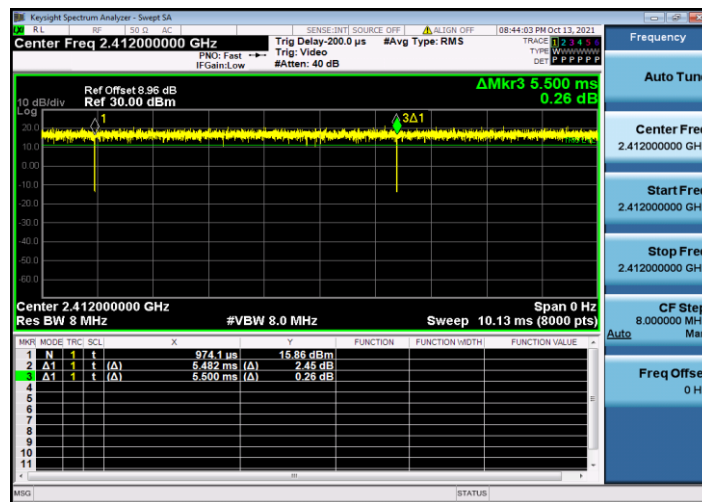

11G_Ant1_2437

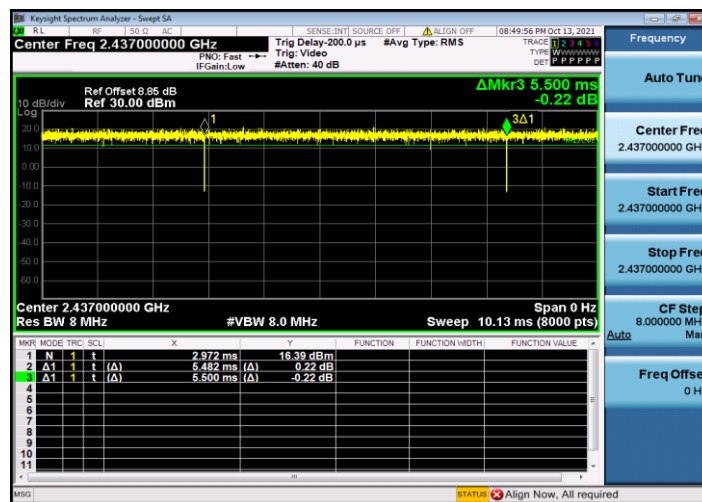


11G_Ant1_2462

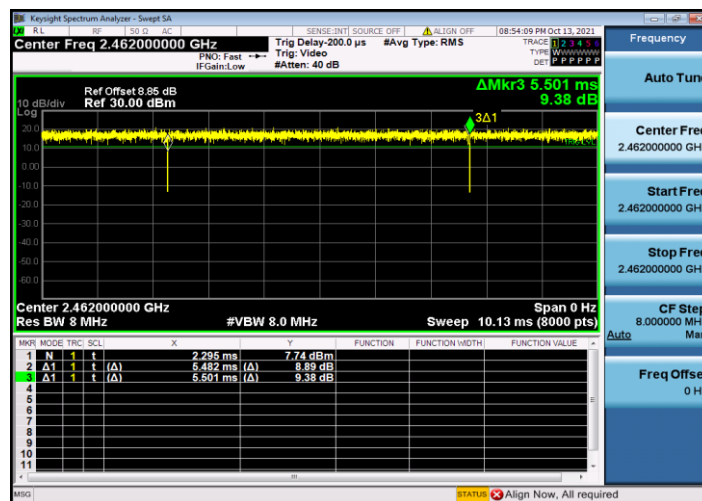





11N20SISO_Ant1_2412

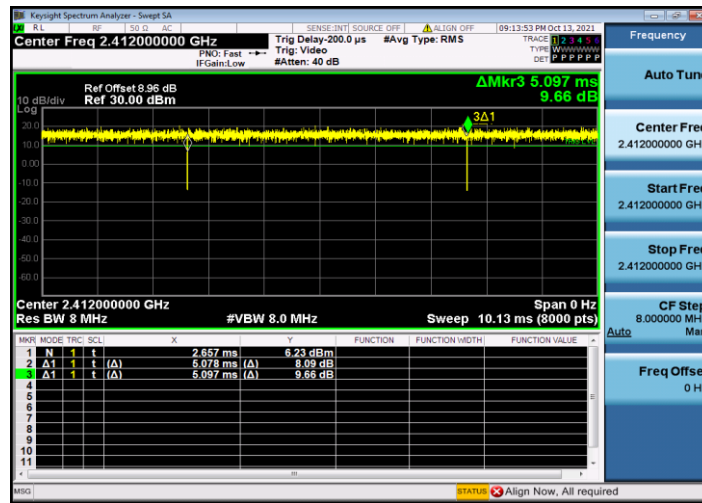

11N20SISO_Ant1_2437

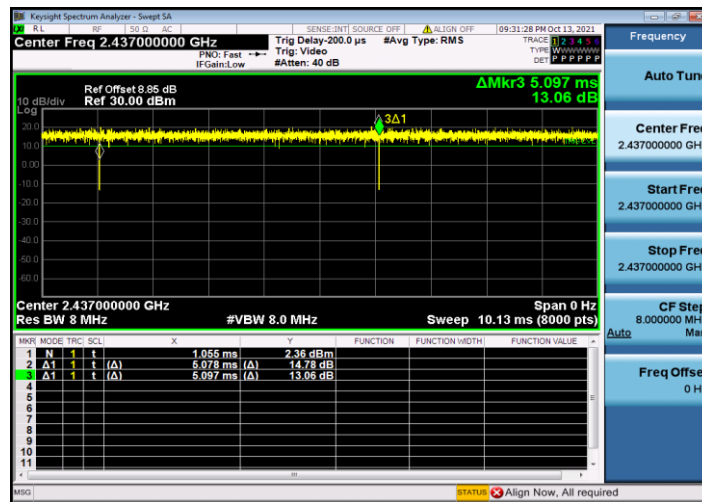

11N20SISO_Ant1_2462

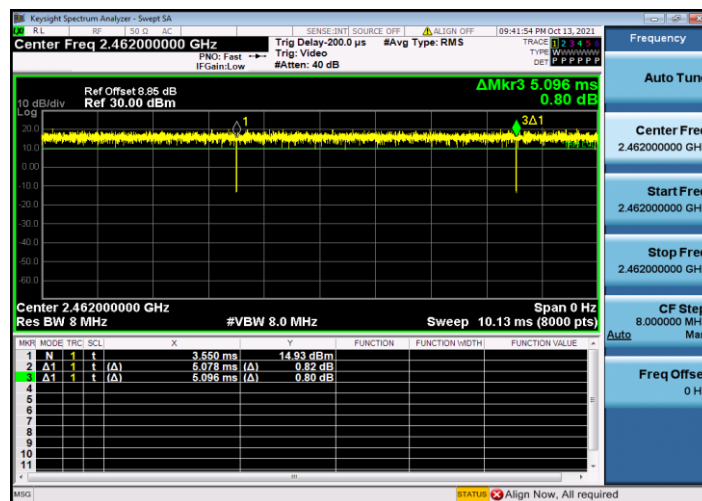



3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standard:

FCC Part 15, Subpart C (15.247)

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10:2013

All related test items have been performed and recorded as per the above standard.



4 Test Procedure and Results

4.1 AC Power Conducted Emission

4.1.1 Limits

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.1.2 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.1.3 Deviation from Test Standard

No deviation.

4.1.4 Test Setup

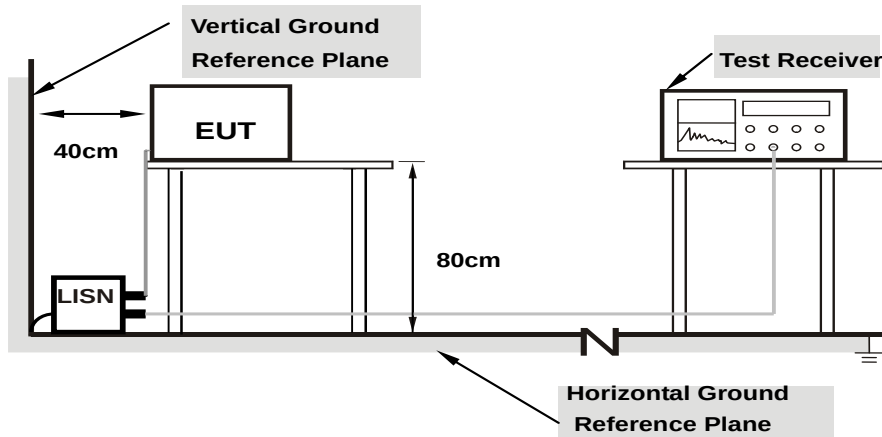

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).


4.1.5 EUT Operating Conditions

Same as 4.1.6.

4.1.6 Test Results

Voltage: 120V 60Hz

Phase : LINE

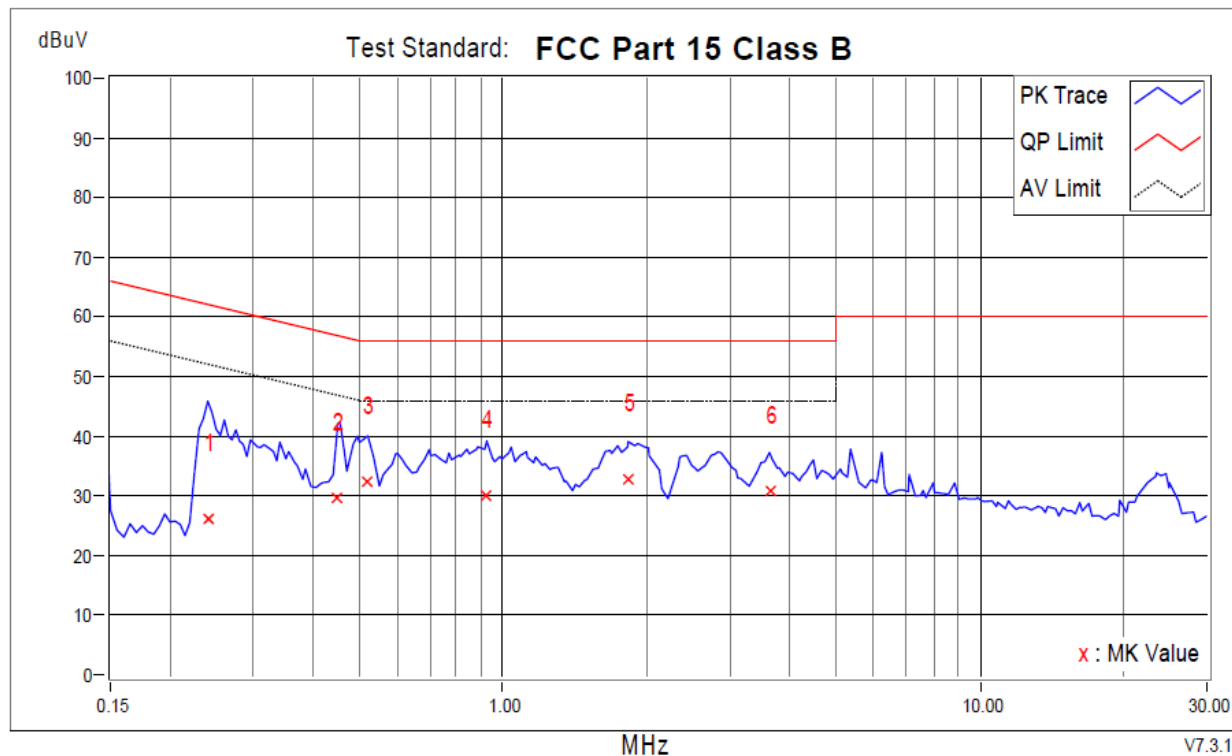


	Frequency	Corr. Factor	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
No.	MHz	dB	QP	AV	QP	AV	QP	AV	QP	AV	
1	0.24000	9.90	16.14	4.93	26.04	14.83	62.10	52.10	-36.05	-37.26	
2	0.45000	9.84	20.00	8.70	29.84	18.54	56.88	46.88	-27.03	-28.33	
3	0.52000	9.82	22.50	11.63	32.32	21.45	56.00	46.00	-23.68	-24.55	
4	0.92500	9.75	20.14	10.43	29.89	20.18	56.00	46.00	-26.11	-25.82	
+5	1.83000	9.76	22.86	11.95	32.62	21.71	56.00	46.00	-23.38	-24.29	
6	3.62500	10.07	20.90	6.34	30.97	16.41	56.00	46.00	-25.03	-29.59	

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase : NEUTRAL

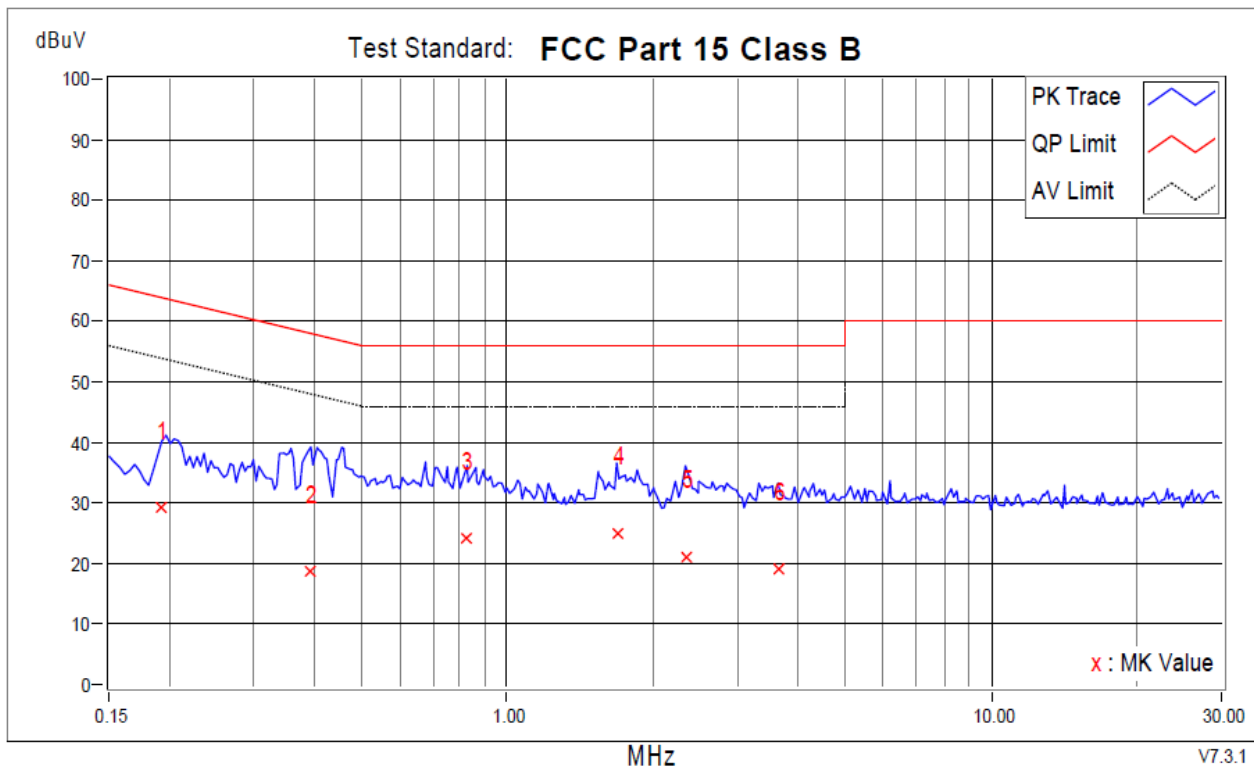

	Frequency	Corr. Factor	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
No.	MHz	dB	QP	AV	QP	AV	QP	AV	QP	AV	
1	0.19301	9.93	19.56	7.88	29.49	17.81	63.91	53.91	-34.41	-36.09	
2	0.39242	10.01	8.66	-3.25	18.67	6.76	58.01	48.01	-39.34	-41.25	
3	0.82643	10.00	14.16	3.99	24.16	13.99	56.00	46.00	-31.84	-32.01	
+4	1.68425	10.01	15.10	5.49	25.11	15.50	56.00	46.00	-30.89	-30.50	
5	2.33722	10.06	11.20	-0.01	21.26	10.05	56.00	46.00	-34.74	-35.95	
6	3.63534	10.02	8.98	-0.12	19.00	9.90	56.00	46.00	-37.00	-36.10	


REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.



Voltage: 230V 50Hz

Phase : LINE

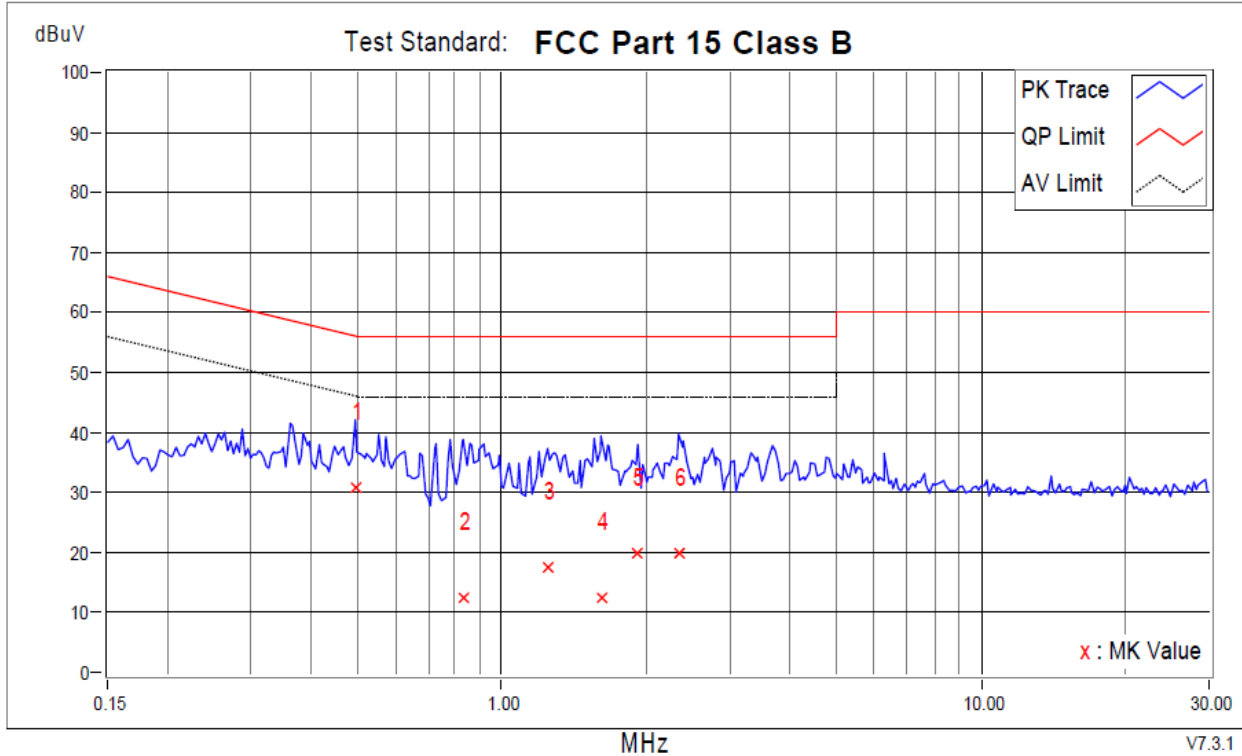


Frequency		Corr. Factor	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
No.	MHz	dB	QP	AV	QP	AV	QP	AV	QP	AV	
+1	0.49408	9.83	20.86	7.84	30.69	17.67	56.10	46.10	-25.41	-28.43	
2	0.83034	9.76	2.78	-7.70	12.54	2.06	56.00	46.00	-43.46	-43.94	
3	1.24633	9.74	7.72	-3.67	17.46	6.07	56.00	46.00	-38.54	-39.93	
4	1.60996	9.75	2.78	-7.11	12.53	2.64	56.00	46.00	-43.47	-43.36	
5	1.92276	9.77	10.34	0.16	20.11	9.93	56.00	46.00	-35.89	-36.07	
6	2.34113	9.85	10.24	-0.71	20.09	9.14	56.00	46.00	-35.91	-36.86	

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase : NEUTRAL

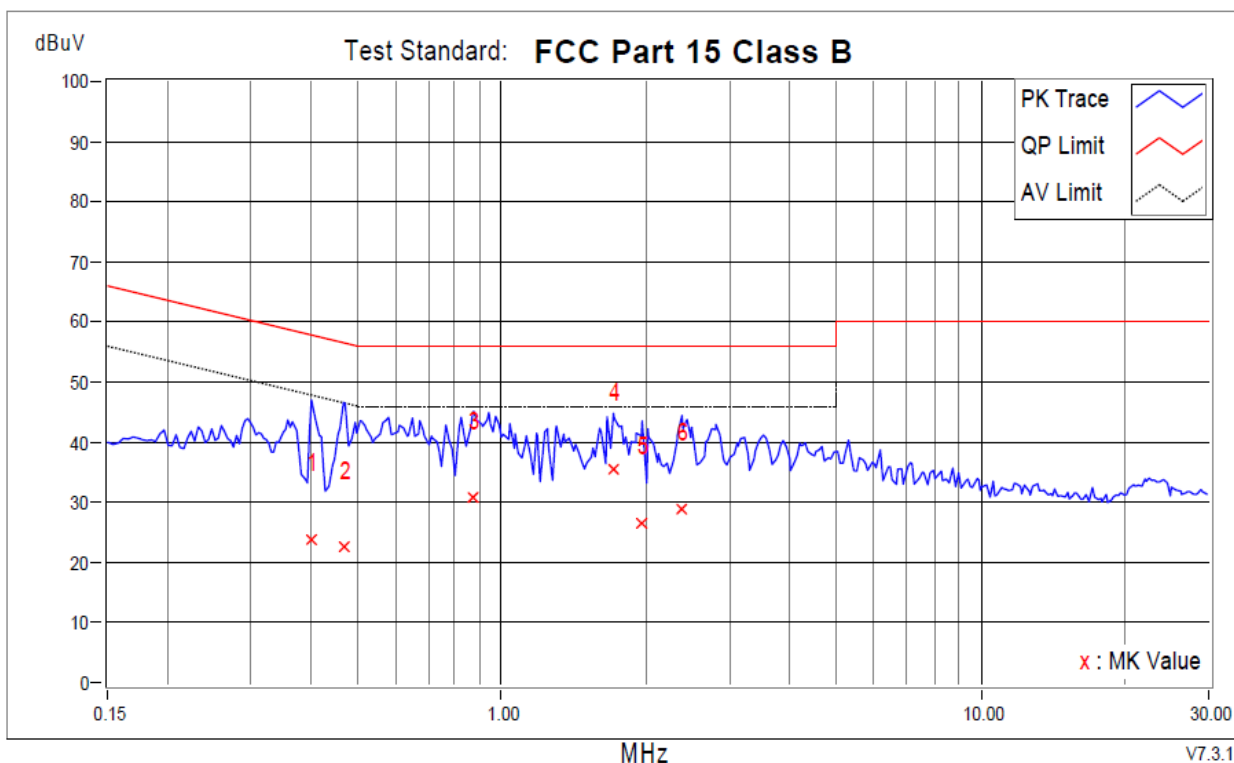

No.	Frequency	Corr. Factor	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
	MHz	dB	QP	AV	QP	AV	QP	AV	QP	AV	
1	0.40024	10.00	13.80	2.85	23.80	12.85	57.85	47.85	-34.04	-34.99	
2	0.46671	9.96	12.74	2.09	22.70	12.05	56.57	46.57	-33.87	-34.52	
3	0.86944	9.99	20.94	10.16	30.93	20.15	56.00	46.00	-25.07	-25.85	
+4	1.71162	10.02	25.54	14.20	35.56	24.22	56.00	46.00	-20.44	-21.78	
5	1.96577	10.04	16.44	3.70	26.48	13.74	56.00	46.00	-29.52	-32.26	
6	2.38023	10.06	18.98	4.80	29.04	14.86	56.00	46.00	-26.96	-31.14	

REMARKS:


1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

4.2 Minimum 6dB Bandwidth

4.2.1 Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz

4.2.2 Test Setup

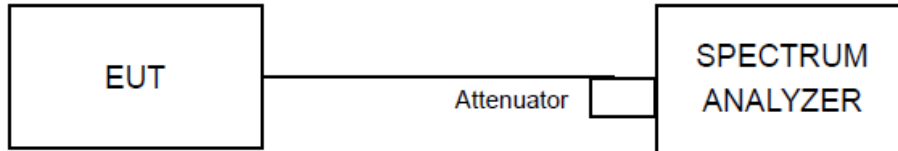

4.2.3 Test Procedures

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” for compliance to FCC 47CFR 15.247 requirements (clause 8.2).

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., $RBW = 100 \text{ kHz}$, $VBW \geq 3 \cdot RBW$, peak detector with maximum hold) is implemented by the instrumentation function.

4.2.4 Deviation of Test Standard

No deviation.



4.2.5 Test Results

Test Mode	Antenna	Channel [MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.160	2407.400	2416.560	≥ 0.5	PASS
		2437	8.640	2432.920	2441.560	≥ 0.5	PASS
		2462	9.640	2456.920	2466.560	≥ 0.5	PASS
11G	Ant1	2412	16.560	2403.720	2420.280	≥ 0.5	PASS
		2437	16.400	2428.800	2445.200	≥ 0.5	PASS
		2462	16.440	2453.760	2470.200	≥ 0.5	PASS
11N20SISO	Ant1	2412	17.080	2403.440	2420.520	≥ 0.5	PASS
		2437	17.000	2428.440	2445.440	≥ 0.5	PASS
		2462	17.120	2453.160	2470.280	≥ 0.5	PASS



11B_Ant1_2412



11B_Ant1_2437




11B_Ant1_2462






11G_Ant1_2412

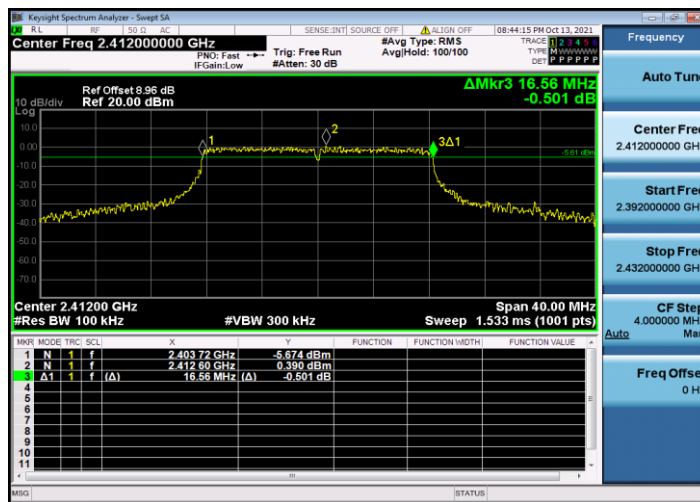

11G_Ant1_2437

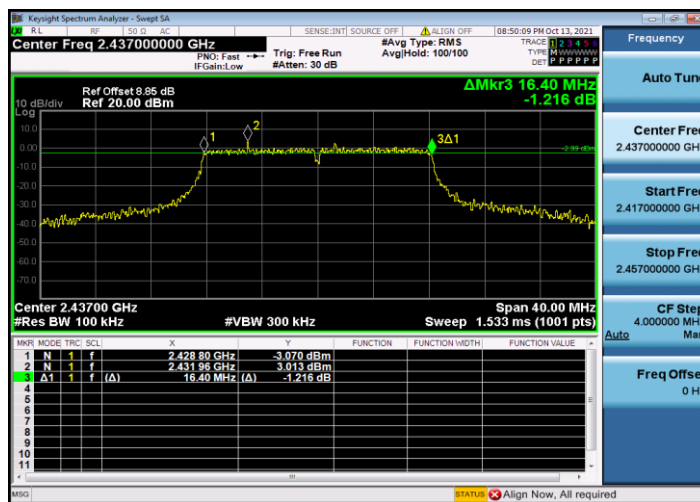


11G_Ant1_2462





11N20SISO_Ant1_2412

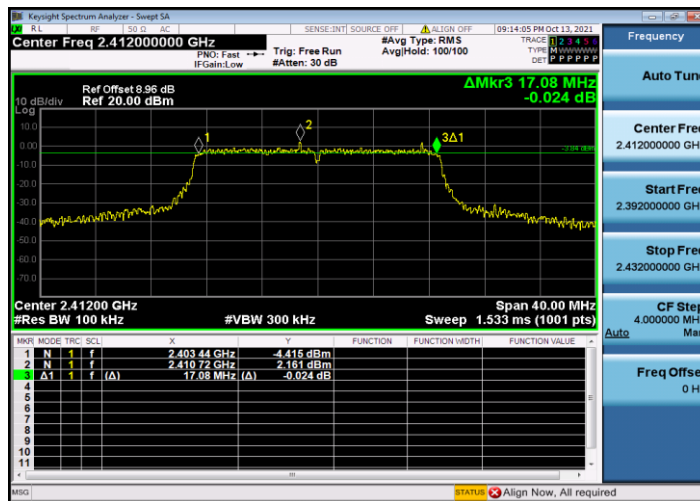

11N20SISO_Ant1_2437



11N20SISO_Ant1_2462




4.3 Conducted Output Power

4.3.1 Limit

For systems using digital modulation in the 2400 – 2483.5 MHz bands: 1 Watt (30 dBm)

4.3.2 Test Setup

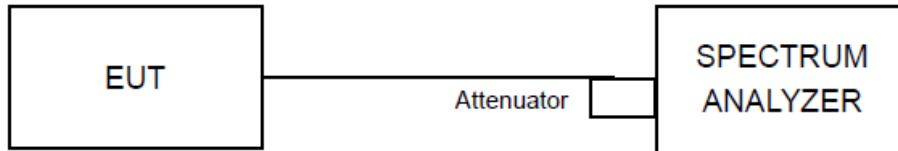

4.3.3 Test Procedures

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” for compliance to FCC 47CFR 15.247 requirements (clause 9.2.2.4).

- a) Measure the duty cycle, x , of the transmitter output signal as described in Section 6.0.
- b) Set span to at least 1.5 OBW.
- c) Set RBW = 1 % to 5 % of the OBW, not to exceed 1 MHz.
- d) Set VBW $\geq$ 3 RBW.
- e) Number of points in sweep $\geq$ 2 span / RBW. (This gives bin-to-bin spacing $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)
- f) Sweep time = auto.
- g) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- h) Do not use sweep triggering. Allow the sweep to “free run”.
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the on and off periods of the transmitter.
- j) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- k) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on- and off-times of the transmission). For example, add $10 \log (1/0.25) = 6$ dB if the duty cycle is 25 %.

4.3.4 Deviation of Test Standard


No deviation.

4.3.5 Test Results


Test Mode	Antenna	Channel [MHz]	Level [dBm]	10log(1/x) Factor[dB]	Power [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	16.00	0.00	16.00	<=30	PASS
		2437	15.01	0.00	15.01	<=30	PASS
		2462	15.15	0.00	15.15	<=30	PASS
11G	Ant1	2412	14.68	0.02	14.70	<=30	PASS
		2437	14.66	0.02	14.68	<=30	PASS
		2462	14.82	0.02	14.84	<=30	PASS
11N20SISO	Ant1	2412	13.64	0.02	13.66	<=30	PASS
		2437	13.65	0.02	13.67	<=30	PASS
		2462	13.89	0.02	13.91	<=30	PASS




11B_Ant1_2412

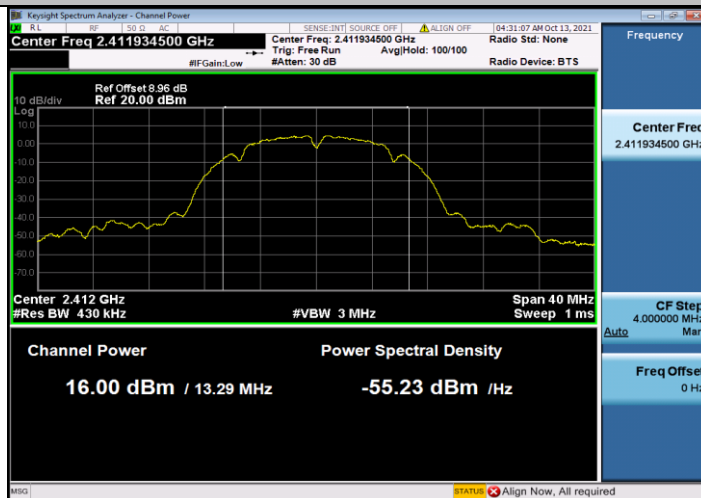

11B_Ant1_2437

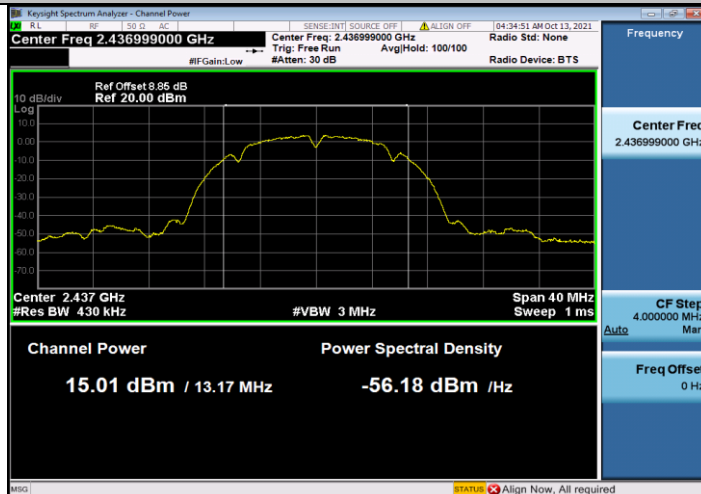


11B_Ant1_2462

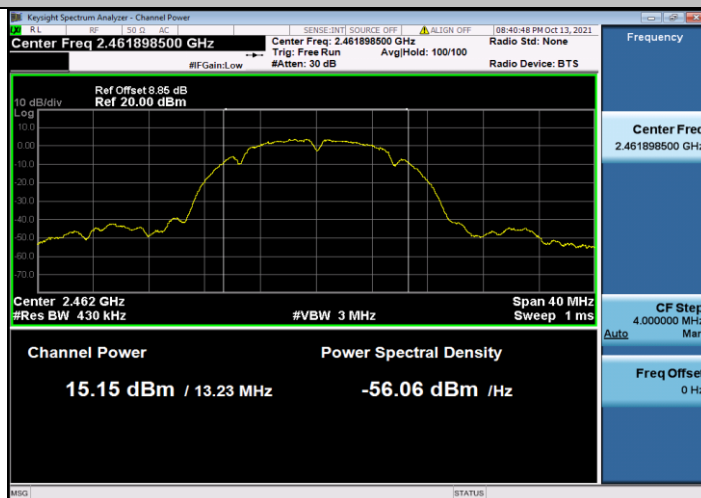





11G_Ant1_2412

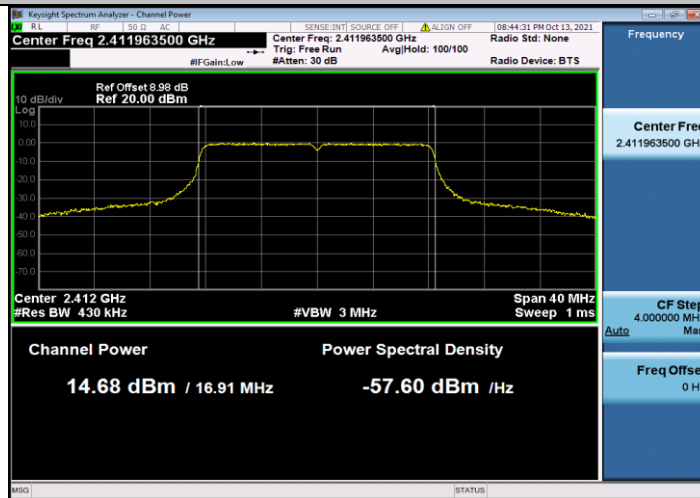

11G_Ant1_2437

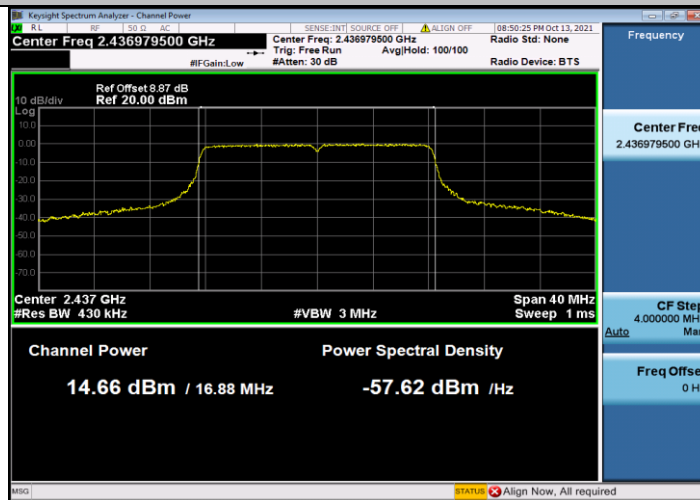


11G_Ant1_2462

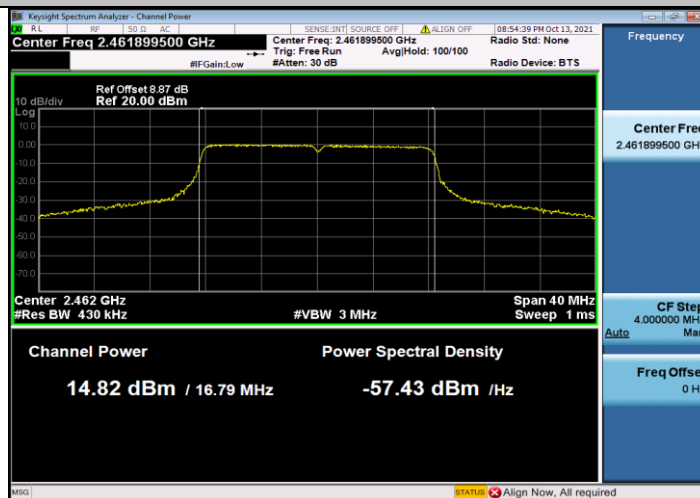





11N20SISO_Ant1_2412

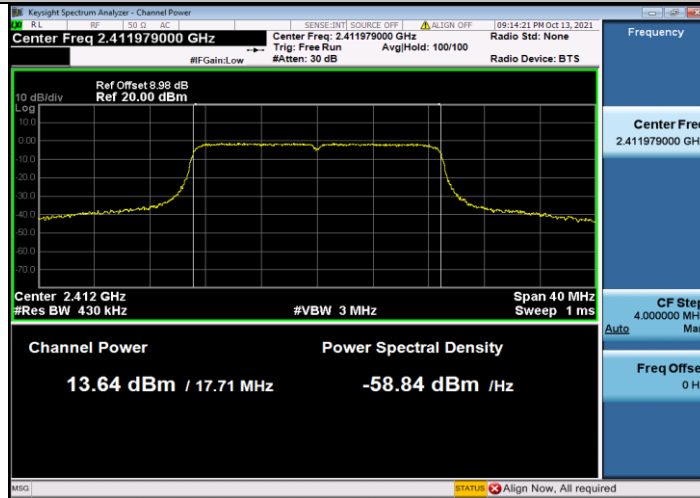

11N20SISO_Ant1_2437

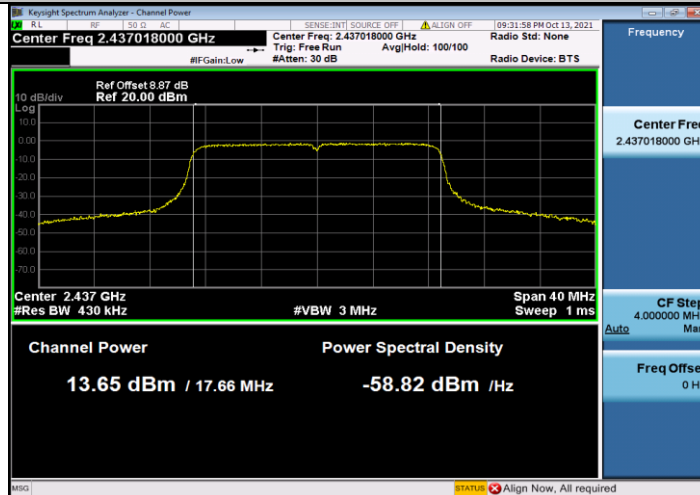

11N20SISO_Ant1_2462

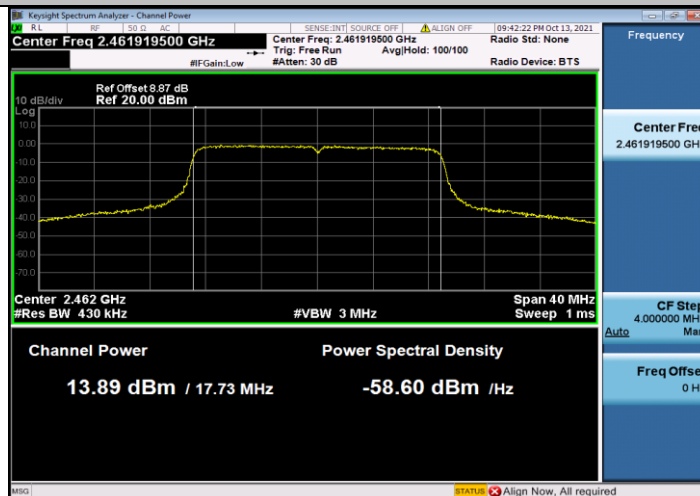




4.4 Power Spectral Density

4.4.1 Limit

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz band.

4.4.2 Test Setup

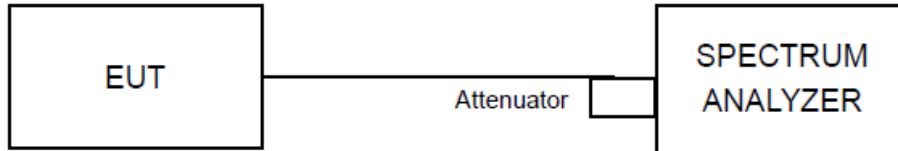

4.4.3 Test Procedures

The power output per FCC § 15.247(e) was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 10.5) for compliance to FCC 47CFR 15.247 requirements.

- a) Measure the duty cycle (x) of the transmitter output signal.
- b) Set instrument center frequency to DTS channel center frequency.
- c) Set span to at least 1.5 OBW.
- d) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- e) Set VBW $\geq 3 \text{ RBW}$.
- f) Detector = power averaging (RMS) or sample detector (when RMS not available).
- g) Ensure that the number of measurement points in the sweep $\geq 2 \text{ span/RBW}$.
- h) Sweep time = auto couple.
- i) Do not use sweep triggering. Allow sweep to “free run”.
- j) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k) Use the peak marker function to determine the maximum amplitude level.
- l) Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.
- m) If resultant value exceeds the limit, then reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

4.4.4 Deviation of Test Standard

No deviation.

4.4.5 Test Results

Test Mode	Antenna	Channel [MHz]	Level [dBm]	10log(1/x) Factor[dB]	PSD [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	-16.92	0.00	-16.92	<=8	PASS
		2437	-17.88	0.00	-17.88	<=8	PASS
		2462	-17.88	0.00	-17.88	<=8	PASS
11G	Ant1	2412	-20.64	0.02	-20.62	<=8	PASS
		2437	-20.61	0.02	-20.59	<=8	PASS
		2462	-20.32	0.02	-20.30	<=8	PASS
11N20SI SO	Ant1	2412	-21.57	0.02	-21.55	<=8	PASS
		2437	-21.55	0.02	-21.53	<=8	PASS
		2462	-21.23	0.02	-21.21	<=8	PASS



11B_Ant1_2412



11B_Ant1_2437




11B_Ant1_2462







11G_Ant1_2412

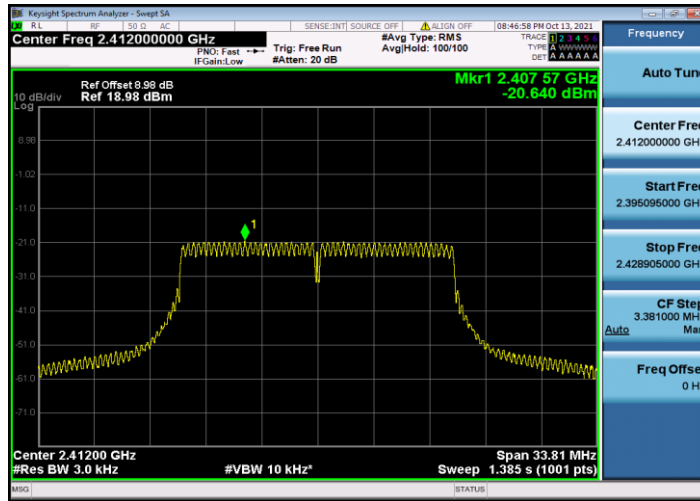

11G_Ant1_2437

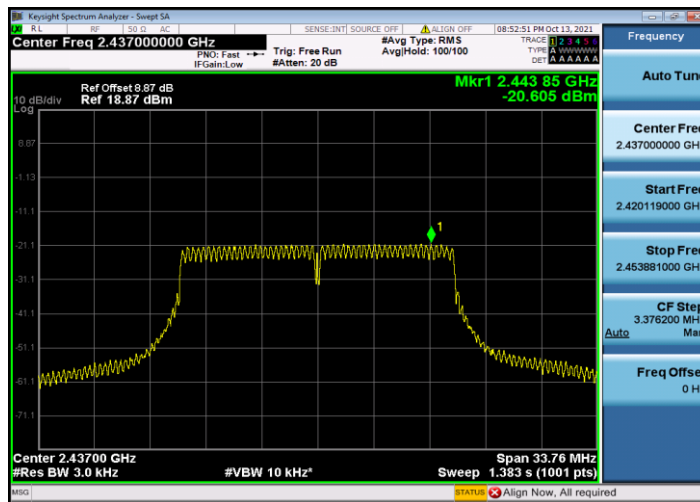


11G_Ant1_2462

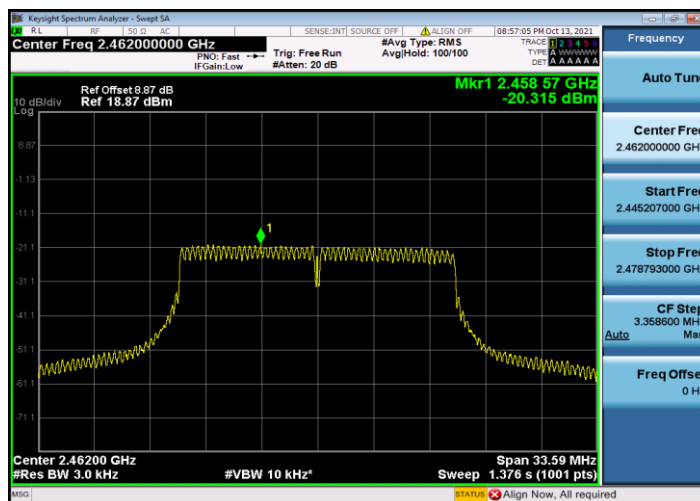





11N20SISO_Ant1_2412

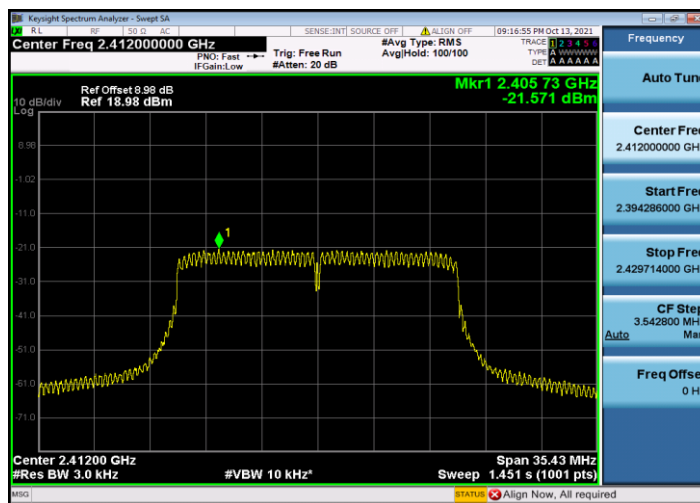

11N20SISO_Ant1_2437

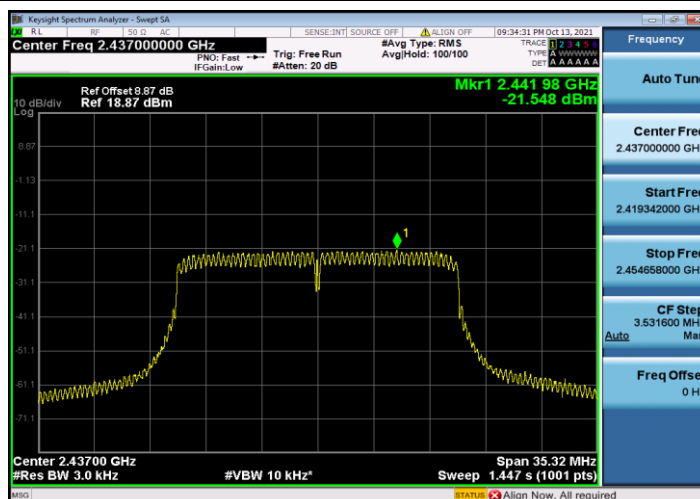

11N20SISO_Ant1_2462

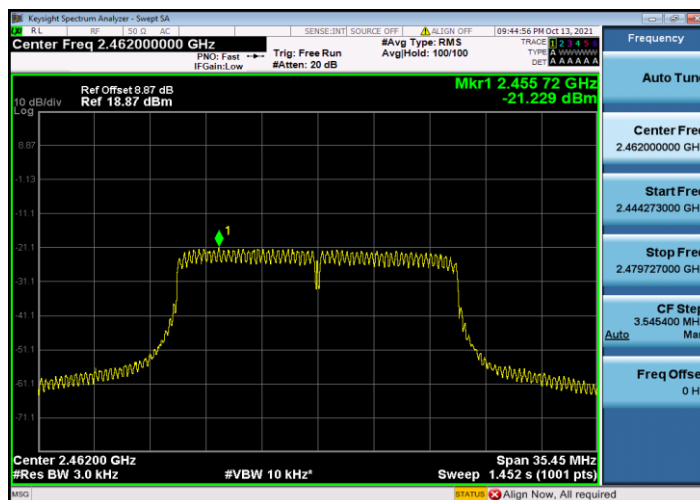


4.5 Conducted Band Edges Measurement

4.5.1 Limit

Below 30 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

4.5.2 Test Setup

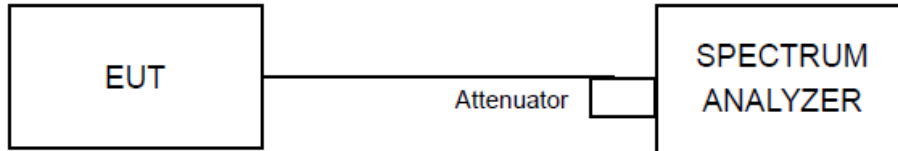

4.5.3 Test Procedures

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 11.0) for compliance to FCC 47CFR 15.247 requirements.

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.5.4 Deviation of Test Standard

No deviation.




4.5.5 Test Results


Test Mode	Antenna	ChName	Channel [MHz]	RefLevel [dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
11B	Ant1	Low	2412	6.91	-39.66	<=-23.09	PASS
		High	2462	6.10	-53.12	<=-23.9	PASS
11G	Ant1	Low	2412	2.63	-28.29	<=-27.37	PASS
		High	2462	2.72	-36.59	<=-27.28	PASS
11N20SISO	Ant1	Low	2412	2.31	-32.03	<=-27.69	PASS
		High	2462	1.91	-40.55	<=-28.1	PASS




11B_Ant1_Low_2412

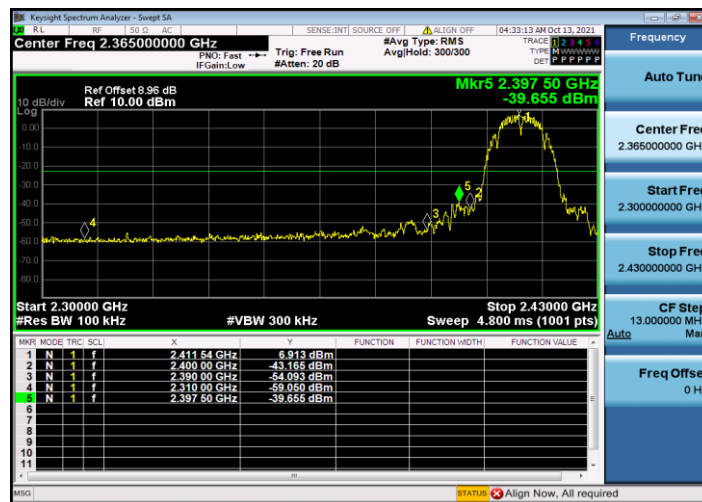

11B_Ant1_High_2462

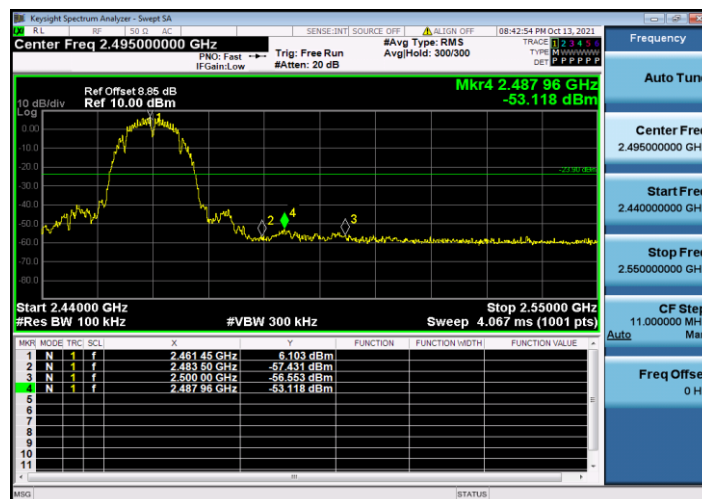


11G_Ant1_Low_2412

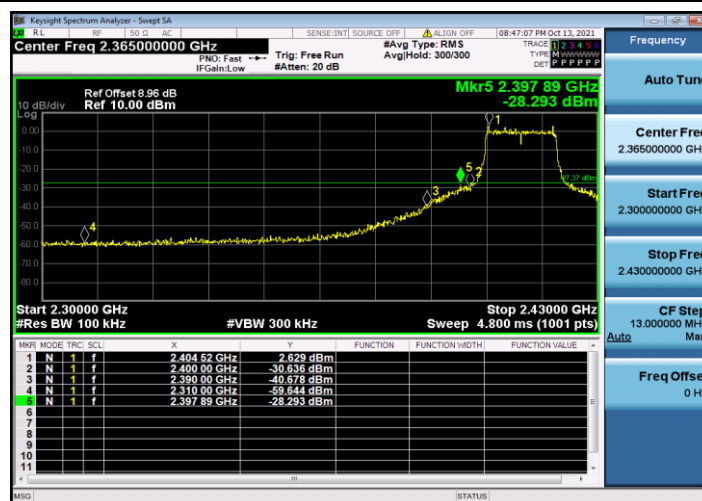




11G_Ant1_High_2462

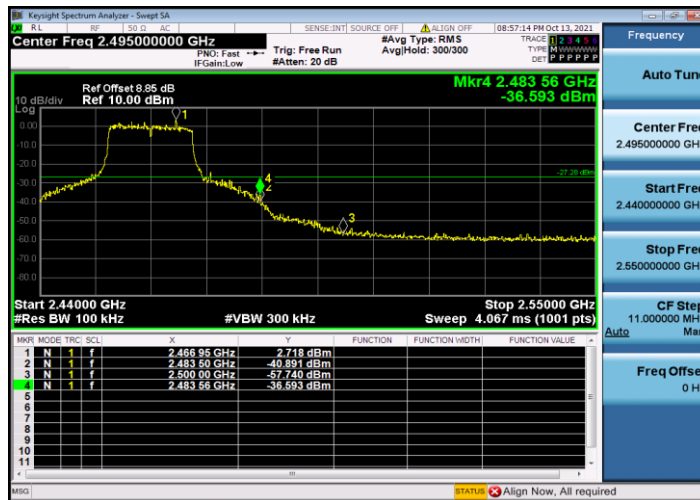

11N20SISO_Ant1_Low_2412

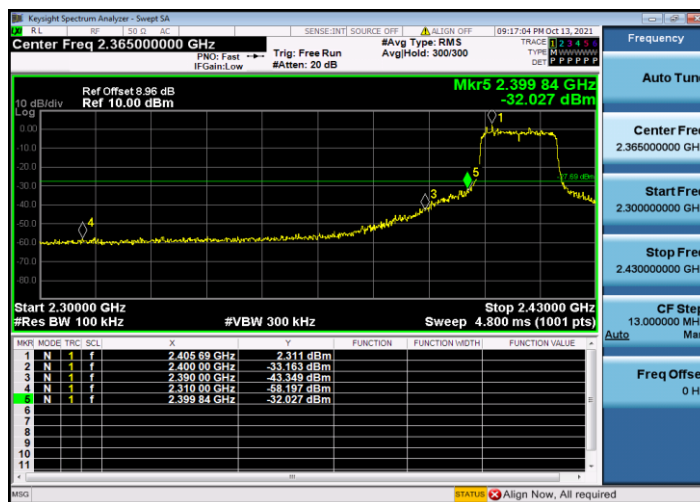

11N20SISO_Ant1_High_2462

