

VARIANT FCC TEST REPORT

(PART 27)



Applicant:	Fibocom Wireless Inc.
Address:	1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, Shenzhen, China.

Manufacturer or Supplier:	Fibocom Wireless Inc.
Address:	1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, Shenzhen, China.
Product:	LTE module
Brand Name:	Fibocom
Model Name:	L850-GL
FCC ID:	ZMOL850GLD-D1
Date of tests:	Jan. 17, 2022 ~ Jan. 19, 2022

The tests have been carried out according to the requirements of the following standard:

☒ FCC Part 27, Subpart C, M ☒ ANSI/TIA/EIA-603-D
☒ FCC Part 2 ☒ ANSI/TIA/EIA-603-E ☒ ANSI C63.26-2015

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
	
Date: Jan. 19, 2022	Date: Jan. 19, 2022

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 SUMMARY OF TEST RESULTS	4
1.1 MEASUREMENT UNCERTAINTY	5
1.2 TEST SITE AND INSTRUMENTS	6
2 GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 CONFIGURATION OF SYSTEM UNDER TEST	8
2.3 DESCRIPTION OF SUPPORT UNITS	9
2.4 TEST ITEM AND TEST CONFIGURATION	9
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3 TEST TYPES AND RESULTS	11
3.1 OUTPUT POWER MEASUREMENT	11
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	11
3.1.2 TEST PROCEDURES	11
3.1.3 TEST SETUP	12
3.1.4 TEST RESULTS	13
4 INFORMATION ON THE TESTING LABORATORIES	15
5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	16



Test Report No.: W7L-220113W003RF05

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF180704C01-3	Original release	Jul. 19, 2018
W7L-181207W001RF05	Based on the original report RF180704C01-3 Changing FCC ID	Dec. 14, 2018
W7L-220113W003RF05	Based on the original report W7L-181207W001RF05 Changing components	Jan. 19, 2022

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 27 & PART 2		
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT
2.1046 27.50(a)(3)	Equivalent Isotropically Radiated Power	Compliance (See Note 1)
2.1055 27.54	Frequency Stability	(See Note 2)
2.1049	Occupied Bandwidth	(See Note 2)
2.1051 27.53(a)(4)	Band Edge Measurements	(See Note 2)
2.1051 27.53(a)(4)	Conducted Spurious Emissions	(See Note 2)
2.1051 27.53(a)(4)	Radiated Spurious Emissions	Compliance (See Note 1)

NOTE:

1. Per the change notice provide by manufactory, the difference is changing components, all the change no effect any RF parameter and pre-scan all band radiated spurious emissions, worst case is reflected in the corresponding frequency band of other reports. This report only verify the power and only show the verify test data.

2. Please refer to original report W7L-181207W001RF05

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Conducted Output power	$\pm 2.06\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 22,21	Apr. 21,22
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	Jun. 03,21	Jun. 02,22
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 05,21	Mar. 04,22
Horn Antenna	ETS-LINDGREN	3117	00168728	Apr. 02,21	Apr. 01,22
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Aug. 25, 21	Aug. 24, 22
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 25,21	Feb. 24,22
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 02,21	Jun. 01,22
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 03,21	Jun. 02,22
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 22,21	Apr. 21,22
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	May. 19,20	May. 18,23
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V 7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jun. 03,21	Jun. 02,22
Power Meter	Anritsu	ML2495A	1506002	Apr. 07,21	Apr. 06,22
Power Sensor	Anritsu	MA2411B	1339352	May. 07,21	May. 06,22
Temperature Chamber	ESPEC	SH-242	93000855	Jun. 02,21	Jun. 01,22
MXG Analog Microwave Signal Generator	KEYSIGHT	N5183A	MY50143024	Mar. 05,21	Mar. 04,22
Power Divider	MCLI/USA	PS2-15	24880	N/A	N/A

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

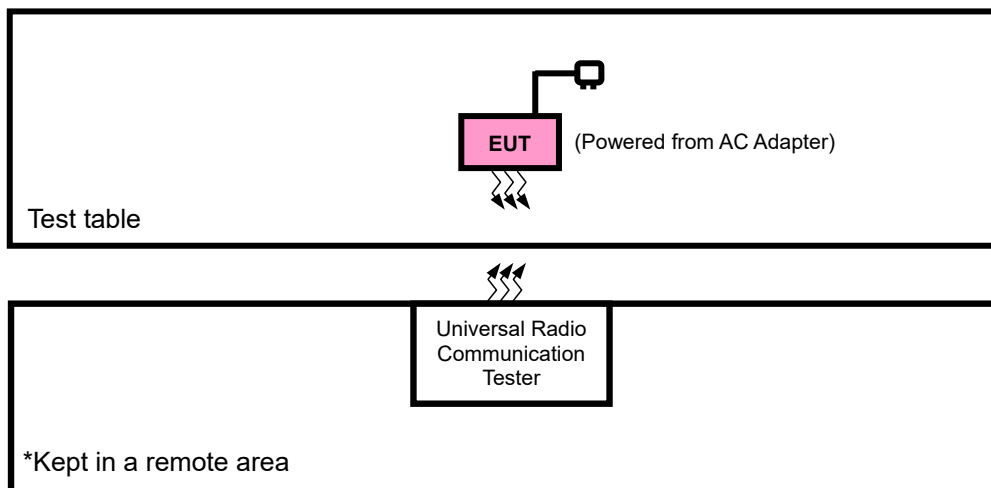
PRODUCT	LTE module	
BRAND NAME	Fibocom	
MODEL NAME	L850-GL	
NOMINAL VOLTAGE	3.3Vdc (Form Host Equipment)	
MODULATION TECHNOLOGY	LTE	QPSK, 16QAM
FREQUENCY RANGE	LTE Band 30 Channel Bandwidth: 5MHz	2307.5MHz ~ 2312.5MHz
	LTE Band 30 Channel Bandwidth: 10MHz	2310MHz
EMISSION DESIGNATOR	LTE Band 30 Channel Bandwidth: 5MHz	4M50W7D
	LTE Band 30 Channel Bandwidth: 10MHz	8M98W7D
MAX. EIRP POWER	LTE Band 30 Channel Bandwidth: 5MHz	243.78mW
	LTE Band 30 Channel Bandwidth: 10MHz	244.91mW
ANTENNA TYPE	External Antenna with 3.0 dBi gain	
HW VERSION	V1.0.4	
SW VERSION	18500.5001.00.05.27.12	
I/O PORTS	Refer to user's manual	
CABLE SUPPLIED	N/A	
EXTREME TEMPERATURE	-10-55 °C	
EXTREME VOLTAGE	3.3V- 4.4V	

NOTE:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

2.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

DESCRIPTION
EUT + AC Adapter with LTE link

LTE BAND 30

TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
ERP	27685 to 27735	27685, 27710, 27735	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
	27710	27710	10MHz	QPSK,16QAM	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



Test Report No.: W7L-220113W003RF05

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP/EIRP	23deg. C, 70%RH	DC 3.3V	Jace Hu

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth.(Band30)

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

CONDUCTED POWER MEASUREMENT:

- The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

3.1.3 TEST SETUP

CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.4 TEST RESULTS

AVERAGE CONDUCTED OUTPUT POWER (dBm)

LTE Band 30

Band/BW	Modulation	RB Size	RB Offset	Low CH 27685	Mid CH 27710	High CH 27735	MPR
				2307.5 MHz	2310.0 MHz	2312.5 MHz	
30/ 5	QPSK	1	0	20.87	20.76	20.79	0
		1	12	20.69	20.51	20.53	0
		1	24	20.58	20.49	20.57	0
		12	0	19.79	19.66	19.70	1
		12	6	19.56	19.79	19.68	1
		12	13	19.69	19.6	19.72	1
		25	0	19.61	19.73	19.63	1
	16QAM	1	0	15.67	15.72	15.81	1
		1	12	15.56	15.74	15.65	1
		1	24	15.60	15.61	15.79	1
		12	0	14.68	14.74	14.68	2
		12	6	14.72	14.84	14.72	2
		12	13	14.66	14.72	14.81	2
		25	0	14.80	14.82	14.83	2

Band/BW	Modulation	RB Size	RB Offset	/	Mid CH 27710	/	MPR
				/	2310.0 MHz	/	
30/ 10	QPSK	1	0	/	20.89	/	0
		1	24	/	20.75	/	0
		1	49	/	20.68	/	0
		25	0	/	19.89	/	1
		25	12	/	19.81	/	1
		25	25	/	19.85	/	1
		50	0	/	19.84	/	1
	16QAM	1	0	/	15.82	/	1
		1	24	/	15.80	/	1
		1	49	/	15.69	/	1
		25	0	/	14.89	/	2
		25	12	/	14.86	/	2
		25	25	/	14.77	/	2
		50	0	/	14.77	/	2

EIRP

LTE BAND 30

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (mW)/5MHz
27685	2307.5	20.87	3	23.87	243.78	250
27710	2310	20.76	3	23.76	237.68	250
27735	2312.5	20.79	3	23.79	239.33	250

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (mW)/5MHz
27685	2307.5	15.67	3	18.67	73.62	250
27710	2310	15.72	3	18.72	74.47	250
27735	2312.5	15.81	3	18.81	76.03	250

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (mW)/5MHz
-	-			-	-	-
27710	2310	20.89	3	23.89	244.91	250
-	-			-	-	-

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (mW)/5MHz
-	-			-	-	-
27710	2310	15.82	3	18.82	76.21	250
-	-			-	-	-



Test Report No.: W7L-220113W003RF05

4 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: customerservice.sw@cn.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



Test Report No.: W7L-220113W003RF05

5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---