


RF 27MHz Keyboard

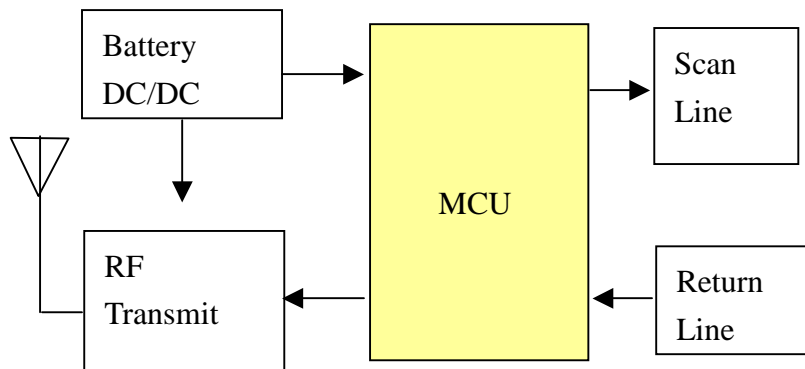

1. Power by the DC battery.
2. MCU send out Scan Line signal to Keyboard.
3. User operates keyboard by press the key and the signal will be return line to MCU.
4. Transfer the MCU signal to RF signal.