

## Supplementary FCC Test Report

**Report No.:** RF111028C08I

**FCC ID:** UZ7211486030B

**Test Model:** 21-148603-0B

**Received Date:** Jan. 09, 2019

**Test Date:** Jan. 19 to Feb. 27, 2019

**Issued Date:** Mar. 15, 2019

**Applicant:** Zebra Technologies Corporation

**Address:** 1 Zebra Plaza, Holtsville, NY 11742

**Manufacturer:** Symbol Technologies, Inc.

**Address:** 1 Zebra Plaza, Holtsville, NY 11742

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**FCC Registration /  
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

|                                                                  |           |
|------------------------------------------------------------------|-----------|
| <b>Report Issue History Record of EUT (21-148603-0B).....</b>    | <b>3</b>  |
| <b>Release Control Record .....</b>                              | <b>4</b>  |
| <b>1 Certificate of Conformity.....</b>                          | <b>5</b>  |
| <b>2 Summary of Test Results .....</b>                           | <b>6</b>  |
| 2.1 Measurement Uncertainty .....                                | 6         |
| 2.2 Modification Record .....                                    | 6         |
| <b>3 General Information.....</b>                                | <b>7</b>  |
| 3.1 General Description of EUT .....                             | 7         |
| 3.2 Description of Test Modes .....                              | 9         |
| 3.2.1 Test Mode Applicability and Tested Channel Detail .....    | 10        |
| 3.3 Description of Support Units .....                           | 12        |
| 3.3.1 Configuration of System under Test .....                   | 12        |
| 3.4 General Description of Applied Standards .....               | 13        |
| <b>4 Test Types and Results .....</b>                            | <b>14</b> |
| 4.1 Radiated Emission and Bandedge Measurement.....              | 14        |
| 4.1.1 Limits of Radiated Emission and Bandedge Measurement ..... | 14        |
| 4.1.2 Test Instruments .....                                     | 15        |
| 4.1.3 Test Procedures.....                                       | 17        |
| 4.1.4 Deviation from Test Standard .....                         | 17        |
| 4.1.5 Test Setup.....                                            | 18        |
| 4.1.6 EUT Operating Conditions.....                              | 20        |
| 4.1.7 Test Results .....                                         | 21        |
| 4.2 Conducted Output Power Measurement.....                      | 36        |
| 4.2.1 Limits of Conducted Output Power Measurement .....         | 36        |
| 4.2.2 Test Setup.....                                            | 36        |
| 4.2.3 Test Instruments .....                                     | 36        |
| 4.2.4 Test Procedures.....                                       | 36        |
| 4.2.5 Deviation from Test Standard .....                         | 36        |
| 4.2.6 EUT Operating Conditions.....                              | 36        |
| 4.2.7 Test Results .....                                         | 37        |
| <b>5 Pictures of Test Arrangements.....</b>                      | <b>38</b> |
| <b>Appendix – Information of the Testing Laboratories .....</b>  | <b>39</b> |

### Report Issue History Record of EUT (21-148603-0B)

| Attachment No. | Issue Date    | Description                                                              |                                  |
|----------------|---------------|--------------------------------------------------------------------------|----------------------------------|
| 111028C08A     | Mar. 09, 2012 | Original release.                                                        |                                  |
| 111028C08F     | Apr. 27, 2016 | Upgrade the standard to section 15.407 under new rule.                   |                                  |
| 111028C08H     | Sep. 13, 2017 | Change RF Switch (2nd source pin to pin)                                 |                                  |
| 111028C08I     |               | 2 <sup>nd</sup> source changed. Component changes as listed below table. |                                  |
|                |               | Alternative Parts Location                                               | Description                      |
|                |               | U14                                                                      | WiFi Dual Band Diplexer          |
|                |               | C24                                                                      | 20pF cap for GPS                 |
|                |               | C55,C57,C60                                                              | 8.2pF cap for WiFi               |
|                |               | C9, C10, C11, C12, C13                                                   | 1uF cap for WiFi BT              |
|                |               | FLT1                                                                     | Band Pass Filter for 2.4GHz WiFi |
|                |               | C23                                                                      | 1.8pF cap for GPS                |
|                |               | C31                                                                      | 68pF cap for XTAL                |
|                |               | C107,C108                                                                | 10pF cap for WiFi                |

### Release Control Record

| Issue No.    | Description       | Date Issued   |
|--------------|-------------------|---------------|
| RF111028C08I | Original release. | Mar. 15, 2019 |

## 1 Certificate of Conformity

**Product:** Radio Module

**Brand:** Zebra

**Test Model:** 21-148603-0B

**Sample Status:** ENGINEERING SAMPLE

**Applicant:** Zebra Technologies Corporation

**Test Date:** Jan. 19 to Feb. 27, 2019

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :**



**Date:**

Mar. 15, 2019

Claire Kuan / Specialist

**Approved by :**



**Date:**

Mar. 15, 2019

May Chen / Manager

## 2 Summary of Test Results

| 47 CFR FCC Part 15, Subpart C (Section 15.247) |                                              |        |                                                                                   |
|------------------------------------------------|----------------------------------------------|--------|-----------------------------------------------------------------------------------|
| FCC Clause                                     | Test Item                                    | Result | Remarks                                                                           |
| 15.205 /<br>15.209 /<br>15.247(d)              | Radiated Emissions and Band Edge Measurement | PASS   | Meet the requirement of limit.<br>Minimum passing margin is -1.1dB at 2390.00MHz. |
| 15.247(b)                                      | Conducted power                              | PASS   | Meet the requirement of limit.                                                    |

- NOTE:** 1. This is a supplementary report. (2<sup>nd</sup> source changed)
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement                    | Frequency     | Expanded Uncertainty (k=2) (±) |
|--------------------------------|---------------|--------------------------------|
| Radiated Emissions up to 1 GHz | 30MHz ~ 1GHz  | 5.1 dB                         |
| Radiated Emissions above 1 GHz | 1GHz ~ 6GHz   | 5.1 dB                         |
|                                | 6GHz ~ 18GHz  | 5.0 dB                         |
|                                | 18GHz ~ 40GHz | 5.2 dB                         |

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

|                       |                                                                                                                                                                                                      |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product               | Radio Module                                                                                                                                                                                         |
| Brand                 | Zebra                                                                                                                                                                                                |
| Test Model            | 21-148603-0B                                                                                                                                                                                         |
| Status of EUT         | ENGINEERING SAMPLE                                                                                                                                                                                   |
| Power Supply Rating   | DC 3.3V                                                                                                                                                                                              |
| Modulation Type       | CCK, DQPSK, DBPSK for DSSS<br>64QAM, 16QAM, QPSK, BPSK for OFDM                                                                                                                                      |
| Modulation Technology | DSSS, OFDM                                                                                                                                                                                           |
| Transfer Rate         | 802.11b: up to 11Mbps<br>802.11a/g: up to 54Mbps<br>802.11n: up to 72.2Mbps                                                                                                                          |
| Operating Frequency   | <b>For 2.4GHz:</b><br>2.412 ~ 2.472GHz<br><b>For 5GHz:</b><br>5.18 ~ 5.24GHz, 5.26 ~ 5.32GHz, 5.5~5.7GHz, 5.745 ~ 5.825GHz                                                                           |
| Number of Channel     | <b>For 2.4GHz:</b><br>802.11b, 802.11g, 802.11n (HT20):13<br><b>For 5GHz:</b><br>802.11a, 802.11n (HT20): 24                                                                                         |
| Output Power          | <b>For 2.4GHz:</b><br>194.089mW<br><b>For 5GHz:</b><br><b>5.18 ~ 5.24GHz</b><br>28.774mW<br><b>5.26 ~ 5.32GHz</b><br>91.411mW<br><b>5.5~5.7GHz</b><br>85.704mW<br><b>5.745 ~ 5.825GHz</b><br>89.95mW |
| Antenna Type          | Refer to Note                                                                                                                                                                                        |
| Antenna Connector     | Refer to Note                                                                                                                                                                                        |
| Accessory Device      | NA                                                                                                                                                                                                   |
| Data Cable Supplied   | NA                                                                                                                                                                                                   |

Note:

1. This report is prepared for FCC Class II permissive change. The difference compared with the Report No.: RF111028C08H design is as the following information:

- ◆ 2<sup>nd</sup> source changed. Component changes as listed below table.

| Alternative Parts Location | Description                      |
|----------------------------|----------------------------------|
| U14                        | WiFi Dual Band Diplexer          |
| C24                        | 20pF cap for GPS                 |
| C55,C57,C60                | 8.2pF cap for WiFi               |
| C9, C10, C11, C12, C13     | 1uF cap for WiFi BT              |
| FLT1                       | Band Pass Filter for 2.4GHz WiFi |
| C23                        | 1.8pF cap for GPS                |
| C31                        | 68pF cap for XTAL                |
| C107,C108                  | 10pF cap for WiFi                |

2. According to above conditions, only Conducted power and Radiated emissions test item need to be performed. And all data was verified to meet the requirements.

3. There are Bluetooth technology, GPS technology and WLAN technology used for the EUT.

4. The antennas provided to the EUT, please refer to the following table:

| No. | Type     | Connector   | Model                 | Peak Gain (dBi)        | Cable loss (dB)             | Net Peak Gain (dBi)         | Trace |
|-----|----------|-------------|-----------------------|------------------------|-----------------------------|-----------------------------|-------|
| 1   | Dipole-1 | Reverse SMA | ML-2452-APA2-01 Rev C | 2.4GHz : 3<br>5GHz : 5 | 2.4GHz : 0.75<br>5GHz : 1.3 | 2.4GHz : 2.25<br>5GHz : 3.7 | WiFi  |
| 2   | Dipole-2 | Reverse SMA | C492-510032-A         | 1.8                    | 2.35                        | -0.55                       | BT    |
| 3   | Chip     | Reverse SMA | NA                    | -                      | -                           |                             | GPS   |

5. The EUT was included two SKU, which are identical to each other in all aspects except for the following table:

|        | P/N          | Description                                               |
|--------|--------------|-----------------------------------------------------------|
| SKU #1 | 21-148603-02 | Diversity version with WLAN and BT on SHARED RF paths     |
| SKU #2 | 21-148603-04 | NON-Diversity version with WLAN and BT on SHARED RF paths |

**SKU #1**, the worse case one, was chosen for final test.

6. Spurious Emission of the simultaneous operation (WiFi & Bluetooth) have been evaluated and no non-compliance found. (The device can transmit simultaneously on WLAN (5GHz) mode and Bluetooth mode; other modes can't support simultaneously ability.)
7. The EUT is 1 \* 1 spatial SISO (1Tx & 1Rx) without beam forming function.
8. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

13 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 1       | 2412MHz   | 8       | 2447MHz   |
| 2       | 2417MHz   | 9       | 2452MHz   |
| 3       | 2422MHz   | 10      | 2457MHz   |
| 4       | 2427MHz   | 11      | 2462MHz   |
| 5       | 2432MHz   | 12      | 2467MHz   |
| 6       | 2437MHz   | 13      | 2472MHz   |
| 7       | 2442MHz   |         |           |

### 3.2.1 Test Mode Applicability and Tested Channel Detail

| EUT CONFIGURE MODE | APPLICABLE TO |       |      | DESCRIPTION |
|--------------------|---------------|-------|------|-------------|
|                    | RE≥1G         | RE<1G | APCM |             |
| -                  | √             | √     | √    | -           |

Where **RE≥1G**: Radiated Emission above 1GHz & Bandedge Measurement  
**RE<1G**: Radiated Emission below 1GHz  
**APCM**: Antenna Port Conducted Measurement

#### **Radiated Emission Test (Above 1GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| MODE           | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|----------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b        | 1 to 13           | 1, 6, 11       | DSSS                  | DBPSK           | 1                |
| 802.11g        | 1 to 13           | 1, 6, 11       | OFDM                  | BPSK            | 6                |
| 802.11n (HT20) | 1 to 13           | 1, 6, 11       | OFDM                  | BPSK            | 6.5              |

#### **Radiated Emission Test (Below 1GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| MODE           | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|----------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b        | 1 to 13           | 6              | DSSS                  | DBPSK           | 1                |
| 802.11g        | 1 to 13           | 6              | OFDM                  | BPSK            | 6                |
| 802.11n (HT20) | 1 to 13           | 6              | OFDM                  | BPSK            | 6.5              |

#### **Antenna Port Conducted Measurement:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| MODE           | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|----------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b        | 1 to 13           | 1, 6, 11       | DSSS                  | DBPSK           | 1                |
| 802.11g        | 1 to 13           | 1, 6, 11       | OFDM                  | BPSK            | 6                |
| 802.11n (HT20) | 1 to 13           | 1, 6, 11       | OFDM                  | BPSK            | 6.5              |

**Test Condition:**

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER  | TESTED BY    |
|---------------|--------------------------|--------------|--------------|
| RE $\geq$ 1G  | 23deg. C, 67%RH          | 120Vac, 60Hz | Frank Chuang |
| RE<1G         | 24deg. C, 74%RH          | 120Vac, 60Hz | Frank Chuang |
| APCM          | 25deg. C, 60%RH          | 120Vac, 60Hz | Weiwei Lo    |

### 3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| ID | Product        | Brand                         | Model No. | Serial No. | FCC ID | Remarks            |
|----|----------------|-------------------------------|-----------|------------|--------|--------------------|
| A. | Test Tool      | Zebra                         | NA        | NA         | NA     | Supplied by client |
| B. | DC Powersupply | GOOD WILL INSTRUMENT CO., LTD | GPC-3030D | E847076    | NA     | Provided by Lab    |
| C. | Laptop         | Dell                          | E6400     | NA         | NA     | Supplied by client |


Note:

1. All power cords of the above support units are non-shielded (1.8m).

| ID | Descriptions | Qty. | Length (m) | Shielding (Yes/No) | Cores (Qty.) | Remarks            |
|----|--------------|------|------------|--------------------|--------------|--------------------|
| 1. | DC Cable     | 1    | 1.8        | No                 | 0            | Provided by Lab    |
| 2. | USB Cable    | 1    | 1          | Yes                | 1            | Supplied by client |

Note: The core(s) is(are) originally attached to the cable(s).

#### 3.3.1 Configuration of System under Test

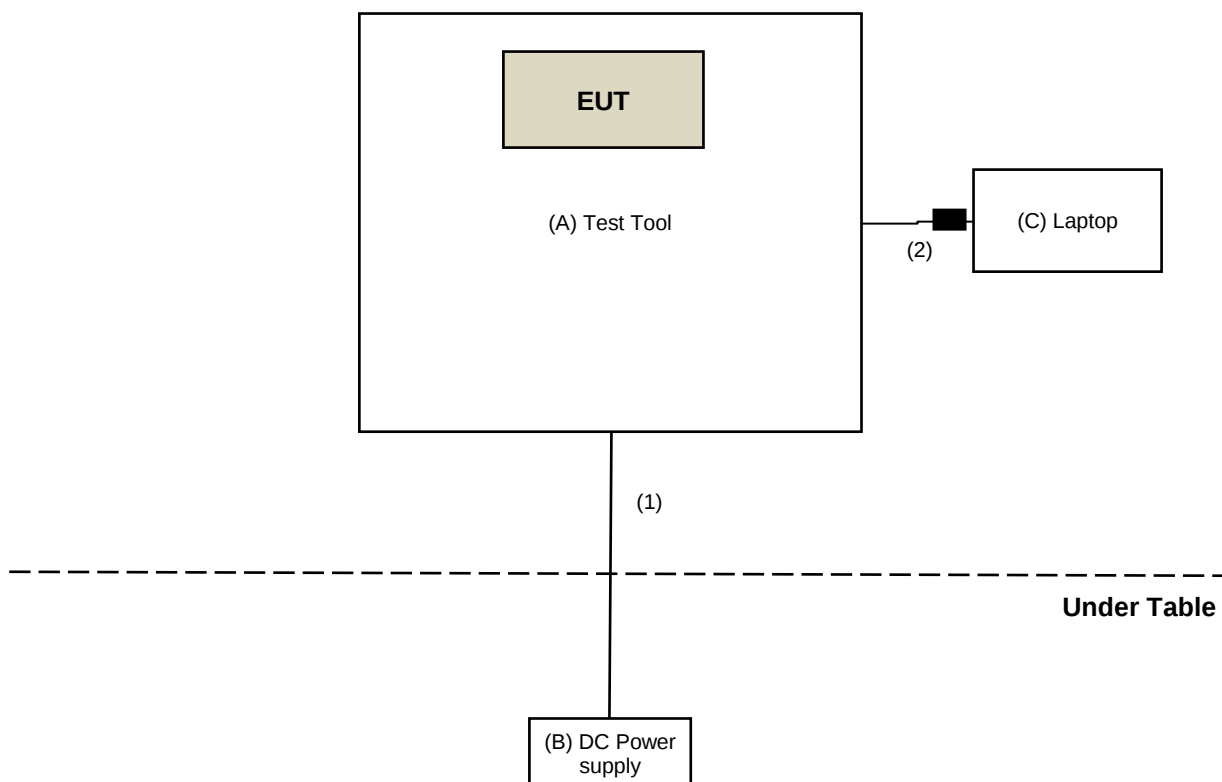

### 3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**  
**KDB 558074 D01 15.247 Meas Guidance v05r01**  
**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490     | 2400/F(kHz)                       | 300                           |
| 0.490 ~ 1.705     | 24000/F(kHz)                      | 30                            |
| 1.705 ~ 30.0      | 30                                | 30                            |
| 30 ~ 88           | 100                               | 3                             |
| 88 ~ 216          | 150                               | 3                             |
| 216 ~ 960         | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

#### NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 Test Instruments

For radiated emissions test:

| DESCRIPTION & MANUFACTURER              | MODEL NO.            | SERIAL NO.  | CALIBRATED DATE | CALIBRATED UNTIL |
|-----------------------------------------|----------------------|-------------|-----------------|------------------|
| Test Receiver<br>Agilent                | N9038A               | MY50010156  | July 12, 2018   | July 11, 2019    |
| Pre-Amplifier<br>EMCI                   | EMC001340            | 980142      | Feb. 09, 2018   | Feb. 08, 2019    |
| Loop Antenna<br>Electro-Metrics         | EM-6879              | 269         | Sep. 07, 2018   | Sep. 06, 2019    |
| RF Cable                                | NA                   | LOOPCAB-001 | Jan. 14, 2019   | Jan. 13, 2020    |
| RF Cable                                | NA                   | LOOPCAB-002 | Jan. 14, 2019   | Jan. 13, 2020    |
| Pre-Amplifier<br>Mini-Circuits          | ZFL-1000VH2B         | AMP-ZFL-05  | May 05, 2018    | May 04, 2019     |
| Trilog Broadband Antenna<br>SCHWARZBECK | VULB 9168            | 9168-361    | Nov. 22, 2018   | Nov. 21, 2019    |
| RF Cable                                | 8D                   | 966-3-1     | Mar. 20, 2018   | Mar. 19, 2019    |
| RF Cable                                | 8D                   | 966-3-2     | Mar. 20, 2018   | Mar. 19, 2019    |
| RF Cable                                | 8D                   | 966-3-3     | Mar. 20, 2018   | Mar. 19, 2019    |
| Fixed attenuator<br>Mini-Circuits       | UNAT-5+              | PAD-3m-3-01 | Sep. 27, 2018   | Sep. 26, 2019    |
| Horn_Antenna<br>SCHWARZBECK             | BBHA9120-D           | 9120D-406   | Nov. 25, 2018   | Nov. 24, 2019    |
| Pre-Amplifier<br>EMCI                   | EMC12630SE           | 980384      | Jan. 29, 2018   | Jan. 28, 2019    |
| RF Cable                                | EMC104-SM-SM-1200    | 160922      | Jan. 29, 2018   | Jan. 28, 2019    |
| RF Cable                                | EMC104-SM-SM-2000    | 180601      | June 12, 2018   | June 11, 2019    |
| RF Cable                                | EMC104-SM-SM-6000    | 180602      | June 12, 2018   | June 11, 2019    |
| Spectrum Analyzer<br>Keysight           | N9030A               | MY54490679  | July 23, 2018   | July 22, 2019    |
| Pre-Amplifier<br>EMCI                   | EMC184045SE          | 980386      | Jan. 29, 2018   | Jan. 28, 2019    |
| Horn_Antenna<br>SCHWARZBECK             | BBHA 9170            | BBHA9170519 | Nov. 25, 2018   | Nov. 24, 2019    |
| RF Cable                                | EMC102-KM-KM-1200    | 160924      | Jan. 29, 2018   | Jan. 28, 2019    |
| Software                                | ADT_Radiated_V8.7.08 | NA          | NA              | NA               |
| Antenna Tower & Turn Table<br>Max-Full  | MF-7802              | MF780208406 | NA              | NA               |
| Boresight Antenna Fixture               | FBA-01               | FBA-SIP01   | NA              | NA               |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. The CANADA Site Registration No. is 20331-1
4. Loop antenna was used for all emissions below 30 MHz.
5. Tested Date: Jan. 19, 2019

For output power test:

| DESCRIPTION &<br>MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED<br>DATE | CALIBRATED<br>UNTIL |
|-------------------------------|-----------|------------|--------------------|---------------------|
| Spectrum Analyzer<br>R&S      | FSV40     | 100964     | June 20, 2018      | June 19, 2019       |
| Power meter<br>Anritsu        | ML2495A   | 1014008    | May 09, 2018       | May 08, 2019        |
| Power sensor<br>Anritsu       | MA2411B   | 0917122    | May 09, 2018       | May 08, 2019        |

**Note:**

1. The test was performed in Oven room 2.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. Tested Date: Feb. 27, 2019

#### 4.1.3 Test Procedures

##### **For Radiated emission below 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### **NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### **For Radiated emission above 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### **Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup


##### For Radiated emission below 30MHz

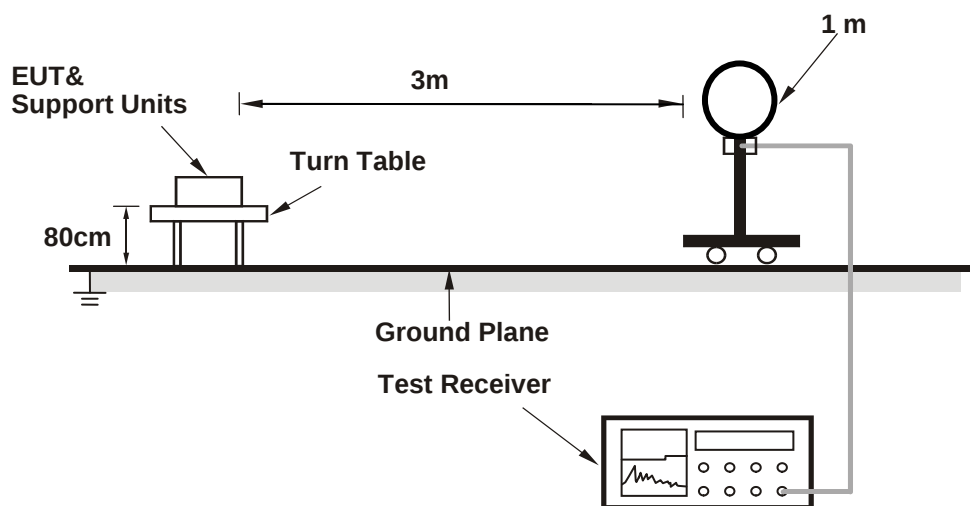

##### For Radiated emission 30MHz to 1GHz

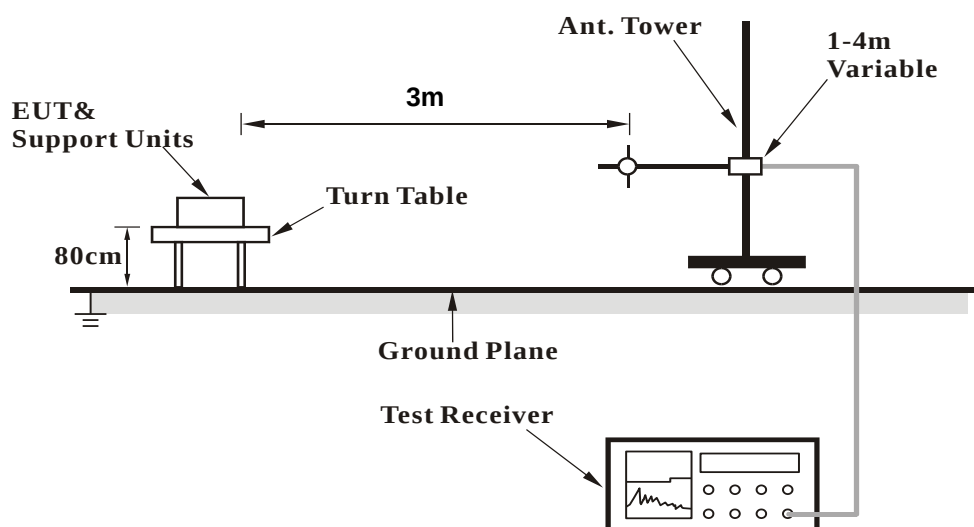

# For Radiated emission above 1GHz

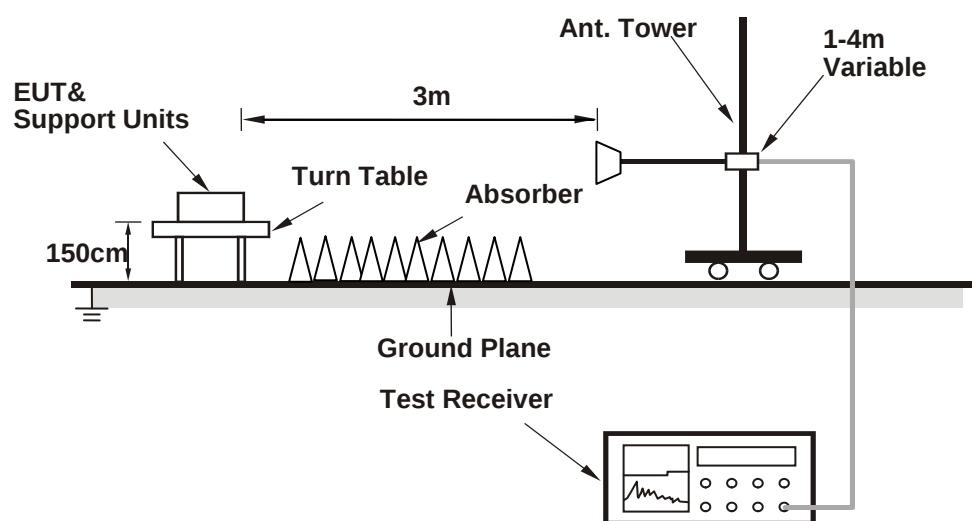

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

1. Connect the EUT with the support unit C (Laptop) which is placed on a testing table.
2. The communication partner run test program "HCITester (3.0.0.12) load BT Script.txt" to enable EUT under transmission/receiving condition continuously at specific channel frequency.

#### 4.1.7 Test Results

#### Above 1GHz Data :

#### 802.11b

|                        |              |                          |              |
|------------------------|--------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 1 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                          | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2390.00     | 55.0 PK                 | 74.0           | -19.0       | 1.02 H             | 250                  | 57.4             | -2.4                     |
| 2                                                   | 2390.00     | 44.0 AV                 | 54.0           | -10.0       | 1.02 H             | 250                  | 46.4             | -2.4                     |
| 3                                                   | *2412.00    | 106.7 PK                |                |             | 1.02 H             | 250                  | 109.0            | -2.3                     |
| 4                                                   | *2412.00    | 103.8 AV                |                |             | 1.02 H             | 250                  | 106.1            | -2.3                     |
| 5                                                   | 4824.00     | 39.2 PK                 | 74.0           | -34.8       | 1.28 H             | 42                   | 37.3             | 1.9                      |
| 6                                                   | 4824.00     | 27.7 AV                 | 54.0           | -26.3       | 1.28 H             | 42                   | 25.8             | 1.9                      |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2390.00     | 55.5 PK                 | 74.0           | -18.5       | 1.47 V             | 14                   | 57.9             | -2.4                     |
| 2                                                   | 2390.00     | 45.1 AV                 | 54.0           | -8.9        | 1.47 V             | 14                   | 47.5             | -2.4                     |
| 3                                                   | *2412.00    | 109.3 PK                |                |             | 1.47 V             | 14                   | 111.6            | -2.3                     |
| 4                                                   | *2412.00    | 106.3 AV                |                |             | 1.47 V             | 14                   | 108.6            | -2.3                     |
| 5                                                   | 4824.00     | 44.3 PK                 | 74.0           | -29.7       | 1.05 V             | 71                   | 42.4             | 1.9                      |
| 6                                                   | 4824.00     | 38.0 AV                 | 54.0           | -16.0       | 1.05 V             | 71                   | 36.1             | 1.9                      |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

|                        |              |                              |              |
|------------------------|--------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 6 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                              | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 2390.00        | 53.0 PK                       | 74.0              | -21.0          | 1.03 H                   | 228                        | 55.4                   | -2.4                           |
| 2                                                   | 2390.00        | 40.0 AV                       | 54.0              | -14.0          | 1.03 H                   | 228                        | 42.4                   | -2.4                           |
| 3                                                   | *2437.00       | 107.6 PK                      |                   |                | 1.03 H                   | 228                        | 110.1                  | -2.5                           |
| 4                                                   | *2437.00       | 104.4 AV                      |                   |                | 1.03 H                   | 228                        | 106.9                  | -2.5                           |
| 5                                                   | 2483.50        | 54.5 PK                       | 74.0              | -19.5          | 1.03 H                   | 228                        | 57.1                   | -2.6                           |
| 6                                                   | 2483.50        | 42.3 AV                       | 54.0              | -11.7          | 1.03 H                   | 228                        | 44.9                   | -2.6                           |
| 7                                                   | 4874.00        | 39.0 PK                       | 74.0              | -35.0          | 1.21 H                   | 46                         | 37.1                   | 1.9                            |
| 8                                                   | 4874.00        | 28.1 AV                       | 54.0              | -25.9          | 1.21 H                   | 46                         | 26.2                   | 1.9                            |
| 9                                                   | 7311.00        | 46.1 PK                       | 74.0              | -27.9          | 1.28 H                   | 73                         | 38.3                   | 7.8                            |
| 10                                                  | 7311.00        | 38.5 AV                       | 54.0              | -15.5          | 1.28 H                   | 73                         | 30.7                   | 7.8                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 2390.00        | 55.1 PK                       | 74.0              | -18.9          | 1.56 V                   | 314                        | 57.5                   | -2.4                           |
| 2                                                 | 2390.00        | 42.2 AV                       | 54.0              | -11.8          | 1.56 V                   | 314                        | 44.6                   | -2.4                           |
| 3                                                 | *2437.00       | 109.4 PK                      |                   |                | 1.56 V                   | 314                        | 111.9                  | -2.5                           |
| 4                                                 | *2437.00       | 106.7 AV                      |                   |                | 1.56 V                   | 314                        | 109.2                  | -2.5                           |
| 5                                                 | 2483.50        | 55.2 PK                       | 74.0              | -18.8          | 1.56 V                   | 314                        | 57.8                   | -2.6                           |
| 6                                                 | 2483.50        | 43.7 AV                       | 54.0              | -10.3          | 1.56 V                   | 314                        | 46.3                   | -2.6                           |
| 7                                                 | 4874.00        | 43.7 PK                       | 74.0              | -30.3          | 1.05 V                   | 102                        | 41.8                   | 1.9                            |
| 8                                                 | 4874.00        | 37.5 AV                       | 54.0              | -16.5          | 1.05 V                   | 102                        | 35.6                   | 1.9                            |
| 9                                                 | 7311.00        | 48.9 PK                       | 74.0              | -25.1          | 2.46 V                   | 153                        | 41.1                   | 7.8                            |
| 10                                                | 7311.00        | 45.2 AV                       | 54.0              | -8.8           | 2.46 V                   | 153                        | 37.4                   | 7.8                            |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

|                        |               |                              |              |
|------------------------|---------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 11 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz  |                              | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | *2462.00       | 106.7 PK                      |                   |                | 1.00 H                   | 242                        | 109.2                  | -2.5                           |
| 2                                                   | *2462.00       | 104.1 AV                      |                   |                | 1.00 H                   | 242                        | 106.6                  | -2.5                           |
| 3                                                   | 2483.50        | 55.3 PK                       | 74.0              | -18.7          | 1.00 H                   | 247                        | 57.9                   | -2.6                           |
| 4                                                   | 2483.50        | 44.4 AV                       | 54.0              | -9.6           | 1.00 H                   | 247                        | 47.0                   | -2.6                           |
| 5                                                   | 4924.00        | 38.1 PK                       | 74.0              | -35.9          | 1.23 H                   | 57                         | 36.1                   | 2.0                            |
| 6                                                   | 4924.00        | 27.2 AV                       | 54.0              | -26.8          | 1.23 H                   | 57                         | 25.2                   | 2.0                            |
| 7                                                   | 7386.00        | 45.9 PK                       | 74.0              | -28.1          | 1.34 H                   | 79                         | 38.0                   | 7.9                            |
| 8                                                   | 7386.00        | 38.4 AV                       | 54.0              | -15.6          | 1.34 H                   | 79                         | 30.5                   | 7.9                            |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | *2462.00       | 109.2 PK                      |                   |                | 1.06 V                   | 347                        | 111.7                  | -2.5                           |
| 2                                                   | *2462.00       | 106.4 AV                      |                   |                | 1.06 V                   | 347                        | 108.9                  | -2.5                           |
| 3                                                   | 2483.50        | 56.7 PK                       | 74.0              | -17.3          | 1.01 V                   | 356                        | 59.3                   | -2.6                           |
| 4                                                   | 2483.50        | 46.2 AV                       | 54.0              | -7.8           | 1.01 V                   | 356                        | 48.8                   | -2.6                           |
| 5                                                   | 4924.00        | 43.5 PK                       | 74.0              | -30.5          | 1.16 V                   | 102                        | 41.5                   | 2.0                            |
| 6                                                   | 4924.00        | 37.5 AV                       | 54.0              | -16.5          | 1.16 V                   | 102                        | 35.5                   | 2.0                            |
| 7                                                   | 7386.00        | 49.6 PK                       | 74.0              | -24.4          | 2.48 V                   | 115                        | 41.7                   | 7.9                            |
| 8                                                   | 7386.00        | 45.8 AV                       | 54.0              | -8.2           | 2.48 V                   | 115                        | 37.9                   | 7.9                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

# 802.11g

|                 |              |                      |              |
|-----------------|--------------|----------------------|--------------|
| CHANNEL         | TX Channel 1 | DETECTOR<br>FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 25GHz |                      | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 2390.00        | 69.5 PK                       | 74.0              | -4.5           | 1.11 H                   | 232                        | 71.9                   | -2.4                           |
| 2                                                   | 2390.00        | 49.6 AV                       | 54.0              | -4.4           | 1.11 H                   | 232                        | 52.0                   | -2.4                           |
| 3                                                   | *2412.00       | 106.4 PK                      |                   |                | 1.11 H                   | 232                        | 108.7                  | -2.3                           |
| 4                                                   | *2412.00       | 96.0 AV                       |                   |                | 1.11 H                   | 232                        | 98.3                   | -2.3                           |
| 5                                                   | 4824.00        | 39.3 PK                       | 74.0              | -34.7          | 1.22 H                   | 60                         | 37.4                   | 1.9                            |
| 6                                                   | 4824.00        | 28.0 AV                       | 54.0              | -26.0          | 1.22 H                   | 60                         | 26.1                   | 1.9                            |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 2390.00        | 70.3 PK                       | 74.0              | -3.7           | 1.51 V                   | 297                        | 72.7                   | -2.4                           |
| 2                                                   | 2390.00        | 52.9 AV                       | 54.0              | -1.1           | 1.51 V                   | 297                        | 55.3                   | -2.4                           |
| 3                                                   | *2412.00       | 110.9 PK                      |                   |                | 1.51 V                   | 297                        | 113.2                  | -2.3                           |
| 4                                                   | *2412.00       | 99.5 AV                       |                   |                | 1.51 V                   | 297                        | 101.8                  | -2.3                           |
| 5                                                   | 4824.00        | 42.9 PK                       | 74.0              | -31.1          | 1.15 V                   | 109                        | 41.0                   | 1.9                            |
| 6                                                   | 4824.00        | 37.3 AV                       | 54.0              | -16.7          | 1.15 V                   | 109                        | 35.4                   | 1.9                            |

## REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

|                        |              |                              |              |
|------------------------|--------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 6 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                              | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 2390.00        | 56.1 PK                       | 74.0              | -17.9          | 1.08 H                   | 247                        | 58.5                   | -2.4                           |
| 2                                                   | 2390.00        | 41.3 AV                       | 54.0              | -12.7          | 1.08 H                   | 247                        | 43.7                   | -2.4                           |
| 3                                                   | *2437.00       | 108.6 PK                      |                   |                | 1.08 H                   | 247                        | 111.1                  | -2.5                           |
| 4                                                   | *2437.00       | 98.2 AV                       |                   |                | 1.08 H                   | 247                        | 100.7                  | -2.5                           |
| 5                                                   | 2483.50        | 57.8 PK                       | 74.0              | -16.2          | 1.08 H                   | 247                        | 60.4                   | -2.6                           |
| 6                                                   | 2483.50        | 42.5 AV                       | 54.0              | -11.5          | 1.08 H                   | 247                        | 45.1                   | -2.6                           |
| 7                                                   | 4874.00        | 38.9 PK                       | 74.0              | -35.1          | 1.22 H                   | 50                         | 37.0                   | 1.9                            |
| 8                                                   | 4874.00        | 27.8 AV                       | 54.0              | -26.2          | 1.22 H                   | 50                         | 25.9                   | 1.9                            |
| 9                                                   | 7311.00        | 45.2 PK                       | 74.0              | -28.8          | 1.33 H                   | 90                         | 37.4                   | 7.8                            |
| 10                                                  | 7311.00        | 37.3 AV                       | 54.0              | -16.7          | 1.33 H                   | 90                         | 29.5                   | 7.8                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 2390.00        | 57.8 PK                       | 74.0              | -16.2          | 1.54 V                   | 304                        | 60.2                   | -2.4                           |
| 2                                                 | 2390.00        | 43.0 AV                       | 54.0              | -11.0          | 1.54 V                   | 304                        | 45.4                   | -2.4                           |
| 3                                                 | *2437.00       | 112.8 PK                      |                   |                | 1.54 V                   | 304                        | 115.3                  | -2.5                           |
| 4                                                 | *2437.00       | 102.1 AV                      |                   |                | 1.54 V                   | 304                        | 104.6                  | -2.5                           |
| 5                                                 | 2483.50        | 58.0 PK                       | 74.0              | -16.0          | 1.54 V                   | 304                        | 60.6                   | -2.6                           |
| 6                                                 | 2483.50        | 43.4 AV                       | 54.0              | -10.6          | 1.54 V                   | 304                        | 46.0                   | -2.6                           |
| 7                                                 | 4874.00        | 43.2 PK                       | 74.0              | -30.8          | 1.07 V                   | 115                        | 41.3                   | 1.9                            |
| 8                                                 | 4874.00        | 37.6 AV                       | 54.0              | -16.4          | 1.07 V                   | 115                        | 35.7                   | 1.9                            |
| 9                                                 | 7311.00        | 49.7 PK                       | 74.0              | -24.3          | 2.51 V                   | 134                        | 41.9                   | 7.8                            |
| 10                                                | 7311.00        | 45.1 AV                       | 54.0              | -8.9           | 2.51 V                   | 134                        | 37.3                   | 7.8                            |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

|                        |               |                              |              |
|------------------------|---------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 11 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz  |                              | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | *2462.00       | 105.8 PK                      |                   |                | 1.05 H                   | 229                        | 108.3                  | -2.5                           |
| 2                                                   | *2462.00       | 95.4 AV                       |                   |                | 1.05 H                   | 229                        | 97.9                   | -2.5                           |
| 3                                                   | 2483.50        | 68.5 PK                       | 74.0              | -5.5           | 1.05 H                   | 229                        | 71.1                   | -2.6                           |
| 4                                                   | 2483.50        | 49.2 AV                       | 54.0              | -4.8           | 1.05 H                   | 229                        | 51.8                   | -2.6                           |
| 5                                                   | 4924.00        | 38.6 PK                       | 74.0              | -35.4          | 1.31 H                   | 86                         | 36.6                   | 2.0                            |
| 6                                                   | 4924.00        | 27.5 AV                       | 54.0              | -26.5          | 1.31 H                   | 86                         | 25.5                   | 2.0                            |
| 7                                                   | 7386.00        | 45.2 PK                       | 74.0              | -28.8          | 1.16 H                   | 80                         | 37.3                   | 7.9                            |
| 8                                                   | 7386.00        | 37.4 AV                       | 54.0              | -16.6          | 1.16 H                   | 80                         | 29.5                   | 7.9                            |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | *2462.00       | 108.3 PK                      |                   |                | 1.48 V                   | 304                        | 110.8                  | -2.5                           |
| 2                                                   | *2462.00       | 98.2 AV                       |                   |                | 1.48 V                   | 304                        | 100.7                  | -2.5                           |
| 3                                                   | 2483.50        | 69.8 PK                       | 74.0              | -4.2           | 1.48 V                   | 304                        | 72.4                   | -2.6                           |
| 4                                                   | 2483.50        | 52.2 AV                       | 54.0              | -1.8           | 1.48 V                   | 304                        | 54.8                   | -2.6                           |
| 5                                                   | 4924.00        | 42.1 PK                       | 74.0              | -31.9          | 1.19 V                   | 119                        | 40.1                   | 2.0                            |
| 6                                                   | 4924.00        | 36.4 AV                       | 54.0              | -17.6          | 1.19 V                   | 119                        | 34.4                   | 2.0                            |
| 7                                                   | 7386.00        | 48.5 PK                       | 74.0              | -25.5          | 2.52 V                   | 126                        | 40.6                   | 7.9                            |
| 8                                                   | 7386.00        | 44.6 AV                       | 54.0              | -9.4           | 2.52 V                   | 126                        | 36.7                   | 7.9                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

## 802.11n (HT20)

|                        |              |                              |              |
|------------------------|--------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 1 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                              | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 2390.00        | 66.0 PK                       | 74.0              | -8.0           | 1.11 H                   | 232                        | 68.4                   | -2.4                           |
| 2                                                   | 2390.00        | 47.1 AV                       | 54.0              | -6.9           | 1.11 H                   | 232                        | 49.5                   | -2.4                           |
| 3                                                   | *2412.00       | 105.3 PK                      |                   |                | 1.11 H                   | 232                        | 107.6                  | -2.3                           |
| 4                                                   | *2412.00       | 95.5 AV                       |                   |                | 1.11 H                   | 232                        | 97.8                   | -2.3                           |
| 5                                                   | 4824.00        | 38.7 PK                       | 74.0              | -35.3          | 1.25 H                   | 97                         | 36.8                   | 1.9                            |
| 6                                                   | 4824.00        | 27.4 AV                       | 54.0              | -26.6          | 1.25 H                   | 97                         | 25.5                   | 1.9                            |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 2390.00        | 69.2 PK                       | 74.0              | -4.8           | 1.48 V                   | 355                        | 71.6                   | -2.4                           |
| 2                                                   | 2390.00        | 51.8 AV                       | 54.0              | -2.2           | 1.48 V                   | 355                        | 54.2                   | -2.4                           |
| 3                                                   | *2412.00       | 108.5 PK                      |                   |                | 1.48 V                   | 355                        | 110.8                  | -2.3                           |
| 4                                                   | *2412.00       | 98.0 AV                       |                   |                | 1.48 V                   | 355                        | 100.3                  | -2.3                           |
| 5                                                   | 4824.00        | 42.1 PK                       | 74.0              | -31.9          | 1.11 V                   | 88                         | 40.2                   | 1.9                            |
| 6                                                   | 4824.00        | 36.7 AV                       | 54.0              | -17.3          | 1.11 V                   | 88                         | 34.8                   | 1.9                            |

### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

|                        |              |                              |              |
|------------------------|--------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 6 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                              | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 2390.00        | 54.7 PK                       | 74.0              | -19.3          | 1.13 H                   | 225                        | 57.1                   | -2.4                           |
| 2                                                   | 2390.00        | 41.3 AV                       | 54.0              | -12.7          | 1.13 H                   | 225                        | 43.7                   | -2.4                           |
| 3                                                   | *2437.00       | 108.9 PK                      |                   |                | 1.13 H                   | 225                        | 111.4                  | -2.5                           |
| 4                                                   | *2437.00       | 97.6 AV                       |                   |                | 1.13 H                   | 225                        | 100.1                  | -2.5                           |
| 5                                                   | 2483.50        | 58.3 PK                       | 74.0              | -15.7          | 1.13 H                   | 225                        | 60.9                   | -2.6                           |
| 6                                                   | 2483.50        | 43.0 AV                       | 54.0              | -11.0          | 1.13 H                   | 225                        | 45.6                   | -2.6                           |
| 7                                                   | 4874.00        | 38.9 PK                       | 74.0              | -35.1          | 1.20 H                   | 55                         | 37.0                   | 1.9                            |
| 8                                                   | 4874.00        | 28.0 AV                       | 54.0              | -26.0          | 1.20 H                   | 55                         | 26.1                   | 1.9                            |
| 9                                                   | 7311.00        | 46.0 PK                       | 74.0              | -28.0          | 1.36 H                   | 50                         | 38.2                   | 7.8                            |
| 10                                                  | 7311.00        | 38.2 AV                       | 54.0              | -15.8          | 1.36 H                   | 50                         | 30.4                   | 7.8                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 2390.00        | 56.1 PK                       | 74.0              | -17.9          | 1.52 V                   | 310                        | 58.5                   | -2.4                           |
| 2                                                 | 2390.00        | 43.3 AV                       | 54.0              | -10.7          | 1.52 V                   | 310                        | 45.7                   | -2.4                           |
| 3                                                 | *2437.00       | 112.2 PK                      |                   |                | 1.52 V                   | 310                        | 114.7                  | -2.5                           |
| 4                                                 | *2437.00       | 101.4 AV                      |                   |                | 1.52 V                   | 310                        | 103.9                  | -2.5                           |
| 5                                                 | 2483.50        | 59.3 PK                       | 74.0              | -14.7          | 1.52 V                   | 310                        | 61.9                   | -2.6                           |
| 6                                                 | 2483.50        | 44.3 AV                       | 54.0              | -9.7           | 1.52 V                   | 310                        | 46.9                   | -2.6                           |
| 7                                                 | 4874.00        | 42.4 PK                       | 74.0              | -31.6          | 1.02 V                   | 88                         | 40.5                   | 1.9                            |
| 8                                                 | 4874.00        | 36.8 AV                       | 54.0              | -17.2          | 1.02 V                   | 88                         | 34.9                   | 1.9                            |
| 9                                                 | 7311.00        | 50.4 PK                       | 74.0              | -23.6          | 2.55 V                   | 117                        | 42.6                   | 7.8                            |
| 10                                                | 7311.00        | 45.9 AV                       | 54.0              | -8.1           | 2.55 V                   | 117                        | 38.1                   | 7.8                            |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

|                        |               |                              |              |
|------------------------|---------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 11 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz  |                              | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | *2462.00       | 107.8 PK                      |                   |                | 1.09 H                   | 228                        | 110.3                  | -2.5                           |
| 2                                                   | *2462.00       | 97.3 AV                       |                   |                | 1.09 H                   | 228                        | 99.8                   | -2.5                           |
| 3                                                   | 2483.50        | 66.9 PK                       | 74.0              | -7.1           | 1.09 H                   | 228                        | 69.5                   | -2.6                           |
| 4                                                   | 2483.50        | 46.6 AV                       | 54.0              | -7.4           | 1.09 H                   | 228                        | 49.2                   | -2.6                           |
| 5                                                   | 4924.00        | 38.4 PK                       | 74.0              | -35.6          | 1.20 H                   | 95                         | 36.4                   | 2.0                            |
| 6                                                   | 4924.00        | 27.2 AV                       | 54.0              | -26.8          | 1.20 H                   | 95                         | 25.2                   | 2.0                            |
| 7                                                   | 7386.00        | 46.0 PK                       | 74.0              | -28.0          | 1.38 H                   | 62                         | 38.1                   | 7.9                            |
| 8                                                   | 7386.00        | 37.7 AV                       | 54.0              | -16.3          | 1.38 H                   | 62                         | 29.8                   | 7.9                            |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | *2462.00       | 110.3 PK                      |                   |                | 1.47 V                   | 346                        | 112.8                  | -2.5                           |
| 2                                                   | *2462.00       | 99.9 AV                       |                   |                | 1.47 V                   | 346                        | 102.4                  | -2.5                           |
| 3                                                   | 2483.50        | 69.3 PK                       | 74.0              | -4.7           | 1.47 V                   | 346                        | 71.9                   | -2.6                           |
| 4                                                   | 2483.50        | 52.1 AV                       | 54.0              | -1.9           | 1.47 V                   | 346                        | 54.7                   | -2.6                           |
| 5                                                   | 4924.00        | 42.2 PK                       | 74.0              | -31.8          | 1.09 V                   | 97                         | 40.2                   | 2.0                            |
| 6                                                   | 4924.00        | 36.9 AV                       | 54.0              | -17.1          | 1.09 V                   | 97                         | 34.9                   | 2.0                            |
| 7                                                   | 7386.00        | 49.9 PK                       | 74.0              | -24.1          | 2.44 V                   | 122                        | 42.0                   | 7.9                            |
| 8                                                   | 7386.00        | 45.6 AV                       | 54.0              | -8.4           | 2.44 V                   | 122                        | 37.7                   | 7.9                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

# Below 1GHz Data:


## 802.11b

|                 |              |                      |                 |
|-----------------|--------------|----------------------|-----------------|
| CHANNEL         | TX Channel 6 | DETECTOR<br>FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 9kHz ~ 1GHz  |                      |                 |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 31.77          | 22.3 QP                       | 40.0              | -17.7          | 1.00 H                   | 129                        | 32.1                   | -9.8                           |
| 2                                                   | 162.13         | 25.3 QP                       | 43.5              | -18.2          | 1.50 H                   | 263                        | 33.9                   | -8.6                           |
| 3                                                   | 240.10         | 28.7 QP                       | 46.0              | -17.3          | 1.50 H                   | 59                         | 38.0                   | -9.3                           |
| 4                                                   | 479.99         | 35.1 QP                       | 46.0              | -10.9          | 1.50 H                   | 264                        | 37.9                   | -2.8                           |
| 5                                                   | 622.12         | 32.2 QP                       | 46.0              | -13.8          | 1.50 H                   | 152                        | 31.7                   | 0.5                            |
| 6                                                   | 706.97         | 28.7 QP                       | 46.0              | -17.3          | 1.00 H                   | 235                        | 27.0                   | 1.7                            |

### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

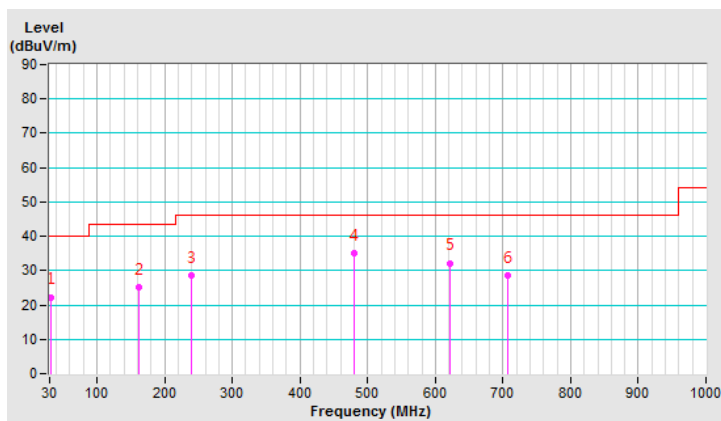


|                        |              |                              |                 |
|------------------------|--------------|------------------------------|-----------------|
| <b>CHANNEL</b>         | TX Channel 6 | <b>DETECTOR<br/>FUNCTION</b> | Quasi-Peak (QP) |
| <b>FREQUENCY RANGE</b> | 9kHz ~ 1GHz  |                              |                 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 32.03          | 31.5 QP                       | 40.0              | -8.5           | 1.00 V                   | 135                        | 41.3                   | -9.8                           |
| 2                                                 | 160.94         | 20.2 QP                       | 43.5              | -23.3          | 1.00 V                   | 326                        | 28.7                   | -8.5                           |
| 3                                                 | 239.98         | 23.2 QP                       | 46.0              | -22.8          | 1.00 V                   | 117                        | 32.5                   | -9.3                           |
| 4                                                 | 480.03         | 32.6 QP                       | 46.0              | -13.4          | 1.50 V                   | 236                        | 35.3                   | -2.7                           |
| 5                                                 | 503.97         | 28.1 QP                       | 46.0              | -17.9          | 1.50 V                   | 336                        | 30.0                   | -1.9                           |
| 6                                                 | 551.99         | 29.8 QP                       | 46.0              | -16.2          | 2.00 V                   | 254                        | 31.2                   | -1.4                           |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

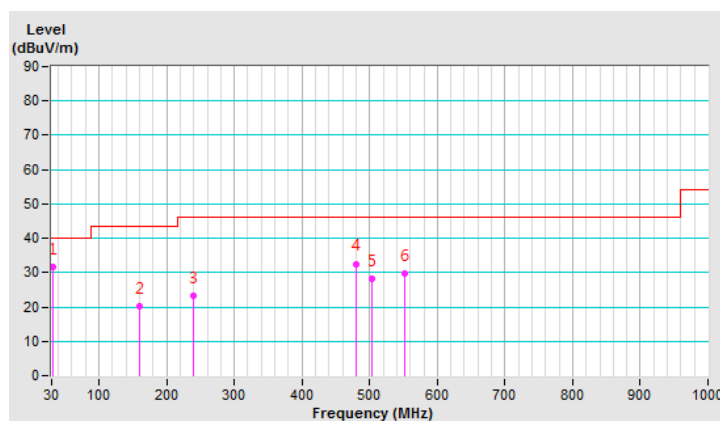


# 802.11g

|                 |              |                      |                 |
|-----------------|--------------|----------------------|-----------------|
| CHANNEL         | TX Channel 6 | DETECTOR<br>FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 9kHz ~ 1GHz  |                      |                 |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 31.79          | 22.2 QP                       | 40.0              | -17.8          | 1.50 H                   | 149                        | 32.0                   | -9.8                           |
| 2                                                   | 162.15         | 25.5 QP                       | 43.5              | -18.0          | 1.50 H                   | 233                        | 34.1                   | -8.6                           |
| 3                                                   | 239.90         | 28.6 QP                       | 46.0              | -17.4          | 1.00 H                   | 9                          | 37.9                   | -9.3                           |
| 4                                                   | 480.01         | 35.4 QP                       | 46.0              | -10.6          | 1.00 H                   | 324                        | 38.1                   | -2.7                           |
| 5                                                   | 622.14         | 32.4 QP                       | 46.0              | -13.6          | 1.50 H                   | 142                        | 31.9                   | 0.5                            |
| 6                                                   | 706.95         | 28.6 QP                       | 46.0              | -17.4          | 1.50 H                   | 205                        | 26.9                   | 1.7                            |

## REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

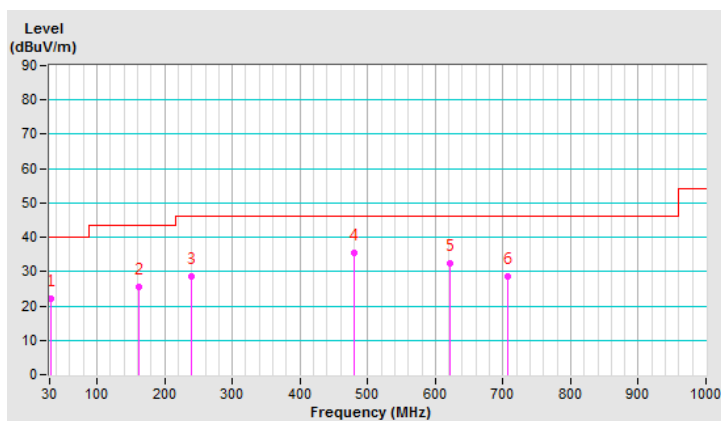


|                        |              |                              |                 |
|------------------------|--------------|------------------------------|-----------------|
| <b>CHANNEL</b>         | TX Channel 6 | <b>DETECTOR<br/>FUNCTION</b> | Quasi-Peak (QP) |
| <b>FREQUENCY RANGE</b> | 9kHz ~ 1GHz  |                              |                 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 32.02          | 31.3 QP                       | 40.0              | -8.7           | 1.50 V                   | 265                        | 41.1                   | -9.8                           |
| 2                                                 | 160.92         | 20.5 QP                       | 43.5              | -23.0          | 1.00 V                   | 357                        | 29.0                   | -8.5                           |
| 3                                                 | 240.00         | 23.4 QP                       | 46.0              | -22.6          | 1.00 V                   | 147                        | 32.7                   | -9.3                           |
| 4                                                 | 480.05         | 32.5 QP                       | 46.0              | -13.5          | 1.50 V                   | 26                         | 35.2                   | -2.7                           |
| 5                                                 | 503.94         | 28.0 QP                       | 46.0              | -18.0          | 1.00 V                   | 357                        | 29.9                   | -1.9                           |
| 6                                                 | 552.01         | 29.4 QP                       | 46.0              | -16.6          | 1.00 V                   | 34                         | 30.8                   | -1.4                           |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

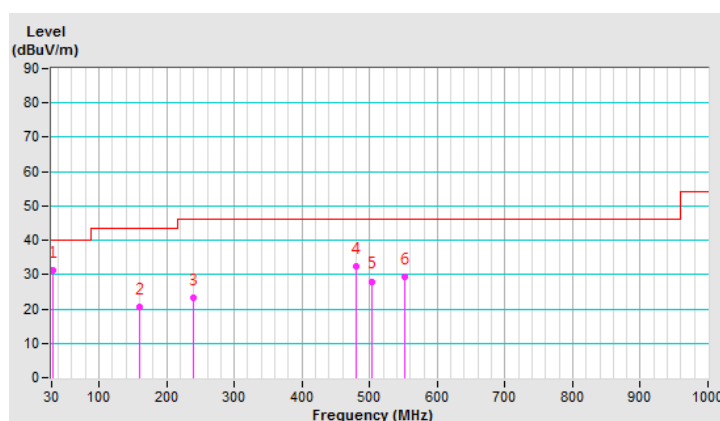


# 802.11n (HT20)

|                 |              |                      |                 |
|-----------------|--------------|----------------------|-----------------|
| CHANNEL         | TX Channel 6 | DETECTOR<br>FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 9kHz ~ 1GHz  |                      |                 |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 31.81          | 22.1 QP                       | 40.0              | -17.9          | 1.00 H                   | 109                        | 31.9                   | -9.8                           |
| 2                                                   | 162.17         | 25.7 QP                       | 43.5              | -17.8          | 1.50 H                   | 33                         | 34.3                   | -8.6                           |
| 3                                                   | 239.92         | 28.3 QP                       | 46.0              | -17.7          | 1.50 H                   | 19                         | 37.6                   | -9.3                           |
| 4                                                   | 479.99         | 35.1 QP                       | 46.0              | -10.9          | 1.50 H                   | 24                         | 37.9                   | -2.8                           |
| 5                                                   | 622.12         | 32.2 QP                       | 46.0              | -13.8          | 1.50 H                   | 122                        | 31.7                   | 0.5                            |
| 6                                                   | 706.92         | 28.4 QP                       | 46.0              | -17.6          | 1.00 H                   | 185                        | 26.7                   | 1.7                            |

## REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

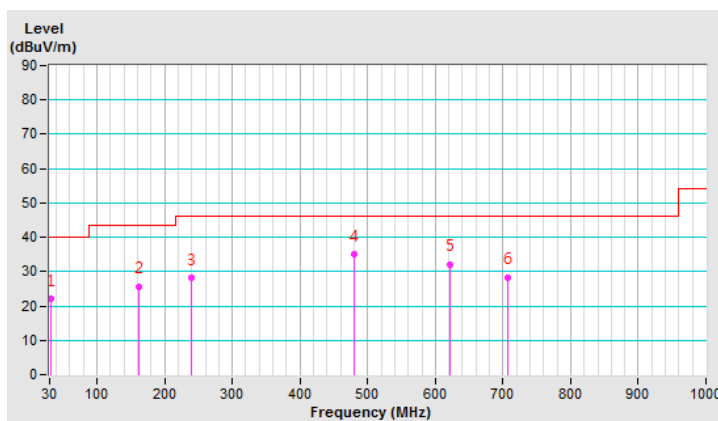


|                        |              |                              |                 |
|------------------------|--------------|------------------------------|-----------------|
| <b>CHANNEL</b>         | TX Channel 6 | <b>DETECTOR<br/>FUNCTION</b> | Quasi-Peak (QP) |
| <b>FREQUENCY RANGE</b> | 9kHz ~ 1GHz  |                              |                 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 32.00          | 31.1 QP                       | 40.0              | -8.9           | 1.00 V                   | 295                        | 40.9                   | -9.8                           |
| 2                                                 | 160.91         | 20.7 QP                       | 43.5              | -22.8          | 1.50 V                   | 327                        | 29.2                   | -8.5                           |
| 3                                                 | 240.02         | 23.3 QP                       | 46.0              | -22.7          | 1.00 V                   | 37                         | 32.6                   | -9.3                           |
| 4                                                 | 480.07         | 32.7 QP                       | 46.0              | -13.3          | 1.50 V                   | 336                        | 35.4                   | -2.7                           |
| 5                                                 | 503.96         | 28.2 QP                       | 46.0              | -17.8          | 1.50 V                   | 337                        | 30.1                   | -1.9                           |
| 6                                                 | 552.00         | 29.2 QP                       | 46.0              | -16.8          | 1.00 V                   | 24                         | 30.6                   | -1.4                           |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

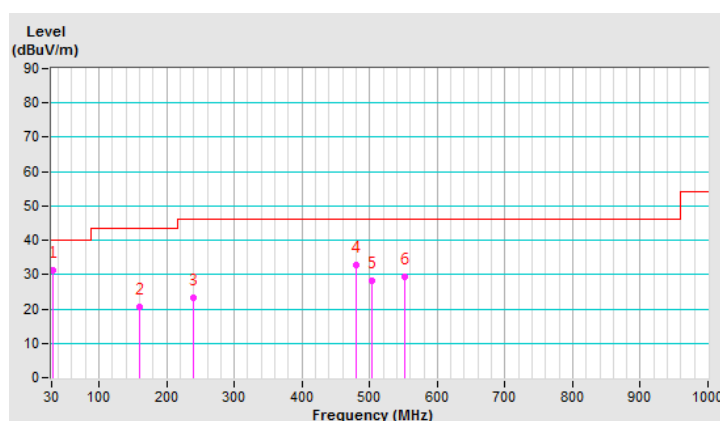


## 4.2 Conducted Output Power Measurement

### 4.2.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

### 4.2.2 Test Setup



### 4.2.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.2.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

### 4.2.5 Deviation from Test Standard

No deviation.

### 4.2.6 EUT Operating Conditions

Same as Item 4.3.6.

#### 4.2.7 Test Results

##### FOR PEAK POWER

###### 802.11b

| Channel | Frequency (MHz) | Peak Power (mW) | Peak Power (dBm) | Limit (dBm) | Pass/Fail |
|---------|-----------------|-----------------|------------------|-------------|-----------|
| 1       | 2412            | 143.219         | 21.56            | 30.00       | Pass      |
| 6       | 2437            | 151.705         | 21.81            | 30.00       | Pass      |
| 11      | 2462            | 159.221         | 22.02            | 30.00       | Pass      |

###### 802.11g

| Channel | Frequency (MHz) | Peak Power (mW) | Peak Power (dBm) | Limit (dBm) | Pass/Fail |
|---------|-----------------|-----------------|------------------|-------------|-----------|
| 1       | 2412            | 163.305         | 22.13            | 30.00       | Pass      |
| 6       | 2437            | 194.089         | 22.88            | 30.00       | Pass      |
| 11      | 2462            | 179.473         | 22.54            | 30.00       | Pass      |

###### 802.11n (HT20)

| Channel | Frequency (MHz) | Peak Power (mW) | Peak Power (dBm) | Limit (dBm) | Pass/Fail |
|---------|-----------------|-----------------|------------------|-------------|-----------|
| 1       | 2412            | 160.694         | 22.06            | 30.00       | Pass      |
| 6       | 2437            | 182.39          | 22.61            | 30.00       | Pass      |
| 11      | 2462            | 160.325         | 22.05            | 30.00       | Pass      |

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---