



**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

| Table of Contents                                            | Page      |
|--------------------------------------------------------------|-----------|
| <b>1 . CERTIFICATION</b>                                     | <b>6</b>  |
| <b>2 . SUMMARY OF TEST RESULTS</b>                           | <b>7</b>  |
| 2.1 TEST FACILITY                                            | 8         |
| 2.2 MEASUREMENT UNCERTAINTY                                  | 8         |
| <b>3 . GENERAL INFORMATION</b>                               | <b>9</b>  |
| 3.1 GENERAL DESCRIPTION OF EUT                               | 9         |
| 3.2 DESCRIPTION OF TEST MODES                                | 13        |
| 3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING             | 15        |
| 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 20        |
| 3.5 DESCRIPTION OF SUPPORT UNITS                             | 20        |
| <b>4 . EMC EMISSION TEST</b>                                 | <b>21</b> |
| 4.1 CONDUCTED EMISSION MEASUREMENT                           | 21        |
| 4.1.1 POWER LINE CONDUCTED EMISSION                          | 21        |
| 4.1.2 TEST PROCEDURE                                         | 21        |
| 4.1.3 DEVIATION FROM TEST STANDARD                           | 21        |
| 4.1.4 TEST SETUP                                             | 22        |
| 4.1.5 EUT OPERATING CONDITIONS                               | 22        |
| 4.1.6 EUT TEST CONDITIONS                                    | 22        |
| 4.1.7 TEST RESULTS                                           | 22        |
| 4.2 RADIATED EMISSION MEASUREMENT                            | 23        |
| 4.2.1 RADIATED EMISSION LIMITS                               | 23        |
| 4.2.2 TEST PROCEDURE                                         | 24        |
| 4.2.3 DEVIATION FROM TEST STANDARD                           | 24        |
| 4.2.4 TEST SETUP                                             | 24        |
| 4.2.5 EUT OPERATING CONDITIONS                               | 25        |
| 4.2.6 EUT TEST CONDITIONS                                    | 25        |
| 4.2.7 TEST RESULTS (9K TO 30MHz)                             | 26        |
| 4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)                  | 26        |
| 4.2.9 TEST RESULTS (ABOVE 1000 MHz)                          | 26        |
| <b>5 . 26dB SPECTRUM BANDWIDTH</b>                           | <b>27</b> |
| 5.1 APPLIED PROCEDURES / LIMIT                               | 27        |
| 5.1.1 TEST PROCEDURE                                         | 27        |
| 5.1.2 DEVIATION FROM STANDARD                                | 27        |
| 5.1.3 TEST SETUP                                             | 27        |
| 5.1.4 EUT OPERATION CONDITIONS                               | 27        |
| 5.1.5 EUT TEST CONDITIONS                                    | 28        |
| 5.1.6 TEST RESULTS                                           | 28        |
| <b>6 . MAXIMUM CONDUCTED OUTPUT POWER</b>                    | <b>29</b> |

| <b>Table of Contents</b>                                 | <b>Page</b> |
|----------------------------------------------------------|-------------|
| <b>6.1 APPLIED PROCEDURES / LIMIT</b>                    | <b>29</b>   |
| 6.1.1 TEST PROCEDURE                                     | 29          |
| 6.1.2 DEVIATION FROM STANDARD                            | 30          |
| 6.1.3 TEST SETUP                                         | 30          |
| 6.1.4 EUT OPERATION CONDITIONS                           | 30          |
| 6.1.5 EUT TEST CONDITIONS                                | 30          |
| 6.1.6 TEST RESULTS                                       | 30          |
| <b>7 . POWER SPECTRAL DENSITY TEST</b>                   | <b>31</b>   |
| 7.1 APPLIED PROCEDURES / LIMIT                           | 31          |
| 8.1.1 TEST PROCEDURE                                     | 31          |
| 7.1.1 DEVIATION FROM STANDARD                            | 32          |
| 7.1.2 TEST SETUP                                         | 32          |
| 7.1.3 EUT OPERATION CONDITIONS                           | 32          |
| 7.1.4 EUT TEST CONDITIONS                                | 32          |
| 7.1.5 TEST RESULTS                                       | 32          |
| <b>8 . FREQUENCY STABILITY MEASUREMENT</b>               | <b>33</b>   |
| 8.1 APPLIED PROCEDURES / LIMIT                           | 33          |
| 8.1.1 TEST PROCEDURE                                     | 33          |
| 8.1.2 DEVIATION FROM STANDARD                            | 33          |
| 8.1.3 TEST SETUP                                         | 34          |
| 8.1.4 EUT OPERATION CONDITIONS                           | 34          |
| 8.1.5 EUT TEST CONDITIONS                                | 34          |
| 8.1.6 TEST RESULTS                                       | 34          |
| <b>9 . MEASUREMENT INSTRUMENTS LIST</b>                  | <b>35</b>   |
| <b>10 . EUT TEST PHOTOS</b>                              | <b>37</b>   |
| <b>APPENDIX A - CONDUCTED EMISSION</b>                   | <b>41</b>   |
| <b>APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)</b>    | <b>44</b>   |
| <b>APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)</b> | <b>49</b>   |
| <b>APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)</b>    | <b>98</b>   |
| <b>APPENDIX E - BANDWIDTH</b>                            | <b>583</b>  |
| <b>APPENDIX F - MAXIMUM OUTPUT POWER</b>                 | <b>690</b>  |
| <b>APPENDIX G - POWER SPECTRAL DENSITY</b>               | <b>719</b>  |
| <b>APPENDIX H - FREQUENCY STABILITY</b>                  | <b>810</b>  |

### REPORT ISSUED HISTORY

| Issued No.          | Description              | Issued Date   |
|---------------------|--------------------------|---------------|
| BTL-FCCP-2-1801C053 | Original Issue.          | Apr. 25, 2018 |
| MDG1805003          | Updated the KDB Version. | May 23, 2018  |

## 1. CERTIFICATION

Equipment : Kasa Cam Outdoor  
Brand Name : tp-link  
Test Model : KC200  
Series Model : N/A  
Applicant : TP-Link Technologies Co., Ltd.  
Manufacturer : TP-Link Technologies Co., Ltd.  
Address : Building 24(floors1,3,4,5) and 28(floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China  
Factory : TP-Link Technologies Co., Ltd.  
Address : Building 24(floors1,3,4,5) and 28(floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China  
Date of Test : Jan. 09, 2018 ~ Mar. 23, 2018  
Test Sample : Engineering Sample NO.: Conducted: D180100356, Radiated: D180100357  
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-2-1801C053) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| FCC Part15, Subpart E(15.407) |                                   |          |        |
|-------------------------------|-----------------------------------|----------|--------|
| Standard(s)<br>Section        | Test Item                         | Judgment | Remark |
| 15.207                        | AC Power Line Conducted Emissions | PASS     |        |
| 15.407(a)                     | 26dB Spectrum Bandwidth           | PASS     |        |
| 15.407(a)                     | Maximum Conducted Output Power    | PASS     |        |
| 15.407(a)                     | Power Spectral Density            | PASS     |        |
| 15.407(a)                     | Radiated Emissions                | PASS     |        |
| 15.407(b)                     | Band Edge Emissions               | PASS     |        |
| 15.407(g)                     | Frequency Stability               | PASS     |        |
| 15.203                        | Antenna Requirements              | PASS     |        |

### NOTE:

(1)" N/A" denotes test is not applicable in this test report.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 854385

BTL's designation number for FCC: CN5020

## 2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty figures shall be calculated according the methods described in the ETSI TR 100 028 and shall correspond to an expansion factor (coverage factor)  $k=1.96$  or  $k=2$ (which provide confidence levels of respectively 90% and 95.45% in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)). Measurement Uncertainty for a Level of Confidence of 95 %,  $U=2 \times U_c(y)$ .

The BTL measurement uncertainty as below table:

### A. Conducted Measurement:

| Test Site | Method | Measurement Frequency Range | U, (dB) |
|-----------|--------|-----------------------------|---------|
| DG-C02    | CISPR  | 150 KHz ~ 30MHz             | 2.32    |

### B. Radiated Measurement:

| Test Site | Method | Measurement Frequency Range | Ant. H / V | U, (dB) |
|-----------|--------|-----------------------------|------------|---------|
| DG-CB03   | CISPR  | 9kHz~30MHz                  | V          | 3.79    |
|           |        | 9kHz~30MHz                  | H          | 3.57    |
|           |        | 30MHz ~ 200MHz              | V          | 3.82    |
|           |        | 30MHz ~ 200MHz              | H          | 3.60    |
|           |        | 200MHz ~ 1,000MHz           | V          | 3.86    |
|           |        | 200MHz ~ 1,000MHz           | H          | 3.94    |
|           |        | 1GHz~18GHz                  | V          | 3.12    |
|           |        | 1GHz~18GHz                  | H          | 3.68    |
|           |        | 18GHz~40GHz                 | V          | 4.15    |
|           |        | 18GHz~40GHz                 | H          | 4.14    |

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                     |                                      |                                                                                                                                                             |
|---------------------|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment           | Kasa Cam Outdoor                     |                                                                                                                                                             |
| Brand Name          | tp-link                              |                                                                                                                                                             |
| Test Model          | KC200                                |                                                                                                                                                             |
| Series Model        | N/A                                  |                                                                                                                                                             |
| Model Difference    | N/A                                  |                                                                                                                                                             |
| Product Description | Operation Frequency                  | UNII-1: 5150-5250MHz<br>UNII-2A: 5250-5350MHz<br>UNII-2C: 5470-5725MHz<br>UNII-3: 5725-5850MHz                                                              |
|                     | Modulation Type                      | OFDM                                                                                                                                                        |
|                     | Bit Rate of Transmitter              | 300 Mbps                                                                                                                                                    |
| Output Power        | Output Power (Max.)for UNII-1_ANT 1  | 802.11a: 18.67dBm<br>802.11n (20M): 18.65dBm<br>802.11n (40M): 18.71dBm<br>802.11ac (20M): 18.81dBm<br>802.11ac (40M): 18.58dBm<br>802.11ac (80M): 15.87dBm |
|                     | Output Power (Max.)for UNII-2A_ANT 1 | 802.11a: 18.53dBm<br>802.11n (20M): 18.54dBm<br>802.11n (40M): 18.65dBm<br>802.11ac (20M): 18.73dBm<br>802.11ac (40M): 18.56dBm<br>802.11ac (80M): 15.34dBm |
|                     | Output Power (Max.)for UNII-2C_ANT 1 | 802.11a: 18.71dBm<br>802.11n (20M): 18.55dBm<br>802.11n (40M): 18.83dBm<br>802.11ac (20M): 18.49dBm<br>802.11ac (40M): 18.86dBm<br>802.11ac (80M): 18.62dBm |
|                     | Output Power (Max.)for UNII-3_ANT 1  | 802.11a: 18.72dBm<br>802.11n (20M): 18.54dBm<br>802.11n (40M): 18.83dBm<br>802.11ac (20M): 18.68dBm<br>802.11ac (40M): 18.67dBm<br>802.11ac (80M): 18.58dBm |

|              |                                                                           |                                                                                                                                                             |
|--------------|---------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Output Power | Output Power (Max.)for UNII-1_ANT 2                                       | 802.11a: 18.73dBm<br>802.11n (20M): 18.81dBm<br>802.11n (40M): 18.88dBm<br>802.11ac (20M): 18.78dBm<br>802.11ac (40M): 18.65dBm<br>802.11ac (80M): 18.88dBm |
|              | Output Power (Max.)for UNII-2A_ANT 2                                      | 802.11a: 18.82dBm<br>802.11n (20M): 18.71dBm<br>802.11n (40M): 18.86dBm<br>802.11ac (20M): 18.86dBm<br>802.11ac (40M): 18.82dBm<br>802.11ac (80M): 18.78dBm |
|              | Output Power (Max.)for UNII-2C_ANT 2                                      | 802.11a: 18.80dBm<br>802.11n (20M): 18.67dBm<br>802.11n (40M): 18.71dBm<br>802.11ac (20M): 18.66dBm<br>802.11ac (40M): 18.83dBm<br>802.11ac (80M): 18.87dBm |
|              | Output Power (Max.)for UNII-3_ANT 2                                       | 802.11a: 18.76dBm<br>802.11n (20M): 18.90dBm<br>802.11n (40M): 18.86dBm<br>802.11ac (20M): 18.84dBm<br>802.11ac (40M): 18.86dBm<br>802.11ac (80M): 18.64dBm |
| Power Source | DC Voltage supplied from AC/DC adapter.<br>Model: DSA-5PFU1-05 FCA 050100 |                                                                                                                                                             |
| Power Rating | I/P: 100-240V~50/60Hz 0.2A    O/P: +5V---1A                               |                                                                                                                                                             |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

| 802.11a<br>802.11n 20MHz<br>802.11ac 20MHz |                 | 802.11n 40MHz<br>802.11ac 40MHz |                 | 802.11ac 80MHz |                 |
|--------------------------------------------|-----------------|---------------------------------|-----------------|----------------|-----------------|
| UNII-1                                     |                 | UNII-1                          |                 | UNII-1         |                 |
| Channel                                    | Frequency (MHz) | Channel                         | Frequency (MHz) | Channel        | Frequency (MHz) |
| 36                                         | 5180            | 38                              | 5190            | 42             | 5210            |
| 40                                         | 5200            | 46                              | 5230            |                |                 |
| 44                                         | 5220            |                                 |                 |                |                 |
| 48                                         | 5240            |                                 |                 |                |                 |

| 802.11a<br>802.11n 20MHz<br>802.11ac 20MHz |                 | 802.11n 40MHz<br>802.11ac 40MHz |                 | 802.11ac 80MHz |                 |
|--------------------------------------------|-----------------|---------------------------------|-----------------|----------------|-----------------|
| UNII-2A                                    |                 | UNII-2A                         |                 | UNII-2A        |                 |
| Channel                                    | Frequency (MHz) | Channel                         | Frequency (MHz) | Channel        | Frequency (MHz) |
| 52                                         | 5260            | 54                              | 5270            | 58             | 5290            |
| 56                                         | 5280            | 62                              | 5310            |                |                 |
| 60                                         | 5300            |                                 |                 |                |                 |
| 64                                         | 5320            |                                 |                 |                |                 |

| 802.11a<br>802.11n 20MHz<br>802.11ac 20MHz |                 | 802.11n 40MHz<br>802.11ac 40MHz |                 | 802.11ac 80MHz |                 |
|--------------------------------------------|-----------------|---------------------------------|-----------------|----------------|-----------------|
| UNII-2C                                    |                 | UNII-2C                         |                 | UNII-2C        |                 |
| Channel                                    | Frequency (MHz) | Channel                         | Frequency (MHz) | Channel        | Frequency (MHz) |
| 100                                        | 5500            | 102                             | 5510            | 106            | 5530            |
| 104                                        | 5520            | 110                             | 5550            | 122            | 5610            |
| 108                                        | 5540            | 118                             | 5590            |                |                 |
| 112                                        | 5560            | 126                             | 5630            |                |                 |
| 116                                        | 5580            | 134                             | 5670            |                |                 |
| 132                                        | 5660            |                                 |                 |                |                 |
| 136                                        | 5680            |                                 |                 |                |                 |
| 140                                        | 5700            |                                 |                 |                |                 |

| 802.11a<br>802.11n 20MHz<br>802.11ac 20MHz |                 | 802.11n 40MHz<br>802.11ac 40MHz |                 | 802.11ac 80MHz |                 |
|--------------------------------------------|-----------------|---------------------------------|-----------------|----------------|-----------------|
| UNII-3                                     |                 | UNII-3                          |                 | UNII-3         |                 |
| Channel                                    | Frequency (MHz) | Channel                         | Frequency (MHz) | Channel        | Frequency (MHz) |
| 149                                        | 5745            | 151                             | 5755            | 155            | 5775            |
| 153                                        | 5765            | 159                             | 5795            |                |                 |
| 157                                        | 5785            |                                 |                 |                |                 |
| 161                                        | 5805            |                                 |                 |                |                 |
| 165                                        | 5825            |                                 |                 |                |                 |

### 3. Antenna Specification:

| Ant. | Manufacturer | Model Name | Antenna Type | Connector | Gain (dBi) | Note      |
|------|--------------|------------|--------------|-----------|------------|-----------|
| 1    | N/A          | N/A        | PIFA         | N/A       | 3.09       | 5150-5250 |
| 2    | N/A          | N/A        | PIFA         | N/A       | 2.73       |           |
| 1    | N/A          | N/A        | PIFA         | N/A       | 2.90       | 5250-5350 |
| 2    | N/A          | N/A        | PIFA         | N/A       | 3.54       |           |
| 1    | N/A          | N/A        | PIFA         | N/A       | 2.14       | 5470-5725 |
| 2    | N/A          | N/A        | PIFA         | N/A       | 3.38       |           |
| 1    | N/A          | N/A        | PIFA         | N/A       | 3.77       | 5725-5850 |
| 2    | N/A          | N/A        | PIFA         | N/A       | 2.91       |           |

**Note:**

Smart antenna system with two transmit/receive chains, but operating in a mode where only one transmit/receive chain is used.

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description                                  |
|--------------|----------------------------------------------|
| Mode 1       | TX A Mode / CH36, CH40, CH48 (UNII-1)        |
| Mode 2       | TX N20 Mode / CH36, CH40, CH48 (UNII-1)      |
| Mode 3       | TX N40 Mode / CH38, CH46 (UNII-1)            |
| Mode 4       | TX AC20 Mode / CH36, CH40, CH48 (UNII-1)     |
| Mode 5       | TX AC40 Mode / CH38, CH46 (UNII-1)           |
| Mode 6       | TX AC80 Mode / CH42 (UNII-1)                 |
| Mode 7       | TX A Mode / CH52, CH60, CH64 (UNII-2A)       |
| Mode 8       | TX N20 Mode / CH52, CH60, CH64 (UNII-2A)     |
| Mode 9       | TX N40 Mode / CH54, CH62 (UNII-2A)           |
| Mode 10      | TX AC20 Mode / CH52, CH60, CH64 (UNII-2A)    |
| Mode 11      | TX AC40 Mode / CH54, CH62 (UNII-2A)          |
| Mode 12      | TX AC80 Mode / CH58 (UNII-2A)                |
| Mode 13      | TX A Mode / CH100, CH116, CH140 (UNII-2C)    |
| Mode 14      | TX N20 Mode / CH100, CH116, CH140 (UNII-2C)  |
| Mode 15      | TX N40 Mode / CH102, CH110, CH134 (UNII-2C)  |
| Mode 16      | TX AC20 Mode / CH100, CH116, CH140 (UNII-2C) |
| Mode 17      | TX AC40 Mode / CH102, CH110, CH134 (UNII-2C) |
| Mode 18      | TX AC80 Mode / CH106, CH122 (UNII-2C)        |
| Mode 19      | TX A Mode / CH149,CH157,CH165 (UNII-3)       |
| Mode 20      | TX N20 Mode / CH149,CH157,CH165 (UNII-3)     |
| Mode 21      | TX N40 Mode / CH151,CH159 (UNII-3)           |
| Mode 22      | TX AC20 Mode / CH149,CH157,CH165 (UNII-3)    |
| Mode 23      | TX AC40 Mode / CH151,CH159 (UNII-3)          |
| Mode 24      | TX AC80 Mode / CH155 (UNII-3)                |
| Mode 25      | TX Mode                                      |

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

| For Conducted Test |             |
|--------------------|-------------|
| Final Test Mode    | Description |
| Mode 25            | TX Mode     |

| For Radiated Test |                                              |
|-------------------|----------------------------------------------|
| Final Test Mode   | Description                                  |
| Mode 1            | TX A Mode / CH36, CH40, CH48 (UNII-1)        |
| Mode 2            | TX N20 Mode / CH36, CH40, CH48 (UNII-1)      |
| Mode 3            | TX N40 Mode / CH38, CH46 (UNII-1)            |
| Mode 4            | TX AC20 Mode / CH36, CH40, CH48 (UNII-1)     |
| Mode 5            | TX AC40 Mode / CH38, CH46 (UNII-1)           |
| Mode 6            | TX AC80 Mode / CH42 (UNII-1)                 |
| Mode 7            | TX A Mode / CH52, CH60, CH64 (UNII-2A)       |
| Mode 8            | TX N20 Mode / CH52, CH60, CH64 (UNII-2A)     |
| Mode 9            | TX N40 Mode / CH54, CH62 (UNII-2A)           |
| Mode 10           | TX AC20 Mode / CH52, CH60, CH64 (UNII-2A)    |
| Mode 11           | TX AC40 Mode / CH54, CH62 (UNII-2A)          |
| Mode 12           | TX AC80 Mode / CH58 (UNII-2A)                |
| Mode 13           | TX A Mode / CH100, CH116, CH140 (UNII-2C)    |
| Mode 14           | TX N20 Mode / CH100, CH116, CH140 (UNII-2C)  |
| Mode 15           | TX N40 Mode / CH102, CH110, CH134 (UNII-2C)  |
| Mode 16           | TX AC20 Mode / CH100, CH116, CH140 (UNII-2C) |
| Mode 17           | TX AC40 Mode / CH102, CH110, CH134 (UNII-2C) |
| Mode 18           | TX AC80 Mode / CH106, CH122 (UNII-2C)        |
| Mode 19           | TX A Mode / CH149,CH157,CH165 (UNII-3)       |
| Mode 20           | TX N20 Mode / CH149,CH157,CH165 (UNII-3)     |
| Mode 21           | TX N40 Mode / CH151,CH159 (UNII-3)           |
| Mode 22           | TX AC20 Mode / CH149,CH157,CH165 (UNII-3)    |
| Mode 23           | TX AC40 Mode / CH151,CH159 (UNII-3)          |
| Mode 24           | TX AC80 Mode / CH155 (UNII-3)                |

**Note:**

- (1) For radiated below 1GHz test, the 802.11a mode is found to be the worst case and recorded.
- (2) For radiated, it was pre-tested on the positioned of each 2 axis. The worst case was found positioned on Normal-plane. Therefore only the test data of this Normal-plane was used for radiated emission measurement test.

### 3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product

| UNII-1_ANT 1          |         |      |      |
|-----------------------|---------|------|------|
| Test Software Version | MT76xxU |      |      |
| Frequency (MHz)       | 5180    | 5200 | 5240 |
| A Mode                | 10      | 10   | 10   |
| Frequency (MHz)       | 5180    | 5200 | 5240 |
| N20 Mode              | 10      | 10   | 10   |
| Frequency (MHz)       | 5190    | 5230 |      |
| N40 Mode              | 0E      | 11   |      |

| UNII-2A_ANT 1         |         |      |      |
|-----------------------|---------|------|------|
| Test Software Version | MT76xxU |      |      |
| Frequency (MHz)       | 5260    | 5300 | 5320 |
| A Mode                | 10      | 10   | 10   |
| Frequency (MHz)       | 5260    | 5300 | 5320 |
| N20 Mode              | 10      | 11   | 11   |
| Frequency (MHz)       | 5270    | 5310 |      |
| N40 Mode              | 11      | 0E   |      |

| UNII-2C_ANT 1         |         |      |      |
|-----------------------|---------|------|------|
| Test Software Version | MT76xxU |      |      |
| Frequency (MHz)       | 5500    | 5580 | 5700 |
| A Mode                | 11      | 12   | 15   |
| Frequency (MHz)       | 5500    | 5580 | 5700 |
| N20 Mode              | 11      | 12   | 13   |
| Frequency (MHz)       | 5510    | 5550 | 5670 |
| N40 Mode              | 12      | 13   | 16   |

| UNII-3_ANT 1          |         |      |      |
|-----------------------|---------|------|------|
| Test Software Version | MT76xxU |      |      |
| Frequency (MHz)       | 5745    | 5785 | 5825 |
| A Mode                | 17      | 18   | 1A   |
| Frequency (MHz)       | 5745    | 5785 | 5825 |
| N20 Mode              | 17      | 18   | 1A   |
| Frequency (MHz)       | 5755    | 5795 |      |
| N40 Mode              | 18      | 1A   |      |

| UNII-1_ANT 1          |         |      |      |
|-----------------------|---------|------|------|
| Test Software Version | MT76xxU |      |      |
| Frequency (MHz)       | 5180    | 5200 | 5240 |
| AC20 Mode             | 11      | 11   | 11   |
| Frequency (MHz)       | 5190    | 5230 |      |
| AC40 Mode             | 0E      | 11   |      |
| Frequency (MHz)       | 5210    |      |      |
| AC80 Mode             | 0A      |      |      |

| UNII-2A_ANT 1         |         |      |      |
|-----------------------|---------|------|------|
| Test Software Version | MT76xxU |      |      |
| Frequency (MHz)       | 5260    | 5300 | 5320 |
| AC20 Mode             | 11      | 12   | 12   |
| Frequency (MHz)       | 5270    | 5310 |      |
| AC40 Mode             | 11      | 0E   |      |
| Frequency (MHz)       | 5290    |      |      |
| AC80 Mode             | 0A      |      |      |

| UNII-2C_ANT 1         |         |      |      |
|-----------------------|---------|------|------|
| Test Software Version | MT76xxU |      |      |
| Frequency (MHz)       | 5500    | 5580 | 5700 |
| AC20 Mode             | 11      | 12   | 14   |
| Frequency (MHz)       | 5510    | 5550 | 5670 |
| AC40 Mode             | 12      | 13   | 16   |
| Frequency (MHz)       | 5530    | 5610 |      |
| AC80 Mod              | 0D      | 14   |      |

| UNII-3_ANT 1          |         |      |      |
|-----------------------|---------|------|------|
| Test Software Version | MT76xxU |      |      |
| Frequency (MHz)       | 5745    | 5785 | 5825 |
| AC20 Mode             | 17      | 19   | 1B   |
| Frequency (MHz)       | 5755    | 5795 |      |
| AC40 Mode             | 18      | 1C   |      |
| Frequency (MHz)       | 5775    |      |      |
| AC80 Mode             | 18      |      |      |

| UNII-1_ANT 2          |         |      |      |
|-----------------------|---------|------|------|
| Test Software Version | MT76xxU |      |      |
| Frequency (MHz)       | 5180    | 5200 | 5240 |
| A Mode                | 10      | 10   | 10   |
| Frequency (MHz)       | 5180    | 5200 | 5240 |
| N20 Mode              | 10      | 0F   | 0F   |
| Frequency (MHz)       | 5190    | 5230 |      |
| N40 Mode              | 10      | 10   |      |

| UNII-2A_ANT 2         |         |      |      |
|-----------------------|---------|------|------|
| Test Software Version | MT76xxU |      |      |
| Frequency (MHz)       | 5260    | 5300 | 5320 |
| A Mode                | 10      | 10   | 10   |
| Frequency (MHz)       | 5260    | 5300 | 5320 |
| N20 Mode              | 0F      | 0F   | 0F   |
| Frequency (MHz)       | 5270    | 5310 |      |
| N40 Mode              | 10      | 10   |      |

| UNII-2C_ANT 2         |         |      |      |
|-----------------------|---------|------|------|
| Test Software Version | MT76xxU |      |      |
| Frequency (MHz)       | 5500    | 5580 | 5700 |
| A Mode                | 10      | 12   | 12   |
| Frequency (MHz)       | 5500    | 5580 | 5700 |
| N20 Mode              | 10      | 11   | 12   |
| Frequency (MHz)       | 5510    | 5550 | 5670 |
| N40 Mode              | 10      | 11   | 14   |

| UNII-3_ANT 2          |         |      |      |
|-----------------------|---------|------|------|
| Test Software Version | MT76xxU |      |      |
| Frequency (MHz)       | 5745    | 5785 | 5825 |
| A Mode                | 16      | 17   | 18   |
| Frequency (MHz)       | 5745    | 5785 | 5825 |
| N20 Mode              | 16      | 17   | 19   |
| Frequency (MHz)       | 5755    | 5795 |      |
| N40 Mode              | 17      | 18   |      |


| UNII-1_ANT 2          |         |      |      |
|-----------------------|---------|------|------|
| Test Software Version | MT76xxU |      |      |
| Frequency (MHz)       | 5180    | 5200 | 5240 |
| AC20 Mode             | 0F      | 0F   | 0F   |
| Frequency (MHz)       | 5190    | 5230 |      |
| AC40 Mode             | 10      | 10   |      |
| Frequency (MHz)       | 5210    |      |      |
| AC80 Mode             | 10      |      |      |

| UNII-2A_ANT 2         |         |      |      |
|-----------------------|---------|------|------|
| Test Software Version | MT76xxU |      |      |
| Frequency (MHz)       | 5260    | 5300 | 5320 |
| AC20 Mode             | 0F      | 0F   | 0F   |
| Frequency (MHz)       | 5270    | 5310 |      |
| AC40 Mode             | 10      | 10   |      |
| Frequency (MHz)       | 5290    |      |      |
| AC80 Mode             | 10      |      |      |

| UNII-2C_ANT 2         |         |      |      |
|-----------------------|---------|------|------|
| Test Software Version | MT76xxU |      |      |
| Frequency (MHz)       | 5500    | 5580 | 5700 |
| AC20 Mode             | 0F      | 11   | 12   |
| Frequency (MHz)       | 5510    | 5550 | 5670 |
| AC40 Mode             | 11      | 12   | 15   |
| Frequency (MHz)       | 5530    | 5610 |      |
| AC80 Mod              | 11      | 13   |      |

| UNII-3_ANT 2          |         |      |      |
|-----------------------|---------|------|------|
| Test Software Version | MT76xxU |      |      |
| Frequency (MHz)       | 5745    | 5785 | 5825 |
| AC20 Mode             | 15      | 17   | 18   |
| Frequency (MHz)       | 5755    | 5795 |      |
| AC40 Mode             | 17      | 18   |      |
| Frequency (MHz)       | 5775    |      |      |
| AC80 Mode             | 17      |      |      |

### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

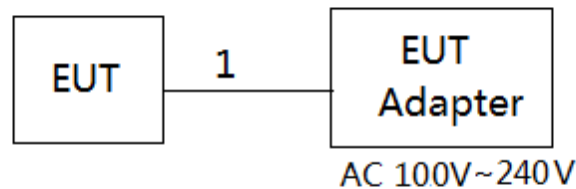

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | FCC ID | Series No. |
|------|-----------|-----------|----------------|--------|------------|
| -    | -         | -         | -              | -      | -          |

| Item | Shielded Type | Ferrite Core | Length | Note      |
|------|---------------|--------------|--------|-----------|
| 1    | NO            | NO           | 0.8m   | USB Cable |

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150kHz-30MHz)

| FREQUENCY (MHz) | Class A (dBuV) |         | Class B (dBuV) |           |
|-----------------|----------------|---------|----------------|-----------|
|                 | Quasi-peak     | Average | Quasi-peak     | Average   |
| 0.15 -0.5       | 79.00          | 66.00   | 66 - 56 *      | 56 - 46 * |
| 0.50 -5.0       | 73.00          | 60.00   | 56.00          | 46.00     |
| 5.0 -30.0       | 73.00          | 60.00   | 60.00          | 50.00     |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


#### 4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

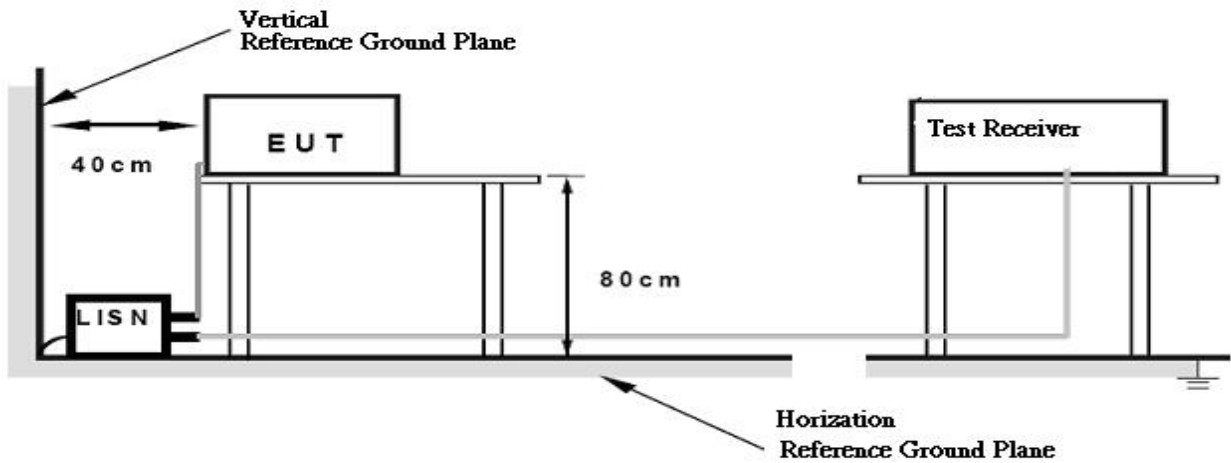

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX Mode mode.

#### 4.1.6 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 53%    Test Voltage: AC 120V/60Hz

#### 4.1.7 TEST RESULTS

Please refer to the Appendix A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150kHz to 30MHz.

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(kHz)                          | 300                              |
| 0.490~1.705          | 24000/F(kHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

| Frequencies<br>(MHz) | EIRP Limit (dBm) | Equivalent Field Strength<br>at 3m (dBμV/m) |
|----------------------|------------------|---------------------------------------------|
| 5150-5250            | -27              | 68.3                                        |
| 5250-5350            | -27              | 68.3                                        |
| 5470-5725            | -27              | 68.3                                        |
| 5725-5850            | -27(Note 2)      | 68.3                                        |
|                      | 10(Note 2)       | 105.3                                       |
|                      | 15.6(Note 2)     | 110.9                                       |
|                      | 27(Note 2)       | 122.3                                       |

Note:

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to

field strength:  $E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}$ , where P is the eirp (Watts)

2. According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

#### 4.2.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.2.3 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.4 TEST SETUP


(A)Radiated Emission Test Set-Up Frequency Below 1GHz

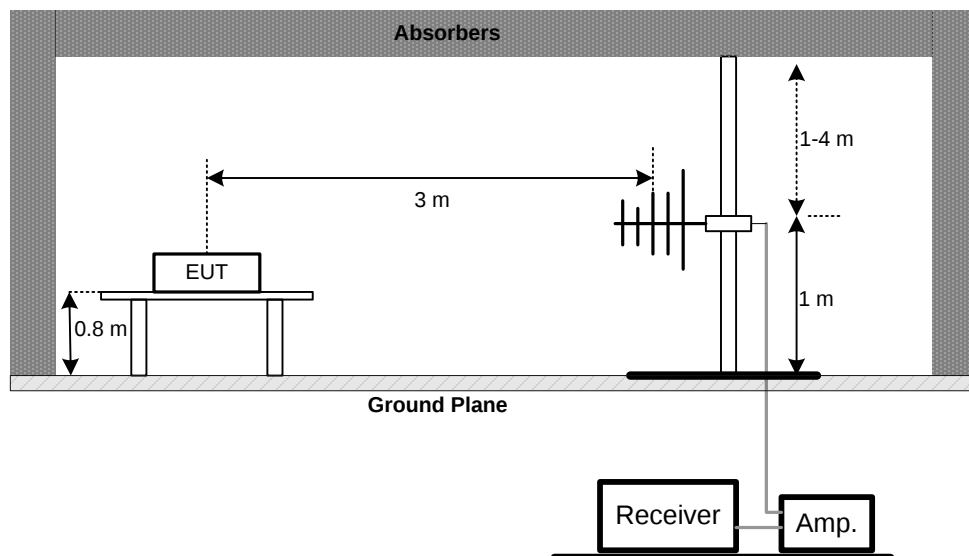

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

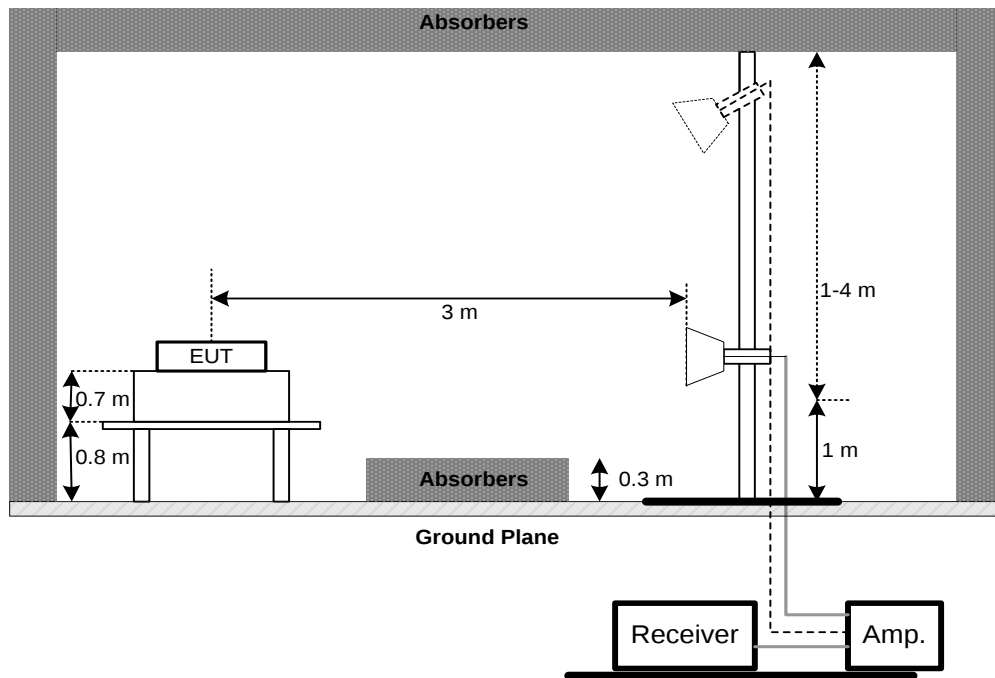

(C) Radiated emissions below 30MHz

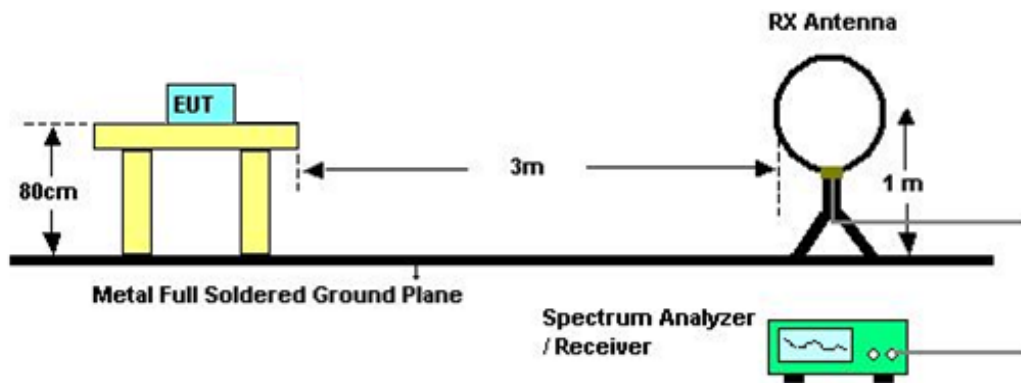

**4.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

**4.2.6 EUT TEST CONDITIONS**

Temperature: 25°C    Relative Humidity: 60%    Test Voltage: AC 120V/60Hz

#### **4.2.7 TEST RESULTS (9K TO 30MHz)**

Please refer to the Appendix B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

#### **4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)**

Please refer to the Appendix C.

#### **4.2.9 TEST RESULTS (ABOVE 1000 MHz)**

Please refer to the Appendix D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. 26dB SPECTRUM BANDWIDTH

### 5.1 APPLIED PROCEDURES / LIMIT

| FCC Part15, Subpart E |                              |                       |        |
|-----------------------|------------------------------|-----------------------|--------|
| Test Item             | Limit                        | Frequency Range (MHz) | Result |
| Bandwidth             | 26 dB Bandwidth              | 5150-5250             | PASS   |
|                       | 26 dB Bandwidth              | 5250-5350             | PASS   |
|                       | 26 dB Bandwidth              | 5470-5725             | PASS   |
|                       | Minimum 500kHz 6dB Bandwidth | 5725-5850             | PASS   |

#### 5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

| Spectrum Parameters | Setting                                                     |
|---------------------|-------------------------------------------------------------|
| Attenuation         | Auto                                                        |
| Span Frequency      | > 26dB Bandwidth                                            |
| RBW                 | 300 kHz(Bandwidth 20MHz)<br>1MHz(Bandwidth 40MHz and 80MHz) |
| VBW                 | 1MHz(Bandwidth 20MHz)<br>3MHz(Bandwidth 40MHz and 80MHz)    |
| Detector            | Peak                                                        |
| Trace               | Max Hold                                                    |
| Sweep Time          | Auto                                                        |

- c. Measured the spectrum width with power higher than 26dB below carrier

#### 5.1.2 DEVIATION FROM STANDARD

No deviation.

#### 5.1.3 TEST SETUP



#### 5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 5.1.5 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 60%    Test Voltage: AC 120V/60Hz

### 5.1.6 TEST RESULTS

Please refer to the Appendix E.

## 6. MAXIMUM CONDUCTED OUTPUT POWER

### 6.1 APPLIED PROCEDURES / LIMIT

| FCC Part15, Subpart E                                                                                                       |                                                            |                       |        |
|-----------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|-----------------------|--------|
| Test Item                                                                                                                   | Limit                                                      | Frequency Range (MHz) | Result |
| Conducted Output Power                                                                                                      | Fixed:1 Watt (30dBm)<br>Mobile and portable: 250mW (24dBm) | 5150-5250             | PASS   |
|                                                                                                                             | 250mW (24dBm)                                              | 5250-5350             | PASS   |
|                                                                                                                             | 250mW (24dBm)                                              | 5470-5725             | PASS   |
|                                                                                                                             | 1 Watt (30dBm)                                             | 5725-5850             | PASS   |
| Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125mW(21dBm) |                                                            |                       |        |

#### 6.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Used spectrum analyzer band power measurement function.
- Test was performed in accordance with method of KDB 789033 D02 Method SA-1.  
The spectrum analyzer setting please see follow:

| Spectrum Parameter | Setting                                                         |
|--------------------|-----------------------------------------------------------------|
| Attenuation        | Auto                                                            |
| Span Frequency     | Encompass the entire emissions bandwidth (EBW) of the signal    |
| RBW                | = 1MHz.                                                         |
| VBW                | ≥ 3MHz.                                                         |
| Sweep points       | ≥ 2 x span / RBW                                                |
| Detector           | RMS                                                             |
| Trace              | Trace average at least 100 traces in power averaging(rms) mode. |
| Sweep Time         | auto                                                            |

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP



#### 6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 6.1.5 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 60%    Test Voltage: AC 120V/60Hz

#### 6.1.6 TEST RESULTS

Please refer to the Appendix F.

## 7. POWER SPECTRAL DENSITY TEST

### 7.1 APPLIED PROCEDURES / LIMIT

| FCC Part15, Subpart E  |                                                                           |                       |        |
|------------------------|---------------------------------------------------------------------------|-----------------------|--------|
| Test Item              | Limit                                                                     | Frequency Range (MHz) | Result |
| Power Spectral Density | Other then Mobile and portable:17dBm/MHz<br>Mobile and portable:11dBm/MHz | 5150-5250             | PASS   |
|                        | 11dBm/MHz                                                                 | 5250-5350             | PASS   |
|                        | 11dBm/MHz                                                                 | 5470-5725             | PASS   |
|                        | 30dBm/500kHz                                                              | 5725-5850             | PASS   |

### 8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

| Spectrum Parameter | Setting                                                      |
|--------------------|--------------------------------------------------------------|
| Attenuation        | Auto                                                         |
| Span Frequency     | Encompass the entire emissions bandwidth (EBW) of the signal |
| RBW                | = 1MHz.                                                      |
| VBW                | ≥ 3MHz.                                                      |
| Detector           | RMS                                                          |
| Trace average      | 100 trace                                                    |
| Sweep Time         | Auto                                                         |

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 1MHz and VBW at 3MHz if the spectrum analyzer does not have 500kHz RBW.
- The value measured with RBW=1MHz is to be added with  $10\log(500\text{kHz}/1\text{MHz})$  which is -3dB. For example, if the measured value is +10dBm using RBW=1MHz (that is +10dBm/MHz), then the converted value will be +7dBm/500kHz.

#### 7.1.1 DEVIATION FROM STANDARD

No deviation.

#### 7.1.2 TEST SETUP



#### 7.1.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 7.1.4 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 60%    Test Voltage: AC 120V/60Hz

#### 7.1.5 TEST RESULTS

Please refer to the Appendix H.

## 8. FREQUENCY STABILITY MEASUREMENT

### 8.1 APPLIED PROCEDURES / LIMIT

| FCC Part15, Subpart E |                                |                       |        |
|-----------------------|--------------------------------|-----------------------|--------|
| Test Item             | Limit                          | Frequency Range (MHz) | Result |
| Frequency Stability   | Specified in the user's manual | 5150-5250             | PASS   |
|                       |                                | 5250-5350             | PASS   |
|                       |                                | 5470-5725             | PASS   |
|                       |                                | 5725-5850             | PASS   |

#### 8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.


| Spectrum Parameter | Setting                                          |
|--------------------|--------------------------------------------------|
| Attenuation        | Auto                                             |
| Span Frequency     | Entire absence of modulation emissions bandwidth |
| RBW                | 10 kHz                                           |
| VBW                | 10 kHz                                           |
| Sweep Time         | Auto                                             |

- c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.  
d. User manual temperature is -5°C~50°C.

#### 8.1.2 DEVIATION FROM STANDARD

No deviation.

### 8.1.3 TEST SETUP

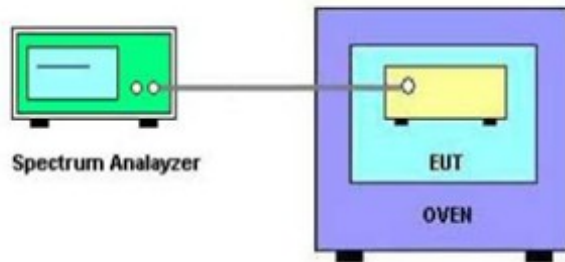

### 8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 8.1.5 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 55%    Test Voltage: AC 120V/60Hz

### 8.1.6 TEST RESULTS

Please refer to the Appendix I.

## 9. MEASUREMENT INSTRUMENTS LIST

| Conducted Emission Measurement |                      |              |                       |            |                  |
|--------------------------------|----------------------|--------------|-----------------------|------------|------------------|
| Item                           | Kind of Equipment    | Manufacturer | Type No.              | Serial No. | Calibrated until |
| 1                              | EMI Test Receiver    | R&S          | ESCI                  | 100382     | Mar. 11, 2019    |
| 2                              | LISN                 | EMCO         | 3816/2                | 52765      | Mar. 11, 2019    |
| 3                              | 50Ω Terminator       | SHX          | TF2-3G-A              | 8122901    | Mar. 11, 2019    |
| 4                              | TWO-LINE V-NETWORK   | R&S          | ENV216                | 101447     | Mar. 11, 2019    |
| 5                              | Measurement Software | Farad        | EZ-EMC Ver.NB-03A1-01 | N/A        | N/A              |
| 6                              | Cable                | N/A          | RG223                 | 12m        | Oct. 19, 2018    |

| Radiated Emission Measurement - Below 1GHz |                      |              |                             |             |                  |
|--------------------------------------------|----------------------|--------------|-----------------------------|-------------|------------------|
| Item                                       | Kind of Equipment    | Manufacturer | Type No.                    | Serial No.  | Calibrated until |
| 1                                          | Antenna              | Schwarbeck   | VULB9160                    | 9160-3232   | Mar. 11, 2019    |
| 2                                          | Amplifier            | HP           | 8447D                       | 2944A09673  | Oct. 19, 2018    |
| 3                                          | Receiver             | Agilent      | N9038A                      | MY52130039  | Aug. 20, 2018    |
| 4                                          | Cable                | emci         | LMR-400(30MHz-1 GHz)(8m+5m) | N/A         | Jun. 26, 2018    |
| 5                                          | Controller           | CT           | SC100                       | N/A         | N/A              |
| 6                                          | Controller           | MF           | MF-7802                     | MF780208416 | N/A              |
| 7                                          | Measurement Software | Farad        | EZ-EMC Ver.NB-03A1-01       | N/A         | N/A              |
| 8                                          | Antenna              | EM           | EM-6876-1                   | 230         | Feb. 07, 2019    |

| Radiated Emission Measurement - Above 1GHz |                                     |                |                          |               |                  |
|--------------------------------------------|-------------------------------------|----------------|--------------------------|---------------|------------------|
| Item                                       | Kind of Equipment                   | Manufacturer   | Type No.                 | Serial No.    | Calibrated until |
| 1                                          | Double Ridged Guide Antenna         | ETS            | 3115                     | 75789         | Mar. 11, 2019    |
| 2                                          | Broad-Band Horn Antenna             | Schwarzbeck    | BBHA 9170                | 9170319       | Jun. 08, 2018    |
| 3                                          | Amplifier                           | Agilent        | 8449B                    | 3008A02274    | Mar. 11, 2019    |
| 4                                          | Microwave Preamplifier With Adaptor | EMC INSTRUMENT | EMC2654045               | 980039 & HA01 | Mar. 11, 2019    |
| 5                                          | Receiver                            | Agilent        | N9038A                   | MY52130039    | Aug. 20, 2018    |
| 6                                          | Controller                          | CT             | SC100                    | N/A           | N/A              |
| 7                                          | Controller                          | MF             | MF-7802                  | MF780208416   | N/A              |
| 8                                          | Cable                               | emci           | EMC104-SM-SM-1 2000(12m) | N/A           | Jun. 26, 2018    |
| 9                                          | Measurement Software                | Farad          | EZ-EMC Ver.NB-03A1-01    | N/A           | N/A              |

| Spectrum Bandwidth Measurement |                   |              |          |            |                  |
|--------------------------------|-------------------|--------------|----------|------------|------------------|
| Item                           | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1                              | Spectrum Analyzer | R&S          | FSP40    | 100185     | Aug. 20, 2018    |

| Maximum Conducted Output Power Measurement |                   |              |          |            |                  |
|--------------------------------------------|-------------------|--------------|----------|------------|------------------|
| Item                                       | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1                                          | Spectrum Analyzer | R&S          | FSP40    | 100185     | Aug. 20, 2018    |

| Power Spectral Density Measurement |                   |              |          |            |                  |
|------------------------------------|-------------------|--------------|----------|------------|------------------|
| Item                               | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1                                  | Spectrum Analyzer | R&S          | FSP40    | 100185     | Aug. 20, 2018    |

| Frequency Stability Measurement |                       |              |          |             |                  |
|---------------------------------|-----------------------|--------------|----------|-------------|------------------|
| Item                            | Kind of Equipment     | Manufacturer | Type No. | Serial No.  | Calibrated until |
| 1                               | Spectrum Analyzer     | R&S          | FSP40    | 100185      | Aug. 20, 2018    |
| 2                               | Precision Oven Tester | Bell         | BTH-50C  | 20170306001 | Mar. 11, 2019    |

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

## 10. EUT TEST PHOTOS

### Conducted Measurement Photos




## Radiated Measurement Photos

9KHz to 30MHz




## Radiated Measurement Photos

30MHz to 1000MHz

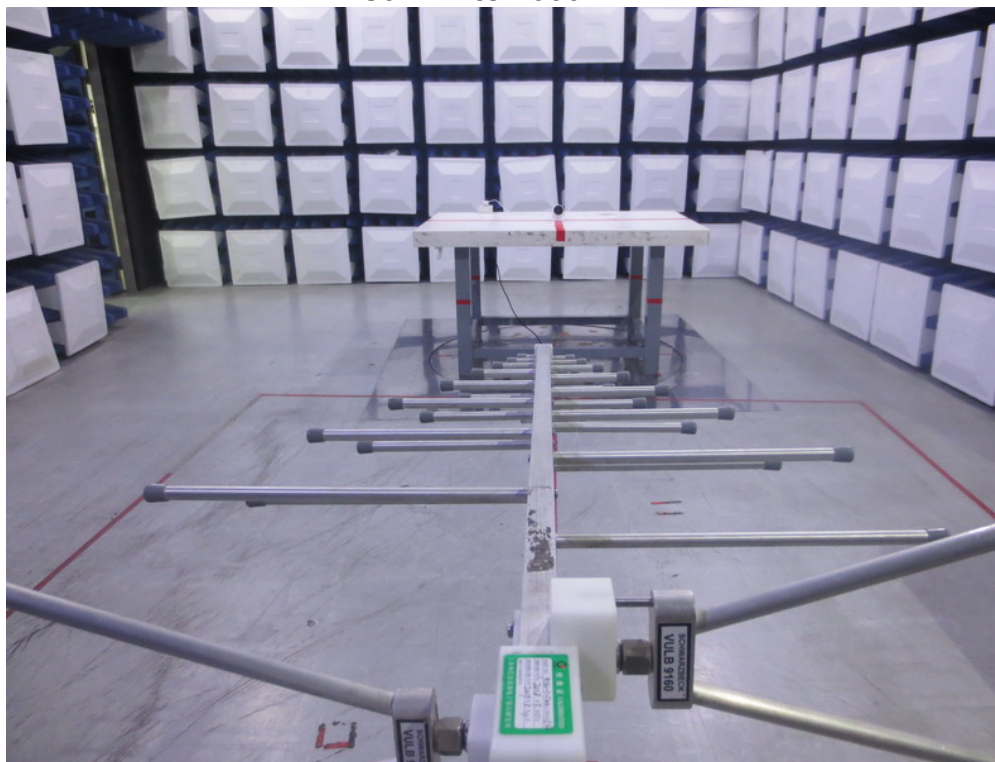

## Radiated Measurement Photos


Above 1000MHz

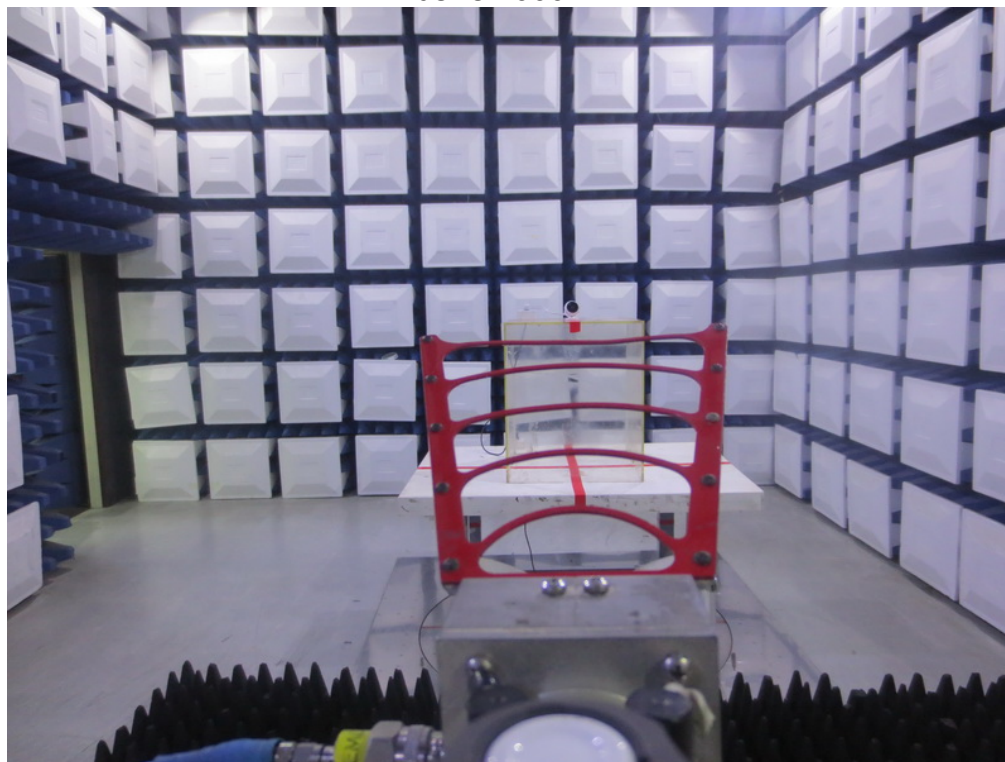

## APPENDIX A - CONDUCTED EMISSION

Test Mode: TX MODE

# Line

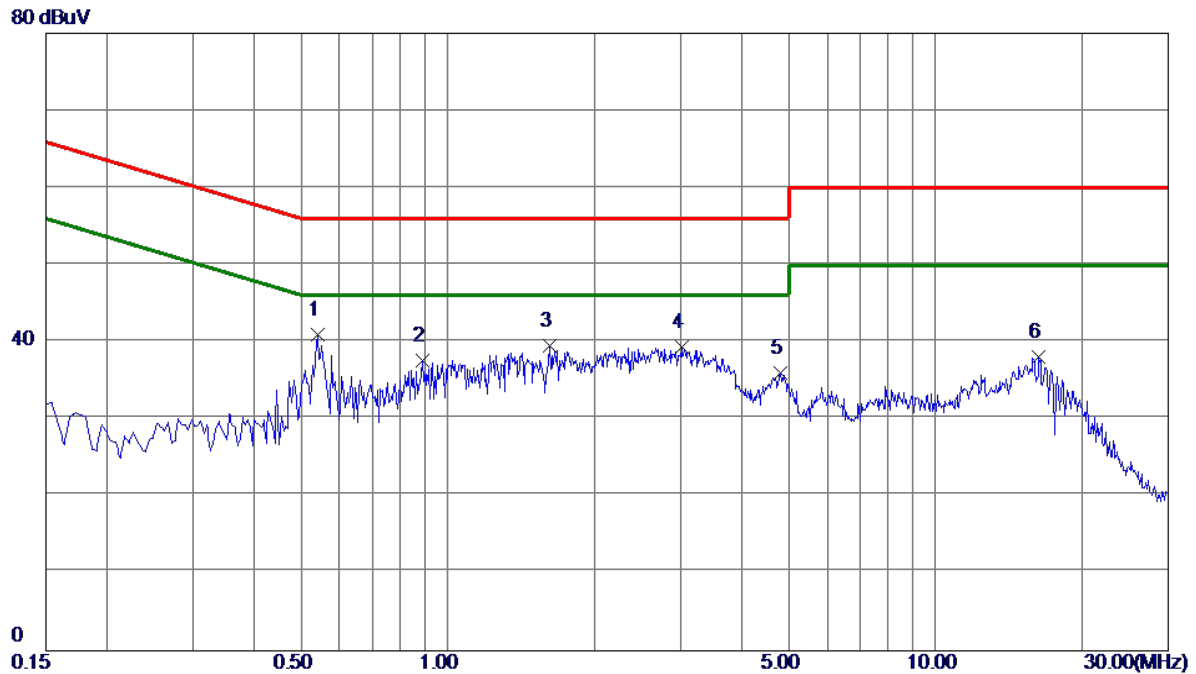


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|---------|
| 1 * | 0.5415       | 31.22                    | 9.80                    | 41.02                   | 56.00         | -14.98       | Peak     |         |
| 2   | 0.8880       | 27.78                    | 9.85                    | 37.63                   | 56.00         | -18.37       | Peak     |         |
| 3   | 1.6170       | 29.58                    | 9.91                    | 39.49                   | 56.00         | -16.51       | Peak     |         |
| 4   | 3.0164       | 29.35                    | 10.00                   | 39.35                   | 56.00         | -16.65       | Peak     |         |
| 5   | 4.8075       | 25.96                    | 10.07                   | 36.03                   | 56.00         | -19.97       | Peak     |         |
| 6   | 16.2870      | 27.47                    | 10.61                   | 38.08                   | 60.00         | -21.92       | Peak     |         |

Note : The test result has included the cable loss.

Test Mode: TX MODE

# Neutral

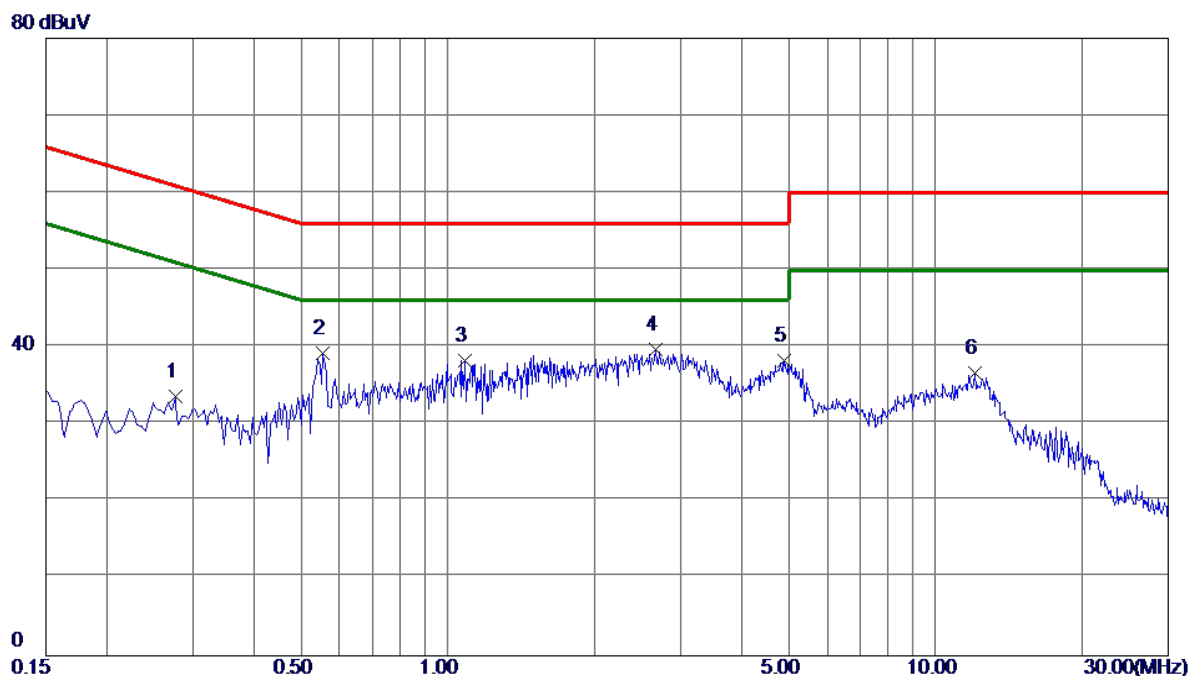


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|---------|
| 1   | 0.2760       | 23.90                    | 9.67                    | 33.57                   | 60.94         | -27.37       | Peak     |         |
| 2   | 0.5550       | 29.46                    | 9.71                    | 39.17                   | 56.00         | -16.83       | Peak     |         |
| 3   | 1.0859       | 28.56                    | 9.75                    | 38.31                   | 56.00         | -17.69       | Peak     |         |
| 4 * | 2.6745       | 29.79                    | 9.88                    | 39.67                   | 56.00         | -16.33       | Peak     |         |
| 5   | 4.9064       | 28.21                    | 10.00                   | 38.21                   | 56.00         | -17.79       | Peak     |         |
| 6   | 12.0300      | 26.29                    | 10.42                   | 36.71                   | 60.00         | -23.29       | Peak     |         |

Note : The test result has included the cable loss.

## APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX MODE


Ant 0°

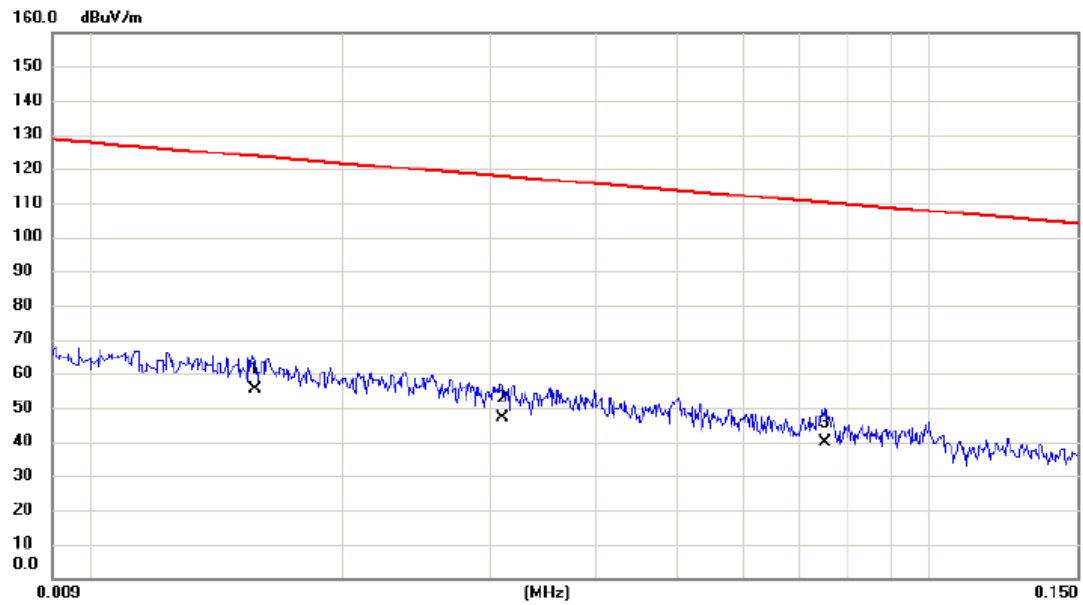

| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|--------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz    | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 0.0157 | 35.21         | 20.18          | 55.39       | 123.69 | -68.30 | AVG      |         |
| 2   |     | 0.0310 | 27.58         | 19.29          | 46.87       | 117.78 | -70.91 | AVG      |         |
| 3   |     | 0.0751 | 21.45         | 18.23          | 39.68       | 110.09 | -70.41 | AVG      |         |

Test Mode: TX MODE


Ant 0°

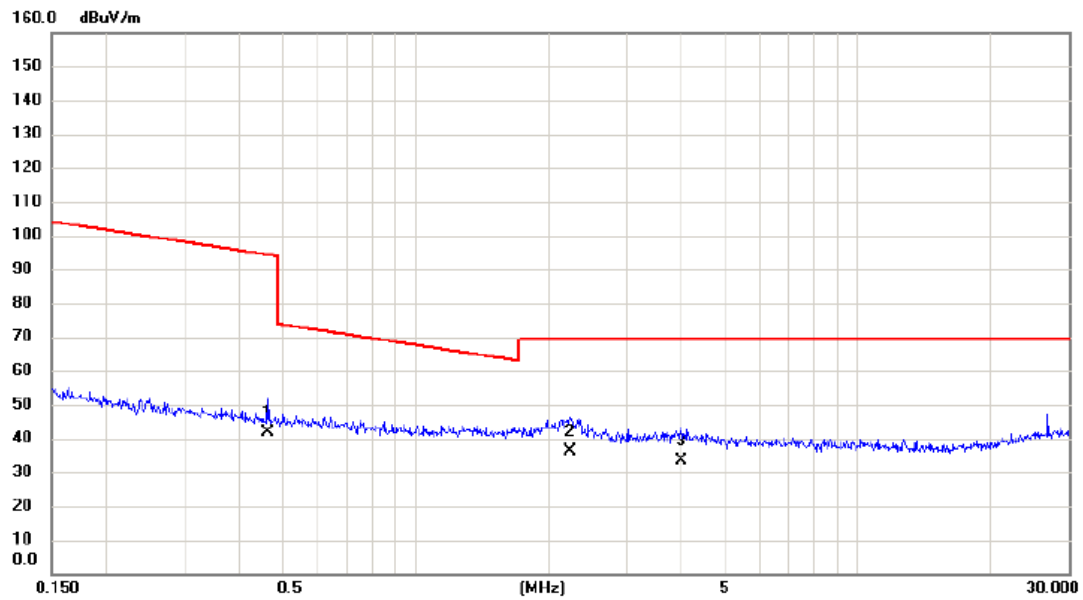

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 0.4637       | 25.13                    | 16.50                   | 41.63                      | 94.28           | -52.65       | AVG      |         |
| 2   | *   | 2.2367       | 20.78                    | 15.44                   | 36.22                      | 69.54           | -33.32       | QP       |         |
| 3   |     | 3.9850       | 18.30                    | 14.95                   | 33.25                      | 69.54           | -36.29       | QP       |         |

Test Mode: TX MODE


Ant 90°

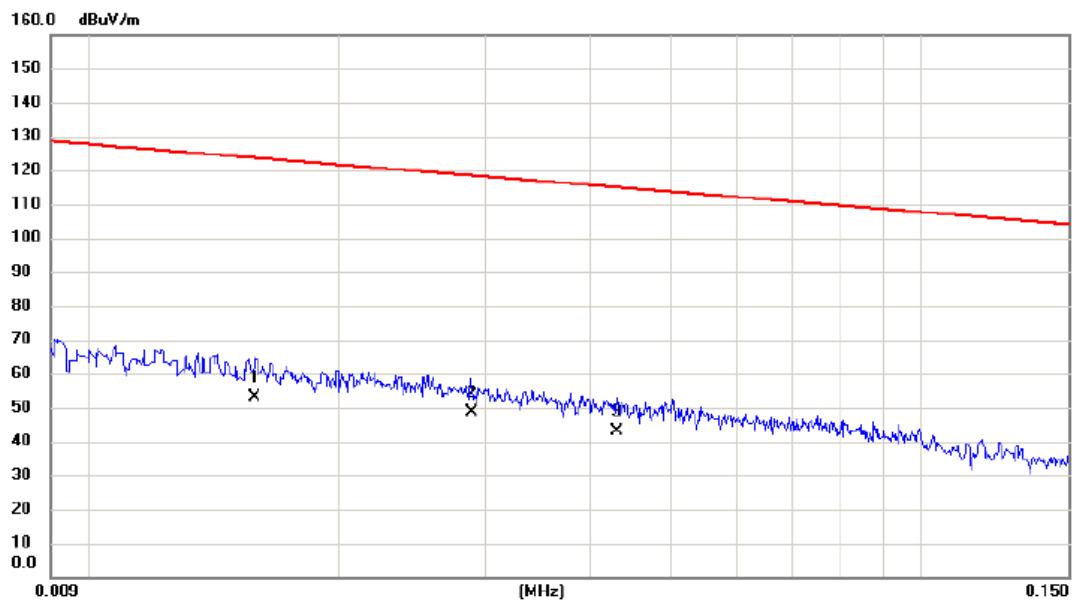

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 0.0158       | 33.00                    | 20.17                   | 53.17                      | 123.63          | -70.46       | AVG      |         |
| 2   | *   | 0.0288       | 29.21                    | 19.36                   | 48.57                      | 118.42          | -69.85       | AVG      |         |
| 3   |     | 0.0431       | 24.13                    | 18.93                   | 43.06                      | 114.92          | -71.86       | AVG      |         |

Test Mode: TX MODE

Ant 90°

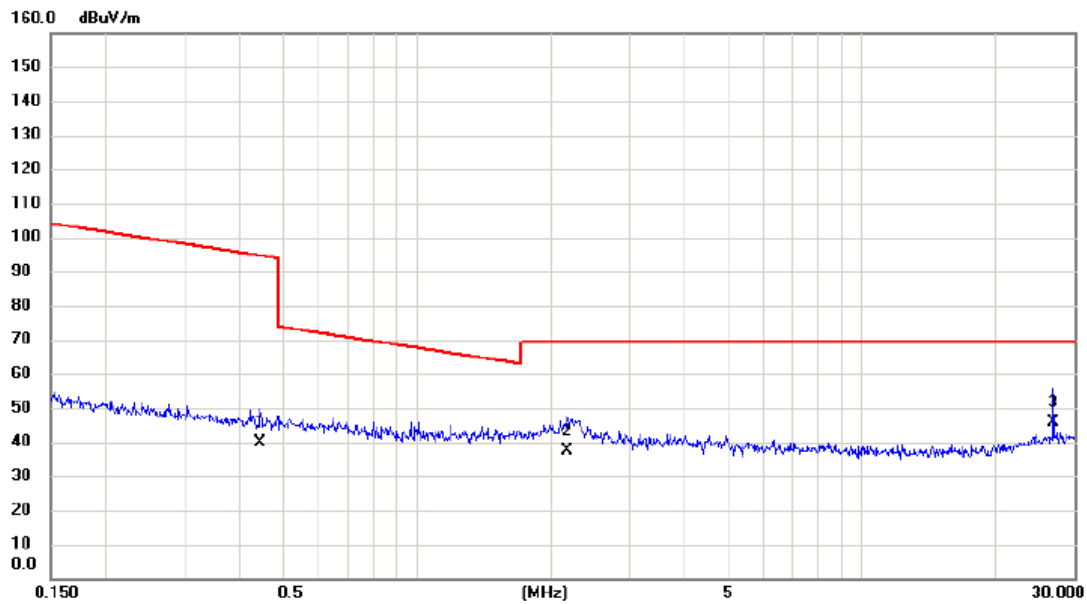


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 0.4444       | 23.48                    | 16.51                   | 39.99                      | 94.65           | -54.66       | AVG      |         |
| 2   |     | 2.1783       | 21.78                    | 15.46                   | 37.24                      | 69.54           | -32.30       | QP       |         |
| 3   | *   | 26.8411      | 25.46                    | 20.21                   | 45.67                      | 69.54           | -23.87       | QP       |         |

## APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)

# ANT 1

Test Mode: UNII-1/TX A Mode 5180MHz


## Vertical

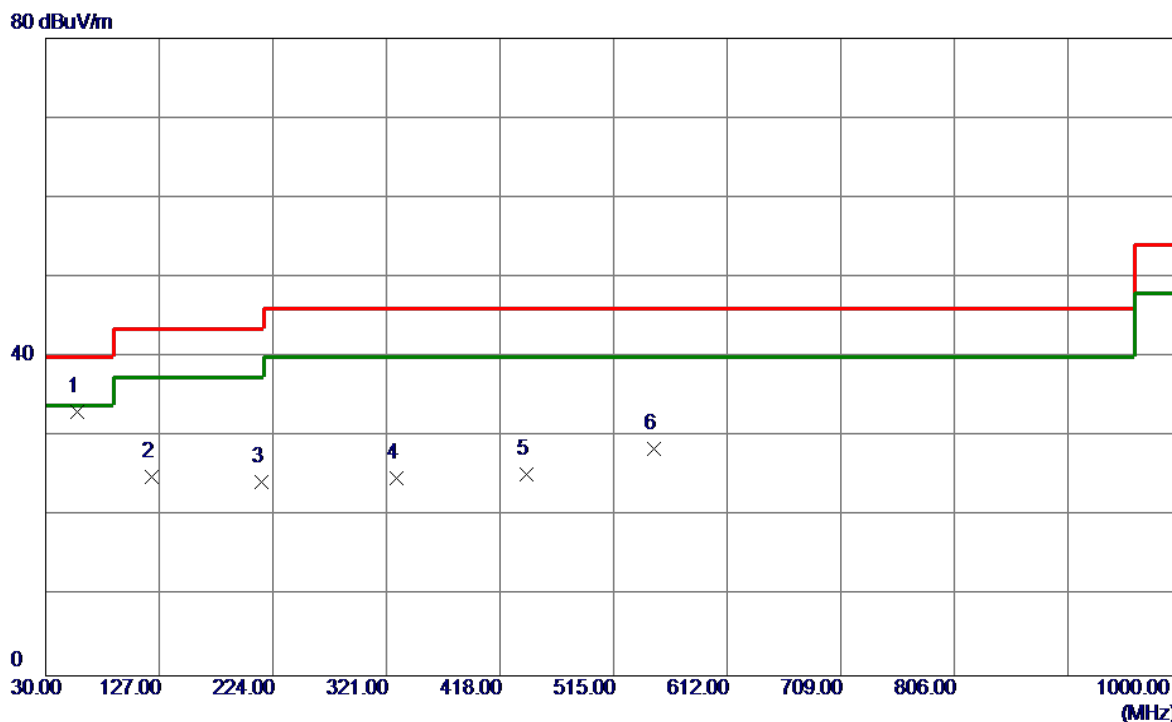

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 57.1600      | 45.67                      | -12.54                  | 33.13                     | 40.00           | -6.87        | Peak     |         |
| 2   | 120.2100     | 38.68                      | -13.66                  | 25.02                     | 43.50           | -18.48       | Peak     |         |
| 3   | 214.3000     | 37.67                      | -13.28                  | 24.39                     | 43.50           | -19.11       | Peak     |         |
| 4   | 329.7300     | 34.76                      | -9.91                   | 24.85                     | 46.00           | -21.15       | Peak     |         |
| 5   | 440.3100     | 32.42                      | -7.11                   | 25.31                     | 46.00           | -20.69       | Peak     |         |
| 6   | 549.9200     | 32.91                      | -4.44                   | 28.47                     | 46.00           | -17.53       | Peak     |         |

Test Mode: UNII-1/TX A Mode 5180MHz


### Horizontal

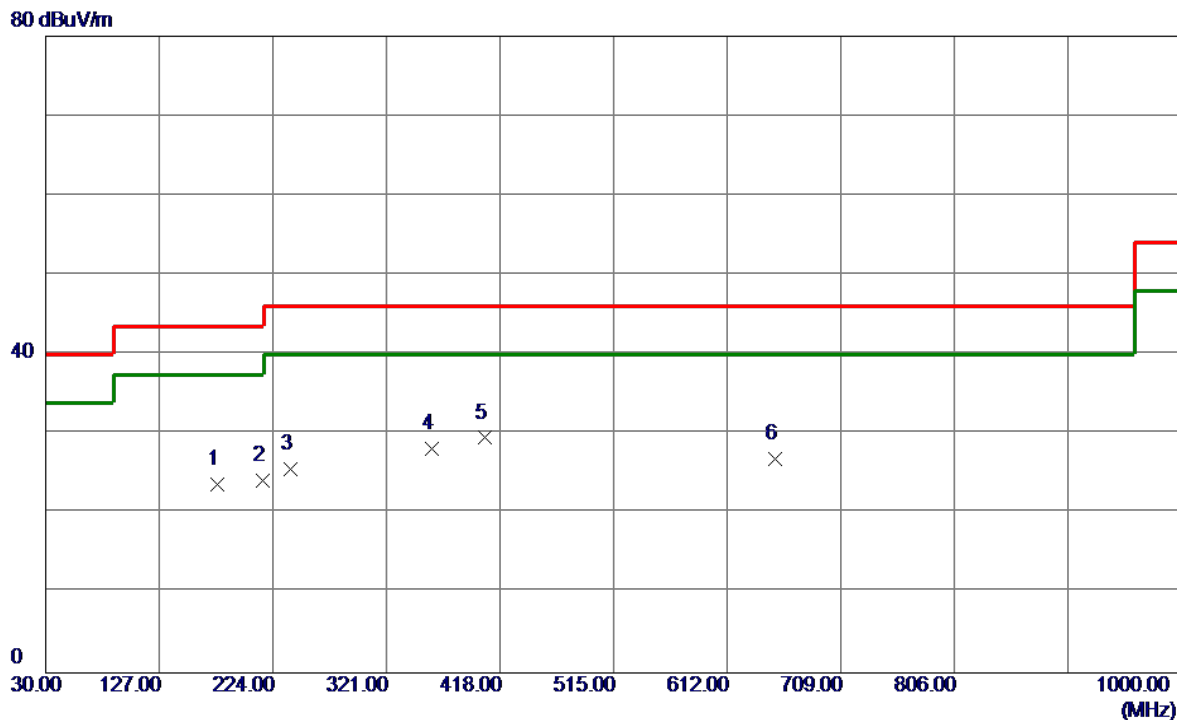

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 176.4700     | 34.97                      | -11.32                  | 23.65                     | 43.50           | -19.85       | Peak     |         |
| 2   | 215.2700     | 37.45                      | -13.32                  | 24.13                     | 43.50           | -19.37       | Peak     |         |
| 3   | 239.5200     | 38.88                      | -13.35                  | 25.53                     | 46.00           | -20.47       | Peak     |         |
| 4   | 359.8000     | 37.34                      | -9.17                   | 28.17                     | 46.00           | -17.83       | Peak     |         |
| 5 * | 405.3900     | 37.50                      | -7.98                   | 29.52                     | 46.00           | -16.48       | Peak     |         |
| 6   | 652.7400     | 28.94                      | -2.13                   | 26.81                     | 46.00           | -19.19       | Peak     |         |

Test Mode: UNII-1/TX A Mode 5200MHz


Vertical

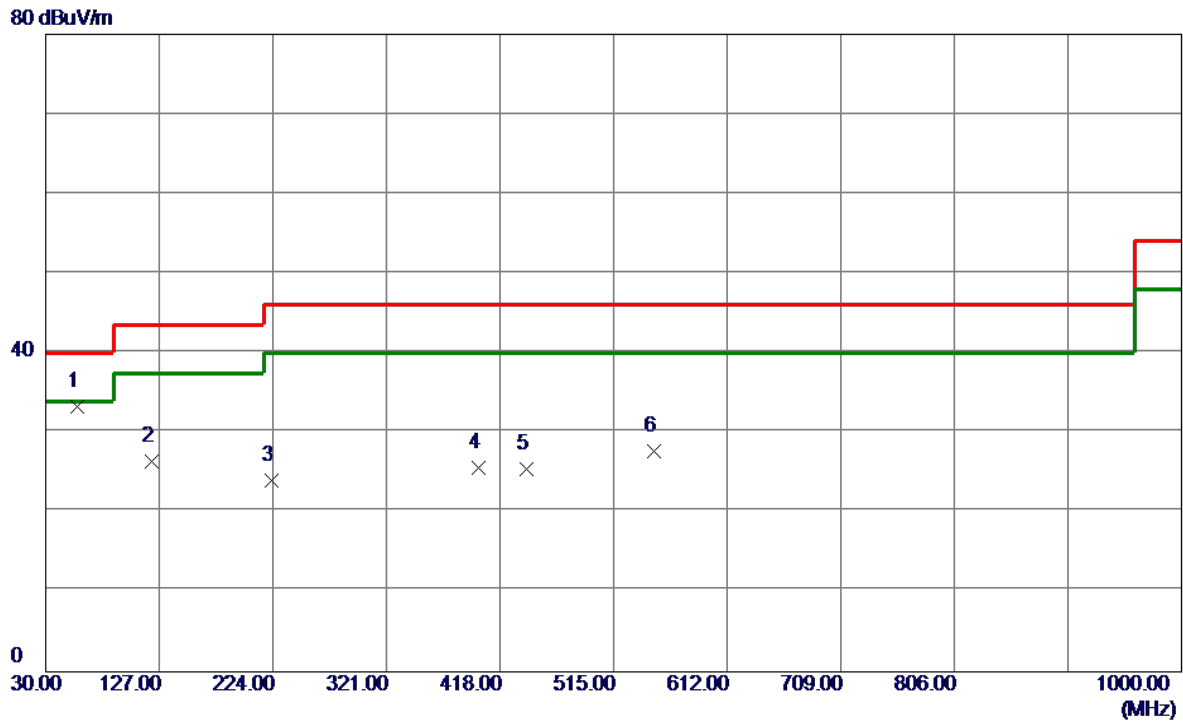

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 57.1600      | 45.79                      | -12.54                  | 33.25                     | 40.00           | -6.75        | Peak     |         |
| 2   | 120.2100     | 40.08                      | -13.66                  | 26.42                     | 43.50           | -17.08       | Peak     |         |
| 3   | 223.0300     | 37.36                      | -13.43                  | 23.93                     | 46.00           | -22.07       | Peak     |         |
| 4   | 399.5700     | 33.73                      | -8.12                   | 25.61                     | 46.00           | -20.39       | Peak     |         |
| 5   | 440.3100     | 32.53                      | -7.11                   | 25.42                     | 46.00           | -20.58       | Peak     |         |
| 6   | 549.9200     | 32.16                      | -4.44                   | 27.72                     | 46.00           | -18.28       | Peak     |         |

Test Mode: UNII-1/TX A Mode 5200MHz


### Horizontal

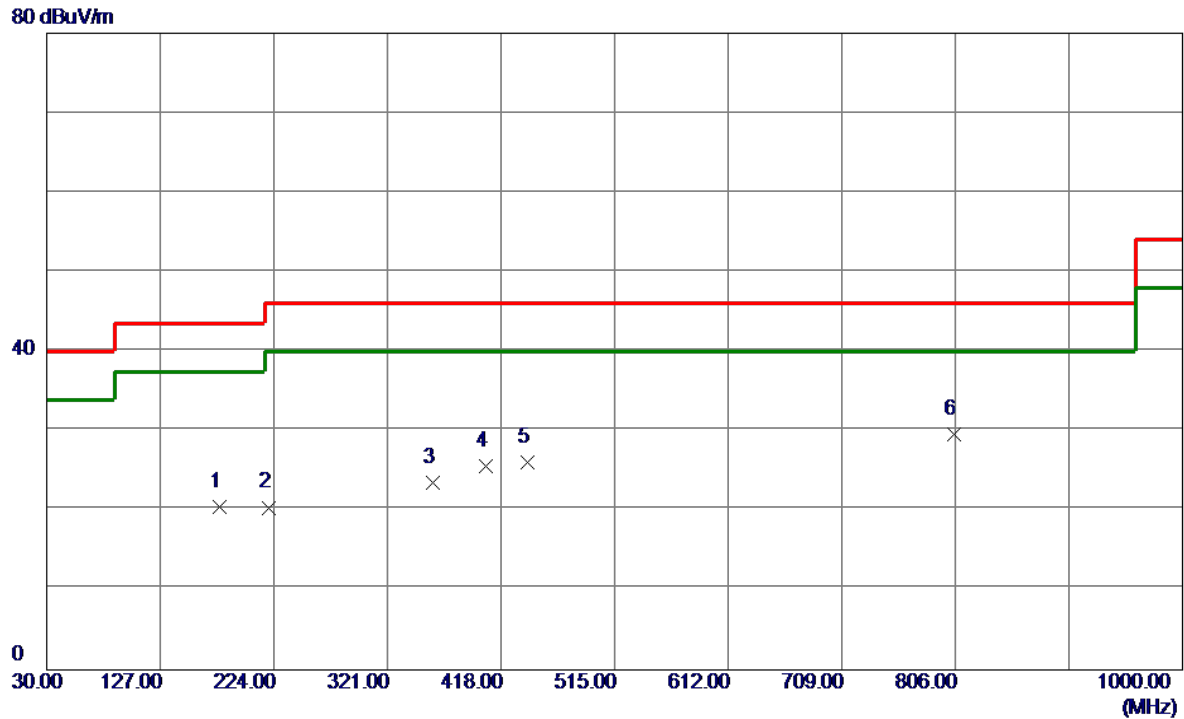

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 177.4400     | 31.83                      | -11.35                  | 20.48                     | 43.50           | -23.02       | Peak     |         |
| 2   | 220.1200     | 33.93                      | -13.53                  | 20.40                     | 46.00           | -25.60       | Peak     |         |
| 3   | 359.8000     | 32.71                      | -9.17                   | 23.54                     | 46.00           | -22.46       | Peak     |         |
| 4   | 405.3900     | 33.58                      | -7.98                   | 25.60                     | 46.00           | -20.40       | Peak     |         |
| 5   | 440.3100     | 33.16                      | -7.11                   | 26.05                     | 46.00           | -19.95       | Peak     |         |
| 6 * | 805.0300     | 28.68                      | 0.98                    | 29.66                     | 46.00           | -16.34       | Peak     |         |

Test Mode: UNII-1/TX A Mode 5240MHz


Vertical

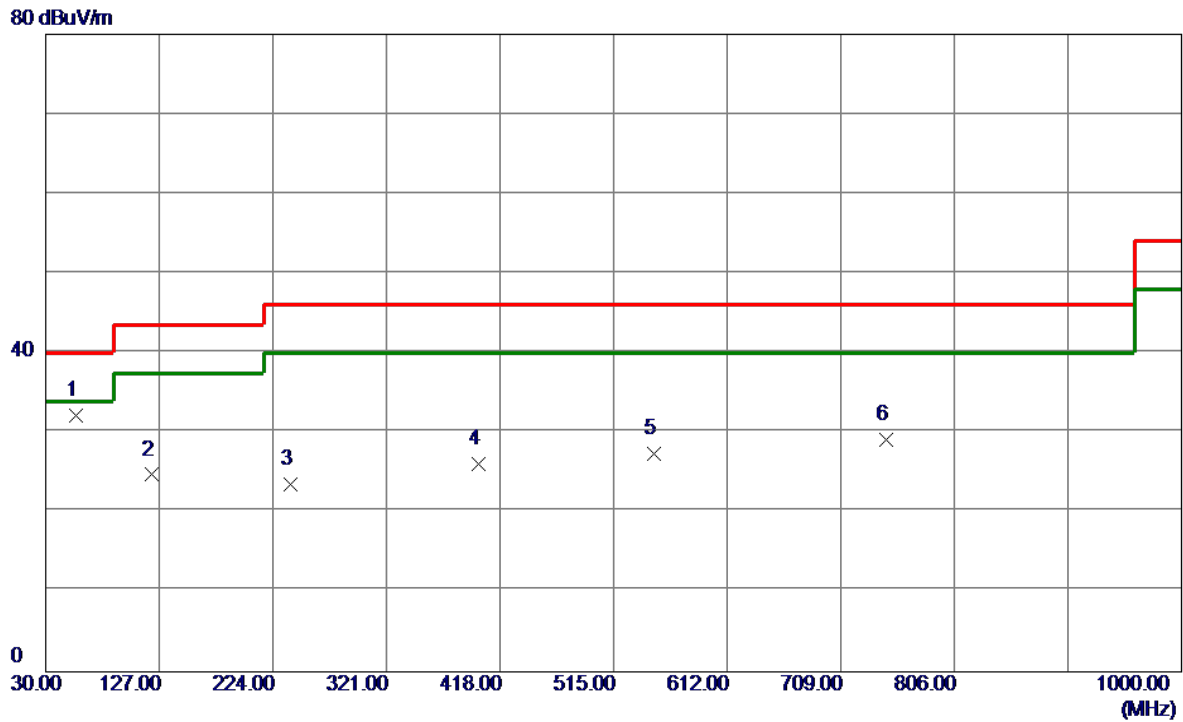

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 56.1900      | 44.38                      | -12.26                  | 32.12                     | 40.00           | -7.88        | Peak     |         |
| 2   | 120.2100     | 38.38                      | -13.66                  | 24.72                     | 43.50           | -18.78       | Peak     |         |
| 3   | 239.5200     | 36.84                      | -13.35                  | 23.49                     | 46.00           | -22.51       | Peak     |         |
| 4   | 399.5700     | 34.18                      | -8.12                   | 26.06                     | 46.00           | -19.94       | Peak     |         |
| 5   | 549.9200     | 31.84                      | -4.44                   | 27.40                     | 46.00           | -18.60       | Peak     |         |
| 6   | 747.8000     | 29.20                      | -0.11                   | 29.09                     | 46.00           | -16.91       | Peak     |         |

Test Mode: UNII-1/TX A Mode 5240MHz


### Horizontal

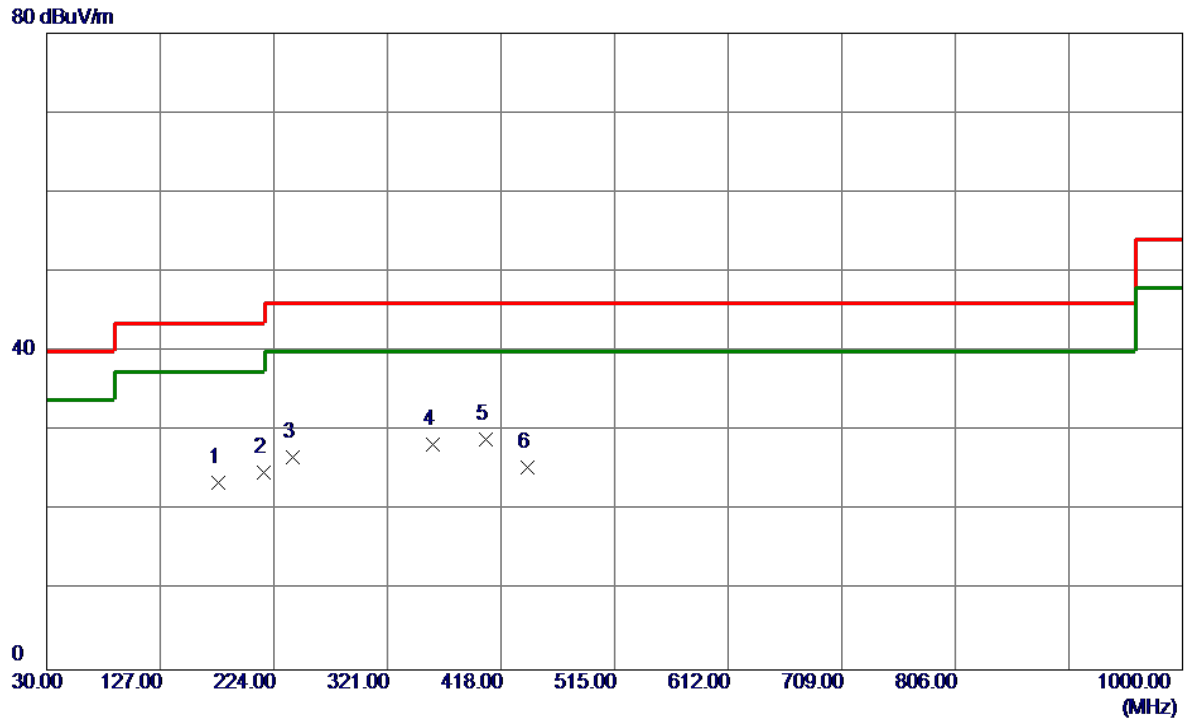

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 176.4700     | 34.89                      | -11.32                  | 23.57                     | 43.50           | -19.93       | Peak     |         |
| 2   | 215.2700     | 38.19                      | -13.32                  | 24.87                     | 43.50           | -18.63       | Peak     |         |
| 3   | 240.4900     | 40.09                      | -13.35                  | 26.74                     | 46.00           | -19.26       | Peak     |         |
| 4   | 359.8000     | 37.44                      | -9.17                   | 28.27                     | 46.00           | -17.73       | Peak     |         |
| 5 * | 405.3900     | 36.97                      | -7.98                   | 28.99                     | 46.00           | -17.01       | Peak     |         |
| 6   | 440.3100     | 32.49                      | -7.11                   | 25.38                     | 46.00           | -20.62       | Peak     |         |

Test Mode: UNII-2A/TX A Mode 5260MHz


Vertical

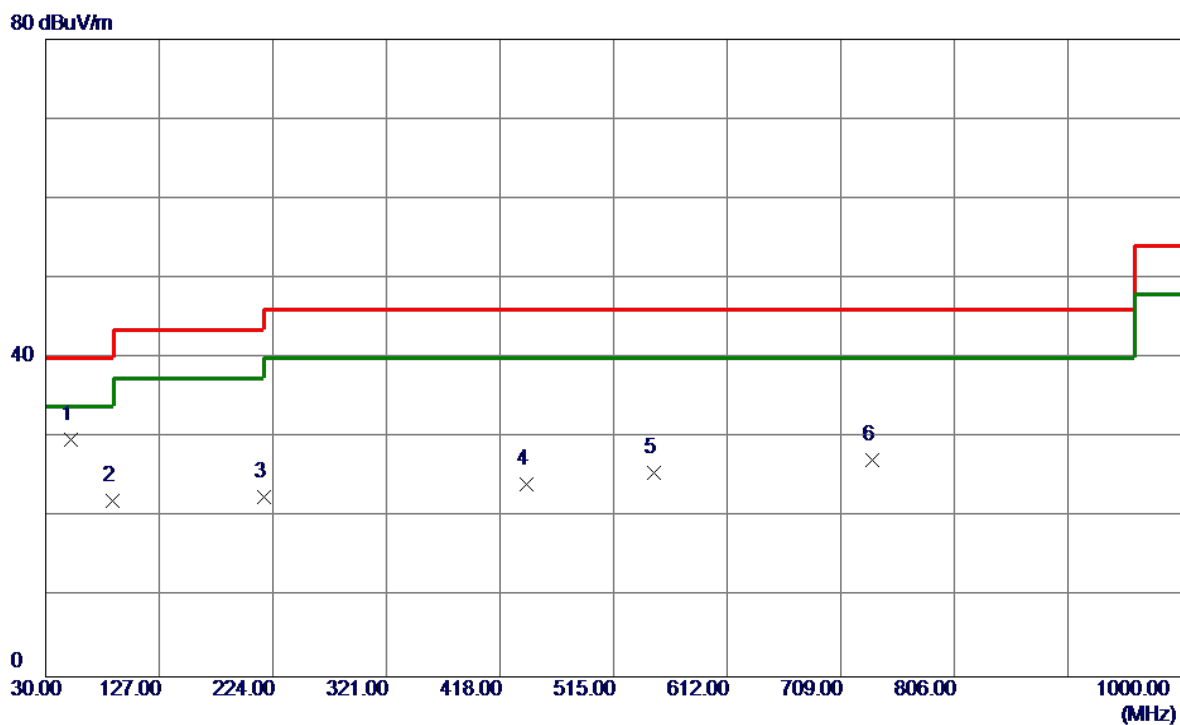

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 51.3400      | 41.57                      | -11.74                  | 29.83                     | 40.00           | -10.17       | Peak     |         |
| 2   | 87.2300      | 39.18                      | -17.12                  | 22.06                     | 40.00           | -17.94       | Peak     |         |
| 3   | 216.2400     | 35.86                      | -13.37                  | 22.49                     | 46.00           | -23.51       | Peak     |         |
| 4   | 440.3100     | 31.23                      | -7.11                   | 24.12                     | 46.00           | -21.88       | Peak     |         |
| 5   | 549.9200     | 30.10                      | -4.44                   | 25.66                     | 46.00           | -20.34       | Peak     |         |
| 6   | 736.1599     | 27.47                      | -0.31                   | 27.16                     | 46.00           | -18.84       | Peak     |         |

Test Mode: UNII-2A/TX A Mode 5260MHz


### Horizontal

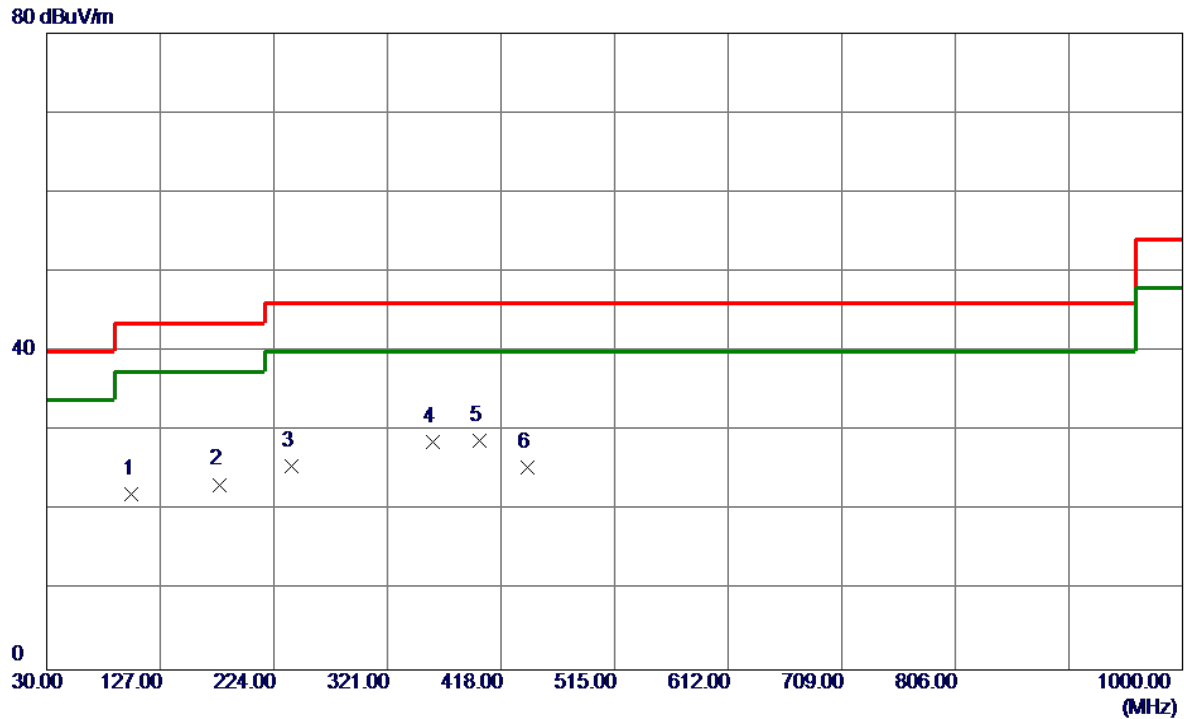

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 102.7500     | 38.56                      | -16.41                  | 22.15                     | 43.50           | -21.35       | Peak     |         |
| 2   | 177.4400     | 34.63                      | -11.35                  | 23.28                     | 43.50           | -20.22       | Peak     |         |
| 3   | 239.5200     | 39.02                      | -13.35                  | 25.67                     | 46.00           | -20.33       | Peak     |         |
| 4   | 359.8000     | 37.82                      | -9.17                   | 28.65                     | 46.00           | -17.35       | Peak     |         |
| 5 * | 399.5700     | 36.86                      | -8.12                   | 28.74                     | 46.00           | -17.26       | Peak     |         |
| 6   | 440.3100     | 32.62                      | -7.11                   | 25.51                     | 46.00           | -20.49       | Peak     |         |

Test Mode: UNII-2A/TX A Mode 5300MHz


### Vertical

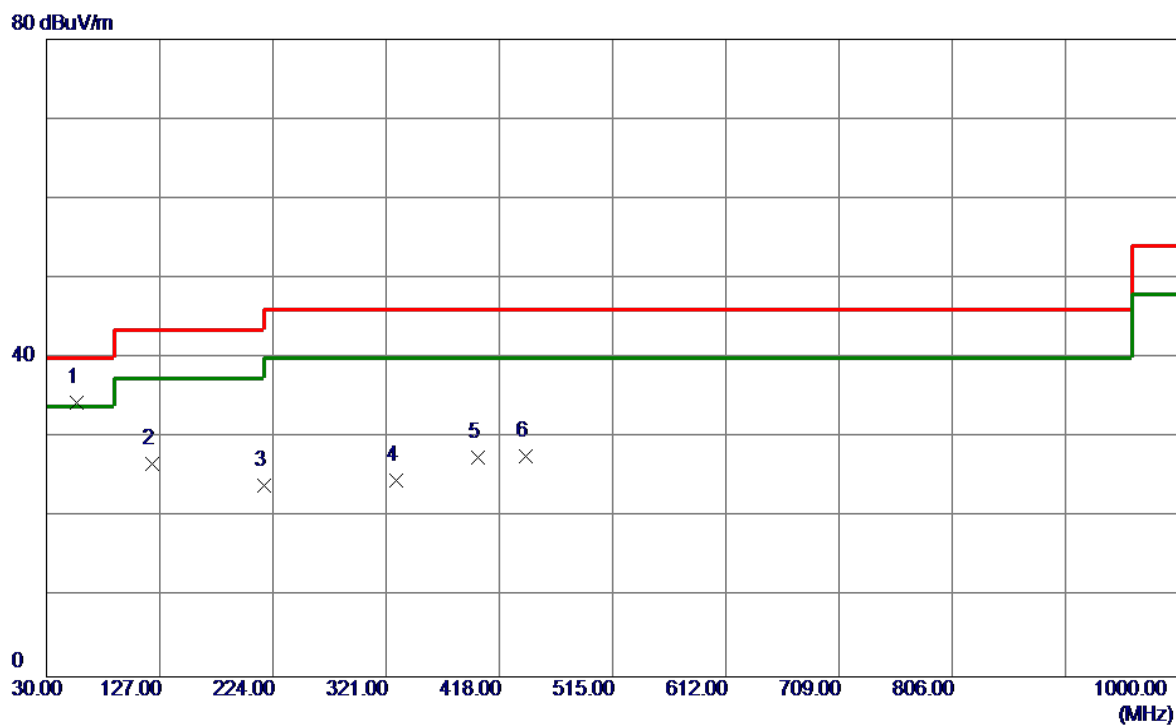

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 56.1900      | 46.72                      | -12.26                  | 34.46                     | 40.00           | -5.54        | Peak     |         |
| 2   | 120.2100     | 40.36                      | -13.66                  | 26.70                     | 43.50           | -16.80       | Peak     |         |
| 3   | 216.2400     | 37.38                      | -13.37                  | 24.01                     | 46.00           | -21.99       | Peak     |         |
| 4   | 329.7300     | 34.48                      | -9.91                   | 24.57                     | 46.00           | -21.43       | Peak     |         |
| 5   | 399.5700     | 35.66                      | -8.12                   | 27.54                     | 46.00           | -18.46       | Peak     |         |
| 6   | 440.3100     | 34.81                      | -7.11                   | 27.70                     | 46.00           | -18.30       | Peak     |         |

Test Mode: UNII-2A/TX A Mode 5300MHz


### Horizontal

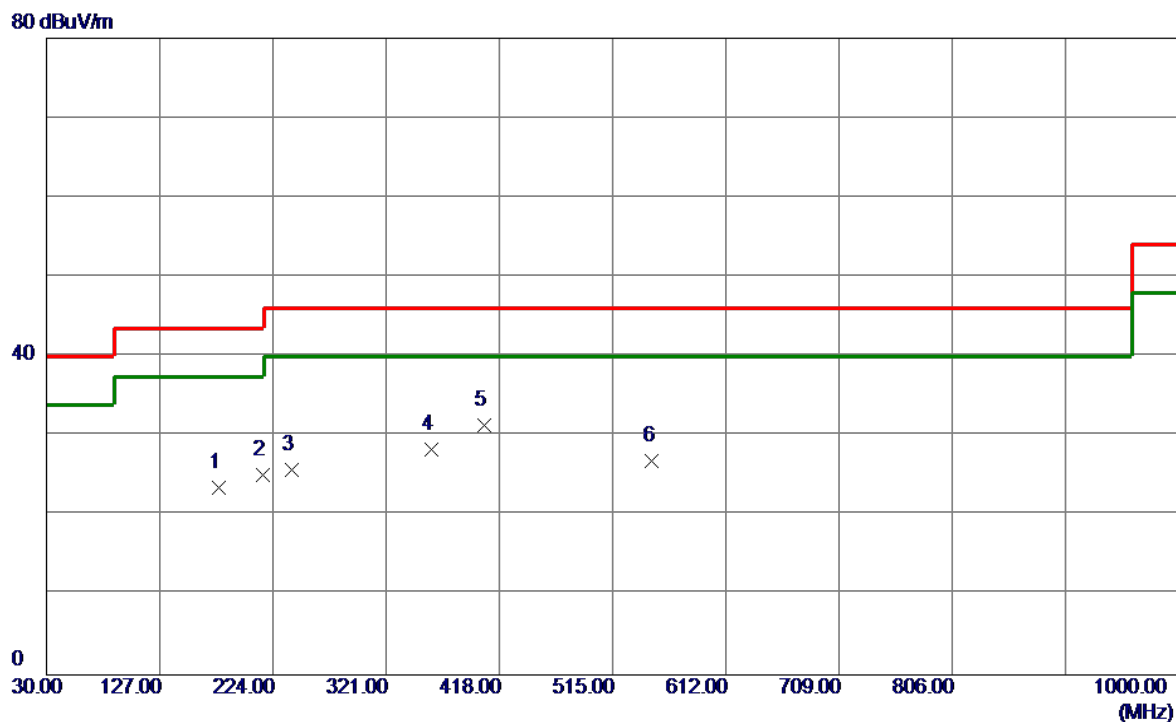

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 177.4400     | 34.86                      | -11.35                  | 23.51                     | 43.50           | -19.99       | Peak     |         |
| 2   | 215.2700     | 38.40                      | -13.32                  | 25.08                     | 43.50           | -18.42       | Peak     |         |
| 3   | 240.4900     | 39.13                      | -13.35                  | 25.78                     | 46.00           | -20.22       | Peak     |         |
| 4   | 359.8000     | 37.53                      | -9.17                   | 28.36                     | 46.00           | -17.64       | Peak     |         |
| 5 * | 405.3900     | 39.28                      | -7.98                   | 31.30                     | 46.00           | -14.70       | Peak     |         |
| 6   | 548.9500     | 31.33                      | -4.46                   | 26.87                     | 46.00           | -19.13       | Peak     |         |

Test Mode: UNII-2A/TX A Mode 5320MHz


Vertical

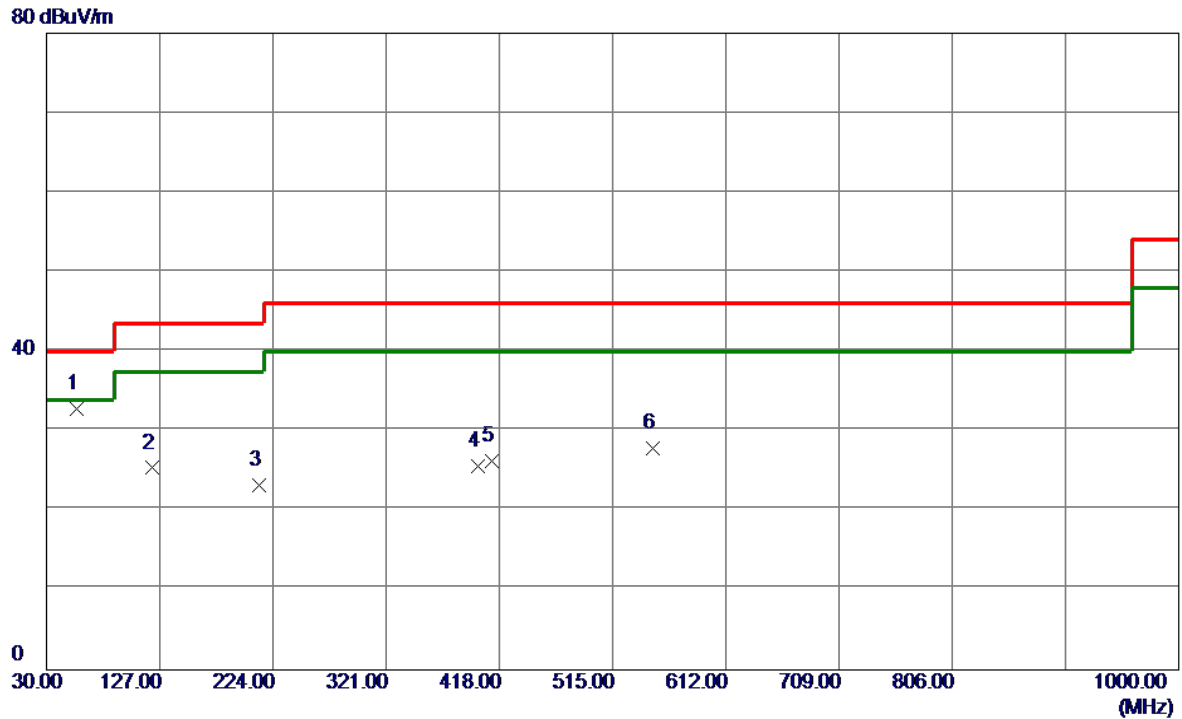

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 56.1900      | 45.01                      | -12.26                  | 32.75                     | 40.00           | -7.25        | Peak     |         |
| 2   | 120.2100     | 39.02                      | -13.66                  | 25.36                     | 43.50           | -18.14       | Peak     |         |
| 3   | 212.3600     | 36.40                      | -13.19                  | 23.21                     | 43.50           | -20.29       | Peak     |         |
| 4   | 399.5700     | 33.75                      | -8.12                   | 25.63                     | 46.00           | -20.37       | Peak     |         |
| 5   | 411.2100     | 34.06                      | -7.83                   | 26.23                     | 46.00           | -19.77       | Peak     |         |
| 6   | 549.9200     | 32.26                      | -4.44                   | 27.82                     | 46.00           | -18.18       | Peak     |         |

Test Mode: UNII-2A/TX A Mode 5320MHz


# Horizontal

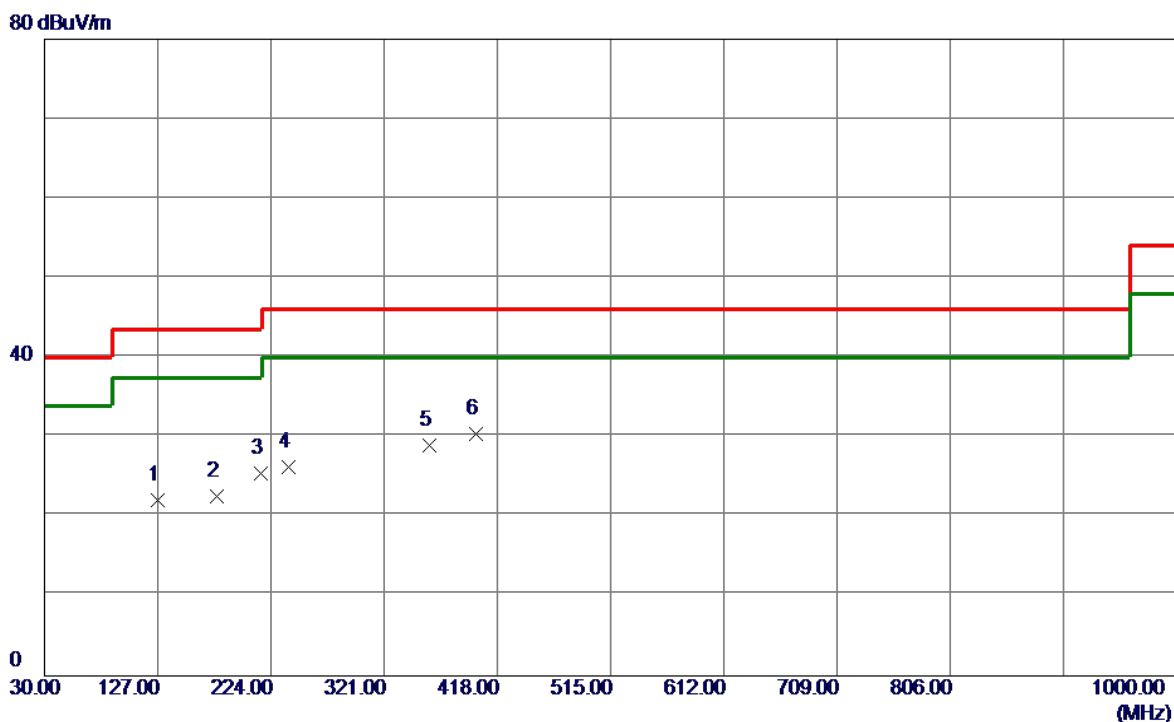

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 127.0000     | 35.27                      | -13.22                  | 22.05                     | 43.50           | -21.45       | Peak     |         |
| 2   | 177.4400     | 33.98                      | -11.35                  | 22.63                     | 43.50           | -20.87       | Peak     |         |
| 3   | 215.2700     | 38.78                      | -13.32                  | 25.46                     | 43.50           | -18.04       | Peak     |         |
| 4   | 239.5200     | 39.53                      | -13.35                  | 26.18                     | 46.00           | -19.82       | Peak     |         |
| 5   | 359.8000     | 38.12                      | -9.17                   | 28.95                     | 46.00           | -17.05       | Peak     |         |
| 6 * | 399.5700     | 38.47                      | -8.12                   | 30.35                     | 46.00           | -15.65       | Peak     |         |

Test Mode: UNII-2C/TX A Mode 5500MHz


Vertical

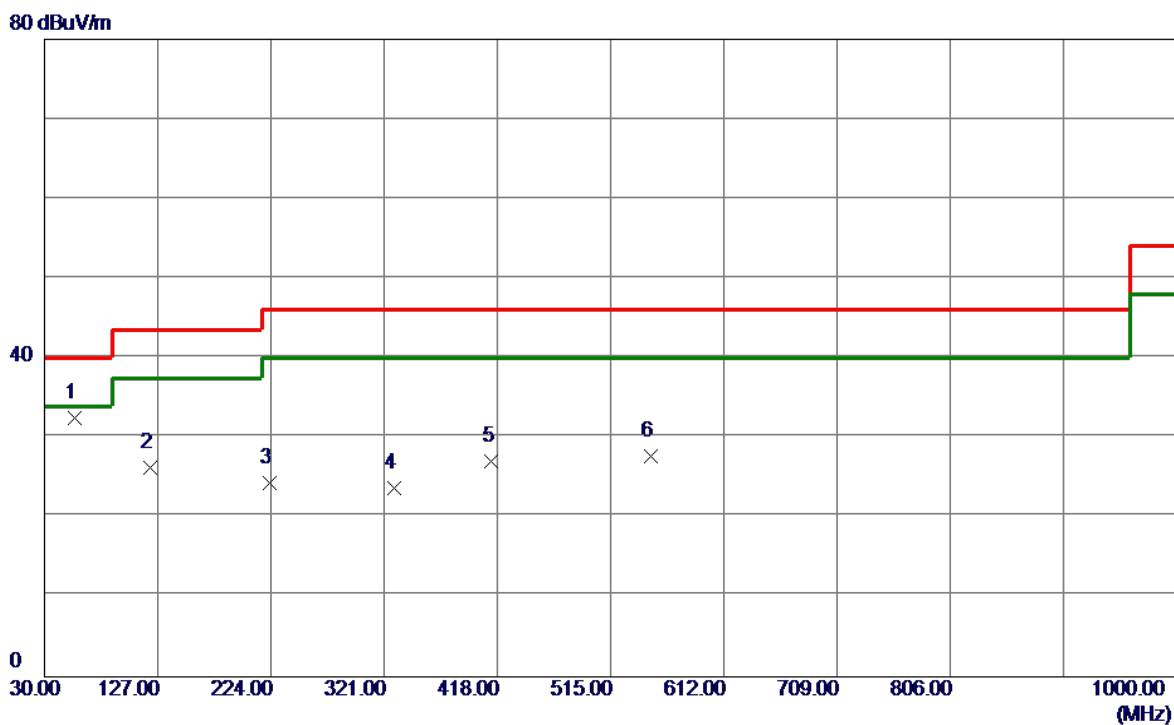

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 56.1900      | 44.73                      | -12.26                  | 32.47                     | 40.00           | -7.53        | Peak     |         |
| 2   | 120.2100     | 39.90                      | -13.66                  | 26.24                     | 43.50           | -17.26       | Peak     |         |
| 3   | 223.0300     | 37.76                      | -13.43                  | 24.33                     | 46.00           | -21.67       | Peak     |         |
| 4   | 329.7300     | 33.60                      | -9.91                   | 23.69                     | 46.00           | -22.31       | Peak     |         |
| 5   | 413.1500     | 34.89                      | -7.79                   | 27.10                     | 46.00           | -18.90       | Peak     |         |
| 6   | 549.9200     | 32.06                      | -4.44                   | 27.62                     | 46.00           | -18.38       | Peak     |         |

Test Mode: UNII-2C/TX A Mode 5500MHz


### Horizontal

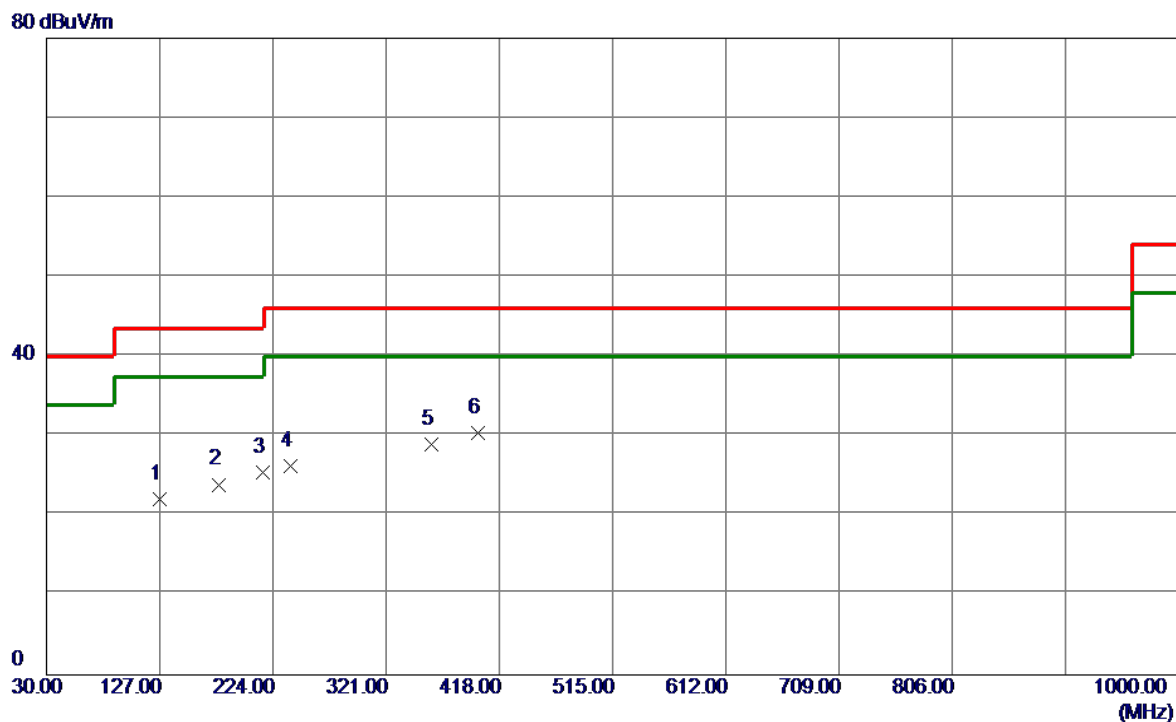

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 127.0000     | 35.27                      | -13.22                  | 22.05                     | 43.50           | -21.45       | Peak     |         |
| 2   | 177.4400     | 35.27                      | -11.35                  | 23.92                     | 43.50           | -19.58       | Peak     |         |
| 3   | 215.2700     | 38.78                      | -13.32                  | 25.46                     | 43.50           | -18.04       | Peak     |         |
| 4   | 239.5200     | 39.53                      | -13.35                  | 26.18                     | 46.00           | -19.82       | Peak     |         |
| 5   | 359.8000     | 38.12                      | -9.17                   | 28.95                     | 46.00           | -17.05       | Peak     |         |
| 6 * | 399.5700     | 38.47                      | -8.12                   | 30.35                     | 46.00           | -15.65       | Peak     |         |

Test Mode: UNII-2C/TX A Mode 5580MHz


Vertical

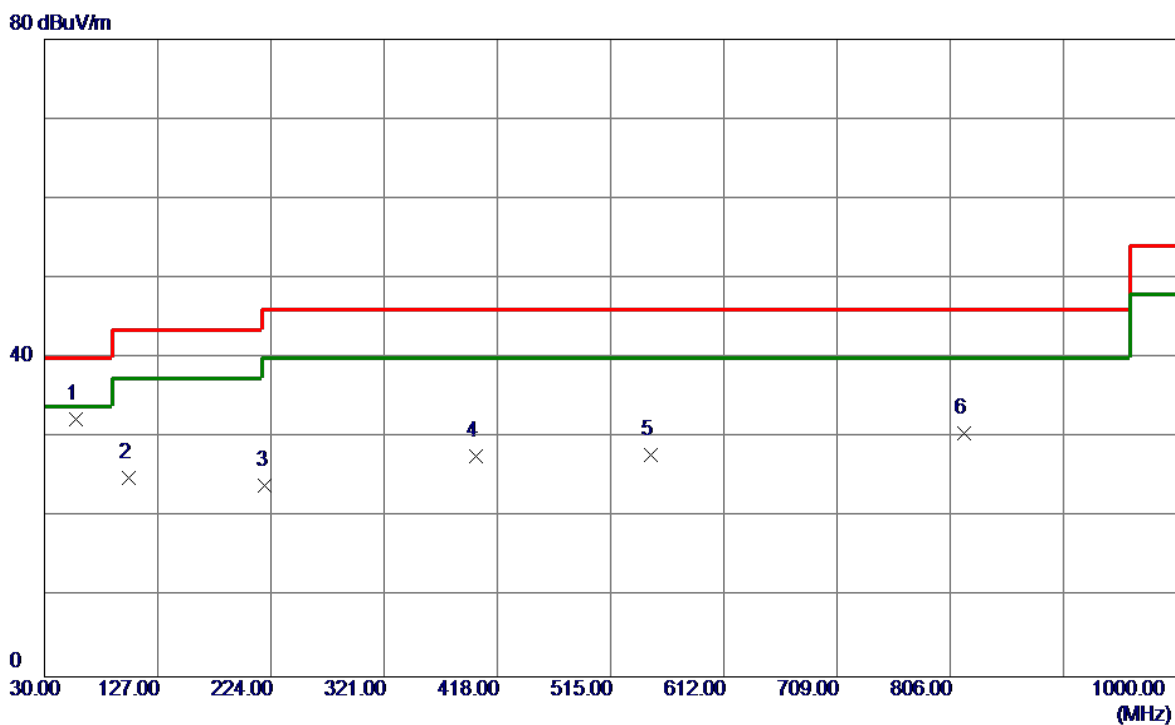

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 57.1600      | 44.89                      | -12.54                  | 32.35                     | 40.00           | -7.65        | Peak     |         |
| 2   | 101.7800     | 41.55                      | -16.58                  | 24.97                     | 43.50           | -18.53       | Peak     |         |
| 3   | 219.1500     | 37.46                      | -13.50                  | 23.96                     | 46.00           | -22.04       | Peak     |         |
| 4   | 399.5700     | 35.73                      | -8.12                   | 27.61                     | 46.00           | -18.39       | Peak     |         |
| 5   | 549.9200     | 32.31                      | -4.44                   | 27.87                     | 46.00           | -18.13       | Peak     |         |
| 6   | 817.6400     | 29.38                      | 1.25                    | 30.63                     | 46.00           | -15.37       | Peak     |         |

Test Mode: UNII-2C/TX A Mode 5580MHz


### Horizontal

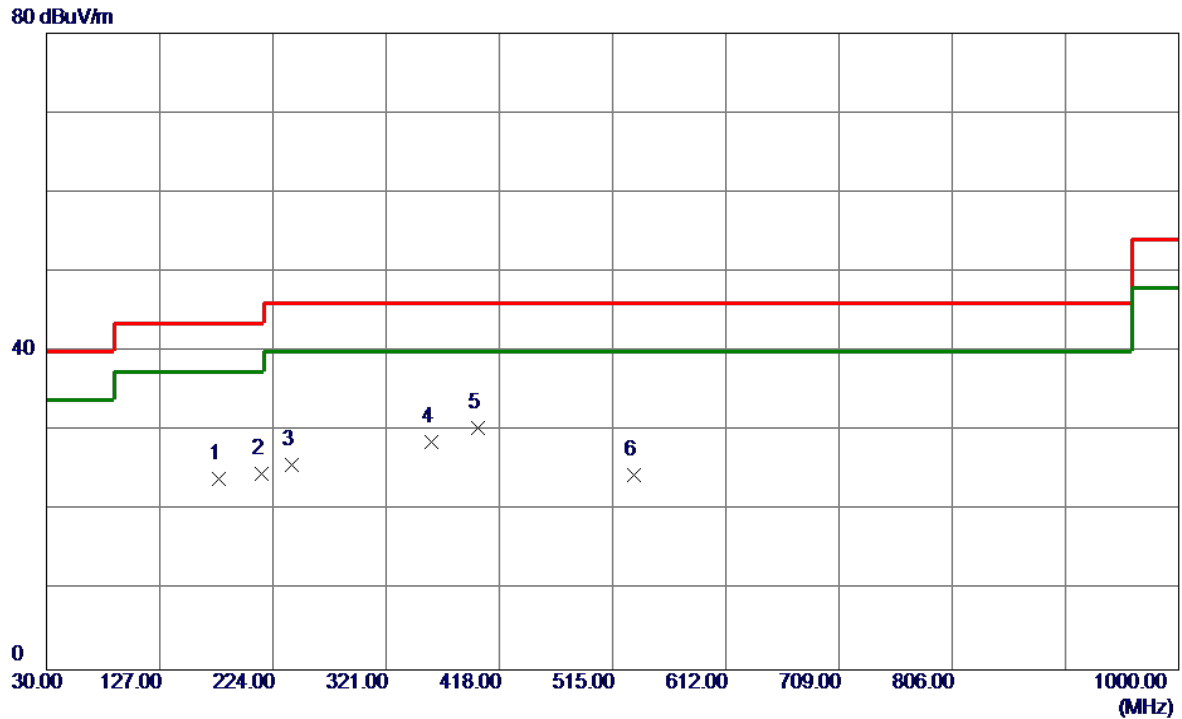

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 177.4400     | 35.40                      | -11.35                  | 24.05                     | 43.50           | -19.45       | Peak     |         |
| 2   | 214.3000     | 37.87                      | -13.28                  | 24.59                     | 43.50           | -18.91       | Peak     |         |
| 3   | 240.4900     | 39.13                      | -13.35                  | 25.78                     | 46.00           | -20.22       | Peak     |         |
| 4   | 359.8000     | 37.74                      | -9.17                   | 28.57                     | 46.00           | -17.43       | Peak     |         |
| 5 * | 399.5700     | 38.53                      | -8.12                   | 30.41                     | 46.00           | -15.59       | Peak     |         |
| 6   | 533.4300     | 29.32                      | -4.87                   | 24.45                     | 46.00           | -21.55       | Peak     |         |

Test Mode: UNII-2C/TX A Mode 5700MHz


# Vertical

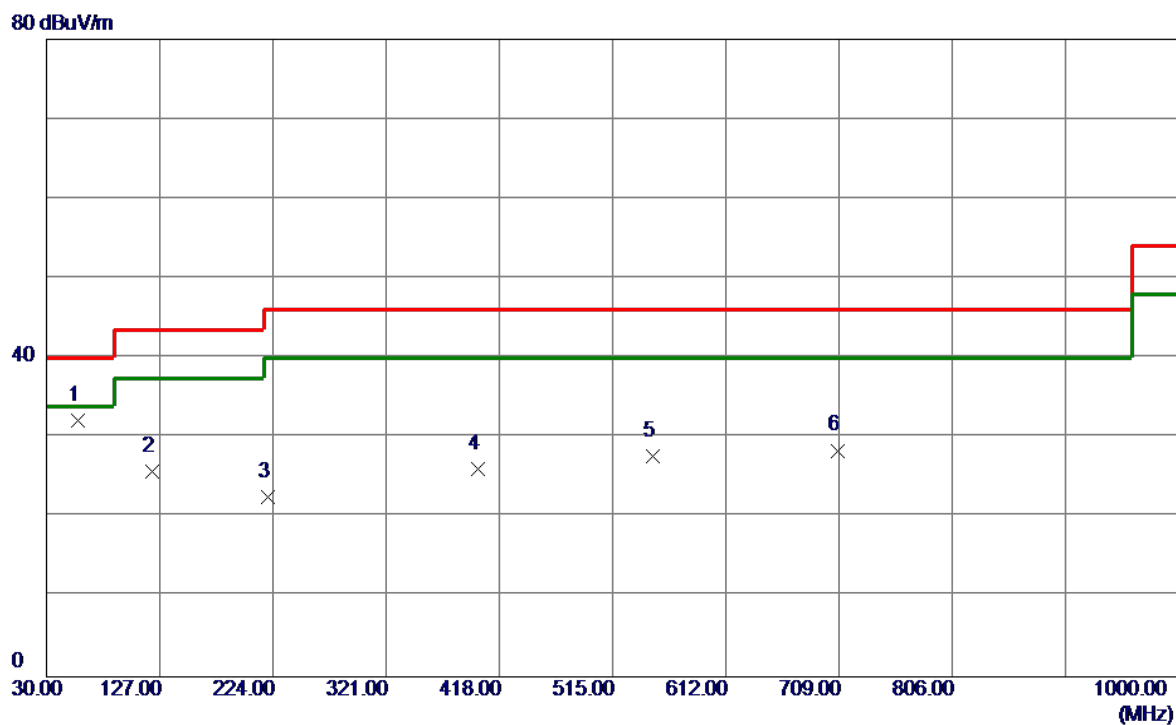

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 57.1600      | 44.76                      | -12.54                  | 32.22                     | 40.00           | -7.78        | Peak     |         |
| 2   | 120.2100     | 39.42                      | -13.66                  | 25.76                     | 43.50           | -17.74       | Peak     |         |
| 3   | 220.1200     | 36.06                      | -13.53                  | 22.53                     | 46.00           | -23.47       | Peak     |         |
| 4   | 399.5700     | 34.27                      | -8.12                   | 26.15                     | 46.00           | -19.85       | Peak     |         |
| 5   | 549.9200     | 32.13                      | -4.44                   | 27.69                     | 46.00           | -18.31       | Peak     |         |
| 6   | 708.0300     | 29.19                      | -0.79                   | 28.40                     | 46.00           | -17.60       | Peak     |         |

Test Mode: UNII-2C/TX A Mode 5700MHz


### Horizontal

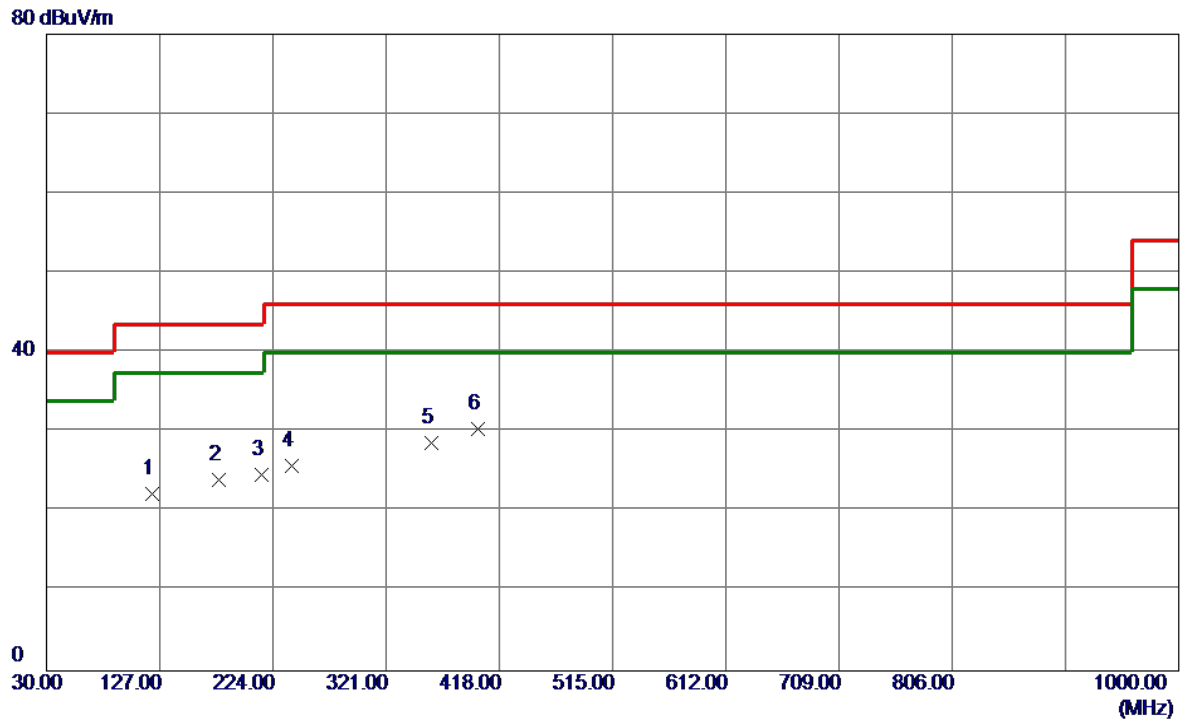

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 120.2100     | 35.94                      | -13.66                  | 22.28                     | 43.50           | -21.22       | Peak     |         |
| 2   | 177.4400     | 35.40                      | -11.35                  | 24.05                     | 43.50           | -19.45       | Peak     |         |
| 3   | 214.3000     | 37.87                      | -13.28                  | 24.59                     | 43.50           | -18.91       | Peak     |         |
| 4   | 240.4900     | 39.13                      | -13.35                  | 25.78                     | 46.00           | -20.22       | Peak     |         |
| 5   | 359.8000     | 37.74                      | -9.17                   | 28.57                     | 46.00           | -17.43       | Peak     |         |
| 6 * | 399.5700     | 38.53                      | -8.12                   | 30.41                     | 46.00           | -15.59       | Peak     |         |

Test Mode: UNII-3/TX A Mode 5745MHz


Vertical

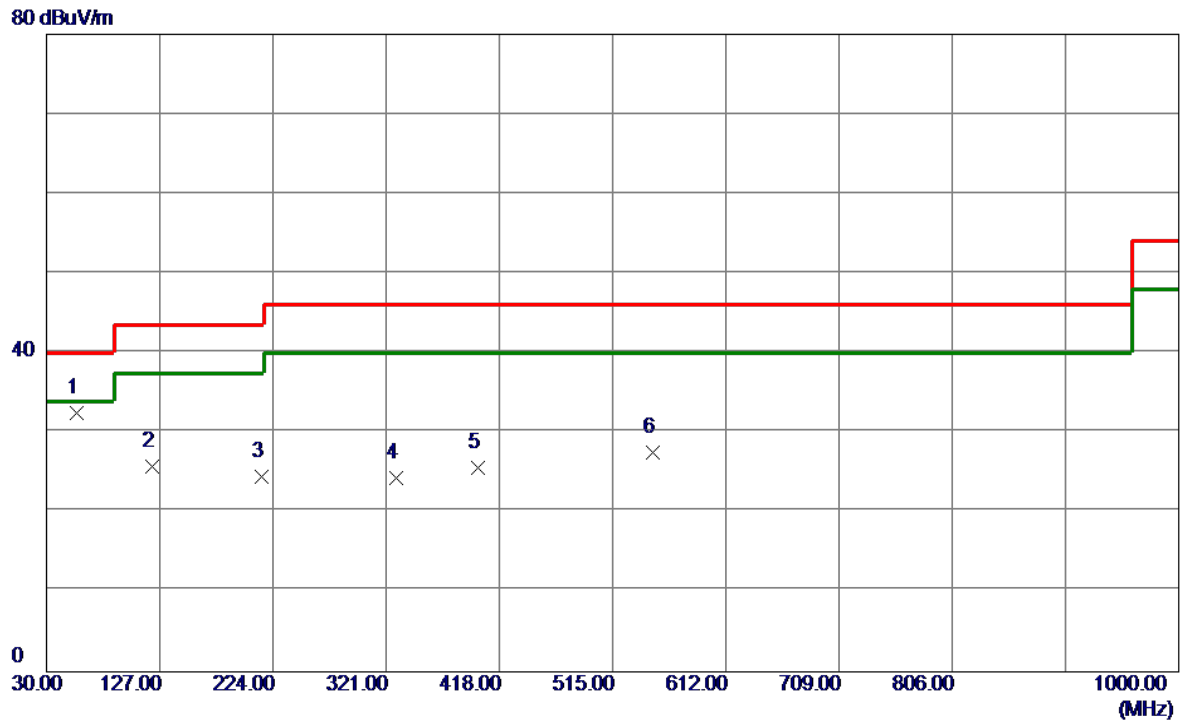

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 56.1900      | 44.75                      | -12.26                  | 32.49                     | 40.00           | -7.51        | Peak     |         |
| 2   | 120.2100     | 39.45                      | -13.66                  | 25.79                     | 43.50           | -17.71       | Peak     |         |
| 3   | 214.3000     | 37.77                      | -13.28                  | 24.49                     | 43.50           | -19.01       | Peak     |         |
| 4   | 329.7300     | 34.20                      | -9.91                   | 24.29                     | 46.00           | -21.71       | Peak     |         |
| 5   | 399.5700     | 33.66                      | -8.12                   | 25.54                     | 46.00           | -20.46       | Peak     |         |
| 6   | 549.9200     | 31.91                      | -4.44                   | 27.47                     | 46.00           | -18.53       | Peak     |         |

Test Mode: UNII-3/TX A Mode 5745MHz


### Horizontal

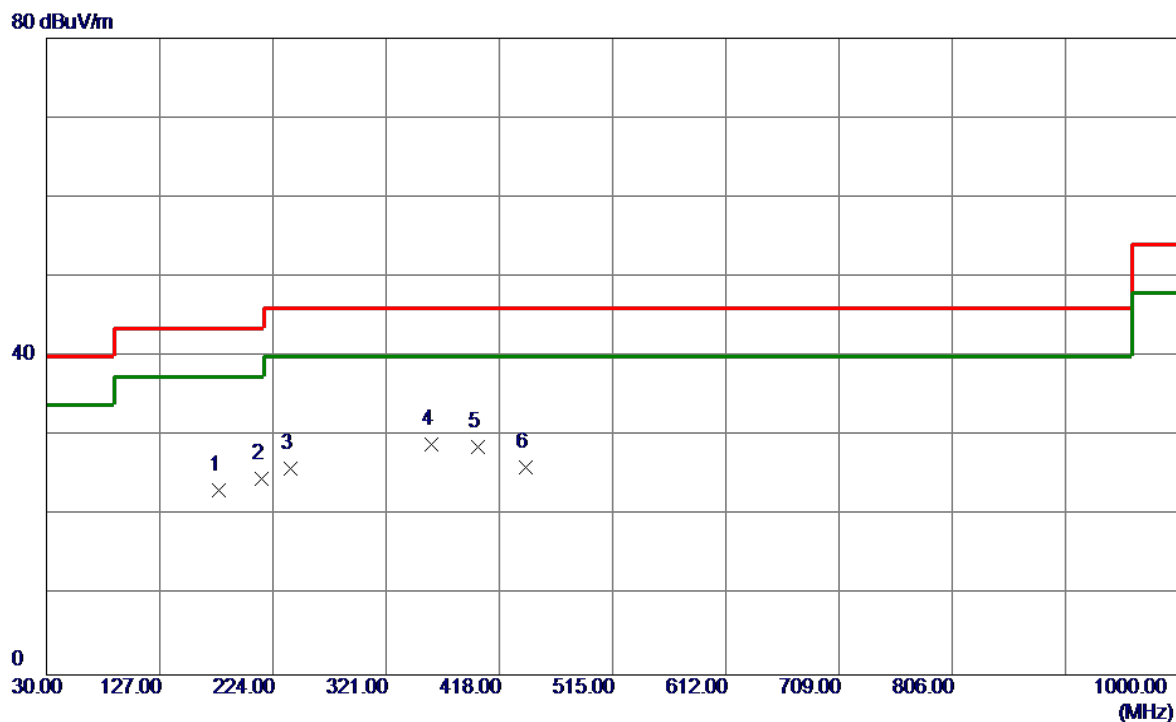

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 177.4400     | 34.62                      | -11.35                  | 23.27                     | 43.50           | -20.23       | Peak     |         |
| 2   | 214.3000     | 37.90                      | -13.28                  | 24.62                     | 43.50           | -18.88       | Peak     |         |
| 3   | 239.5200     | 39.24                      | -13.35                  | 25.89                     | 46.00           | -20.11       | Peak     |         |
| 4 * | 359.8000     | 38.17                      | -9.17                   | 29.00                     | 46.00           | -17.00       | Peak     |         |
| 5   | 399.5700     | 36.71                      | -8.12                   | 28.59                     | 46.00           | -17.41       | Peak     |         |
| 6   | 440.3100     | 33.24                      | -7.11                   | 26.13                     | 46.00           | -19.87       | Peak     |         |

Test Mode: UNII-3/TX A Mode 5785MHz


Vertical

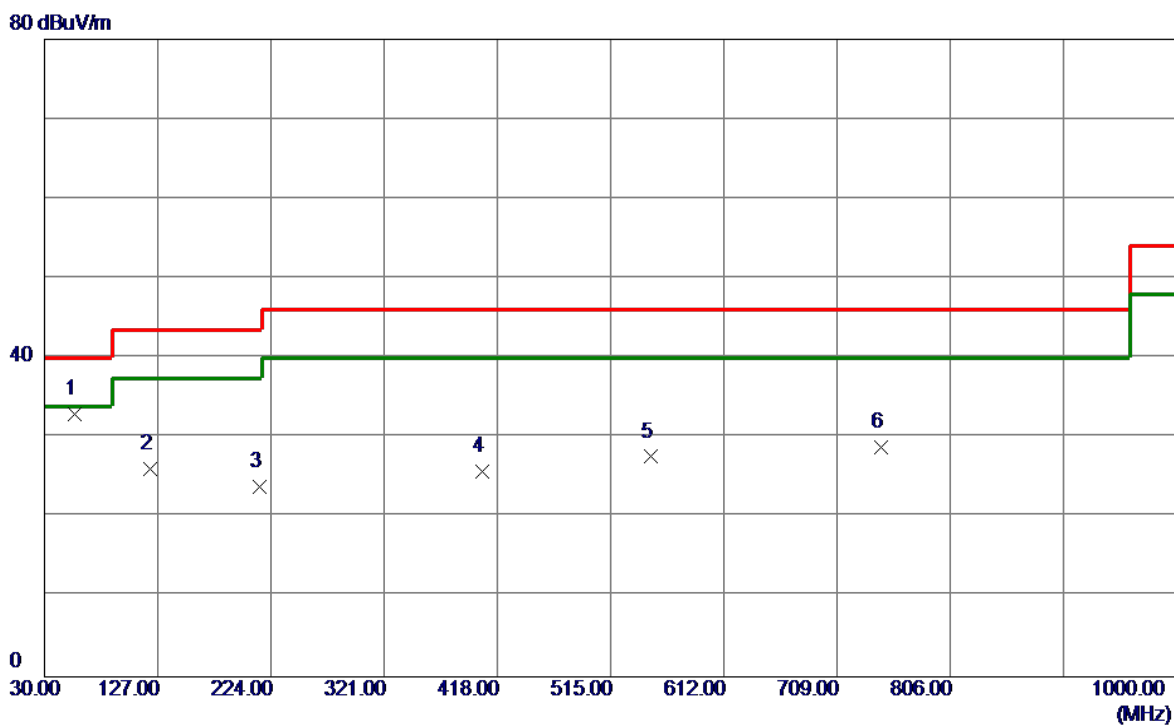

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 56.1900      | 45.18                      | -12.26                  | 32.92                     | 40.00           | -7.08        | Peak     |         |
| 2   | 120.2100     | 39.76                      | -13.66                  | 26.10                     | 43.50           | -17.40       | Peak     |         |
| 3   | 214.3000     | 37.09                      | -13.28                  | 23.81                     | 43.50           | -19.69       | Peak     |         |
| 4   | 405.3900     | 33.78                      | -7.98                   | 25.80                     | 46.00           | -20.20       | Peak     |         |
| 5   | 549.9200     | 32.04                      | -4.44                   | 27.60                     | 46.00           | -18.40       | Peak     |         |
| 6   | 746.8300     | 28.88                      | -0.12                   | 28.76                     | 46.00           | -17.24       | Peak     |         |

Test Mode: UNII-3/TX A Mode 5785MHz


### Horizontal

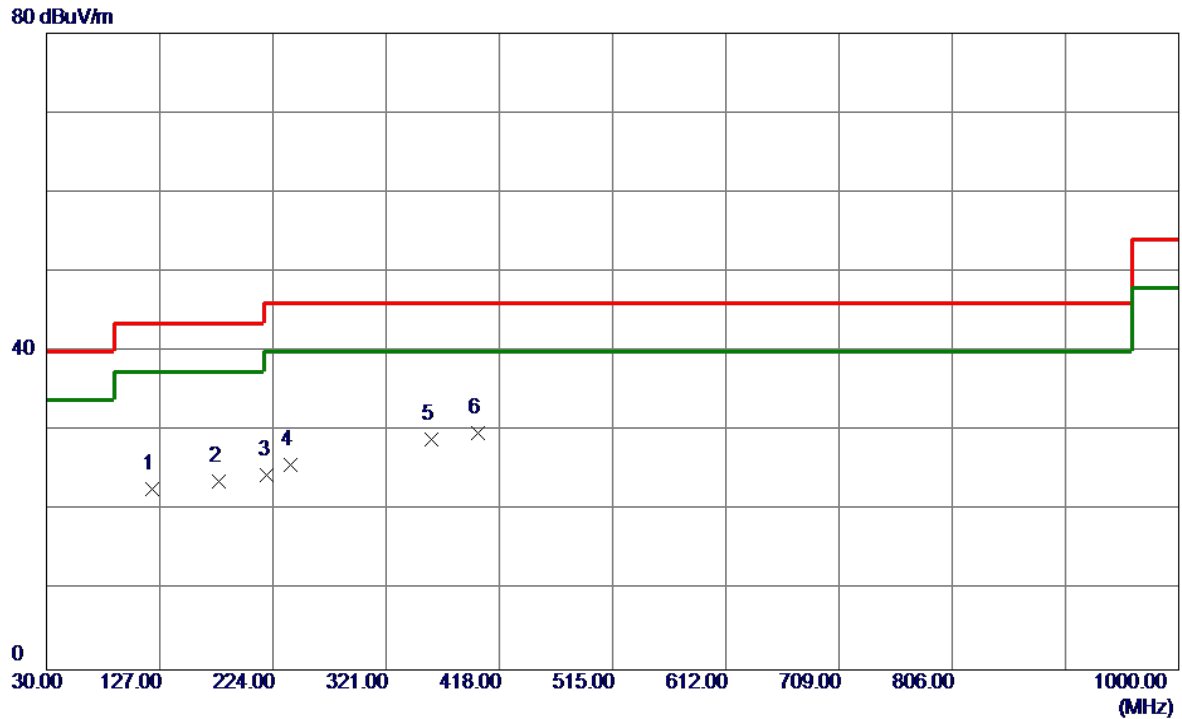

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 120.2100     | 36.35                      | -13.66                  | 22.69                     | 43.50           | -20.81       | Peak     |         |
| 2   | 177.4400     | 35.08                      | -11.35                  | 23.73                     | 43.50           | -19.77       | Peak     |         |
| 3   | 219.1500     | 37.97                      | -13.50                  | 24.47                     | 46.00           | -21.53       | Peak     |         |
| 4   | 239.5200     | 39.08                      | -13.35                  | 25.73                     | 46.00           | -20.27       | Peak     |         |
| 5   | 359.8000     | 38.06                      | -9.17                   | 28.89                     | 46.00           | -17.11       | Peak     |         |
| 6 * | 399.5700     | 37.90                      | -8.12                   | 29.78                     | 46.00           | -16.22       | Peak     |         |

Test Mode: UNII-3/TX A Mode 5825MHz


Vertical

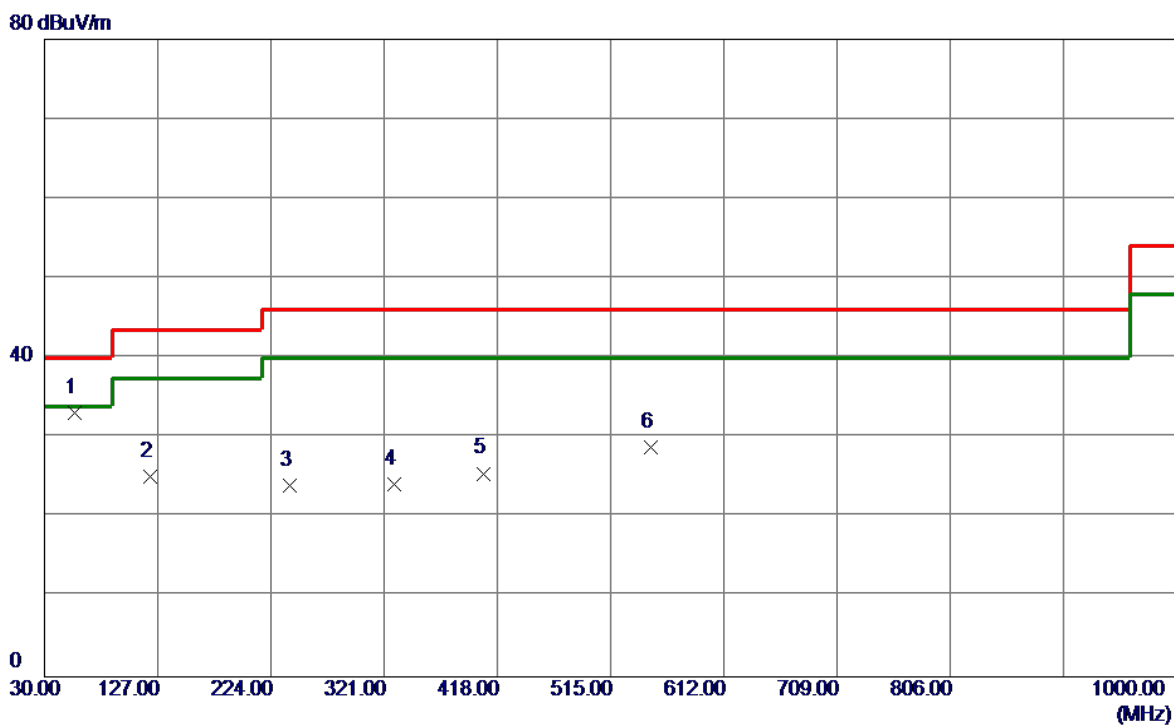

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 56.1900      | 45.45                      | -12.26                  | 33.19                     | 40.00           | -6.81        | Peak     |         |
| 2   | 120.2100     | 38.78                      | -13.66                  | 25.12                     | 43.50           | -18.38       | Peak     |         |
| 3   | 240.4900     | 37.34                      | -13.35                  | 23.99                     | 46.00           | -22.01       | Peak     |         |
| 4   | 329.7300     | 34.08                      | -9.91                   | 24.17                     | 46.00           | -21.83       | Peak     |         |
| 5   | 406.3599     | 33.47                      | -7.95                   | 25.52                     | 46.00           | -20.48       | Peak     |         |
| 6   | 549.9200     | 33.19                      | -4.44                   | 28.75                     | 46.00           | -17.25       | Peak     |         |

Test Mode: UNII-3/TX A Mode 5825MHz

# Horizontal

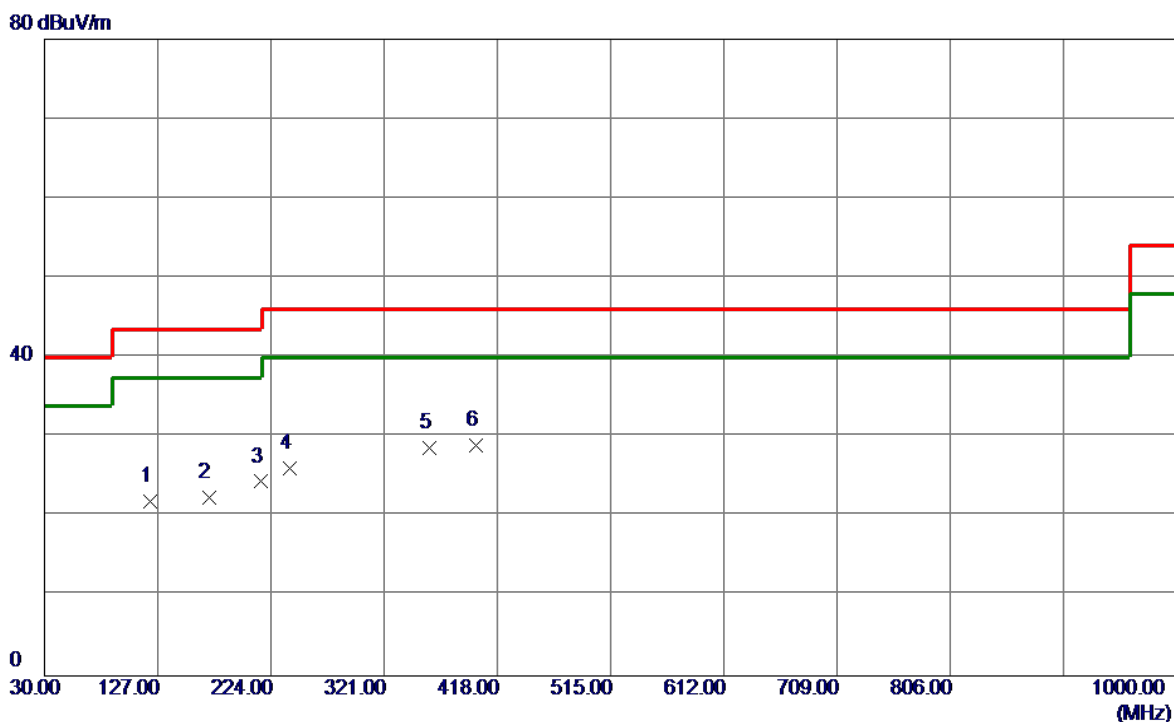


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 120.2100     | 35.55                      | -13.66                  | 21.89                     | 43.50           | -21.61       | Peak     |         |
| 2   | 170.6500     | 33.48                      | -11.12                  | 22.36                     | 43.50           | -21.14       | Peak     |         |
| 3   | 215.2700     | 37.72                      | -13.32                  | 24.40                     | 43.50           | -19.10       | Peak     |         |
| 4   | 240.4900     | 39.40                      | -13.35                  | 26.05                     | 46.00           | -19.95       | Peak     |         |
| 5   | 359.8000     | 37.75                      | -9.17                   | 28.58                     | 46.00           | -17.42       | Peak     |         |
| 6 * | 399.5700     | 37.10                      | -8.12                   | 28.98                     | 46.00           | -17.02       | Peak     |         |

# ANT 2

Test Mode: UNII-1/TX A Mode 5180MHz


## Vertical

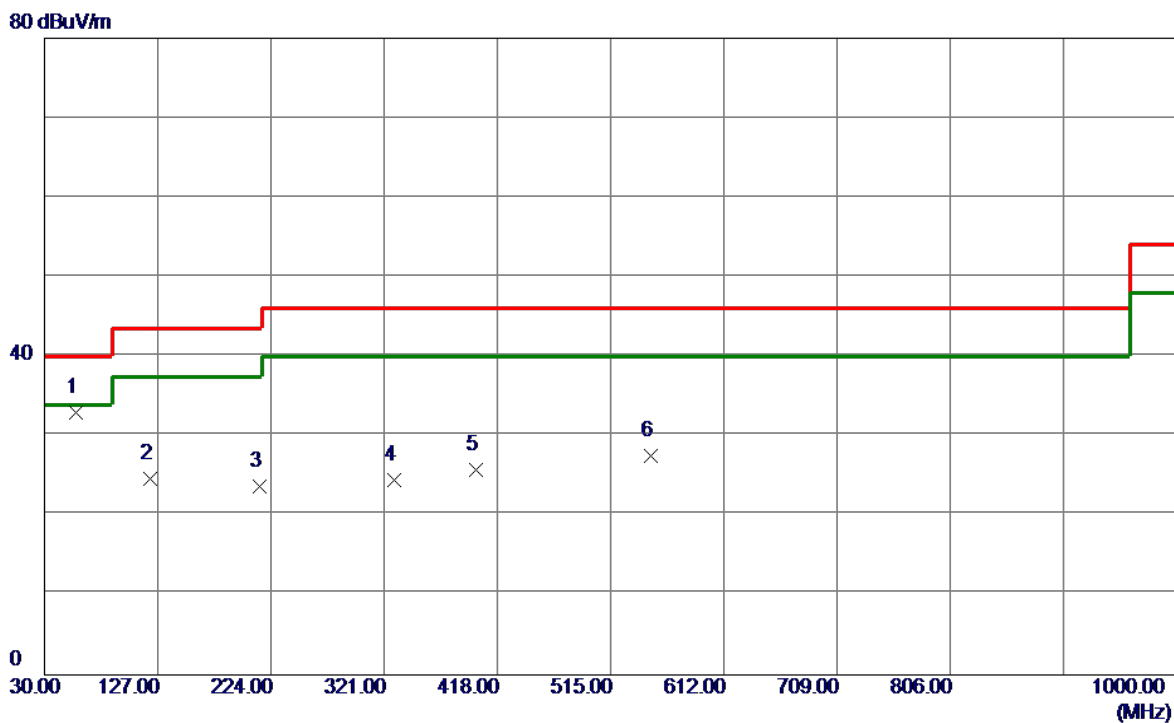

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 57.1600      | 45.54                      | -12.54                  | 33.00                     | 40.00           | -7.00        | Peak     |         |
| 2   | 120.2100     | 38.25                      | -13.66                  | 24.59                     | 43.50           | -18.91       | Peak     |         |
| 3   | 214.3000     | 36.96                      | -13.28                  | 23.68                     | 43.50           | -19.82       | Peak     |         |
| 4   | 329.7300     | 34.35                      | -9.91                   | 24.44                     | 46.00           | -21.56       | Peak     |         |
| 5   | 399.5700     | 33.85                      | -8.12                   | 25.73                     | 46.00           | -20.27       | Peak     |         |
| 6   | 549.9200     | 32.02                      | -4.44                   | 27.58                     | 46.00           | -18.42       | Peak     |         |

Test Mode: UNII-1/TX A Mode 5180MHz


### Horizontal

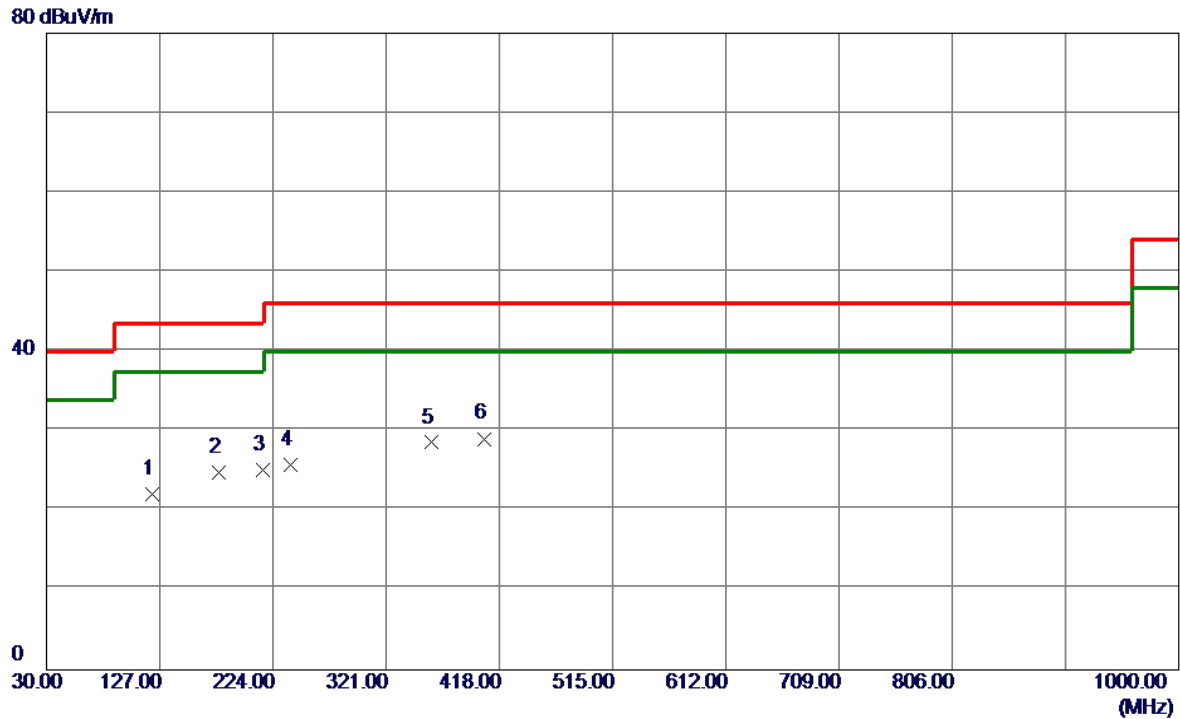

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 120.2100     | 35.81                      | -13.66                  | 22.15                     | 43.50           | -21.35       | Peak     |         |
| 2   | 177.4400     | 36.08                      | -11.35                  | 24.73                     | 43.50           | -18.77       | Peak     |         |
| 3   | 215.2700     | 38.38                      | -13.32                  | 25.06                     | 43.50           | -18.44       | Peak     |         |
| 4   | 239.5200     | 39.16                      | -13.35                  | 25.81                     | 46.00           | -20.19       | Peak     |         |
| 5   | 359.8000     | 37.73                      | -9.17                   | 28.56                     | 46.00           | -17.44       | Peak     |         |
| 6 * | 405.3900     | 37.02                      | -7.98                   | 29.04                     | 46.00           | -16.96       | Peak     |         |

Test Mode: UNII-1/TX A Mode 5200MHz


Vertical

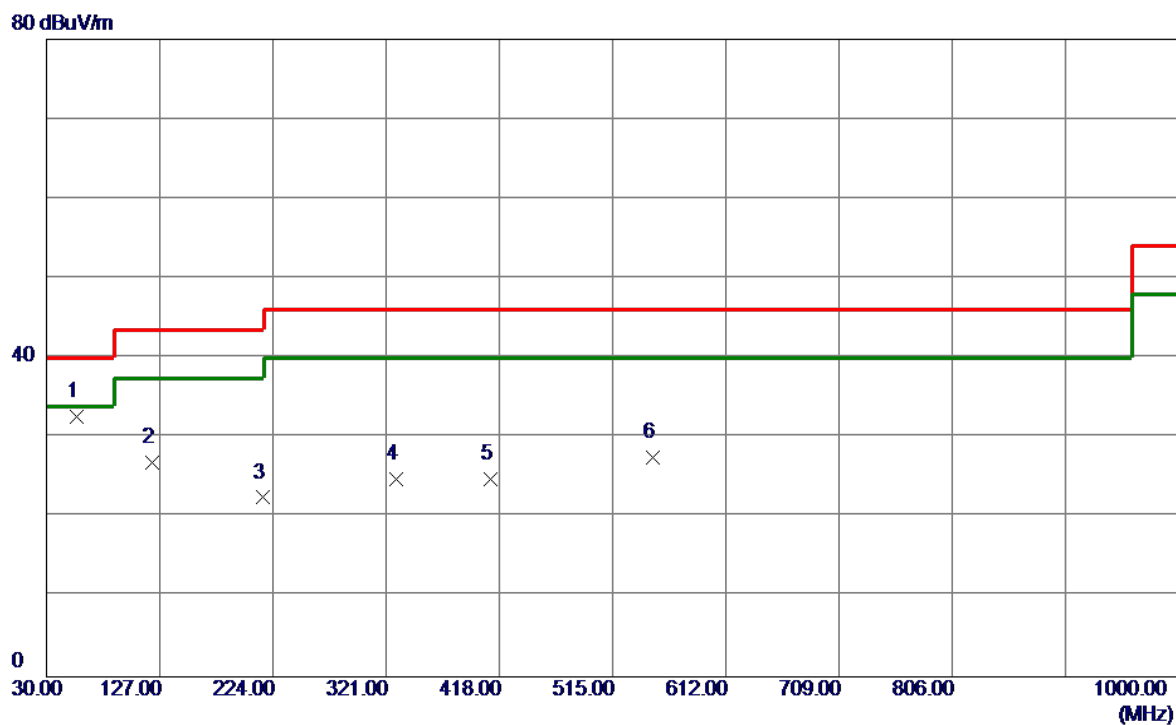

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 56.1900      | 44.87                      | -12.26                  | 32.61                     | 40.00           | -7.39        | Peak     |         |
| 2   | 120.2100     | 40.61                      | -13.66                  | 26.95                     | 43.50           | -16.55       | Peak     |         |
| 3   | 215.2700     | 35.80                      | -13.32                  | 22.48                     | 43.50           | -21.02       | Peak     |         |
| 4   | 329.7300     | 34.64                      | -9.91                   | 24.73                     | 46.00           | -21.27       | Peak     |         |
| 5   | 410.2400     | 32.60                      | -7.86                   | 24.74                     | 46.00           | -21.26       | Peak     |         |
| 6   | 549.9200     | 31.95                      | -4.44                   | 27.51                     | 46.00           | -18.49       | Peak     |         |

Test Mode: UNII-1/TX A Mode 5200MHz


### Horizontal

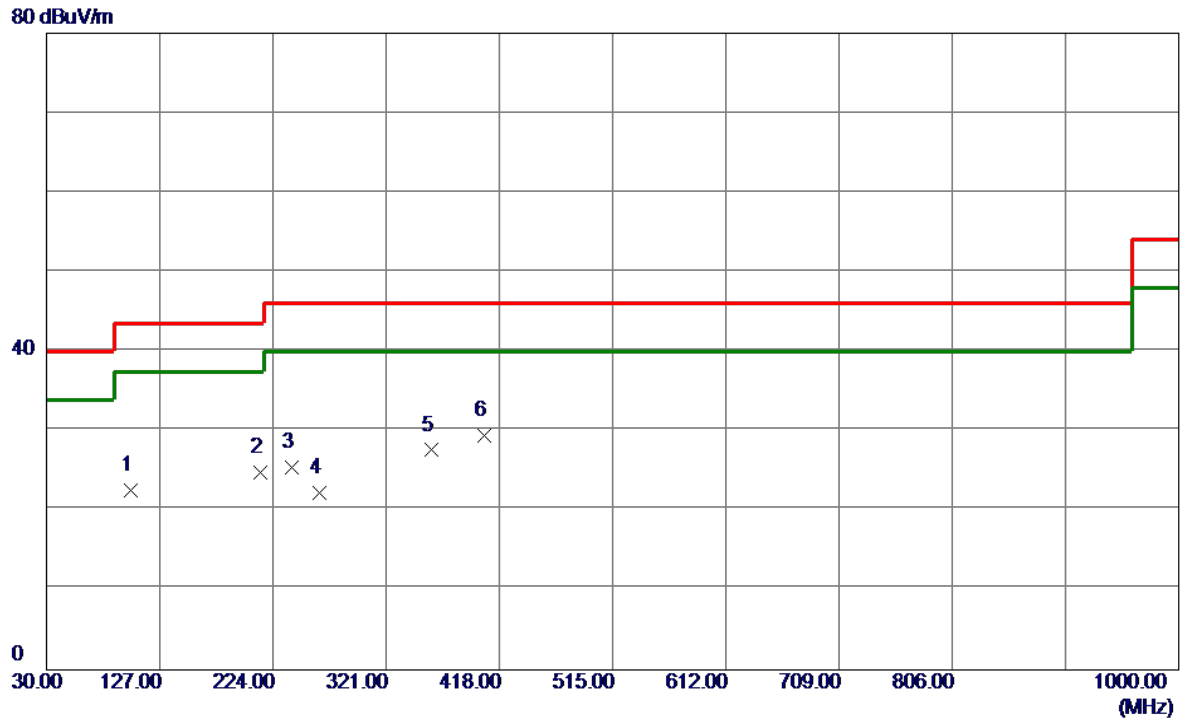

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 101.7800     | 39.16                      | -16.58                  | 22.58                     | 43.50           | -20.92       | Peak     |         |
| 2   | 213.3300     | 38.05                      | -13.23                  | 24.82                     | 43.50           | -18.68       | Peak     |         |
| 3   | 240.4900     | 38.86                      | -13.35                  | 25.51                     | 46.00           | -20.49       | Peak     |         |
| 4   | 263.7700     | 35.43                      | -13.26                  | 22.17                     | 46.00           | -23.83       | Peak     |         |
| 5   | 359.8000     | 36.77                      | -9.17                   | 27.60                     | 46.00           | -18.40       | Peak     |         |
| 6 * | 405.3900     | 37.35                      | -7.98                   | 29.37                     | 46.00           | -16.63       | Peak     |         |

Test Mode: UNII-1/TX A Mode 5240MHz


Vertical

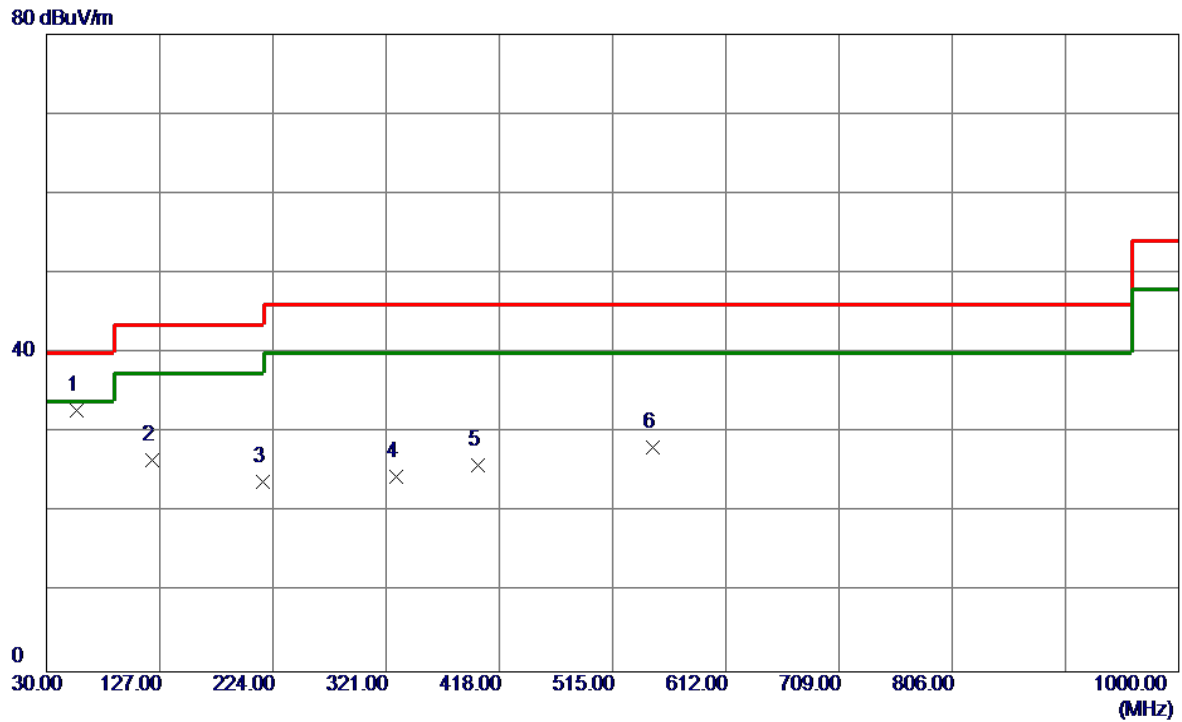

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 56.1900      | 45.03                      | -12.26                  | 32.77                     | 40.00           | -7.23        | Peak     |         |
| 2   | 120.2100     | 40.16                      | -13.66                  | 26.50                     | 43.50           | -17.00       | Peak     |         |
| 3   | 215.2700     | 37.13                      | -13.32                  | 23.81                     | 43.50           | -19.69       | Peak     |         |
| 4   | 329.7300     | 34.40                      | -9.91                   | 24.49                     | 46.00           | -21.51       | Peak     |         |
| 5   | 399.5700     | 34.00                      | -8.12                   | 25.88                     | 46.00           | -20.12       | Peak     |         |
| 6   | 549.9200     | 32.62                      | -4.44                   | 28.18                     | 46.00           | -17.82       | Peak     |         |

Test Mode: UNII-1/TX A Mode 5240MHz


### Horizontal

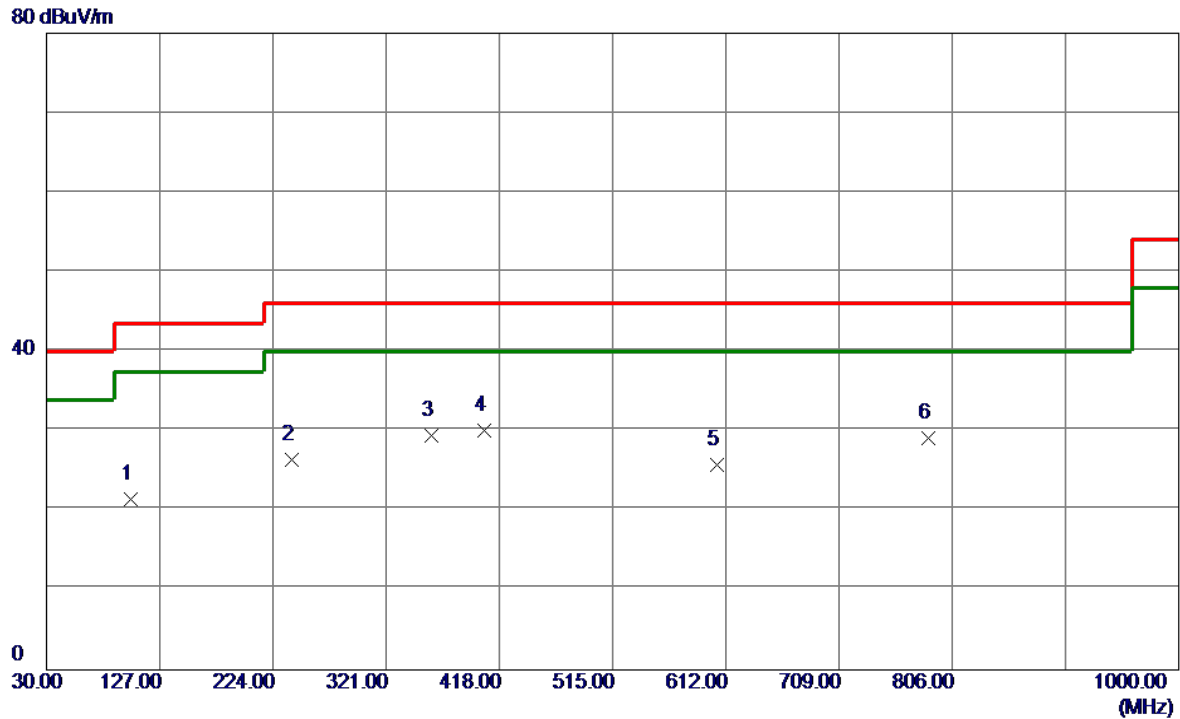

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 101.7800     | 38.06                      | -16.58                  | 21.48                     | 43.50           | -22.02       | Peak     |         |
| 2   | 240.4900     | 39.72                      | -13.35                  | 26.37                     | 46.00           | -19.63       | Peak     |         |
| 3   | 359.8000     | 38.61                      | -9.17                   | 29.44                     | 46.00           | -16.56       | Peak     |         |
| 4 * | 405.3900     | 37.99                      | -7.98                   | 30.01                     | 46.00           | -15.99       | Peak     |         |
| 5   | 604.2400     | 29.28                      | -3.51                   | 25.77                     | 46.00           | -20.23       | Peak     |         |
| 6   | 785.6300     | 28.45                      | 0.60                    | 29.05                     | 46.00           | -16.95       | Peak     |         |

Test Mode: UNII-2A/TX A Mode 5260MHz


# Vertical

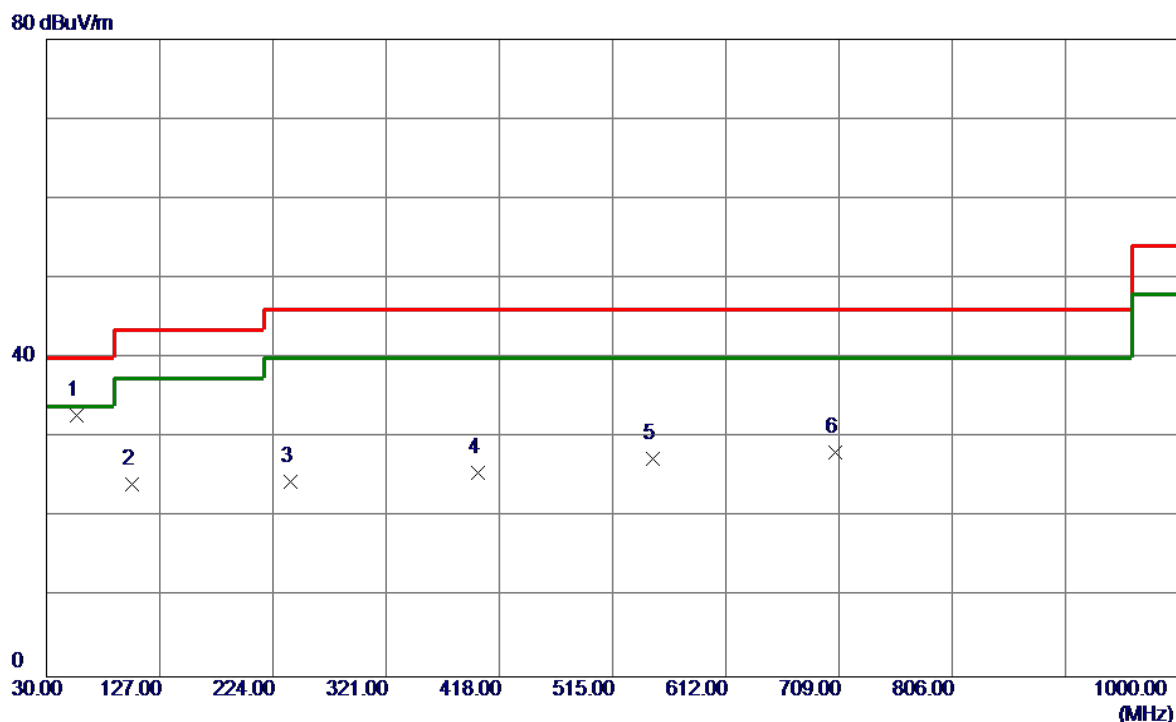

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 56.1900      | 45.12                      | -12.26                  | 32.86                     | 40.00           | -7.14        | Peak     |         |
| 2   | 103.7200     | 40.40                      | -16.24                  | 24.16                     | 43.50           | -19.34       | Peak     |         |
| 3   | 239.5200     | 37.78                      | -13.35                  | 24.43                     | 46.00           | -21.57       | Peak     |         |
| 4   | 399.5700     | 33.71                      | -8.12                   | 25.59                     | 46.00           | -20.41       | Peak     |         |
| 5   | 549.9200     | 31.84                      | -4.44                   | 27.40                     | 46.00           | -18.60       | Peak     |         |
| 6   | 706.0900     | 29.00                      | -0.83                   | 28.17                     | 46.00           | -17.83       | Peak     |         |

Test Mode: UNII-2A/TX A Mode 5260MHz


### Horizontal

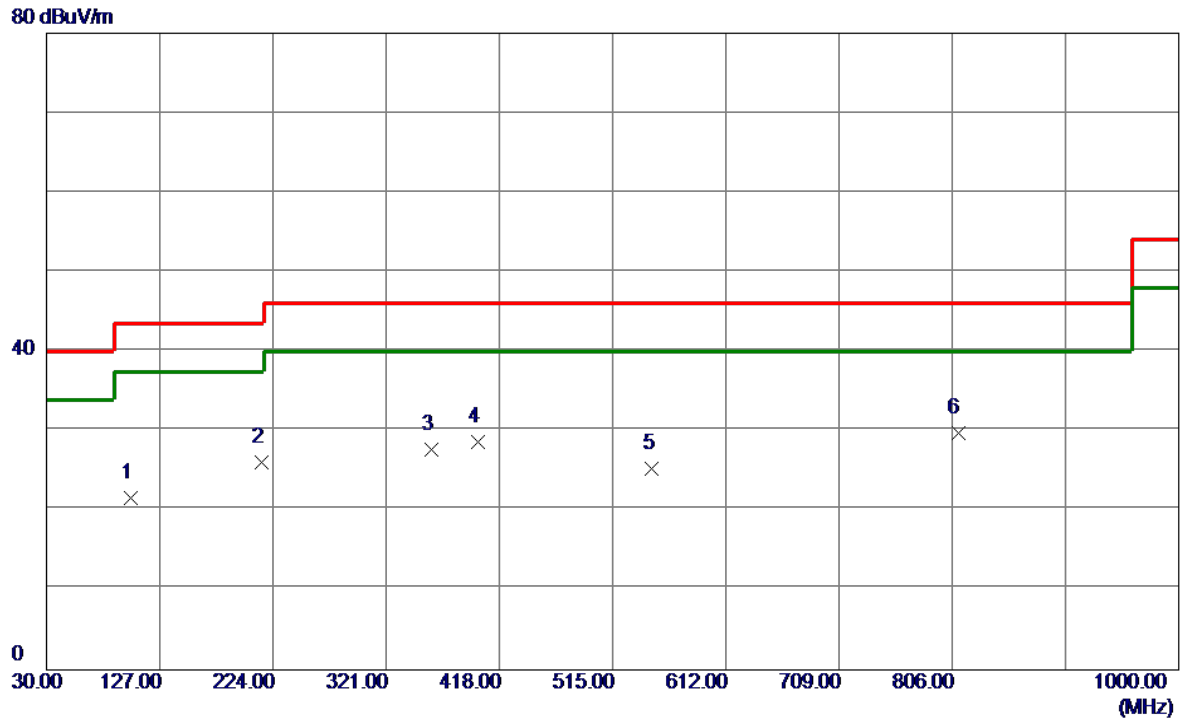

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 101.7800     | 38.16                      | -16.58                  | 21.58                     | 43.50           | -21.92       | Peak     |         |
| 2   | 214.3000     | 39.29                      | -13.28                  | 26.01                     | 43.50           | -17.49       | Peak     |         |
| 3   | 359.8000     | 36.87                      | -9.17                   | 27.70                     | 46.00           | -18.30       | Peak     |         |
| 4   | 399.5700     | 36.79                      | -8.12                   | 28.67                     | 46.00           | -17.33       | Peak     |         |
| 5   | 548.9500     | 29.70                      | -4.46                   | 25.24                     | 46.00           | -20.76       | Peak     |         |
| 6 * | 810.8500     | 28.69                      | 1.10                    | 29.79                     | 46.00           | -16.21       | Peak     |         |

Test Mode: UNII-2A/TX A Mode 5300MHz


Vertical

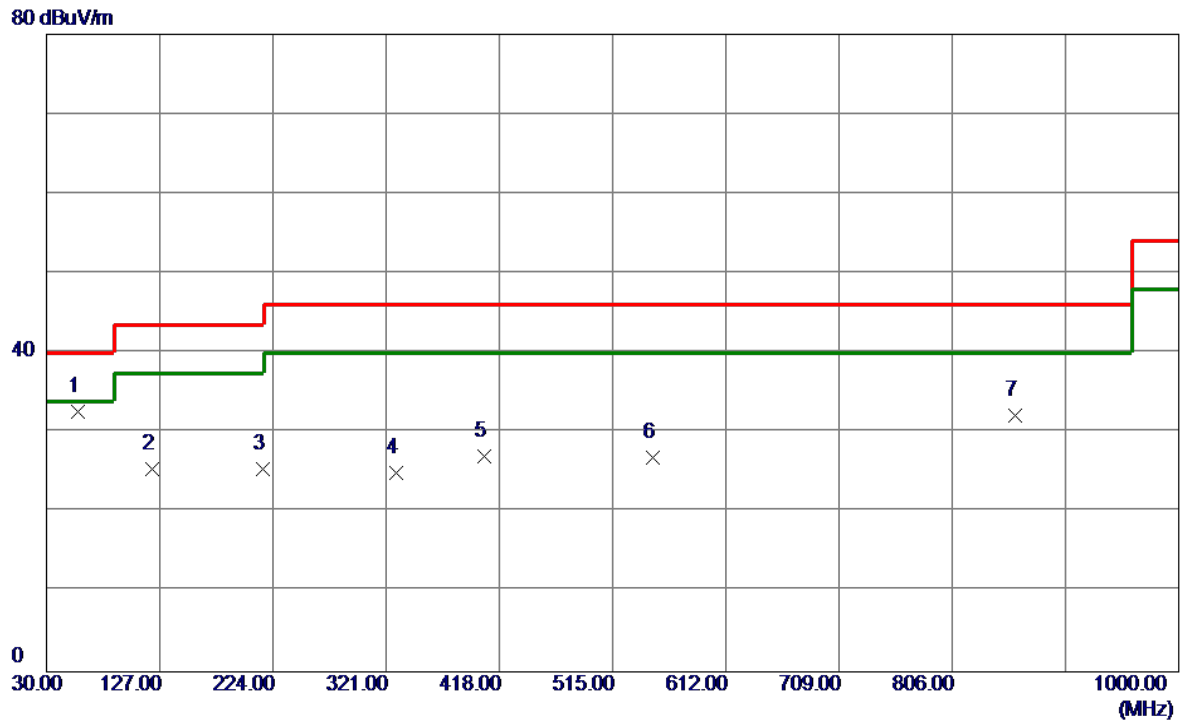

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 57.1600      | 45.16                      | -12.54                  | 32.62                     | 40.00           | -7.38        | Peak     |         |
| 2   | 120.2100     | 39.13                      | -13.66                  | 25.47                     | 43.50           | -18.03       | Peak     |         |
| 3   | 215.2700     | 38.81                      | -13.32                  | 25.49                     | 43.50           | -18.01       | Peak     |         |
| 4   | 329.7300     | 34.93                      | -9.91                   | 25.02                     | 46.00           | -20.98       | Peak     |         |
| 5   | 405.3900     | 35.03                      | -7.98                   | 27.05                     | 46.00           | -18.95       | Peak     |         |
| 6   | 549.9200     | 31.38                      | -4.44                   | 26.94                     | 46.00           | -19.06       | Peak     |         |
| 7   | 860.3200     | 29.99                      | 2.15                    | 32.14                     | 46.00           | -13.86       | Peak     |         |

Test Mode: UNII-2A/TX A Mode 5300MHz


### Horizontal

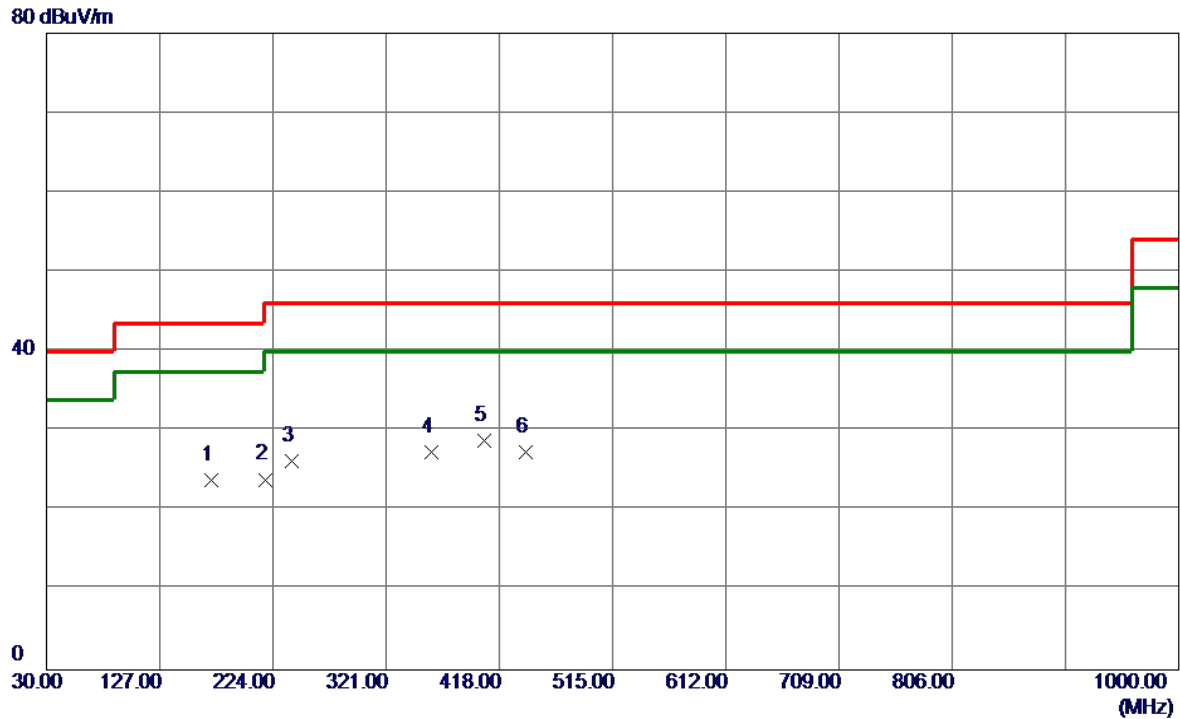

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 171.6200     | 35.04                      | -11.15                  | 23.89                     | 43.50           | -19.61       | Peak     |         |
| 2   | 217.2100     | 37.33                      | -13.41                  | 23.92                     | 46.00           | -22.08       | Peak     |         |
| 3   | 240.4900     | 39.57                      | -13.35                  | 26.22                     | 46.00           | -19.78       | Peak     |         |
| 4   | 359.8000     | 36.57                      | -9.17                   | 27.40                     | 46.00           | -18.60       | Peak     |         |
| 5 * | 405.3900     | 36.78                      | -7.98                   | 28.80                     | 46.00           | -17.20       | Peak     |         |
| 6   | 440.3100     | 34.42                      | -7.11                   | 27.31                     | 46.00           | -18.69       | Peak     |         |

Test Mode: UNII-2A/TX A Mode 5320MHz

Vertical

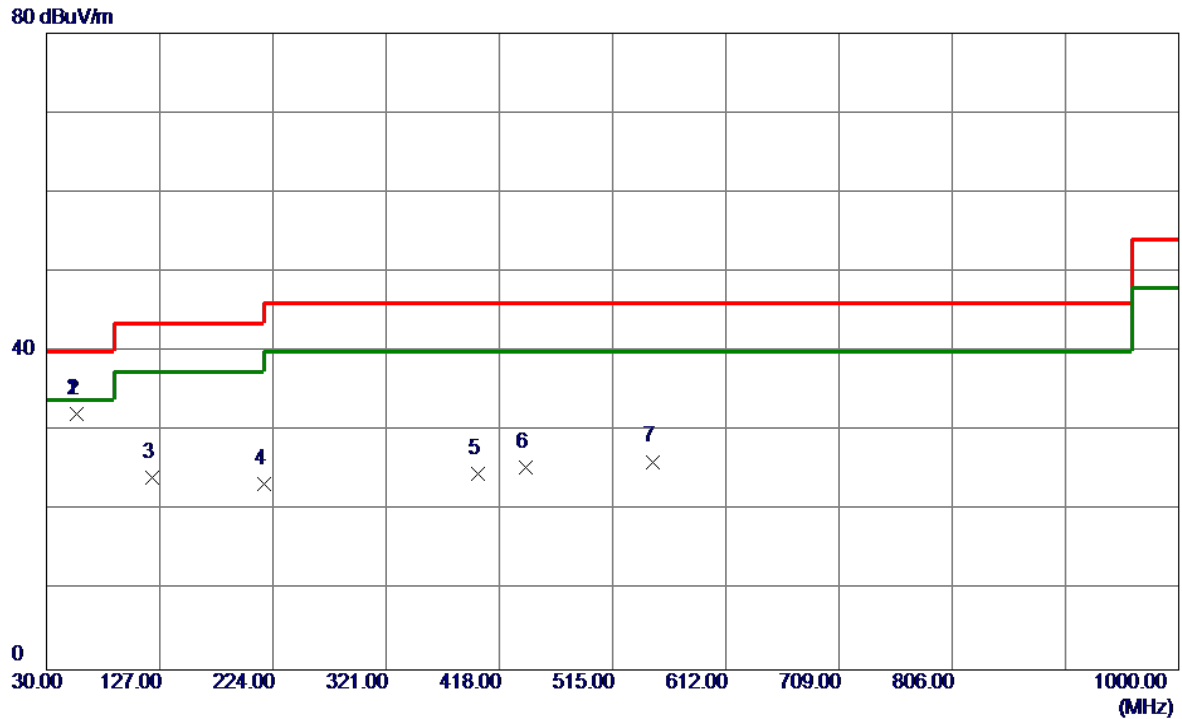


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 56.1900      | 44.35                      | -12.26                  | 32.09                     | 40.00           | -7.91        | Peak     |         |
| 2   | 56.1900      | 44.35                      | -12.26                  | 32.09                     | 40.00           | -7.91        | Peak     |         |
| 3   | 120.2100     | 37.85                      | -13.66                  | 24.19                     | 43.50           | -19.31       | Peak     |         |
| 4   | 216.2400     | 36.70                      | -13.37                  | 23.33                     | 46.00           | -22.67       | Peak     |         |
| 5   | 399.5700     | 32.83                      | -8.12                   | 24.71                     | 46.00           | -21.29       | Peak     |         |
| 6   | 440.3100     | 32.57                      | -7.11                   | 25.46                     | 46.00           | -20.54       | Peak     |         |
| 7   | 549.9200     | 30.60                      | -4.44                   | 26.16                     | 46.00           | -19.84       | Peak     |         |

Test Mode: UNII-2A/TX A Mode 5320MHz

# Horizontal


80 dBuV/m

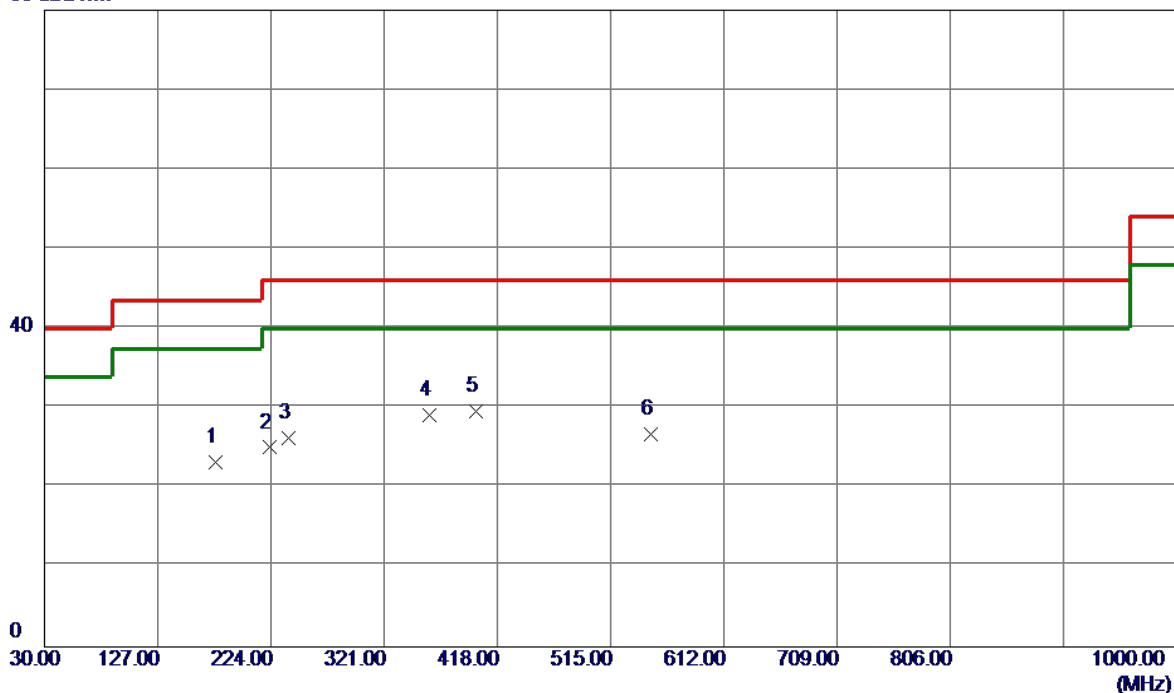

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 176.4700     | 34.59                      | -11.32                  | 23.27                     | 43.50           | -20.23       | Peak     |         |
| 2   | 223.0300     | 38.47                      | -13.43                  | 25.04                     | 46.00           | -20.96       | Peak     |         |
| 3   | 239.5200     | 39.57                      | -13.35                  | 26.22                     | 46.00           | -19.78       | Peak     |         |
| 4   | 359.8000     | 38.35                      | -9.17                   | 29.18                     | 46.00           | -16.82       | Peak     |         |
| 5 * | 399.5700     | 37.67                      | -8.12                   | 29.55                     | 46.00           | -16.45       | Peak     |         |
| 6   | 549.9200     | 31.19                      | -4.44                   | 26.75                     | 46.00           | -19.25       | Peak     |         |

Test Mode: UNII-2C/TX A Mode 5500MHz


Vertical

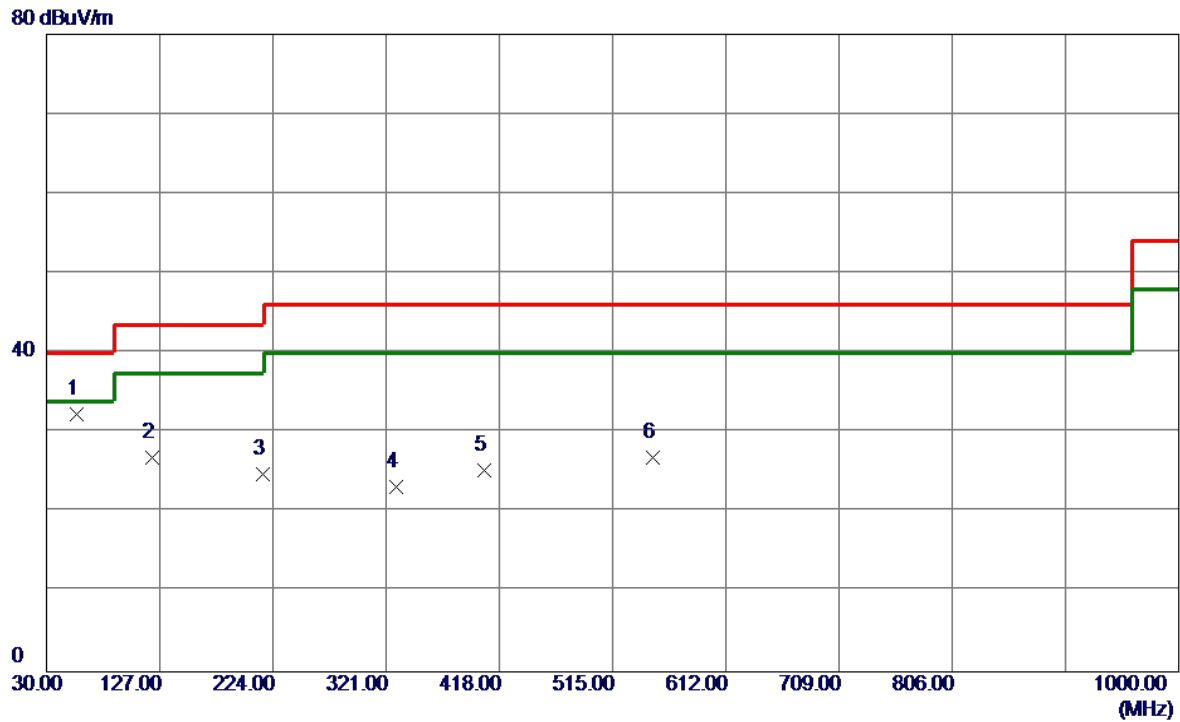

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 56.1900      | 44.58                      | -12.26                  | 32.32                     | 40.00           | -7.68        | Peak     |         |
| 2   | 120.2100     | 40.51                      | -13.66                  | 26.85                     | 43.50           | -16.65       | Peak     |         |
| 3   | 215.2700     | 38.16                      | -13.32                  | 24.84                     | 43.50           | -18.66       | Peak     |         |
| 4   | 329.7300     | 33.12                      | -9.91                   | 23.21                     | 46.00           | -22.79       | Peak     |         |
| 5   | 405.3900     | 33.19                      | -7.98                   | 25.21                     | 46.00           | -20.79       | Peak     |         |
| 6   | 549.9200     | 31.27                      | -4.44                   | 26.83                     | 46.00           | -19.17       | Peak     |         |

Test Mode: UNII-2C/TX A Mode 5500MHz


### Horizontal

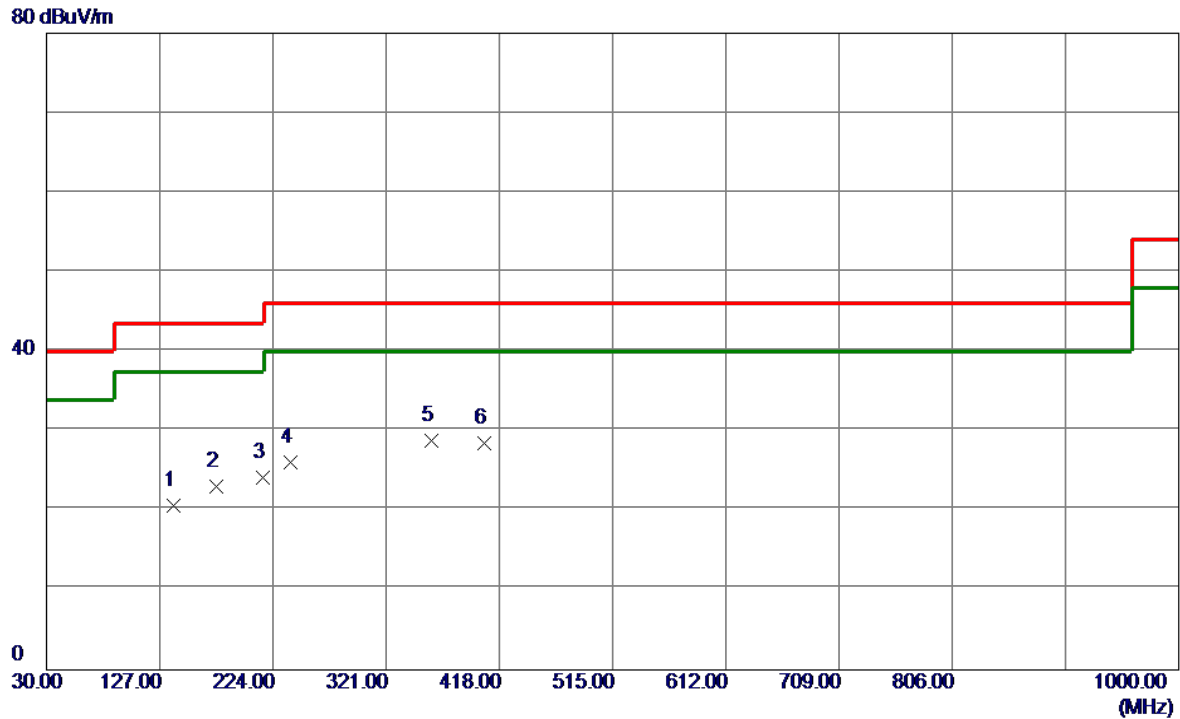

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 138.6400     | 33.25                      | -12.54                  | 20.71                     | 43.50           | -22.79       | Peak     |         |
| 2   | 175.5000     | 34.28                      | -11.28                  | 23.00                     | 43.50           | -20.50       | Peak     |         |
| 3   | 215.2700     | 37.45                      | -13.32                  | 24.13                     | 43.50           | -19.37       | Peak     |         |
| 4   | 239.5200     | 39.45                      | -13.35                  | 26.10                     | 46.00           | -19.90       | Peak     |         |
| 5 * | 359.8000     | 38.03                      | -9.17                   | 28.86                     | 46.00           | -17.14       | Peak     |         |
| 6   | 405.3900     | 36.42                      | -7.98                   | 28.44                     | 46.00           | -17.56       | Peak     |         |

Test Mode: UNII-2C/TX A Mode 5580MHz


Vertical

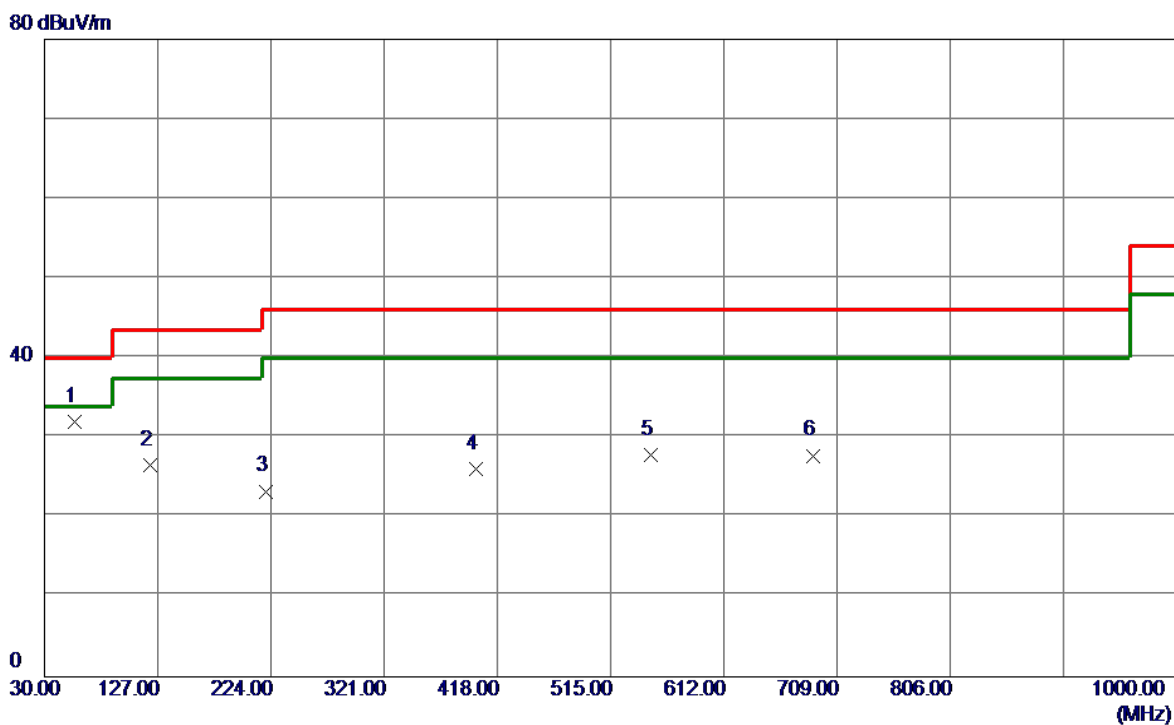

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 56.1900      | 44.19                      | -12.26                  | 31.93                     | 40.00           | -8.07        | Peak     |         |
| 2   | 120.2100     | 40.18                      | -13.66                  | 26.52                     | 43.50           | -16.98       | Peak     |         |
| 3   | 220.1200     | 36.81                      | -13.53                  | 23.28                     | 46.00           | -22.72       | Peak     |         |
| 4   | 399.5700     | 34.22                      | -8.12                   | 26.10                     | 46.00           | -19.90       | Peak     |         |
| 5   | 549.9200     | 32.24                      | -4.44                   | 27.80                     | 46.00           | -18.20       | Peak     |         |
| 6   | 688.6300     | 28.98                      | -1.22                   | 27.76                     | 46.00           | -18.24       | Peak     |         |

Test Mode: UNII-2C/TX A Mode 5580MHz


### Horizontal

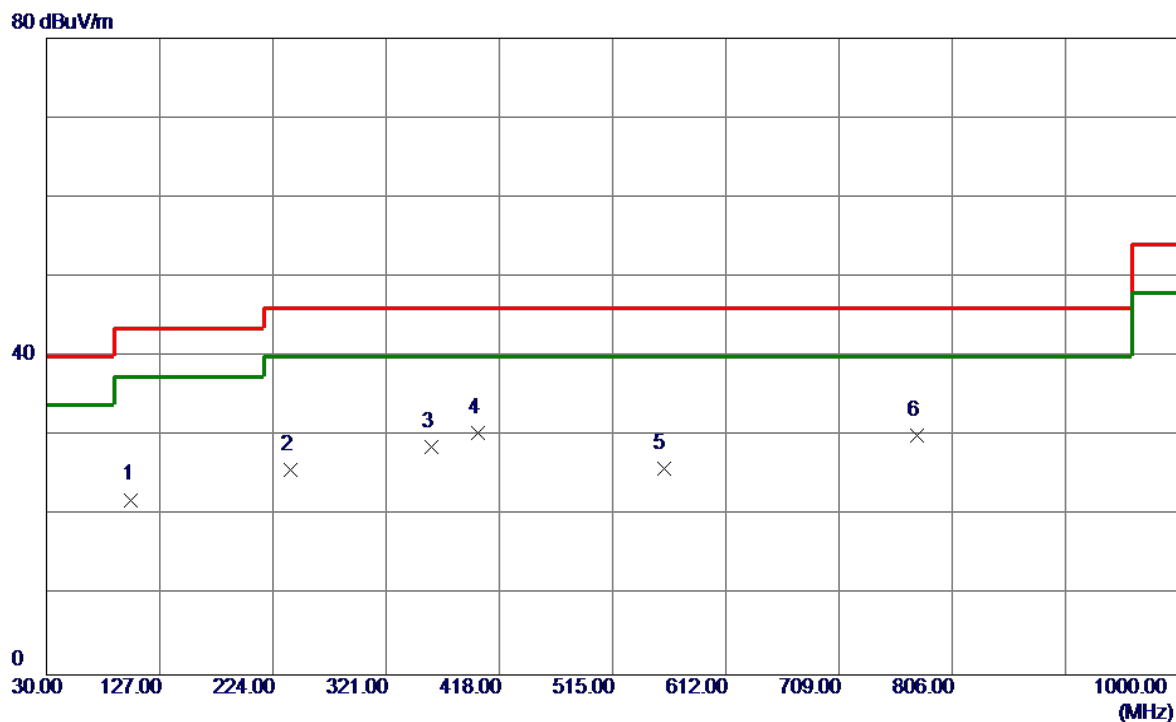

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 102.7500     | 38.41                      | -16.41                  | 22.00                     | 43.50           | -21.50       | Peak     |         |
| 2   | 239.5200     | 39.15                      | -13.35                  | 25.80                     | 46.00           | -20.20       | Peak     |         |
| 3   | 359.8000     | 37.83                      | -9.17                   | 28.66                     | 46.00           | -17.34       | Peak     |         |
| 4 * | 399.5700     | 38.47                      | -8.12                   | 30.35                     | 46.00           | -15.65       | Peak     |         |
| 5   | 558.6500     | 30.25                      | -4.30                   | 25.95                     | 46.00           | -20.05       | Peak     |         |
| 6   | 775.9300     | 29.60                      | 0.42                    | 30.02                     | 46.00           | -15.98       | Peak     |         |

Test Mode: UNII-2C/TX A Mode 5700MHz


### Vertical

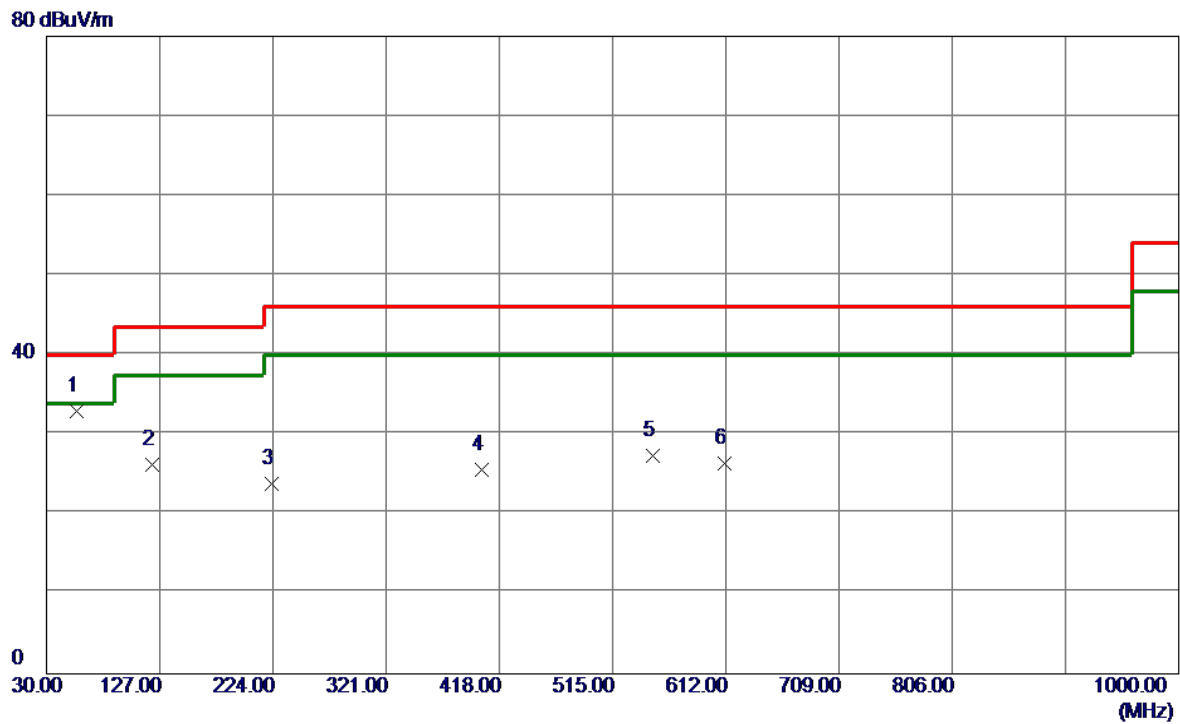

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 56.1900      | 45.25                      | -12.26                  | 32.99                     | 40.00           | -7.01        | Peak     |         |
| 2   | 120.2100     | 39.83                      | -13.66                  | 26.17                     | 43.50           | -17.33       | Peak     |         |
| 3   | 223.0300     | 37.20                      | -13.43                  | 23.77                     | 46.00           | -22.23       | Peak     |         |
| 4   | 402.4800     | 33.66                      | -8.05                   | 25.61                     | 46.00           | -20.39       | Peak     |         |
| 5   | 549.9200     | 31.74                      | -4.44                   | 27.30                     | 46.00           | -18.70       | Peak     |         |
| 6   | 611.0300     | 29.65                      | -3.31                   | 26.34                     | 46.00           | -19.66       | Peak     |         |

Test Mode: UNII-2C/TX A Mode 5700MHz


### Horizontal

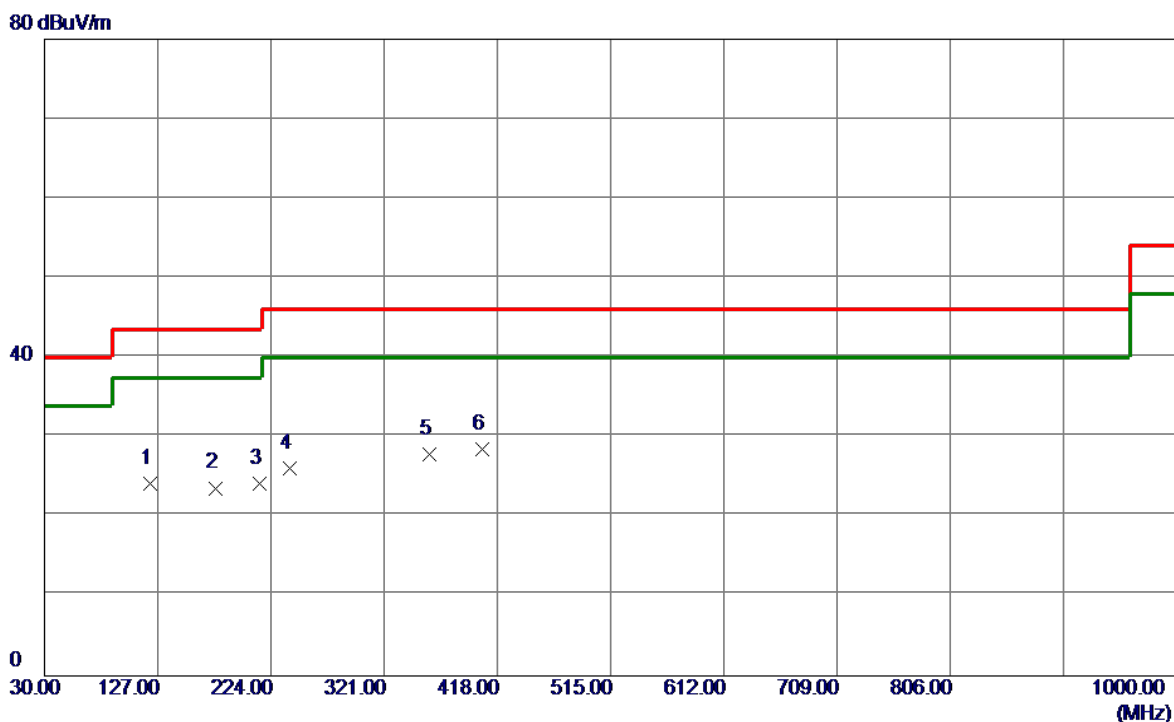

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 120.2100     | 37.80                      | -13.66                  | 24.14                     | 43.50           | -19.36       | Peak     |         |
| 2   | 176.4700     | 34.92                      | -11.32                  | 23.60                     | 43.50           | -19.90       | Peak     |         |
| 3   | 214.3000     | 37.48                      | -13.28                  | 24.20                     | 43.50           | -19.30       | Peak     |         |
| 4   | 240.4900     | 39.37                      | -13.35                  | 26.02                     | 46.00           | -19.98       | Peak     |         |
| 5   | 359.8000     | 37.01                      | -9.17                   | 27.84                     | 46.00           | -18.16       | Peak     |         |
| 6 * | 405.3900     | 36.45                      | -7.98                   | 28.47                     | 46.00           | -17.53       | Peak     |         |

Test Mode: UNII-3/TX A Mode 5745MHz


Vertical

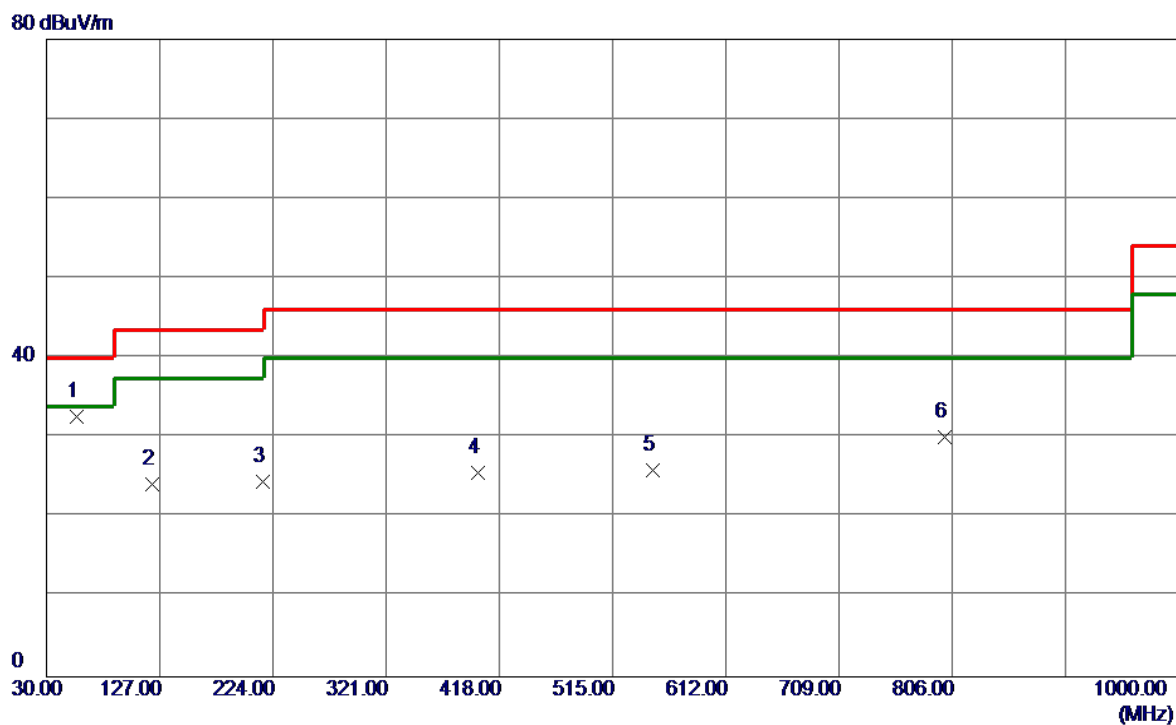

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 56.1900      | 44.91                      | -12.26                  | 32.65                     | 40.00           | -7.35        | Peak     |         |
| 2   | 120.2100     | 37.75                      | -13.66                  | 24.09                     | 43.50           | -19.41       | Peak     |         |
| 3   | 215.2700     | 37.81                      | -13.32                  | 24.49                     | 43.50           | -19.01       | Peak     |         |
| 4   | 399.5700     | 33.68                      | -8.12                   | 25.56                     | 46.00           | -20.44       | Peak     |         |
| 5   | 549.9200     | 30.29                      | -4.44                   | 25.85                     | 46.00           | -20.15       | Peak     |         |
| 6   | 799.2100     | 29.20                      | 0.86                    | 30.06                     | 46.00           | -15.94       | Peak     |         |

Test Mode: UNII-3/TX A Mode 5745MHz


### Horizontal

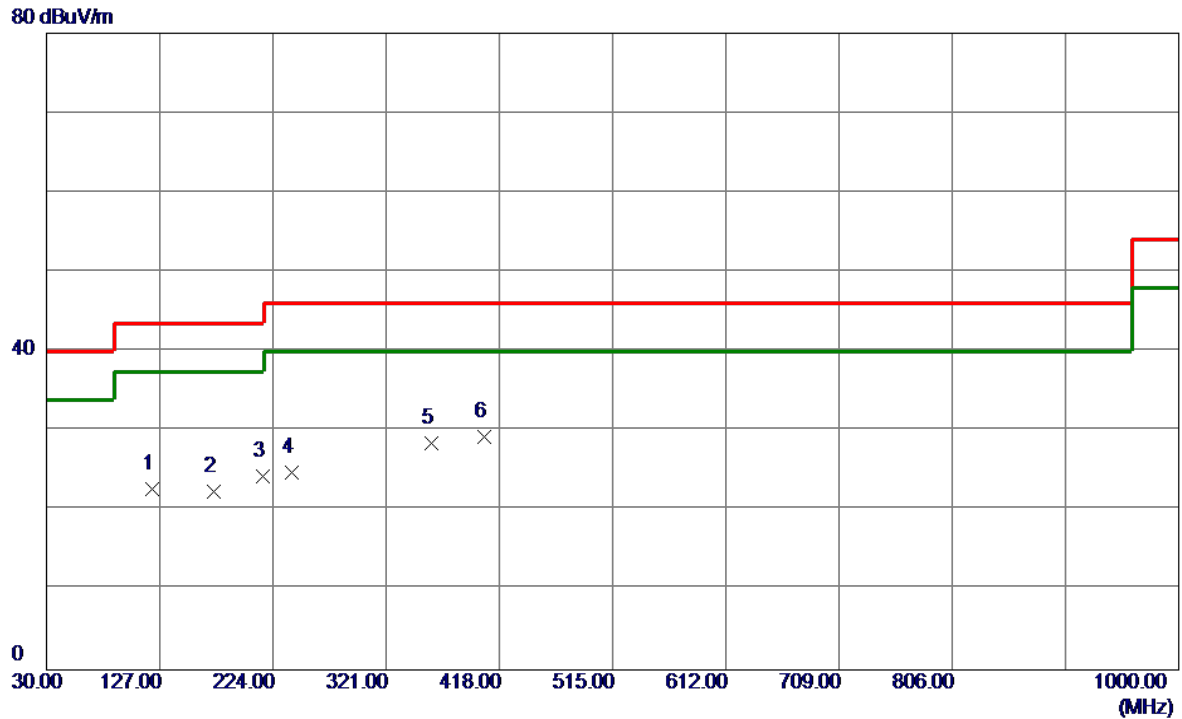

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 120.2100     | 36.43                      | -13.66                  | 22.77                     | 43.50           | -20.73       | Peak     |         |
| 2   | 173.5600     | 33.58                      | -11.22                  | 22.36                     | 43.50           | -21.14       | Peak     |         |
| 3   | 215.2700     | 37.63                      | -13.32                  | 24.31                     | 43.50           | -19.19       | Peak     |         |
| 4   | 240.4900     | 38.10                      | -13.35                  | 24.75                     | 46.00           | -21.25       | Peak     |         |
| 5   | 359.8000     | 37.58                      | -9.17                   | 28.41                     | 46.00           | -17.59       | Peak     |         |
| 6 * | 405.3900     | 37.27                      | -7.98                   | 29.29                     | 46.00           | -16.71       | Peak     |         |

Test Mode: UNII-3/TX A Mode 5785MHz


Vertical

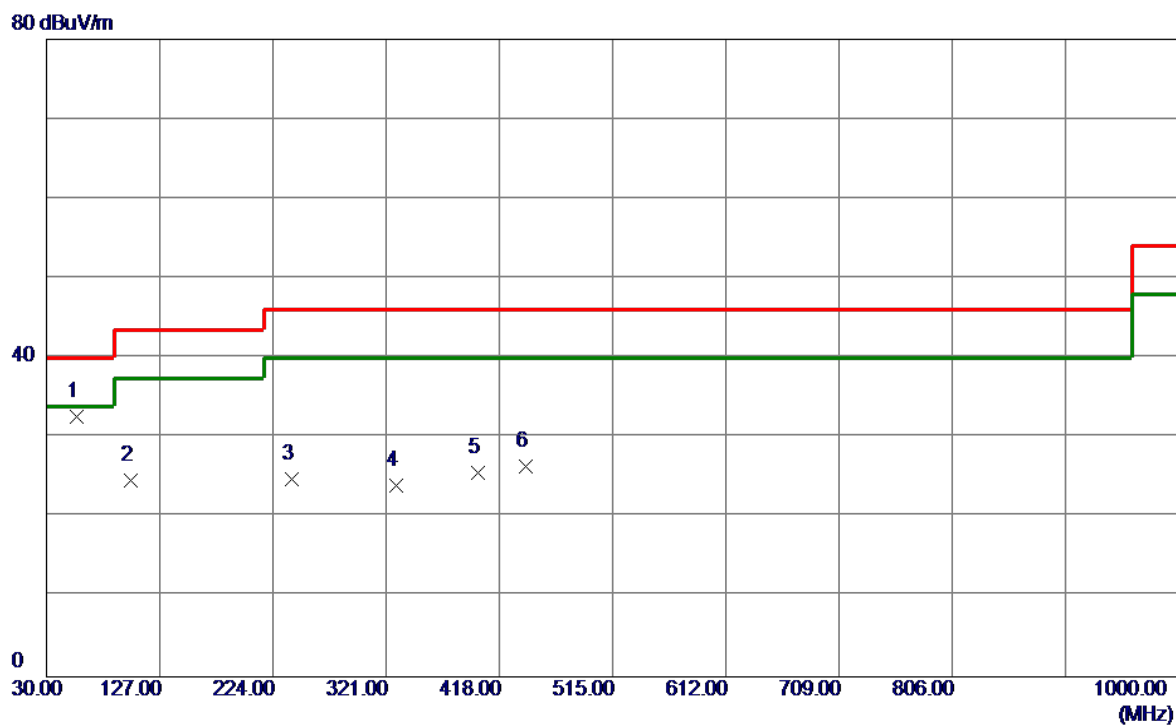

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 56.1900      | 44.91                      | -12.26                  | 32.65                     | 40.00           | -7.35        | Peak     |         |
| 2   | 101.7800     | 41.15                      | -16.58                  | 24.57                     | 43.50           | -18.93       | Peak     |         |
| 3   | 240.4900     | 38.09                      | -13.35                  | 24.74                     | 46.00           | -21.26       | Peak     |         |
| 4   | 329.7300     | 33.91                      | -9.91                   | 24.00                     | 46.00           | -22.00       | Peak     |         |
| 5   | 399.5700     | 33.68                      | -8.12                   | 25.56                     | 46.00           | -20.44       | Peak     |         |
| 6   | 440.3100     | 33.50                      | -7.11                   | 26.39                     | 46.00           | -19.61       | Peak     |         |

Test Mode: UNII-3/TX A Mode 5785MHz


### Horizontal

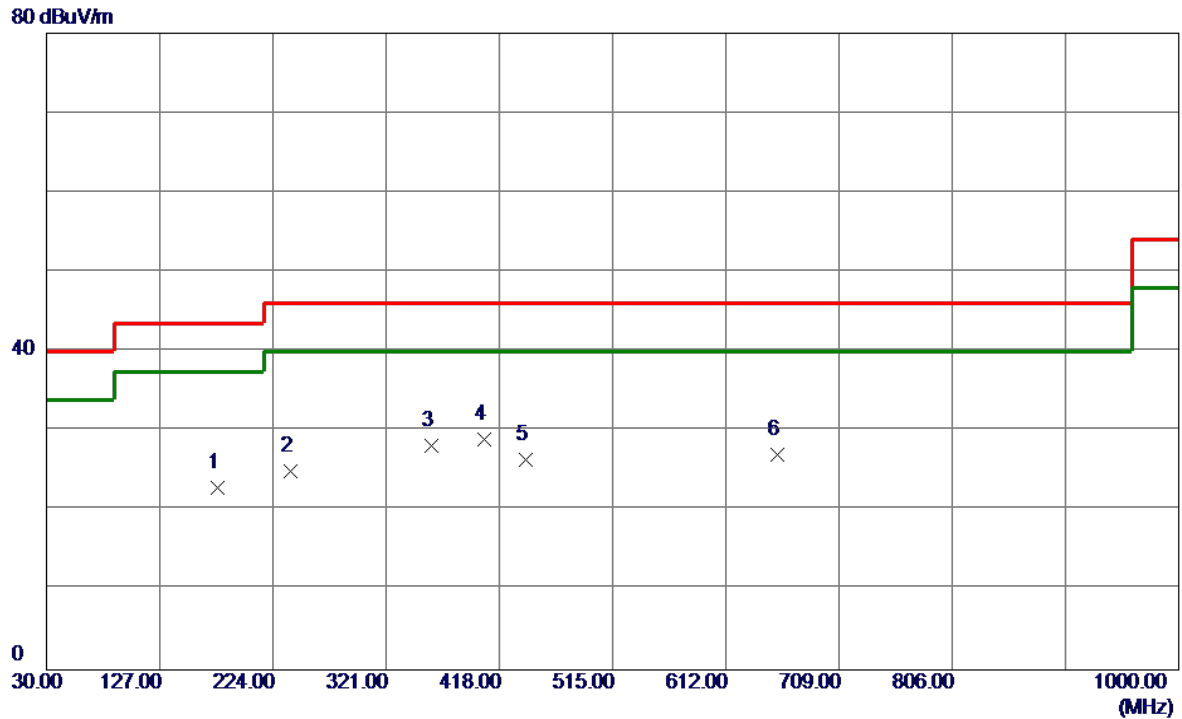

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 176.4700     | 34.25                      | -11.32                  | 22.93                     | 43.50           | -20.57       | Peak     |         |
| 2   | 239.5200     | 38.34                      | -13.35                  | 24.99                     | 46.00           | -21.01       | Peak     |         |
| 3   | 359.8000     | 37.40                      | -9.17                   | 28.23                     | 46.00           | -17.77       | Peak     |         |
| 4 * | 405.3900     | 36.99                      | -7.98                   | 29.01                     | 46.00           | -16.99       | Peak     |         |
| 5   | 440.3100     | 33.45                      | -7.11                   | 26.34                     | 46.00           | -19.66       | Peak     |         |
| 6   | 656.6200     | 29.14                      | -2.03                   | 27.11                     | 46.00           | -18.89       | Peak     |         |

Test Mode: UNII-3/TX A Mode 5825MHz


Vertical

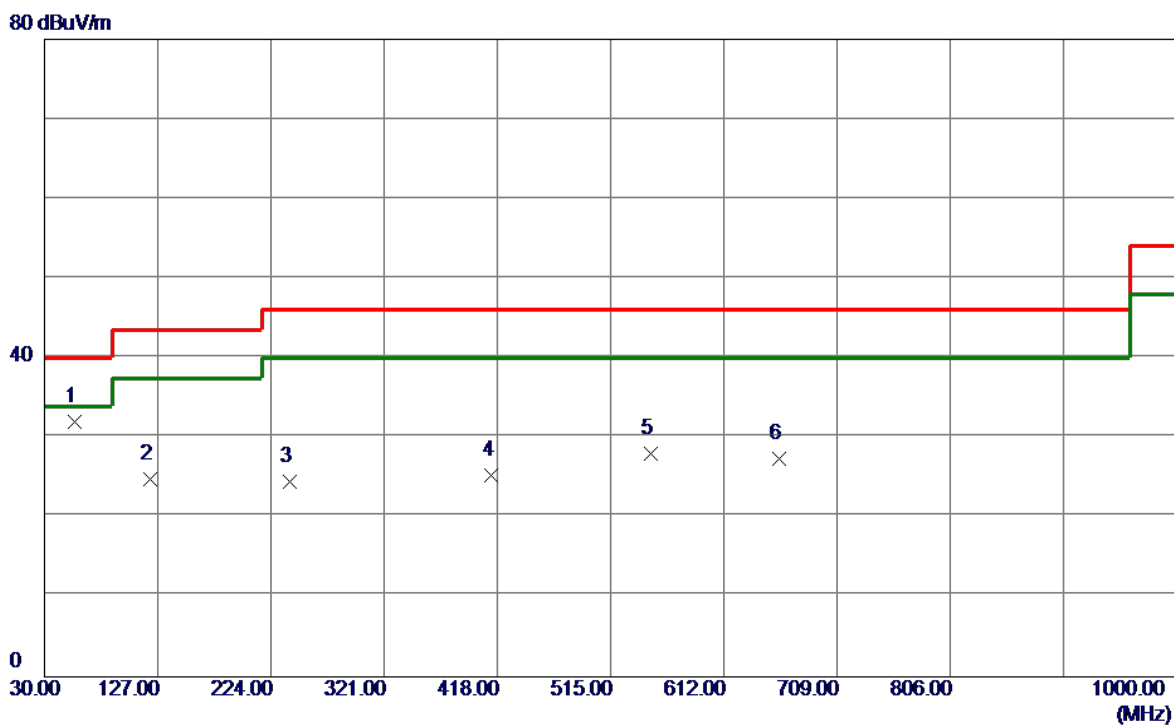

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 56.1900      | 44.24                      | -12.26                  | 31.98                     | 40.00           | -8.02        | Peak     |         |
| 2   | 120.2100     | 38.52                      | -13.66                  | 24.86                     | 43.50           | -18.64       | Peak     |         |
| 3   | 240.4900     | 37.80                      | -13.35                  | 24.45                     | 46.00           | -21.55       | Peak     |         |
| 4   | 413.1500     | 33.12                      | -7.79                   | 25.33                     | 46.00           | -20.67       | Peak     |         |
| 5   | 549.9200     | 32.46                      | -4.44                   | 28.02                     | 46.00           | -17.98       | Peak     |         |
| 6   | 659.5300     | 29.24                      | -1.95                   | 27.29                     | 46.00           | -18.71       | Peak     |         |

Test Mode: UNII-3/TX A Mode 5825MHz

# Horizontal

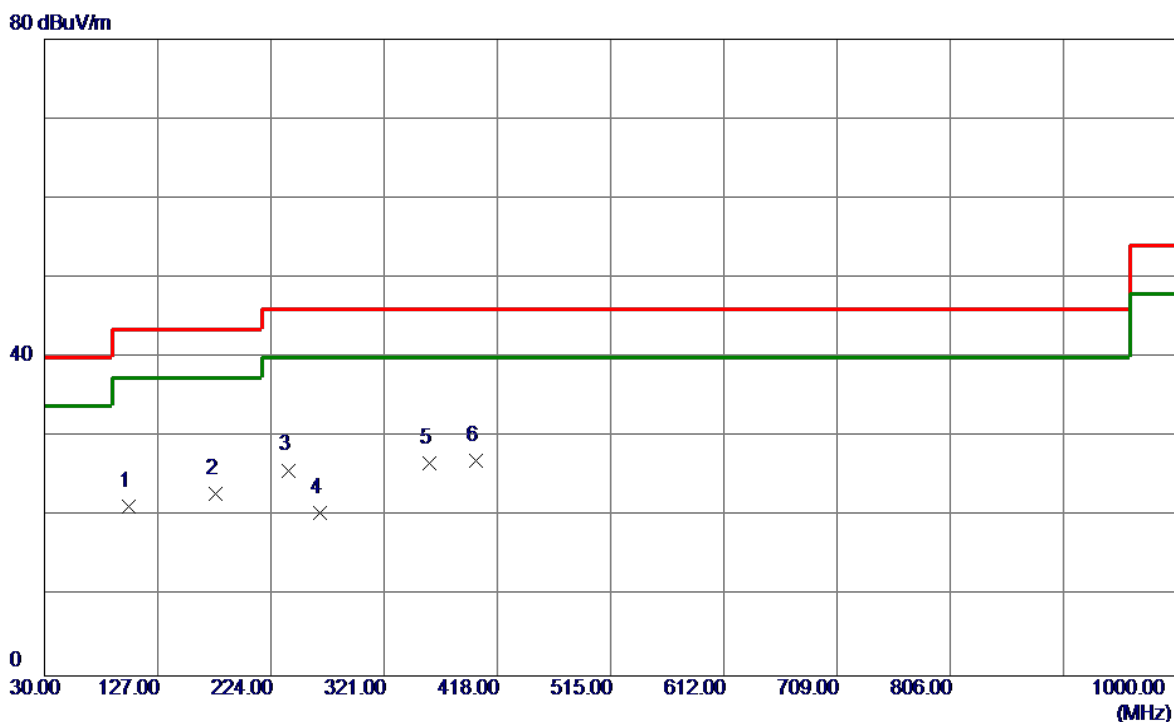


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 101.7800     | 37.81                      | -16.58                  | 21.23                     | 43.50           | -22.27       | Peak     |         |
| 2   | 176.4700     | 34.20                      | -11.32                  | 22.88                     | 43.50           | -20.62       | Peak     |         |
| 3   | 239.5200     | 39.19                      | -13.35                  | 25.84                     | 46.00           | -20.16       | Peak     |         |
| 4   | 265.7100     | 33.58                      | -13.09                  | 20.49                     | 46.00           | -25.51       | Peak     |         |
| 5   | 359.8000     | 35.96                      | -9.17                   | 26.79                     | 46.00           | -19.21       | Peak     |         |
| 6 * | 399.5700     | 35.11                      | -8.12                   | 26.99                     | 46.00           | -19.01       | Peak     |         |

## APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)

# ANT 1

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5180MHz |


## Vertical

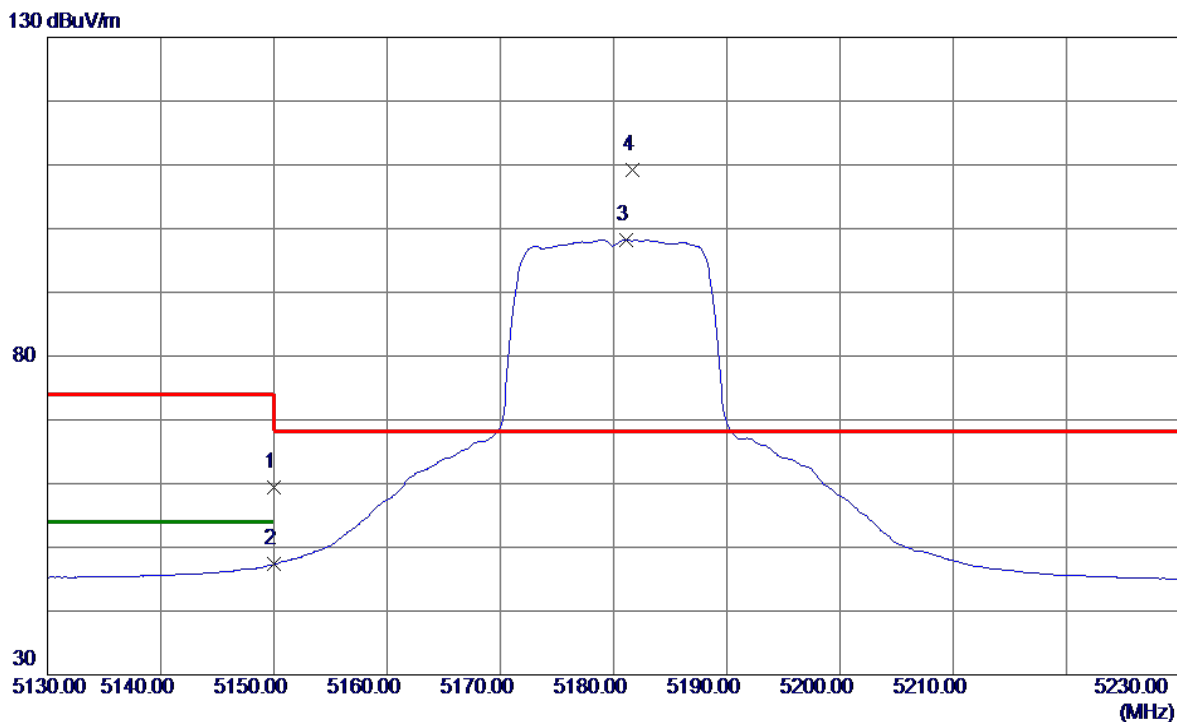

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 42.67                      | 16.76                   | 59.43                     | 74.00           | -14.57       | Peak     |          |
| 2   | 5150.0000    | 30.60                      | 16.76                   | 47.36                     | 54.00           | -6.64        | AVG      |          |
| 3   | 5181.1000    | 81.36                      | 16.87                   | 98.23                     | 999.00          | -900.77      | AVG      | No Limit |
| 4 * | 5181.7000    | 92.41                      | 16.87                   | 109.28                    | 68.30           | 40.98        | Peak     | No Limit |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5180MHz |

# Vertical

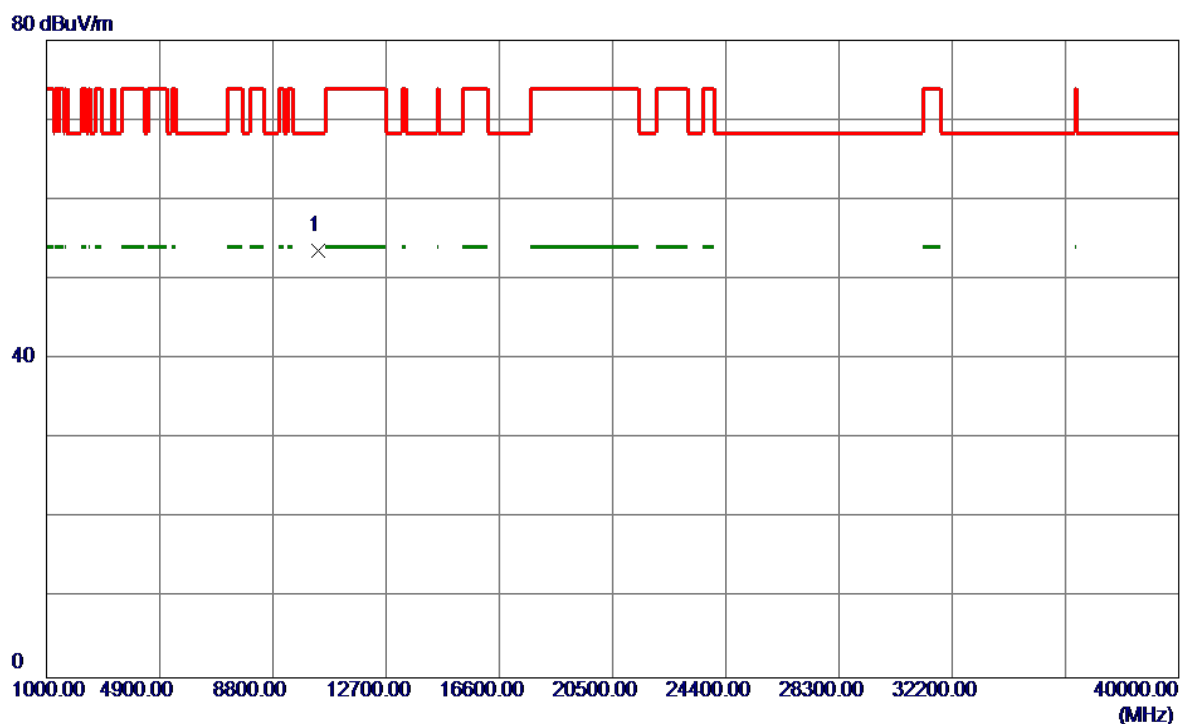


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10357.4000   | 38.84                      | 14.79                   | 53.63                     | 68.30           | -14.67       | Peak     |         |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5180MHz |

### Horizontal


130 dBuV/m

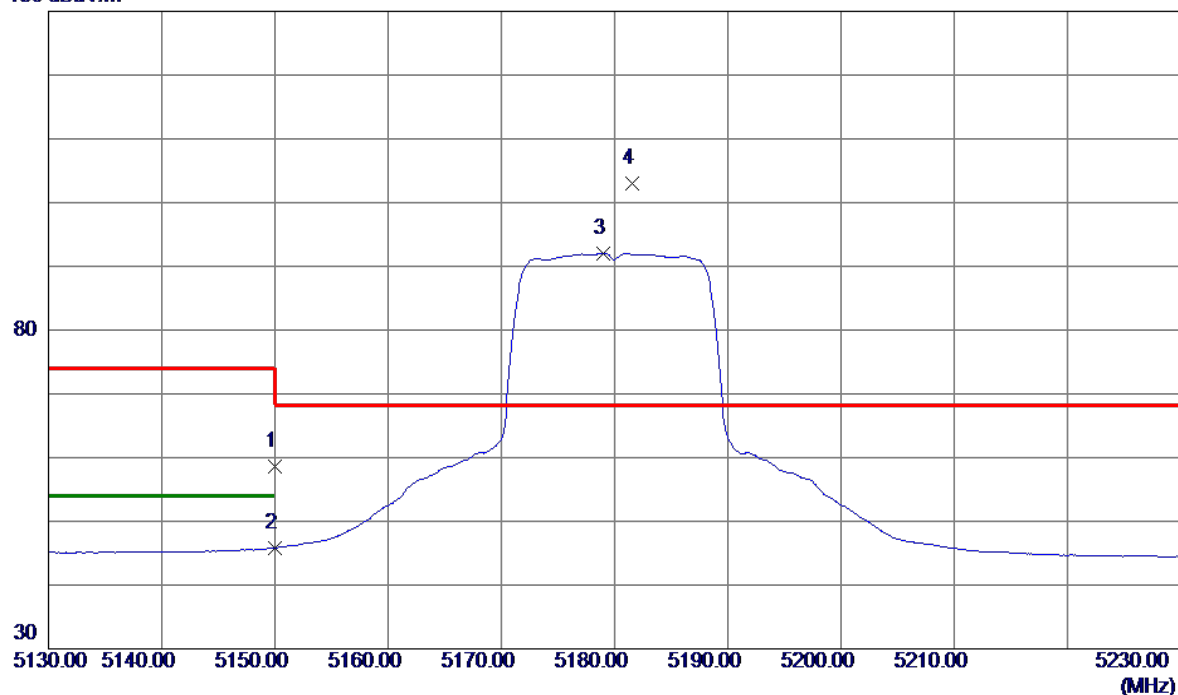

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 41.80                      | 16.76                   | 58.56                     | 74.00           | -15.44       | Peak     |          |
| 2   | 5150.0000    | 29.07                      | 16.76                   | 45.83                     | 54.00           | -8.17        | AVG      |          |
| 3   | 5179.0000    | 75.18                      | 16.86                   | 92.04                     | 999.00          | -906.96      | AVG      | No Limit |
| 4 * | 5181.6000    | 86.19                      | 16.87                   | 103.06                    | 68.30           | 34.76        | Peak     | No Limit |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5180MHz |

### Horizontal

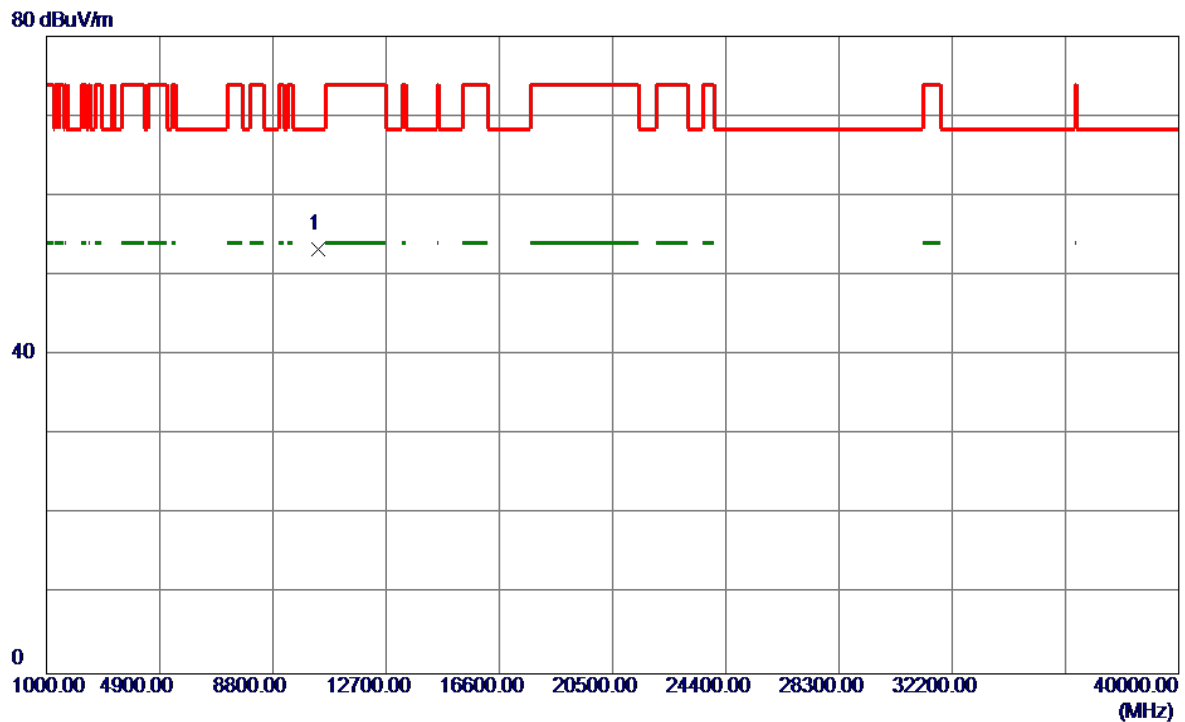


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 10362.8000 | 38.50         | 14.80          | 53.30       | 68.30  | -15.00 | Peak     |         |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5200MHz |

### Vertical


130 dBuV/m

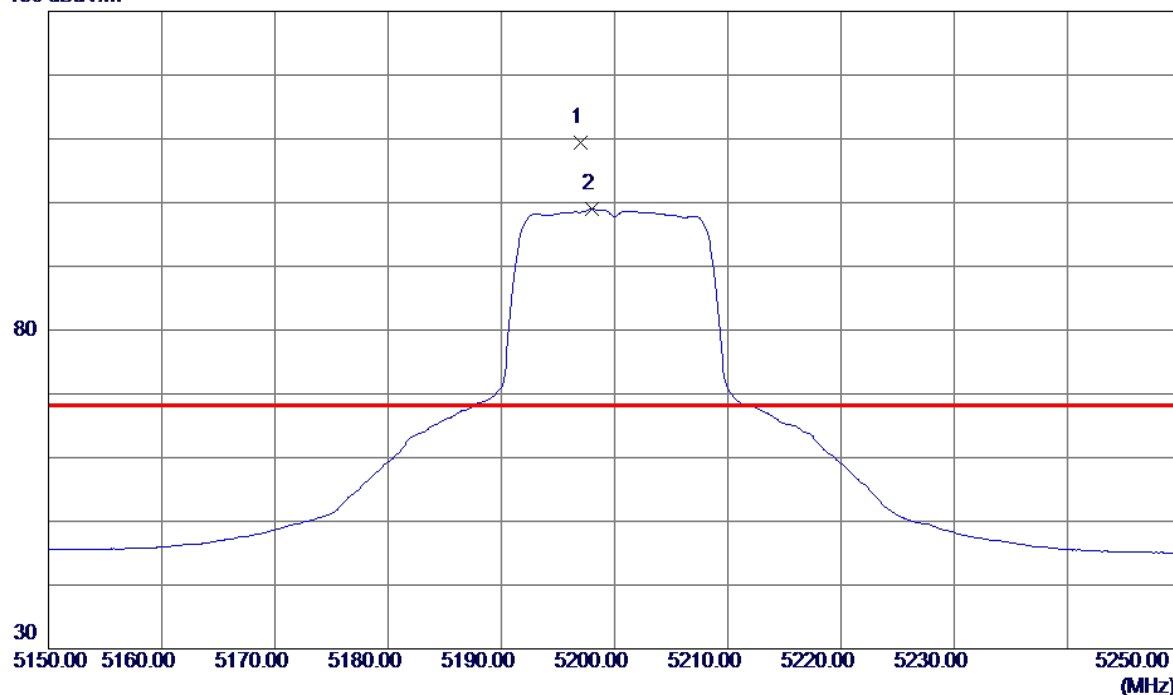

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5197.0000    | 92.56                      | 16.93                   | 109.49                    | 68.30           | 41.19        | Peak     | No Limit |
| 2   | 5198.0000    | 82.03                      | 16.93                   | 98.96                     | 999.00          | -900.04      | AVG      | No Limit |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5200MHz |

### Vertical

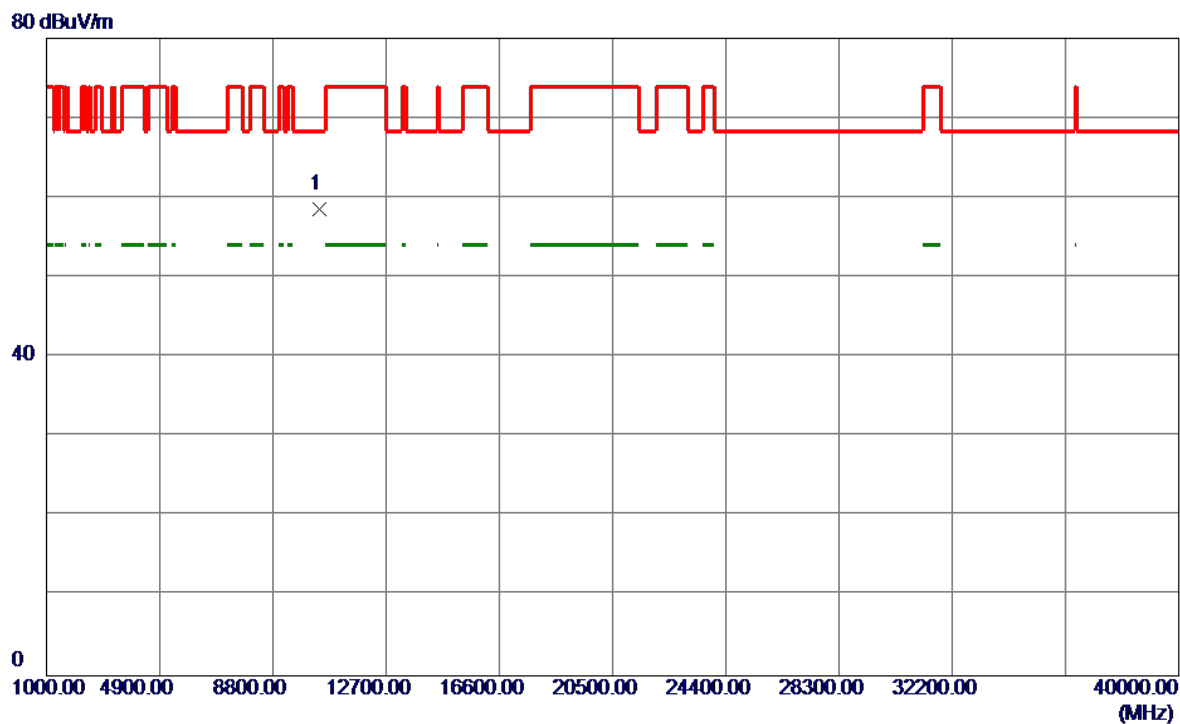


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10402.4000   | 43.74                      | 14.86                   | 58.60                     | 68.30           | -9.70        | Peak     |         |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5200MHz |

### Horizontal


130 dBuV/m

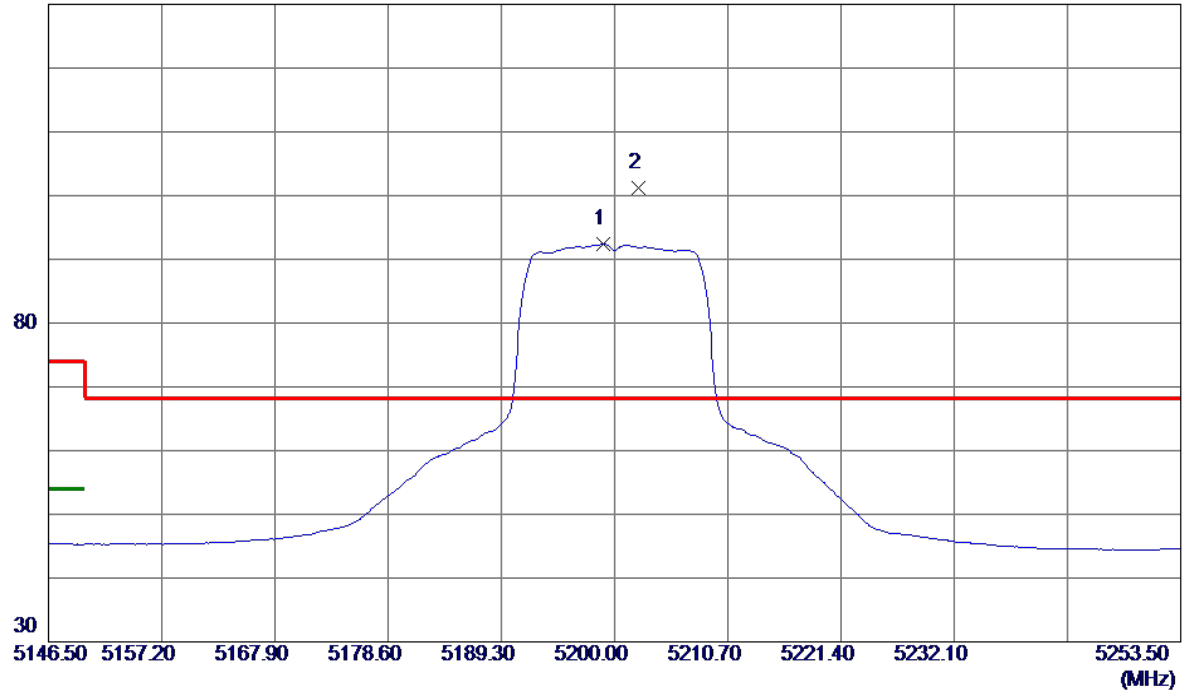

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5198.9300    | 75.46                      | 16.93                   | 92.39                     | 999.00          | -906.61      | AVG      | No Limit |
| 2 * | 5202.2470    | 84.35                      | 16.94                   | 101.29                    | 68.30           | 32.99        | Peak     | No Limit |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5200MHz |


### Horizontal

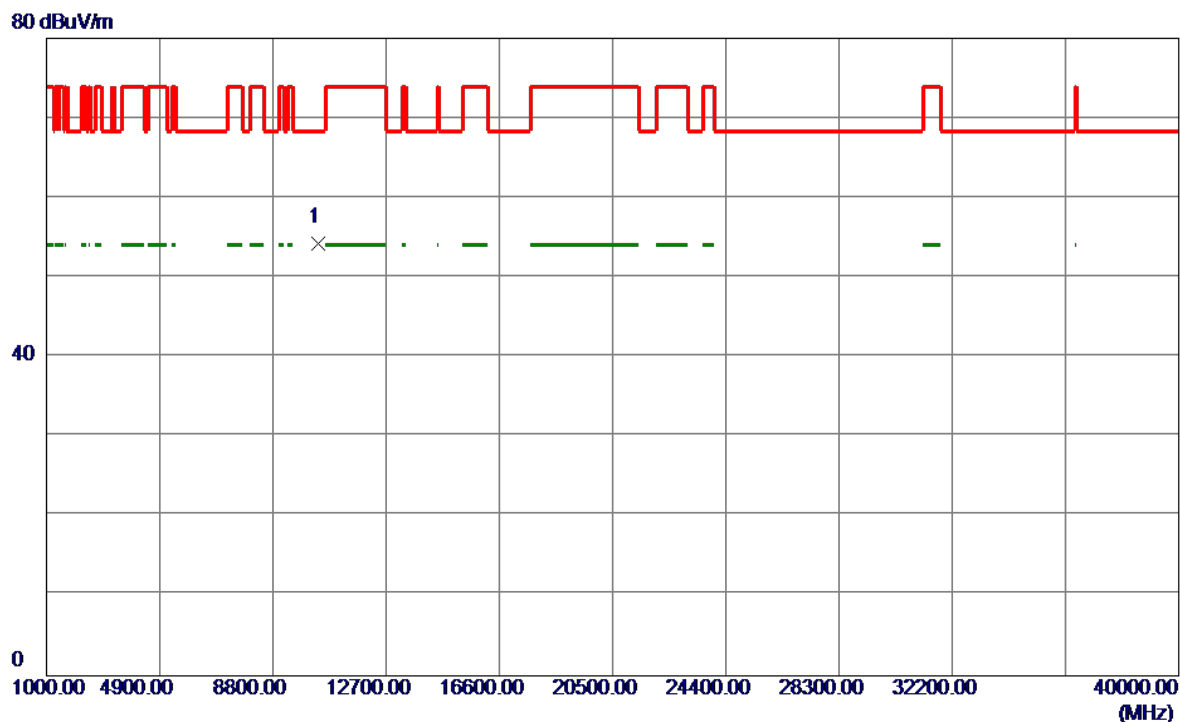

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10377.6000   | 39.50                      | 14.82                   | 54.32                     | 68.30           | -13.98       | Peak     |         |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5240MHz |


### Vertical

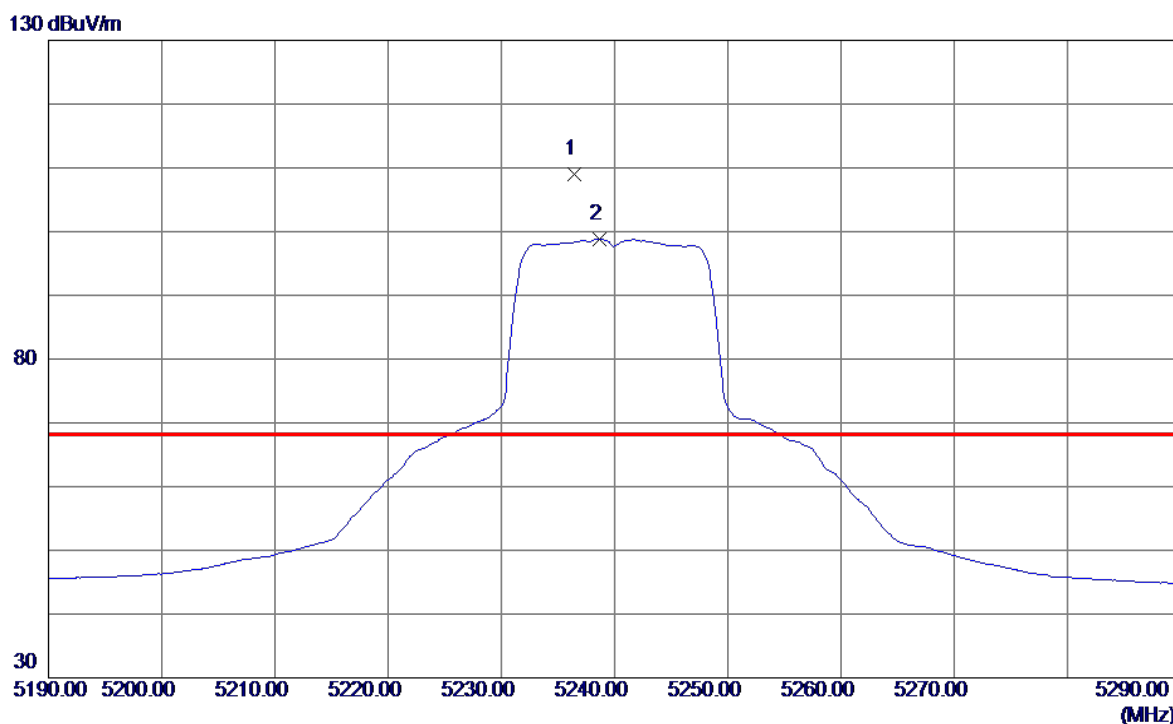

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5236.4000    | 91.85                      | 17.06                   | 108.91                    | 68.30           | 40.61        | Peak     | No Limit |
| 2   | 5238.7000    | 81.71                      | 17.07                   | 98.78                     | 999.00          | -900.22      | AVG      | No Limit |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5240MHz |


### Vertical

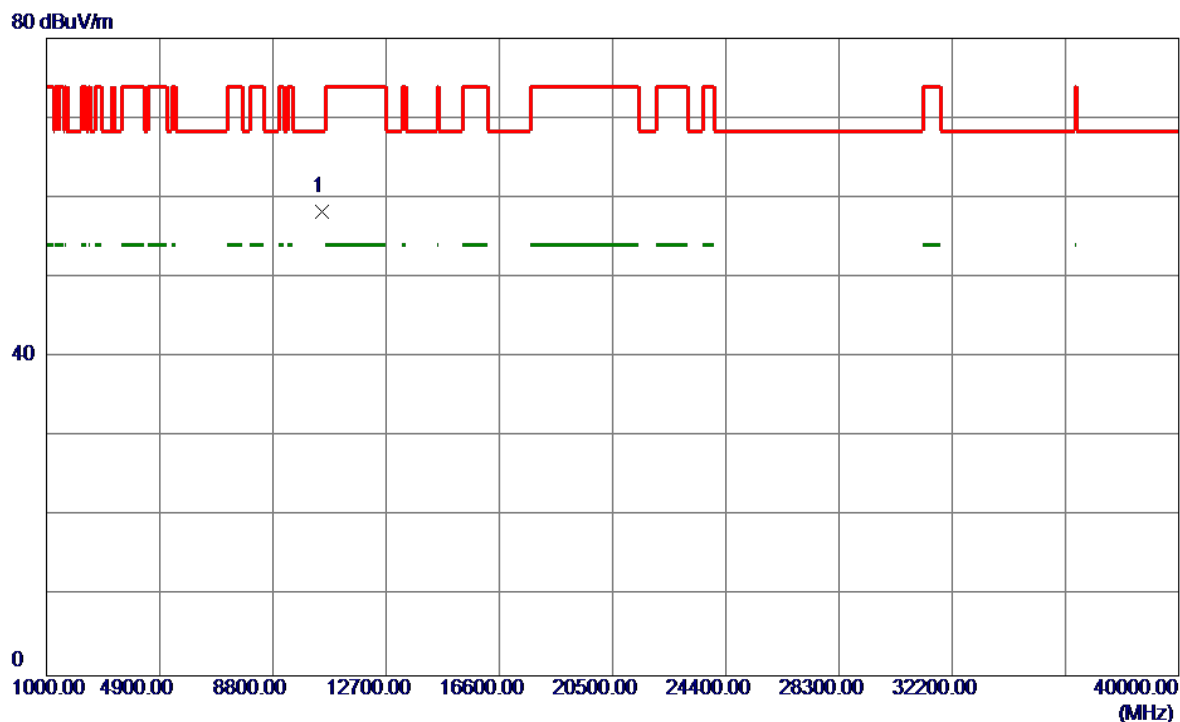

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10482.0000   | 43.22                      | 14.99                   | 58.21                     | 68.30           | -10.09       | Peak     |         |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5240MHz |


### Horizontal

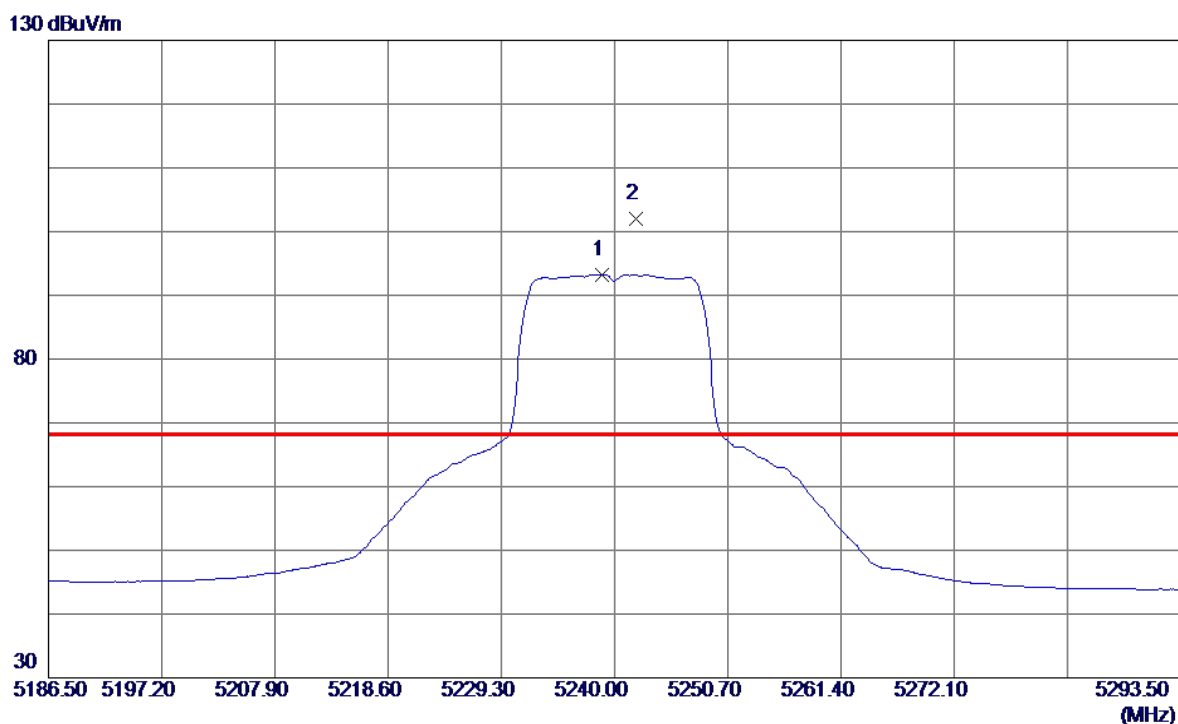

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5238.8230    | 76.18                      | 17.07                   | 93.25                     | 999.00          | -905.75      | AVG      | No Limit |
| 2 * | 5242.0330    | 85.01                      | 17.08                   | 102.09                    | 68.30           | 33.79        | Peak     | No Limit |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5240MHz |

### Horizontal

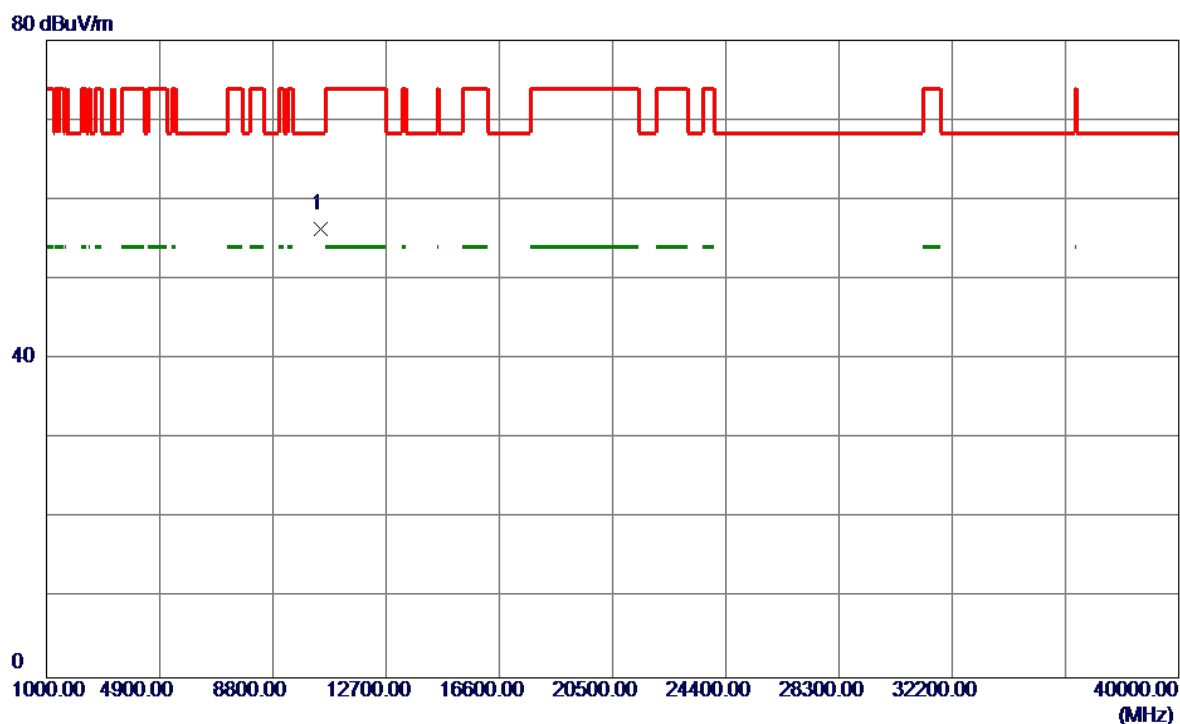


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10465.8500   | 41.30                      | 14.96                   | 56.26                     | 68.30           | -12.04       | Peak     |         |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz |

# Vertical


130 dBuV/m

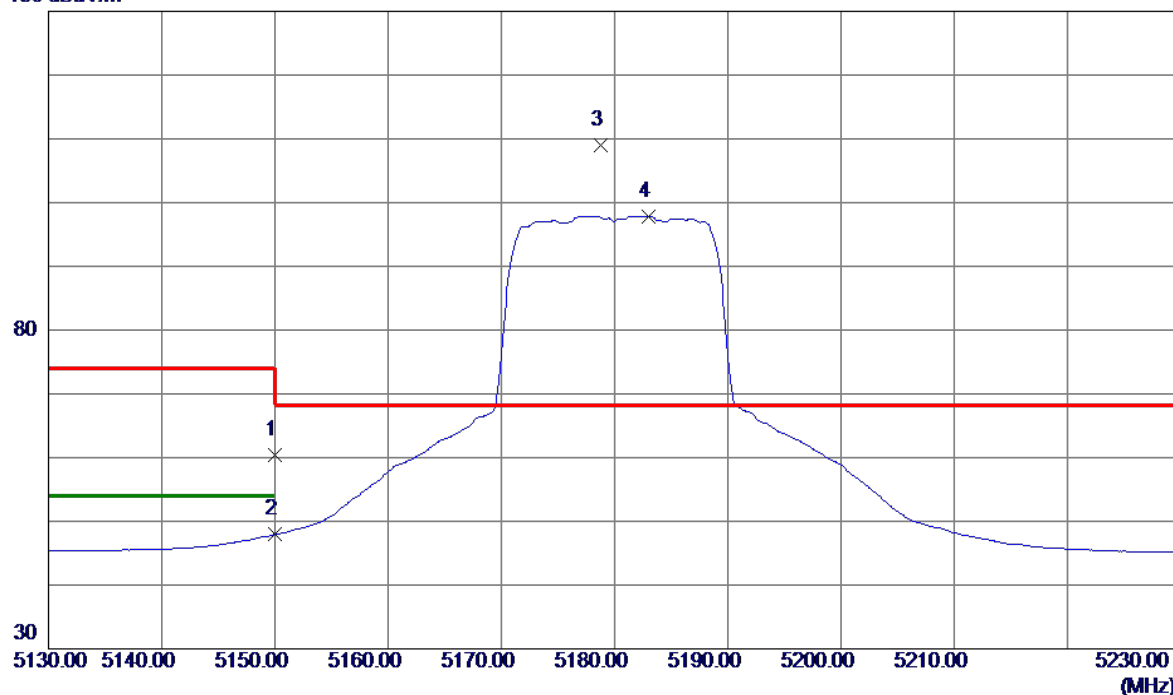

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 43.55                      | 16.76                   | 60.31                     | 74.00           | -13.69       | Peak     |          |
| 2   | 5150.0000    | 31.23                      | 16.76                   | 47.99                     | 54.00           | -6.01        | AVG      |          |
| 3 * | 5178.8000    | 92.09                      | 16.86                   | 108.95                    | 68.30           | 40.65        | Peak     | No Limit |
| 4   | 5183.0000    | 81.01                      | 16.88                   | 97.89                     | 999.00          | -901.11      | AVG      | No Limit |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz |

### Vertical

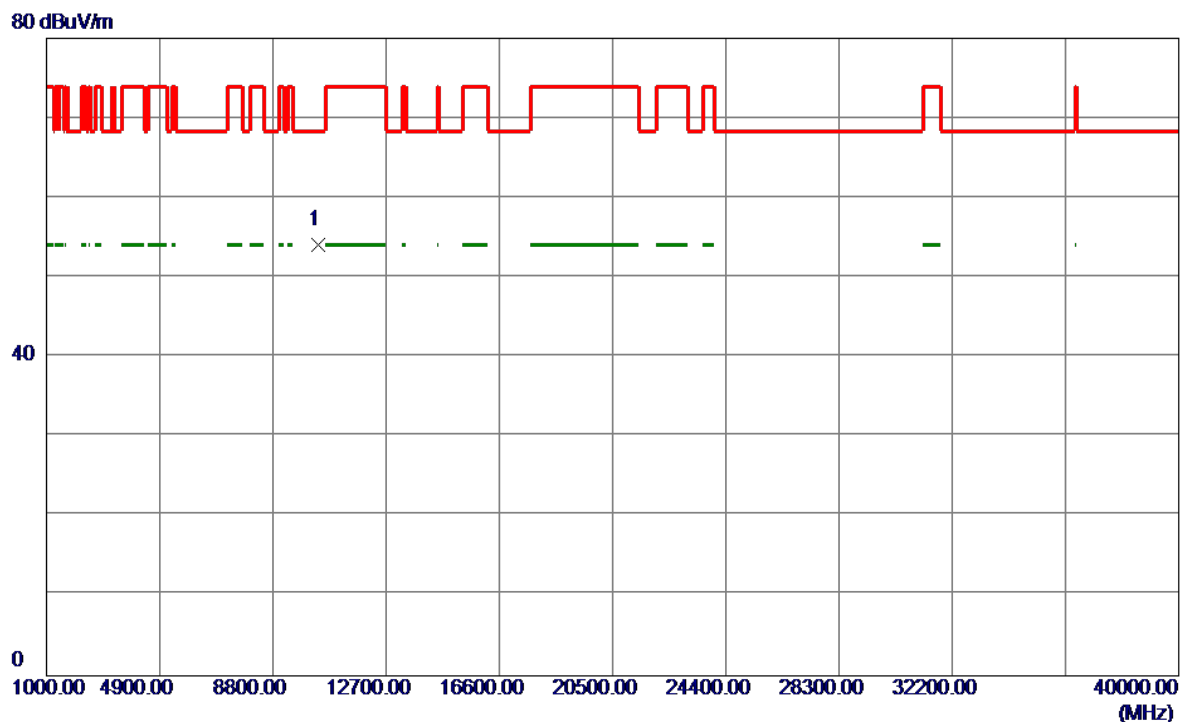


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10362.8000   | 39.27                      | 14.80                   | 54.07                     | 68.30           | -14.23       | Peak     |         |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz |

### Horizontal


130 dBuV/m

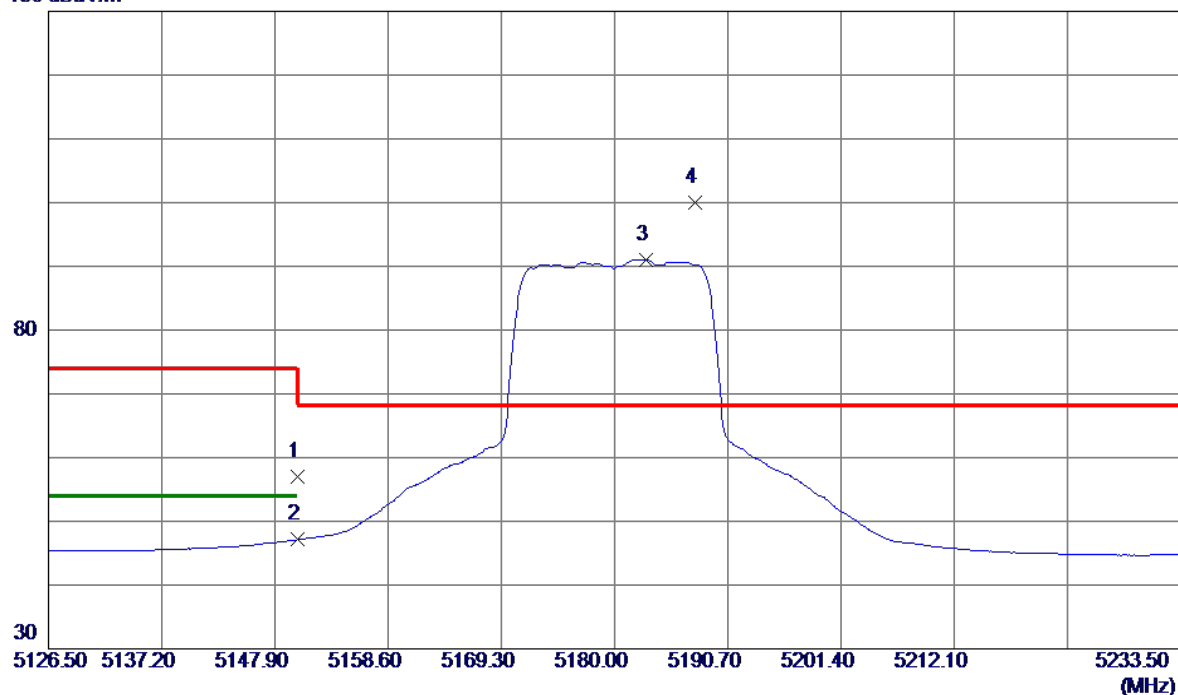

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 40.19                      | 16.76                   | 56.95                     | 74.00           | -17.05       | Peak     |          |
| 2   | 5150.0000    | 30.36                      | 16.76                   | 47.12                     | 54.00           | -6.88        | AVG      |          |
| 3   | 5182.9960    | 74.11                      | 16.88                   | 90.99                     | 999.00          | -908.01      | AVG      | No Limit |
| 4 * | 5187.5970    | 83.04                      | 16.89                   | 99.93                     | 68.30           | 31.63        | Peak     | No Limit |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz |

### Horizontal

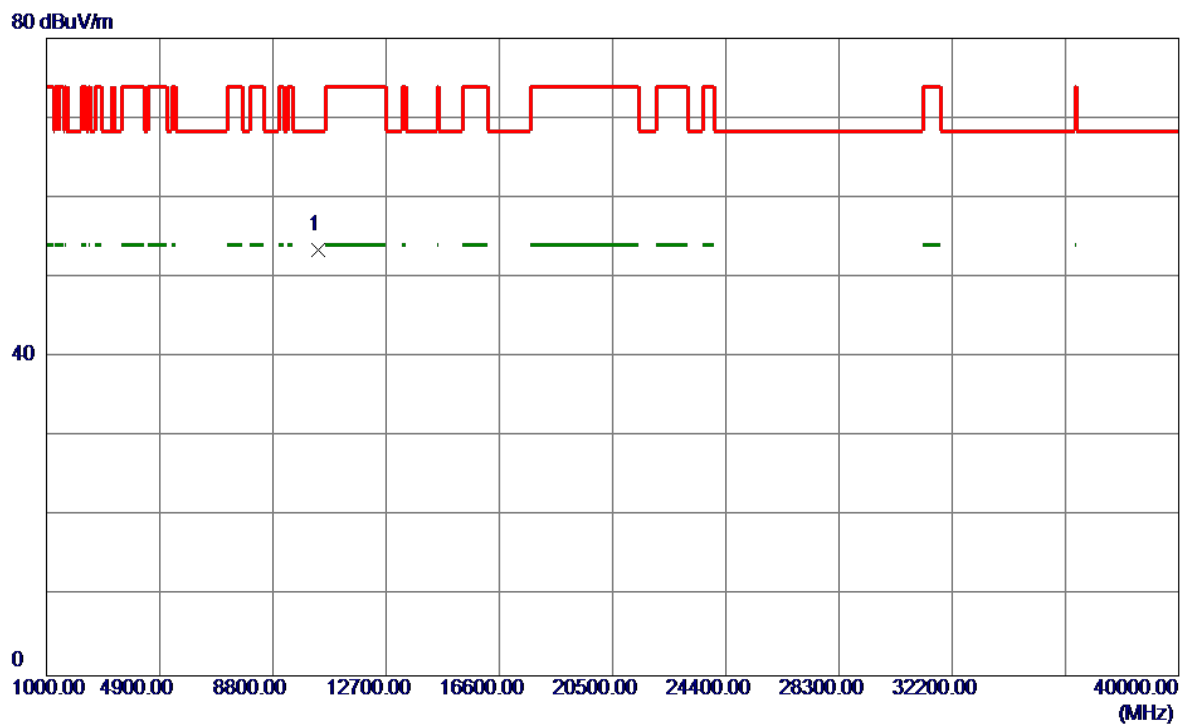


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10355.2000   | 38.59                      | 14.79                   | 53.38                     | 68.30           | -14.92       | Peak     |         |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5200MHz |

### Vertical


130 dBuV/m

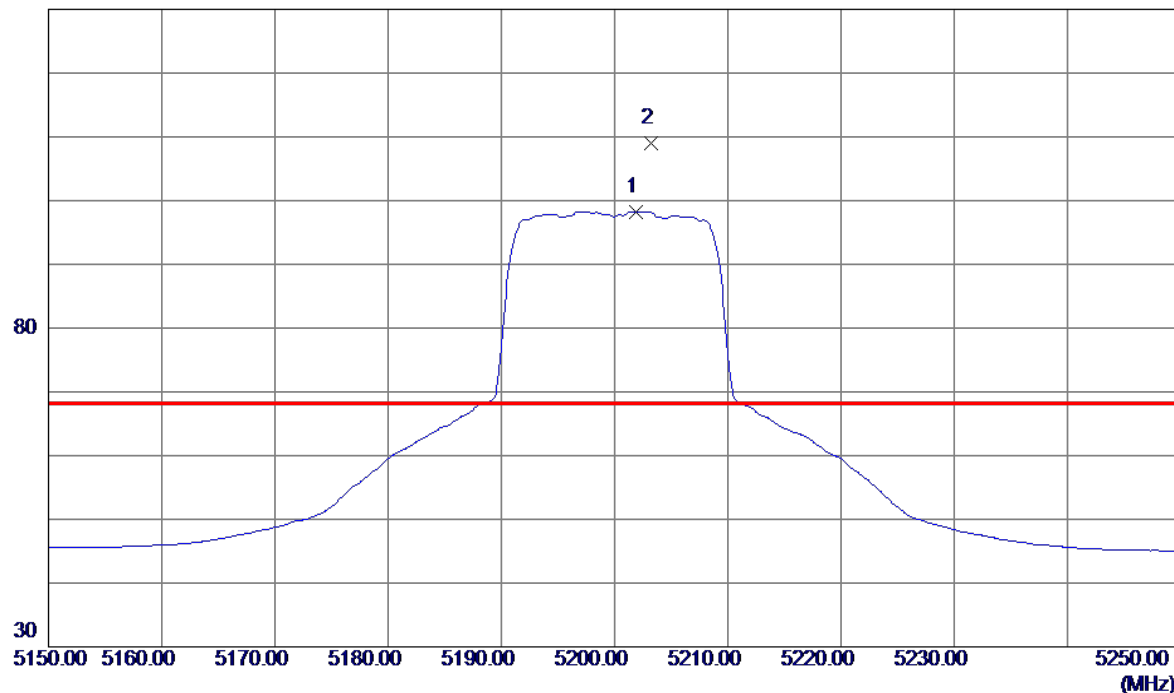

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5201.9000    | 81.30                      | 16.94                   | 98.24                     | 999.00          | -900.76      | AVG      | No Limit |
| 2 * | 5203.2000    | 92.05                      | 16.95                   | 109.00                    | 68.30           | 40.70        | Peak     | No Limit |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5200MHz |


## Vertical

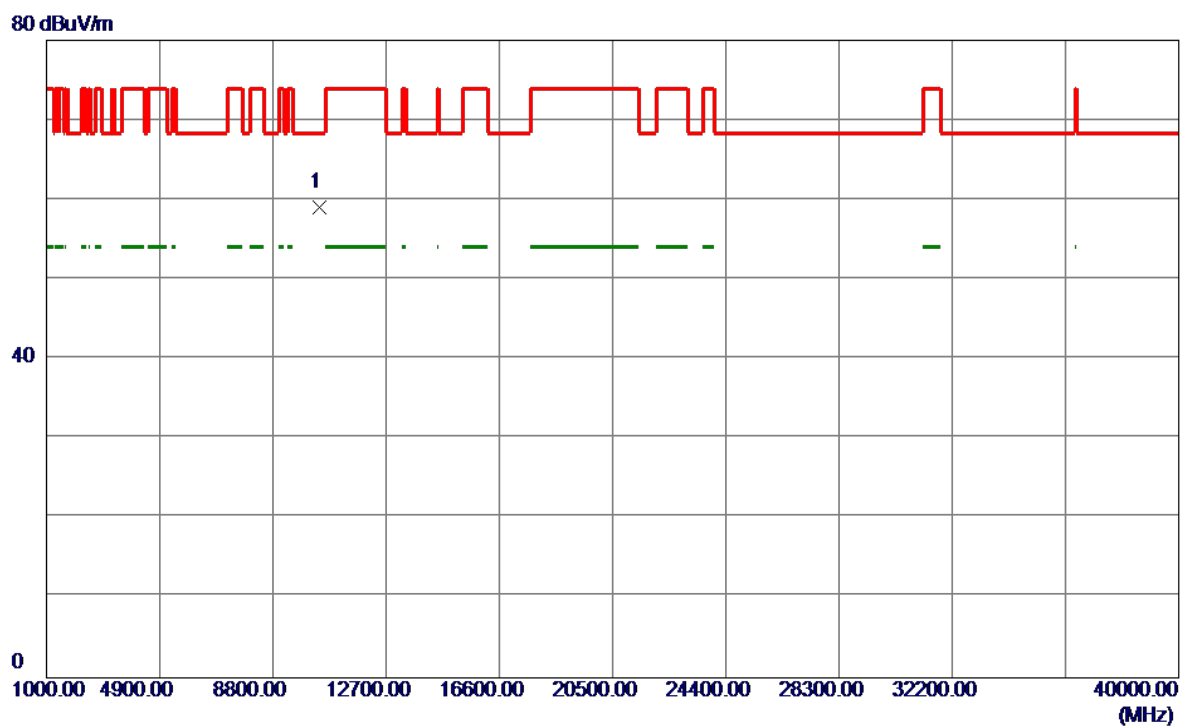

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10393.8000   | 44.18                      | 14.85                   | 59.03                     | 68.30           | -9.27        | Peak     |         |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5200MHz |


### Horizontal

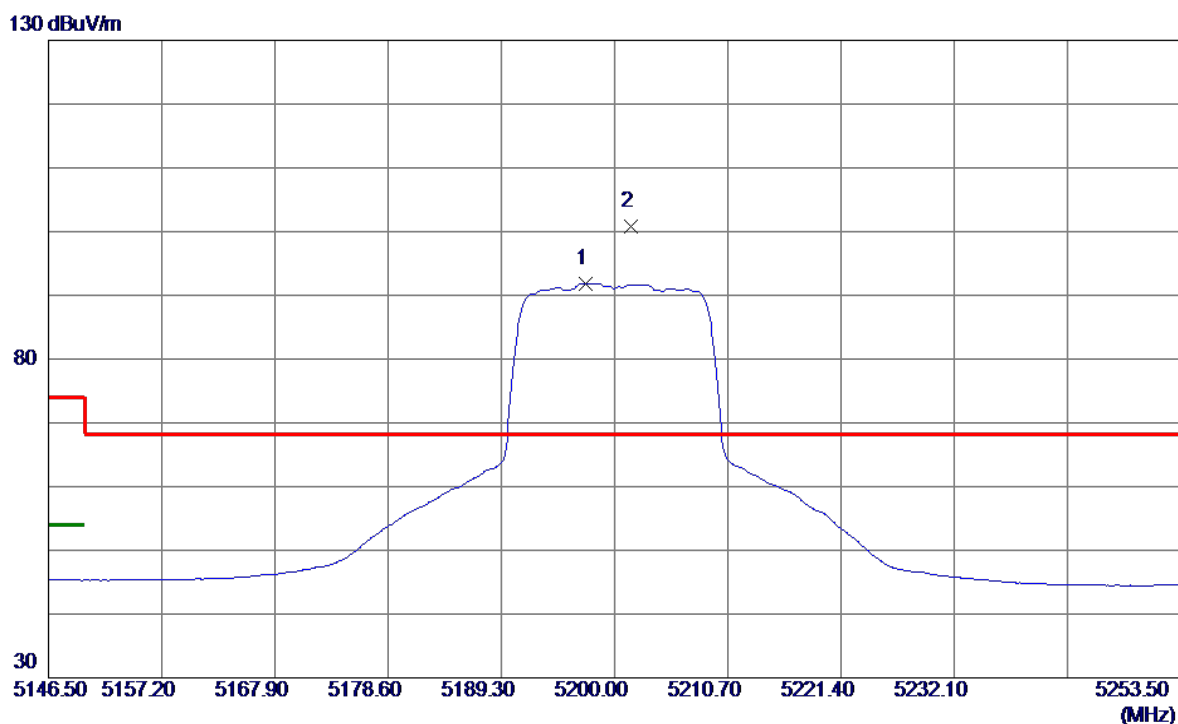

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5197.2180    | 74.90                      | 16.93                   | 91.83                     | 999.00          | -907.17      | AVG      | No Limit |
| 2 * | 5201.6050    | 83.92                      | 16.94                   | 100.86                    | 68.30           | 32.56        | Peak     | No Limit |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5200MHz |

### Horizontal

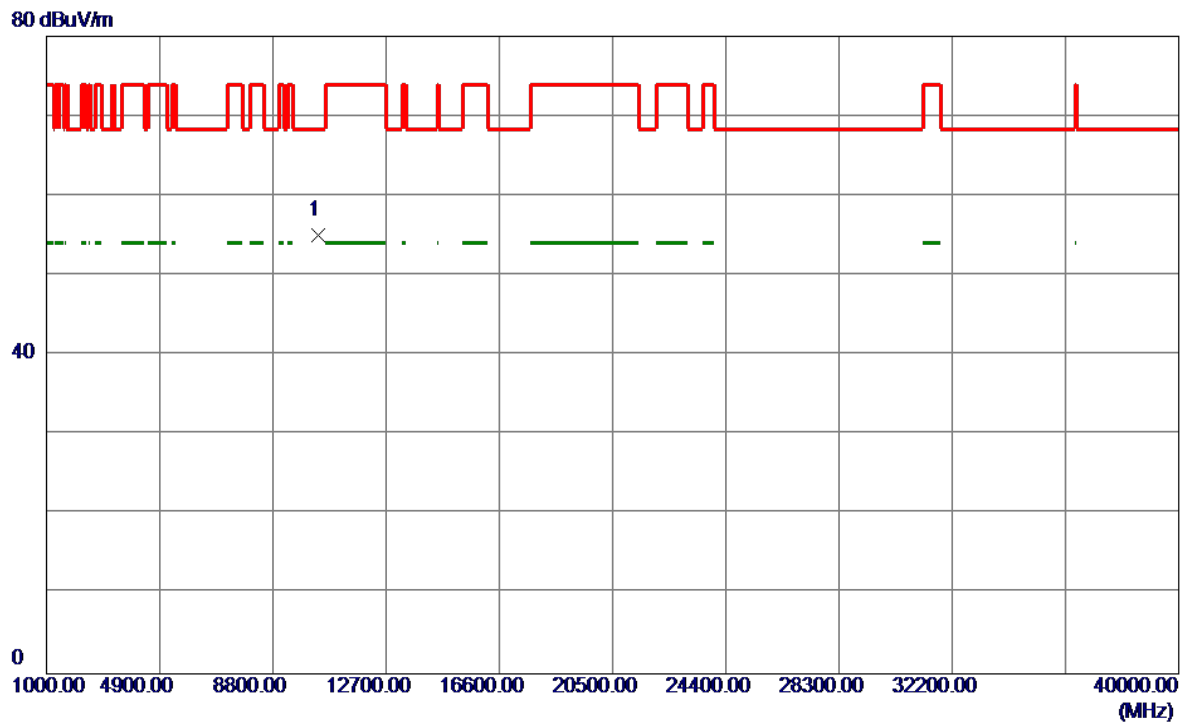


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 10377.6000 | 40.20         | 14.82          | 55.02       | 68.30  | -13.28 | Peak     |         |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz |

### Vertical


130 dBuV/m

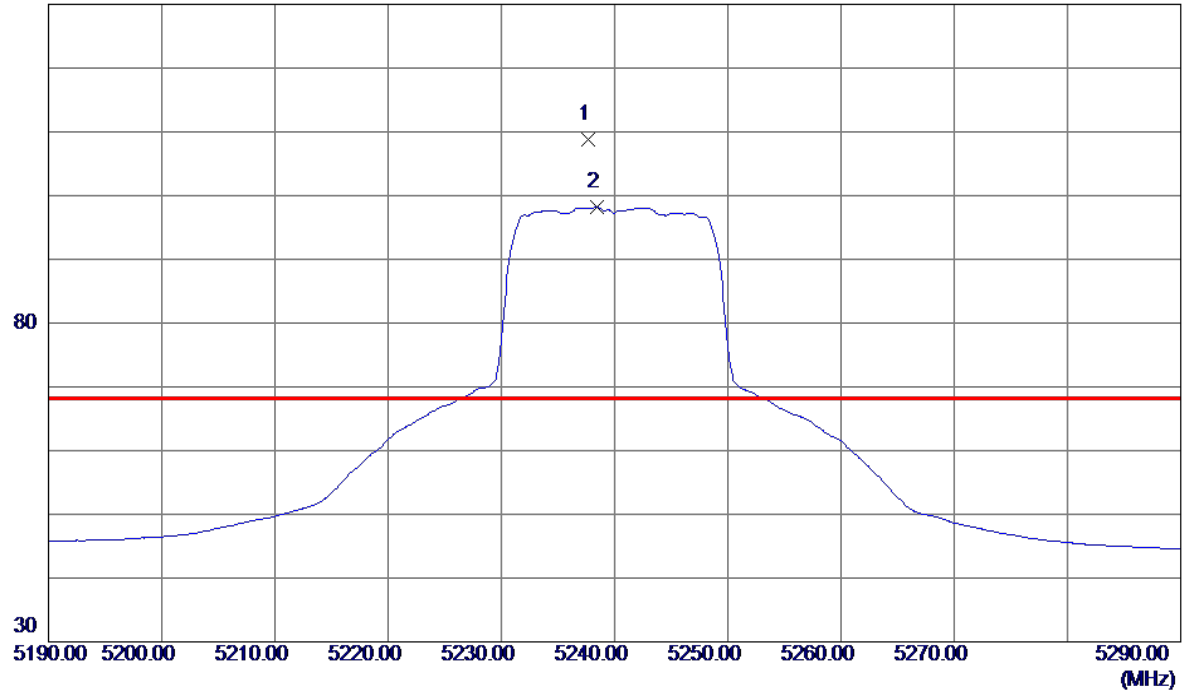

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5237.7000    | 91.68                      | 17.07                   | 108.75                    | 68.30           | 40.45        | Peak     | No Limit |
| 2   | 5238.4000    | 81.11                      | 17.07                   | 98.18                     | 999.00          | -900.82      | AVG      | No Limit |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz |


# Vertical

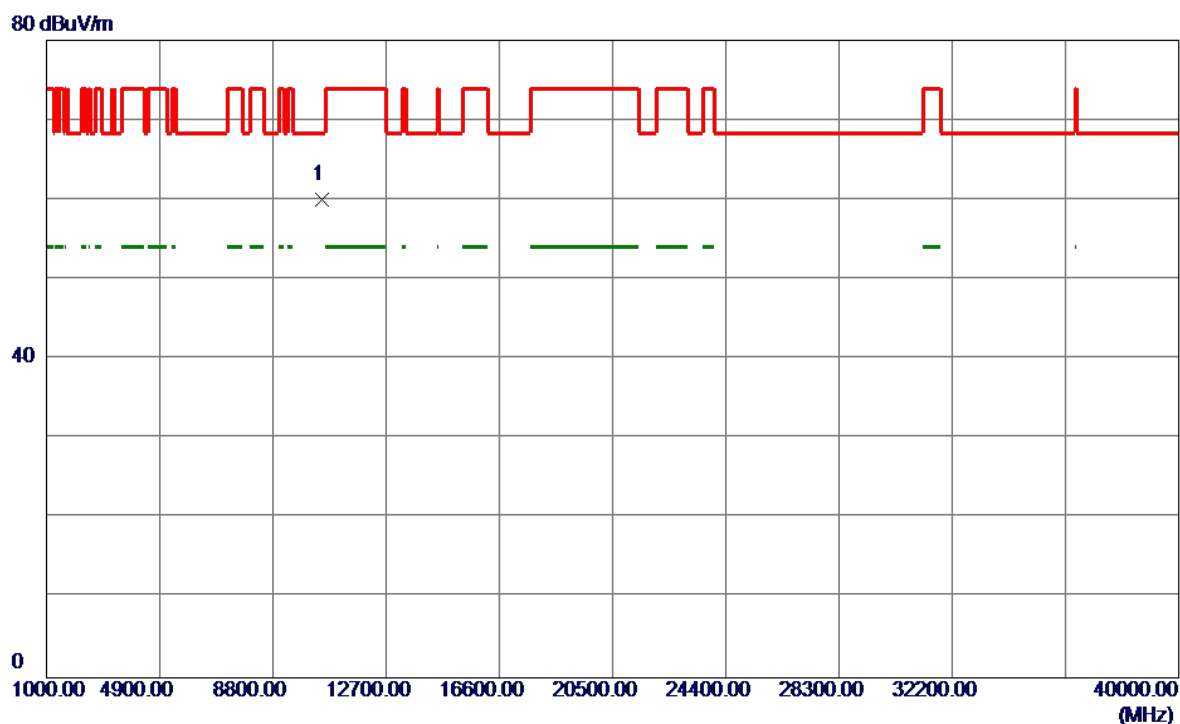

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10479.2000   | 45.06                      | 14.99                   | 60.05                     | 68.30           | -8.25        | Peak     |         |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz |


### Horizontal

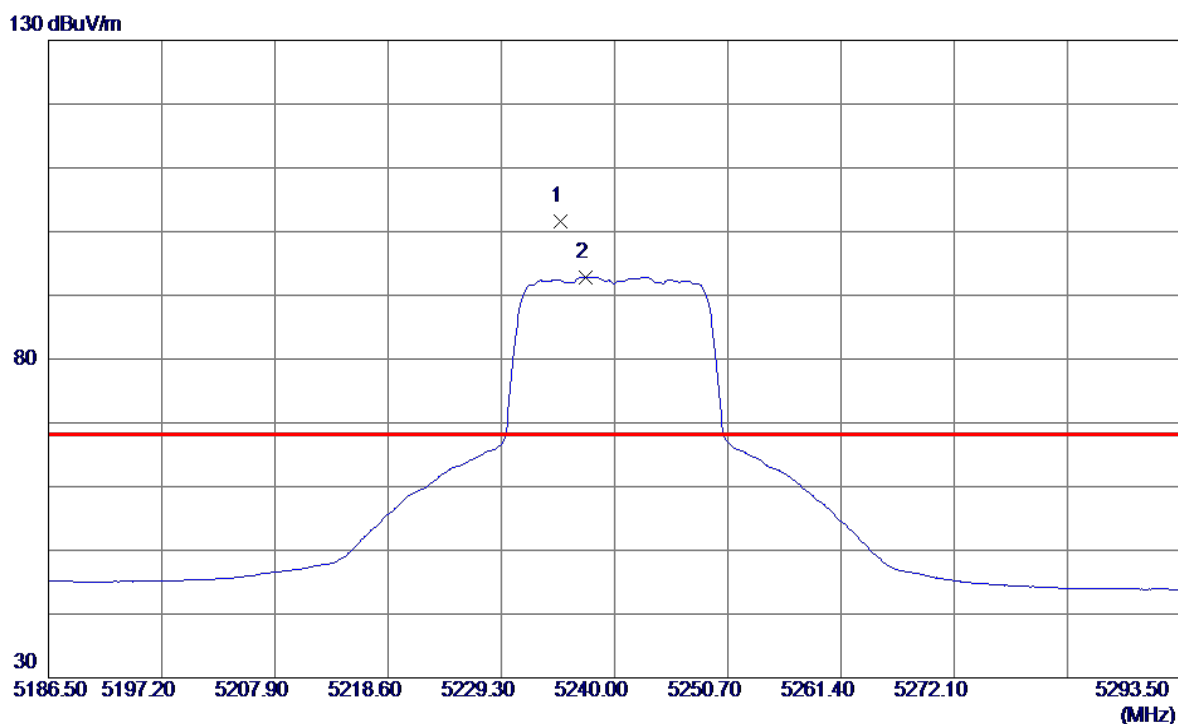

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5234.8640    | 84.53                      | 17.06                   | 101.59                    | 68.30           | 33.29        | Peak     | No Limit |
| 2   | 5237.3250    | 75.78                      | 17.07                   | 92.85                     | 999.00          | -906.15      | AVG      | No Limit |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz |


### Horizontal

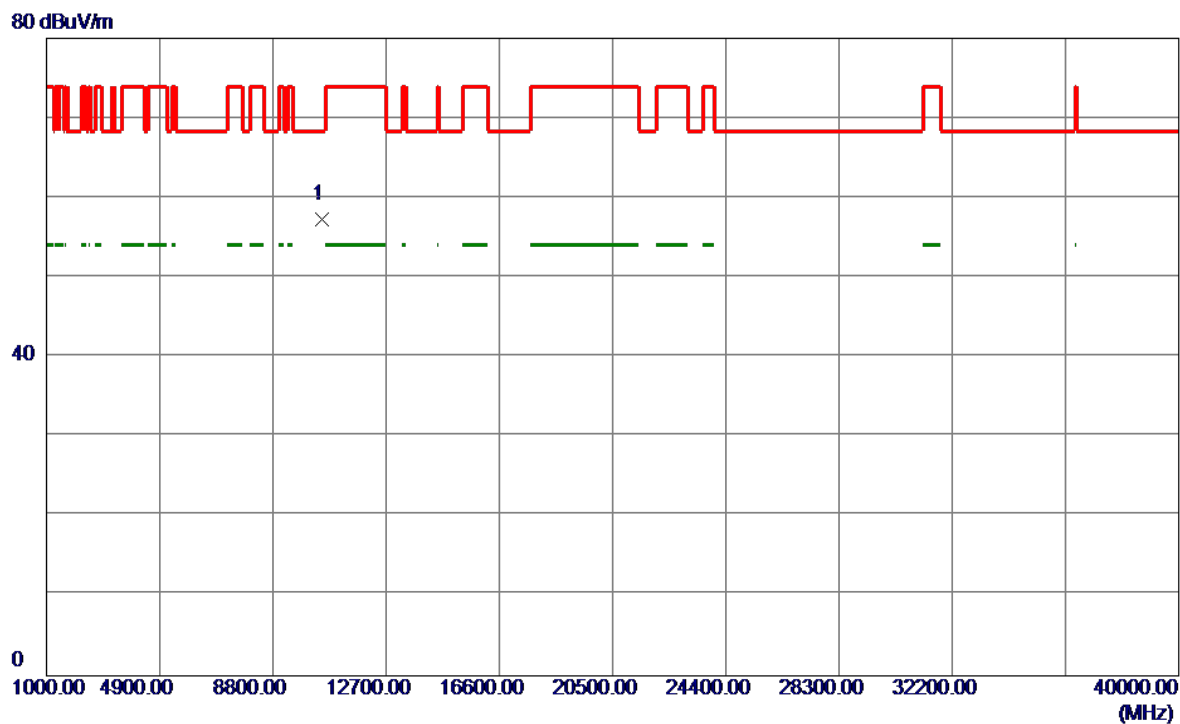

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10474.9000   | 42.30                      | 14.98                   | 57.28                     | 68.30           | -11.02       | Peak     |         |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz |


# Vertical

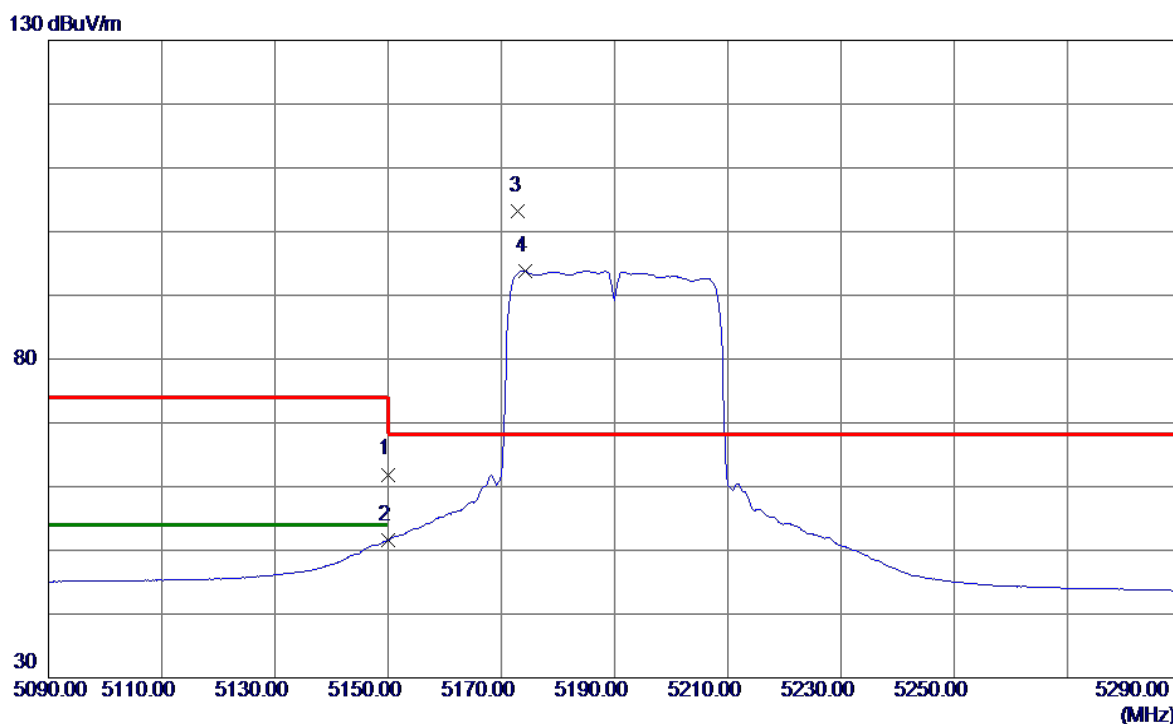

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 45.14                      | 16.76                   | 61.90                     | 74.00           | -12.10       | Peak     |          |
| 2   | 5150.0000    | 34.82                      | 16.76                   | 51.58                     | 54.00           | -2.42        | AVG      |          |
| 3 * | 5173.0000    | 86.45                      | 16.84                   | 103.29                    | 68.30           | 34.99        | Peak     | No Limit |
| 4   | 5174.2000    | 76.94                      | 16.84                   | 93.78                     | 999.00          | -905.22      | AVG      | No Limit |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz |

### Vertical

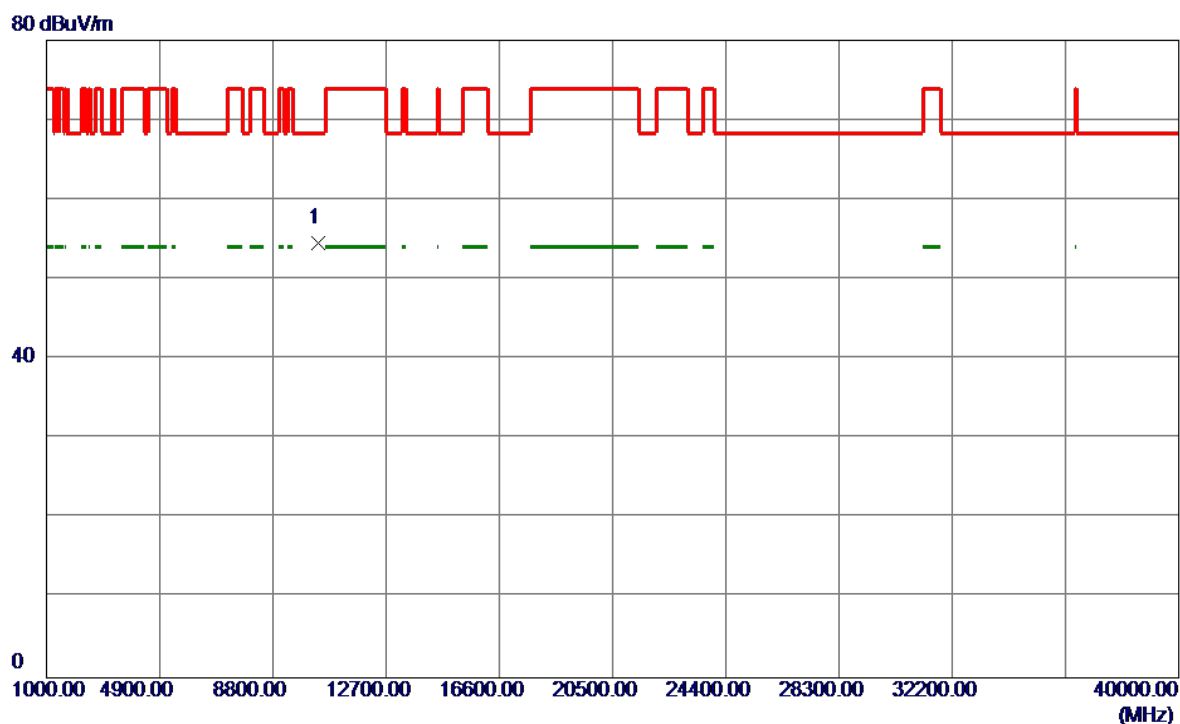


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10379.4000   | 39.77                      | 14.82                   | 54.59                     | 68.30           | -13.71       | Peak     |         |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz |

### Horizontal


130 dBuV/m

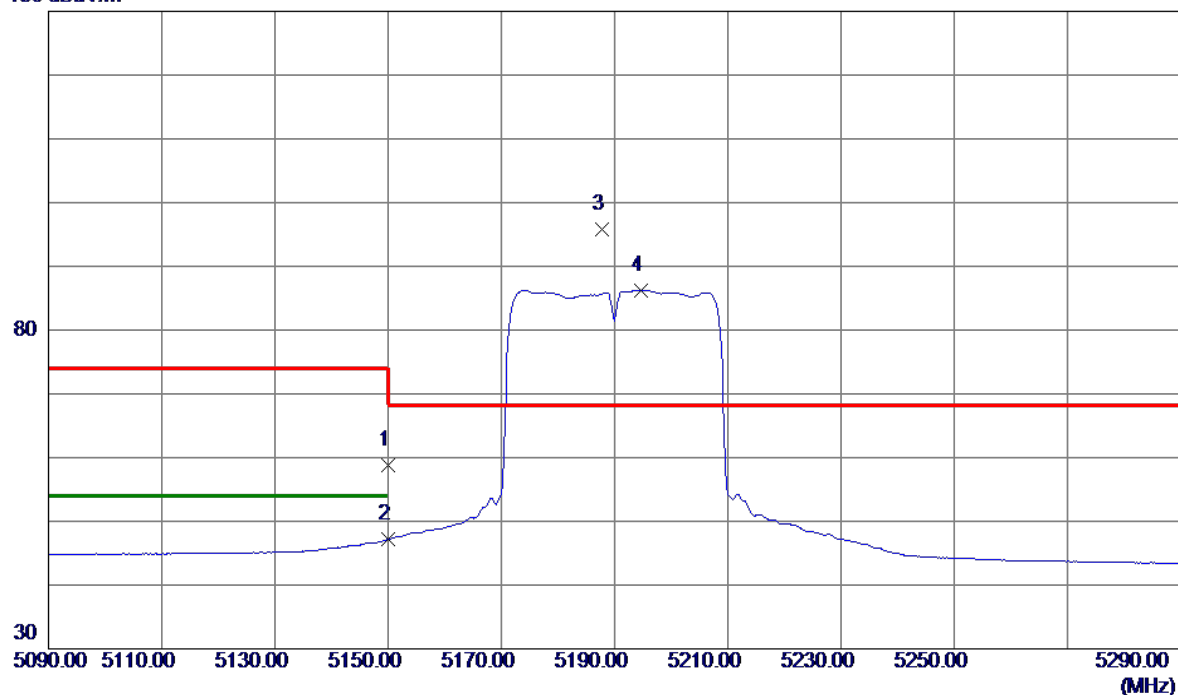

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 42.01                      | 16.76                   | 58.77                     | 74.00           | -15.23       | Peak     |          |
| 2   | 5150.0000    | 30.37                      | 16.76                   | 47.13                     | 54.00           | -6.87        | AVG      |          |
| 3 * | 5187.8000    | 78.82                      | 16.89                   | 95.71                     | 68.30           | 27.41        | Peak     | No Limit |
| 4   | 5194.6000    | 69.31                      | 16.92                   | 86.23                     | 999.00          | -912.77      | AVG      | No Limit |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz |

### Horizontal

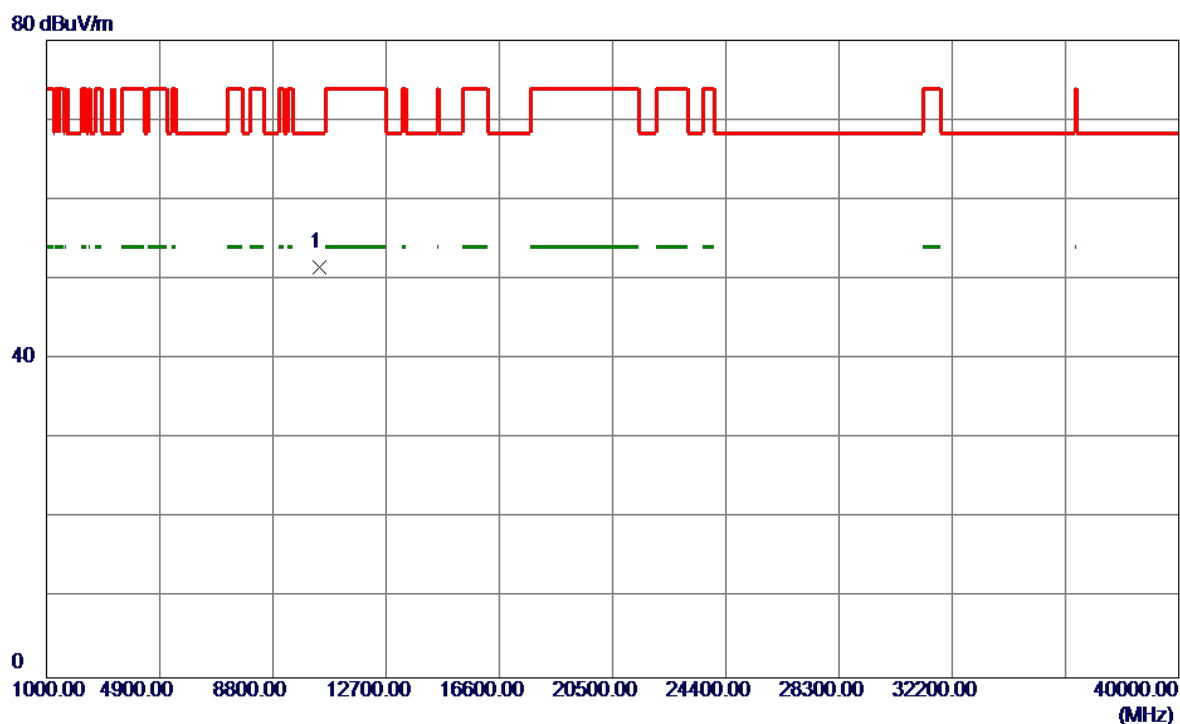


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 10383.5500 | 36.74         | 14.83          | 51.57       | 68.30  | -16.73 | Peak     |         |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz |

### Vertical


130 dBuV/m

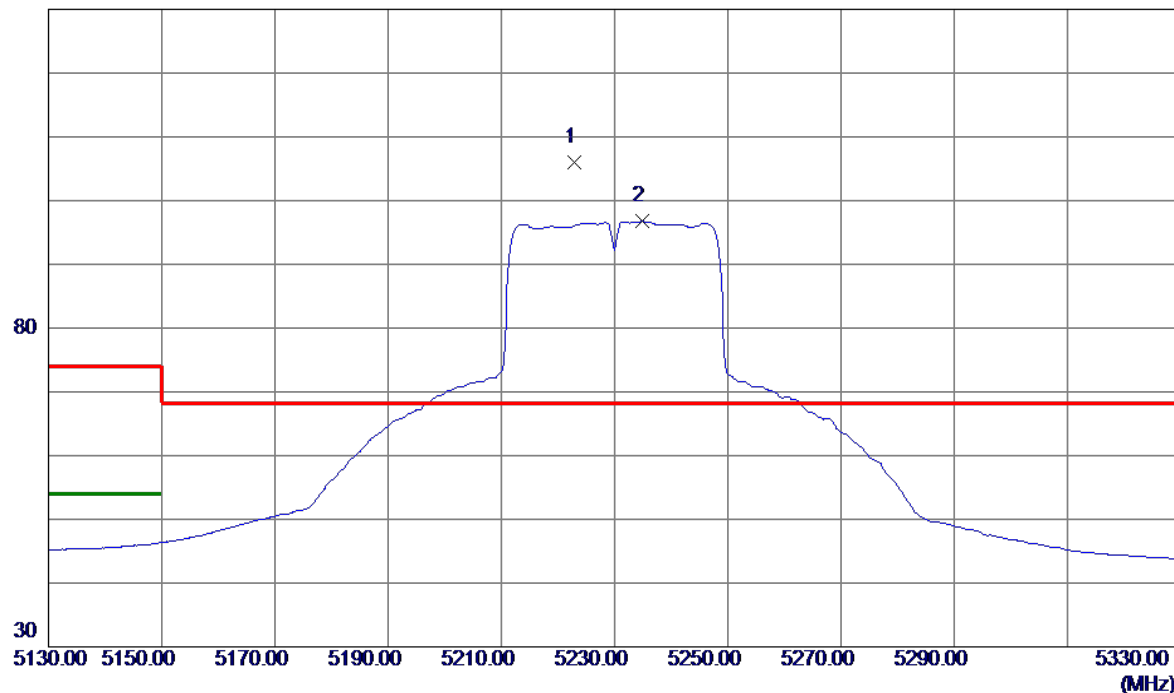

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5222.8000    | 89.01                      | 17.02                   | 106.03                    | 68.30           | 37.73        | Peak     | No Limit |
| 2   | 5234.8000    | 79.68                      | 17.06                   | 96.74                     | 999.00          | -902.26      | AVG      | No Limit |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz |

### Vertical

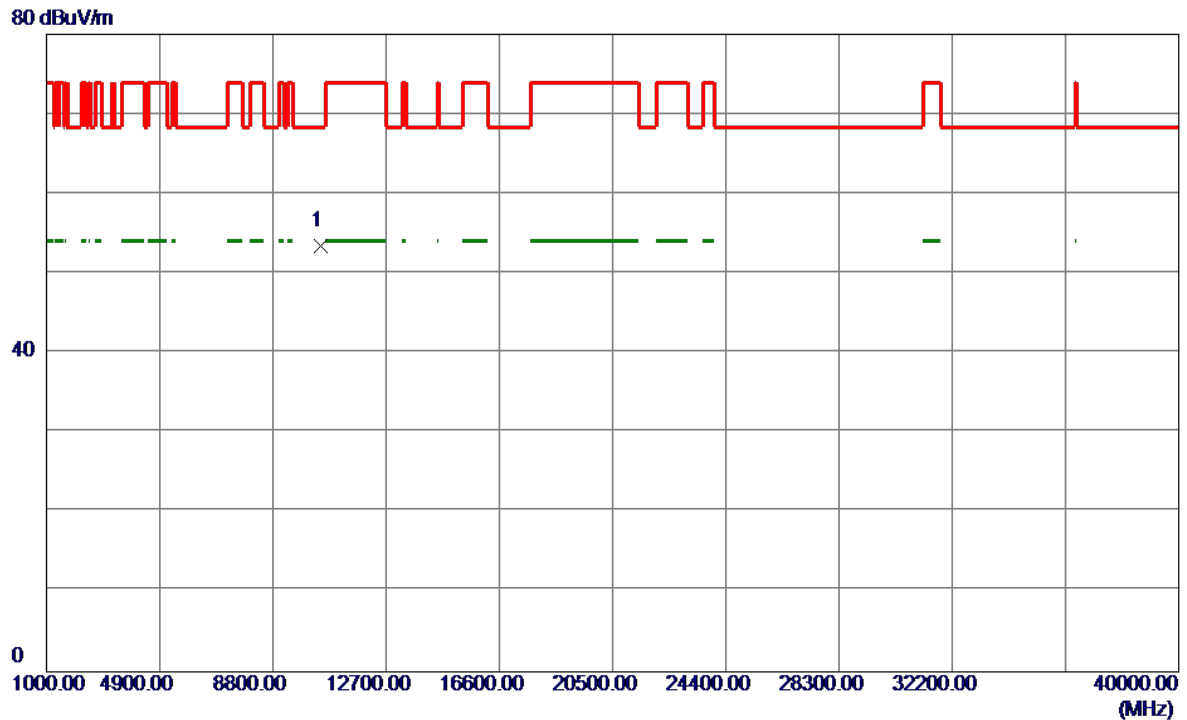


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10459.8000   | 38.53                      | 14.95                   | 53.48                     | 68.30           | -14.82       | Peak     |         |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz |

### Horizontal


130 dBuV/m

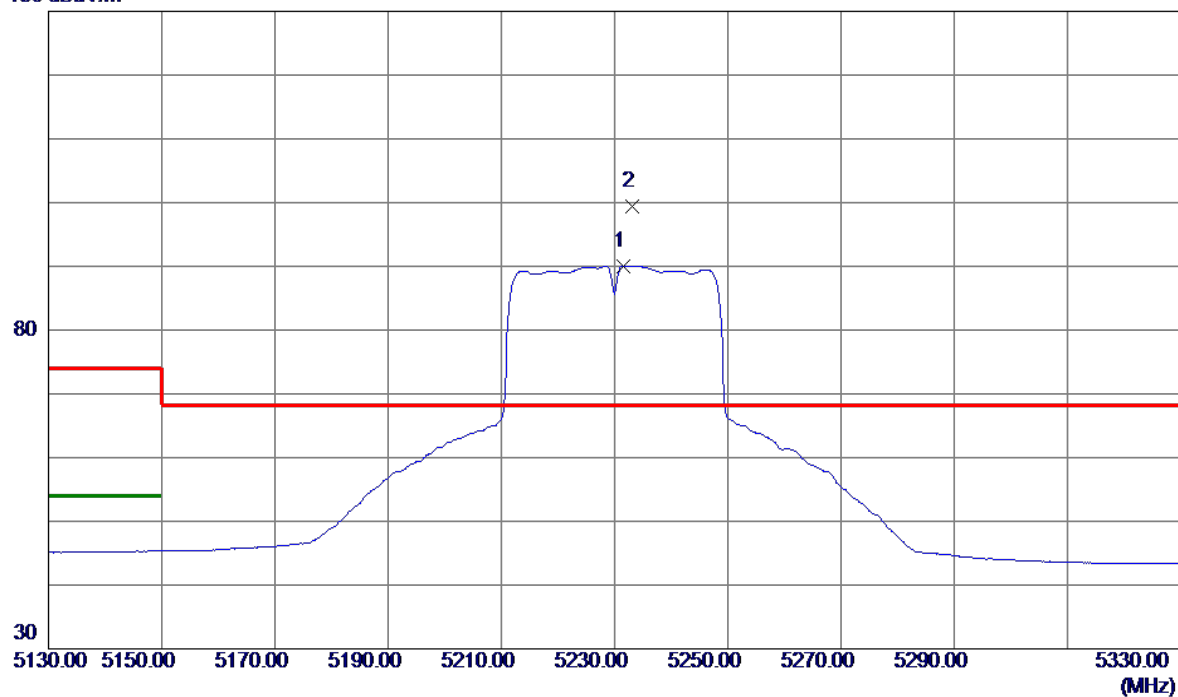

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5231.6000    | 73.02                      | 17.05                   | 90.07                     | 999.00          | -908.93      | AVG      | No Limit |
| 2 * | 5233.2000    | 82.36                      | 17.05                   | 99.41                     | 68.30           | 31.11        | Peak     | No Limit |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz |


### Horizontal

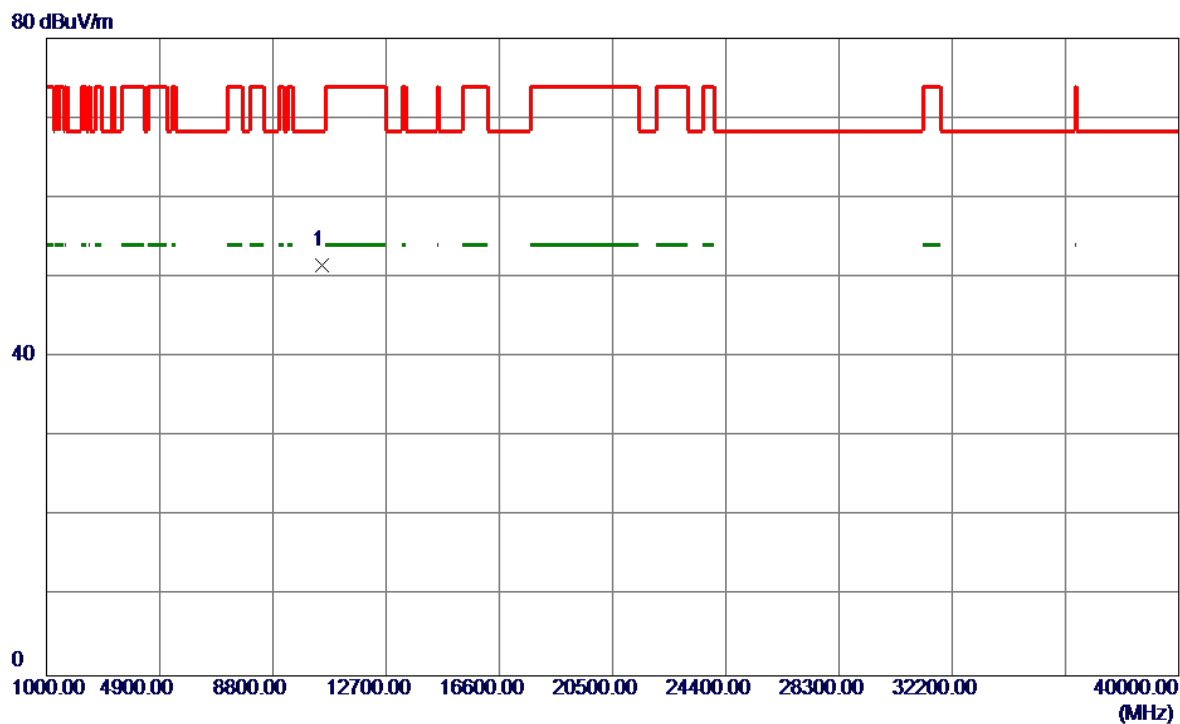

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10473.9500   | 36.52                      | 14.98                   | 51.50                     | 68.30           | -16.80       | Peak     |         |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5260MHz |


### Vertical

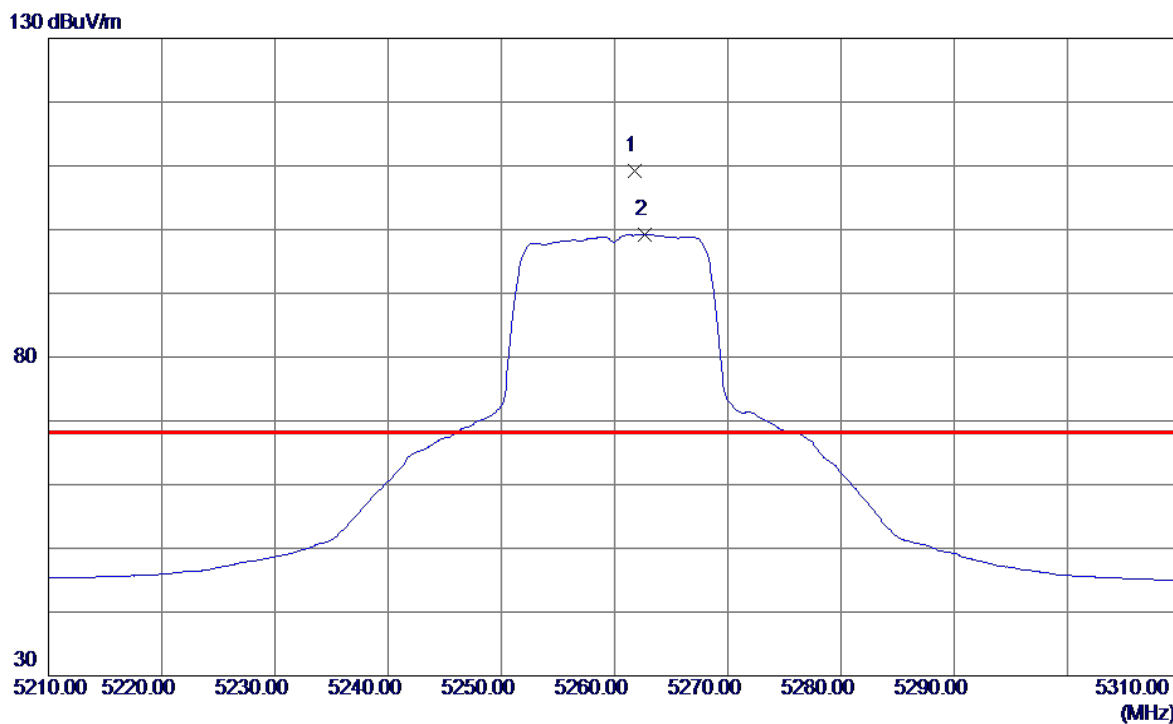

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5261.8000    | 92.05                      | 17.15                   | 109.20                    | 68.30           | 40.90        | Peak     | No Limit |
| 2   | 5262.7000    | 82.12                      | 17.16                   | 99.28                     | 999.00          | -899.72      | AVG      | No Limit |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5260MHz |


### Vertical

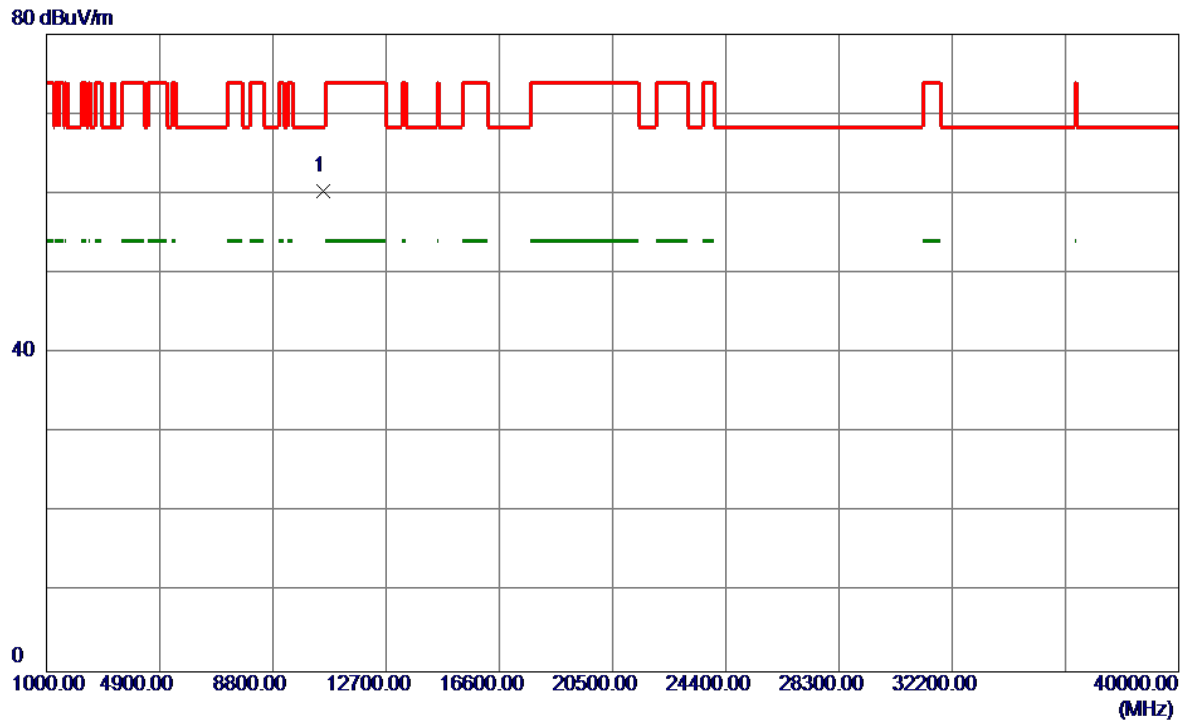

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10516.2000   | 45.22                      | 15.05                   | 60.27                     | 68.30           | -8.03        | Peak     |         |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5260MHz |


### Horizontal

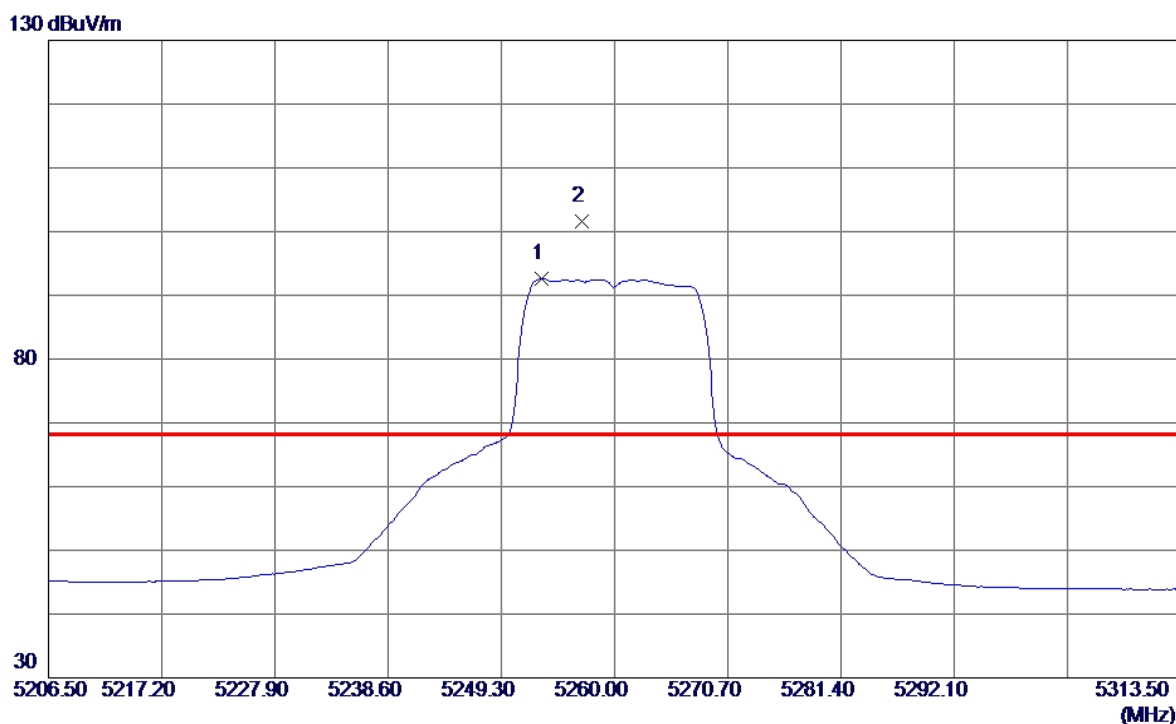

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5253.1520    | 75.53                      | 17.12                   | 92.65                     | 999.00          | -906.35      | AVG      | No Limit |
| 2 * | 5256.8969    | 84.41                      | 17.14                   | 101.55                    | 68.30           | 33.25        | Peak     | No Limit |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5260MHz |

### Horizontal

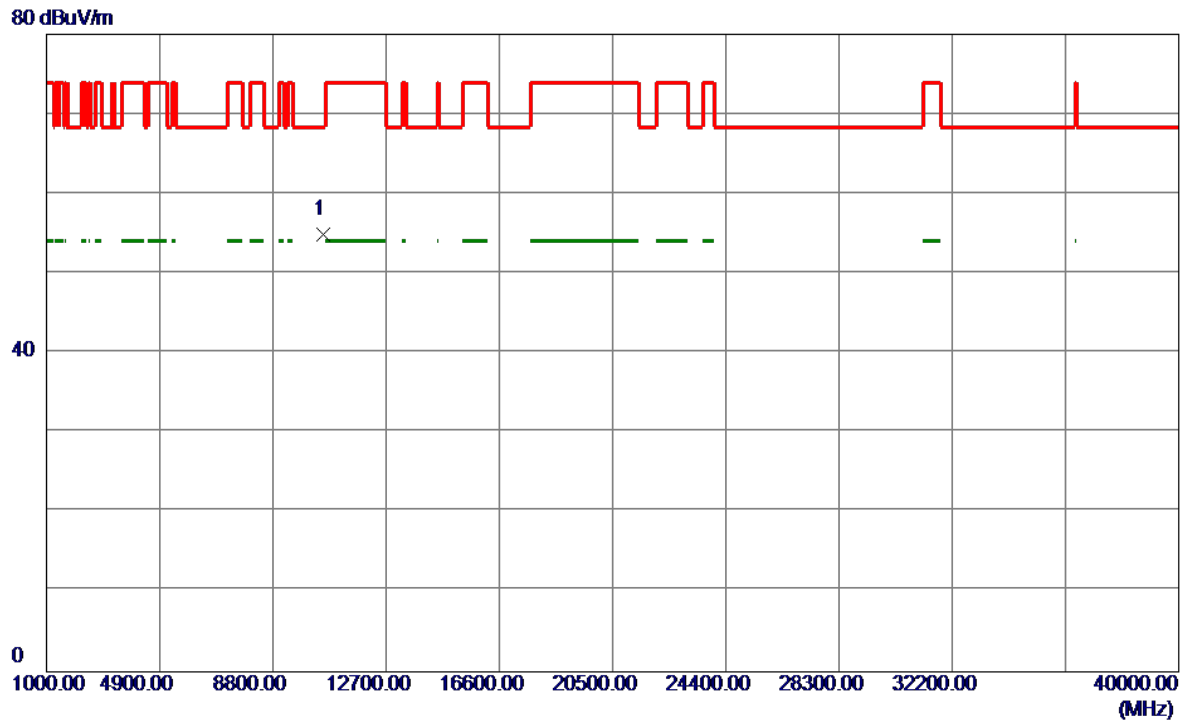


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 10521.2000 | 39.78         | 15.06          | 54.84       | 68.30  | -13.46 | Peak     |         |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5300MHz |

# Vertical


130 dBuV/m

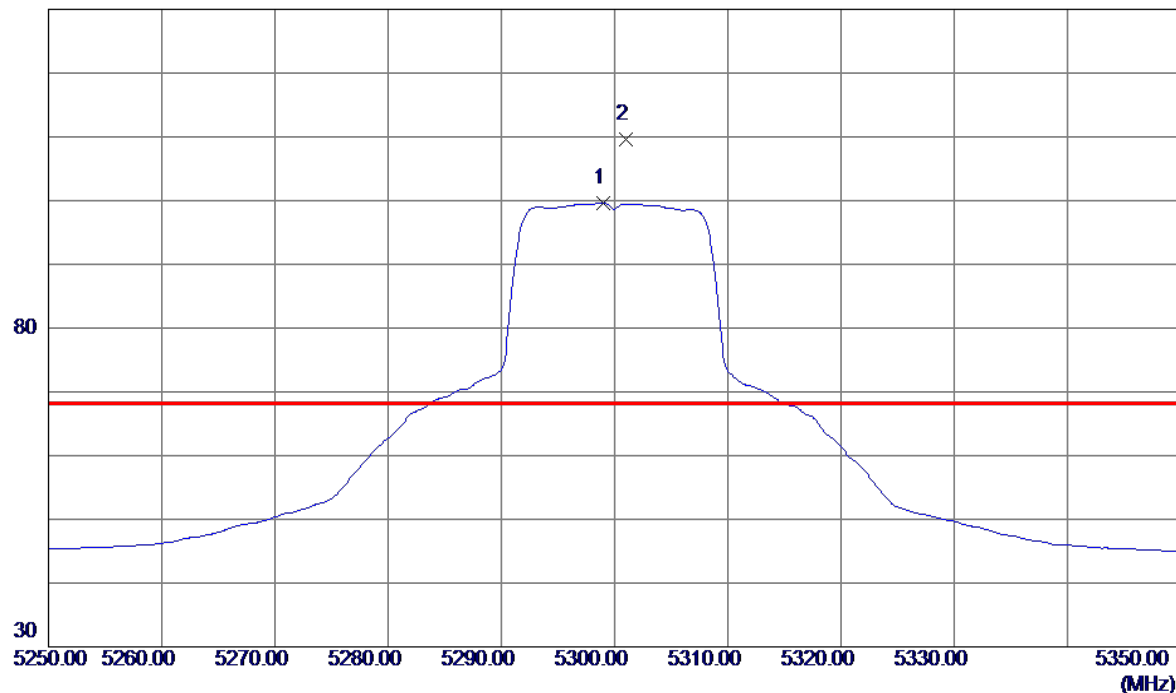

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5299.0000    | 82.31                      | 17.29                   | 99.60                     | 999.00          | -899.40      | AVG      | No Limit |
| 2 * | 5301.0000    | 92.35                      | 17.29                   | 109.64                    | 68.30           | 41.34        | Peak     | No Limit |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5300MHz |

### Vertical

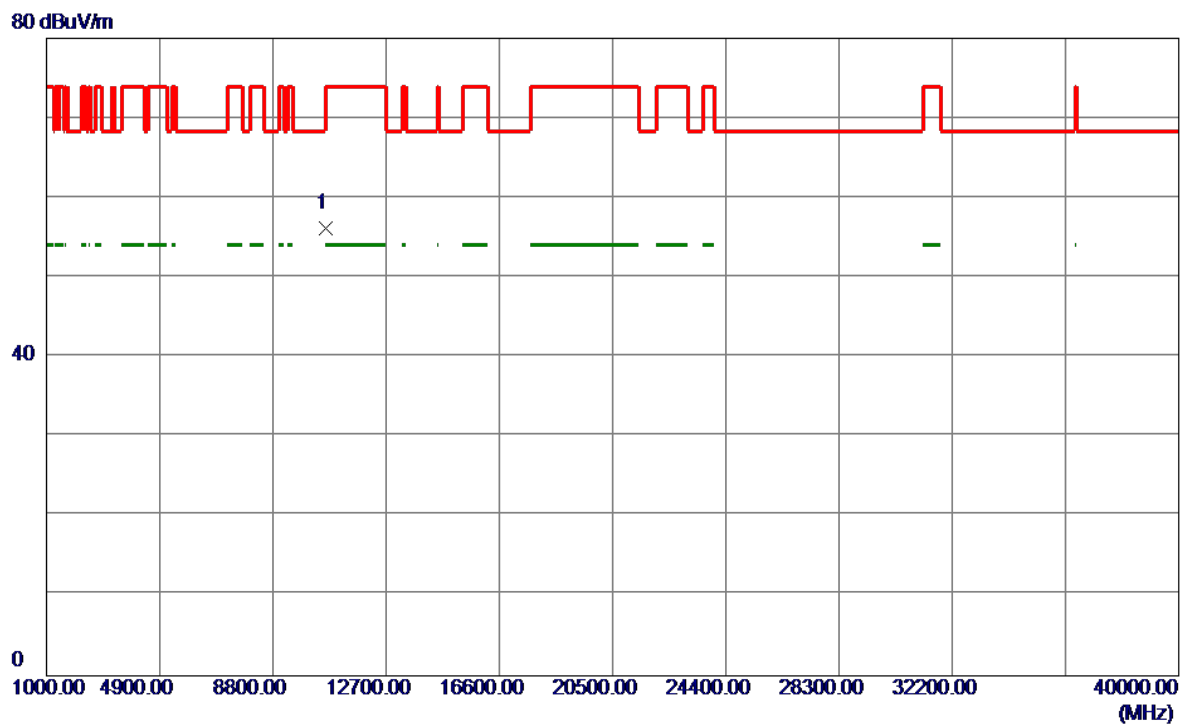


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1 * | 10599.6000 | 41.01         | 15.21          | 56.22       | 68.30  | -12.08 | Peak     |         |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5300MHz |

### Horizontal


130 dBuV/m

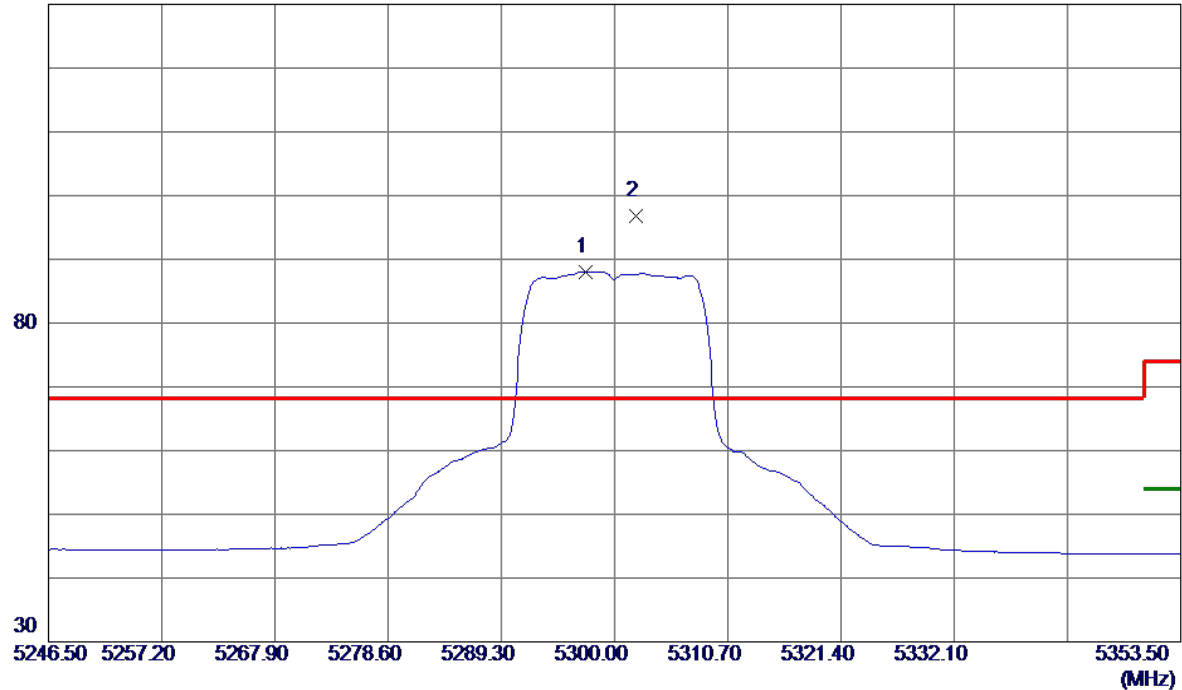

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5297.3250    | 70.75                      | 17.28                   | 88.03                     | 999.00          | -910.97      | AVG      | No Limit |
| 2 * | 5302.0330    | 79.41                      | 17.30                   | 96.71                     | 68.30           | 28.41        | Peak     | No Limit |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5300MHz |


### Horizontal

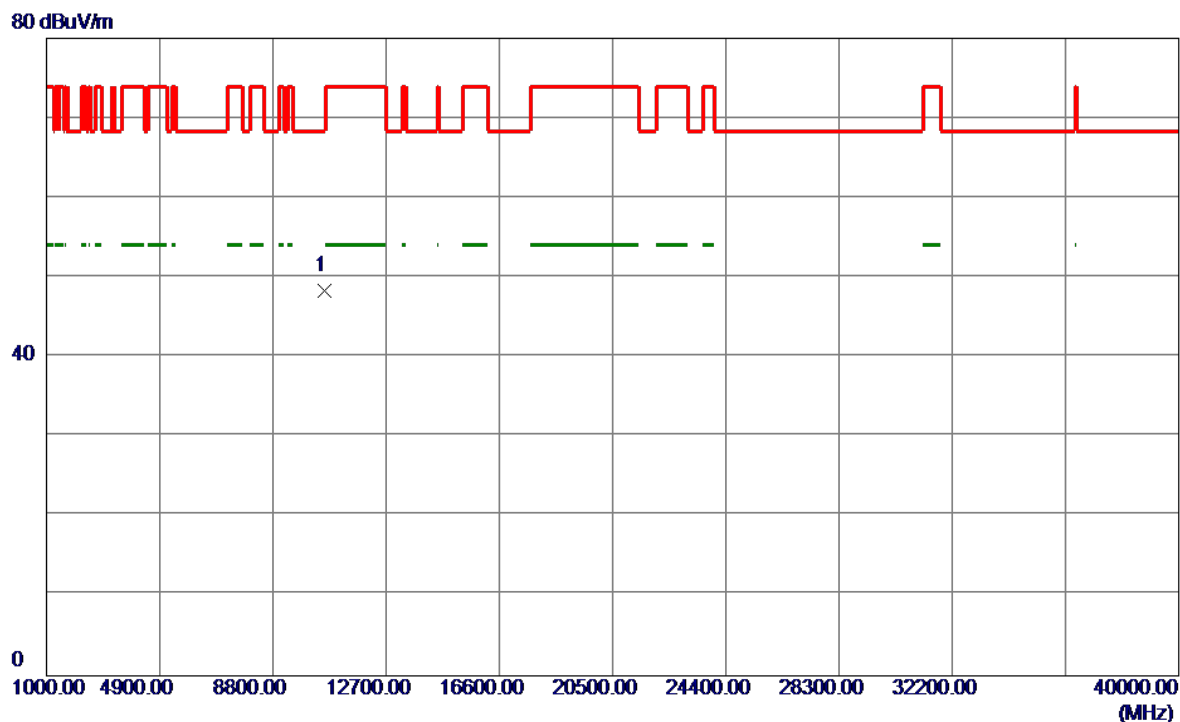

| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 10585.7000 | 33.20         | 15.18          | 48.38       | 68.30  | -19.92 | Peak     |         |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5320MHz |


### Vertical

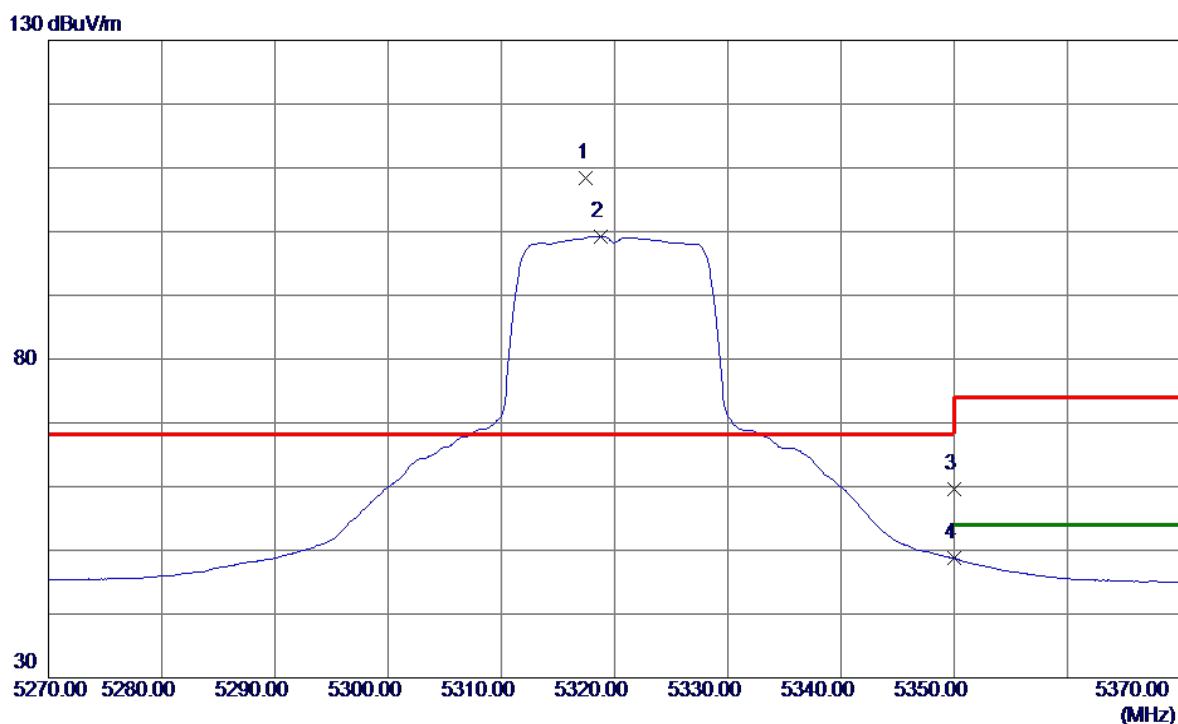

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5317.5000    | 91.07                      | 17.35                   | 108.42                    | 68.30           | 40.12        | Peak     | No Limit |
| 2   | 5318.8000    | 81.87                      | 17.36                   | 99.23                     | 999.00          | -899.77      | AVG      | No Limit |
| 3   | 5350.0000    | 42.12                      | 17.47                   | 59.59                     | 68.30           | -8.71        | Peak     |          |
| 4   | 5350.0000    | 31.24                      | 17.47                   | 48.71                     | 999.00          | -950.29      | AVG      |          |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5320MHz |

### Vertical

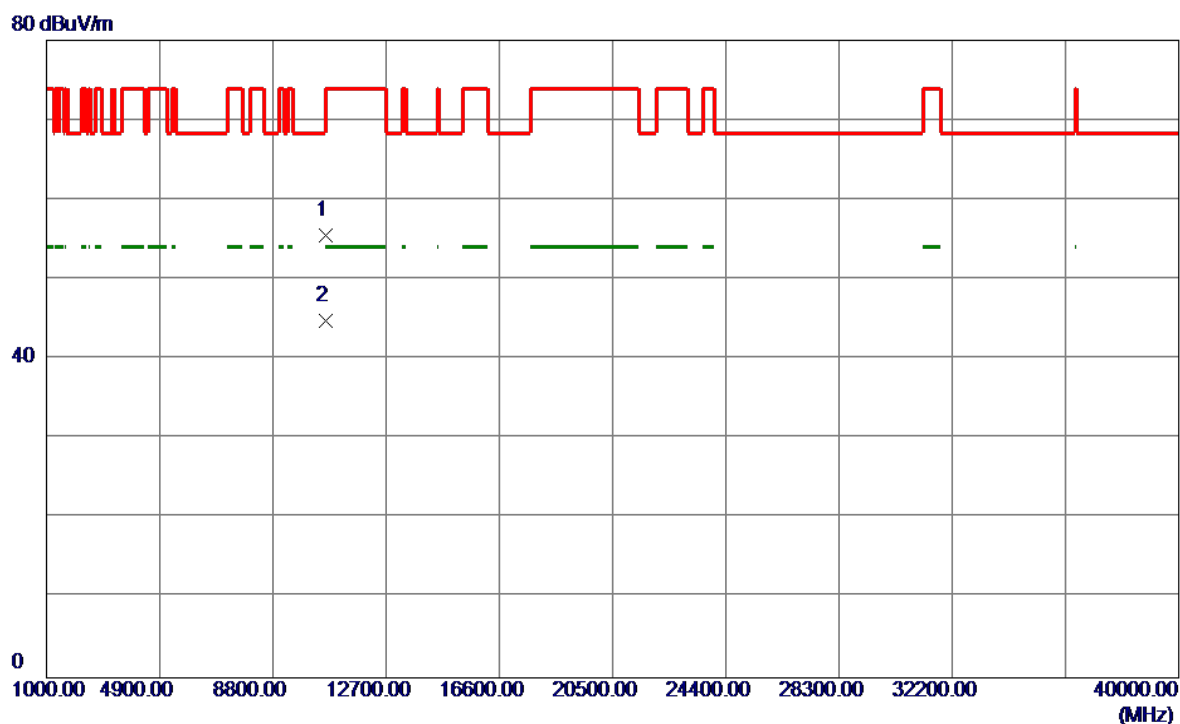


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10633.4000   | 40.20                      | 15.28                   | 55.48                     | 74.00           | -18.52       | Peak     |         |
| 2 * | 10639.8000   | 29.50                      | 15.29                   | 44.79                     | 54.00           | -9.21        | AVG      |         |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5320MHz |

### Horizontal


130 dBuV/m

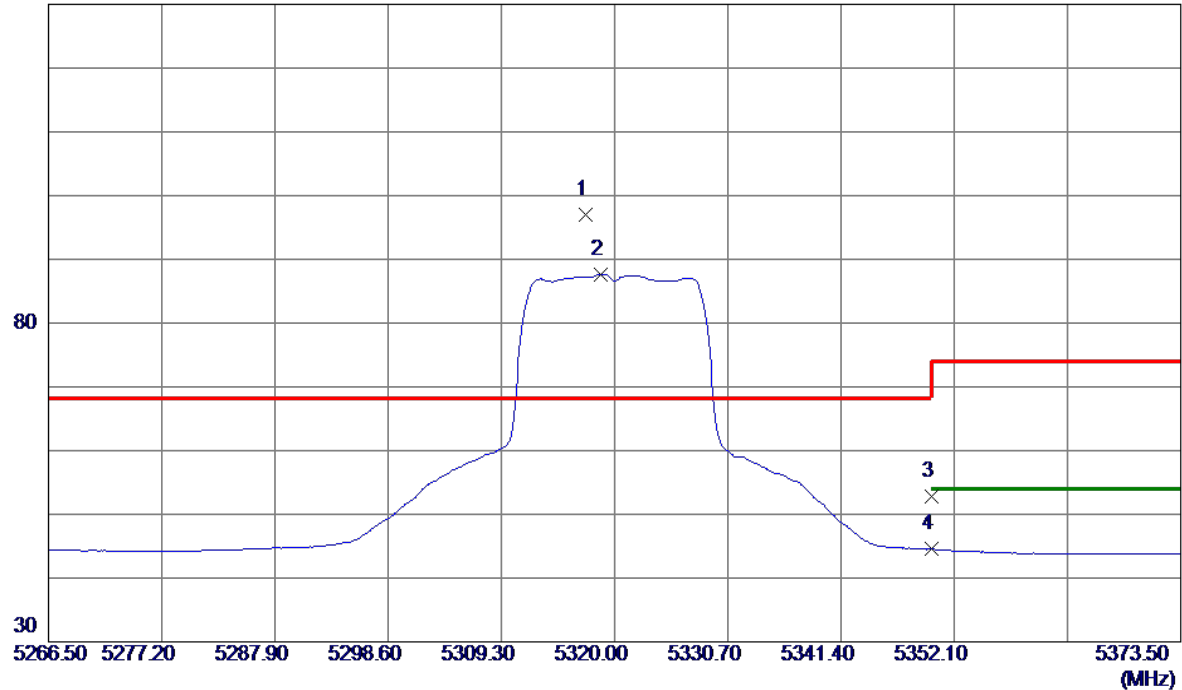

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5317.2180    | 79.67                      | 17.35                   | 97.02                     | 68.30           | 28.72        | Peak     | No Limit |
| 2   | 5318.7160    | 70.30                      | 17.35                   | 87.65                     | 999.00          | -911.35      | AVG      | No Limit |
| 3   | 5350.0000    | 35.38                      | 17.47                   | 52.85                     | 68.30           | -15.45       | Peak     |          |
| 4   | 5350.0000    | 27.06                      | 17.47                   | 44.53                     | 999.00          | -954.47      | AVG      |          |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5320MHz |


### Horizontal

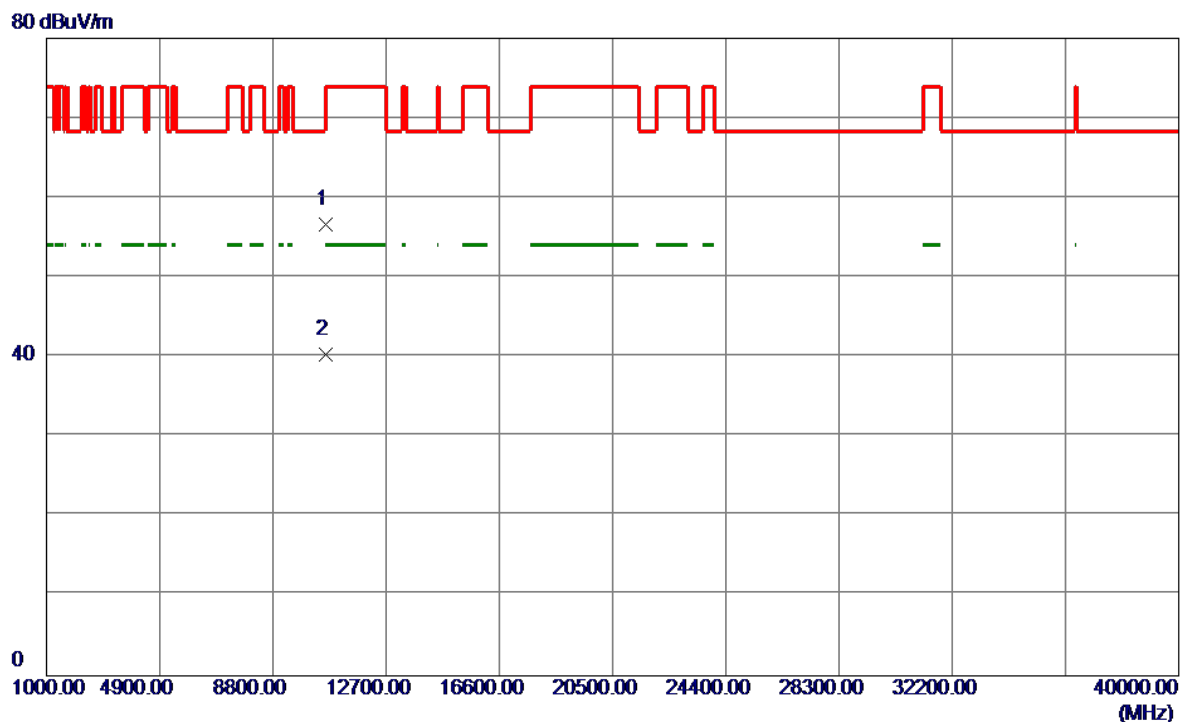

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10633.7500   | 41.29                      | 15.28                   | 56.57                     | 74.00           | -17.43       | Peak     |         |
| 2 * | 10640.0500   | 25.10                      | 15.29                   | 40.39                     | 54.00           | -13.61       | AVG      |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5260MHz |


### Vertical

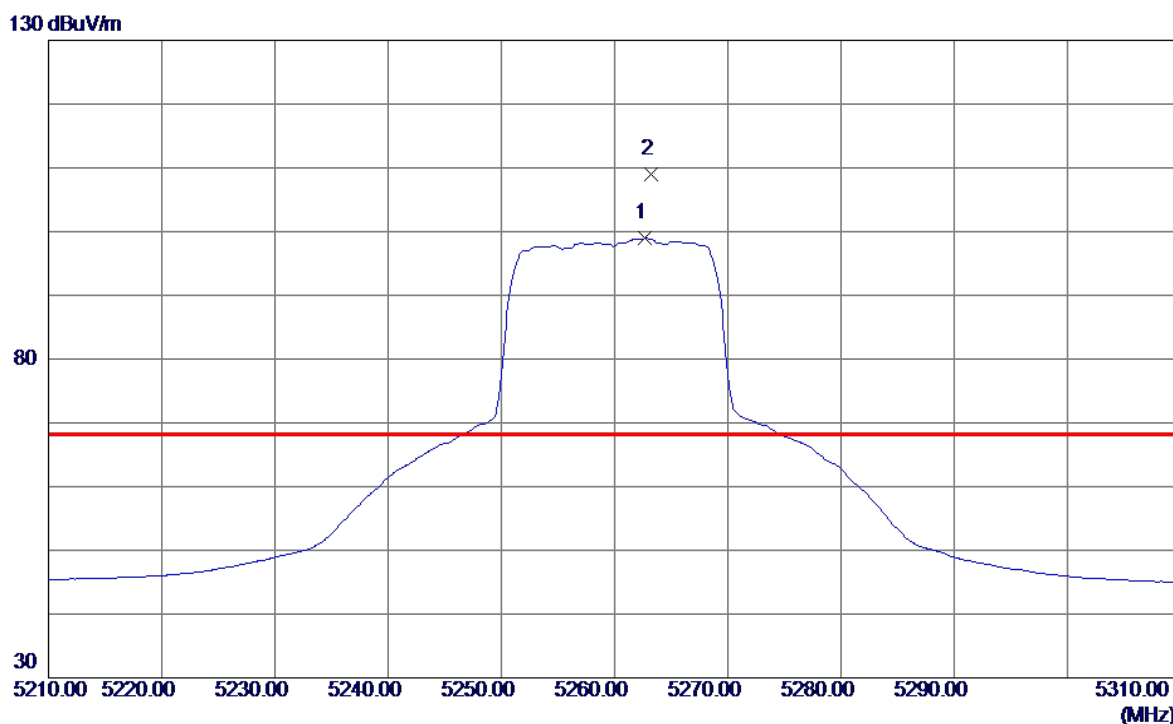

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5262.7000    | 81.74                      | 17.16                   | 98.90                     | 999.00          | -900.10      | AVG      | No Limit |
| 2 * | 5263.2000    | 91.94                      | 17.16                   | 109.10                    | 68.30           | 40.80        | Peak     | No Limit |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5260MHz |


### Vertical

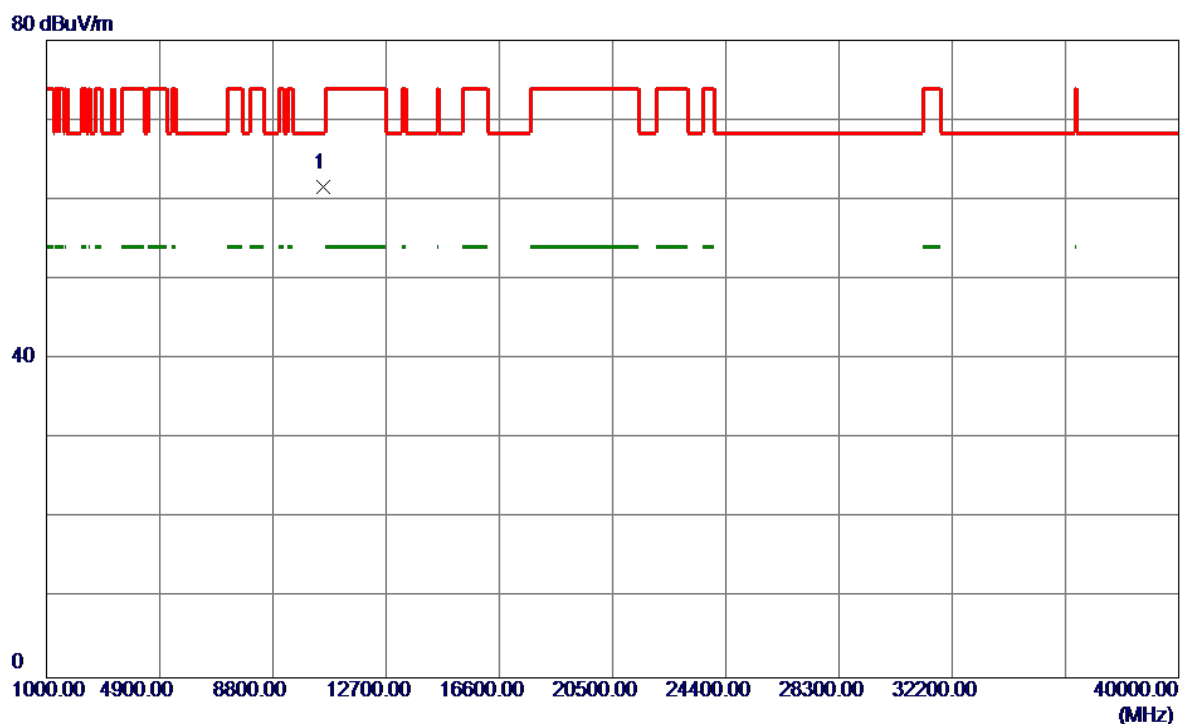

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10519.0000   | 46.46                      | 15.06                   | 61.52                     | 68.30           | -6.78        | Peak     |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5260MHz |


### Horizontal

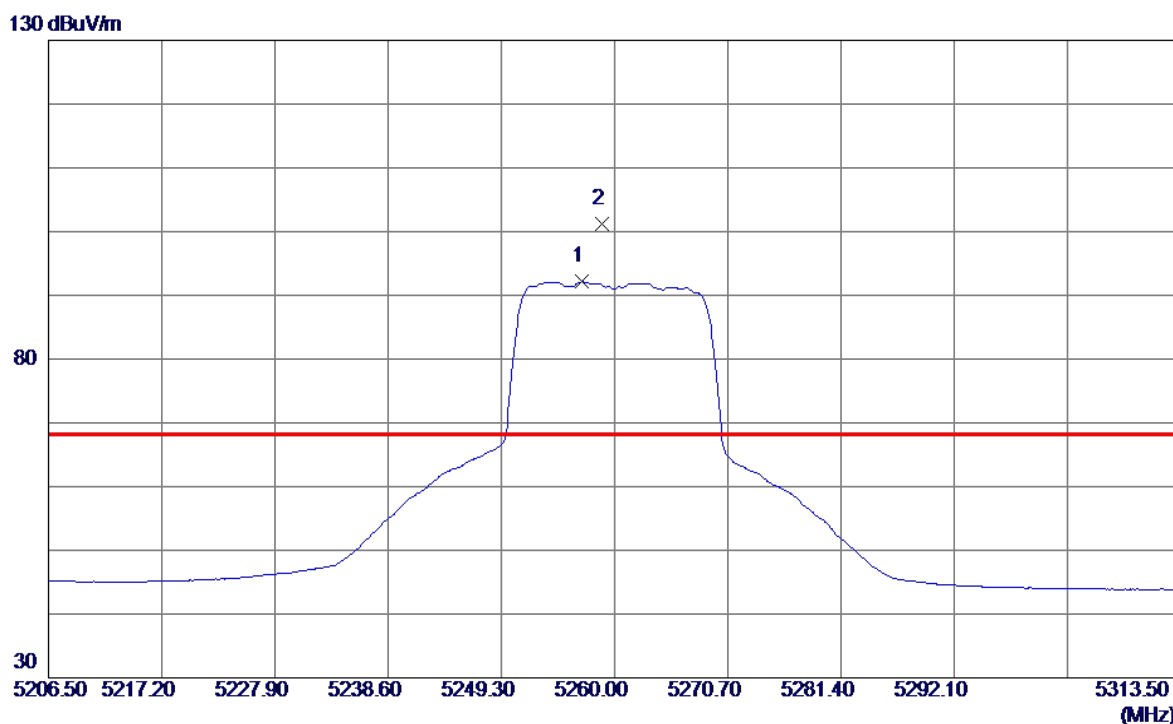

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5256.8969    | 74.98                      | 17.14                   | 92.12                     | 999.00          | -906.88      | AVG      | No Limit |
| 2 * | 5258.8230    | 84.07                      | 17.14                   | 101.21                    | 68.30           | 32.91        | Peak     | No Limit |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5260MHz |

### Horizontal

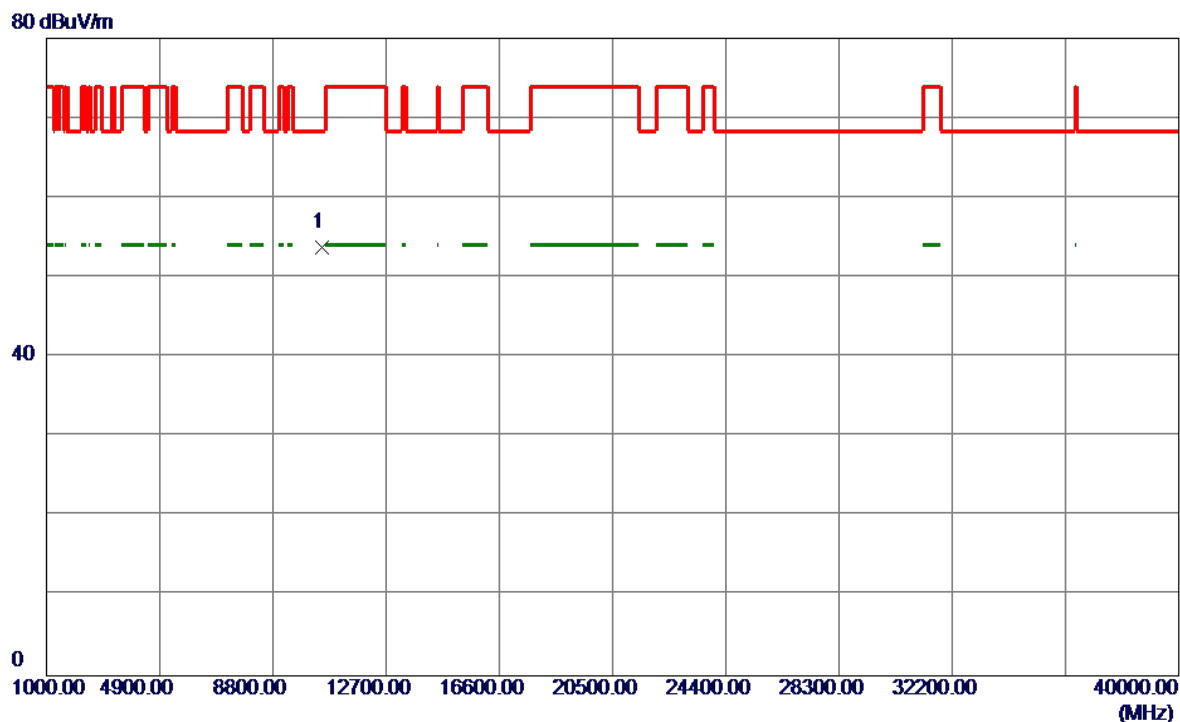


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10511.4000   | 38.74                      | 15.04                   | 53.78                     | 68.30           | -14.52       | Peak     |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5300MHz |

### Vertical


130 dBuV/m

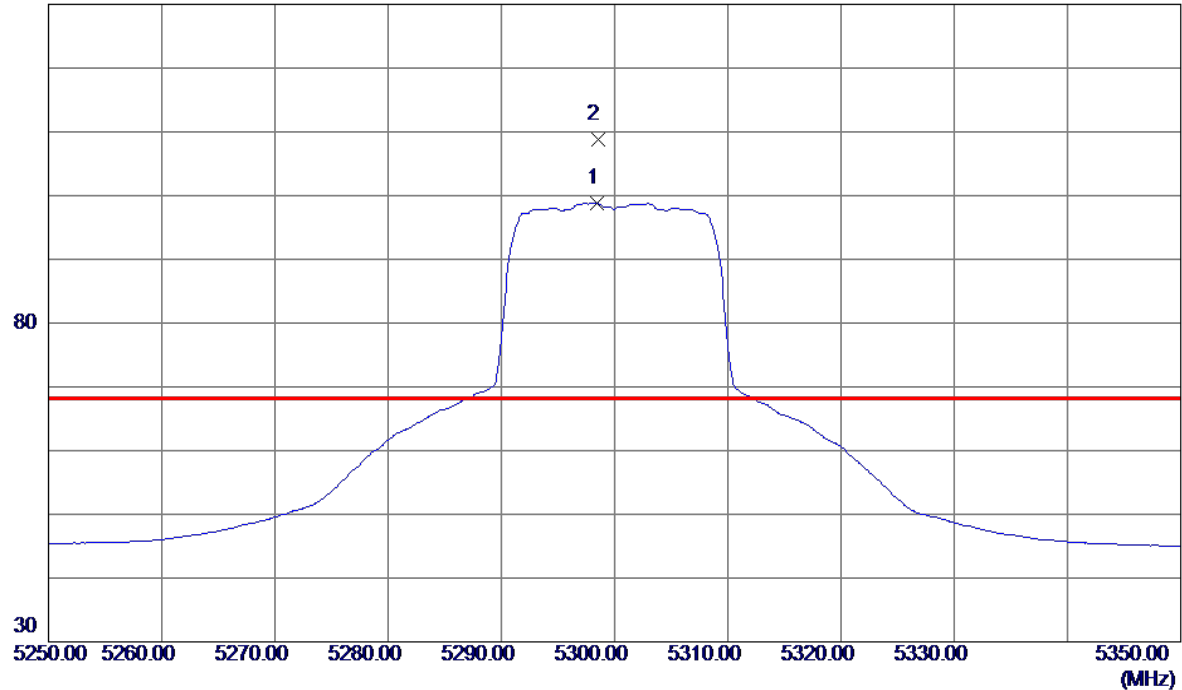

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5298.4000    | 81.52                      | 17.28                   | 98.80                     | 999.00          | -900.20      | AVG      | No Limit |
| 2 * | 5298.5000    | 91.61                      | 17.28                   | 108.89                    | 68.30           | 40.59        | Peak     | No Limit |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5300MHz |

### Vertical

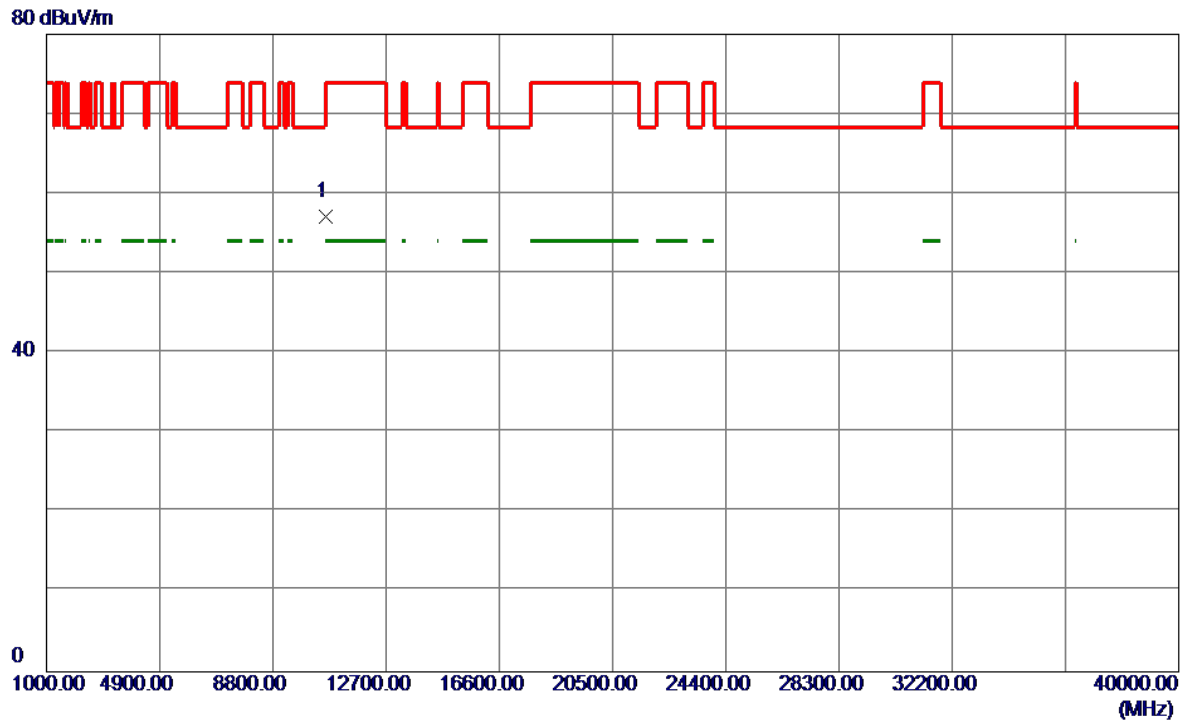


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10599.4000   | 41.97                      | 15.21                   | 57.18                     | 68.30           | -11.12       | Peak     |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5300MHz |

### Horizontal


130 dBuV/m

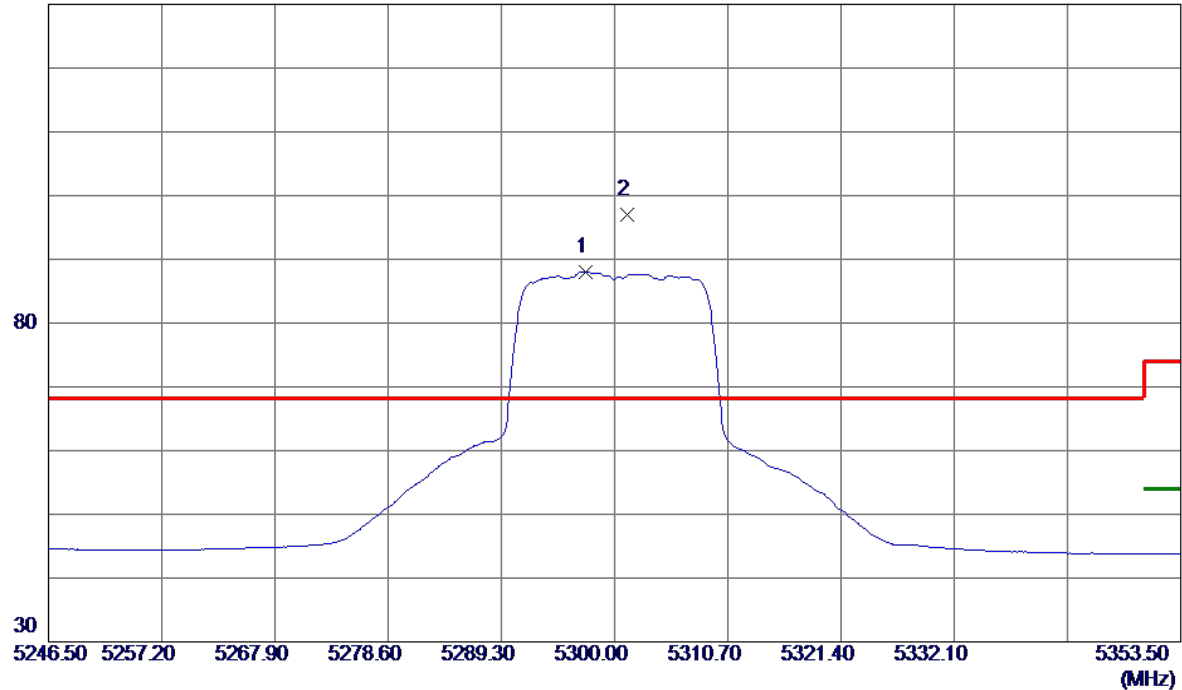

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5297.2180    | 70.74                      | 17.28                   | 88.02                     | 999.00          | -910.98      | AVG      | No Limit |
| 2 * | 5301.1770    | 79.71                      | 17.29                   | 97.00                     | 68.30           | 28.70        | Peak     | No Limit |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5300MHz |


### Horizontal

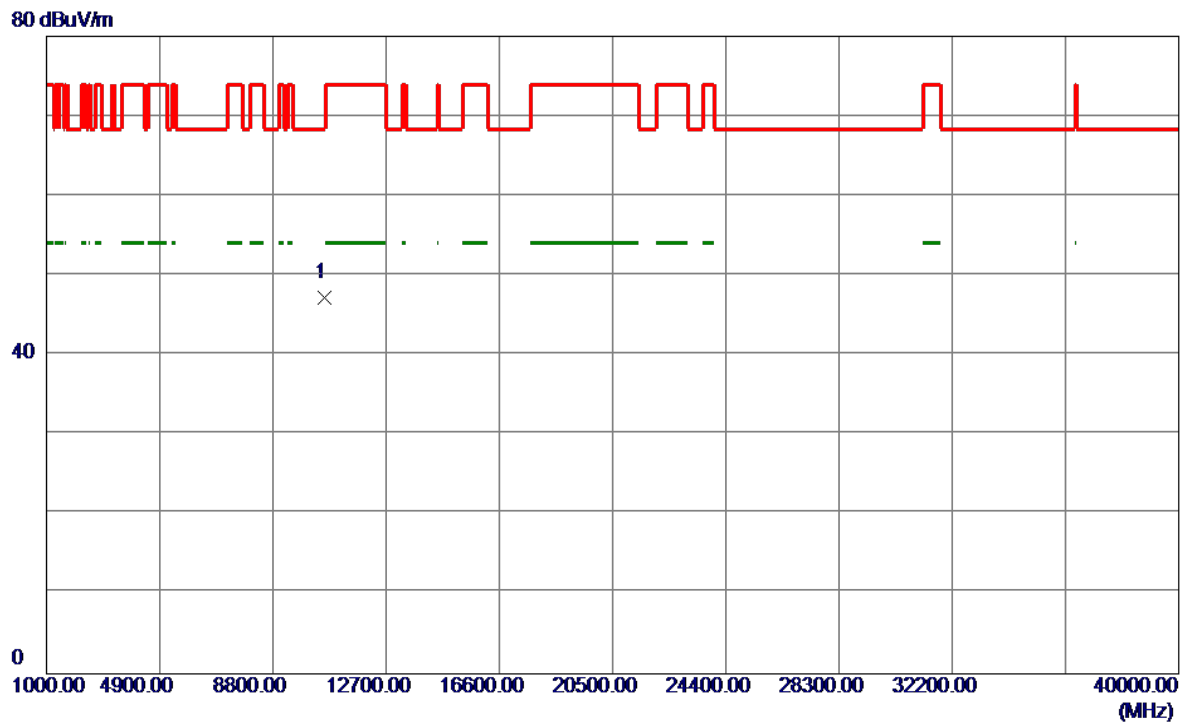

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10578.4500   | 32.10                      | 15.17                   | 47.27                     | 68.30           | -21.03       | Peak     |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5320MHz |


### Vertical

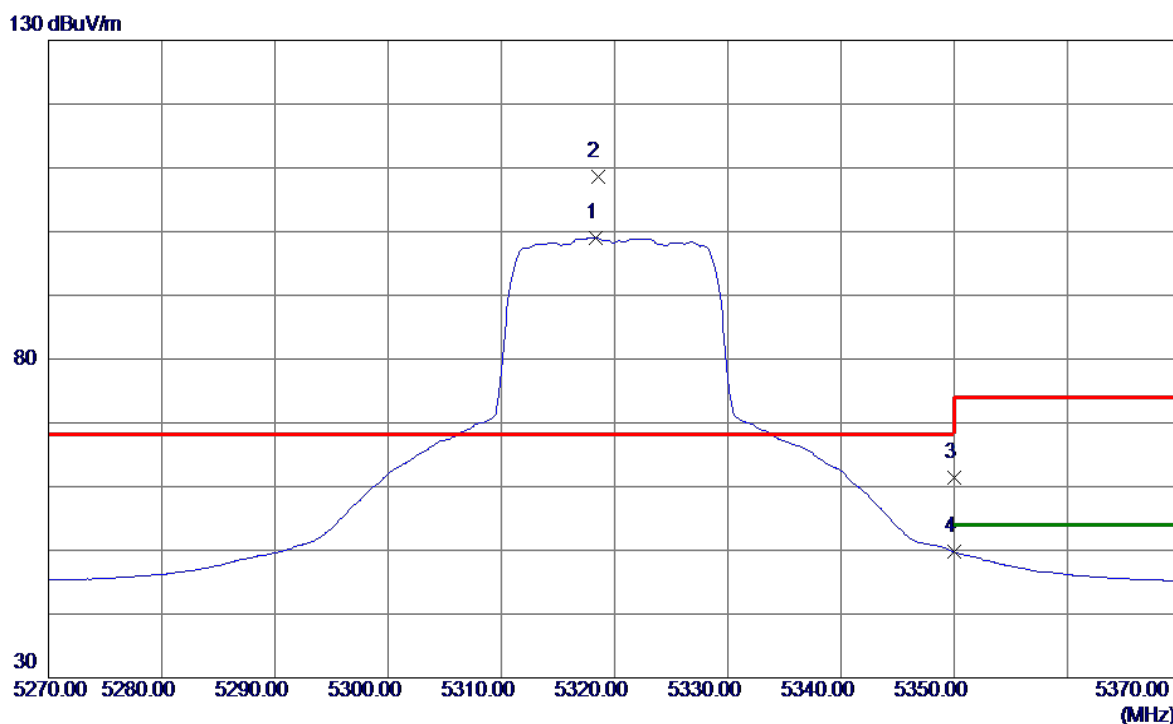

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5318.3000    | 81.68                      | 17.35                   | 99.03                     | 999.00          | -899.97      | AVG      | No Limit |
| 2 * | 5318.5000    | 91.21                      | 17.35                   | 108.56                    | 68.30           | 40.26        | Peak     | No Limit |
| 3   | 5350.0000    | 44.00                      | 17.47                   | 61.47                     | 68.30           | -6.83        | Peak     |          |
| 4   | 5350.0000    | 32.26                      | 17.47                   | 49.73                     | 999.00          | -949.27      | AVG      |          |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5320MHz |

### Vertical

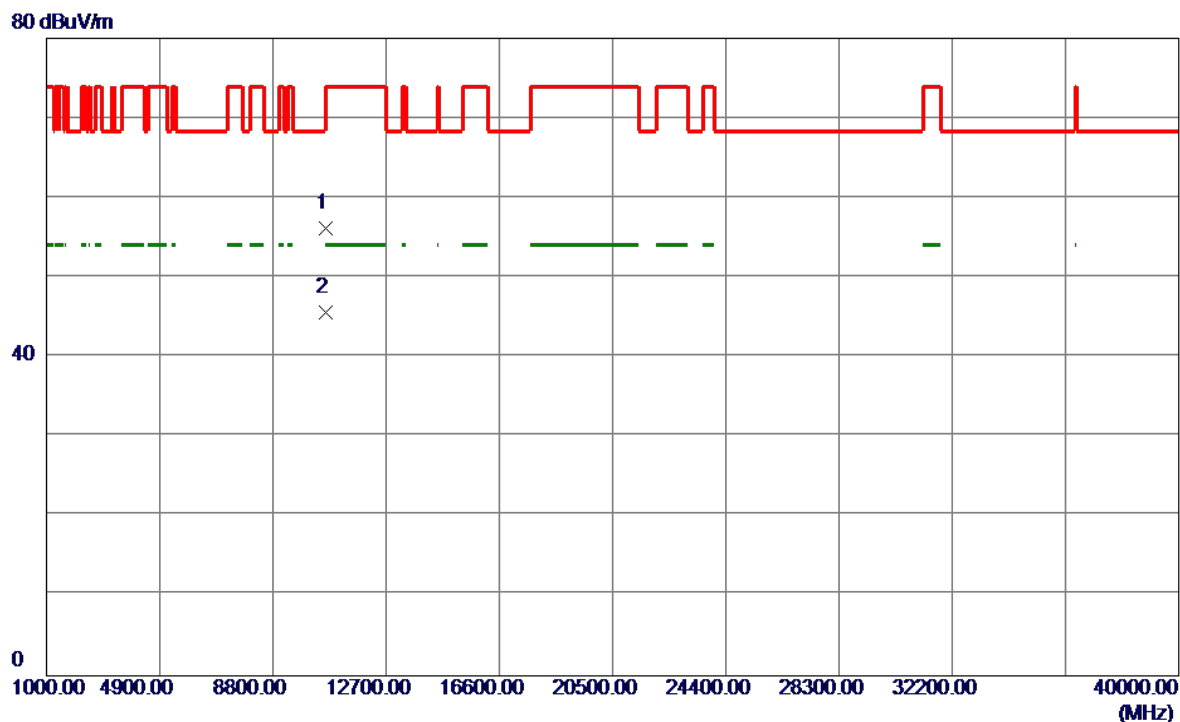


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10638.4000   | 40.82                      | 15.29                   | 56.11                     | 74.00           | -17.89       | Peak     |         |
| 2 * | 10639.8000   | 30.28                      | 15.29                   | 45.57                     | 54.00           | -8.43        | AVG      |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5320MHz |

### Horizontal


130 dBuV/m

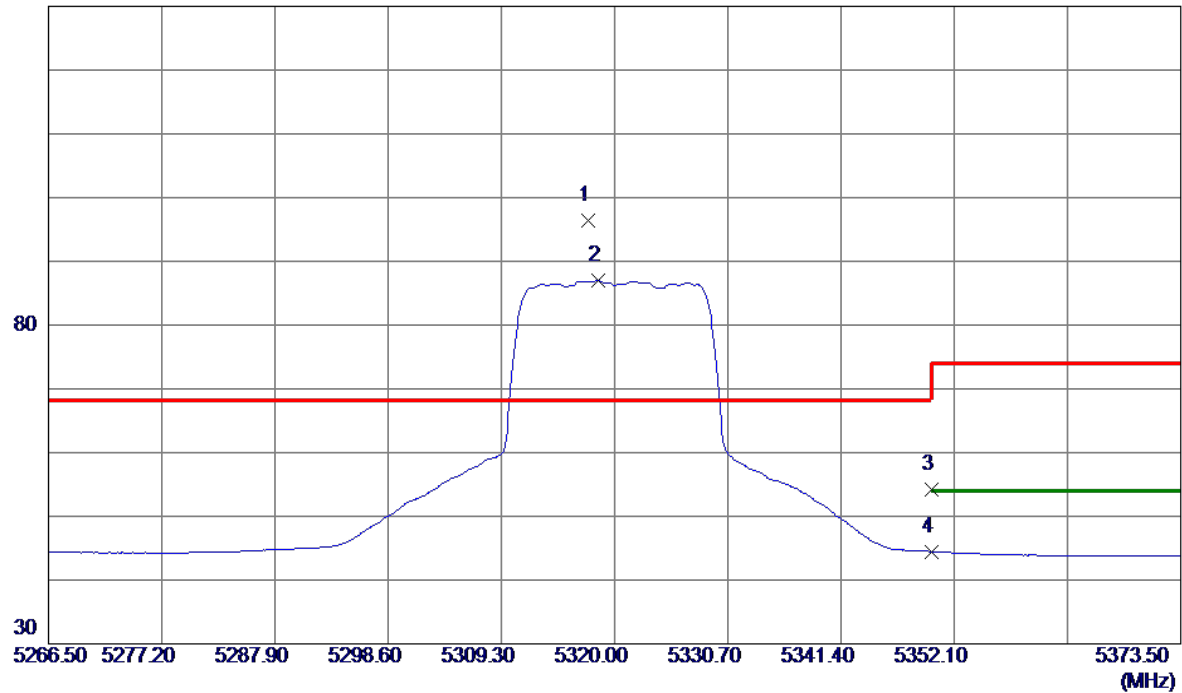

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5317.5390    | 79.11                      | 17.35                   | 96.46                     | 68.30           | 28.16        | Peak     | No Limit |
| 2   | 5318.3950    | 69.62                      | 17.35                   | 86.97                     | 999.00          | -912.03      | AVG      | No Limit |
| 3   | 5350.0000    | 36.75                      | 17.47                   | 54.22                     | 68.30           | -14.08       | Peak     |          |
| 4   | 5350.0000    | 26.98                      | 17.47                   | 44.45                     | 999.00          | -954.55      | AVG      |          |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5320MHz |

### Horizontal

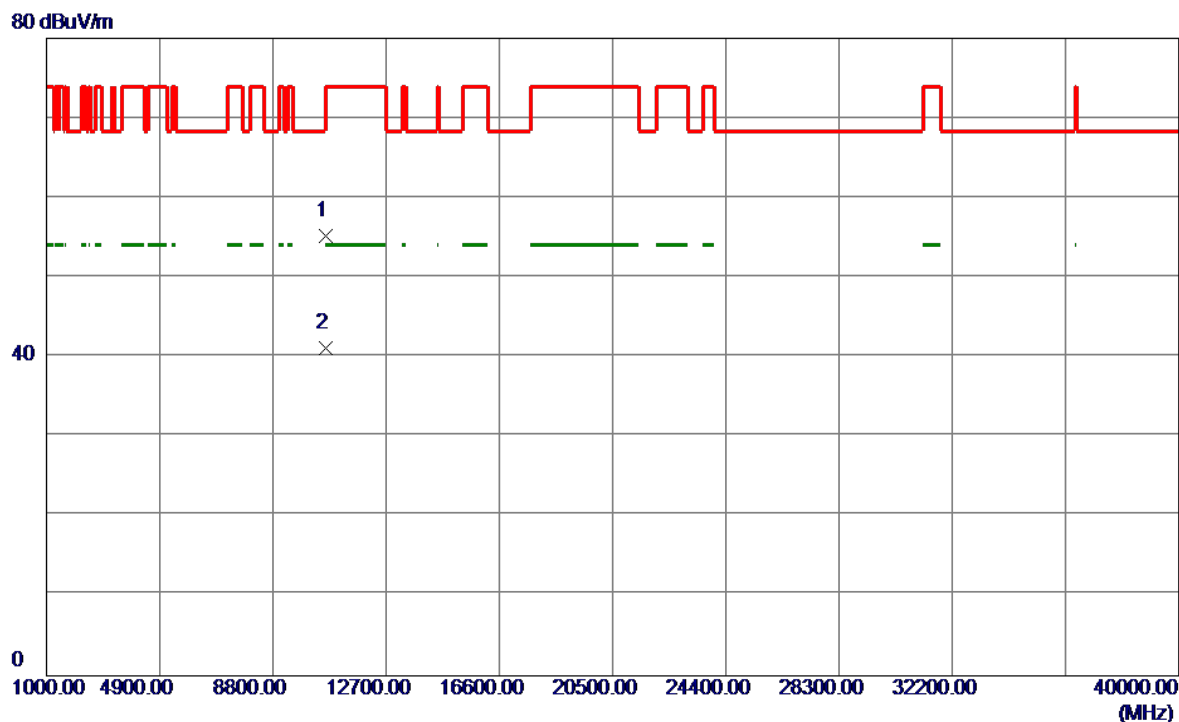


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10638.5000   | 39.90                      | 15.29                   | 55.19                     | 74.00           | -18.81       | Peak     |         |
| 2 * | 10639.7000   | 25.90                      | 15.29                   | 41.19                     | 54.00           | -12.81       | AVG      |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5270MHz |

### Vertical


130 dBuV/m

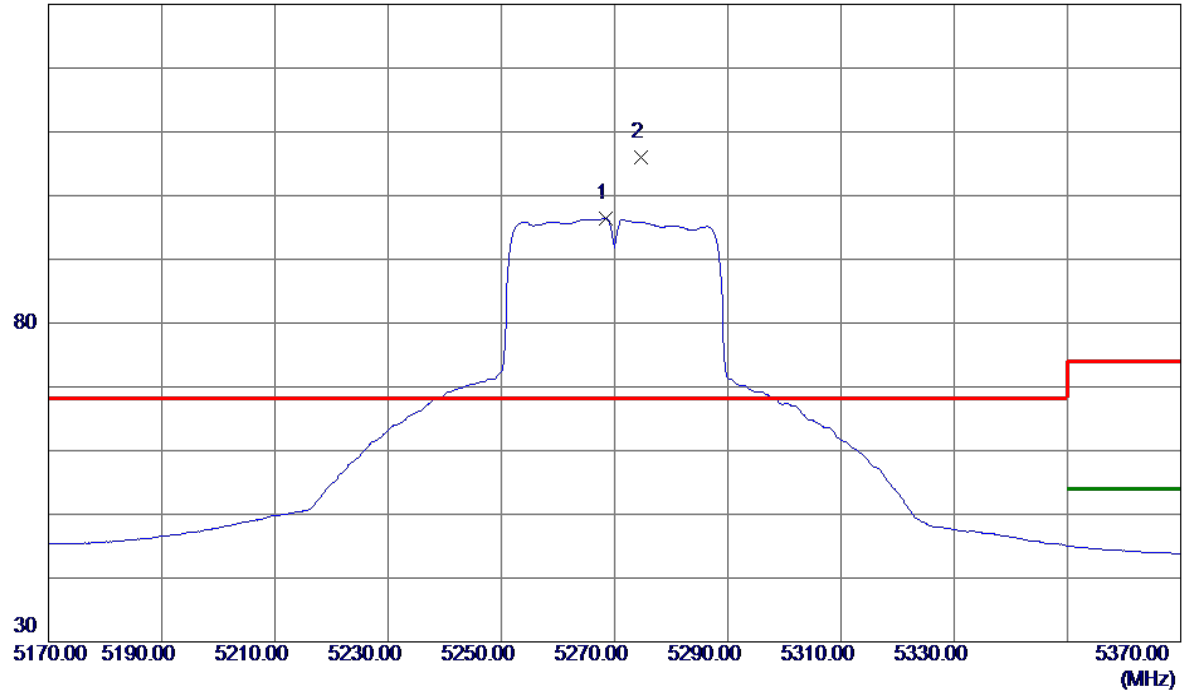

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5268.4000    | 79.20                      | 17.18                   | 96.38                     | 999.00          | -902.62      | AVG      | No Limit |
| 2 * | 5274.6000    | 88.75                      | 17.20                   | 105.95                    | 68.30           | 37.65        | Peak     | No Limit |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5270MHz |


### Vertical

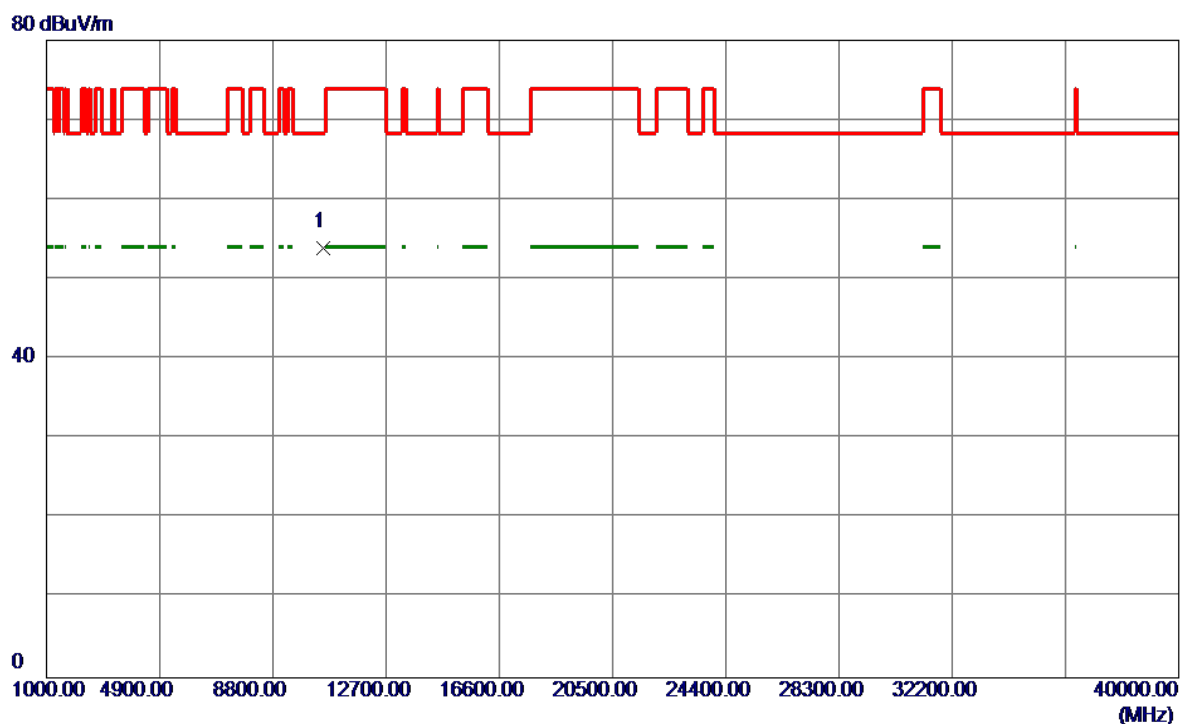

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10539.2000   | 38.90                      | 15.10                   | 54.00                     | 68.30           | -14.30       | Peak     |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5270MHz |


### Horizontal

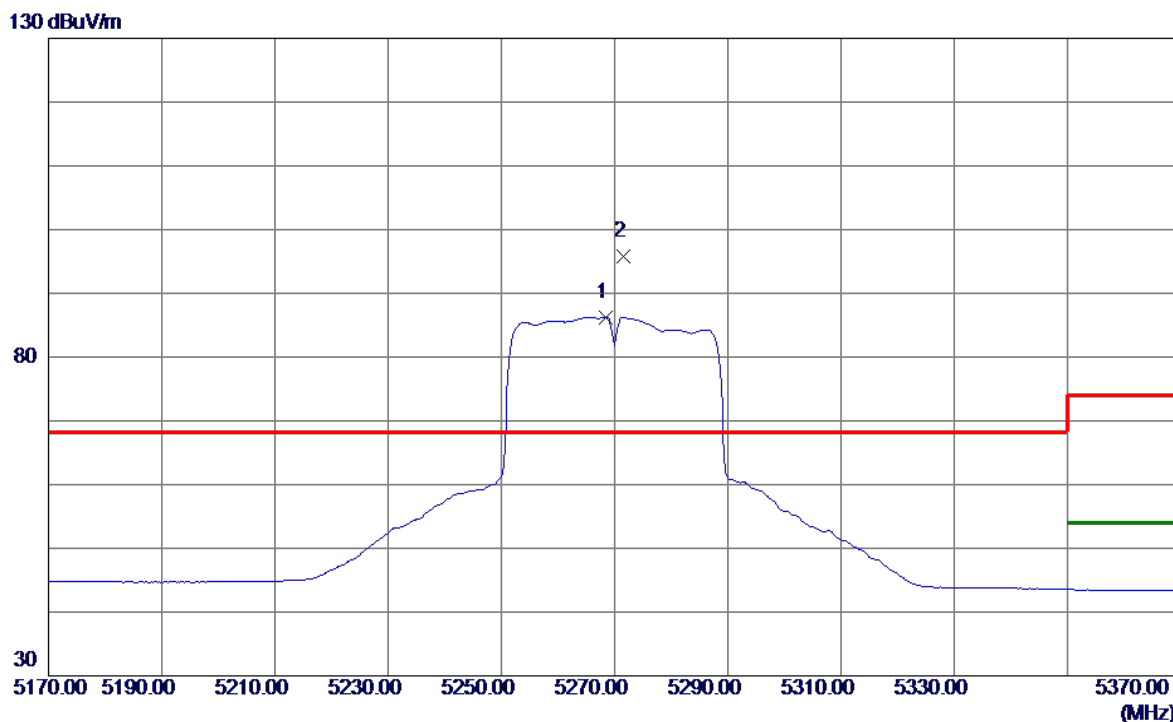

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5268.4000    | 69.09                      | 17.18                   | 86.27                     | 999.00          | -912.73      | AVG      | No Limit |
| 2 * | 5271.6000    | 78.60                      | 17.19                   | 95.79                     | 68.30           | 27.49        | Peak     | No Limit |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5270MHz |

### Horizontal

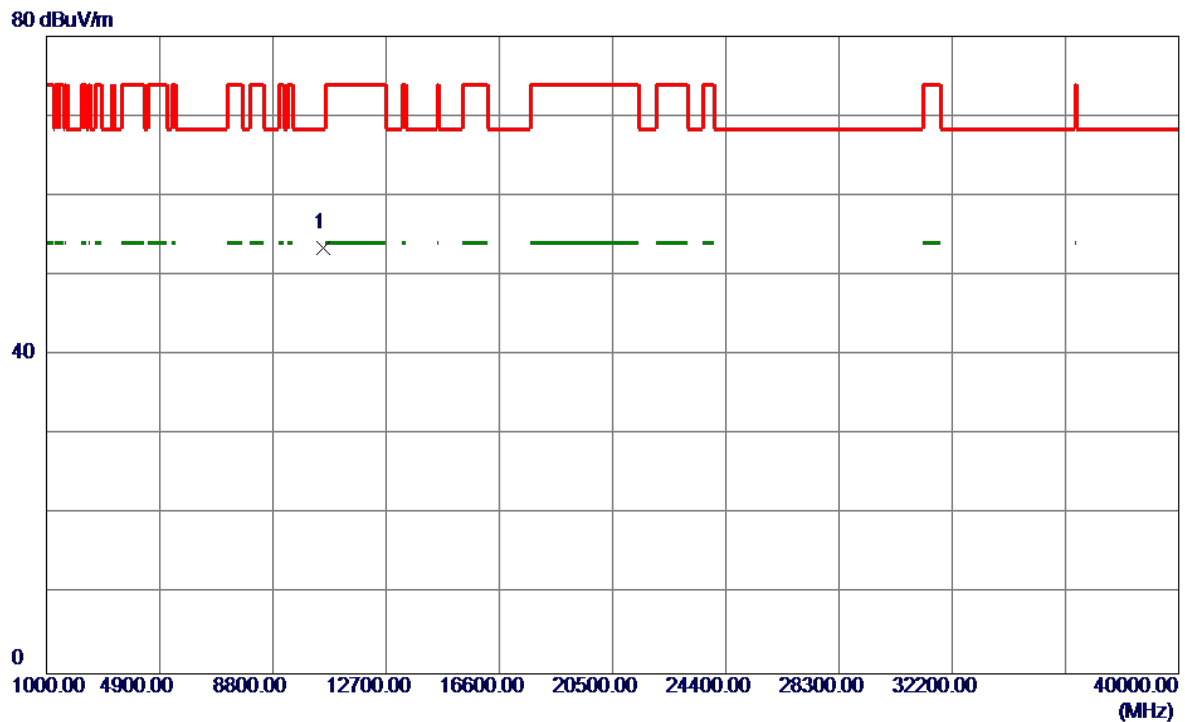

| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 10542.0500 | 38.29         | 15.10          | 53.39       | 68.30  | -14.91 | Peak     |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5310MHz |

### Vertical


130 dBuV/m



| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5292.8000    | 82.38                      | 17.26                   | 99.64                     | 68.30           | 31.34        | Peak     | No Limit |
| 2   | 5293.4000    | 75.34                      | 17.27                   | 92.61                     | 999.00          | -906.39      | AVG      | No Limit |
| 3   | 5350.0000    | 47.40                      | 17.47                   | 64.87                     | 68.30           | -3.43        | Peak     |          |
| 4   | 5350.0000    | 33.12                      | 17.47                   | 50.59                     | 999.00          | -948.41      | AVG      |          |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5310MHz |

### Vertical

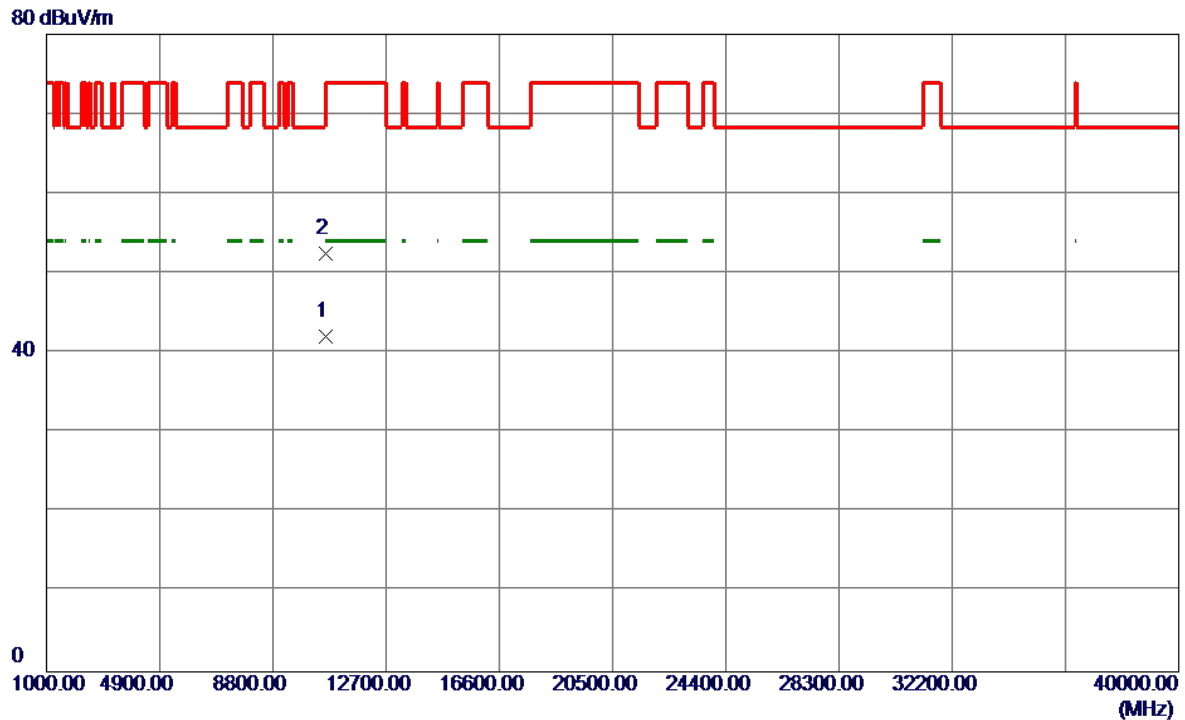


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10620.0000   | 26.83                      | 15.25                   | 42.08                     | 54.00           | -11.92       | AVG      |         |
| 2   | 10620.6000   | 37.26                      | 15.25                   | 52.51                     | 74.00           | -21.49       | Peak     |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5310MHz |

### Horizontal


130 dBuV/m

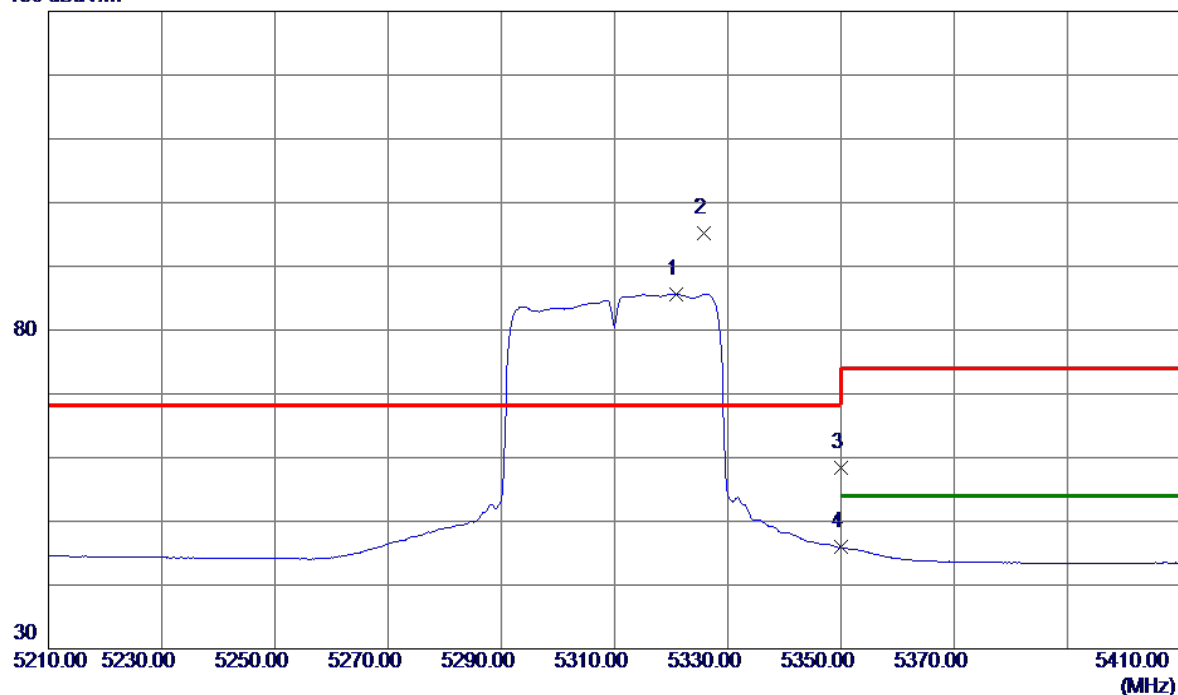

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5320.8000    | 68.25                      | 17.36                   | 85.61                     | 999.00          | -913.39      | AVG      | No Limit |
| 2 * | 5325.8000    | 77.84                      | 17.38                   | 95.22                     | 68.30           | 26.92        | Peak     | No Limit |
| 3   | 5350.0000    | 40.84                      | 17.47                   | 58.31                     | 68.30           | -9.99        | Peak     |          |
| 4   | 5350.0000    | 28.44                      | 17.47                   | 45.91                     | 999.00          | -953.09      | AVG      |          |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5310MHz |

### Horizontal

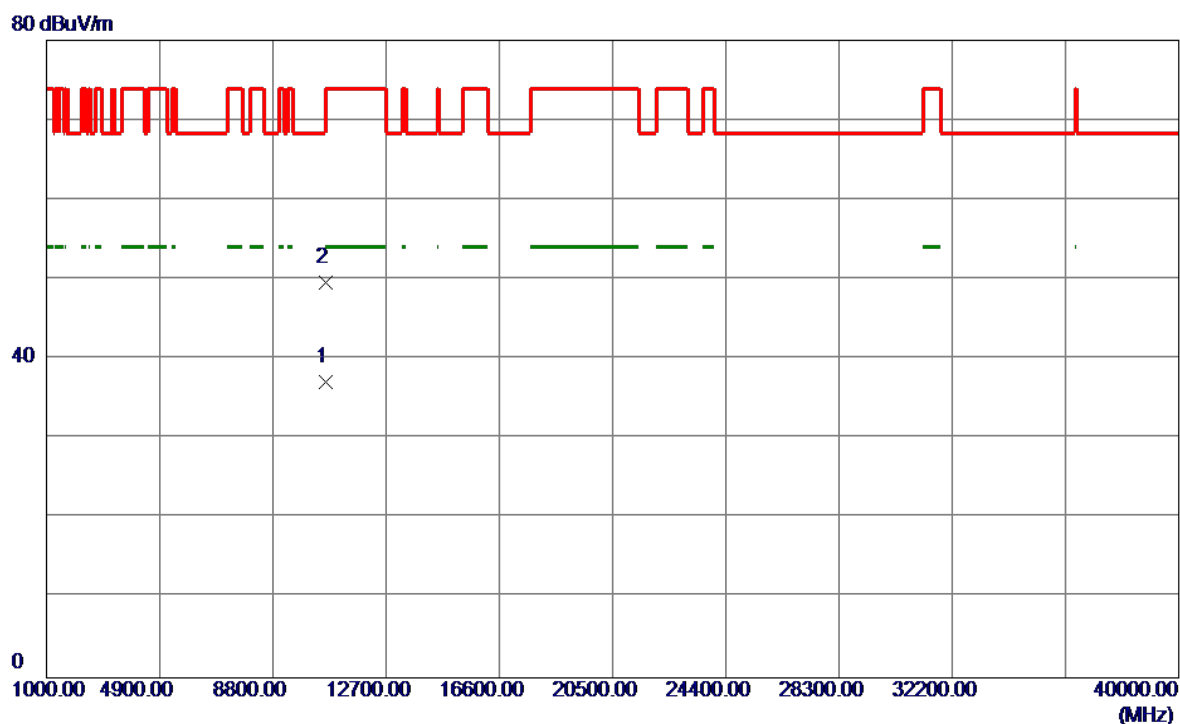


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10619.8000   | 21.90                      | 15.25                   | 37.15                     | 54.00           | -16.85       | AVG      |         |
| 2   | 10623.1500   | 34.33                      | 15.26                   | 49.59                     | 74.00           | -24.41       | Peak     |         |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5500MHz |

### Vertical


130 dBuV/m

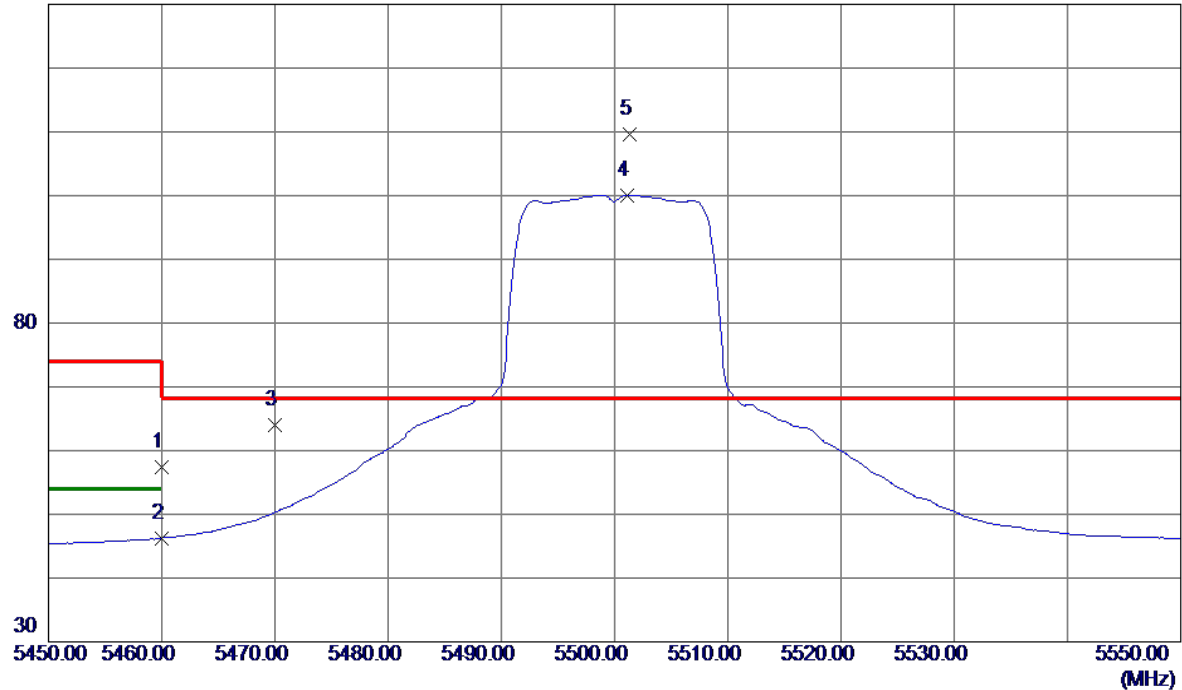

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 39.61                      | 17.85                   | 57.46                     | 74.00           | -16.54       | Peak     |          |
| 2   | 5460.0000    | 28.43                      | 17.85                   | 46.28                     | 54.00           | -7.72        | AVG      |          |
| 3   | 5470.0000    | 46.10                      | 17.89                   | 63.99                     | 68.30           | -4.31        | Peak     |          |
| 4   | 5501.1000    | 81.98                      | 18.00                   | 99.98                     | 999.00          | -899.02      | AVG      | No Limit |
| 5 * | 5501.3000    | 91.63                      | 18.00                   | 109.63                    | 68.30           | 41.33        | Peak     | No Limit |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5500MHz |

### Vertical

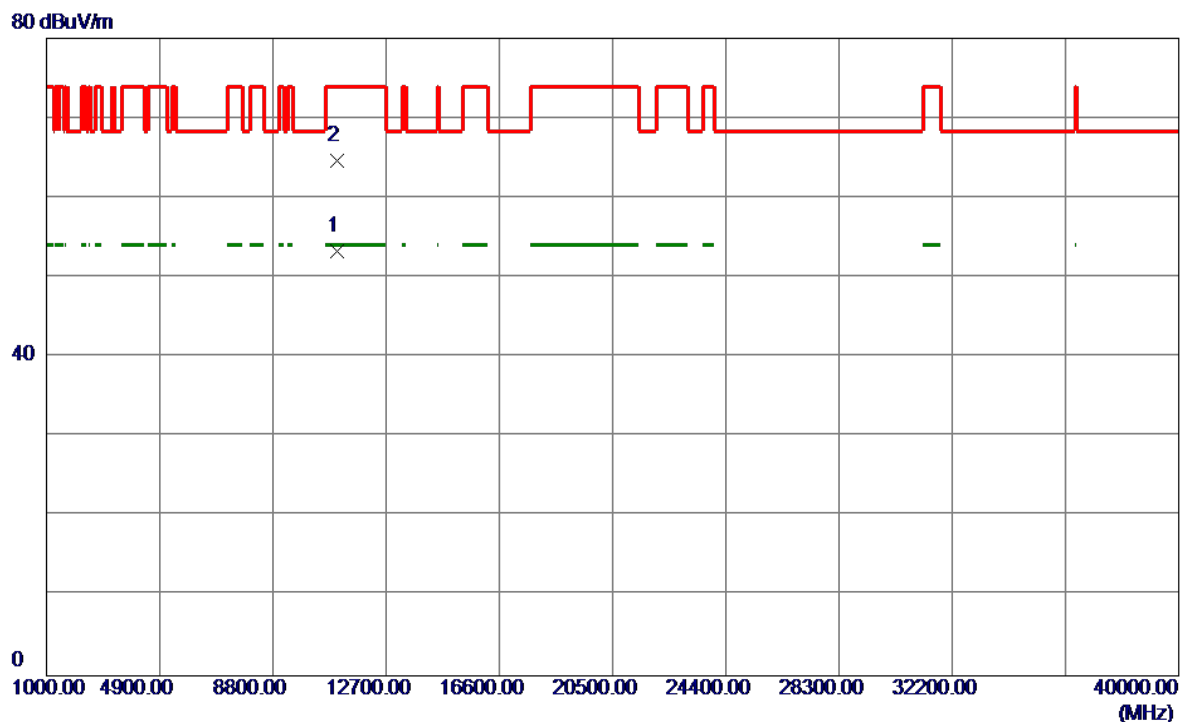


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10999.9000   | 37.35                      | 15.98                   | 53.33                     | 54.00           | -0.67        | AVG      |         |
| 2   | 11000.6000   | 48.70                      | 15.98                   | 64.68                     | 74.00           | -9.32        | Peak     |         |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5500MHz |

### Horizontal


130 dBuV/m

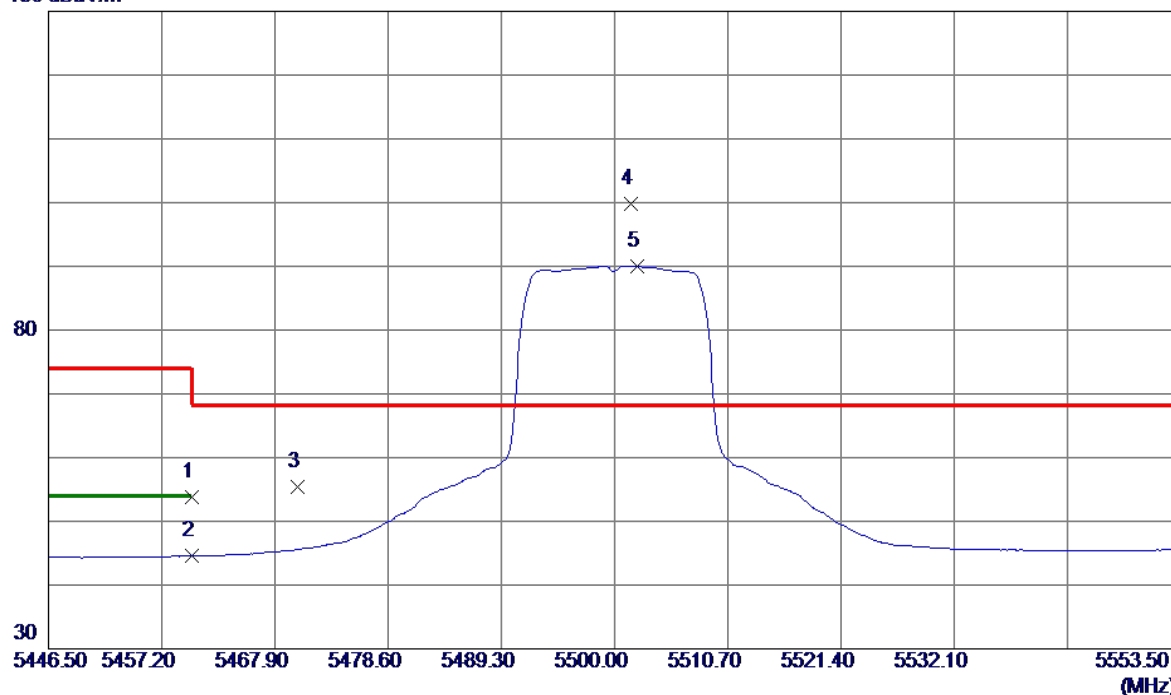

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 35.92                      | 17.85                   | 53.77                     | 74.00           | -20.23       | Peak     |          |
| 2   | 5460.0000    | 26.69                      | 17.85                   | 44.54                     | 54.00           | -9.46        | AVG      |          |
| 3   | 5470.0000    | 37.53                      | 17.89                   | 55.42                     | 68.30           | -12.88       | Peak     |          |
| 4 * | 5501.6050    | 81.82                      | 18.00                   | 99.82                     | 68.30           | 31.52        | Peak     | No Limit |
| 5   | 5502.1400    | 72.08                      | 18.00                   | 90.08                     | 999.00          | -908.92      | AVG      | No Limit |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5500MHz |

### Horizontal

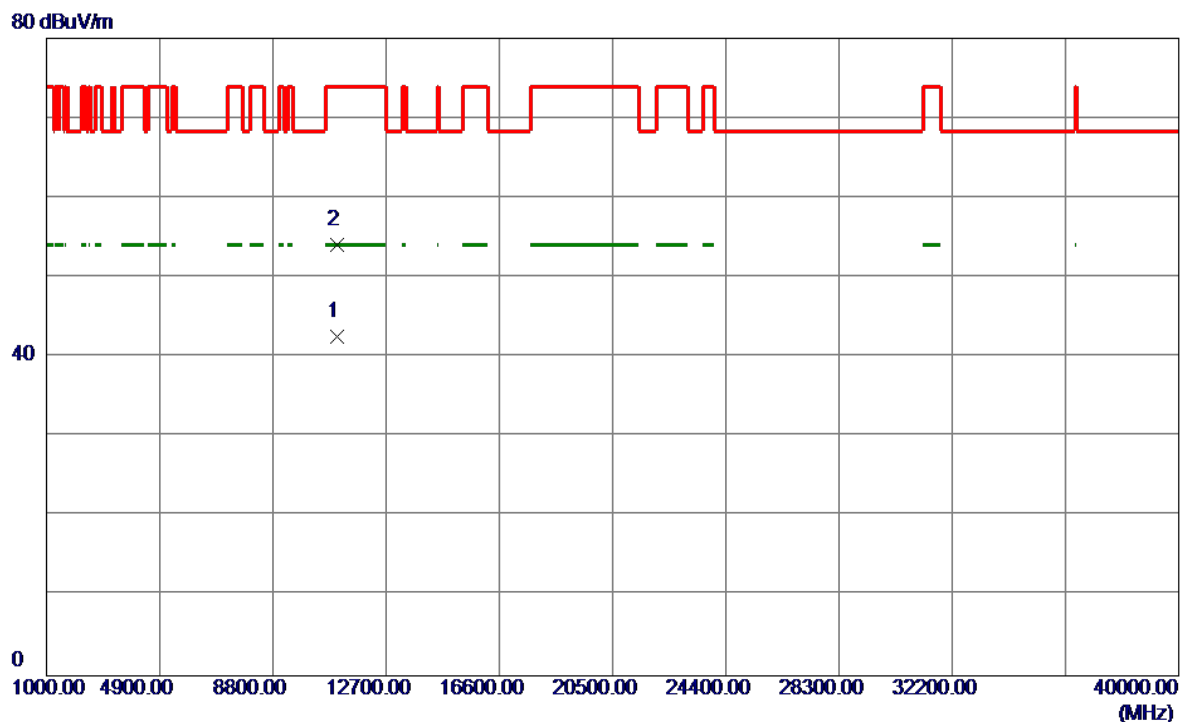


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10999.9000   | 26.63                      | 15.98                   | 42.61                     | 54.00           | -11.39       | AVG      |         |
| 2   | 11002.5000   | 38.06                      | 15.99                   | 54.05                     | 74.00           | -19.95       | Peak     |         |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5580MHz |

### Vertical


130 dBuV/m

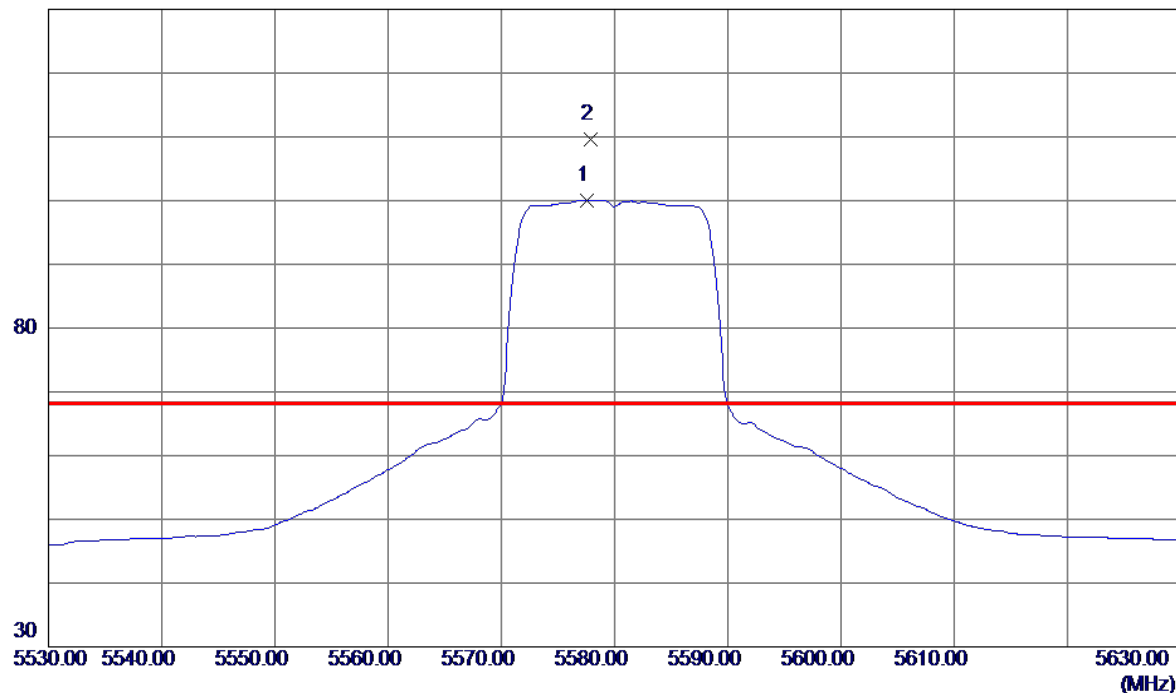

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5577.6000    | 81.72                      | 18.34                   | 100.06                    | 999.00          | -898.94      | AVG      | No Limit |
| 2 * | 5577.9000    | 91.28                      | 18.34                   | 109.62                    | 68.30           | 41.32        | Peak     | No Limit |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5580MHz |

### Vertical

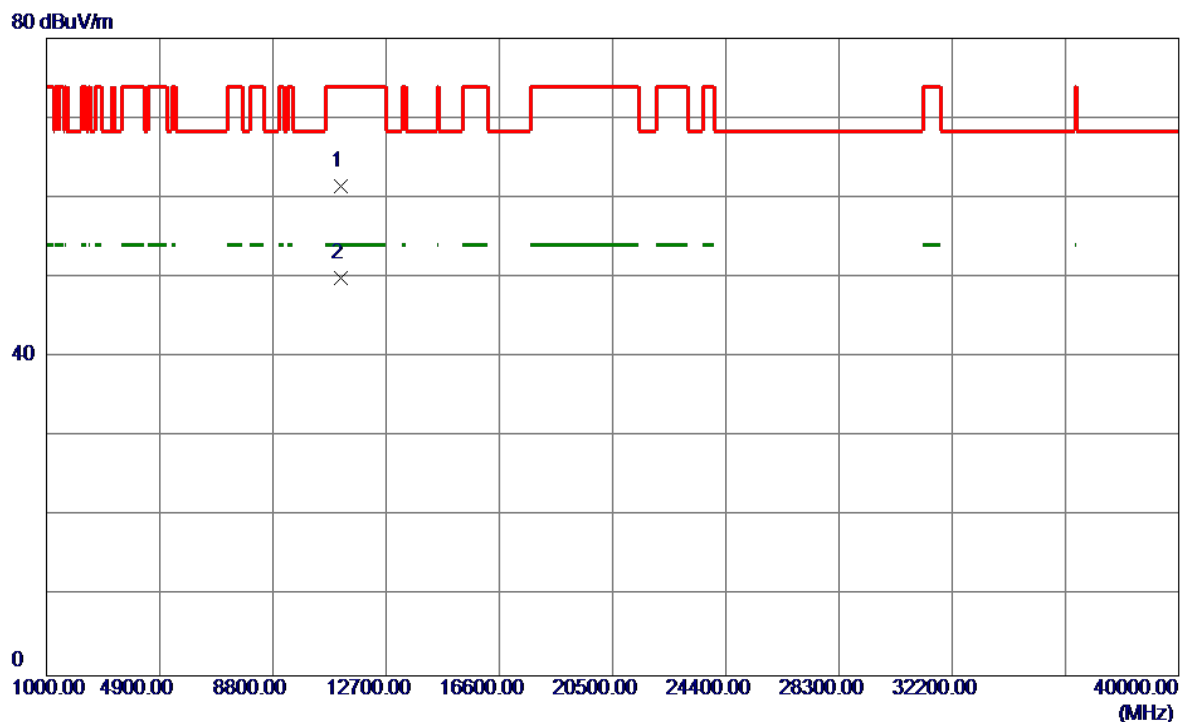


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11156.2000   | 45.08                      | 16.37                   | 61.45                     | 74.00           | -12.55       | Peak     |         |
| 2 * | 11160.0000   | 33.53                      | 16.38                   | 49.91                     | 54.00           | -4.09        | AVG      |         |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5580MHz |

### Horizontal


130 dBuV/m

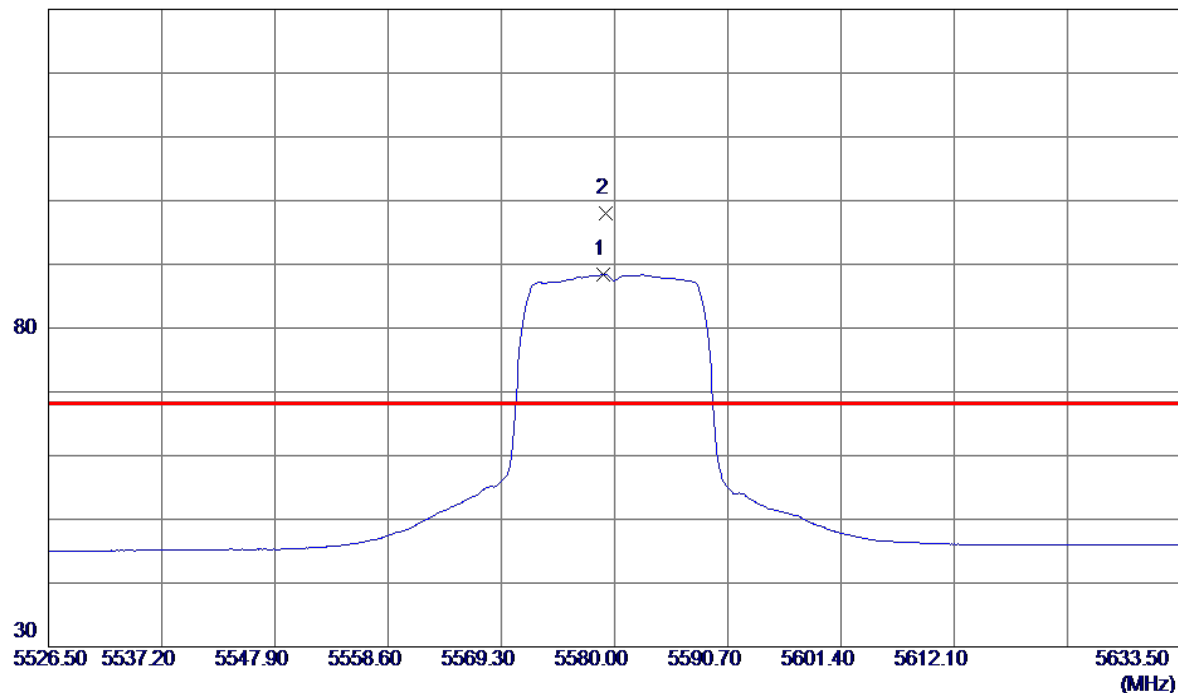

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5578.9300    | 70.08                      | 18.34                   | 88.42                     | 999.00          | -910.58      | AVG      | No Limit |
| 2 * | 5579.1440    | 79.59                      | 18.35                   | 97.94                     | 68.30           | 29.64        | Peak     | No Limit |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5580MHz |

### Horizontal

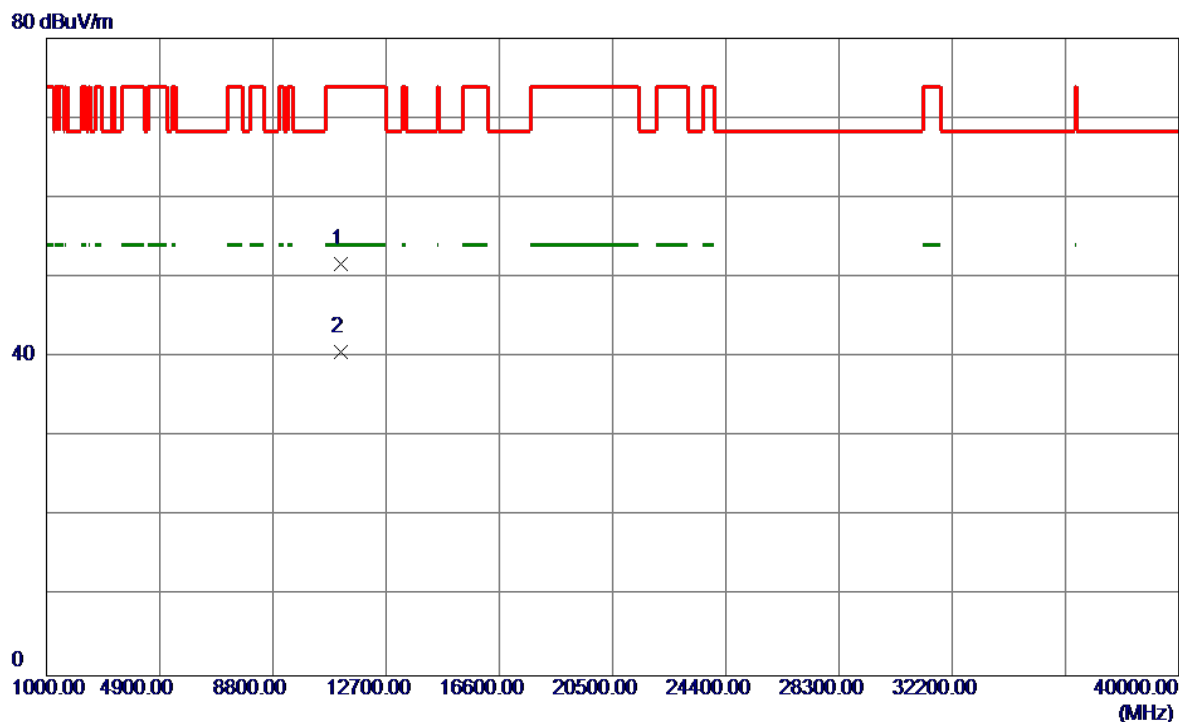


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11156.5000   | 35.25                      | 16.37                   | 51.62                     | 74.00           | -22.38       | Peak     |         |
| 2 * | 11159.8500   | 24.22                      | 16.38                   | 40.60                     | 54.00           | -13.40       | AVG      |         |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5700MHz |

### Vertical


130 dBuV/m

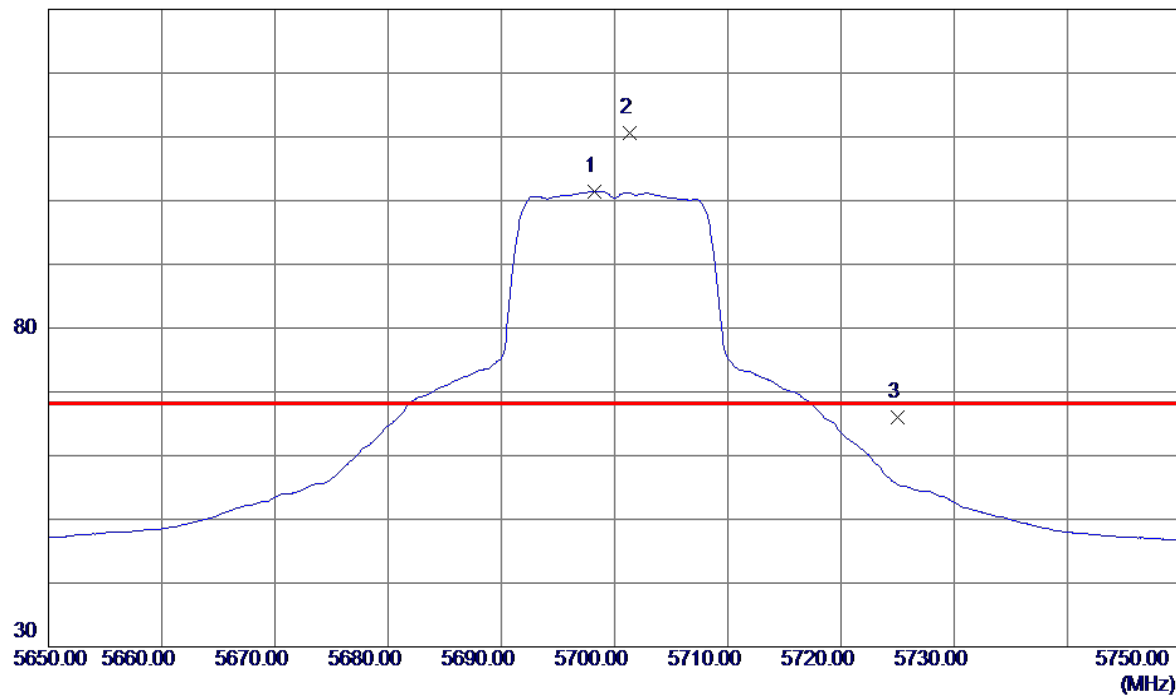

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5698.2000    | 82.59                      | 18.87                   | 101.46                    | 999.00          | -897.54      | AVG      | No Limit |
| 2 * | 5701.3000    | 91.80                      | 18.89                   | 110.69                    | 68.30           | 42.39        | Peak     | No Limit |
| 3   | 5725.0000    | 46.94                      | 18.99                   | 65.93                     | 68.30           | -2.37        | Peak     |          |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5700MHz |

### Vertical

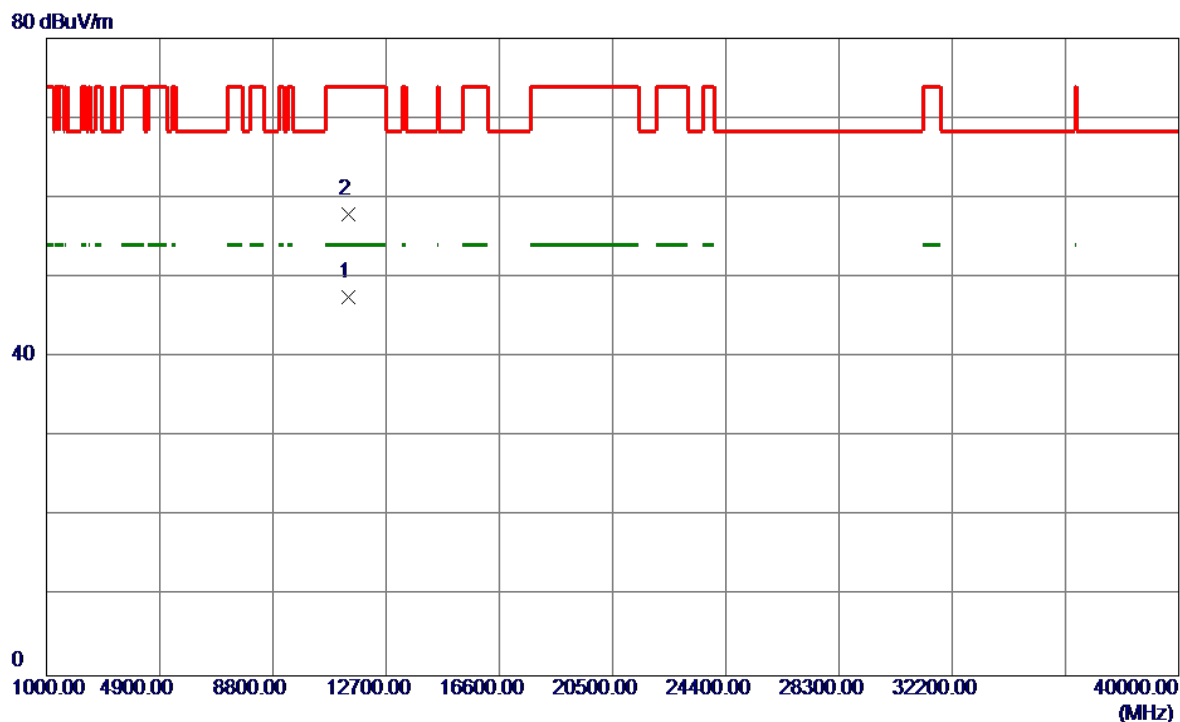


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11400.0000   | 30.51                      | 16.98                   | 47.49                     | 54.00           | -6.51        | AVG      |         |
| 2   | 11400.9000   | 40.91                      | 16.98                   | 57.89                     | 74.00           | -16.11       | Peak     |         |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5700MHz |

### Horizontal


130 dBuV/m

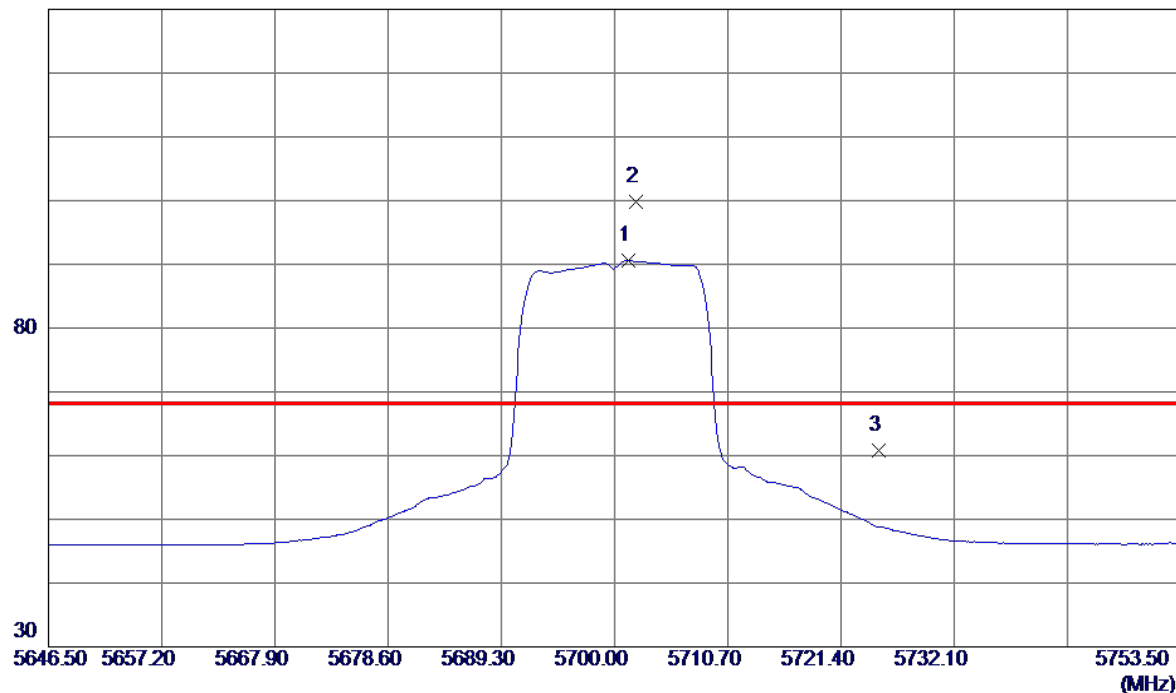

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5701.2839    | 71.78                      | 18.89                   | 90.67                     | 999.00          | -908.33      | AVG      | No Limit |
| 2 * | 5702.0330    | 80.89                      | 18.89                   | 99.78                     | 68.30           | 31.48        | Peak     | No Limit |
| 3   | 5725.0000    | 41.74                      | 18.99                   | 60.73                     | 68.30           | -7.57        | Peak     |          |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5700MHz |

### Horizontal

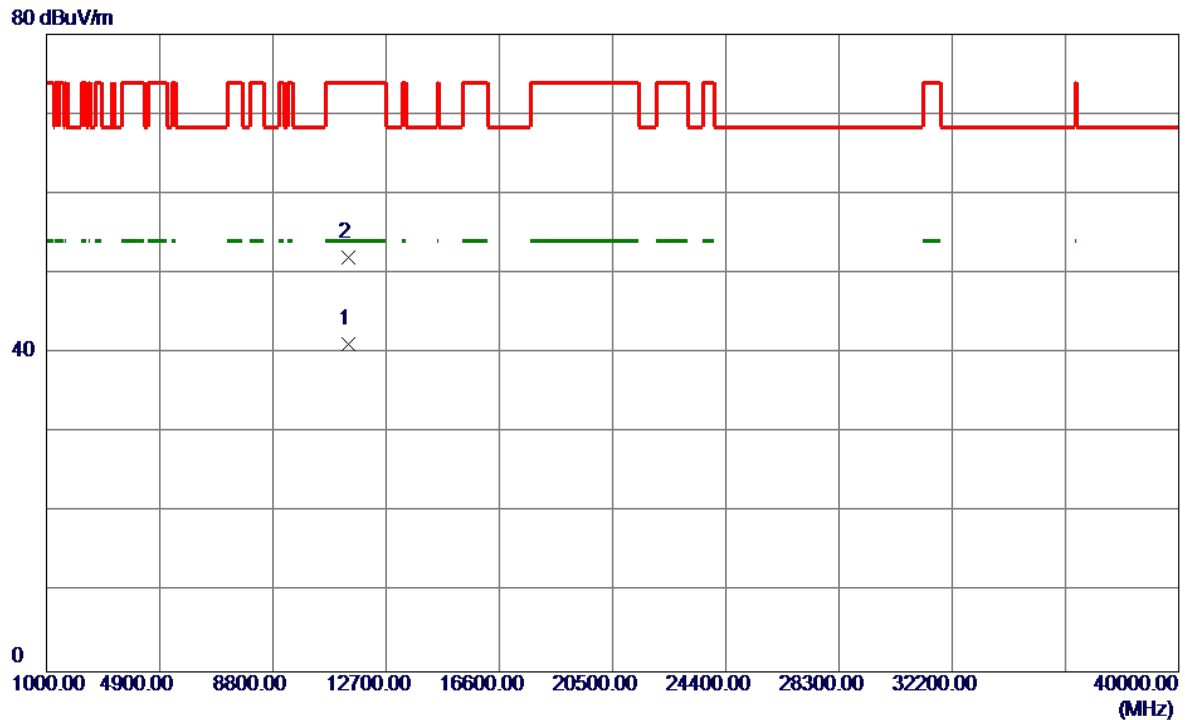


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11395.6000   | 24.14                      | 16.97                   | 41.11                     | 54.00           | -12.89       | AVG      |         |
| 2   | 11399.7000   | 34.99                      | 16.98                   | 51.97                     | 74.00           | -22.03       | Peak     |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5500MHz |

### Vertical


130 dBuV/m

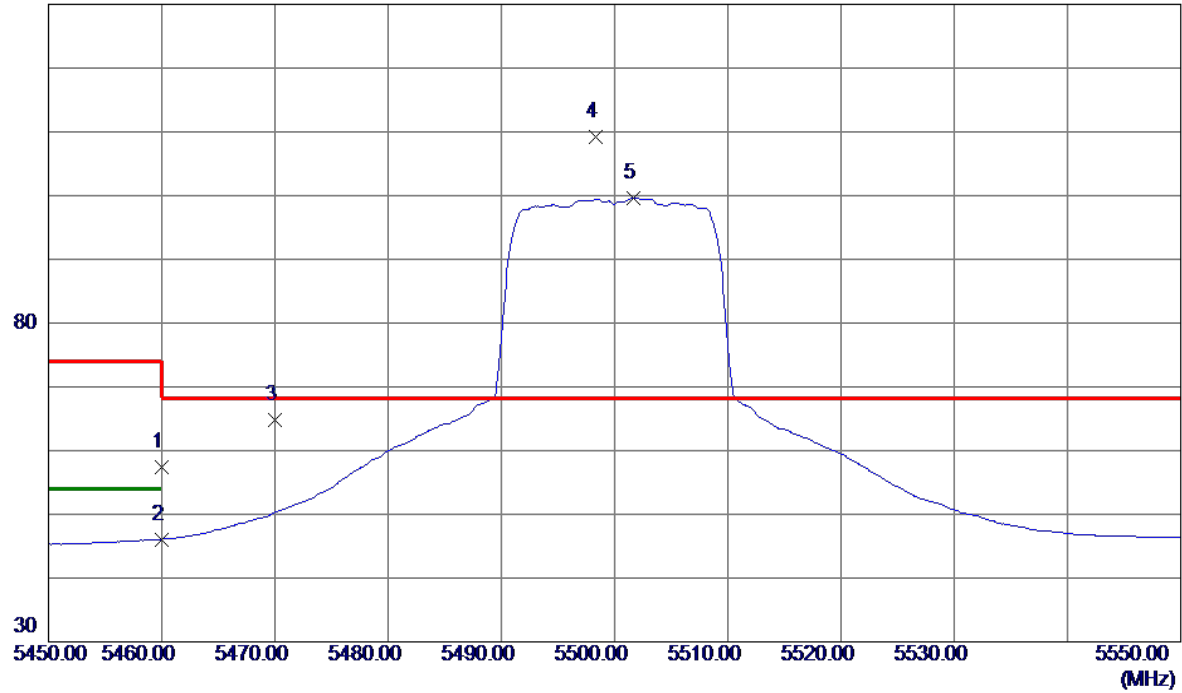

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 39.57                      | 17.85                   | 57.42                     | 74.00           | -16.58       | Peak     |          |
| 2   | 5460.0000    | 28.22                      | 17.85                   | 46.07                     | 54.00           | -7.93        | AVG      |          |
| 3   | 5470.0000    | 46.87                      | 17.89                   | 64.76                     | 68.30           | -3.54        | Peak     |          |
| 4 * | 5498.3000    | 91.29                      | 17.99                   | 109.28                    | 68.30           | 40.98        | Peak     | No Limit |
| 5   | 5501.7000    | 81.62                      | 18.00                   | 99.62                     | 999.00          | -899.38      | AVG      | No Limit |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5500MHz |

### Vertical

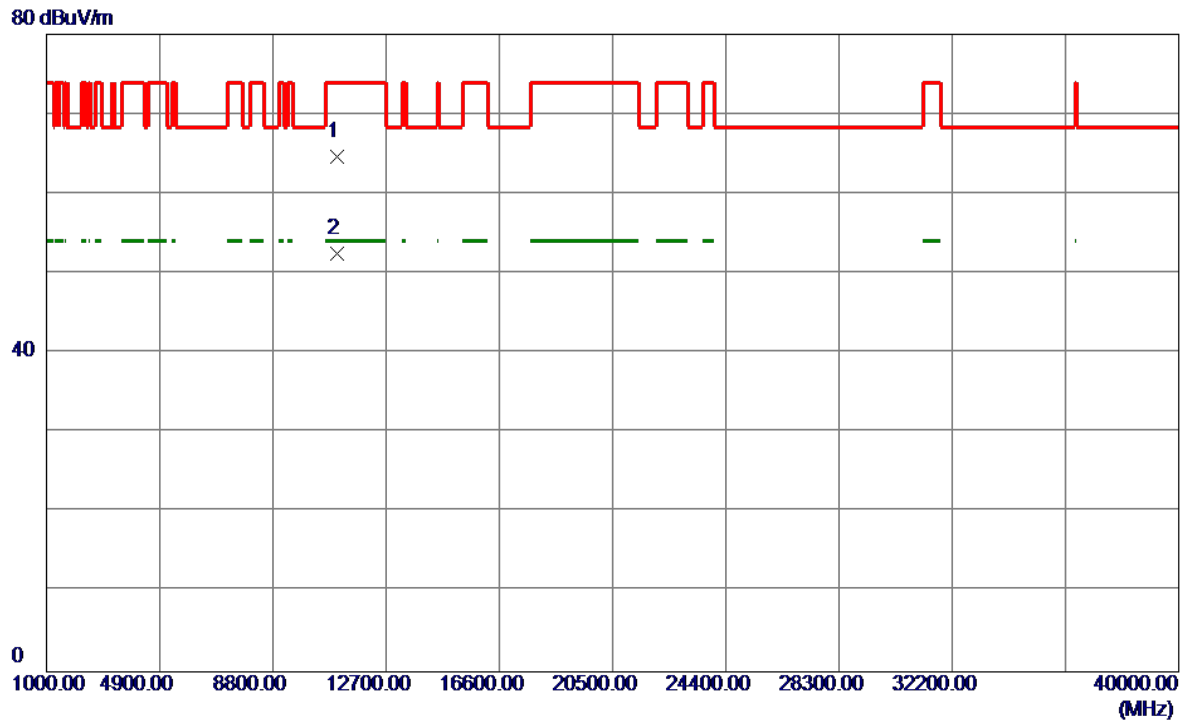


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10998.8000   | 48.68                      | 15.98                   | 64.66                     | 74.00           | -9.34        | Peak     |         |
| 2 * | 10999.6000   | 36.47                      | 15.98                   | 52.45                     | 54.00           | -1.55        | AVG      |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5500MHz |

### Horizontal


130 dBuV/m

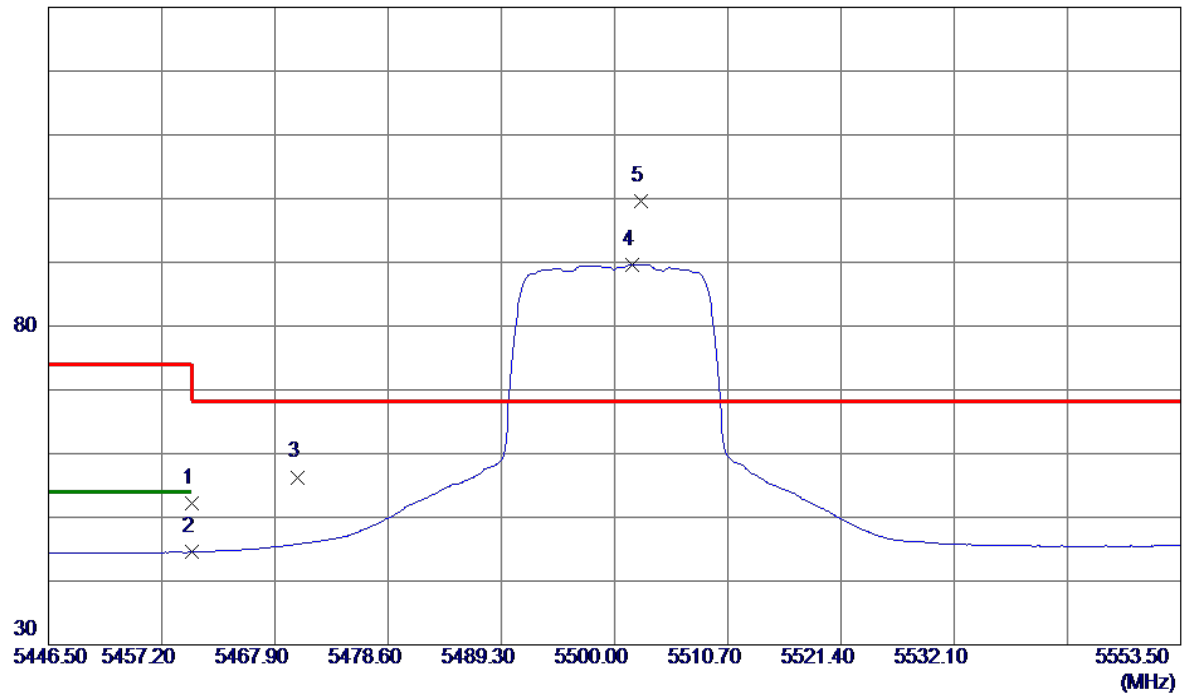

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 34.40                      | 17.85                   | 52.25                     | 74.00           | -21.75       | Peak     |          |
| 2   | 5460.0000    | 26.72                      | 17.85                   | 44.57                     | 54.00           | -9.43        | AVG      |          |
| 3   | 5470.0000    | 38.41                      | 17.89                   | 56.30                     | 68.30           | -12.00       | Peak     |          |
| 4   | 5501.7120    | 71.68                      | 18.00                   | 89.68                     | 999.00          | -909.32      | AVG      | No Limit |
| 5 * | 5502.4610    | 81.62                      | 18.01                   | 99.63                     | 68.30           | 31.33        | Peak     | No Limit |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5500MHz |

### Horizontal

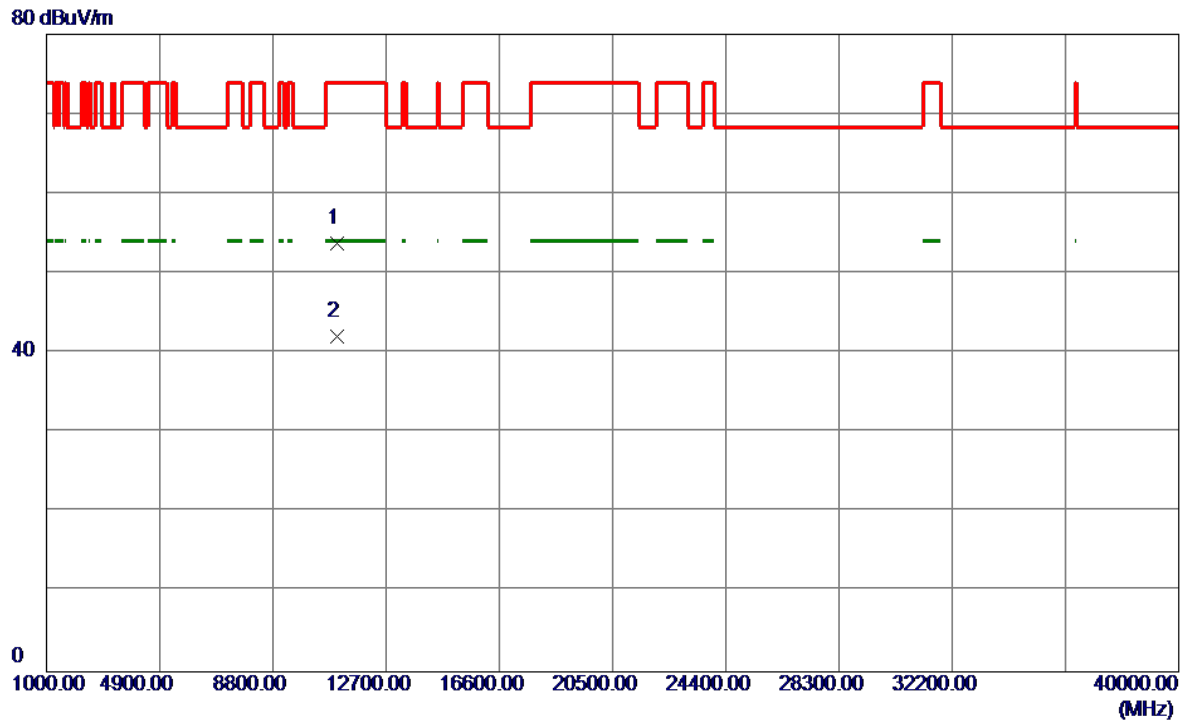


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10998.8500   | 37.79                      | 15.98                   | 53.77                     | 74.00           | -20.23       | Peak     |         |
| 2 * | 10999.7500   | 26.10                      | 15.98                   | 42.08                     | 54.00           | -11.92       | AVG      |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5580MHz |

# Vertical


130 dBuV/m

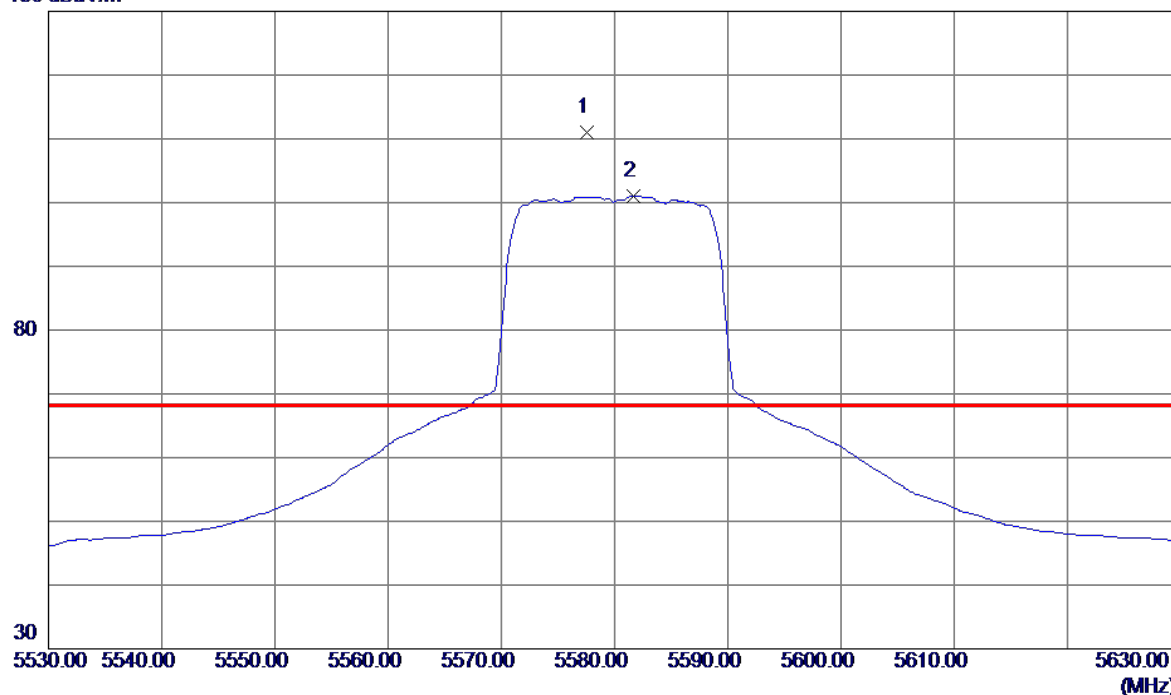

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5577.6000    | 92.59                      | 18.34                   | 110.93                    | 68.30           | 42.63        | Peak     | No Limit |
| 2   | 5581.7000    | 82.66                      | 18.36                   | 101.02                    | 999.00          | -897.98      | AVG      | No Limit |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5580MHz |

### Vertical

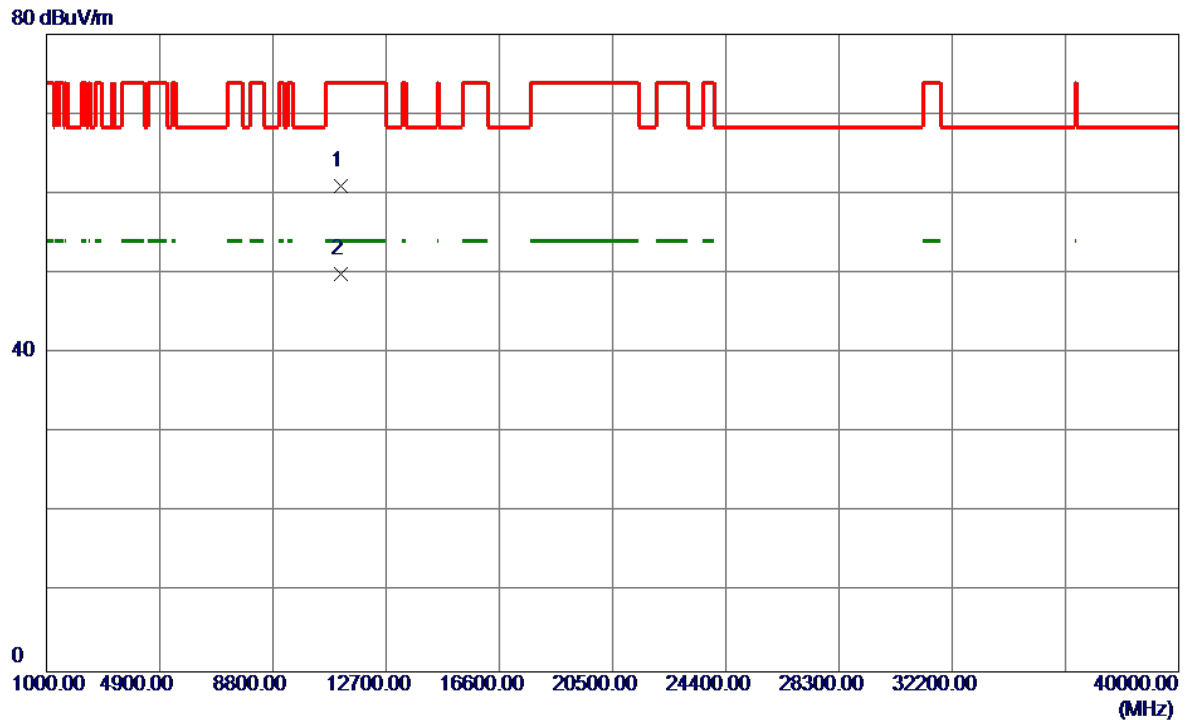


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11153.8000   | 44.59                      | 16.36                   | 60.95                     | 74.00           | -13.05       | Peak     |         |
| 2 * | 11159.9000   | 33.47                      | 16.38                   | 49.85                     | 54.00           | -4.15        | AVG      |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5580MHz |

### Horizontal


130 dBuV/m

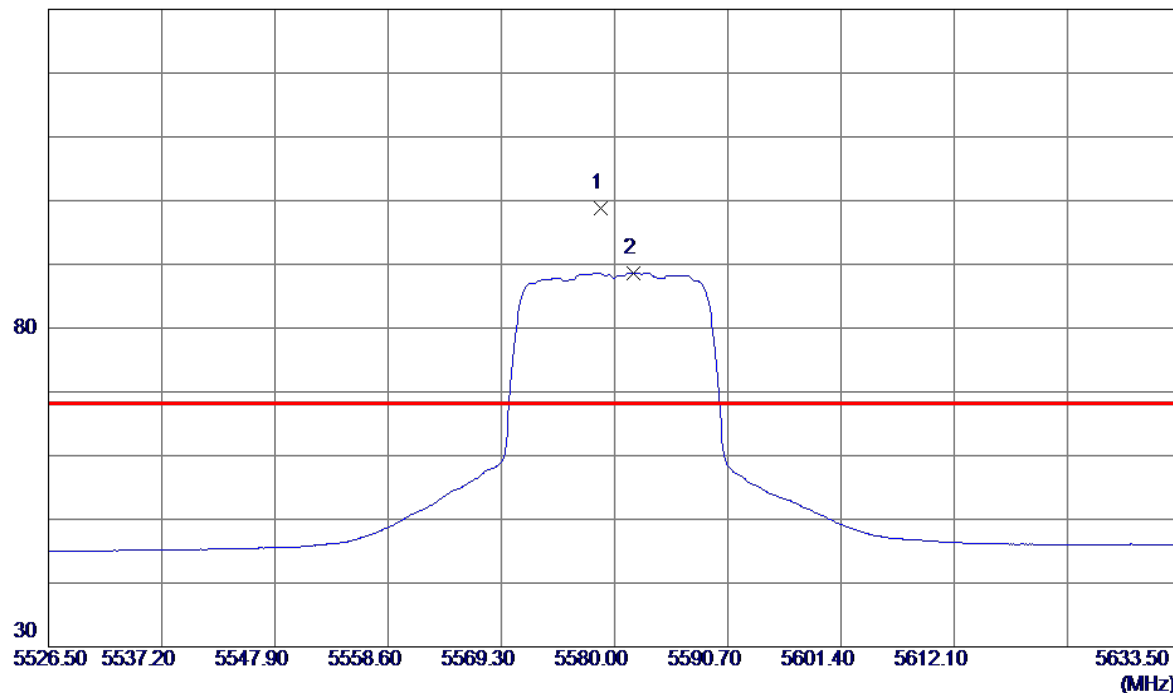

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5578.7160    | 80.40                      | 18.34                   | 98.74                     | 68.30           | 30.44        | Peak     | No Limit |
| 2   | 5581.8190    | 70.33                      | 18.36                   | 88.69                     | 999.00          | -910.31      | AVG      | No Limit |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5580MHz |

### Horizontal

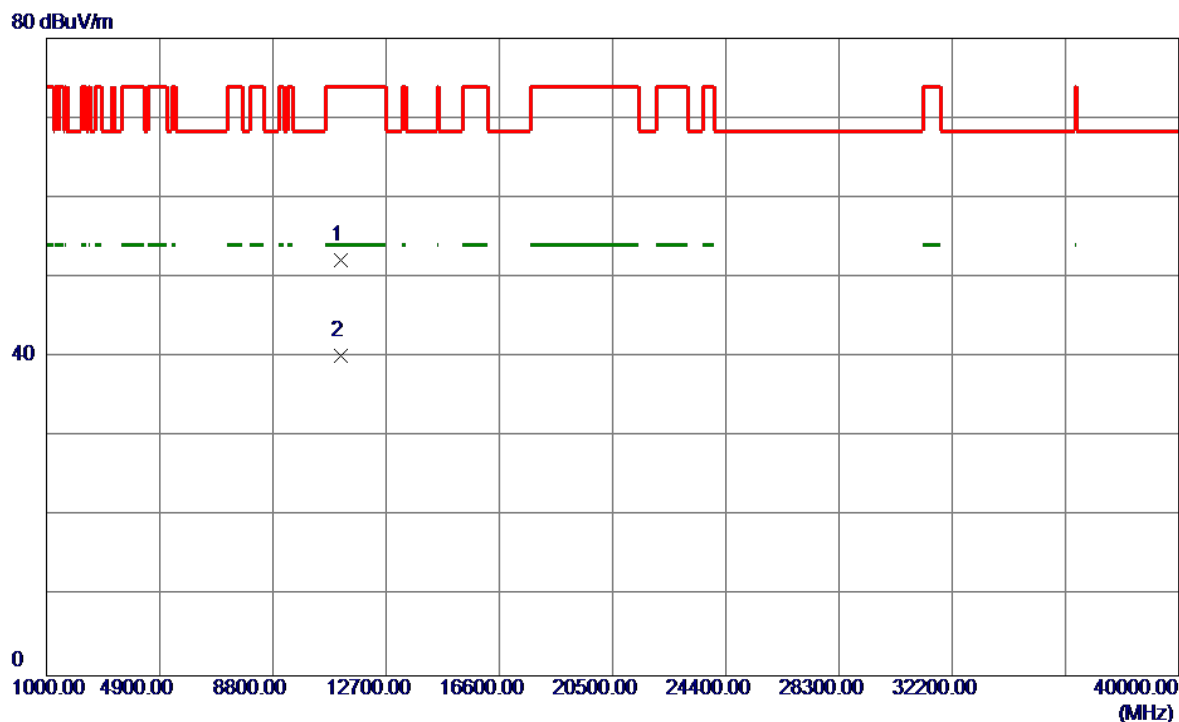


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11159.7500   | 35.72                      | 16.38                   | 52.10                     | 74.00           | -21.90       | Peak     |         |
| 2 * | 11159.8000   | 23.81                      | 16.38                   | 40.19                     | 54.00           | -13.81       | AVG      |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5700MHz |

### Vertical


130 dBuV/m

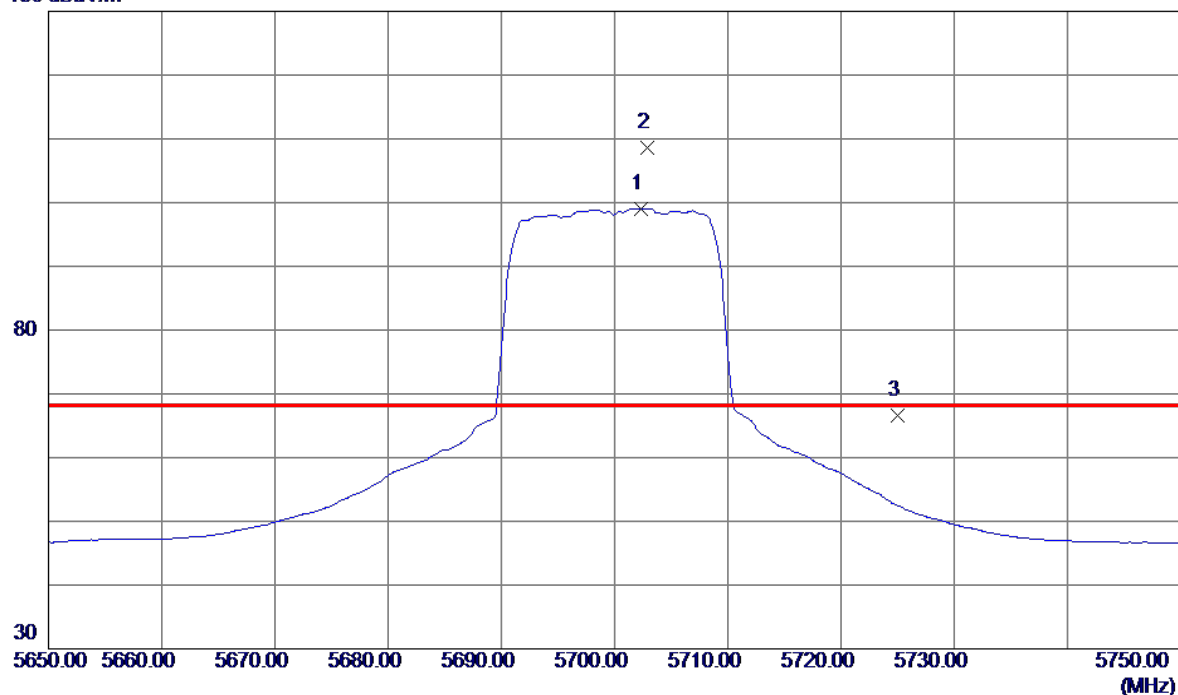

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5702.3000    | 80.19                      | 18.89                   | 99.08                     | 999.00          | -899.92      | AVG      | No Limit |
| 2 * | 5702.9000    | 89.76                      | 18.89                   | 108.65                    | 68.30           | 40.35        | Peak     | No Limit |
| 3   | 5725.0000    | 47.56                      | 18.99                   | 66.55                     | 68.30           | -1.75        | Peak     |          |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5700MHz |


### Vertical

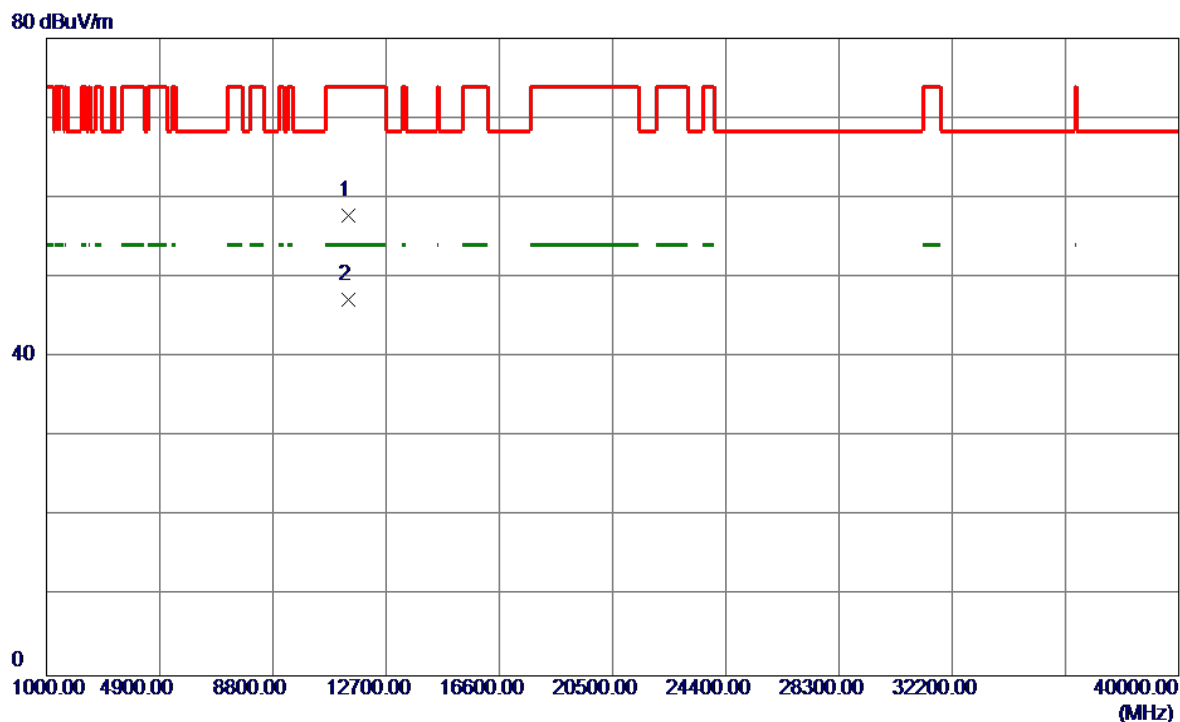

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11398.8000   | 40.83                      | 16.98                   | 57.81                     | 74.00           | -16.19       | Peak     |         |
| 2 * | 11399.9000   | 30.29                      | 16.98                   | 47.27                     | 54.00           | -6.73        | AVG      |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5700MHz |


# Horizontal

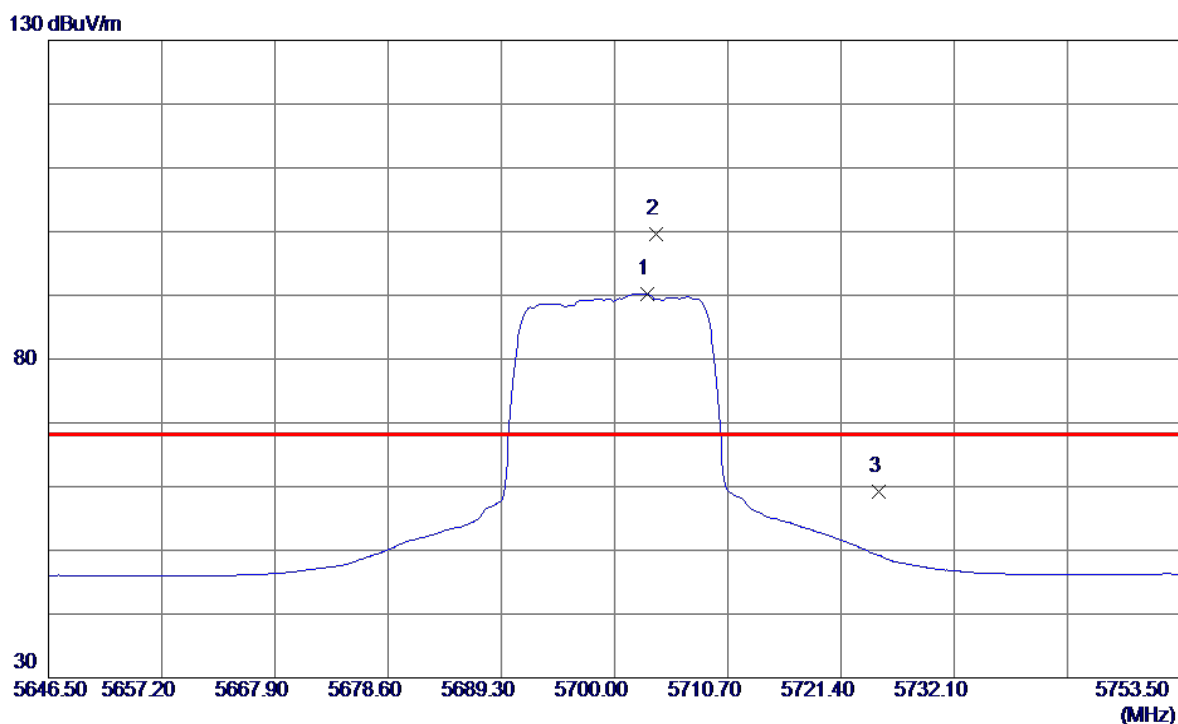

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5703.1030    | 71.31                      | 18.89                   | 90.20                     | 999.00          | -908.80      | AVG      | No Limit |
| 2 * | 5703.9590    | 80.70                      | 18.90                   | 99.60                     | 68.30           | 31.30        | Peak     | No Limit |
| 3   | 5725.0000    | 40.15                      | 18.99                   | 59.14                     | 68.30           | -9.16        | Peak     |          |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5700MHz |

### Horizontal

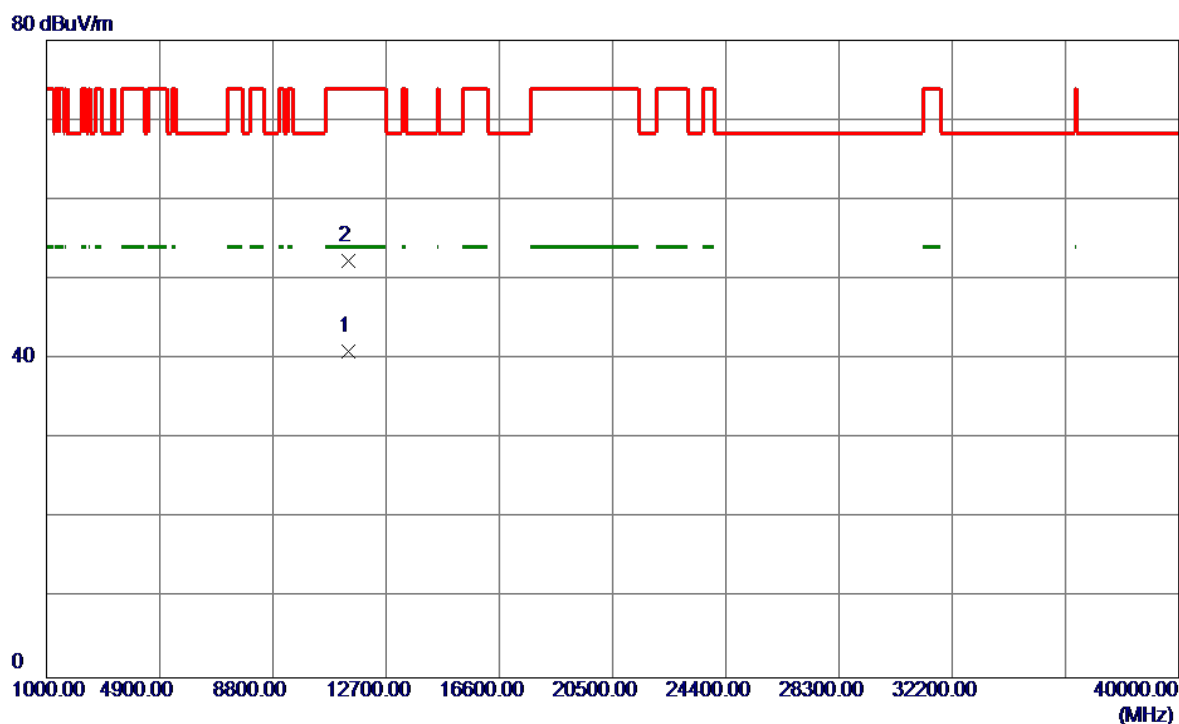


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11398.1000   | 24.05                      | 16.98                   | 41.03                     | 54.00           | -12.97       | AVG      |         |
| 2   | 11400.8000   | 35.35                      | 16.98                   | 52.33                     | 74.00           | -21.67       | Peak     |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5510MHz |

# Vertical


130 dBuV/m

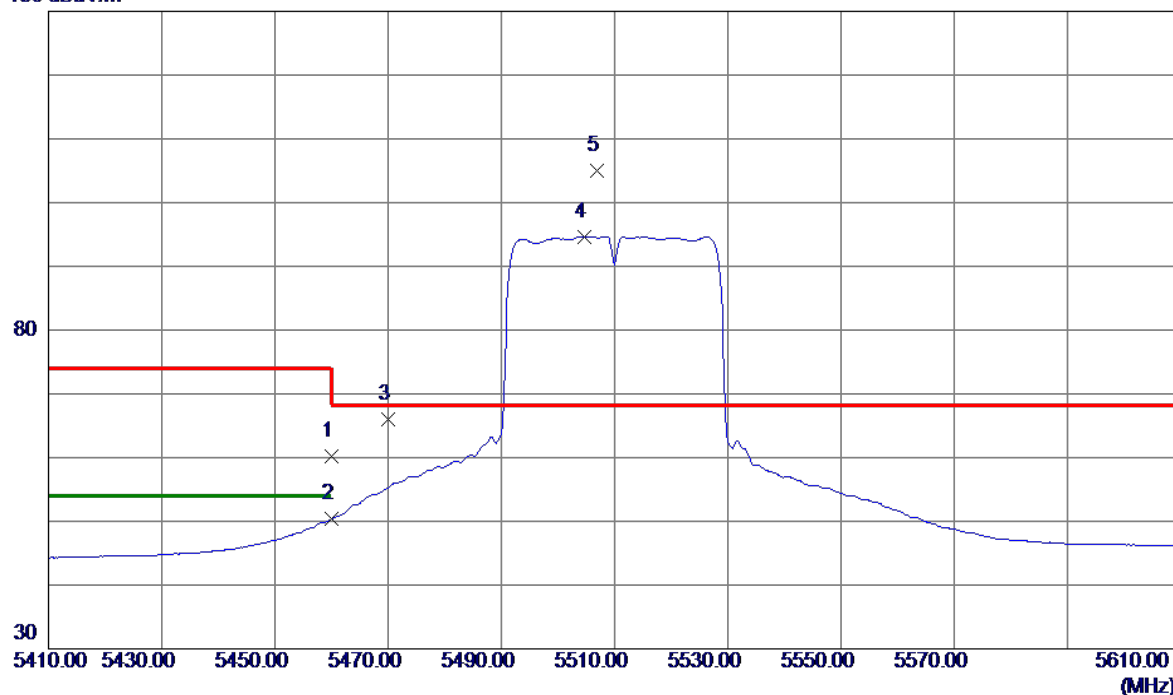

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 42.33                      | 17.85                   | 60.18                     | 74.00           | -13.82       | Peak     |          |
| 2   | 5460.0000    | 32.47                      | 17.85                   | 50.32                     | 54.00           | -3.68        | AVG      |          |
| 3   | 5470.0000    | 48.16                      | 17.89                   | 66.05                     | 68.30           | -2.25        | Peak     |          |
| 4   | 5504.6000    | 76.67                      | 18.02                   | 94.69                     | 999.00          | -904.31      | AVG      | No Limit |
| 5 * | 5506.8000    | 87.01                      | 18.02                   | 105.03                    | 68.30           | 36.73        | Peak     | No Limit |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5510MHz |

### Vertical

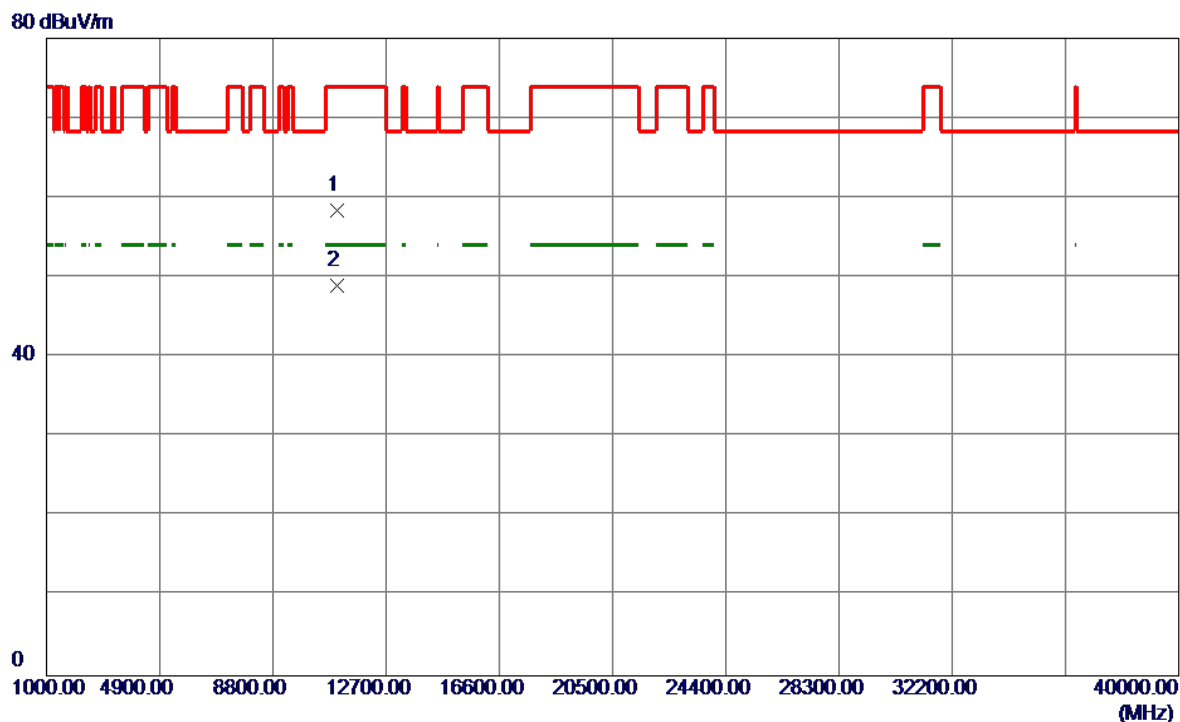


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11004.4000   | 42.37                      | 15.99                   | 58.36                     | 74.00           | -15.64       | Peak     |         |
| 2 * | 11019.8000   | 32.96                      | 16.03                   | 48.99                     | 54.00           | -5.01        | AVG      |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5510MHz |

### Horizontal


130 dBuV/m

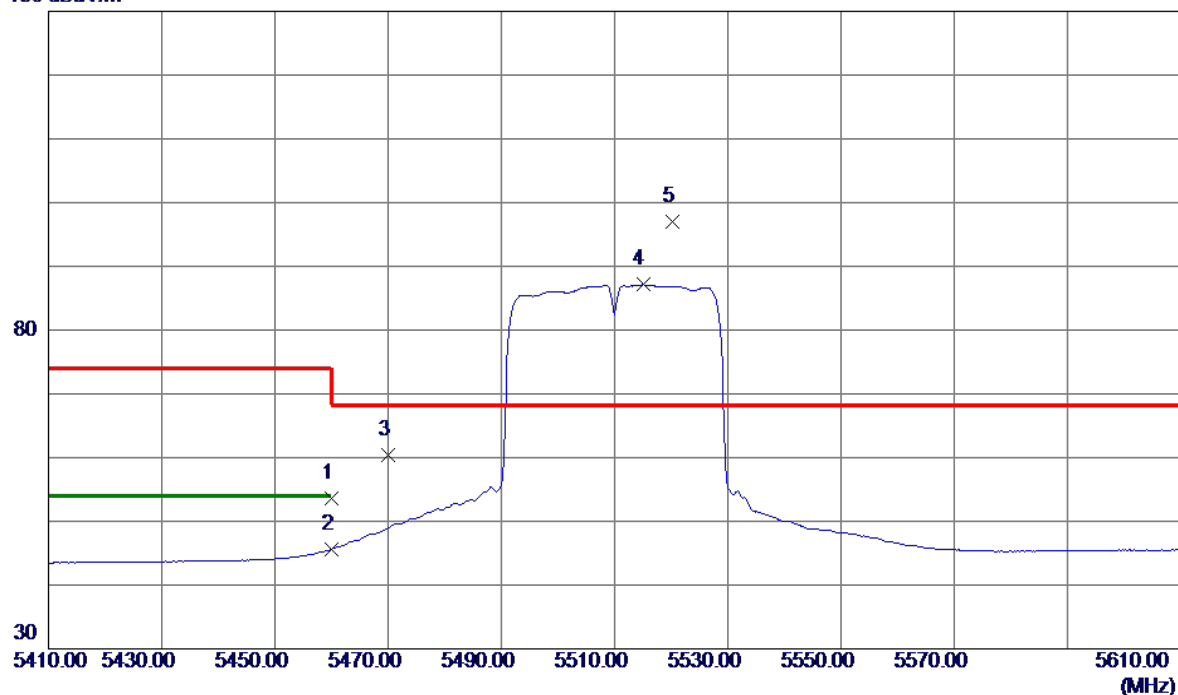

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 35.73                      | 17.85                   | 53.58                     | 74.00           | -20.42       | Peak     |          |
| 2   | 5460.0000    | 27.75                      | 17.85                   | 45.60                     | 54.00           | -8.40        | AVG      |          |
| 3   | 5470.0000    | 42.42                      | 17.89                   | 60.31                     | 68.30           | -7.99        | Peak     |          |
| 4   | 5515.0000    | 69.05                      | 18.06                   | 87.11                     | 999.00          | -911.89      | AVG      | No Limit |
| 5 * | 5520.2000    | 78.96                      | 18.08                   | 97.04                     | 68.30           | 28.74        | Peak     | No Limit |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5510MHz |

### Horizontal

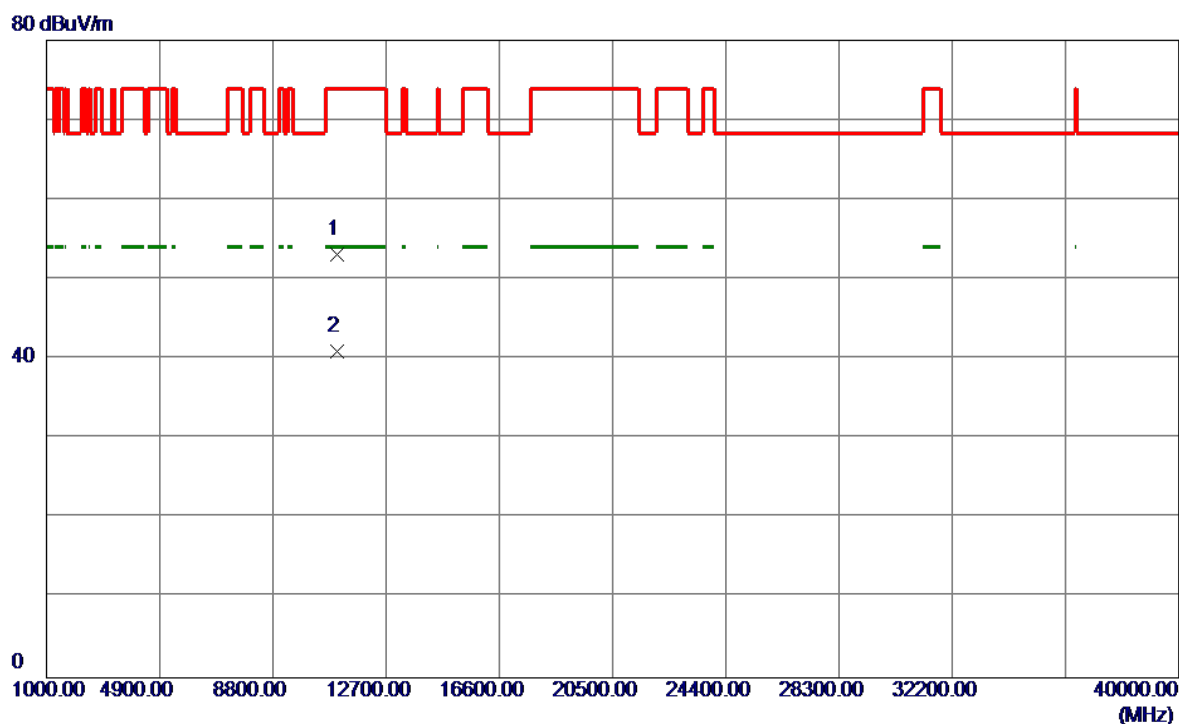


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11019.1500   | 37.11                      | 16.03                   | 53.14                     | 74.00           | -20.86       | Peak     |         |
| 2 * | 11019.8500   | 24.90                      | 16.03                   | 40.93                     | 54.00           | -13.07       | AVG      |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5550MHz |

### Vertical


130 dBuV/m

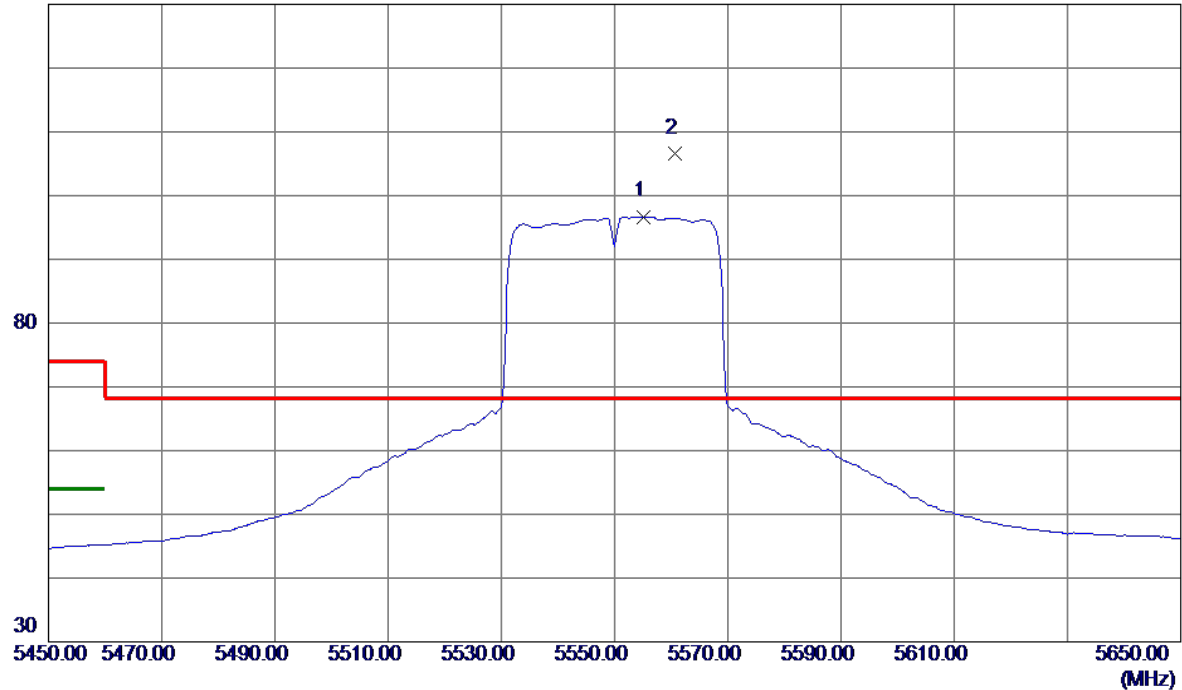

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5555.2000    | 78.46                      | 18.24                   | 96.70                     | 999.00          | -902.30      | AVG      | No Limit |
| 2 * | 5560.6000    | 88.33                      | 18.26                   | 106.59                    | 68.30           | 38.29        | Peak     | No Limit |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5550MHz |


### Vertical

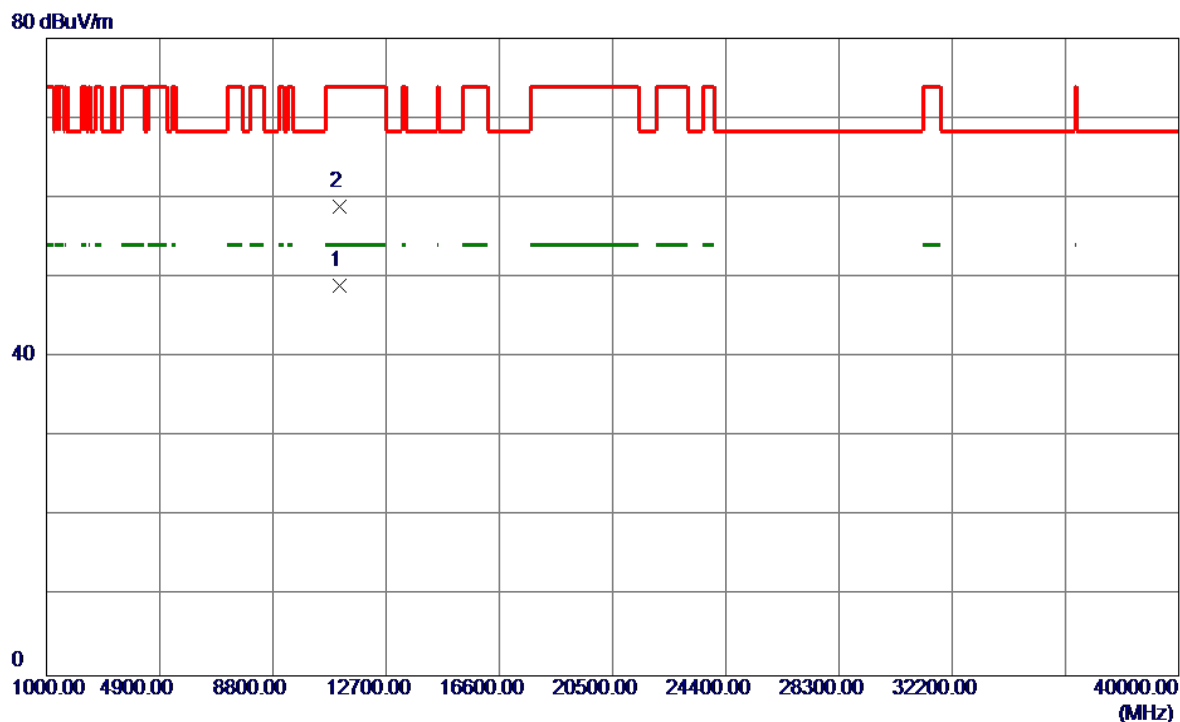

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11100.0000   | 32.67                      | 16.23                   | 48.90                     | 54.00           | -5.10        | AVG      |         |
| 2   | 11100.6000   | 42.68                      | 16.23                   | 58.91                     | 74.00           | -15.09       | Peak     |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5550MHz |


### Horizontal

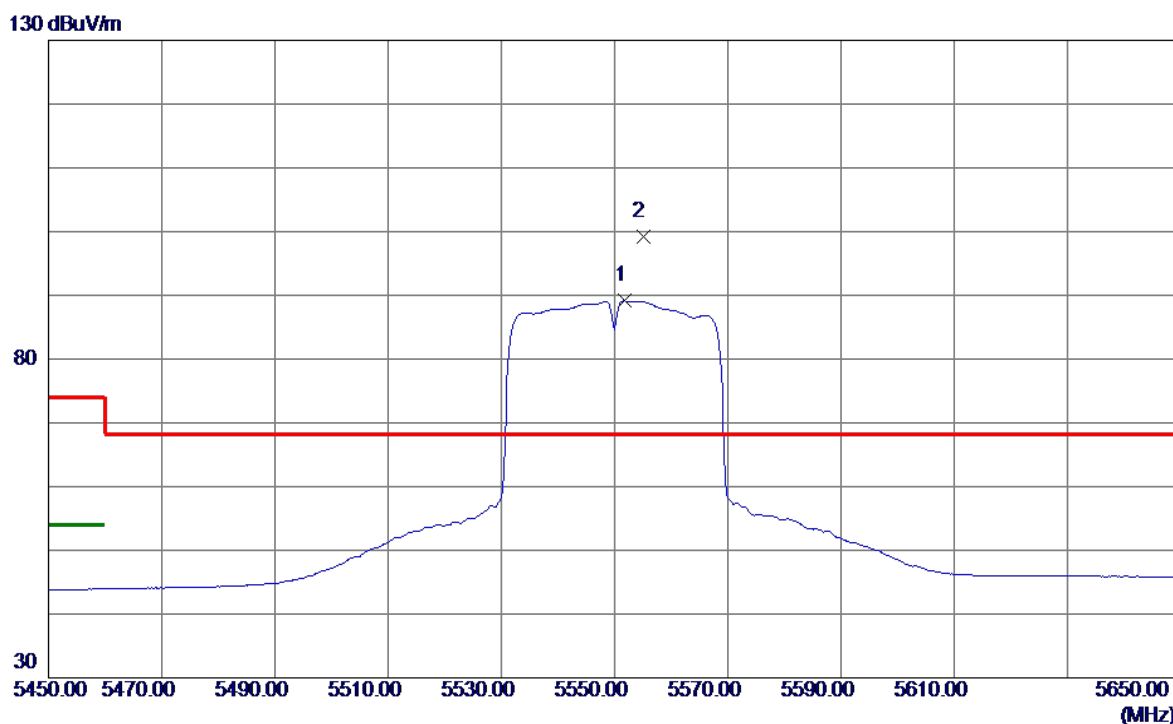

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5551.8000    | 70.89                      | 18.22                   | 89.11                     | 999.00          | -909.89      | AVG      | No Limit |
| 2 * | 5555.0000    | 80.97                      | 18.24                   | 99.21                     | 68.30           | 30.91        | Peak     | No Limit |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5550MHz |

### Horizontal

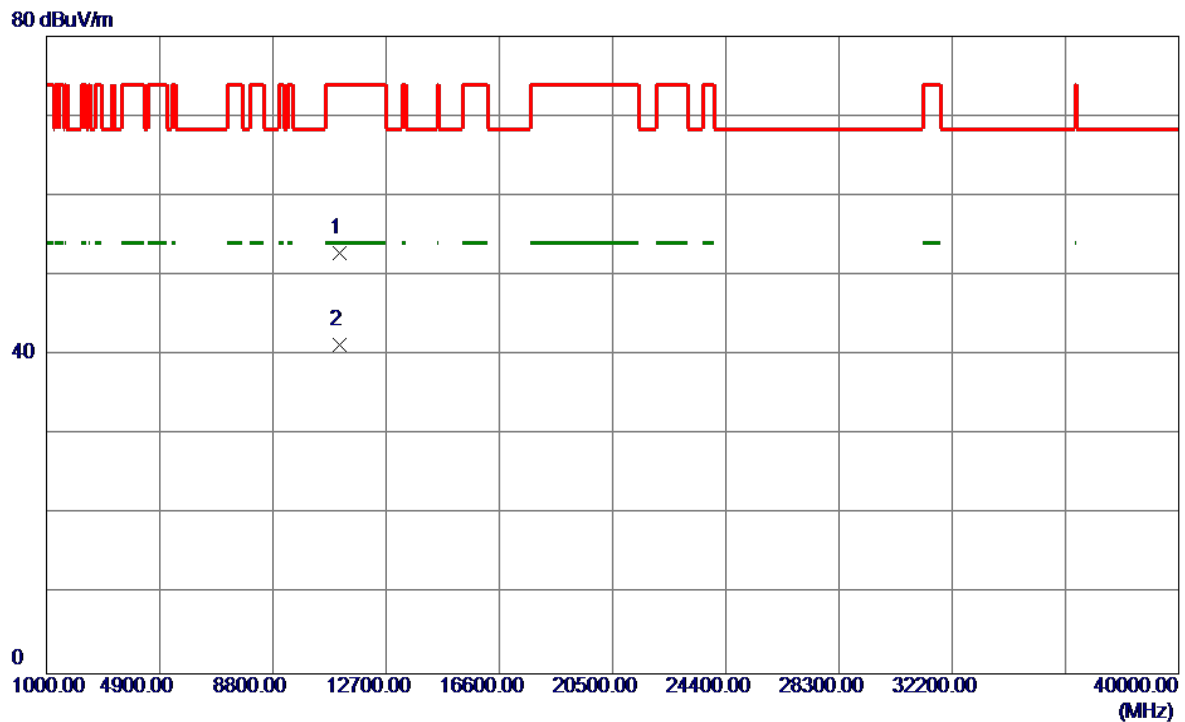


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11098.1000   | 36.57                      | 16.23                   | 52.80                     | 74.00           | -21.20       | Peak     |         |
| 2 * | 11100.0000   | 25.02                      | 16.23                   | 41.25                     | 54.00           | -12.75       | AVG      |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5670MHz |

### Vertical


130 dBuV/m

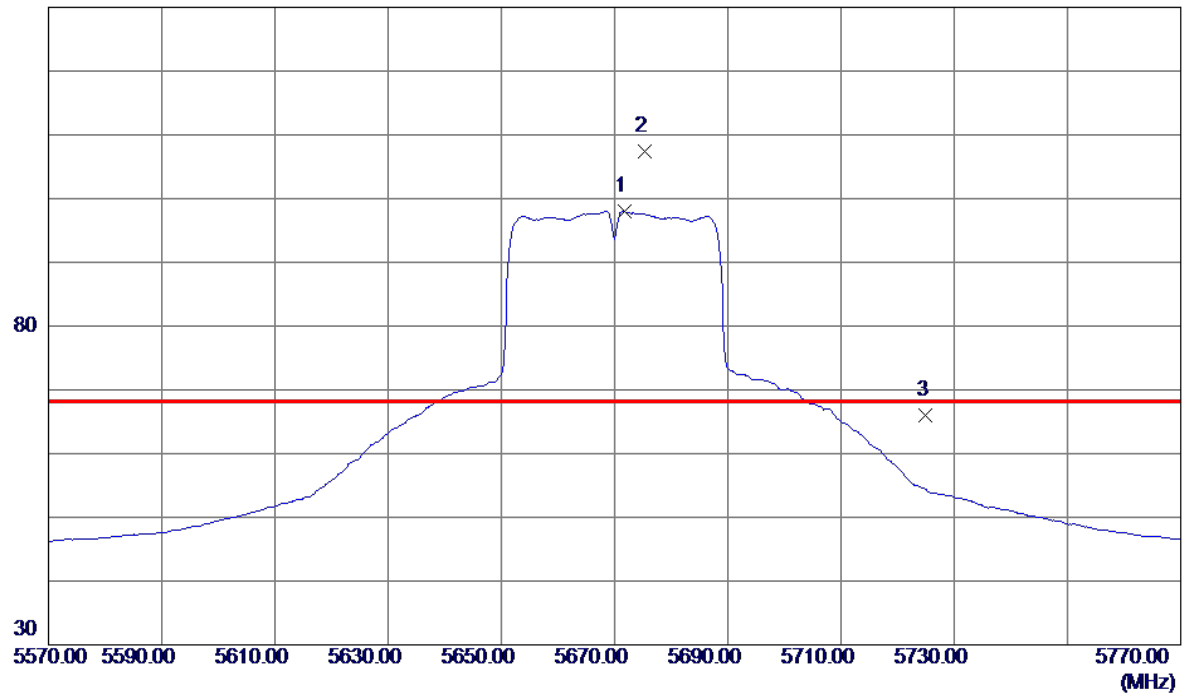

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5671.8000    | 79.22                      | 18.76                   | 97.98                     | 999.00          | -901.02      | AVG      | No Limit |
| 2 * | 5675.4000    | 88.70                      | 18.77                   | 107.47                    | 68.30           | 39.17        | Peak     | No Limit |
| 3   | 5725.0000    | 47.02                      | 18.99                   | 66.01                     | 68.30           | -2.29        | Peak     |          |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5670MHz |

### Vertical

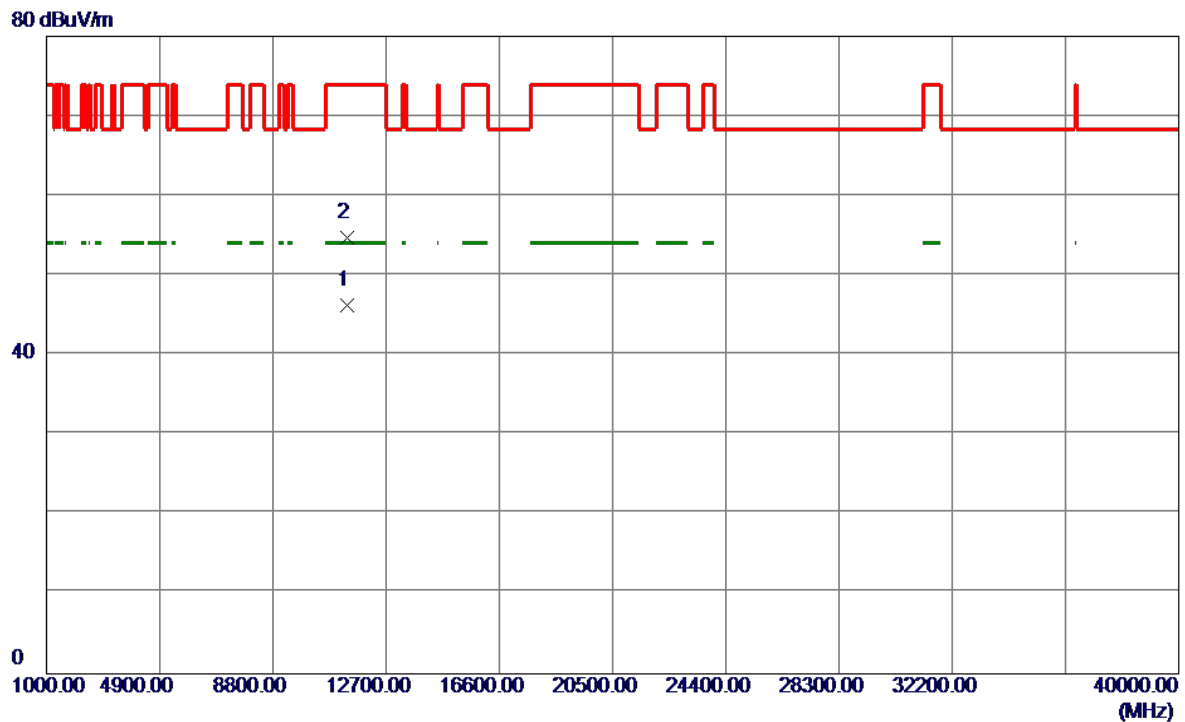


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11340.0000   | 29.45                      | 16.83                   | 46.28                     | 54.00           | -7.72        | AVG      |         |
| 2   | 11346.0000   | 37.83                      | 16.84                   | 54.67                     | 74.00           | -19.33       | Peak     |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5670MHz |

### Horizontal


130 dBuV/m

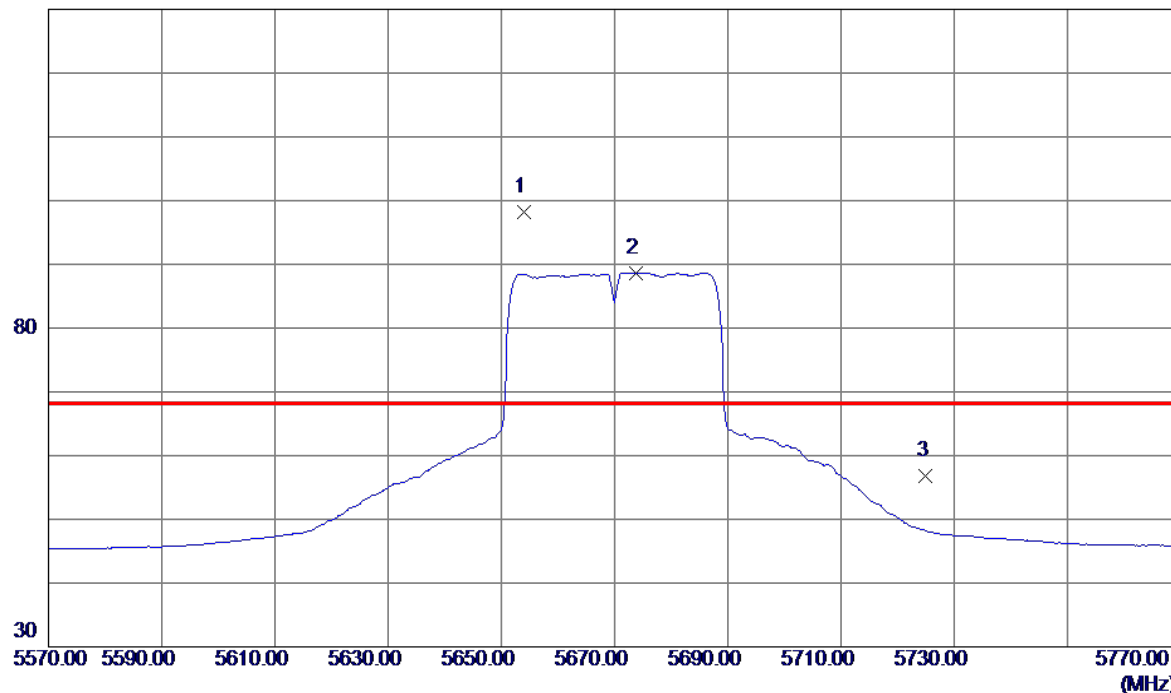

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5654.0000    | 79.55                      | 18.68                   | 98.23                     | 68.30           | 29.93        | Peak     | No Limit |
| 2   | 5673.8000    | 69.91                      | 18.76                   | 88.67                     | 999.00          | -910.33      | AVG      | No Limit |
| 3   | 5725.0000    | 37.88                      | 18.99                   | 56.87                     | 68.30           | -11.43       | Peak     |          |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5670MHz |

### Horizontal

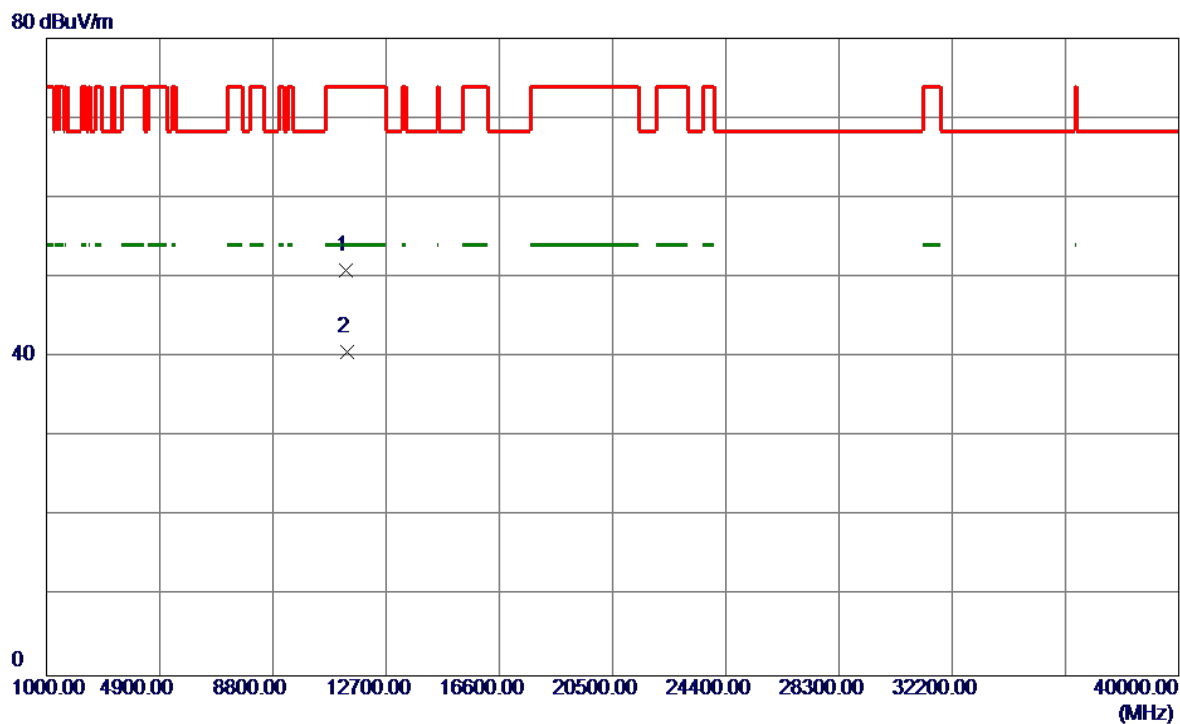


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11328.6000   | 34.03                      | 16.80                   | 50.83                     | 74.00           | -23.17       | Peak     |         |
| 2 * | 11339.8000   | 23.74                      | 16.83                   | 40.57                     | 54.00           | -13.43       | AVG      |         |

|                  |                          |
|------------------|--------------------------|
| Orthogonal Axis: | X                        |
| Test Mode:       | UNII-3/TX A Mode 5745MHz |

# Vertical


130 dBuV/m

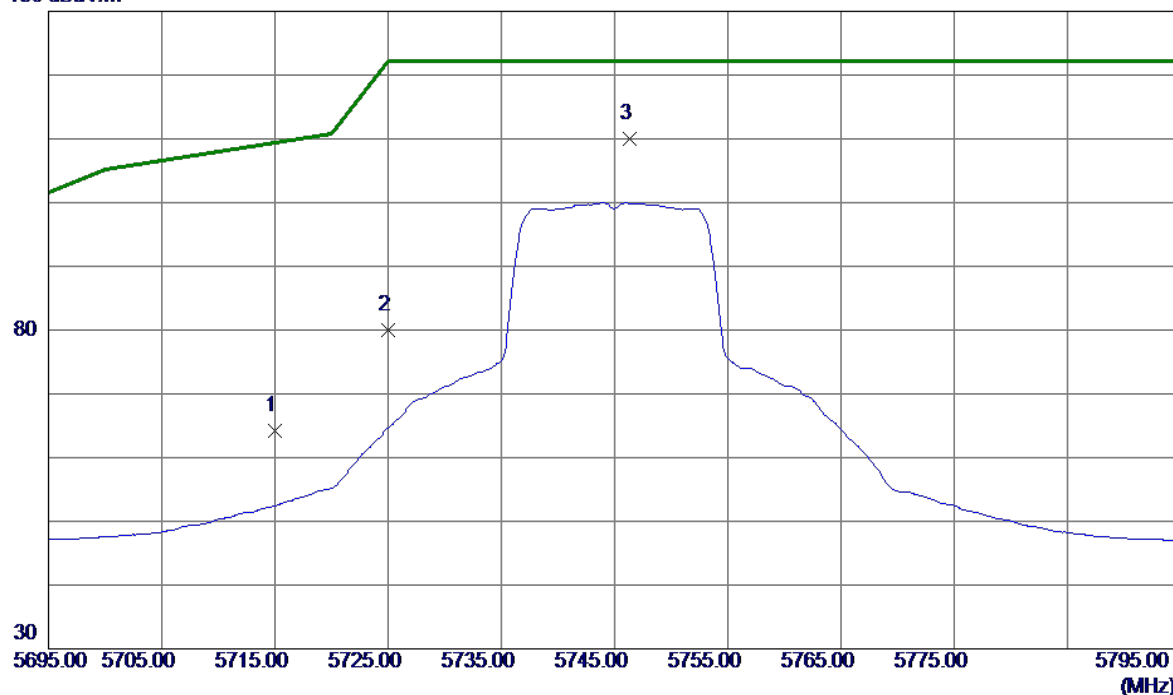

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5715.0000    | 45.22                      | 18.95                   | 64.17                     | 109.40          | -45.23       | Peak     |         |
| 2   | 5725.0000    | 60.97                      | 18.99                   | 79.96                     | 122.20          | -42.24       | Peak     |         |
| 3 * | 5746.3000    | 90.85                      | 19.09                   | 109.94                    | 122.20          | -12.26       | Peak     |         |

|                  |                          |
|------------------|--------------------------|
| Orthogonal Axis: | X                        |
| Test Mode:       | UNII-3/TX A Mode 5745MHz |


### Vertical

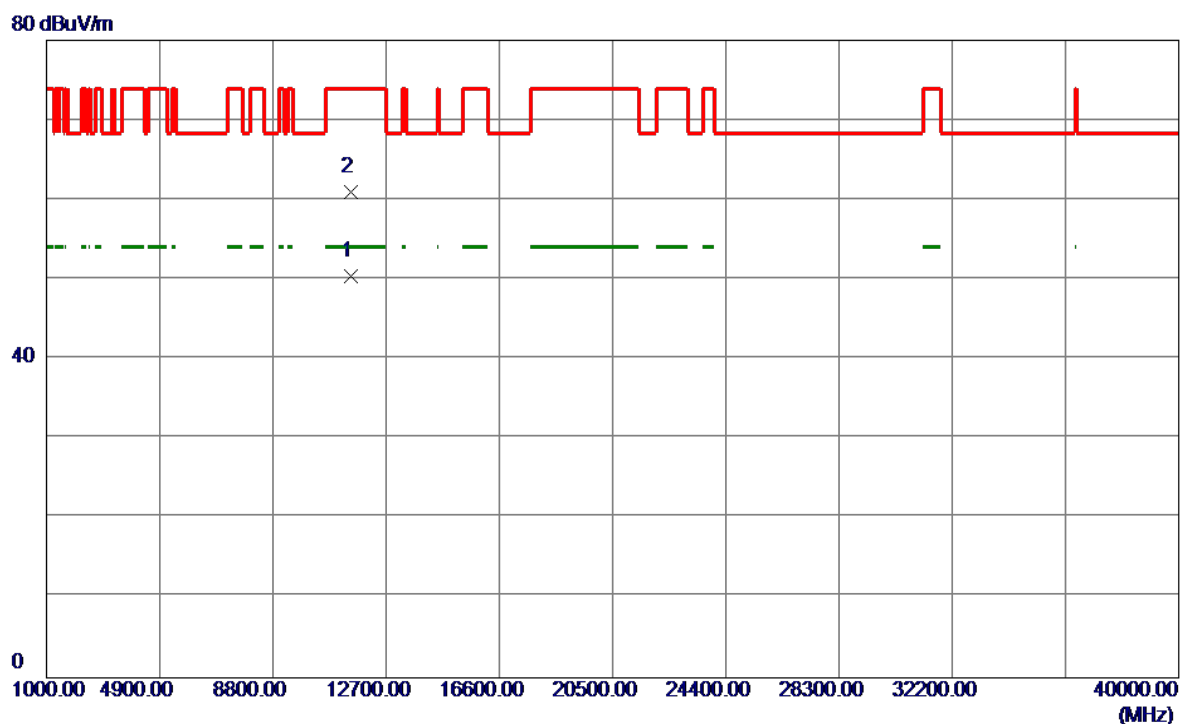

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11489.9000   | 33.15                      | 17.20                   | 50.35                     | 54.00           | -3.65        | AVG      |         |
| 2   | 11490.8000   | 43.70                      | 17.21                   | 60.91                     | 74.00           | -13.09       | Peak     |         |

|                  |                          |
|------------------|--------------------------|
| Orthogonal Axis: | X                        |
| Test Mode:       | UNII-3/TX A Mode 5745MHz |


### Horizontal

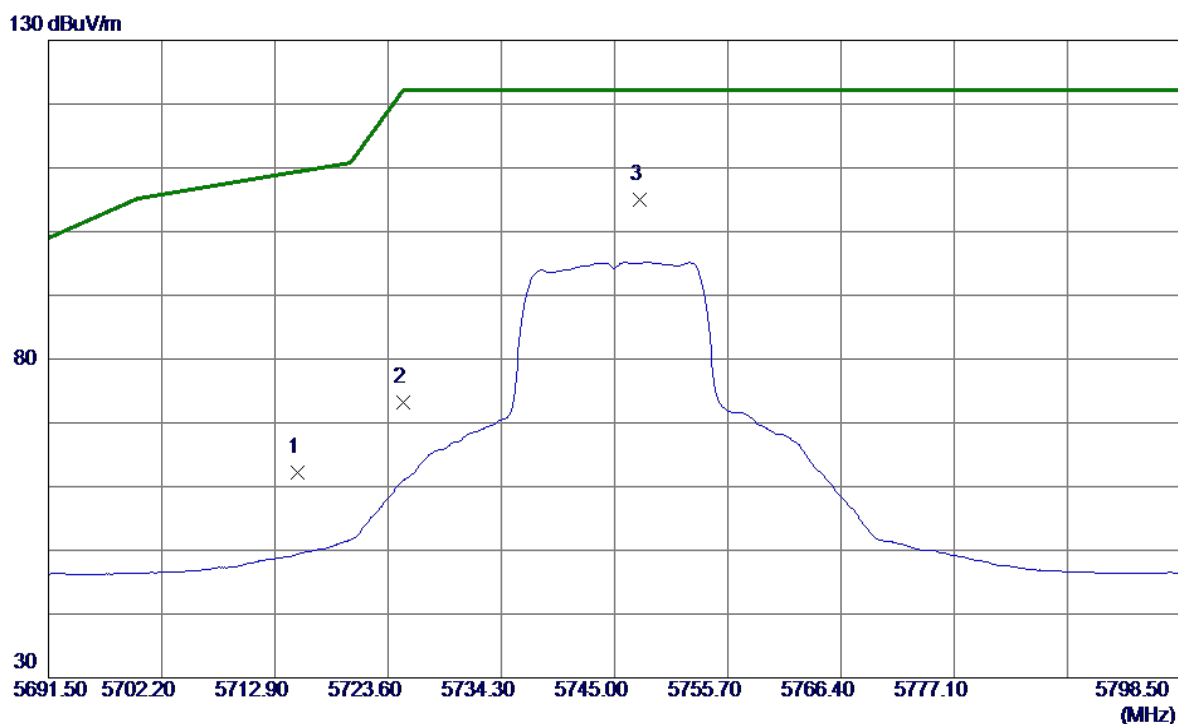

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5715.0000    | 43.21                      | 18.95                   | 62.16                     | 109.40          | -47.24       | Peak     |         |
| 2   | 5725.0000    | 54.28                      | 18.99                   | 73.27                     | 122.20          | -48.93       | Peak     |         |
| 3 * | 5747.3540    | 86.00                      | 19.09                   | 105.09                    | 122.20          | -17.11       | Peak     |         |

|                  |                          |
|------------------|--------------------------|
| Orthogonal Axis: | X                        |
| Test Mode:       | UNII-3/TX A Mode 5745MHz |


### Horizontal

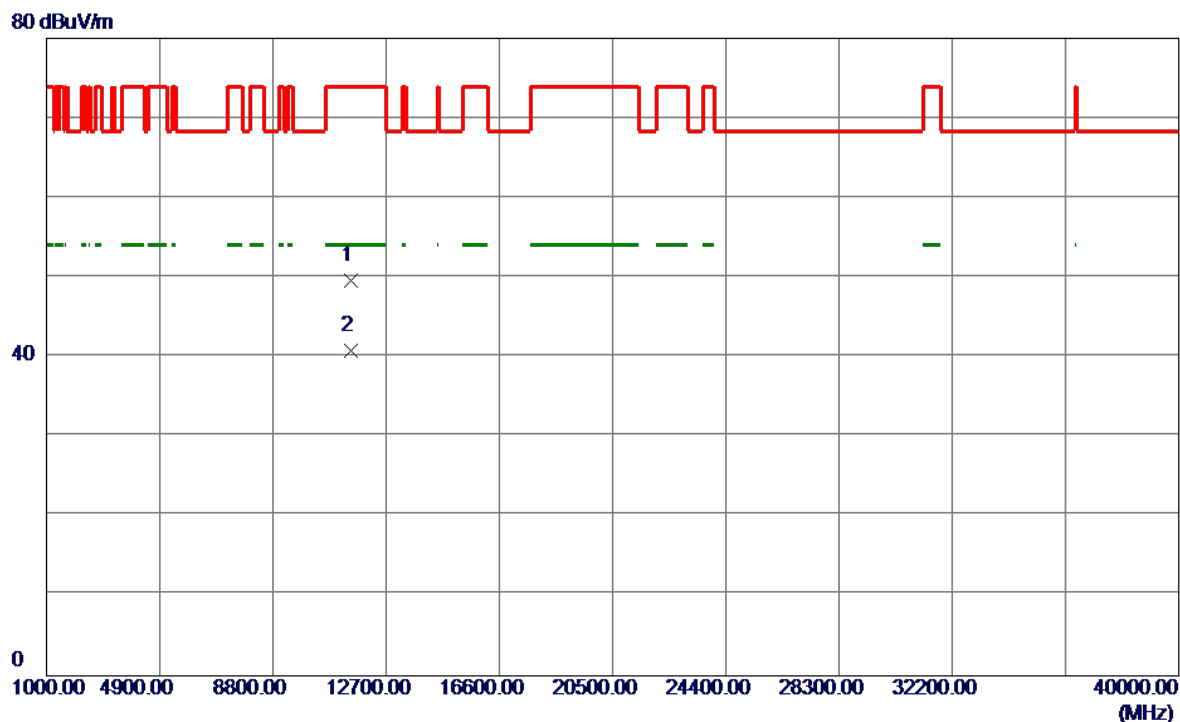

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11486.9000   | 32.33                      | 17.20                   | 49.53                     | 74.00           | -24.47       | Peak     |         |
| 2 * | 11488.0000   | 23.56                      | 17.20                   | 40.76                     | 54.00           | -13.24       | AVG      |         |

|                  |                          |
|------------------|--------------------------|
| Orthogonal Axis: | X                        |
| Test Mode:       | UNII-3/TX A Mode 5785MHz |


### Vertical

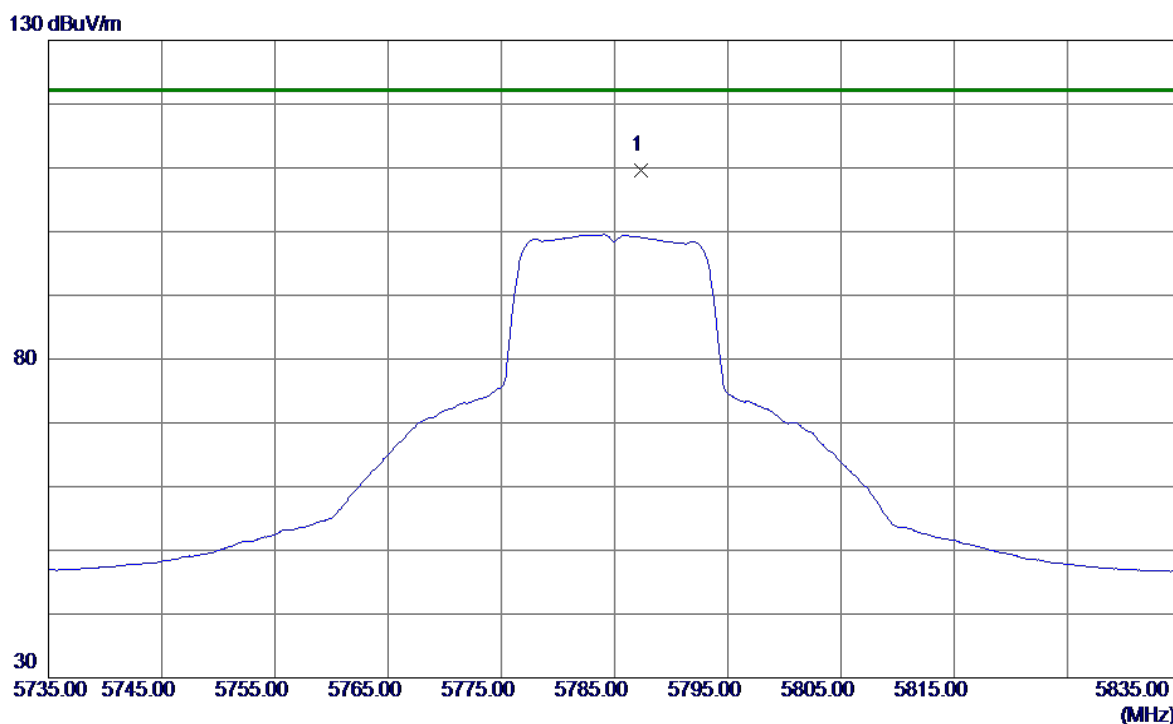

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5787.3000    | 90.27                      | 19.27                   | 109.54                    | 122.20          | -12.66       | Peak     |         |

|                  |                          |
|------------------|--------------------------|
| Orthogonal Axis: | X                        |
| Test Mode:       | UNII-3/TX A Mode 5785MHz |


# Vertical

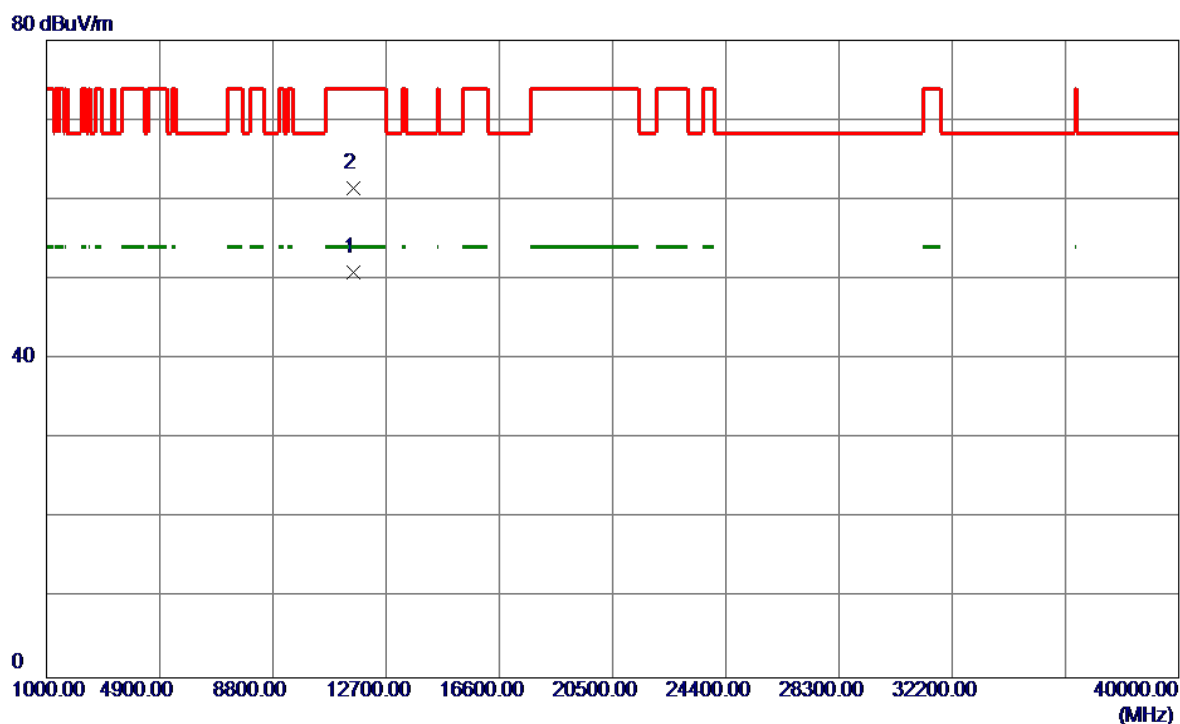

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11570.1000   | 33.54                      | 17.34                   | 50.88                     | 54.00           | -3.12        | AVG      |         |
| 2   | 11571.0000   | 44.13                      | 17.34                   | 61.47                     | 74.00           | -12.53       | Peak     |         |

|                  |                          |
|------------------|--------------------------|
| Orthogonal Axis: | X                        |
| Test Mode:       | UNII-3/TX A Mode 5785MHz |


### Horizontal

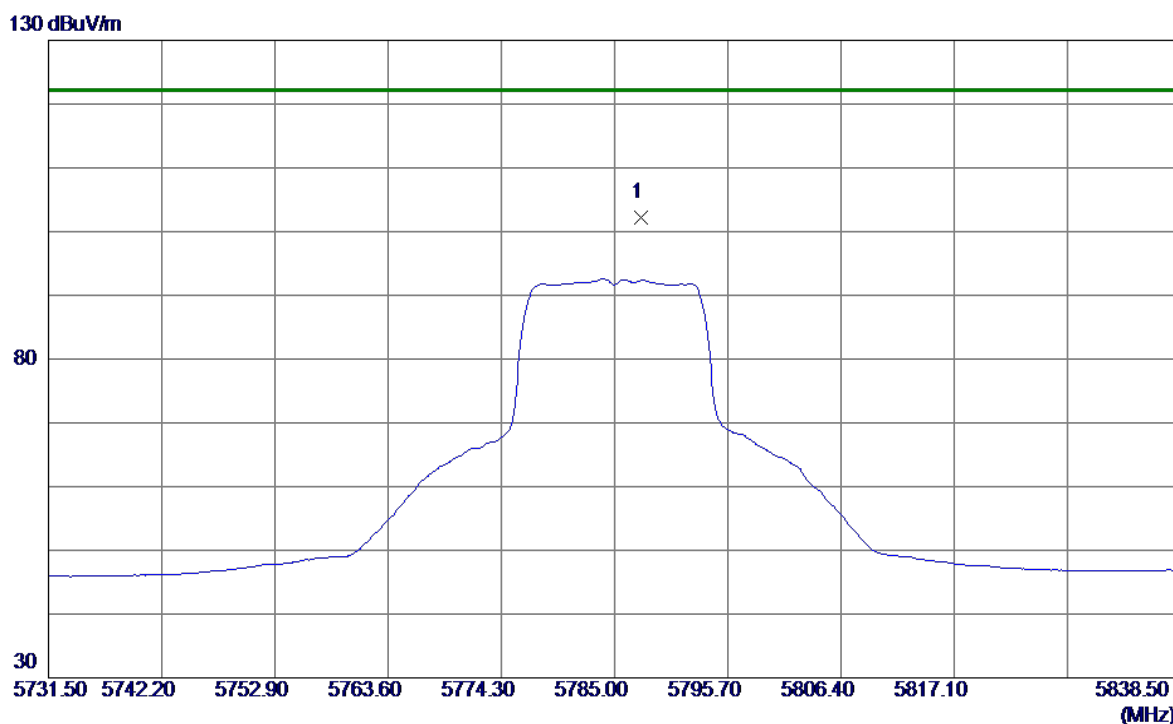

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5787.4610    | 82.94                      | 19.27                   | 102.21                    | 122.20          | -19.99       | Peak     |         |

|                  |                          |
|------------------|--------------------------|
| Orthogonal Axis: | X                        |
| Test Mode:       | UNII-3/TX A Mode 5785MHz |


### Horizontal

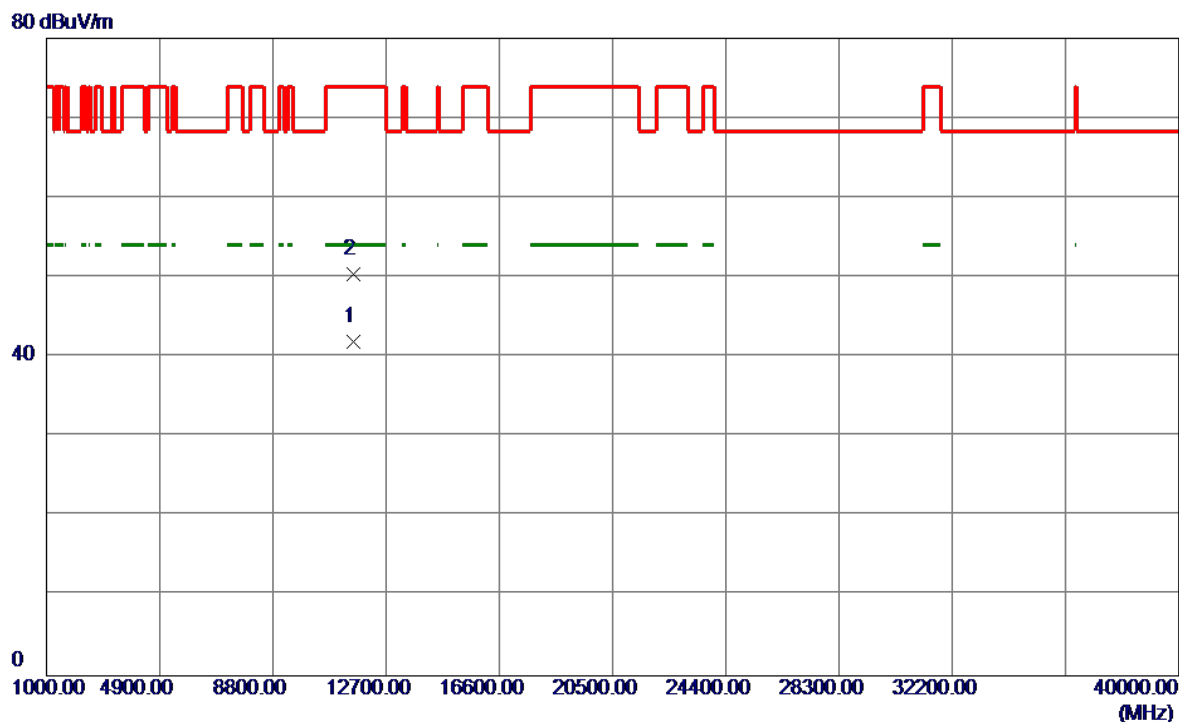

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11570.0000   | 24.63                      | 17.34                   | 41.97                     | 54.00           | -12.03       | AVG      |         |
| 2   | 11574.1000   | 32.99                      | 17.35                   | 50.34                     | 74.00           | -23.66       | Peak     |         |

|                  |                          |
|------------------|--------------------------|
| Orthogonal Axis: | X                        |
| Test Mode:       | UNII-3/TX A Mode 5825MHz |

**Vertical**

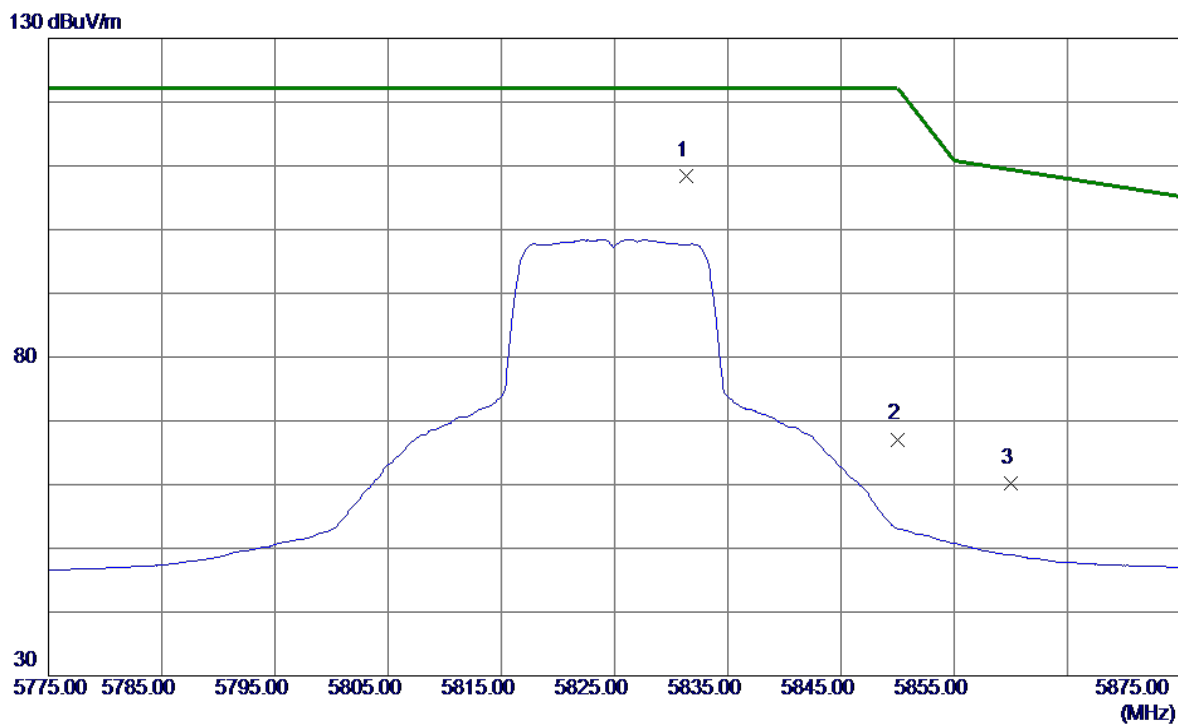

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5831.3000    | 88.87                      | 19.46                   | 108.33                    | 122.20          | -13.87       | Peak     |         |
| 2   | 5850.0000    | 47.55                      | 19.55                   | 67.10                     | 122.20          | -55.10       | Peak     |         |
| 3   | 5860.0000    | 40.62                      | 19.59                   | 60.21                     | 109.40          | -49.19       | Peak     |         |