

FCC SAR REPORT

Applicant: PAX Technology Limited

Address of Applicant: Room 2416, 24/F., Sun Hung Kai Centre, 30 Harbour Road,
Wanchai, Hong Kong

Equipment Under Test (EUT)

Product Name: Integrated Smart Terminal

Model No.: E600Mini

Trade mark: PAX

FCC ID: V5PE600MINI

Applicable standards: FCC 47 CFR Part 2.1093

Date of Test: 16 Nov., 2021~26 Nov., 2021

Test Result: Maximum Reported 10-g SAR (W/kg)
Limb: 2.717

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the JYT product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	27 Dec., 2021	Original

Tested by:

Vieta Zhang

Date:

27 Dec., 2021

Test Engineer

Reviewed by:

Wiby Zhang

Date:

27 Dec., 2021

Project Engineer

3 Contents

1	COVER PAGE.....	1
2	VERSION	2
3	CONTENTS	3
4	SAR RESULTS SUMMARY.....	5
5	GENERAL INFORMATION.....	6
5.1	CLIENT INFORMATION.....	6
5.2	GENERAL DESCRIPTION OF EUT	6
5.3	MAXIMUM RF OUTPUT POWER.....	7
5.4	ENVIRONMENT OF TEST SITE	8
5.5	TEST SAMPLE PLAN	8
5.6	TEST LOCATION	8
6	INTRODUCTION.....	9
6.1	INTRODUCTION	9
6.2	SAR DEFINITION	9
7	RF EXPOSURE LIMITS	10
7.1	UNCONTROLLED ENVIRONMENT.....	10
7.2	CONTROLLED ENVIRONMENT	10
7.3	RF EXPOSURE LIMITS	10
8	SAR MEASUREMENT SYSTEM.....	11
8.1	E-FIELD PROBE.....	12
8.2	ROBOT	13
8.3	PHANTOM.....	14
8.4	DEVICE HOLDER.....	14
8.5	TEST EQUIPMENT LIST	15
9	TISSUE SIMULATING LIQUIDS	16
10	SAR SYSTEM VERIFICATION.....	18
11	EUT TESTING POSITION.....	20
11.1	LIMB CONFIGURATIONS.....	20
12	MEASUREMENT PROCEDURES	21
12.1	SPATIAL PEAK SAR EVALUATION	21
12.2	POWER REFERENCE MEASUREMENT.....	22
12.3	AREA & ZOOM SCAN PROCEDURES.....	22
12.4	VOLUME SCAN PROCEDURES	23
12.5	SAR AVERAGED METHODS	23
12.6	POWER DRIFT MONITORING	23
13	CONDUCTED RF OUTPUT POWER.....	24
13.1	WCDMA CONDUCTED POWER	24
13.2	LTE CONDUCTED POWER	27
13.3	WLAN 2.4GHZ BAND CONDUCTED POWER	42
13.4	WLAN 5.2GHZ BAND CONDUCTED POWER	42
13.5	WLAN 5.8GHZ BAND CONDUCTED POWER	43
13.6	BLUETOOTH CONDUCTED POWER	43
14	EXPOSURE POSITIONS CONSIDERATION	44
14.1	EUT ANTENNA LOCATIONS.....	44
14.2	TEST POSITIONS CONSIDERATION	45
15	SAR TEST RESULTS SUMMARY	46
15.1	LIMB SAR DATA	46
15.2	REPEATED SAR MEASUREMENT	48
15.3	MULTI-BAND SIMULTANEOUS TRANSMISSION CONSIDERATIONS.....	49
15.4	SAR SIMULTANEOUS TRANSMISSION ANALYSIS.....	50
15.5	MEASUREMENT UNCERTAINTY.....	51
15.6	MEASUREMENT CONCLUSION	53
16	REFERENCE.....	54

APPENDIX A: PLOTS OF SAR SYSTEM CHECK	55
APPENDIX B: PLOTS OF SAR TEST DATA	61
APPENDIX C: SYSTEM CALIBRATION CERTIFICATE.....	70

4 SAR Results Summary

The maximum results of Specific Absorption Rate (SAR) found during test as bellows:

<Highest Reported standalone SAR Summary>

Exposure Position	Frequency Band	Reported 10-g SAR(W/kg)	Equipment Class	Highest Reported 10-g SAR (W/kg)
Limb 10-g SAR (0 mm Gap)	WCDMA Band V	0.706	PCB	2.717
	WCDMA Band II	1.324		
	LTE Band 2	1.545		
	LTE Band 4	2.717		
	LTE Band 5	2.213		
	LTE Band 12	1.318		
	LTE Band 13	1.883		
	WLAN 2.4GHz	0.426	DTS	

<Highest Reported simultaneous SAR Summary>

Exposure Position	Frequency Band	Reported 10-g SAR (W/kg)	Equipment Class	Highest Reported Simultaneous Transmission 10-g SAR (W/kg)
Right	WWAN	2.717	PCB	2.946
	WLAN 5.8 GHz	0.229	NII	

Note:

1. The highest simultaneous transmission is scalar summation of Reported standalone SAR per FCC KDB 690783 D01 v01r03, and scalar SAR summation of all possible simultaneous transmission scenarios are < 4.0W/kg.
2. This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (4.0 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.
3. For FDD-LTE Band 17 is full covered by FDD-LTE Band 12, so only FDD-LTE Band 12 was tested.

5 General Information

5.1 Client Information

Applicant:	PAX Technology Limited
Address of Applicant:	Room 2416, 24/F., Sun Hung Kai Centre, 30 Harbour Road, Wanchai, Hong Kong
Manufacturer:	PAX Computer Technology (Shenzhen) Co., Ltd.
Address of Manufacturer:	4/F, No.3 Building, Software Park, Second Central Science-Tech Road, High-Tech industrial Park, Shenzhen, Guangdong, P.R.C.

5.2 General Description of EUT

Product Name:	Integrated Smart Terminal				
Model No.:	E600Mini				
Category of device	Portable device				
Operation Frequency:	3G :	Band II: 1852.4~1907.6 MHz		Band V: 826.4~846.6 MHz	
	4G :	Band 2 :1850MHz~1910MHz		Band 4 :1710MHz~1755MHz	
		Band 5 :824MHz~849MHz		Band 12: 698MHz~716MHz	
		Band 13: 777MHz~787MHz		Band 17: 704MHz~716MHz	
	Wi-Fi:	2412MHz~2462MHz		5150MHz-5250MHz	
		5725MHz-5825MHz			
	Bluetooth: 2402 MHz ~ 2480 MHz				
Modulation technology:	3G:	☒ RCM(QPSK)	☒ HSUPA(QPSK)	☒ HSDPA(QPSK,16QAM)	
	4G:	☒ QPSK	☒ 16QAM	☒ 64QAM	
	Wi-Fi:	☒ 802.11b(DSSS)		☒ 802.11a/g/n/ac (OFDM)	
	Bluetooth:	☒ BDR(GFSK)	☒ EDR(π /4-DQPSK, 8DPSK)		☒ LE(GFSK)
Antenna Type:	Internal Antenna				
Antenna Gain:	WCDMA Band V: -2.20 dBi ;WCDMA Band II: 1.4 dBi LTE Band 2: 1.20 dBi ; LTE Band 4: 1.10 dBi ; LTE Band 5: -2.20 dBi ; LTE Band 12: -3.50 dBi ; LTE Band 13: -3.10 dBi ; LTE Band 17: -3.50 dBi ; 2.4G Wi-Fi: 1.50 dBi; 5G Wi-Fi: 1.50 dBi Bluetooth: 1.50dBi;				
Dimensions (L*W*H):	238mm (L)× 102mm (W)× 78mm (H)				
Accessories information:	Adapter: Model: TPD-71A120150UU01 Input: 100-240V, 50/60Hz, 0.6A Output: DC 3.6-6.0V, 3.0A, 18.0W DC 6.0-9.0V, 2.0A, 18.0W DC 9.0-12.0V, 1.5A, 18.0W			Battery: Rechargeable Li-ion Battery 3.8V/6100mAh	

5.3 Maximum RF Output Power

Mode	Average Power (dBm)	
	WCDMA Band V	WCDMA Band II
AMR 12.2 kbps	25.14	24.39
RMC 12.2 kbps	25.23	24.38
HSDPA Sub-test 1	21.53	22.99
HSDPA Sub-test 2	21.23	22.76
HSDPA Sub-test 3	20.85	22.36
HSDPA Sub-test 4	21.09	22.39
HSUPA Sub-test 1	19.54	21.98
HSUPA Sub-test 2	19.74	22.12
HSUPA Sub-test 3	19.76	22.06
HSUPA Sub-test 4	19.68	22.10
HSUPA Sub-test 5	21.43	22.95

Mode	Average Power (dBm)					
	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 12	LTE Band 13	LTE Band 17
BW/1.4 MHz	22.48	22.98	23.05	23.01	/	/
BW/3.0 MHz	22.46	22.96	23.10	23.03	/	/
BW/5.0 MHz	22.47	23.11	23.19	23.01	23.05	23.10
BW/10 MHz	22.53	22.93	23.12	22.85	23.00	22.83
BW/15 MHz	22.50	22.87	/	/	/	/
BW/20 MHz	22.65	22.95	/	/	/	/

WLAN 2.4 GHz Band Average Power (dBm)				
Mode/Band	b	g	n (HT-20)	n (HT-40)
WLAN 2.4GHz	16.93	17.58	17.43	17.51

WLAN 5.2 GHz Band Average Power (dBm)						
Mode/Band	a	ac 20	ac 40	ac 80	n 20	n 40
WLAN 5.2GHz	8.23	8.49	7.32	6.22	8.54	7.26

WLAN 5.8 GHz Band Average Power (dBm)						
Mode/Band	a	ac 20	ac 40	ac 80	n 20	n 40
WLAN 5.8GHz	8.93	8.72	9.00	8.60	8.86	9.05

Bluetooth Average Power (dBm)							
Mode/Band	1 Mbps (GFSK)	2 Mbps ($\pi/4$ DQPSK)	3 Mbps (8DPSK)	BLE 1M	BLE 2M	BLE S=2	BLE S=8
Bluetooth	9.09	8.68	9.10	5.82	5.58	5.79	5.62

5.4 Environment of Test Site

Temperature:	18°C ~25°C
Humidity:	35%~75% RH
Atmospheric Pressure:	1010 mbar

5.5 Test Sample Plan

Sample Number	Used for Test Items
2#	SAR
<i>Remark: JianYan Testing Group Shenzhen Co., Ltd. is only responsible for the test project data of the above samples, and will keep the above samples for a month.</i>	

5.6 Test Location

JianYan Testing Group Shenzhen Co., Ltd.
No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community,Xinqiao Street,
Bao'an District, Shenzhen, Guangdong,People's Republic of China.
Tel: +86-755-23118282, Fax: +86-755-23116366
Email: info-JYTee@lets.com, Website: <http://www.ccis-cb.com>

6 Introduction

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength. However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 RF Exposure Limits

7.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

7.3 RF Exposure Limits

SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
SPATIAL PEAK SAR Brain	1.6	8.0
SPATIAL AVERAGE SAR Whole Body	0.08	0.4
SPATIAL PEAK SAR Hands, Feet, Ankles, Wrists	4.0	20

Note:

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

8 SAR Measurement System

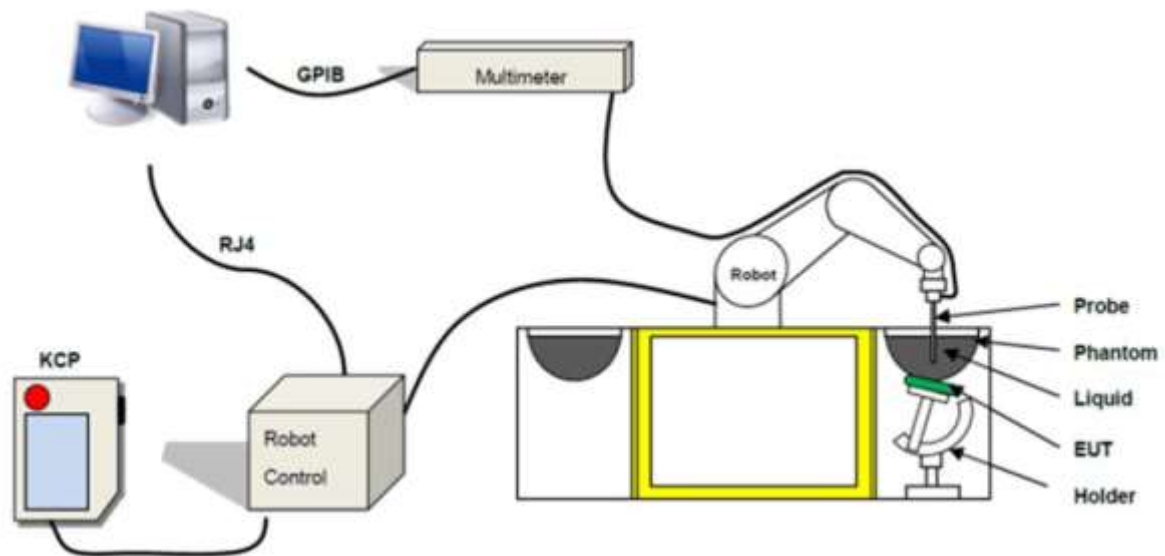


Fig.8.1 MVGCOMOSAR System Configurations

These measurements were performed with the automated near-field scanning system COMOSAR from MVG. The system is based on a high precision robot (working range: 850 mm), which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit.

The SAR measurements were conducted with dosimetric probe (manufactured by MVG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in SAR standard with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure described in SAR standard and found to be better than ± 0.25 dB. The phantom used was the SAM Phantom as described in FCC supplement C, IEEE P1528.

The MVGCOMOSAR system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by MVG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.


➤ E-Field Probe Specification

Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Model	SSE2
Frequency Range	150 MHz to 6 GHz
Dynamic Range	0.01W/kg to 100W/kg
Probe linearity	<0.25dB
Dimensions	Overall length: 330 mm Tip diameter: 2.5 mm Distance between dipoles / probe Limb: 1 mm
	

Fig. 8.2 Photo of E-Field Probe

➤ E-Field Probe Calibration

Probe calibration is realized, in compliance with EN/IEC 62209-1/-2 and IEEE 1528 std, with CALISAR, MVG proprietary calibration system. The calibration is performed with the technique using reference waveguide.

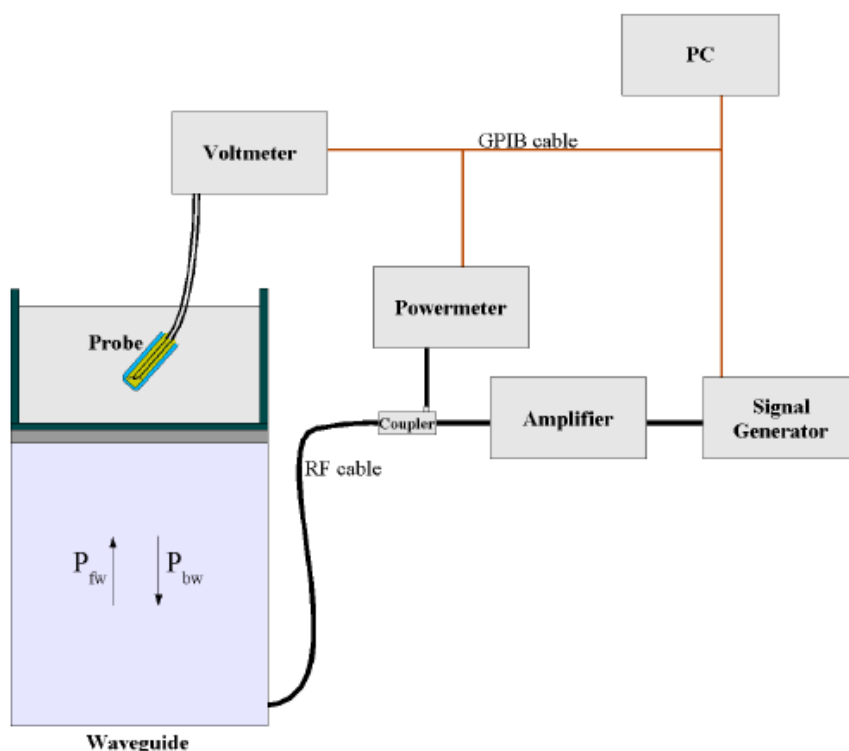

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\sigma} \cos^2 \left(\pi \frac{y}{a} \right) e^{-(2\pi/\sigma)z}$$

Where :

- P_{fw} = Forward Power
- P_{bw} = Backward Power
- a and b = Waveguide Dimensions
- σ = Skin Depth

Keithley configuration

Rate=Medium; Filter=ON; RDGS=10; FILTER TYPE=MOVING AVERAGE; RANGE AUTO

After each calibration, a SAR measurement performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The Calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N) = SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearized output voltage V_{lin}(N) is obtained from the displayed output voltage V(N) using

$$V_{lin}(N) = V(N) * (1 + V(N)/DCP(N)) \quad N=1,2,3$$

Where the DCP is the dipole compression point in mV

8.2 Robot

The COMOSAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA-KRC2sr) from KUKA is used. The KUKA robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; nobelt drives)
- Jerk-free straight movements
- Low ELF interference (motor control fields shielded via the closed metallic constructionshields)



Fig. 8.4 Photo of Robot

8.3 Phantom

<SAM Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 27 liters	
Dimensions	Length: 1000mm; Width: 500mm; Height: 200mm	
Material	Fiberglass based	
Relative permittivity	3-4	
Loss tangent	0.02	
Measurement Areas	Left Head, Right Head, Flat phantom	

Fig. 8.7 Photo of SAM Phantom

The phantom developed by MVG is produced in accordance with the specified in the standards. It has been designed to fit the COMOSAR phantom tables and is delivered with a plastic cover to prevent liquid evaporation.

8.4 Device Holder

The positioning system is made of an extremely stable material, which ensures easy handling and reproducible positioning. It also allows correct positioning of the dipoles referenced by the IEEE, ANSI and IEC.

<Device Holder for SAM Phantom>

Model	Handset Positioning System	
Material properties	The positioning system is made of PETP. This material offers a low permittivity of 3.2 and low loss, with a loss tangent of 0.005 to minimize the influence of the DUT on measurement results.	
Mechanical properties	The positioning system developed by MVG allows a positioning resolution better than 1 mm. The system is fixed on a bottom rail "x axis" so that the positioning system can be quickly moved from the right to the left part of the phantom. In addition, it can be moved on a perpendicular "y axis" and the height can be adapted. The system is also composed of three rotation points for accurate positioning of the device's acoustical output.	
Accuracy and precision	A curved rail on the top part allows the fast switch from the cheek to the tilt position. The required 15° angle for the tilt position can be easily checked thanks to a printed scale on the curved rail with a tolerance of ± 1°	

Fig. 8.9 Photo of Device Holder

8.5 Test Equipment List

Manufacturer	Equipment Description	Model	Management Number	Cal. Information	
				Last Cal.	Due Date
MVG	COMOSAR DOSIMETRIC E FIELD PROBE	SSE2	WXJ076	05.20.2021	05.19.2022
MVG	COMOSAR 750 MHz REFERENCE DIPOLE	SID750	WXJ076-4	01.14.2021	01.13.2024
MVG	COMOSAR 835 MHz REFERENCE DIPOLE	SID835	WXJ076-5	01.14.2021	01.13.2024
MVG	COMOSAR 1750 MHz REFERENCE DIPOLE	SID1750	WXJ076-8	01.14.2021	01.13.2024
MVG	COMOSAR 1900 MHz REFERENCE DIPOLE	SID1900	WXJ076-9	01.14.2021	01.13.2024
MVG	COMOSAR 2450 MHz REFERENCE DIPOLE	SID2450	WXJ076-12	01.14.2021	01.13.2024
KEITHLEY	DIGIT MULTIMETER	DMM6500	WXJ076-1	12.17.2019	12.16.2022
MVG	MVG Measurement Software	OpenSAR	Version: V5_01_09	N.C.R	N.C.R
MVG	COMOSAR IEEE SAM PHANTOM	N/A	WXG009-2	N.C.R	N.C.R
MVG	COMOSAR IEEE SAM PHANTOM	N/A	WXG009-3	N.C.R	N.C.R
MVG	MOBILE PHONE POSITIONNING SYSTEM	N/A	WXG009-4	N.C.R	N.C.R
KUKA	Robot	KR 6 R900 sixx	WXG009-1	N.C.R	N.C.R
Anritsu	Universal Radio Communication Analyzer	MT8820C	WXJ008-5	03.03.2021	03.02.2022
R&S	Universal Radio Communication Tester	CMU200	WXJ008-2	06.18.2020	06.17.2022
HP	Network Analyzer	8753D	WXJ024	06.18.2020	06.17.2022
KEYSIGHT	EPM Series Power Meter	N1914A	WXJ075	08.29.2021	08.28.2022
KEYSIGHT	E-Series Power Sensor	E9300H	WXJ075-1	08.29.2021	08.28.2022
KEYSIGHT	E-Series Power Sensor	E9300H	WXJ075-2	08.29.2021	08.28.2022
KEYSIGHT	Signal Generator	N5173B	WXJ006-7	03.25.2021	03.24.2022
Huber Suhner	RF Cable	SUCOFLEX	WXG008-13	See Note 3	
Huber Suhner	RF Cable	SUCOFLEX	WXG008-14	See Note 3	
Huber Suhner	RF Cable	SUCOFLEX	WXG008-15	See Note 3	
Weinschel	Attenuator	23-3-34	WXG008-16	See Note 3	
Anritsu	Directional Coupler	MP654A	WXG008-17	See Note 3	
MVG	LIMESAR DIELECTRIC PROBE	SCLMP	WXG009-5	See Note 4	
TXC	Broadband Amplifier	BBA018000	WXG008-11	See Note 5	

Note:

- The calibration certificate of MVG can be referred to appendix C of this report.
- Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
- The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
- The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by MVG.
- In system check we need to monitor the level on the spectrum analyzer, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the spectrum analyzer is critical and we do have calibration for it.
- Attenuator insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.
- N.C.R means No Calibration Requirement.

9 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 9.1, for body SAR testing, the liquid height from the center of the flat phantom to liquid top surface is larger than 15 cm, which is shown in Fig. 9.2.



Fig. 9.1 Photo of Liquid Height for Head SAR
(depth>15cm)

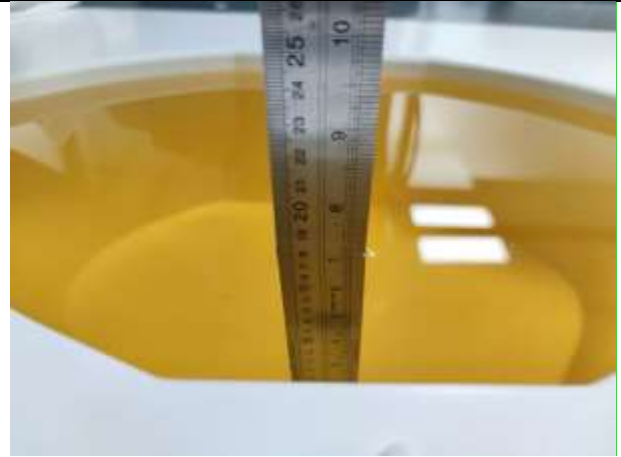


Fig. 9.2 Photo of Liquid Height for Body SAR
(depth>15cm)

The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below recommended by the FCC OET 65 supplement C and RSS 102 Issue 5.

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
150	52.3	0.76
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
915	41.5	0.98
1450	40.5	1.20
1610	40.3	1.29
1800-2000	40.0	1.40
2450	39.2	1.80
3000	38.5	2.40
5800	35.3	5.27

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m

The dielectric parameters of liquids were verified prior to the SAR evaluation using a MVG Liquid measurement Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target(σ)	Permittivity Target(ϵ_r)	Delta (σ)%	Delta (ϵ_r)%	Limit (%)	Date (mm/dd/yy)
750	21.9	0.88	42.58	0.89	41.9	-1.12	1.62	±5	11.18.2021
835	21.9	0.92	41.25	0.90	41.5	2.22	-0.60	±5	11.18.2021
1750	22.6	1.33	40.15	1.37	40.1	-2.92	0.12	±5	11.16.2021
1900	22.6	1.41	39.16	1.40	40.0	0.71	-2.10	±5	11.16.2021
2450	23.4	1.76	38.58	1.80	39.2	-2.22	-1.58	±5	11.26.2021

10 SAR System Verification

Each ComoSAR system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the OpenSAR software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

➤ Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

➤ System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

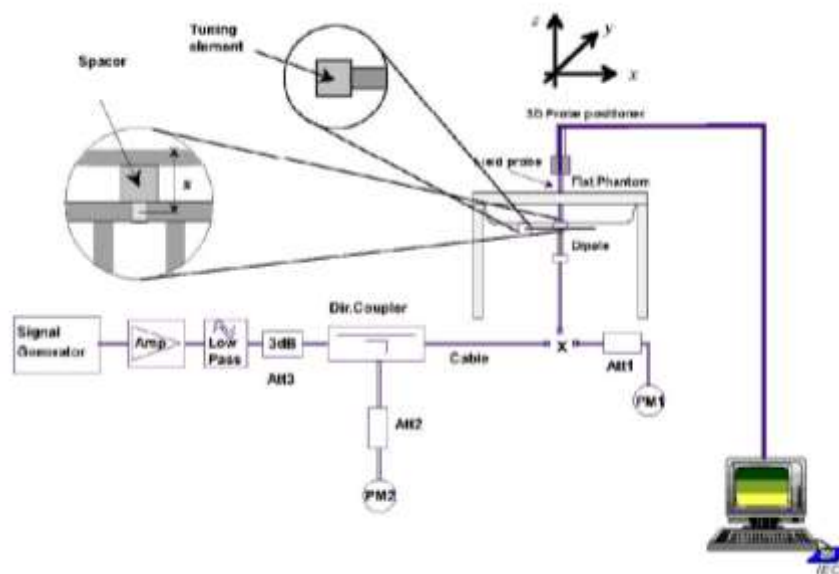


Fig.10.1 System Verification Setup Diagram

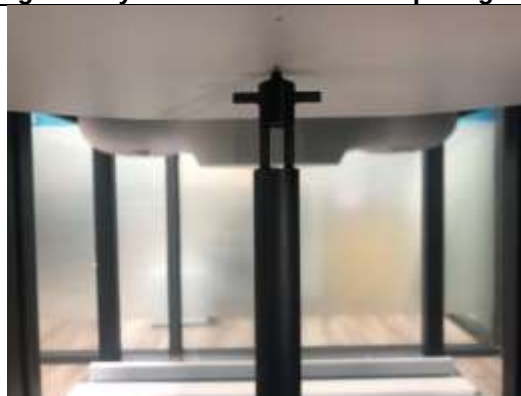


Fig.10.2 Photo of Dipole setup



➤ **System Verification Results**

Comparing to the original SAR value provided by MVG, the verification data should be within its specification of 10%. The table as below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix C of this report.

Date (mm/dd/yy)	Frequency (MHz)	Power fed onto dipole (mW)	Measured 1g SAR (W/kg)	Normalized to 1W 1g SAR (W/kg)	1W Target 1g SAR (W/kg)	Deviation (%)
11.18.2021	750	100	0.884	8.84	8.57	3.15
11.18.2021	835	100	0.984	9.84	9.57	2.82
11.16.2021	1750	100	3.782	37.82	36.50	3.62
11.16.2021	1900	100	4.021	40.21	39.60	1.54
11.26.2021	2450	100	5.311	53.11	52.92	0.36

11 EUT Testing Position

This EUT was tested in four different positions. They are Front/Back/ Left /Top of the EUT with phantom 0 mm gap, as illustrated below, please refer to Appendix B for the test setup photos.

11.1 Limb Configurations

- To position the device parallel to the phantom surface with either keypad up or down.
- To adjust the device parallel to the flat phantom.
- To adjust the distance between the device surface and the flat phantom to 0 mm or holster surface and the flat phantom to 0 mm.

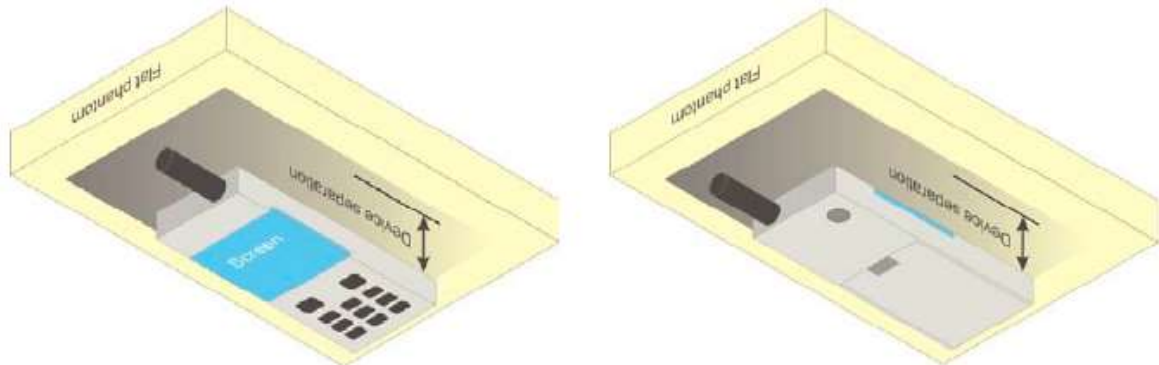


Fig.11.1 Illustration for Limb Position

12 Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- For WWAN power measurement, use base station simulator to configure EUT WWAN transition in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- Read the WWAN RF power level from the base station simulator.
- For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- Connect EUT RF port through RF cable to the power meter or spectrum analyzer, and measure WLAN/BT output power.

<Conducted power measurement>

- Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- Place the EUT in positions as Appendix B demonstrates.
- Set scan area, grid size and other setting on the OpenSAR software.
- Measure SAR results for the highest power channel on each testing position.
- Find out the largest SAR result on these testing positions of each band.
- Measure SAR results for other channels in worst SAR testing position if the Reported SAR or highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power drift measurement

12.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The OpenSAR software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a “cube” measurement. The measured volume must include the 1g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- Extraction of the measured data (grid and values) from the Zoom Scan.
- Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- Generation of a high-resolution mesh within the measured volume.
- Interpolation of all measured values from the measurement grid to the high-resolution grid
- Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- Calculation of the averaged SAR within masses of 1g and 10g.

12.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

12.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

12.4 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remains in the same test position for all measurements and all volume scans use the same spatial resolution and grid spacing. When all volume scans are completed, the software can combine and subsequently superpose these measurement data to calculate the multiband SAR.

12.5 SAR Averaged Methods

In the COMOSAR system, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method, which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1g and 10g cubes, the extrapolation distance should not be larger than 5 mm.

12.6 Power Drift Monitoring

All SAR testing is under the EUT with a full charged battery and transmits maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. If the power drifts more than 5%, the SAR will be retested.

13 Conducted RF Output Power

13.1 WCDMA Conducted Power

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Rohde & Schwarz CMU200 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table 1

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.

Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

HSDPA Sub-test setup configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Rohde & Schwarz CMU200 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table 2

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

HSUPA Sub-test setup configuration

WCDMA Conducted Power:

WCDMA Average power (dBm)			
Band	WCDMA Band V		
Channel	4132	4183	4233
Frequency (MHz)	826.4	836.6	846.6
AMR 12.2 kbps	25.14	25.06	24.73
RMC 12.2 kbps	25.23	25.14	24.81
HSDPA Sub-test 1	21.22	21.42	21.53
HSDPA Sub-test 2	20.80	21.01	21.23
HSDPA Sub-test 3	20.59	20.78	20.85
HSDPA Sub-test 4	20.62	20.89	21.09
HSUPA Sub-test 1	18.92	19.33	19.54
HSUPA Sub-test 2	19.25	19.71	19.74
HSUPA Sub-test 3	18.83	19.75	19.76
HSUPA Sub-test 4	19.08	19.46	19.68
HSUPA Sub-test 5	21.23	21.37	21.43

WCDMA Average power (dBm)			
Band	WCDMA Band II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
AMR 12.2 kbps	24.39	24.21	24.25
RMC 12.2 kbps	24.38	24.21	24.28
HSDPA Sub-test 1	22.99	22.79	22.70
HSDPA Sub-test 2	22.65	22.64	22.76
HSDPA Sub-test 3	22.26	22.25	22.36
HSDPA Sub-test 4	22.26	22.27	22.39
HSUPA Sub-test 1	21.48	21.52	21.98
HSUPA Sub-test 2	21.57	21.74	22.12
HSUPA Sub-test 3	21.08	21.80	22.06
HSUPA Sub-test 4	21.11	21.83	22.10
HSUPA Sub-test 5	22.81	22.84	22.95

Note:

1. Applying the subtest setup in Table C.11.1.3 of 3GPP TS 34.121-1
2. Per KDB 941225 D01, RMC 12.2kbps mode is used to evaluate SAR due the highest output power. If AMR 12.2 kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2 kbps can be excluded.
3. AMR, HSDPA RF power will not be larger than RMC 12.2kbps, detailed information is included in Tune-up Procure exhibit.

13.2 LTE Conducted Power

13.2.1 Largest channel bandwidth standalone SAR test requirements

QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.⁸ When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

QPSK with 50% RB allocation

The procedures required for 1 RB allocation in section 4.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.⁹

QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in sections 4.2.1 and 4.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 4.2.1, 5.2.2 and 4.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

13.2.2 Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 4.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth. For example, 50 RB in 10 MHz channel bandwidth does not apply to 5 MHz channel bandwidth; therefore, this cannot be tested in the smaller channel bandwidth. However, 50% RB allocation in 10 MHz channel bandwidth is equivalent to 100% RB allocation in 5 MHz channel bandwidth; therefore, these are the equivalent configurations to be compared to determine the specific channel and configuration in the smaller channel bandwidth that need SAR testing.

13.3.3 TDD LTE configuration setup for SAR measurement

According to KDB 941225 D05v02r03 and April 2013 TCB workshop slides, SAR must be tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- see 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions and must be taken into consideration to determine the transmission duty factor
 - according to the worst case uplink and downlink cyclic prefix requirements for UpPTS to determine the highest SAR test duty factor

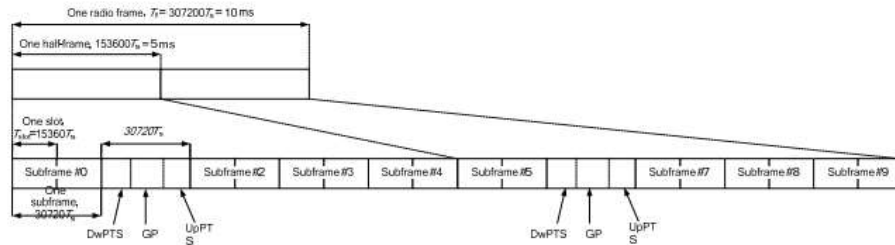


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity)

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Per 3GPP 36.211 section 4.2, each radio frame of length $T_F=37200 \cdot T_s = 10$ ms consists of two half-frames of length $153600 \cdot T_s = 5$ ms each. Each half-frame consists of five subframes of length $30720 \cdot T_s = 1$ ms. So, the uplink duty factor in special subframe as below:

Special Subframe configuration	Normal cyclic prefix in downlink		Extended cyclic prefix in downlink	
	Duty factor of Uplink		Duty factor of Uplink	
	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	7.14%	8.33%	7.14%	8.33%
1	7.14%	8.33%	7.14%	8.33%
2	7.14%	8.33%	7.14%	8.33%
3	7.14%	8.33%	7.14%	8.33%
4	7.14%	8.33%	14.27%	16.67%
5	14.27%	16.67%	14.27%	16.67%
6	14.27%	16.67%	14.27%	16.67%
7	14.27%	16.67%	14.27%	16.67%
8	14.27%	16.67%	/	/
9	14.27%	16.67%	/	/

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

According to above table:

1. The highest duty factor is configuration 0;
2. The duty factor of uplink in one half-frame with normal cyclic prefix is: $(3\text{ms} + 0.143\text{ms})/5\text{ms}=62.86\%$;
3. The duty factor of uplink in one half-frame with extended cyclic prefix is: $(3\text{ms} + 0.167\text{ms})/5\text{ms}=63.34\%$;
4. For purpose to get the worst case SAR test duty factor, the duty factor of normal cyclic prefix in uplink scaled-up to the extended cyclic prefix in uplink, the scaling factor is $63.34\%/62.86\%=1.008$, and the scaling factor will be taken into the final measured SAR.

LTE Band 2 part

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18607	18900	19193
					1850.7MHz	1880.0MHz	1909.3MHz
Band 2	1.4	QPSK	1	0	22.47	22.44	22.32
			1	2	22.37	22.36	22.27
			1	5	22.41	22.35	22.24
			3	0	22.48	22.39	22.34
			3	1	22.40	22.36	22.33
			3	2	22.41	22.34	22.32
			6	0	21.46	21.35	21.31
		16QAM	1	0	21.26	21.28	21.14
			1	2	22.16	21.36	21.17
			1	5	22.16	21.47	20.92
			3	0	21.21	21.41	21.03
			3	1	21.20	21.43	21.04
			3	2	21.17	21.41	21.33
			6	0	20.67	20.46	20.49

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18615	18900	19185
					1851.5MHz	1880.0MHz	1908.5MHz
Band 2	3	QPSK	1	0	22.46	22.33	22.39
			1	7	22.46	22.25	22.31
			1	14	22.43	22.28	22.38
			8	0	21.46	21.32	21.48
			8	4	21.48	21.32	21.30
			8	7	21.64	21.40	21.28
			15	0	21.46	21.37	21.42
		16QAM	1	0	21.32	21.07	21.25
			1	7	21.37	21.00	21.22
			1	14	21.36	21.03	21.23
			8	0	20.65	20.55	20.44
			8	4	20.66	20.57	20.43
			8	7	20.75	20.54	20.46
			15	0	20.62	20.34	20.44

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18625	18900	19175
					1852.5MHz	1880.0MHz	1907.5MHz
Band 2	5	QPSK	1	0	22.39	22.28	22.47
			1	12	22.38	22.23	22.47
			1	24	22.41	22.25	22.47
			12	0	21.48	21.50	21.45
			12	6	21.49	21.50	21.49
			12	11	21.56	21.50	21.40
			25	0	21.57	21.56	21.38
		16QAM	1	0	20.88	21.57	21.15
			1	12	20.90	21.59	21.05
			1	24	20.92	21.52	21.23
			12	0	20.54	20.52	20.42
			12	6	20.55	20.52	20.43
			12	11	20.57	20.54	20.43
			25	0	20.70	20.52	20.45

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18650	18900	19150
					1855.0MHz	1880.0MHz	1905.0MHz
Band 2	10	QPSK	1	0	22.48	22.33	22.35
			1	24	22.49	22.25	22.42
			1	49	22.53	22.22	22.37
			25	0	21.52	21.51	21.39
			25	12	21.60	21.38	21.52
			25	24	21.61	21.48	21.54
			50	0	21.46	21.44	21.35
		16QAM	1	0	21.55	21.31	21.93
			1	24	21.46	21.38	21.86
			1	49	21.56	21.27	21.92
			25	0	20.56	20.57	20.52
			25	12	20.57	20.57	20.54
			25	24	20.57	20.57	20.54
			50	0	20.56	20.50	20.47

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18675	18900	19125
					1857.5MHz	1880.0MHz	1902.5MHz
Band 2	15	QPSK	1	0	22.46	22.42	22.39
			1	37	22.47	22.20	22.45
			1	74	22.50	22.29	22.42
			36	0	21.59	21.50	21.47
			36	16	21.61	21.48	21.44
			36	35	21.61	21.40	21.46
			75	0	21.63	21.34	21.47
		16QAM	1	0	21.56	21.63	21.91
			1	37	21.49	21.56	21.95
			1	74	21.51	21.50	21.95
			36	0	20.57	20.58	20.44
			36	16	20.55	20.58	20.47
			36	35	20.58	20.59	20.49
			75	0	20.62	20.51	20.53

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18700	18900	19100
					1860.0MHz	1880.0MHz	1900.0MHz
Band 2	20	QPSK	1	0	22.62	22.46	22.44
			1	49	22.63	22.47	22.52
			1	99	22.65	22.47	22.47
			50	0	21.50	21.45	21.55
			50	24	21.52	21.44	21.39
			50	49	21.52	21.48	21.52
			100	0	21.44	21.38	21.56
		16QAM	1	0	21.24	21.79	21.25
			1	49	21.34	21.73	21.35
			1	99	21.34	21.73	21.35
			50	0	20.64	20.49	20.65
			50	24	20.64	20.52	20.56
			50	49	20.65	20.52	20.59
			100	0	20.69	20.43	20.54

LTE Band 4 part

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					19957	20175	20393
					1710.7MHz	1732.5MHz	1754.3MHz
Band 4	1.4	QPSK	1	0	22.69	22.94	22.79
			1	2	22.70	22.91	22.83
			1	5	22.64	22.91	22.79
			3	0	22.79	22.89	22.81
			3	1	22.78	22.98	22.81
			3	2	22.79	22.94	22.81
			6	0	21.76	21.92	21.78
		16QAM	1	0	21.94	22.24	21.99
			1	2	21.87	22.37	22.06
			1	5	21.91	22.24	22.02
			3	0	21.47	21.47	21.51
			3	1	21.46	21.48	21.50
			3	2	21.46	21.51	21.50
			6	0	20.85	21.04	20.98

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					19965	20175	20385
					1711.5MHz	1732.5MHz	1753.5MHz
Band 4	3	QPSK	1	0	22.51	22.73	22.93
			1	7	22.55	22.63	22.90
			1	14	22.57	22.67	22.96
			8	0	21.74	21.81	21.81
			8	4	21.72	21.69	21.84
			8	7	21.69	21.83	21.89
			15	0	21.71	21.68	21.78
		16QAM	1	0	21.46	21.60	22.03
			1	7	21.47	21.59	22.05
			1	14	21.72	21.55	22.01
			8	0	20.90	20.92	21.08
			8	4	20.98	20.92	21.07
			8	7	20.94	20.90	21.07
			15	0	20.78	20.88	20.87

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					19975	20175	20375
					1712.5MHz	1732.5MHz	1752.5MHz
Band 4	5	QPSK	1	0	22.65	22.64	23.10
			1	12	22.61	22.71	23.11
			1	24	22.64	22.72	23.07
			12	0	21.72	21.88	21.97
			12	6	21.72	21.90	21.99
			12	11	21.72	21.79	21.98
			25	0	21.70	21.79	21.96
		16QAM	1	0	21.07	21.90	21.54
			1	12	21.12	21.92	21.58
			1	24	21.11	21.96	21.66
			12	0	20.82	20.94	20.92
			12	6	20.82	20.95	20.95
			12	11	20.81	20.95	20.92
			25	0	20.94	20.90	20.95

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20000	20175	20350
					1715.0MHz	1732.5MHz	1750.0MHz
Band 4	10	QPSK	1	0	22.55	22.65	22.93
			1	24	22.57	22.66	22.87
			1	49	22.66	22.77	22.90
			25	0	21.70	21.76	21.96
			25	12	21.79	21.78	21.99
			25	24	21.79	21.78	21.93
			50	0	21.74	21.85	21.83
		16QAM	1	0	21.74	21.69	22.61
			1	24	21.79	21.73	22.58
			1	49	21.74	21.77	22.63
			25	0	20.69	20.91	20.98
			25	12	20.69	20.92	21.00
			25	24	20.70	20.92	21.00
			50	0	20.82	20.88	21.00

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20025	20175	20325
					1717.5MHz	1732.5MHz	1747.5MHz
Band 4	15	QPSK	1	0	22.60	22.57	22.79
			1	37	22.59	22.60	22.87
			1	74	22.67	22.62	22.81
			36	0	21.85	21.82	21.93
			36	16	21.73	21.83	21.97
			36	35	21.67	21.73	21.90
			75	0	21.71	21.82	22.03
		16QAM	1	0	21.75	21.89	22.55
			1	37	21.75	21.89	22.66
			1	74	21.81	22.00	22.59
			36	0	20.70	20.90	20.84
			36	16	20.70	20.92	20.85
			36	35	20.70	20.92	20.86
			75	0	20.74	20.88	21.00

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20050	20175	20300
					1720.0MHz	1732.5MHz	1745.0MHz
Band 4	20	QPSK	1	0	22.84	22.87	22.81
			1	49	22.84	22.84	22.95
			1	99	22.92	22.94	22.95
			50	0	21.68	21.83	21.85
			50	24	21.66	21.79	21.78
			50	49	21.69	21.65	21.79
			100	0	21.70	21.78	21.91
		16QAM	1	0	21.73	21.98	21.42
			1	49	21.80	21.98	21.47
			1	99	21.98	22.19	21.43
			50	0	20.88	20.79	20.84
			50	24	20.85	20.80	20.78
			50	49	20.96	20.90	20.74
			100	0	20.85	21.01	20.78

LTE Band 5 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20407	20525	20643
					824.7MHz	836.5MHz	848.3MHz
Band 5	1.4	QPSK	1	0	22.98	23.04	22.79
			1	2	22.92	23.01	22.90
			1	5	23.04	23.02	22.99
			3	0	22.96	22.95	22.85
			3	1	22.98	23.02	22.86
			3	2	23.05	22.98	22.86
			6	0	21.89	21.90	22.02
		16QAM	1	0	22.00	22.32	21.99
			1	2	21.93	22.31	22.11
			1	5	22.00	22.32	22.14
			3	0	21.93	21.65	21.52
			3	1	22.00	21.59	21.53
			3	2	22.00	21.63	21.58
			6	0	21.06	21.00	21.28

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20415	20525	20635
					825.5MHz	836.5MHz	847.5MHz
Band 5	3	QPSK	1	0	22.93	23.06	22.84
			1	7	22.94	23.10	22.88
			1	14	22.94	23.07	23.00
			8	0	21.99	22.05	21.94
			8	4	22.02	21.87	21.89
			8	7	22.11	21.94	22.02
			15	0	22.01	22.00	21.89
		16QAM	1	0	21.66	21.60	22.09
			1	7	21.68	21.67	22.04
			1	14	21.69	21.69	22.27
			8	0	21.15	21.16	21.05
			8	4	21.09	21.17	21.04
			8	7	21.19	20.99	21.18
			15	0	20.97	20.81	20.99

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20425	20525	20625
					826.5MHz	836.5MHz	846.5MHz
Band 5	5	QPSK	1	0	22.93	22.88	23.03
			1	12	22.93	22.92	23.07
			1	24	23.02	22.95	23.19
			12	0	22.12	22.03	22.07
			12	6	21.99	22.03	21.95
			12	11	22.13	22.03	21.96
			25	0	22.05	21.96	21.91
		16QAM	1	0	21.52	22.13	21.72
			1	12	21.41	22.18	21.61
			1	24	21.29	22.16	21.80
			12	0	21.03	21.26	20.93
			12	6	21.04	21.24	20.94
			12	11	21.04	21.26	20.94
			25	0	21.11	21.03	21.04

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20450	20525	20600
					829MHz	836.5MHz	844MHz
Band 5	10	QPSK	1	0	23.04	22.76	23.06
			1	24	23.01	22.97	23.07
			1	49	23.02	22.96	23.12
			25	0	22.05	22.00	22.09
			25	12	22.09	21.99	21.93
			25	24	22.09	21.99	22.02
			50	0	22.12	21.94	22.18
		16QAM	1	0	22.03	21.83	22.45
			1	24	21.89	21.99	22.58
			1	49	22.02	21.84	22.60
			25	0	21.09	21.22	21.15
			25	12	21.05	21.22	21.16
			25	24	21.02	21.23	21.17
			50	0	21.06	21.05	21.08

LTE Band 12 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23017	23095	23175
					699.7MHz	707.5MHz	715.3MHz
Band 12	1.4	QPSK	1	0	23.01	22.82	22.63
			1	2	23.00	22.96	22.65
			1	5	22.99	22.85	22.70
			3	0	22.91	22.82	22.67
			3	1	22.99	22.86	22.67
			3	2	22.90	22.82	22.63
			6	0	21.76	21.86	21.51
		16QAM	1	0	21.63	22.29	21.89
			1	2	21.60	22.26	21.72
			1	5	21.66	22.25	21.78
			3	0	21.40	21.45	21.34
			3	1	21.41	21.44	21.37
			3	2	21.35	21.46	21.30
			6	0	20.81	21.21	21.00

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23025	23095	23165
					700.5MHz	707.5MHz	714.5MHz
Band 12	3	QPSK	1	0	22.73	22.96	22.77
			1	7	22.76	23.03	22.82
			1	14	22.90	22.90	22.81
			8	0	21.73	21.77	21.54
			8	4	21.88	21.67	21.53
			8	7	21.87	21.58	21.62
			15	0	21.72	21.76	21.60
		16QAM	1	0	21.46	21.74	22.06
			1	7	21.39	21.61	22.10
			1	14	21.43	21.49	22.18
			8	0	20.56	20.87	21.22
			8	4	20.73	20.69	21.23
			8	7	20.72	21.25	20.83
			15	0	20.74	21.06	21.11

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23035	23095	23155
					701.5MHz	707.5MHz	713.5MHz
Band 12	5	QPSK	1	0	22.83	22.35	22.89
			1	12	22.90	22.52	23.01
			1	24	22.90	22.68	23.01
			12	0	21.86	22.01	22.00
			12	6	22.00	21.71	21.94
			12	11	22.01	21.77	21.88
			25	0	21.86	21.62	21.69
		16QAM	1	0	21.18	22.00	21.55
			1	12	21.27	21.66	21.36
			1	24	21.23	21.66	21.47
			12	0	20.85	20.50	20.78
			12	6	20.86	20.56	20.78
			12	11	20.85	20.59	20.79
			25	0	20.92	21.10	21.08

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23060	23095	23130
					704MHz	707.5MHz	711MHz
Band 12	10	QPSK	1	0	22.59	22.83	22.74
			1	24	22.64	22.75	22.48
			1	49	22.56	22.79	22.85
			25	0	21.79	21.90	21.70
			25	12	21.80	21.77	21.58
			25	24	21.70	21.92	21.76
			50	0	21.84	21.78	21.59
		16QAM	1	0	21.40	21.62	22.33
			1	24	21.42	21.45	22.21
			1	49	21.42	21.56	22.20
			25	0	20.72	20.66	21.13
			25	12	20.59	20.87	21.14
			25	24	20.44	20.87	21.15
			50	0	20.89	21.25	21.08

LTE Band 13 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23205	23230	23255
					779.50MHz	782.00MHz	784.50MHz
Band 13	5	QPSK	1	0	22.82	23.01	23.05
			1	12	22.98	22.94	22.91
			1	24	23.02	22.90	22.95
			12	0	22.02	22.08	22.12
			12	6	21.95	22.10	22.00
			12	11	21.98	22.11	21.84
			25	0	22.07	22.04	21.84
		16QAM	1	0	21.25	21.34	22.15
			1	12	21.41	21.42	22.17
			1	24	21.31	21.21	22.12
			12	0	21.27	21.03	21.12
			12	6	21.25	21.03	21.18
			12	11	21.24	21.03	21.10
			25	0	21.03	21.14	21.13

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					/	23230	/
					/	782.00MHz	/
Band 13	10	QPSK	1	0	/	22.96	/
			1	24	/	23.00	/
			1	49	/	22.88	/
			25	0	/	22.02	/
			25	12	/	22.04	/
			25	24	/	22.04	/
			50	0	/	22.09	/
		16QAM	1	0	/	21.67	/
			1	24	/	21.86	/
			1	49	/	21.83	/
			25	0	/	21.00	/
			25	12	/	21.01	/
			25	24	/	21.01	/
			50	0	/	21.05	/

LTE Band 17 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23755	23790	23825
					706.5MHz	710.0MHz	713.5MHz
Band 17	5	QPSK	1	0	22.80	22.58	22.95
			1	12	22.77	22.38	22.97
			1	24	22.82	22.53	23.10
			12	0	21.88	21.62	21.93
			12	6	21.83	21.60	21.86
			12	11	21.66	21.55	21.99
			25	0	21.87	21.58	21.80
		16QAM	1	0	21.10	21.70	21.65
			1	12	21.22	21.76	21.39
			1	24	21.19	21.71	21.45
			12	0	20.52	21.12	20.74
			12	6	20.74	21.11	20.75
			12	11	20.53	21.19	20.76
			25	0	20.64	21.09	21.06

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23780	23790	23800
					709.0MHz	710.0MHz	711.0MHz
Band 17	10	QPSK	1	0	22.73	22.62	22.52
			1	24	22.69	22.62	22.60
			1	49	22.65	22.73	22.83
			25	0	21.88	21.58	21.52
			25	12	21.81	21.74	21.50
			25	24	21.89	21.67	21.62
			50	0	21.77	21.69	21.62
		16QAM	1	0	21.26	21.50	21.99
			1	24	21.17	21.44	22.16
			1	49	21.16	21.32	21.86
			25	0	20.27	21.34	21.18
			25	12	20.74	21.37	21.21
			25	24	20.43	21.30	21.12
			50	0	21.17	21.14	21.13

13.3 WLAN 2.4GHz Band Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	802.11 b	802.11 g	802.11n (HT20)
CH 01	2412	16.83	17.33	17.35
CH 06	2437	16.93	17.43	17.43
CH 11	2462	16.80	17.58	10.16

Average Power (dBm)		
Channel	Frequency (MHz)	802.11n (HT40)
CH 03	2422	17.51
CH 06	2437	17.07
CH 09	2452	10.91

Note:

1. Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
2. Per KDB 248227 D01v02r02, In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements.SAR is not required for the following 2.4 GHz OFDM conditions:
 - 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
 - 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 3 W/kg.
3. The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
4. Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 99.08%, so the duty cycle factor is 1.01.

13.4 WLAN 5.2GHz Band Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	802.11 a	802.11 ac20	802.11 n20
CH 36	5180	8.23	8.49	8.54
CH 40	5200	5.31	5.56	5.57
CH 48	5240	6.29	6.24	6.22

Average Power (dBm)			
Channel	Frequency (MHz)	802.11 ac40	802.11 n40
CH 38	5190	7.32	7.26
CH 46	5230	6.49	6.61

Average Power (dBm)		
Channel	Frequency (MHz)	802.11 ac80
CH 42	5210	6.22

Note:

5. The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.

13.5 WLAN 5.8GHz Band Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	802.11 a	802.11 ac20	802.11 n20
CH 149	5745	8.93	8.72	8.86
CH 157	5785	8.44	8.29	8.30
CH 165	5825	8.06	7.96	7.98

Average Power (dBm)			
Channel	Frequency (MHz)	802.11 ac40	802.11 n40
CH 151	5755	9.00	9.05
CH 159	5795	8.57	8.73

Average Power (dBm)		
Channel	Frequency (MHz)	802.11 ac80
CH 155	5775	8.60

Note:

- The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.

13.6 Bluetooth Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	GFSK	$\pi/4$ -DQPSK	8DPSK
CH 00	2402	9.09	8.68	9.10
CH 39	2441	6.50	6.08	6.54
CH 78	2480	5.70	5.32	5.81

Average Power (dBm)					
Channel	Frequency (MHz)	BLE 1M	BLE 2M	BLE S=2	BLE S=8
CH 00	2402	5.82	5.58	5.79	5.62
CH 20	2442	2.69	2.44	2.66	2.48
CH 39	2480	1.77	1.55	1.73	1.58

Note:

- The output power of all data rate were pre-scan, just the worst case of all mode were shown in report.

14 Exposure Positions Consideration

14.1 EUT Antenna Locations

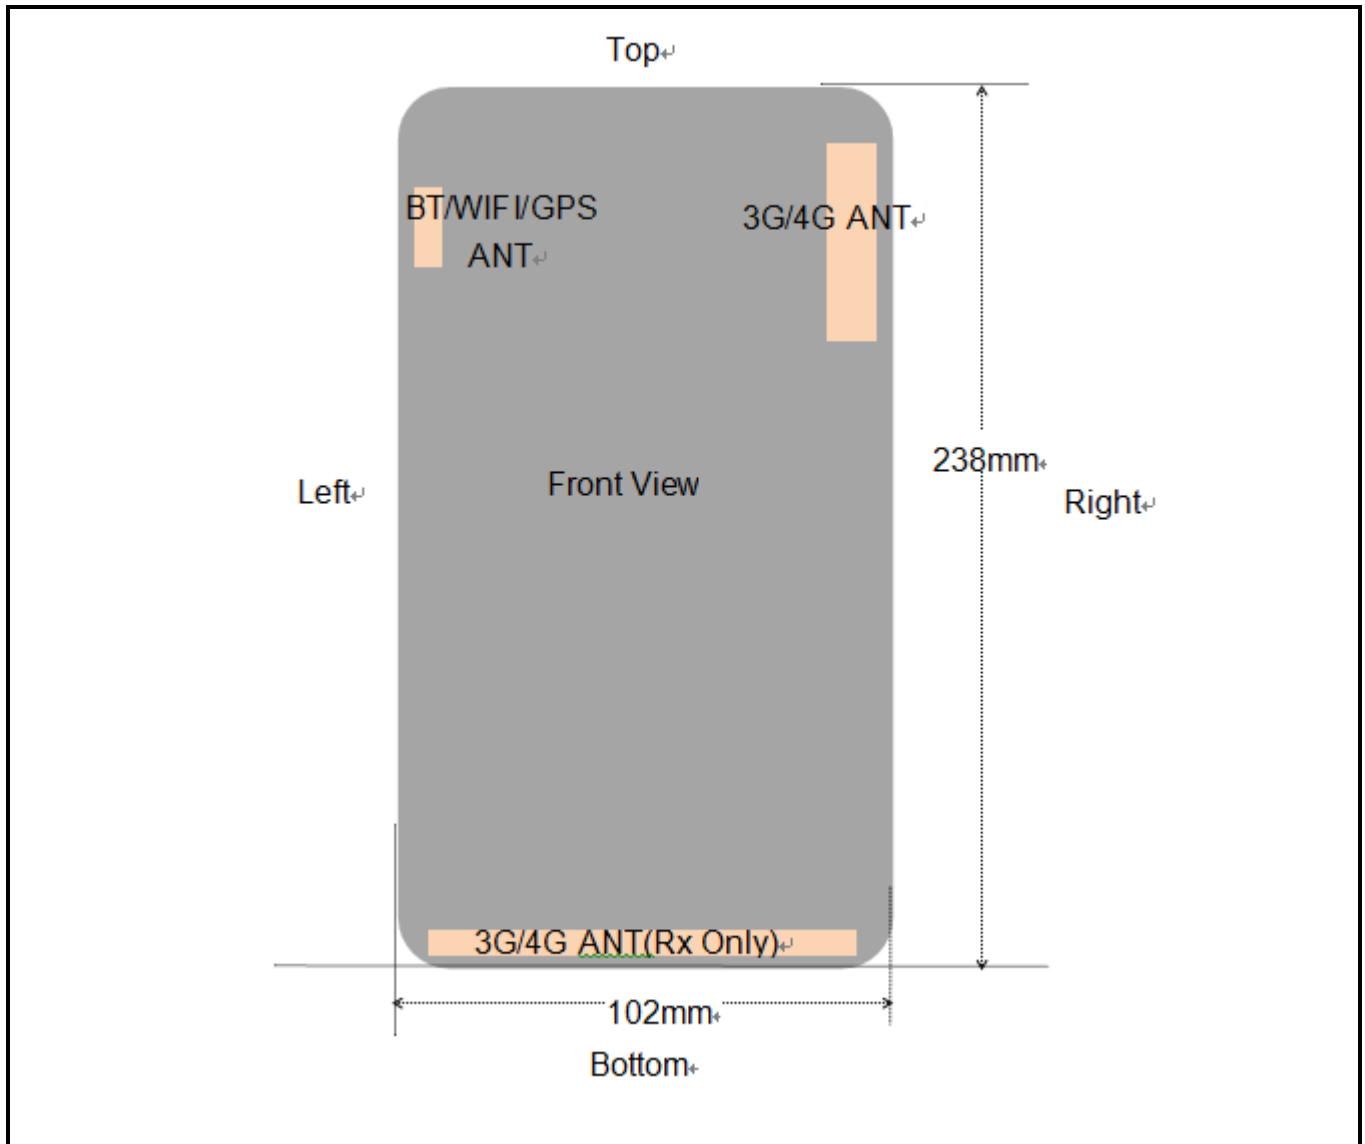


Fig.14.1 EUT Antenna Locations

Note: This antenna diagram is only used as a reference for the distance from the antenna to each edge. For the specific shape of the antenna, please refer to the physical photo.

14.2 Test Positions Consideration

SAR exclusion calculations for antenna < 50mm from the user															
Antennas	Freq. (MHz)	Max. tune-up Power		Distance of Antennas to EUT edge/surface (mm)						Calculated Threshold Value (≤ 7.5 SAR is not required)					
		dBm	mW	Front	Back	Left	Right	Top	Bot.	Front	Back	Left	Right	Top	Bot.
WCDMA 850	826.4	25.0	316.2	10	15	90	5	19	152	28.8	19.2	>50mm	57.6	15.1	>50mm
WCDMA 1900	1860	25.5	354.8	10	15	90	5	19	152	48.3	32.2	>50mm	96.5	25.4	>50mm
LTE Band 2	1860	23.0	199.5	10	15	90	5	19	152	27.1	18.1	>50mm	54.3	14.3	>50mm
LTE Band 4	1745	23.5	223.9	10	15	90	5	19	152	29.6	19.7	>50mm	59.1	15.6	>50mm
LTE Band 5	844	23.5	223.9	10	15	90	5	19	152	20.6	13.7	>50mm	41.2	10.8	>50mm
LTE Band 12	711	22.5	177.8	10	15	90	5	19	152	14.9	10.0	>50mm	29.9	7.9	>50mm
LTE Band 13	782	23.5	223.9	10	15	90	5	19	152	19.7	13.1	>50mm	39.4	10.4	>50mm
2.4G WIFI	2437	17.5	56.2	10	45	5	90	19	150	8.8	1.9	17.5	>50mm	4.6	>50mm
5.2G WIFI	5180	9.0	7.9	10	45	5	90	19	150	1.8	0.4	3.6	>50mm	1.0	>50mm
5.8G WIFI	5745	9.5	8.9	10	45	5	90	19	150	2.1	0.5	4.3	>50mm	1.1	>50mm
Bluetooth	2402	9.5	8.9	10	45	5	90	19	150	1.4	0.3	2.8	>50mm	0.7	>50mm

SAR exclusion calculations for antenna > 50mm from the user															
Antennas	Freq. (MHz)	Max. tune-up Power		Distance of Antennas to EUT edge/surface (mm)						Calculated Threshold Value (SAR test exclusion power, mW)					
		dBm	mW	Front	Back	Left	Right	Top	Bot.	Front	Back	Left	Right	Top	Bot.
WCDMA 850	826.4	25.0	316.2	10	15	90	5	19	152	/	/	385.2	/	/	726.8
WCDMA1900	1860	25.5	354.8	10	15	90	5	19	152	/	/	510.3	/	/	1130.3
LTE Band 2	1860	23.0	199.5	10	15	90	5	19	152	/	/	510.3	/	/	1130.3
LTE Band 4	1745	23.5	223.9	10	15	90	5	19	152	/	/	513.6	/	/	1133.6
LTE Band 5	844	23.5	223.9	10	15	90	5	19	152	/	/	388.1	/	/	737.0
LTE Band 12	711	22.5	177.8	10	15	90	5	19	152	/	/	368.2	/	/	662.1
LTE Band 13	782	23.5	223.9	10	15	90	5	19	152	/	/	379.0	/	/	702.2
2.4G WIFI	2437	17.5	56.2	10	45	5	90	19	150	/	/	/	496.2	/	1096.2
5.2G WIFI	5180	9.0	7.9	10	45	5	90	19	150	/	/	/	465.8	/	1065.8
5.8G WIFI	5745	9.5	8.9	10	45	5	90	19	150	/	/	/	462.5	/	1062.5
Bluetooth	2402	9.5	8.9	10	45	5	90	19	150	/	/	/	496.8	/	1096.8

Test Positions						
Antennas	Front	Back	Left	Right	Top	Bottom
WCDMA 850	Yes	Yes	No	Yes	Yes	No
WCDMA1900	Yes	Yes	No	Yes	Yes	No
LTE Band 2	Yes	Yes	No	Yes	Yes	No
LTE Band 4	Yes	Yes	No	Yes	Yes	No
LTE Band 5	Yes	Yes	No	Yes	Yes	No
LTE Band 12	Yes	Yes	No	Yes	Yes	No
LTE Band 13	Yes	Yes	No	Yes	Yes	No
2.4G WIFI	Yes	No	Yes	No	No	No
5.2G WIFI	No	No	No	No	No	No
5.8G WIFI	No	No	No	No	No	No
Bluetooth	No	No	No	No	No	No

Note:

1. Limb (hands) SAR mode SAR assessments is required.
2. Per KDB 447498 D01v06, for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user, which is 0 mm for Limb SAR.

15 SAR Test Results Summary

15.1 Limb SAR Data

➤ WCDMA Limb SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
	Band V/RMC	Front	4132	826.4	24.38	1.77	25.0	0.521	1.153	0.601
	Band V/RMC	Back	4132	826.4	24.38	-1.60	25.0	0.065	1.153	0.075
1	Band V/RMC	Right	4132	826.4	24.38	-1.70	25.0	0.612	1.153	0.706
	Band V/RMC	Top	4132	826.4	24.38	-0.45	25.0	0.340	1.153	0.392
	Band II/RMC	Front	9262	1860.0	25.23	-1.29	25.5	0.843	1.064	0.897
	Band II/RMC	Back	9262	1860.0	25.23	0.51	25.5	0.135	1.064	0.144
2	Band II/RMC	Right	9262	1860.0	25.23	2.90	25.5	1.244	1.064	1.324
	Band II/RMC	Top	9262	1860.0	25.23	-0.78	25.5	0.352	1.064	0.375
ANSI / IEEE C95.1 – SAFETY LIMIT					4.0 W/kg (mW/g)					
Spatial Peak					Averaged over 10g					
Uncontrolled Exposure/General Population										

➤ FDD-LTE Band 2(20MHz) QPSK Limb SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
	Band2/1RB#99	Front	18700	1860.0	22.65	-1.25	23.0	0.705	1.084	0.764
	Band2/1RB#99	Back	18700	1860.0	22.65	-0.40	23.0	0.121	1.084	0.131
3	Band2/1RB#99	Right	18700	1860.0	22.65	-3.27	23.0	1.425	1.084	1.545
	Band2/1RB#99	Top	18700	1860.0	22.65	0.30	23.0	0.432	1.084	0.468
	Band2/50%RB#0	Front	19100	1900.0	21.55	-0.89	22.0	0.621	1.109	0.689
	Band2/50%RB#0	Back	19100	1900.0	21.55	1.33	22.0	0.101	1.109	0.112
	Band2/50%RB#0	Right	19100	1900.0	21.55	0.39	22.0	1.338	1.109	1.484
	Band2/50%RB#0	Top	19100	1900.0	21.55	-0.92	22.0	0.351	1.109	0.389
ANSI / IEEE C95.1 – SAFETY LIMIT					4.0 W/kg (mW/g)					
Spatial Peak					Averaged over 10g					
Uncontrolled Exposure/General Population										

➤ FDD-LTE Band 4(20MHz) QPSK Limb SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
	Band4/1RB#99	Front	20300	1745.0	22.95	1.41	23.5	1.100	1.135	1.249
	Band4/1RB#99	Back	20300	1745.0	22.95	-1.93	23.5	0.226	1.135	0.257
4	Band4/1RB#99	Right	20300	1745.0	22.95	-3.21	23.5	2.394	1.135	2.717
	Band4/1RB#99	Right	20300	1745.0	22.95	3.05	23.5	2.341	1.135	2.657
	Band4/1RB#99	Top	20300	1745.0	22.95	0.01	23.5	0.584	1.135	0.663
	Band4/1RB#99	Right	20050	1720.0	22.92	2.61	23.5	2.136	1.143	2.441
	Band4/1RB#99	Right	20175	1732.5	22.94	-0.46	23.5	2.287	1.138	2.603
	Band4/50%RB#0	Front	20300	1745.0	21.85	0.28	22.0	0.896	1.035	0.927
	Band4/50%RB#0	Back	20300	1745.0	21.85	-1.09	22.0	0.189	1.035	0.196
	Band4/50%RB#0	Right	20300	1745.0	21.85	1.66	22.0	1.846	1.035	1.911
	Band4/50%RB#0	Top	20300	1745.0	21.85	1.90	22.0	0.505	1.035	0.523
	Band4/100%RB#0	Front	20300	1745.0	21.91	1.85	22.0	0.821	1.021	0.838
	Band4/100%RB#0	Back	20300	1745.0	21.91	-1.98	22.0	0.156	1.021	0.159
	Band4/100%RB#0	Right	20300	1745.0	21.91	0.66	22.0	1.771	1.021	1.808
	Band4/100%RB#0	Top	20300	1745.0	21.91	-0.31	22.0	0.482	1.021	0.492
ANSI / IEEE C95.1 – SAFETY LIMIT					4.0 W/kg (mW/g)					
Spatial Peak					Averaged over 10g					
Uncontrolled Exposure/General Population										

➤ FDD-LTE Band 5(10MHz) QPSK Limb SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
	Band5/1RB#49	Front	20600	844.0	23.12	1.26	23.5	1.654	1.091	1.805
	Band5/1RB#49	Back	20600	844.0	23.12	-0.72	23.5	0.123	1.091	0.134
5	Band5/1RB#49	Right	20600	844.0	23.12	0.75	23.5	2.028	1.091	2.213
	Band5/1RB#49	Right	20600	844.0	23.12	-0.99	23.5	1.951	1.091	2.129
	Band5/1RB#49	Top	20600	844.0	23.12	-1.39	23.5	0.462	1.091	0.504
	Band5/1RB#49	Right	20450	829.0	23.04	1.22	23.5	1.942	1.112	2.160
	Band5/1RB#49	Right	20525	836.5	22.97	1.42	23.5	1.888	1.130	2.133
	Band5/50%RB#0	Front	20600	844.0	22.09	1.77	22.5	1.438	1.099	1.580
	Band5/50%RB#0	Back	20600	844.0	22.09	0.45	22.5	0.085	1.099	0.093
	Band5/50%RB#0	Right	20600	844.0	22.09	-1.32	22.5	1.774	1.099	1.950
	Band5/50%RB#0	Top	20600	844.0	22.09	0.94	22.5	0.401	1.099	0.441
	Band5/100%RB#0	Front	20600	844.0	22.18	-1.49	22.5	1.384	1.076	1.489
	Band5/100%RB#0	Back	20600	844.0	22.18	-0.75	22.5	0.064	1.076	0.069
	Band5/100%RB#0	Right	20600	844.0	22.18	1.62	22.5	1.624	1.076	1.747
	Band5/100%RB#0	Top	20600	844.0	22.18	0.77	22.5	0.382	1.076	0.411
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					4.0 W/kg (mW/g) Averaged over 10g					

➤ FDD-LTE Band 12(10MHz) QPSK Limb SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
	Band12/1RB#49	Front	23130	711.0	22.85	-0.35	23.5	0.613	1.161	0.712
	Band12/1RB#49	Back	23130	711.0	22.85	0.89	23.5	0.151	1.161	0.175
6	Band12/1RB#49	Right	23130	711.0	22.85	-1.70	23.5	1.135	1.161	1.318
	Band12/1RB#49	Top	23130	711.0	22.85	0.07	23.5	0.332	1.161	0.385
	Band12/50%RB#24	Front	23095	707.5	21.92	0.15	22.5	0.543	1.143	0.621
	Band12/50%RB#24	Back	23095	707.5	21.92	-0.07	22.5	0.105	1.143	0.120
	Band12/50%RB#24	Right	23095	707.5	21.92	-0.10	22.5	0.946	1.143	1.081
	Band12/50%RB#24	Top	23095	707.5	21.92	-1.42	22.5	0.305	1.143	0.349
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					4.0 W/kg (mW/g) Averaged over 10g					

➤ FDD-LTE Band 13(10MHz) QPSK Limb SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
	Band13/1RB#24	Front	23230	782.0	23.00	-0.77	23.5	1.121	1.122	1.258
	Band13/1RB#24	Back	23230	782.0	23.00	0.09	23.5	0.164	1.122	0.184
7	Band13/1RB#24	Right	23230	782.0	23.00	0.26	23.5	1.678	1.122	1.883
	Band13/1RB#24	Top	23230	782.0	23.00	-1.86	23.5	0.523	1.122	0.587
	Band13/50%RB#12	Front	23230	782.0	22.04	0.74	22.5	0.944	1.112	1.050
	Band13/50%RB#12	Back	23230	782.0	22.04	0.05	22.5	0.125	1.112	0.139
	Band13/50%RB#12	Right	23230	782.0	22.04	-0.79	22.5	1.432	1.112	1.592
	Band13/50%RB#12	Top	23230	782.0	22.04	1.77	22.5	0.426	1.112	0.474
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					4.0 W/kg (mW/g) Averaged over 10g					

➤ WLAN 2.4GHz Limb SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{10g} (W/kg)
	2.4GHz/802.11b	Front	6	2437.0	16.93	0.13	17.5	0.156	1.140	1.01	0.180
8	2.4GHz/802.11b	Left	6	2437.0	16.93	-2.00	17.5	0.370	1.140	1.01	0.426
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					4.0 W/kg (mW/g) Averaged over 10g						

Note:

- Limb SAR testing was performed at 0mm separation.
- Per KDB 447498 D01v06, for each exposure position, if the highest output channel Reported SAR ≤ 2.0W/kg, other channels SAR testing is not necessary.
- Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are ≤ 2.0 W/kg. Otherwise, SAR is measured for the highest output power channel.
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 2.0W/kg.
- Per KDB 248227 D01v02r02, for 802.11b DSSS, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 2.0 W/kg, no further SAR testing is required in that exposure configuration.
- Per KDB 248227 D01v02r02, OFDM SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 3.0 W/kg. Cuz the maximum output power specified for OFDM and DSSS are 63.10mW(18.0dBm) and 56.23mW(17.5dBm), the scaled SAR would be $0.426 \times (63.10/56.23) = 0.478 \text{ W/Kg} < 3.0 \text{ W/kg}$, therefore, SAR is not required for OFDM.
- According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
- Highlight part of test data means repeated test.

15.2 Repeated SAR measurement

Band/ Mode	Test Position	CH.	Freq. (MHz)	Measured SAR (W/kg)				
				Original	1 st Repeated		2 nd Repeated	
					Value	Ratio	Value	Ratio
Band4/1RB#99	Right	20300	1745.0	2.394	2.341	1.02	/	/
Band5/1RB#49	Right	20600	844.0	2.028	1.951	1.04	/	/
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population				4.0 W/kg (mW/g) Averaged over 10g				

Note:

- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 2.0 W/kg
- Per KDB 865664 D01v01r04, if the ratio of *original* and *repeated* is ≤ 1.2 and the measured SAR < 3.625 W/kg, only one repeated measurement is required.

15.3 Multi-Band Simultaneous Transmission Considerations

➤ Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the EUT are shown in below Figure and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.



Fig.15.1 Simultaneous Transmission Paths

➤ Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v06, simultaneous transmission SAR test exclusion may be applied when the sum of the 10-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 4.0 W/kg. When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2), the following equation must be used to estimate the standalone 10g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} \cdot \frac{\text{Max. power of channel, mW}}{\text{Min. Separation Distance, mm}}$$

Mode	Max. tune-up Power (dBm)	Exposure Position	Limb
		Test Distance (mm)	0
5.2G WIFI	9.5	Estimated SAR (W/kg)	0.217
5.8G WIFI	9.5	Estimated SAR (W/kg)	0.229
Bluetooth	9.5	Estimated SAR (W/kg)	0.147

Note:

- When the minimum *test separation distance* is < 5 mm, a distance of 5 mm according is applied to determine estimated SAR.

➤ Multi-Band simultaneous Transmission Consideration

➤ Simultaneous Transmission Consideration	Position	Applicable Combination
	Limb	WWAN (Data) + WLAN 2.4 GHz
		WWAN (Data) + WLAN 5.2GHz/5.8GHz
		WWAN (Data) + Bluetooth

Note:

- WLAN 2.4GHz Band, WLAN 5.2GHz Band, WLAN 5.8GHz Band and Bluetooth share the same antenna, and cannot transmit simultaneously.
- WCDMA/LTE shares the same antenna, and cannot transmit simultaneously.
- The Report SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 4.0 W/kg.
 - $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the Reported multi-band SAR < 4.0 W/kg.

15.4 SAR Simultaneous Transmission Analysis

➤ Limb Simultaneous Transmission

Position		Standalone SAR(W/kg)				Σ SAR _{1g} (W/kg)		
		1	2	3	4	1+2	1+3	1+4
		WWAN	2.4G WLAN	5G WLAN	BT			
Limb	Front	1.805	0.180	0.229	0.147	1.985	2.034	1.952
	Back	0.257	0.000	0.229	0.147	0.257	0.486	0.404
	Left	0.000	0.426	0.229	0.147	0.426	0.229	0.147
	Right	2.717	0.000	0.229	0.147	2.717	2.946	2.864
	Top	0.663	0.000	0.229	0.147	0.663	0.892	0.810
	Bottom	0.000	0.000	0.229	0.147	0.000	0.229	0.147

➤ Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06.

15.5 Measurement Uncertainty

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A Type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in below Table.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor	$1/k(b)$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Uncertainty Component	Section	Uncert. Value	Prob. Dist.	Div.	(C _i) (1 g)	(C _i) (10 g)	Std. Unc. (1 g)	Std. Unc. (10 g)	V _i
Measurement System									
Probe Calibration	E.2.1	±7.4%	N	1	1	1	±7.4%	±7.4%	∞
Axial Isotropy	E.2.2	±1.2%	R	$\sqrt{3}$	0.7	0.7	±0.49%	±0.49%	∞
Hemispherical Isotropy	E.2.2	±0.9%	R	$\sqrt{3}$	0.7	0.7	±0.36%	±0.36%	∞
Boundary Effects	E.2.3	±1.0%	R	$\sqrt{3}$	1	1	±0.58%	±0.58%	∞
Linearity	E.2.4	±0.9%	R	$\sqrt{3}$	1	1	±0.52%	±0.52%	∞
System Detection Limits	E.2.5	±0.25%	R	$\sqrt{3}$	1	1	±0.14%	±0.14%	∞
Readout Electronics	E.2.6	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response Time	E.2.7	±0.8%	R	$\sqrt{3}$	1	1	±0.46%	±0.46%	∞
Integration Time	E.2.8	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%	∞
RF Ambient Noise	E.6.1	±3.0%	R	$\sqrt{3}$	1	1	±1.73%	±1.73%	∞
RF Ambient Reflections	E.6.1	±3.0%	R	$\sqrt{3}$	1	1	±1.73%	±1.73%	∞
Probe positioner mechanical tolerances	E.6.2	±0.4%	R	$\sqrt{3}$	1	1	±0.23%	±0.23%	∞
Probe positioning tolerance with respect to the phantom shell surface	E.6.3	±2.9%	R	$\sqrt{3}$	1	1	±1.68%	±1.68%	∞
Interpolation, extrapolation, and integration algorithm For max. SAR Evaluation.	E.5	±1.0%	R	$\sqrt{3}$	1	1	±0.58%	±0.58%	∞
Test Sample Related									
Device Positioning	E.4.2	±4.6%	N	1	1	1	±4.6%	±4.6%	M-1
Device Holder	E.4.1	±5.2%	N	1	1	1	±5.2%	±5.2%	M-1
Power Drift	6.6.2	±5.0%	R	$\sqrt{3}$	1	1	±2.89%	±2.89%	∞
Phantom and Setup									
Phantom Uncertainty	E.3.1	±4.0%	R	$\sqrt{3}$	1	1	±2.31%	±2.31%	∞
Liquid conductivity (measured value)	E.3.3	±3.33%	N	1	0.78	0.71	±2.6%	±2.6%	M
Liquid dielectric constant (measured value)	E.3.3	±3.25%	N	1	0.23	0.26	±0.75%	±0.85%	M
Liquid Conductivity - Temperature Uncertainty	E.3.4	±1.3%	R	$\sqrt{3}$	0.78	0.71	±0.59%	±0.53%	∞
Liquid Dielectric Constant - Temperature Uncertainty	E.3.4	±1.1%	R	$\sqrt{3}$	0.23	0.26	±0.15%	±0.17%	∞
Combined Standard Uncertainty (RSS)							±11.56%	±11.50%	
Expanded Uncertainty (95% Confidence Level, k = 2)							±23.11%	±23.0%	

Uncertainty Budget for frequency range 300 MHz to 3 GHz according to IEEE1528-2013

15.6 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested. Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

16 Reference

- [1]. FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2]. ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3]. IEEE Std. 1528-2013, “Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, September 2013
- [4]. OpenSAR V5 Software User Manual
- [5]. FCC KDB 248227 D01 v02r02, “SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS”, October 2015
- [6]. FCC KDB 447498 D01 v06, “RF EXPOSURE PROCEDURES AND EQUIPMENT AUTHORIZATION POLICIES FOR MOBILE AND PORTABLE DEVICES”, October 2015
- [7]. FCC KDB 648474 D04 v01r03, “SAR EVALUATION CONSIDERATIONS FOR WIRELESS HANDSETS”, October 2015
- [8]. FCC KDB 941225 D06 v02r01, “SAR EVALUATION PROCEDURES FOR PORTABLE DEVICES WITH WIRELESS ROUTER CAPABILITIES”, October 2015
- [9]. FCC KDB 865664 D01 v01r04, “SAR MEASUREMENT REQUIREMENTS FOR 100 MHz TO 6 GHz”, August 2015

Appendix A: Plots of SAR System Check

System check at 750 MHz


Date of measurement: 18/11/2021

A. Experimental conditions.

Probe	SN 18/21 EPG0354
ConvF	1.73
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW750
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity


Frequency (MHz)	750.000000
Relative permittivity (real part)	42.581648
Conductivity (S/m)	0.878190

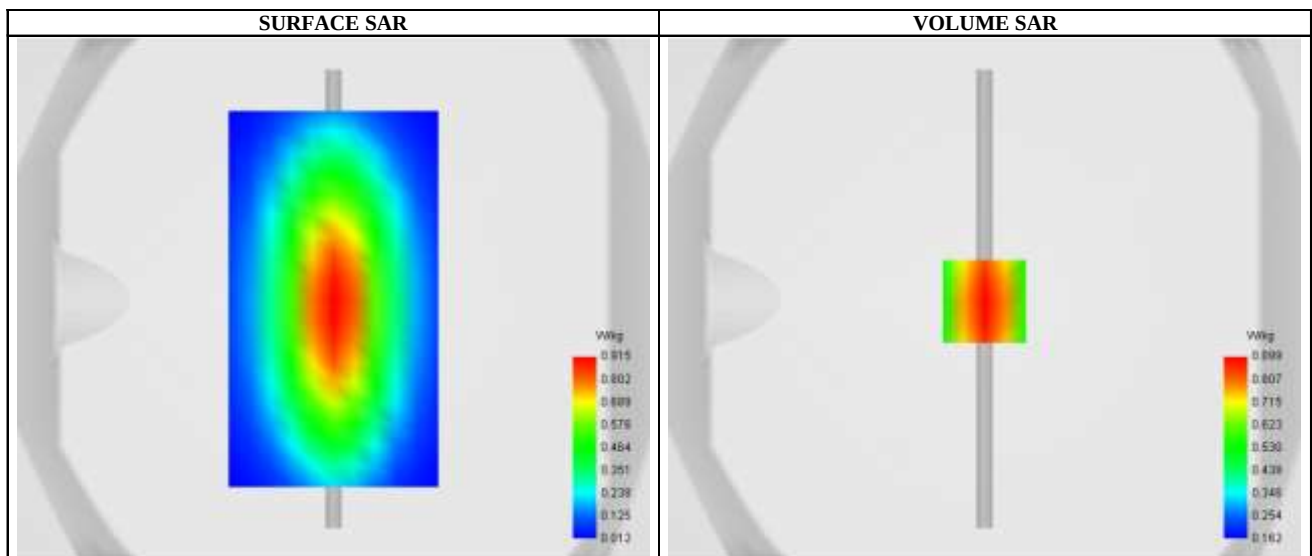C. SAR Surface and Volume

Maximum location: X=0.00, Y=0.00; SAR Peak: 1.22 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.580745
SAR 1g (W/Kg)	0.884247
Variation (%)	2.310000

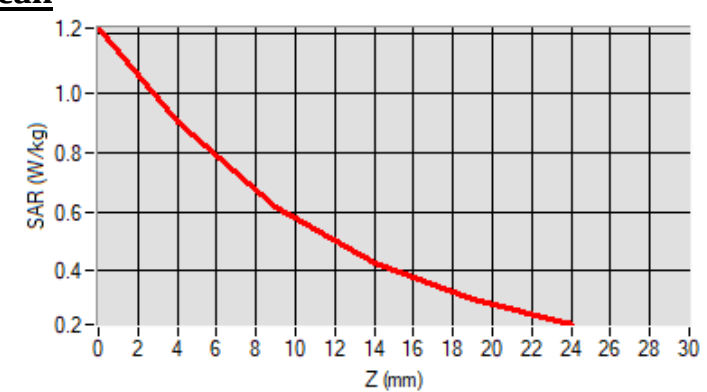E. Z Axis Scan

System check at 835 MHz


Date of measurement: 18/11/2021

A. Experimental conditions.

Probe	SN 18/21 EPG0354
ConvF	1.68
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity


Frequency (MHz)	835.000000
Relative permittivity (real part)	41.251423
Conductivity (S/m)	0.923513

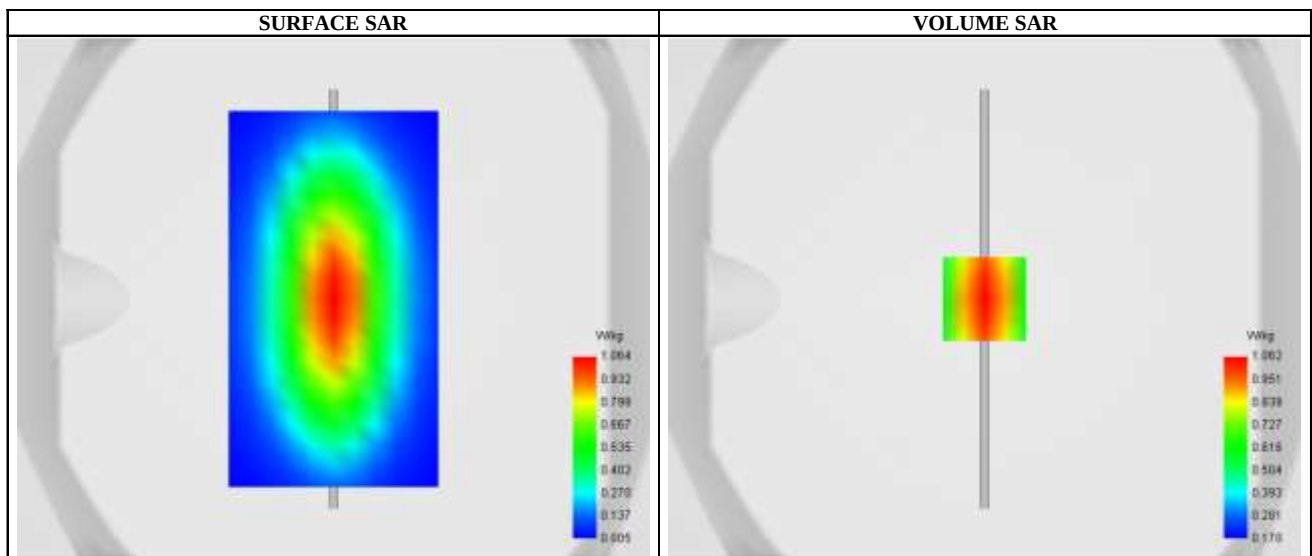C. SAR Surface and Volume

Maximum location: X=0.00, Y=0.00; SAR Peak: 1.43 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.621221
SAR 1g (W/Kg)	0.984412
Variation (%)	-1.450000

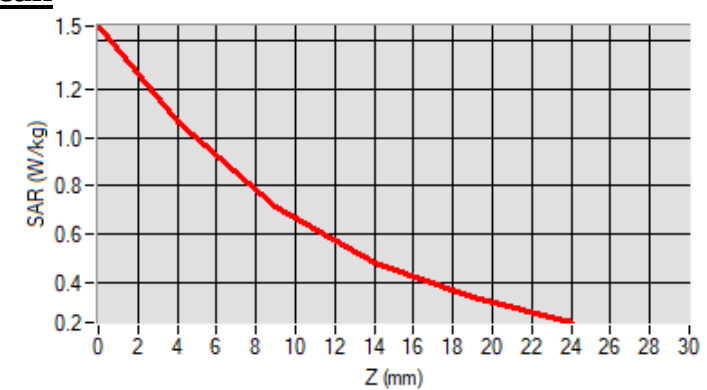E. Z Axis Scan

System check at 1750 MHz

Date of measurement: 16/11/2021


A. Experimental conditions.

Probe	SN 18/21 EPG0354
ConvF	2.07
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1750
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1750.000000
Relative permittivity (real part)	40.152467
Conductivity (S/m)	1.334728

C. SAR Surface and Volume

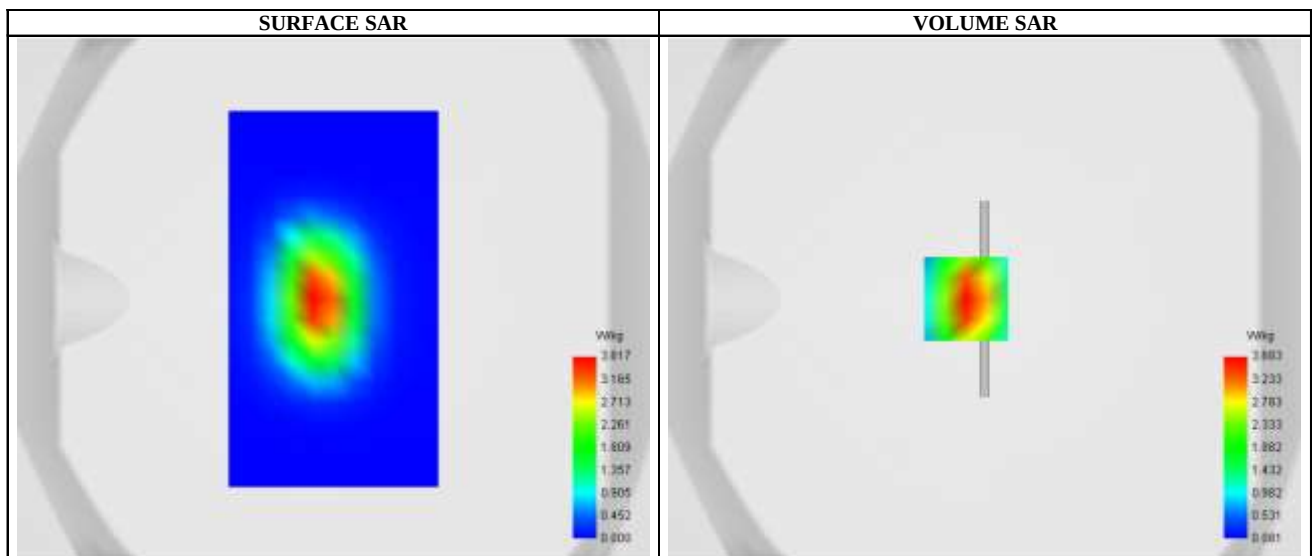


Maximum location: X=-7.00, Y=0.00; SAR Peak: 5.60 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	1.926136
SAR 1g (W/Kg)	3.782425
Variation (%)	1.240000

E. Z Axis Scan

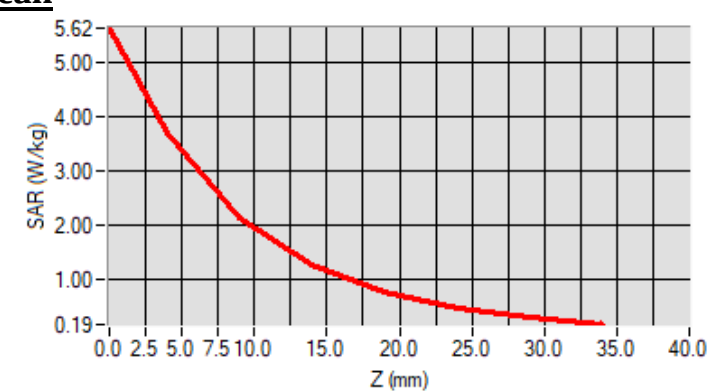

System check at 1900 MHz


Date of measurement: 16/11/2021

A. Experimental conditions.

Probe	SN 36/20 EPG0354
ConvF	2.14
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity


Frequency (MHz)	1900.000000
Relative permittivity (real part)	39.161087
Conductivity (S/m)	1.411513

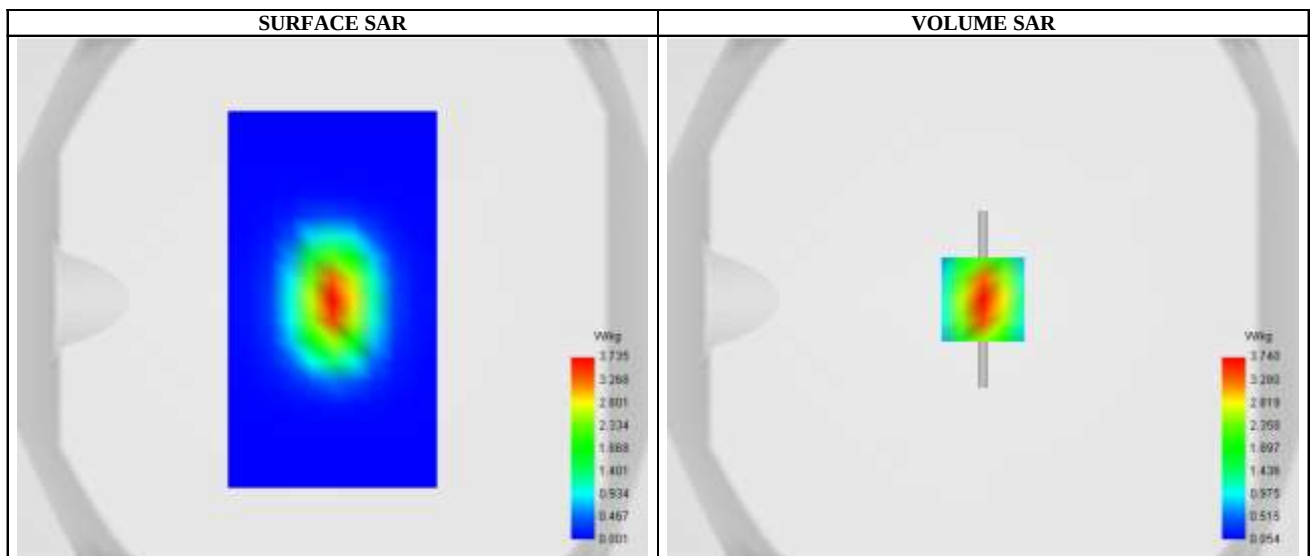C. SAR Surface and Volume

Maximum location: X=0.00, Y=0.00; SAR Peak: 5.88 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	2.106271
SAR 1g (W/Kg)	4.021253
Variation (%)	-1.920000

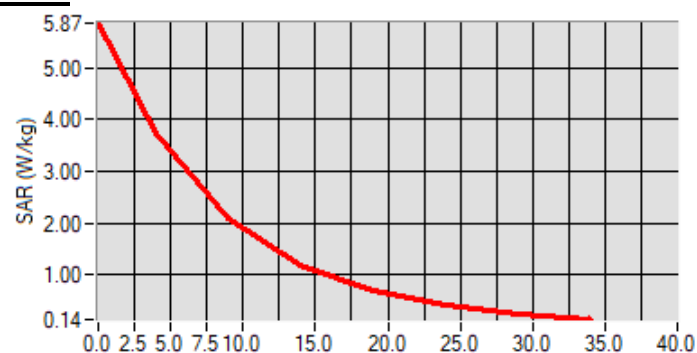E. Z Axis Scan

System check at 2450 MHz


Date of measurement: 26/11/2021

A. Experimental conditions.

Probe	SN 18/21 EPG0354
ConvF	2.23
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity


Frequency (MHz)	2450.000000
Relative permittivity (real part)	38.581432
Conductivity (S/m)	1.762142

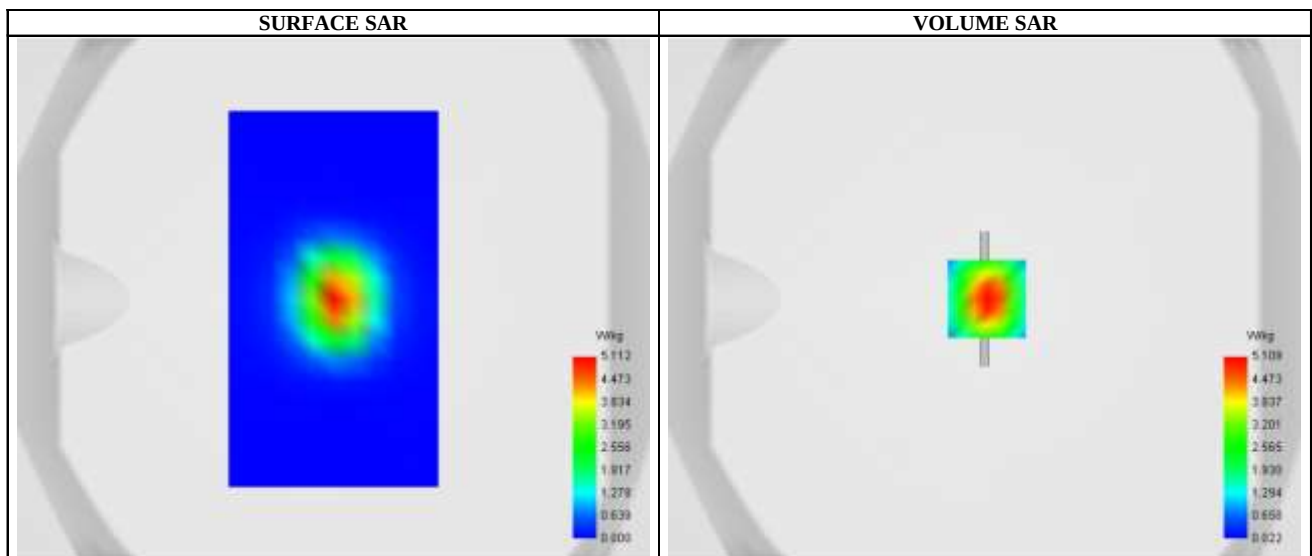C. SAR Surface and Volume

Maximum location: X=1.00, Y=0.00; SAR Peak: 8.48 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	2.311143
SAR 1g (W/Kg)	5.315054
Variation (%)	-1.310000

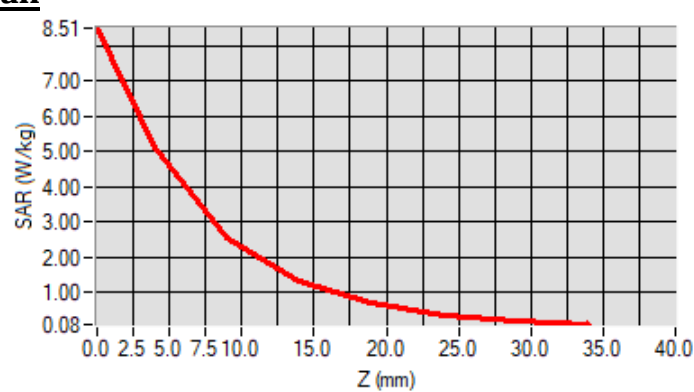E. Z Axis Scan

Appendix B: Plots of SAR Test Data

SAR Measurement at Band5_WCDMA850 (Body, Validation Plane)

Date of measurement: 18/11/2021


A. Experimental conditions.

Probe	SN 18/21 EPG0354
ConvF	1.68
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band5_WCDMA850
Channels	Low
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	826.400024
Relative permittivity (real part)	41.350470
Conductivity (S/m)	0.909780

C. SAR Surface and Volume

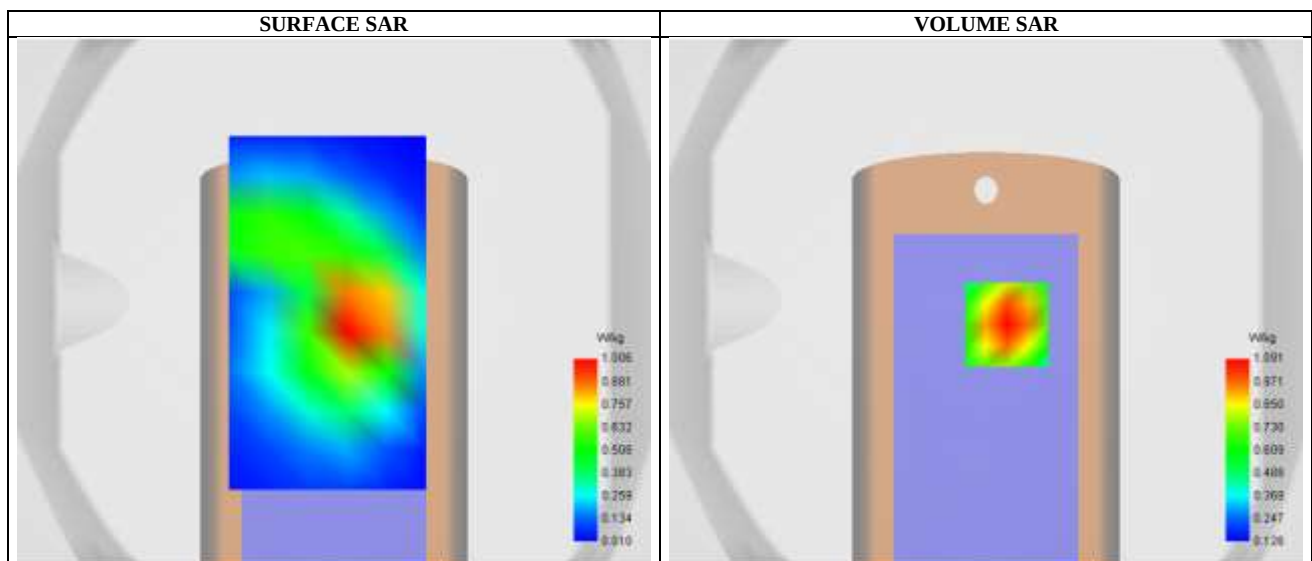


Maximum location: X=8.00, Y=-9.00 ; SAR Peak: 1.51 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.612552
SAR 1g (W/Kg)	1.027823
Variation (%)	0.640000

E. Z Axis Scan

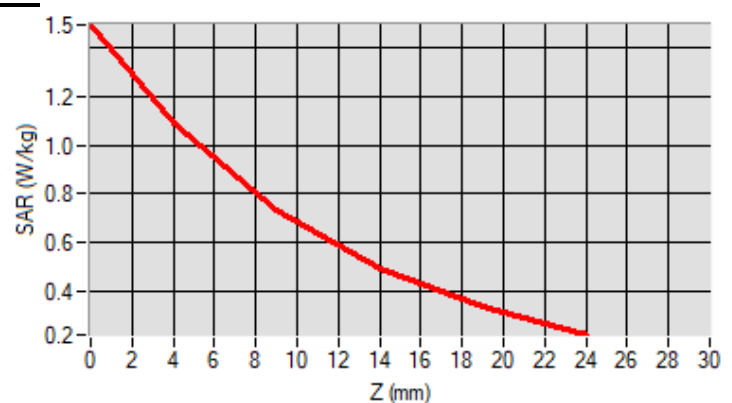

SAR Measurement at Band2_WCDMA1900 (Body, Validation Plane)

Date of measurement: 16/11/2021


A. Experimental conditions.

Probe	SN 18/21 EPG0354
ConvF	2.14
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band2_WCDMA1900
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.250000
Conductivity (S/m)	1.410391

C. SAR Surface and Volume

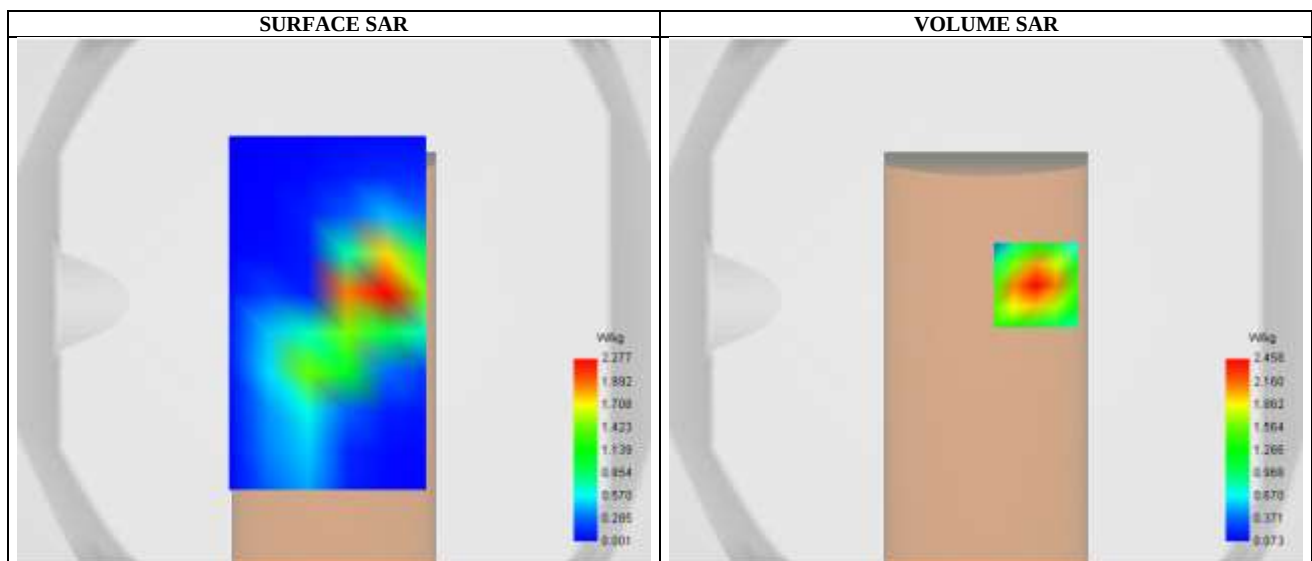


Maximum location: X=19.00, Y=6.00 ; SAR Peak: 3.84 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	1.243824
SAR 1g (W/Kg)	2.281663
Variation (%)	2.900000

E. Z Axis Scan

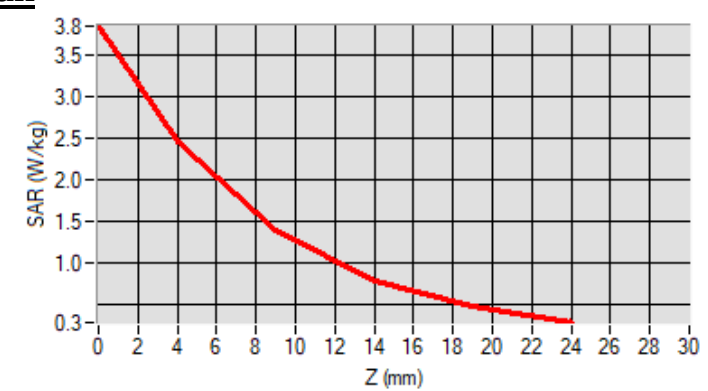

SAR Measurement at LTE band 2 (Body, Validation Plane)

Date of measurement: 16/11/2021


A. Experimental conditions.

Probe	SN 18/21 EPG0354
ConvF	2.14
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 2
Channels	Middle
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.250000
Conductivity (S/m)	1.410391

C. SAR Surface and Volume

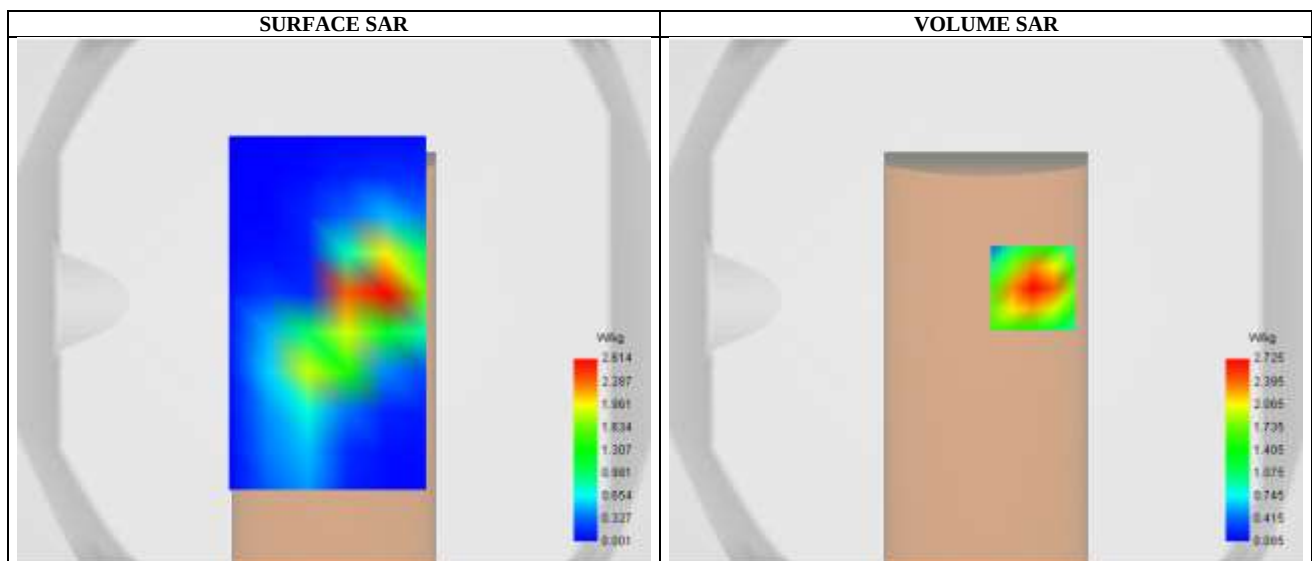


Maximum location: X=18.00, Y=5.00 ; SAR Peak: 4.19 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	1.424613
SAR 1g (W/Kg)	2.542349
Variation (%)	-3.270000

E. Z Axis Scan

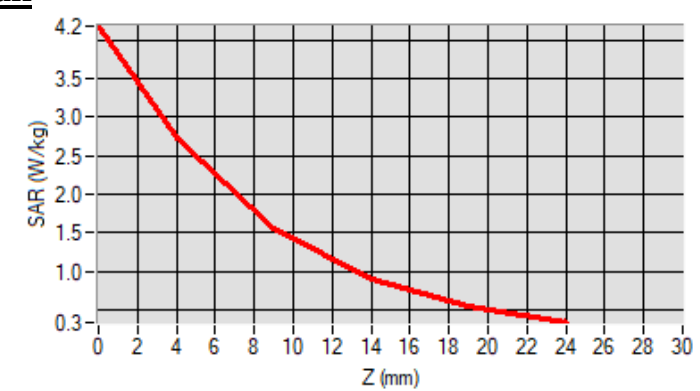

SAR Measurement at LTE band 4 (Body, Validation Plane)

Date of measurement: 16/11/2021


A. Experimental conditions.

Probe	SN 18/21 EPG0354
ConvF	2.07
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 4
Channels	Middle
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1732.500000
Relative permittivity (real part)	40.205910
Conductivity (S/m)	1.320603

C. SAR Surface and Volume

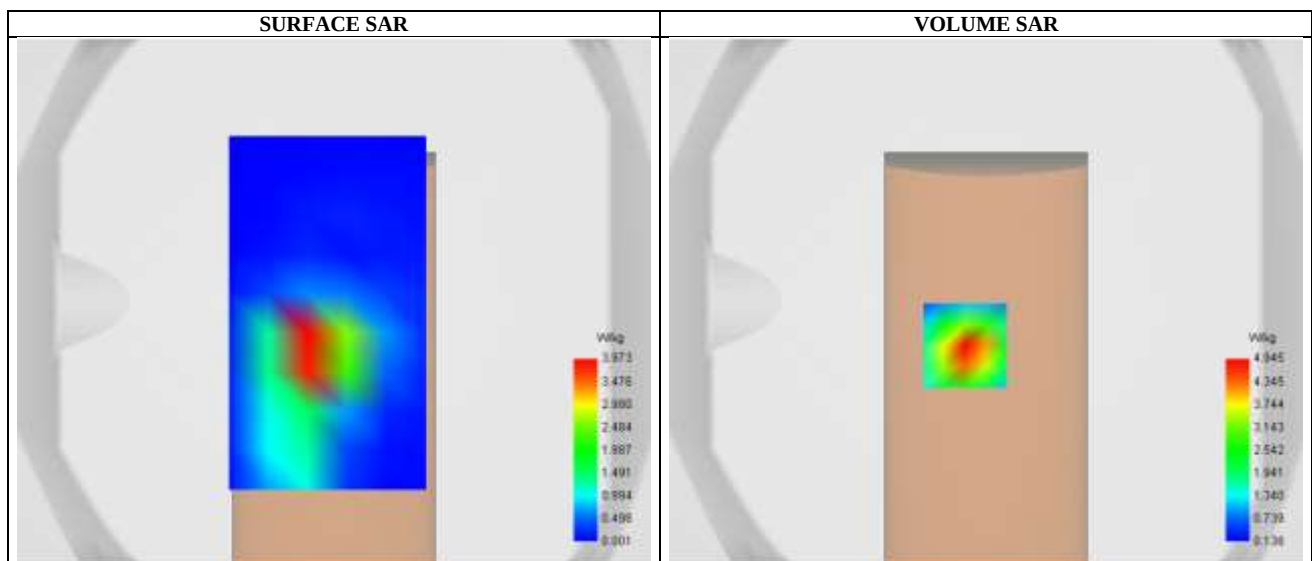


Maximum location: X=-8.00, Y=-17.00 ; SAR Peak: 7.54 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	2.393665
SAR 1g (W/Kg)	4.579259
Variation (%)	-3.210000

E. Z Axis Scan

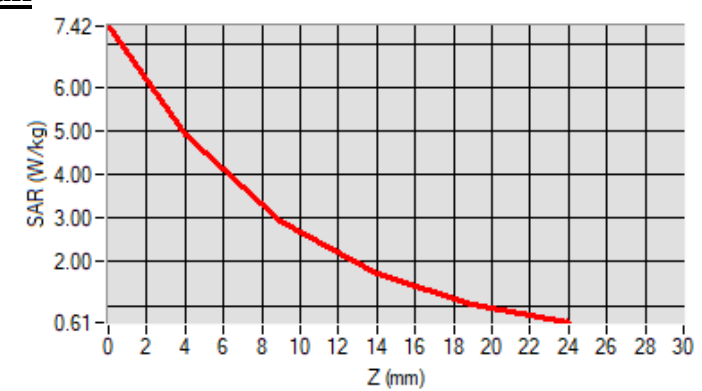

SAR Measurement at LTE band 5 (Body, Validation Plane)

Date of measurement: 18/11/2021


A. Experimental conditions.

Probe	SN 18/21 EPG0354
ConvF	1.68
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 5
Channels	Middle
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	836.500000
Relative permittivity (real part)	41.245000
Conductivity (S/m)	0.921461

C. SAR Surface and Volume

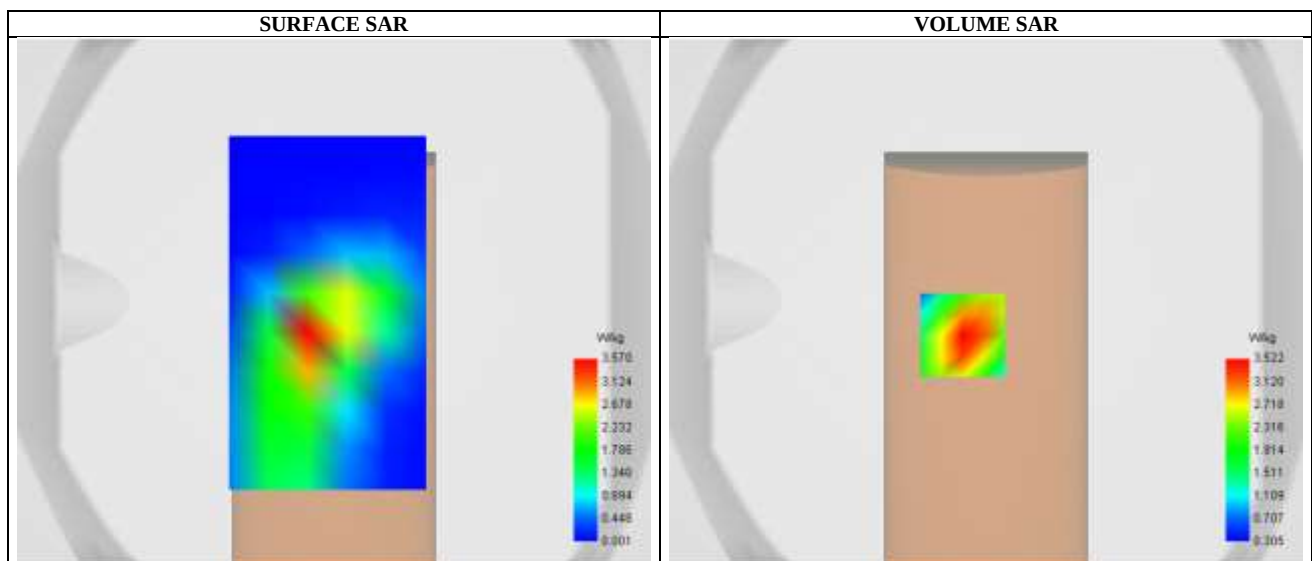


Maximum location: X=-9.00, Y=-13.00 ; SAR Peak: 5.06 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	2.027534
SAR 1g (W/Kg)	3.329150
Variation (%)	-3.350000

E. Z Axis Scan

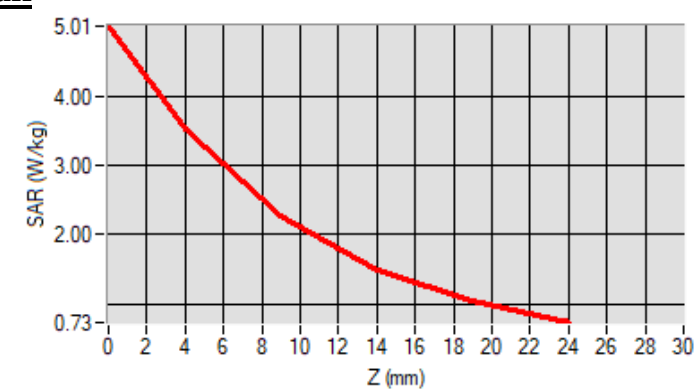

SAR Measurement at LTE band 12 (Body, Validation Plane)

Date of measurement: 18/11/2021


A. Experimental conditions.

Probe	SN 18/21 EPG0354
ConvF	1.73
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 12
Channels	High
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	711.000000
Relative permittivity (real part)	42.668002
Conductivity (S/m)	0.872734

C. SAR Surface and Volume

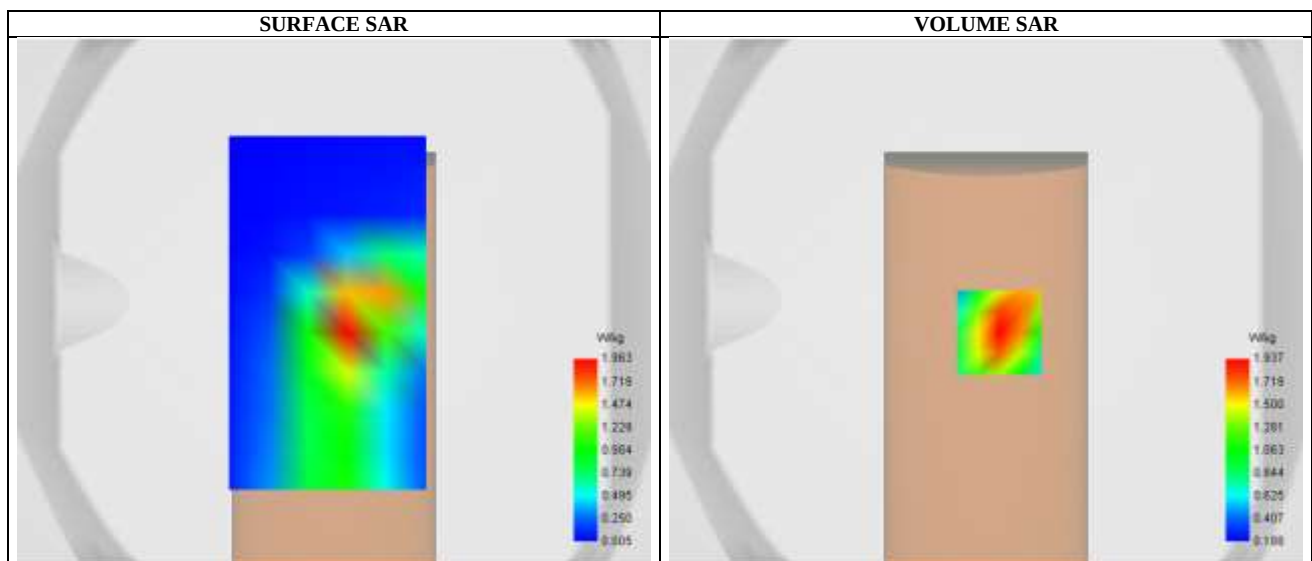


Maximum location: X=5.00, Y=-12.00 ; SAR Peak: 2.75 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	1.134889
SAR 1g (W/Kg)	1.855272
Variation (%)	-0.990000

E. Z Axis Scan

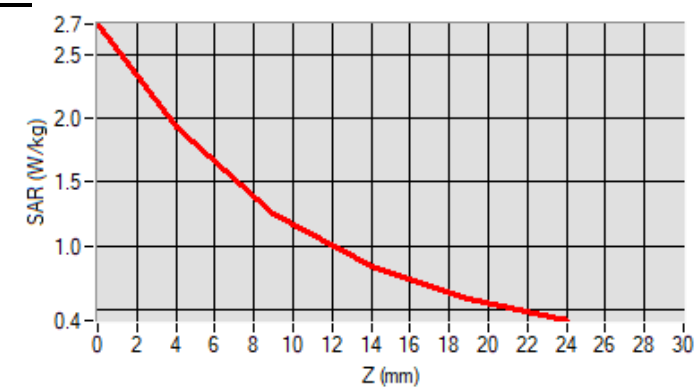

SAR Measurement at LTE band 13 (Body, Validation Plane)

Date of measurement: 18/11/2021


A. Experimental conditions.

Probe	SN 18/21 EPG0354
ConvF	1.73
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 13
Channels	Middle
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	782.000000
Relative permittivity (real part)	42.519413
Conductivity (S/m)	0.894511

C. SAR Surface and Volume

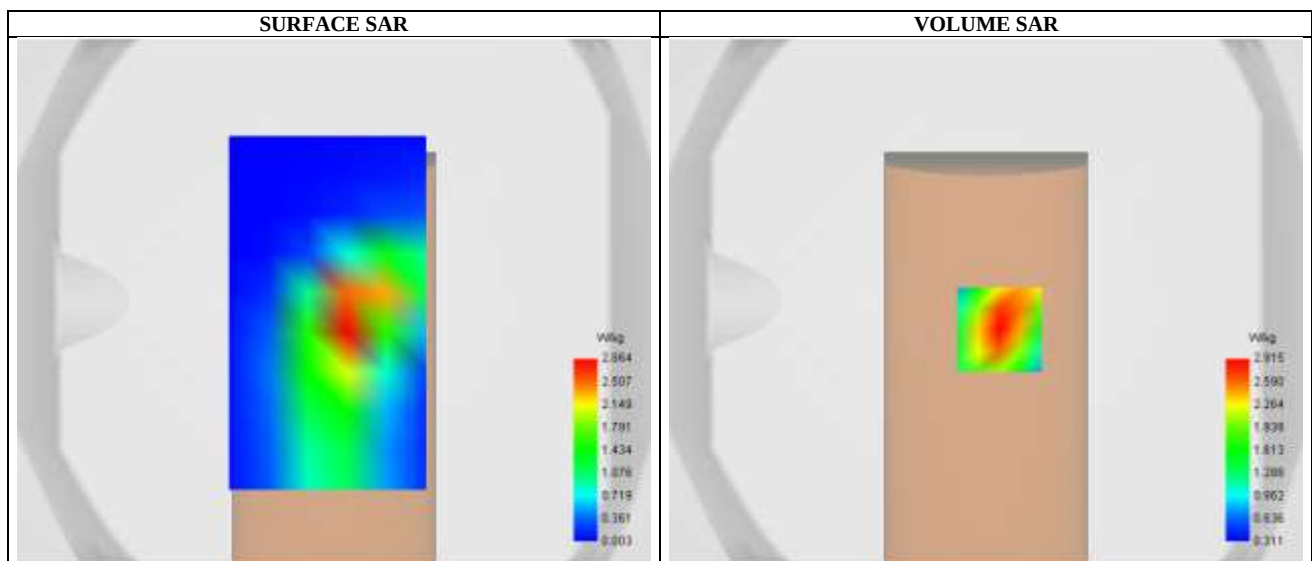


Maximum location: X=5.00, Y=-11.00 ; SAR Peak: 4.08 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	1.698284
SAR 1g (W/Kg)	2.737345
Variation (%)	-3.310000

E. Z Axis Scan

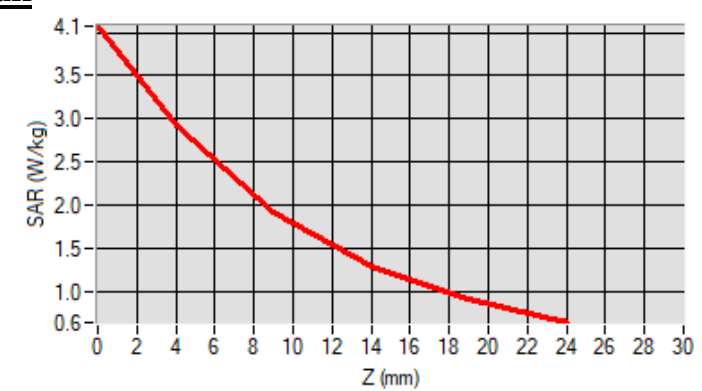

SAR Measurement at IEEE 802.11b ISM (Body, Validation Plane)

Date of measurement: 26/11/2021


A. Experimental conditions.

Probe	SN 18/21 EPG0354
ConvF	2.23
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11b ISM
Channels	Middle
Signal	IEEE802.b (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2437.000000
Relative permittivity (real part)	38.656002
Conductivity (S/m)	1.748081

C. SAR Surface and Volume

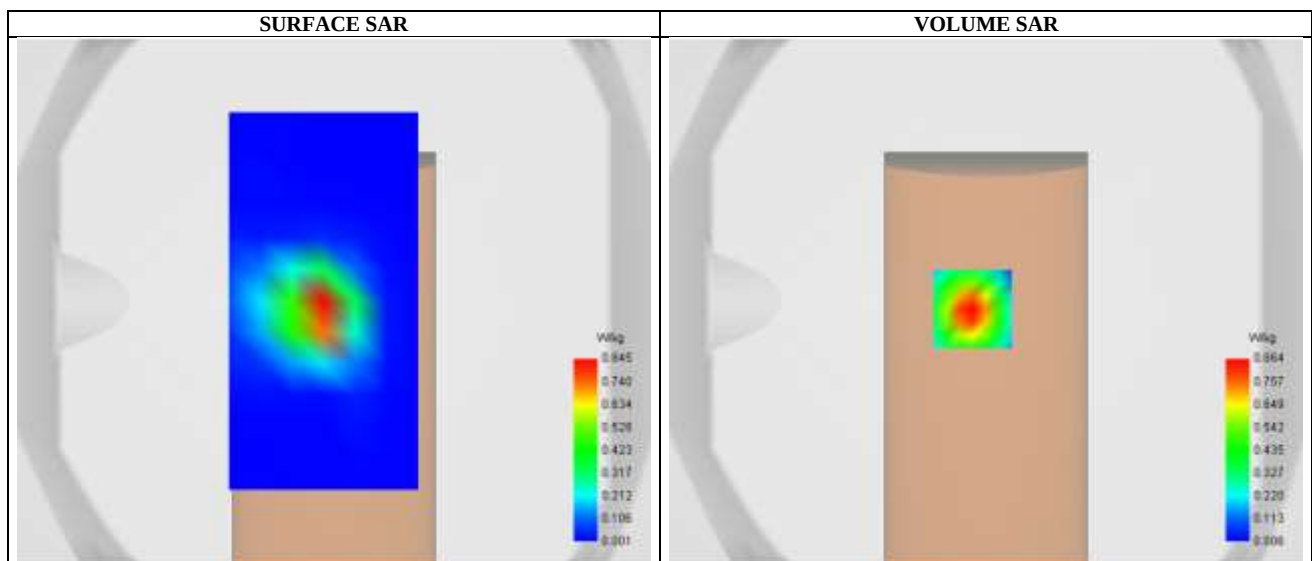


Maximum location: X=-5.00, Y=-3.00 ; SAR Peak: 1.38 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.370377
SAR 1g (W/Kg)	0.774717
Variation (%)	-2.000000

E. Z Axis Scan

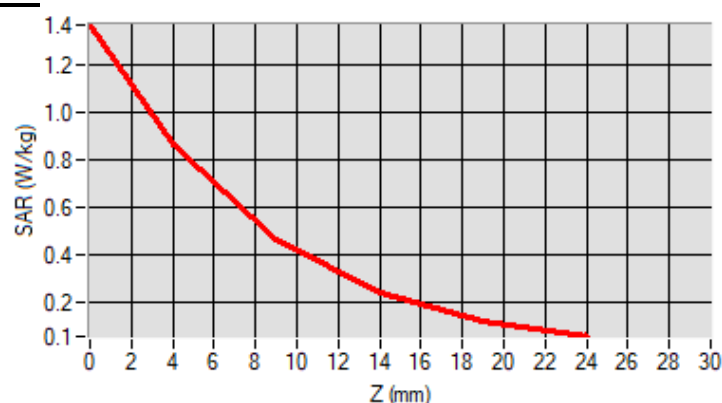

Appendix C: System Calibration Certificate