



Appendix A: Test Results of FCC Part 15C

APPENDIX A: TEST RESULTS OF FCC PART 15C.....	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
APPENDIX A.2: TEST RESULTS OF RADIATED SPURIOUS EMISSION.....	3
APPENDIX A.3: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	12


Appendix A.1: Test Results of 20dB Bandwidth

Frequency	20 dB Bandwidth (KHz)
Output 1: 110-205kHz (10W)	0.3243
Output 1: 110-205kHz (5W)	0.4002
Standby, Output 1: 110-205kHz	0.5664
Standby, Output 1: 110-205kHz	0.9537


The test plot as follows:

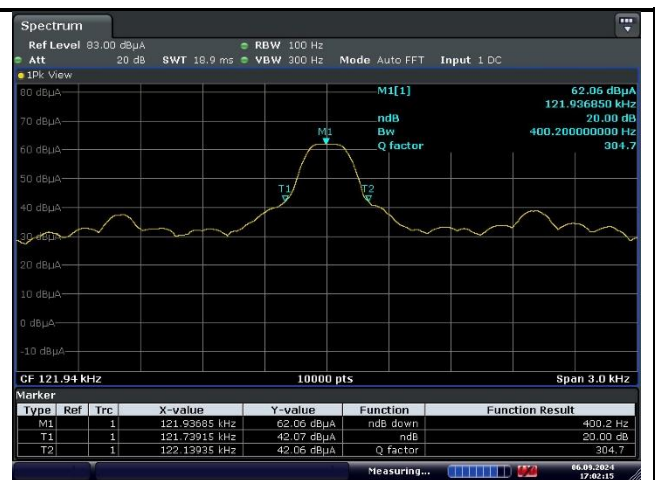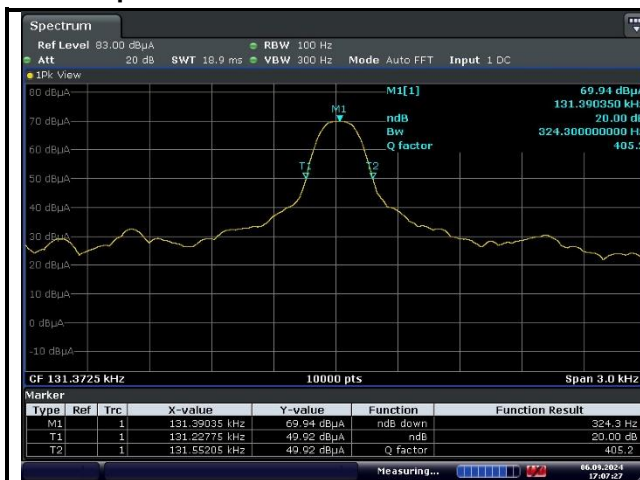

Output 1: 110-205kHz (10W)

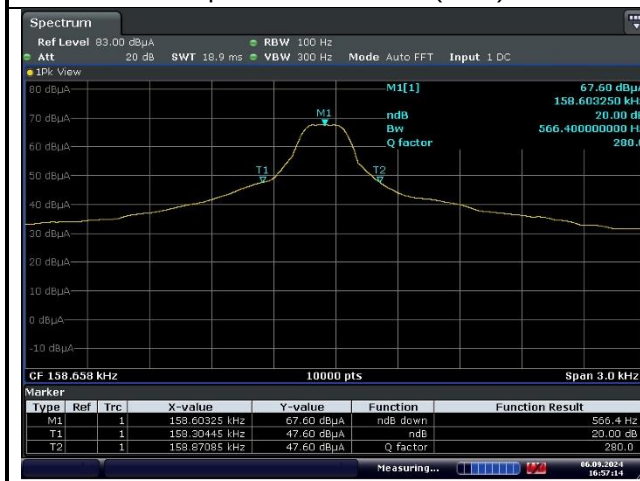

Output 1: 110-205kHz (5W)

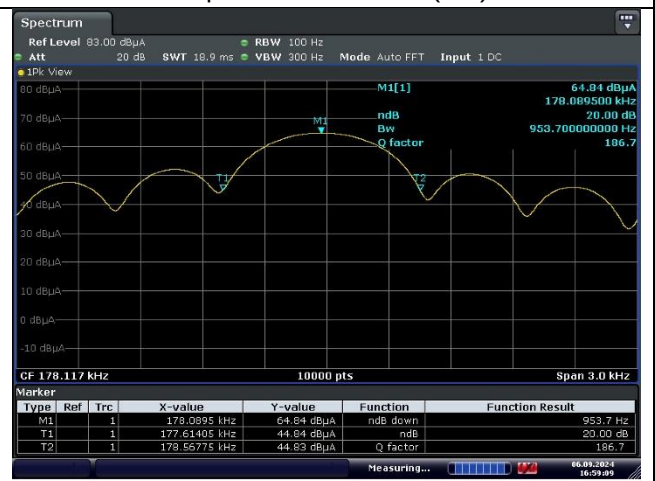

Standby, Output 1: 110-205kHz


Standby, Output 1: 110-205kHz

Appendix A.2: Test Results of Radiated Spurious Emission

*Note: The highest waveform in the figure is WPT Fundamental.



Shenzhen UnionTrust Quality and Technology Co., Ltd.

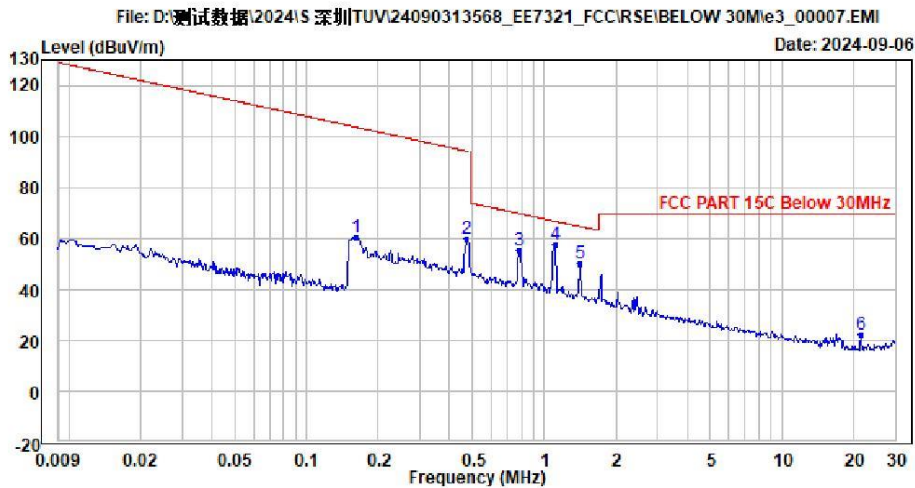


Condition : 3m Horizontal
Temp.(C)/Hum.(%) : 24.3 (C)/54.6(%)
Press : 100.2kpa
Product : Wireless Charger
Model No. : EE7321
Power Rating : AC_120V/60Hz
Test Engineer : Linson
Test Mode : Test_Mode_1 : Standby
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preampl Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	0.161	60.42	78.72	11.30	0.00	0.00	29.60	103.59	-43.17	Peak
2	0.471	59.78	78.16	11.21	0.00	0.01	29.60	94.14	-34.36	Peak
3	0.786	55.46	73.84	11.20	0.00	0.02	29.60	69.71	-14.25	Peak
4 PP	1.116	57.32	75.68	11.18	0.00	0.06	29.60	66.67	-9.35	Peak
5	1.425	50.14	68.53	11.12	0.00	0.08	29.59	64.56	-14.42	Peak
6	21.498	22.23	42.28	9.00	0.00	0.35	29.40	69.50	-47.27	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

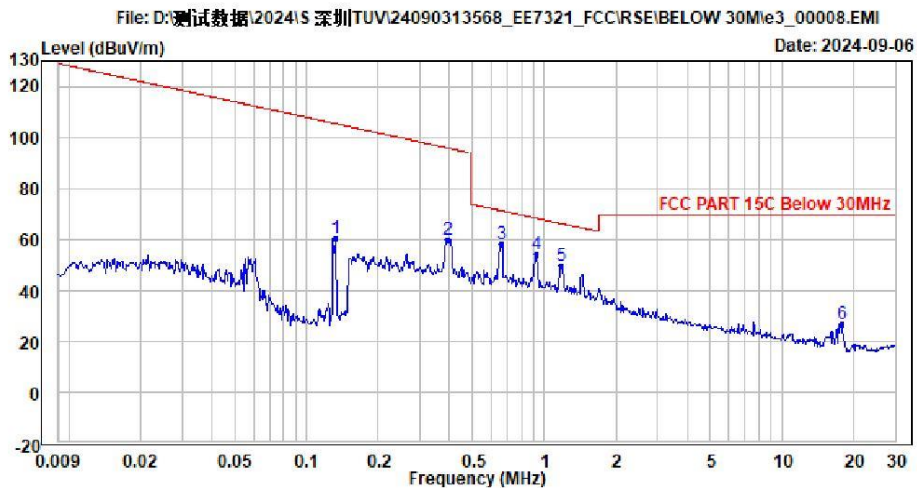


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.3 (C)/54.6(%)
Press : 100.2kpa
Product : Wireless Charger
Model No. : EE7321
Power Rating : AC_120V/60Hz
Test Engineer : Linson
Test Mode : Test_Mode_2 : Output 1: 110-205kHz + Test module (10W)
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	0.132	60.60	78.72	11.48	0.00	0.00	29.60	105.38	-44.78	Peak
2	0.394	60.05	78.41	11.23	0.00	0.01	29.60	95.72	-35.67	Peak
3 PP	0.663	58.31	76.70	11.20	0.00	0.01	29.60	71.18	-12.87	Peak
4	0.933	54.25	72.61	11.20	0.00	0.04	29.60	68.22	-13.97	Peak
5	1.171	49.52	67.89	11.17	0.00	0.06	29.60	66.25	-16.73	Peak
6	17.832	26.53	46.08	9.48	0.00	0.37	29.40	69.50	-42.97	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

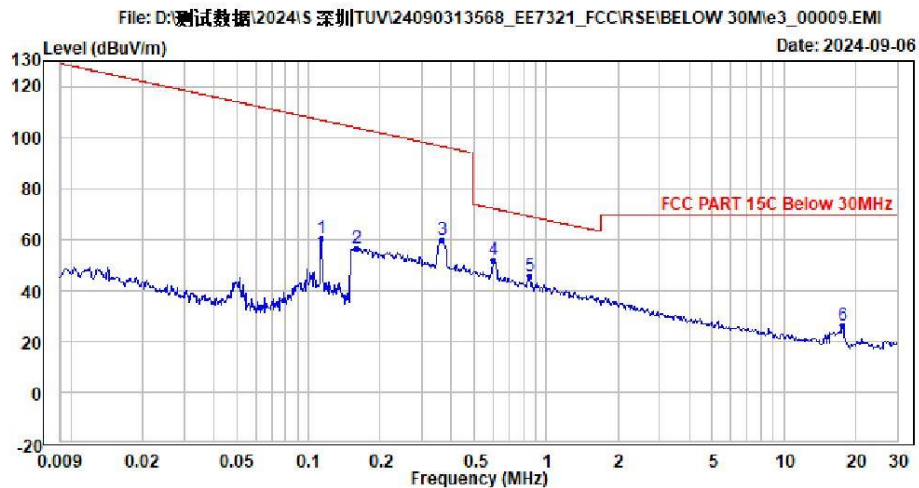


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.3 (C)/54.6(%)
Press : 100.2kpa
Product : Wireless Charger
Model No. : EE7321
Power Rating : AC_120V/60Hz
Test Engineer : Linson
Test Mode : Test_Mode_3 : Output 1: 110-205kHz + Test module (5W)
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	0.114	60.35	78.70	11.25	0.00	0.00	29.60	106.67	-46.32	Peak
2	0.160	56.68	74.98	11.30	0.00	0.00	29.60	103.66	-46.98	Peak
3	0.366	59.79	78.14	11.24	0.00	0.01	29.60	96.36	-36.57	Peak
4 PP	0.601	52.10	70.49	11.20	0.00	0.01	29.60	72.02	-19.92	Peak
5	0.846	45.48	63.85	11.20	0.00	0.03	29.60	69.07	-23.59	Peak
6	17.688	25.96	45.49	9.50	0.00	0.37	29.40	69.50	-43.54	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

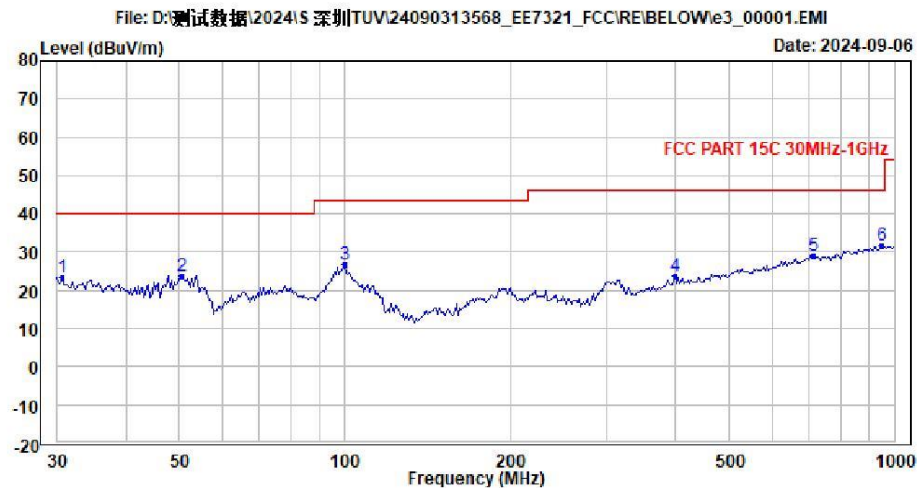


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.3 (C)/54.6(%)
Press : 100.2kpa
Product : Wireless Charger
Model No. : EE7321
Power Rating : AC_120V/60Hz
Test Engineer : Linson
Test Mode : Test_Mode_1 : Standby
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	30.639	23.25	28.52	22.99	0.00	0.64	28.90	40.00	-16.75	Peak
2	50.461	23.88	37.63	14.36	0.00	0.79	28.90	40.00	-16.12	Peak
3	99.768	26.68	42.65	11.88	0.00	1.05	28.90	43.50	-16.82	Peak
4	398.296	23.65	28.52	22.43	0.00	1.90	29.20	46.00	-22.35	Peak
5	713.692	29.05	27.11	28.87	0.00	2.40	29.33	46.00	-16.95	Peak
6 PP	952.000	31.61	26.38	31.20	0.00	3.00	28.97	46.00	-14.39	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

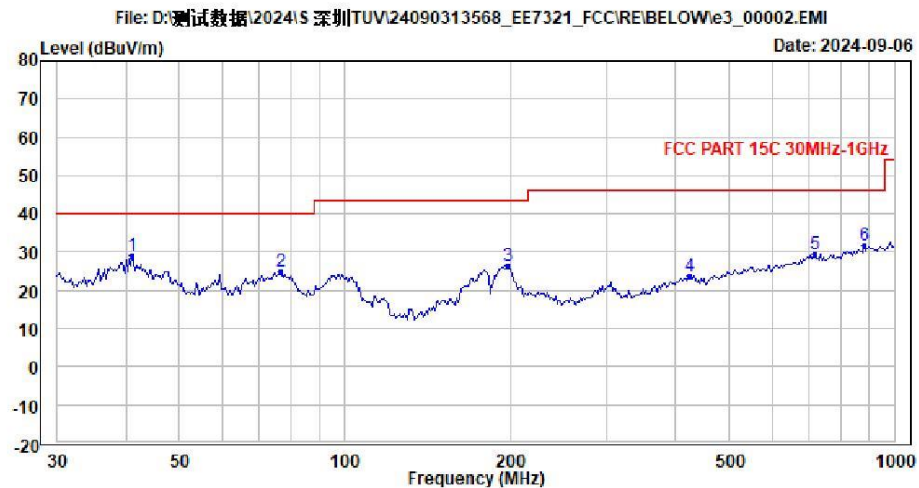


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.3 (C)/54.6(%)
Press : 100.2kpa
Product : Wireless Charger
Model No. : EE7321
Power Rating : AC_120V/60Hz
Test Engineer : Linson
Test Mode : Test_Mode_1 : Standby
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	41.158	29.00	38.26	18.77	0.00	0.87	28.90	40.00	-11.00	Peak
2	76.387	24.93	43.16	9.74	0.00	0.93	28.90	40.00	-15.07	Peak
3	198.642	26.31	37.46	16.43	0.00	1.42	29.00	43.50	-17.19	Peak
4	424.300	23.86	28.16	23.00	0.00	1.94	29.24	46.00	-22.14	Peak
5	718.725	29.43	27.51	28.83	0.00	2.41	29.32	46.00	-16.57	Peak
6	881.184	31.59	27.11	30.82	0.00	2.74	29.08	46.00	-14.41	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

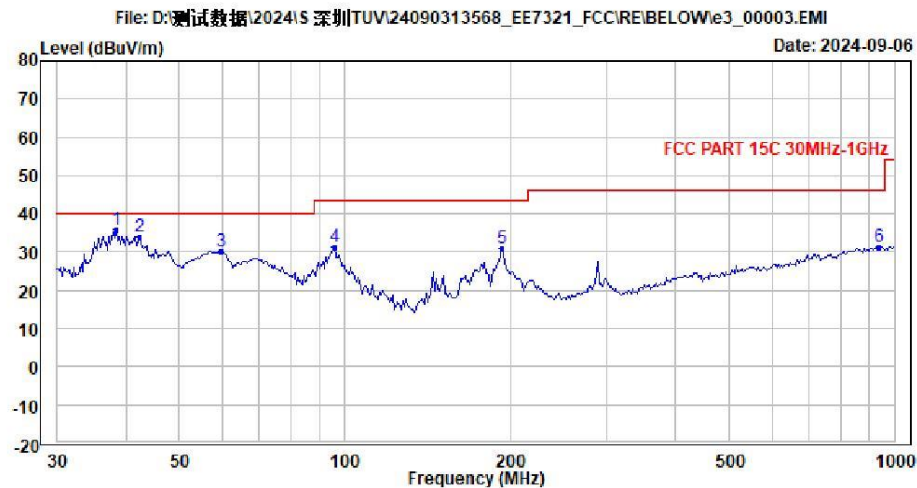


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.3 (C)/54.6(%)
Press : 100.2kpa
Product : Wireless Charger
Model No. : EE7321
Power Rating : AC_120V/60Hz
Test Engineer : Linson
Test Mode : Test_Mode_2 : Output 1: 110-205kHz + Test module (10W)
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	38.365	35.86	43.38	20.54	0.00	0.84	28.90	40.00	-4.14	Peak
2	42.331	34.01	43.75	18.30	0.00	0.86	28.90	40.00	-5.99	Peak
3	59.732	30.12	47.01	11.17	0.00	0.84	28.90	40.00	-9.88	Peak
4	95.649	31.19	47.16	11.90	0.00	1.03	28.90	43.50	-12.31	Peak
5	193.137	30.85	42.23	16.21	0.00	1.40	28.99	43.50	-12.65	Peak
6	938.714	31.21	26.28	30.97	0.00	2.95	28.99	46.00	-14.79	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

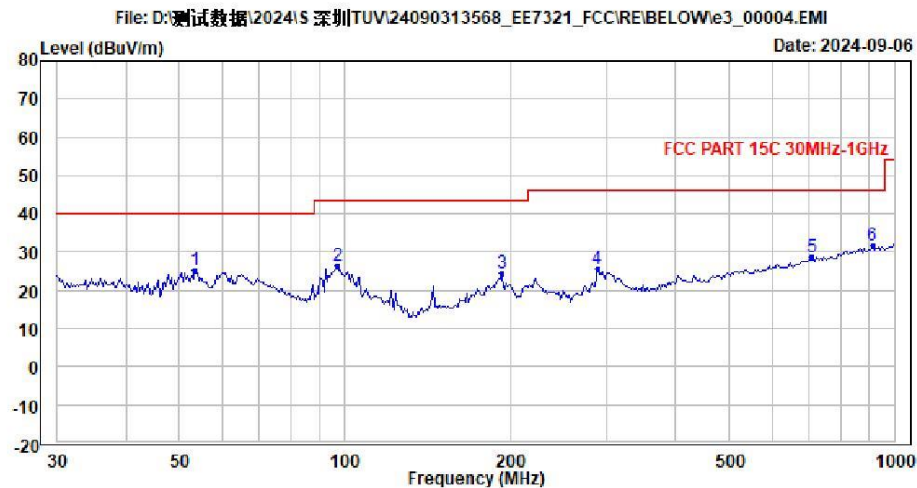


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.3 (C)/54.6(%)
Press : 100.2kpa
Product : Wireless Charger
Model No. : EE7321
Power Rating : AC_120V/60Hz
Test Engineer : Linson
Test Mode : Test_Mode_2 : Output 1: 110-205kHz + Test module (10W)
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	53.379	25.27	40.50	12.86	0.00	0.81	28.90	40.00	-14.73	Peak
2	97.002	26.54	42.61	11.80	0.00	1.03	28.90	43.50	-16.96	Peak
3	193.137	24.67	36.05	16.21	0.00	1.40	28.99	43.50	-18.83	Peak
4	288.284	25.62	34.96	18.13	0.00	1.62	29.09	46.00	-20.38	Peak
5	708.694	28.66	26.81	28.80	0.00	2.39	29.34	46.00	-17.34	Peak
6 PP	912.695	31.88	26.98	31.10	0.00	2.83	29.03	46.00	-14.12	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

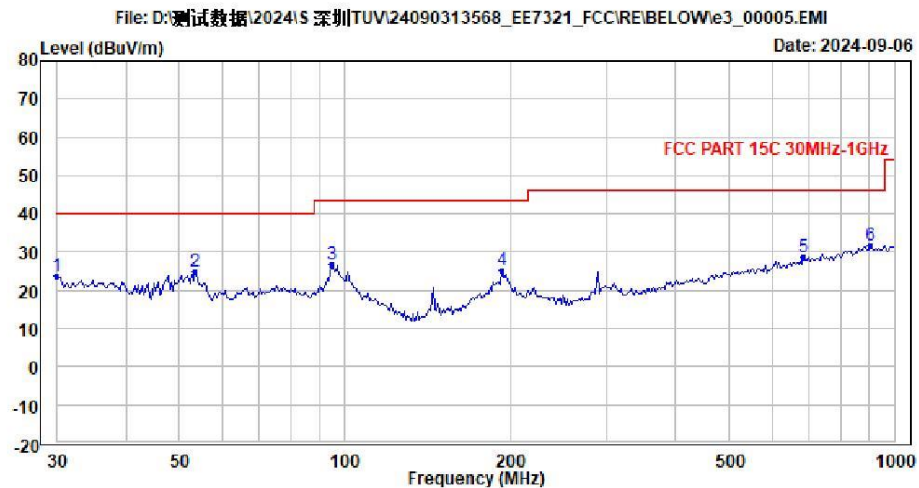


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.3 (C)/54.6(%)
Press : 100.2kpa
Product : Wireless Charger
Model No. : EE7321
Power Rating : AC_120V/60Hz
Test Engineer : Linson
Test Mode : Test_Mode_3 : Output 1: 110-205kHz + Test module (5W)
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	30.000	23.81	27.89	24.20	0.00	0.62	28.90	40.00	-16.19	Peak
2	53.379	24.81	40.04	12.86	0.00	0.81	28.90	40.00	-15.19	Peak
3	94.979	26.68	42.66	11.90	0.00	1.02	28.90	43.50	-16.82	Peak
4	193.137	25.09	36.47	16.21	0.00	1.40	28.99	43.50	-18.41	Peak
5	684.226	28.74	27.51	28.25	0.00	2.35	29.37	46.00	-17.26	Peak
6 PP	906.304	31.67	26.73	31.17	0.00	2.81	29.04	46.00	-14.33	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

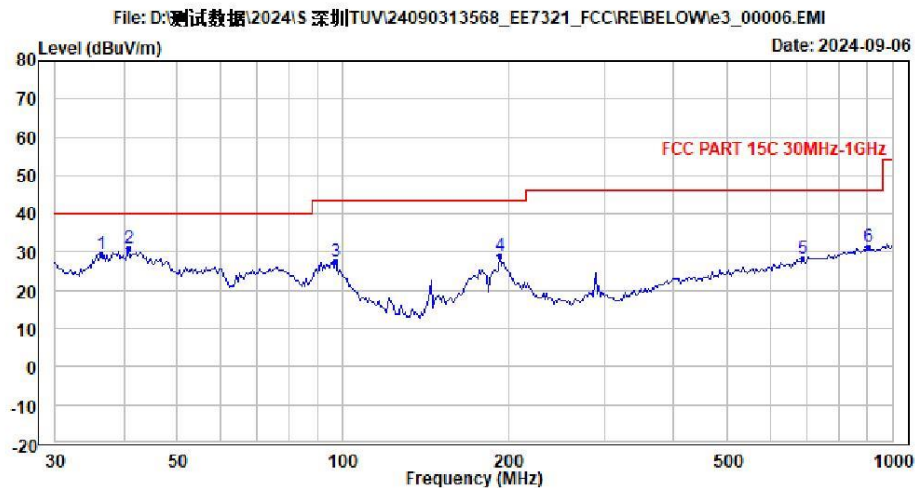


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.3 (C)/54.6(%)
Press : 100.2kpa
Product : Wireless Charger
Model No. : EE7321
Power Rating : AC_120V/60Hz
Test Engineer : Linson
Test Mode : Test_Mode_3 : Output 1: 110-205kHz + Test module (5W)
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	36.268	29.44	36.24	21.32	0.00	0.78	28.90	40.00	-10.56	Peak
2 PP	40.870	30.76	39.95	18.84	0.00	0.87	28.90	40.00	-9.24	Peak
3	97.002	27.66	43.73	11.80	0.00	1.03	28.90	43.50	-15.84	Peak
4	193.137	29.11	40.49	16.21	0.00	1.40	28.99	43.50	-14.39	Peak
5	689.051	28.41	26.96	28.46	0.00	2.36	29.37	46.00	-17.59	Peak
6	906.304	31.48	26.54	31.17	0.00	2.81	29.04	46.00	-14.52	Peak


Appendix A.3: Test Results of Conducted Emission on AC Mains

Site:	LAB	Phase: L1	Temperature(°C):25.0(°C)
Limit:	QP	atm.press.: 100.3 kpa	Humidity(%): 53.7%RH
EUT:	10W Wireless Charging Phone Holder	Test Time:	2024/9/4 16:17:45
M/N.:	EE7321	Power Rating:	AC120/60Hz
Mode:		Test Engineer:	linson
Note:	Test Mode 1:Standby, Powered by AC/DC Adapter form 120V~60Hz;Output 1: 110-205k ;None		

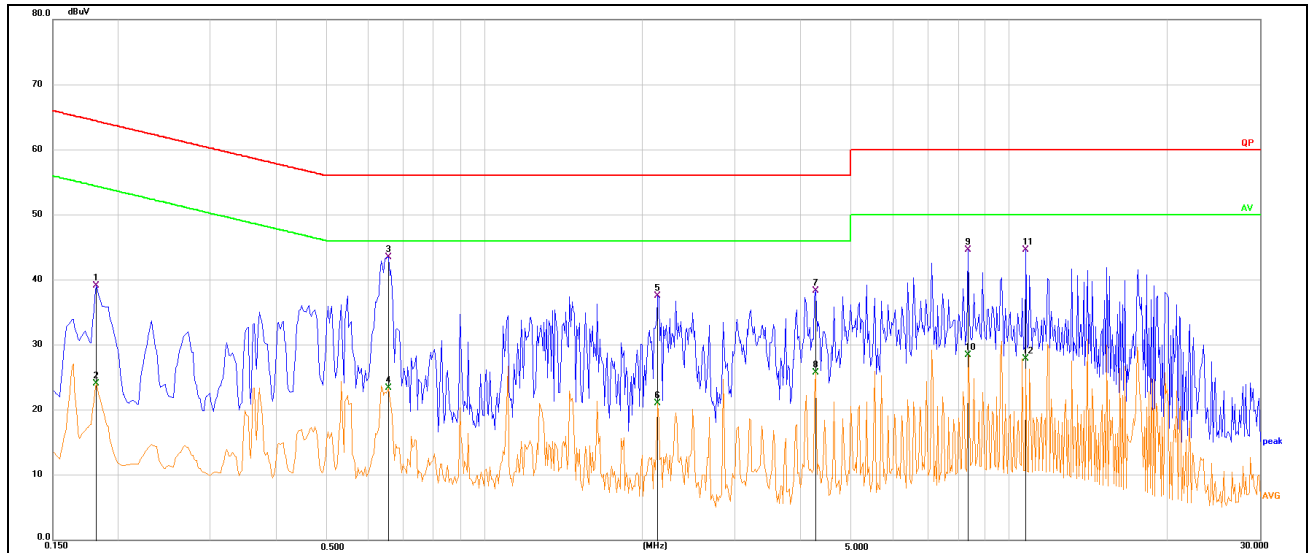


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1814	28.92	10.18	39.10	64.42	-25.32	QP
2	0.1814	13.85	10.18	24.03	54.42	-30.39	AVG
3	0.6540	33.29	10.20	43.49	56.00	-12.51	QP
4	0.6540	13.17	10.20	23.37	46.00	-22.63	AVG
5	2.1390	27.29	10.24	37.53	56.00	-18.47	QP
6	2.1390	10.79	10.24	21.03	46.00	-24.97	AVG
7	4.2720	28.13	10.24	38.37	56.00	-17.63	QP
8	4.2720	15.51	10.24	25.75	46.00	-20.25	AVG
9	8.3580	34.08	10.50	44.58	60.00	-15.42	QP
10	8.3580	17.89	10.50	28.39	50.00	-21.61	AVG
11	10.7520	34.07	10.49	44.56	60.00	-15.44	QP
12	10.7520	17.39	10.49	27.88	50.00	-22.12	AVG

Site:	LAB	Phase: N	Temperature(°C):25.0(°C)
Limit:	QP	atm.press.: 100.3 kpa	Humidity(%): 53.7%RH
EUT:	10W Wireless Charging Phone Holder	Test Time:	2024/9/4 16:19:16
M/N.:	EE7321	Power Rating:	AC120/60Hz
Mode:		Test Engineer:	linson
Note:	Test Mode 1:Standby, Powered by AC/DC Adapter form 120V~60Hz;Output 1: 110-205k ;None		

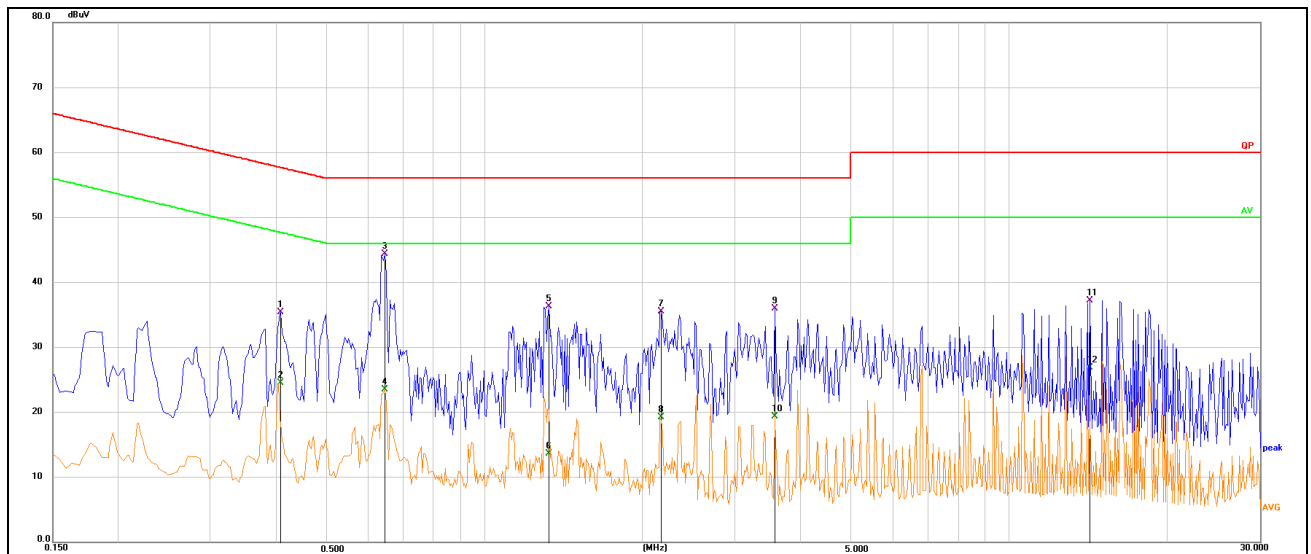


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.4063	25.19	10.20	35.39	57.72	-22.33	QP
2	0.4063	14.29	10.20	24.49	47.72	-23.23	AVG
3	0.6450	34.18	10.25	44.43	56.00	-11.57	QP
4	0.6450	13.21	10.25	23.46	46.00	-22.54	AVG
5	1.3245	26.05	10.22	36.27	56.00	-19.73	QP
6	1.3245	3.40	10.22	13.62	46.00	-32.38	AVG
7	2.1705	25.18	10.32	35.50	56.00	-20.50	QP
8	2.1705	8.92	10.32	19.24	46.00	-26.76	AVG
9	3.5834	25.76	10.25	36.01	56.00	-19.99	QP
10	3.5834	9.14	10.25	19.39	46.00	-26.61	AVG
11	14.2754	26.63	10.61	37.24	60.00	-22.76	QP
12	14.2754	16.27	10.61	26.88	50.00	-23.12	AVG

Site:	LAB	Phase: N	Temperature(°C):25.0(°C)
Limit:	QP	atm.press.: 100.3 kpa	Humidity(%): 53.7%RH
EUT:	10W Wireless Charging Phone Holder	Test Time:	2024/9/4 16:38:52
M/N.:	EE7321S5BLKPRIFOB	Power Rating:	AC120/60Hz
Mode:		Test Engineer:	linson
Note:	Test Mode 2:Direct contact During charging / operating between the EUT&; Output 1: 110-205kHz;Output 1: Test module (10W)		

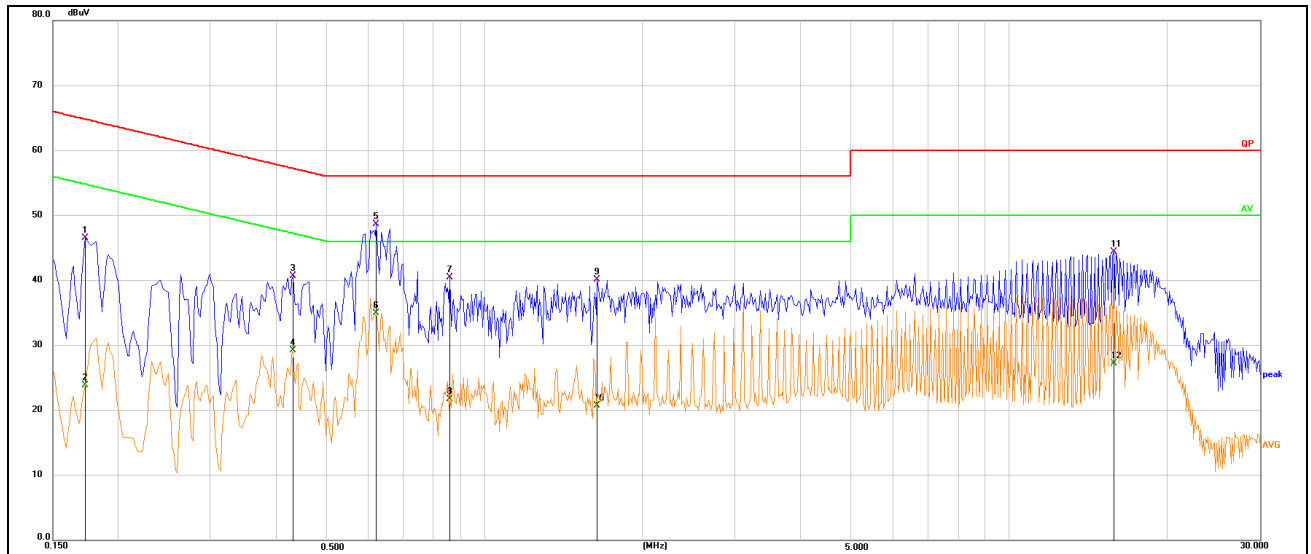


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1724	36.42	10.14	46.56	64.84	-18.28	QP
2	0.1724	13.72	10.14	23.86	54.84	-30.98	AVG
3	0.4290	30.44	10.21	40.65	57.27	-16.62	QP
4	0.4290	18.99	10.21	29.20	47.27	-18.07	AVG
5	0.6225	38.34	10.25	48.59	56.00	-7.41	QP
6	0.6225	24.75	10.25	35.00	46.00	-11.00	AVG
7	0.8610	30.23	10.21	40.44	56.00	-15.56	QP
8	0.8610	11.51	10.21	21.72	46.00	-24.28	AVG
9	1.6394	29.84	10.27	40.11	56.00	-15.89	QP
10	1.6394	10.40	10.27	20.67	46.00	-25.33	AVG
11	15.8055	33.73	10.66	44.39	60.00	-15.61	QP
12	15.8055	16.58	10.66	27.24	50.00	-22.76	AVG

Site:	LAB	Phase: L1	Temperature(°C):25.0(°C)
Limit:	QP	atm.press.: 100.3 kpa	Humidity(%): 53.7%RH
EUT:	10W Wireless Charging Phone Holder	Test Time:	2024/9/4 16:40:35
M/N.:	EE7321	Power Rating:	AC120/60Hz
Mode:		Test Engineer:	linson
Note:	Test Mode 2:Direct contact During charging / operating between the EUT&; Output 1: 110-205kHz;Output 1: Test module (10W)		

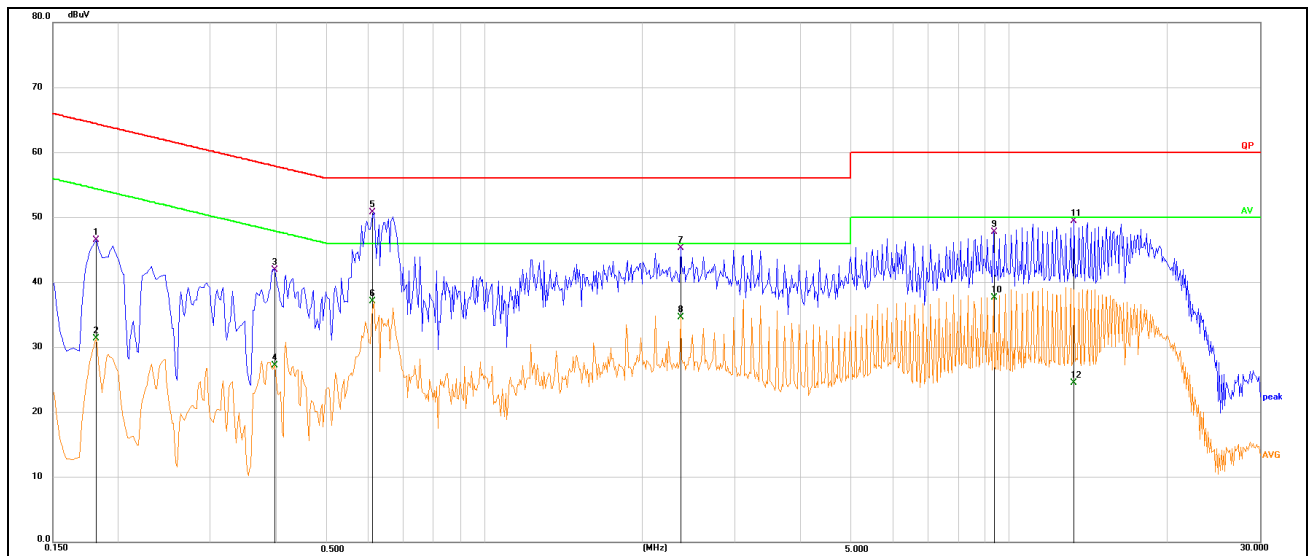


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1814	36.31	10.18	46.49	64.42	-17.93	QP
2	0.1814	21.19	10.18	31.37	54.42	-23.05	AVG
3	0.3975	31.78	10.12	41.90	57.91	-16.01	QP
4	0.3975	17.12	10.12	27.24	47.91	-20.67	AVG
5	0.6134	40.52	10.20	50.72	56.00	-5.28	QP
6	0.6134	26.86	10.20	37.06	46.00	-8.94	AVG
7	2.3640	34.99	10.24	45.23	56.00	-10.77	QP
8	2.3640	24.34	10.24	34.58	46.00	-11.42	AVG
9	9.3344	37.21	10.49	47.70	60.00	-12.30	QP
10	9.3344	27.18	10.49	37.67	50.00	-12.33	AVG
11	13.3170	38.93	10.49	49.42	60.00	-10.58	QP
12	13.3170	14.05	10.49	24.54	50.00	-25.46	AVG

Site:	LAB	Phase: L1	Temperature(°C):25.0(°C)
Limit:	QP	atm.press.: 100.3 kpa	Humidity(%): 53.7%RH
EUT:	10W Wireless Charging Phone Holder	Test Time:	2024/9/4 16:42:43
M/N.:	EE7321	Power Rating:	AC120/60Hz
Mode:		Test Engineer:	linson
Note:	Test Mode 3:WPT Client. EUT is powered by AC/DC adapter. 120V~60Hz; Output 1: 110-205kHz;Output 1: Test module (5W)		

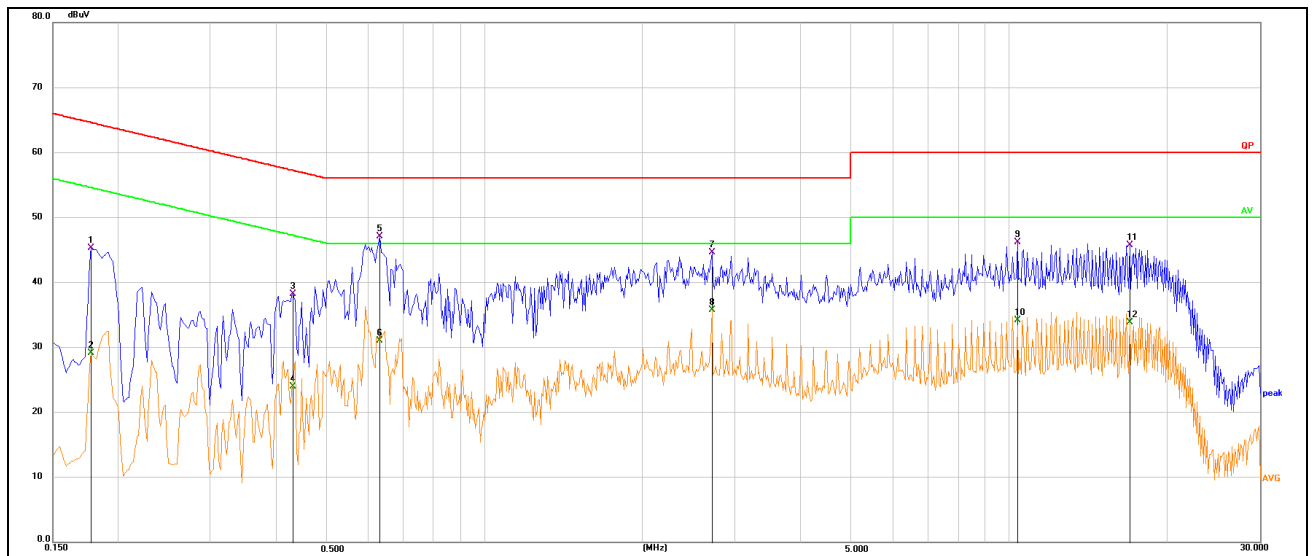

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1770	35.07	10.18	45.25	64.63	-19.38	QP
2	0.1770	18.89	10.18	29.07	54.63	-25.56	AVG
3	0.4290	28.05	10.14	38.19	57.27	-19.08	QP
4	0.4290	13.83	10.14	23.97	47.27	-23.30	AVG
5	0.6314	36.92	10.19	47.11	56.00	-8.89	QP
6	0.6314	20.78	10.19	30.97	46.00	-15.03	AVG
7	2.7105	34.37	10.25	44.62	56.00	-11.38	QP
8	2.7105	25.49	10.25	35.74	46.00	-10.26	AVG
9	10.3740	35.72	10.48	46.20	60.00	-13.80	QP
10	10.3740	23.68	10.48	34.16	50.00	-15.84	AVG
11	16.9710	35.05	10.62	45.67	60.00	-14.33	QP
12	16.9710	23.21	10.62	33.83	50.00	-16.17	AVG

Site:	LAB	Phase: L1	Temperature(°C):25.0(°C)
Limit:	QP	atm.press.: 100.3 kpa	Humidity(%): 53.7%RH
EUT:	10W Wireless Charging Phone Holder	Test Time:	2024/9/4 16:44:19
M/N.:	EE7321	Power Rating:	AC120/60Hz
Mode:		Test Engineer:	linson
Note:	Test Mode 3:WPT Client. EUT is powered by AC/DC adapter. 120V~60Hz; Output 1: 110-205kHz;Output 1: Test module (5W)		

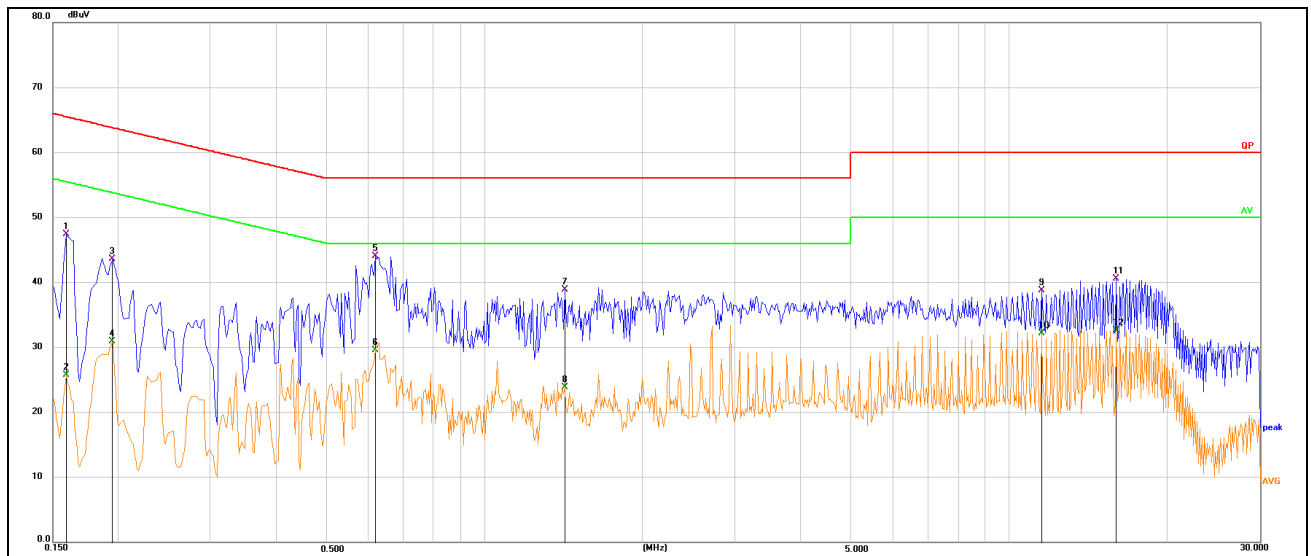

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1590	37.16	10.20	47.36	65.52	-18.16	QP
2	0.1590	15.51	10.20	25.71	55.52	-29.81	AVG
3	0.1949	33.48	10.16	43.64	63.83	-20.19	QP
4	0.1949	20.72	10.16	30.88	53.83	-22.95	AVG
5	0.6180	33.86	10.20	44.06	56.00	-11.94	QP
6	0.6180	19.40	10.20	29.60	46.00	-16.40	AVG
7	1.4234	28.57	10.29	38.86	56.00	-17.14	QP
8	1.4234	13.56	10.29	23.85	46.00	-22.15	AVG
9	11.5485	28.26	10.49	38.75	60.00	-21.25	QP
10	11.5485	21.60	10.49	32.09	50.00	-17.91	AVG
11	16.0260	30.01	10.56	40.57	60.00	-19.43	QP
12	16.0260	22.00	10.56	32.56	50.00	-17.44	AVG