



FCC Test Report

FCC Part 22,24 / RSS 132,133

FOR:

Satellite, EDGE, 802.11, GPS in one unit with RS-232 and Ethernet capabilities

**MODEL #: Wireless Matrix Corporation
MBS2-LP EDGE
Wireless Matrix Corporation
12369-B Sunrise Valley Drive
Reston, VA 20191
USA**

**FCC ID: P5IMBS2LPE
IC-ID: 1478A-MBS2LPE**

**TEST REPORT #: EMC_WIREL_010_06002_FCC22_24
DATE: 2006-11-06**



**FCC listed#
101450**

**IC recognized #
3925**

CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: info@cetecomusa.com ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM



Table of Contents

1	ASSESSMENT	3
	<i>EMC & Radio.....</i>	<i>3</i>
2	ADMINISTRATIVE DATA.....	4
2.1	IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT.....	4
2.2	IDENTIFICATION OF THE CLIENT	4
2.3	IDENTIFICATION OF THE MANUFACTURER.....	4
3	EQUIPMENT UNDER TEST (EUT).....	5
3.1	SPECIFICATION OF THE EQUIPMENT UNDER TEST	5
3.2	IDENTIFICATION OF THE EQUIPMENT UNDER TEST (EUT)	6
4	SUBJECT OF INVESTIGATION.....	7
5	MEASUREMENTS.....	8
5.1	RF POWER OUTPUT	8
5.1.1	FCC 2.1046 Measurements required: RF power output.....	8
5.1.2	Limits:	8
5.1.2.1	FCC 22.913 (a) Effective radiated power limits.	8
5.1.2.2	FCC 24.232 (b)(c) Power limits.	8
5.1.3	Radiated Output Power Measurement procedure:.....	8
5.1.4	ERP Results 850 MHz band:	10
5.1.5	EIRP Results 1900 MHz band:.....	10
5.2	SPURIOUS EMISSIONS RADIATED	23
5.2.1	FCC 2.1053 Measurements required: Field strength of spurious radiation.....	23
5.2.2	Limits:	23
5.2.2.1	FCC 22.917 Emission limitations for cellular equipment.	23
5.2.2.2	FCC 24.238 Emission limitations for Broadband PCS equipment.	23
5.2.3	Radiated out of band measurement procedure:	24
5.2.4	Radiated out of band emissions results on EUT:	26
5.2.4.1	RESULTS OF RADIATED TESTS GSM-850:	26
	RADIATED SPURIOUS EMISSIONS (GSM-850)	26
	RADIATED SPURIOUS EMISSIONS (GSM-850)	27
5.2.4.2	RESULTS OF RADIATED TESTS PCS-1900:	37
5.3	RECEIVER RADIATED EMISSIONS § 2.1053 / RSS-132 & 133	46
5.3.1	Receiver Spurious on EUT 850 MHz	47
5.3.2	Receiver Spurious on EUT 1900 MHz	50
6	REFERENCES.....	55
7	BLOCK DIAGRAMS	56



1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and in compliance with the applicable criteria specified in Industry Canada rules RSS132 and RSS133.

Company	Description	Model #
Wireless Matrix	Satellite, EDGE, 802.11,GPS in one unit with RS-232 and Ethernet capabilities	MBS2-LP EDGE

Technical responsibility for area of testing:

2006-11-06 EMC & Radio Lothar Schmidt
(Test Lab Manager)

A handwritten signature in blue ink, appearing to read "Lothar Schmidt", written over a horizontal line.

Date	Section	Name	Signature
------	---------	------	-----------

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.



2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	EMC
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Lothar Schmidt
Responsible Project Leader:	Satya Radhakrishna
Date of test:	2006-10-09 to 2006-11-03

2.2 Identification of the Client

Applicant's Name:	Wireless Matrix Corporation
Street Address:	12369-B Sunrise Valley Drive
City/Zip Code	Reston, VA 20191
Country	USA
Contact Person:	Darryl Strucko
Phone No.	703.262.4021
Fax:	703.262.0380
e-mail:	Darrvl.strucko@wrx-us.com

2.3 Identification of the Manufacturer

Manufacturer's Name:	Wireless Matrix Corporation
Manufacturers Address:	12369-B Sunrise Valley Drive
City/Zip Code	Reston, VA 20191
Country	USA

3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

Marketing Name:	Mobile Base Station 2 Low Profile with EDGE(MBS2-LP EDGE)
Description:	Satellite, EDGE, 802.11,GPS in one unit with RS-232 and Ethernet capabilities
Model No:	MBS2-LP EDGE
FCC ID:	P5IMBS2LPE
IC ID:	1478A-MBS2LPE
Frequency Range:	824.2MHz – 848.8MHz for GSM 850 1850.2MHz – 1909.8MHz for PCS 1900
Type(s) of Modulation:	GFSK
Number of Channels:	GSM
Antenna Type:	GSM:Monopole @ 6-7 dBi max, Satellite: Spiral @ 4.5 dBi max,802.11: Elevated Dipole @ 6.5 dBi max
Max. Output Power:	0.6W @ 850 MHz, 1W @ 1900 MHz



3.2 Identification of the Equipment Under Test (EUT)

EUT #	TYPE	MANF.	MODEL	SERIAL #
1	Satellite, EDGE, 802.11,GPS in one unit with RS-232 and Ethernet capabilities	Wireless Matrix Corporation	MBS2-LP EDGE	4050014316
2	Satellite, EDGE, 802.11,GPS in one unit with RS-232 and Ethernet capabilities	Wireless Matrix Corporation	MBS2-LP EDGE	4050014315



4 Subject of Investigation

All testing was performed on the EUT listed in Section 3. The EUT was maximized in the X,Y, Z positions , all data in this report shows the worst case between horizontal and vertical polarization for above 1GHz.

The EUT carries a pre-certified EGPRS module with FCC ID# IHDT56FV2.

This test report contains full radiated testing as per FCC 22/24 on the EUT with the pre-certified EGPRS module. All conducted measurements are covered under test report# MOTRAD_FCC.17025_REV1.PDF

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS132 and RSS133.

5 Measurements

5.1 RF Power Output

5.1.1 FCC 2.1046 Measurements required: RF power output.

Power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on circuit elements as specified. The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

5.1.2 Limits:

5.1.2.1 FCC 22.913 (a) Effective radiated power limits.

The effective radiated power (ERP) of mobile transmitters must not exceed 7 Watts.

5.1.2.2 FCC 24.232 (b)(c) Power limits.


(b) Mobile/portable stations are limited to 2 Watts effective isotropic radiated power (EIRP).

(c) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement over the full bandwidth of the channel.

5.1.3 Radiated Output Power Measurement procedure:

Based on TIA-603C 2004

2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic Radiated Power (EIRP)

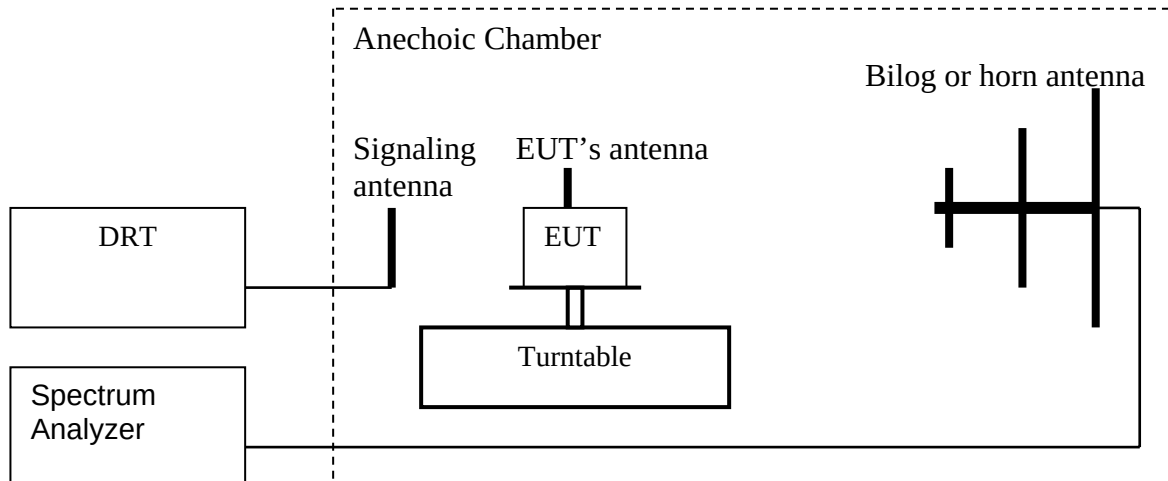

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a vertical orientation.



2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
 3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
 4. Rotate the EUT 360°. Record the peak level in dBm (**LVL**).
 5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
 6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
 7. Determine the ERP using the following equation:
ERP (dBm) = LVL (dBm) + LOSS (dB)
 8. Determine the EIRP using the following equation:
EIRP (dBm) = ERP (dBm) + 2.14 (dB)
 9. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band. **Spectrum analyzer settings = rbw=vbw=3MHz**
- (note: Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4, 7 and 8 above are performed with test software.)



5.1.4 ERP Results 850 MHz band:

Power Control Level	Burst Peak ERP
5	≤38.45dBm (7W)

Frequency (MHz)	Effective Radiated Power (dBm)	
	GPRS	EGPRS
824.2	24.64	22.14
836.6	25.93	24.42
848.8	27.19	25.19

5.1.5 EIRP Results 1900 MHz band:

Power Control Level	Burst Peak EIRP
0	≤33dBm (2W)

Frequency (MHz)	Effective Isotropic Radiated Power (dBm)	
1850.2	26.87	26.31
1880.0	29.16	28.47
1909.8	27.72	27.6



**EIRP (GSM 850)
CHANNEL 128 GPRS**


§22.913(a)

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "EIRP 850 CH 128 V"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
819.2 MHz	829.2 MHz	MaxPeak MaxPeak	Coupled	3 MHz	DUMMY-DBM

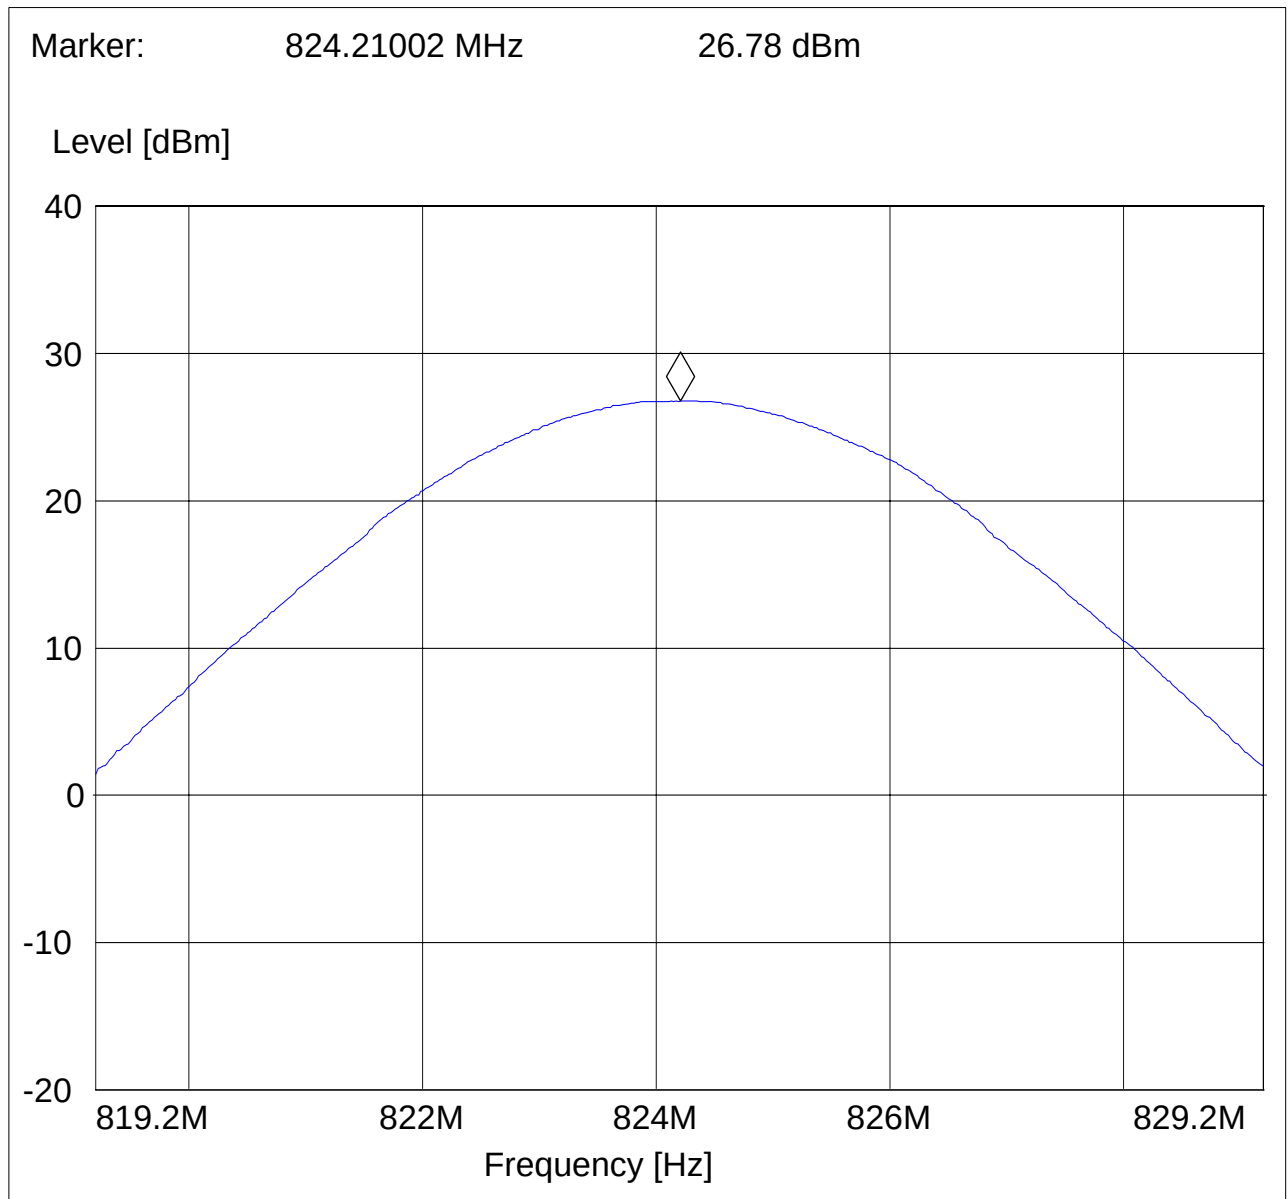



EIRP (GSM 850)
CHANNEL 190 GPRS

§22.913(a)


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "EIRP 850 CH 190 H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
831.6 MHz	841.6 MHz	MaxPeak MaxPeak	Coupled	3 MHz	DUMMY-DBM

Marker: 836.69018 MHz 28.07 dBm

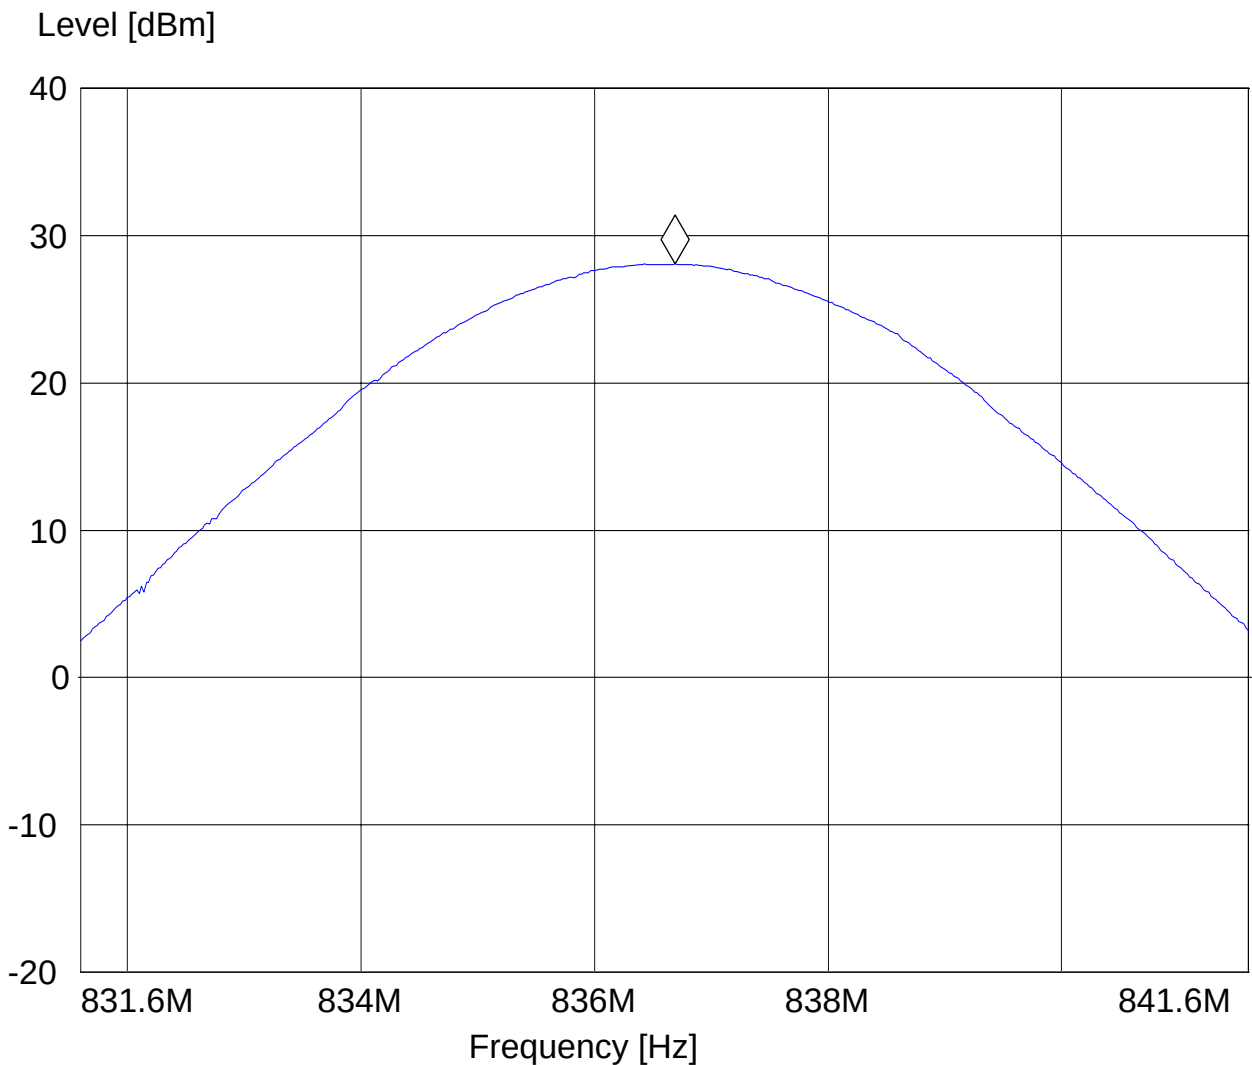



**EIRP (GSM 850)
CHANNEL 251 GPRS**


§22.913(a)

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "EIRP 850 CH 251 H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
843.8 MHz	853.8 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

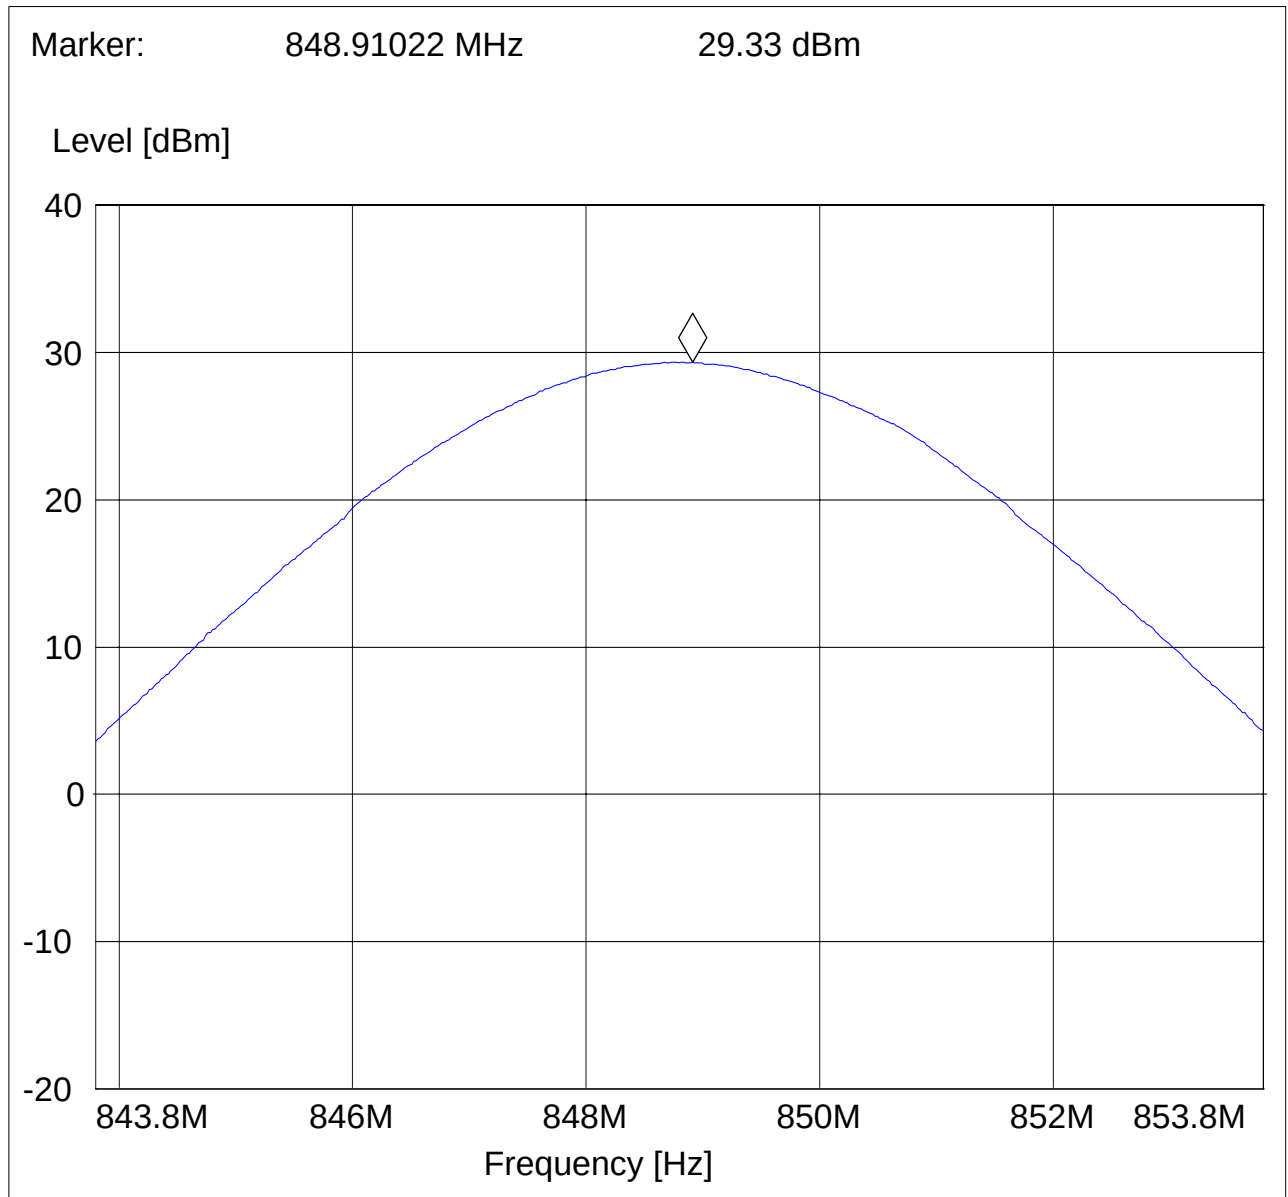



**EIRP (GSM 850)
CHANNEL 128 EGPRS**


§22.913(a)

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "EIRP 850 CH 128 V"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
819.2 MHz	829.2 MHz	MaxPeak MaxPeak	Coupled	3 MHz	DUMMY-DBM

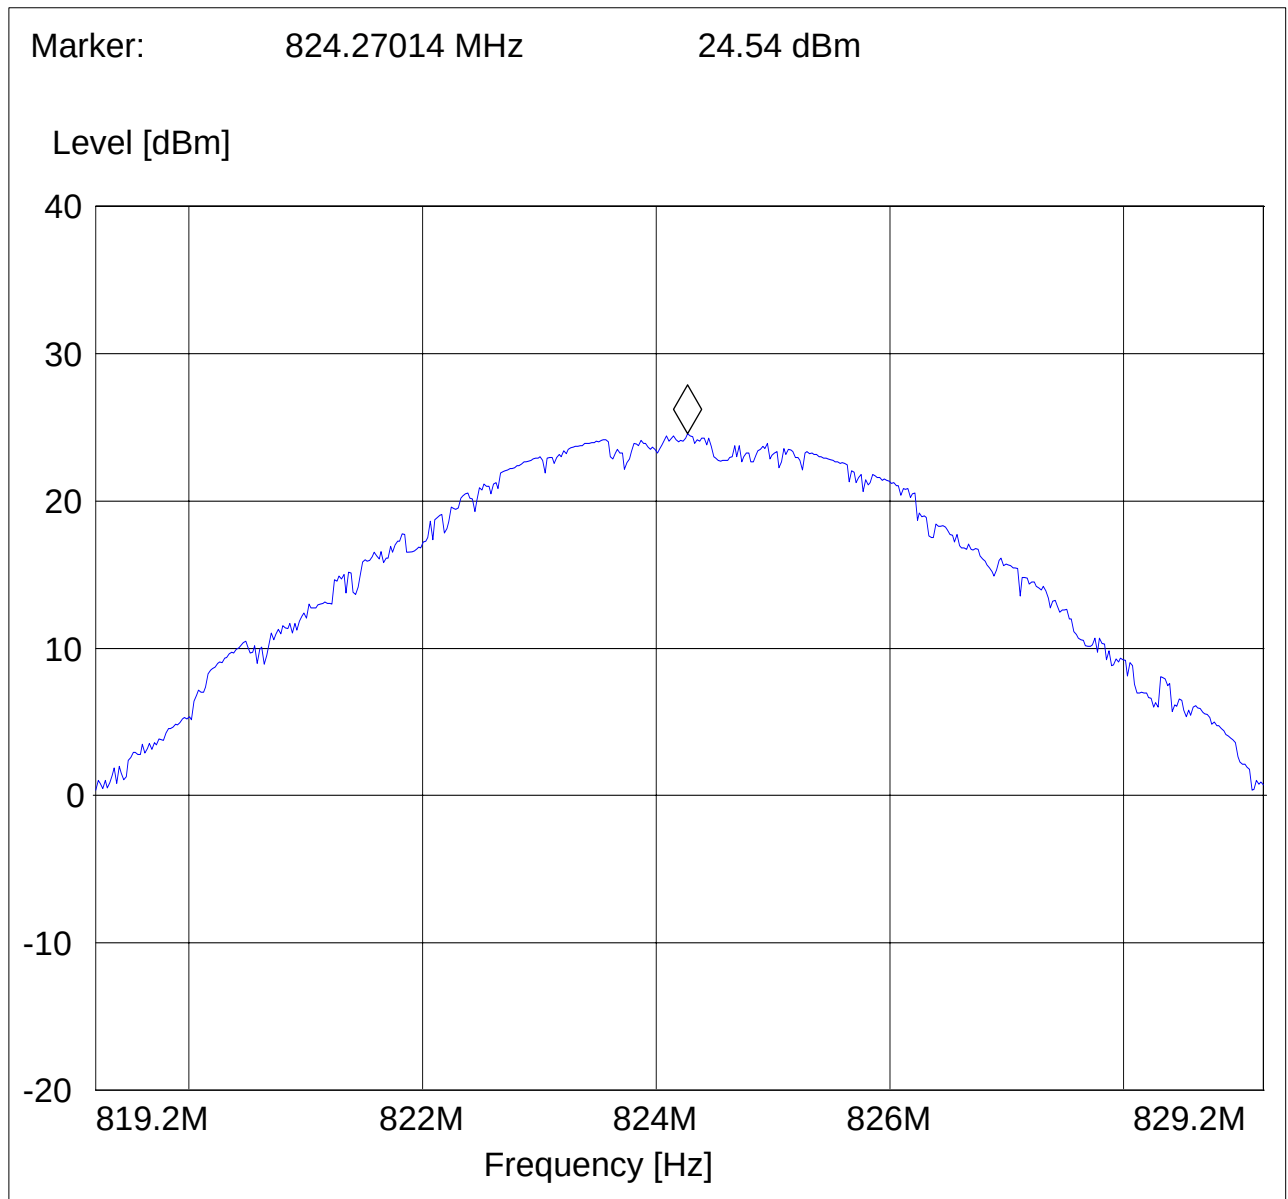

Note: The unit had stability issues with the connection status in EGPRS mode therefore curve is not filled up entirely. Sweep is performed till maximum is obtained and recorded.



EIRP (GSM 850)
CHANNEL 190 EGPRS


§22.913(a)

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "EIRP 850 CH 190 H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
831.6 MHz	841.6 MHz	MaxPeak MaxPeak	Coupled	3 MHz	DUMMY-DBM

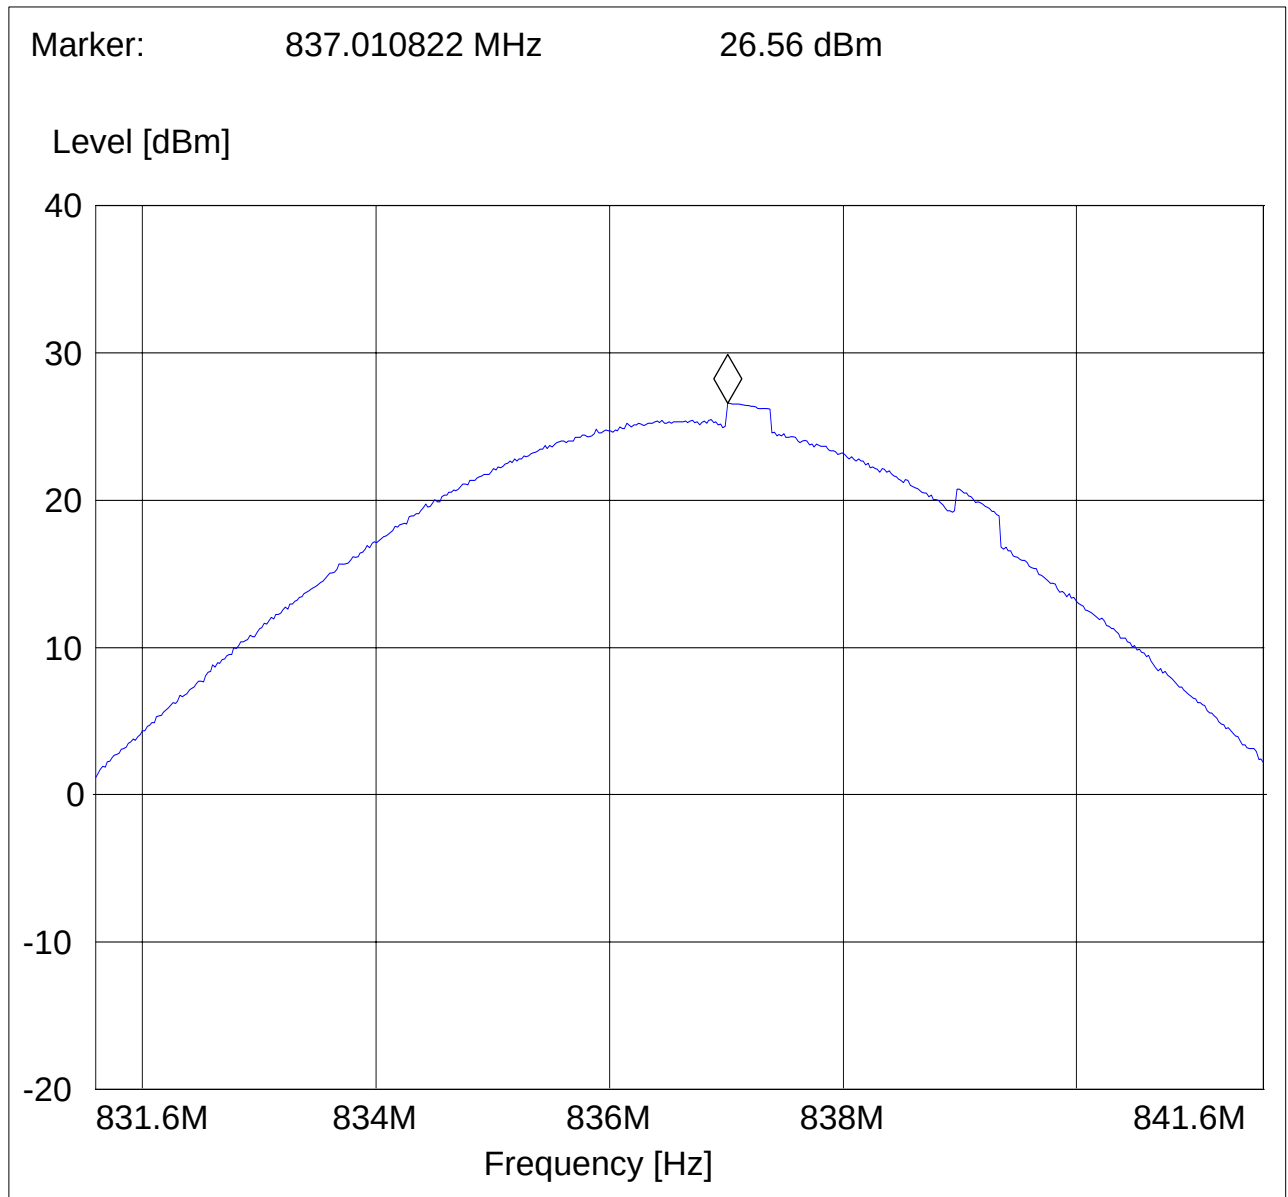

Note: The unit had stability issues with the connection status in EGPRS mode therefore curve is not filled up entirely. Sweep is performed till maximum is obtained and recorded.



EIRP (GSM 850)
CHANNEL 251 EGPRS


§22.913(a)

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "EIRP 850 CH 251 H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
843.8 MHz	853.8 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

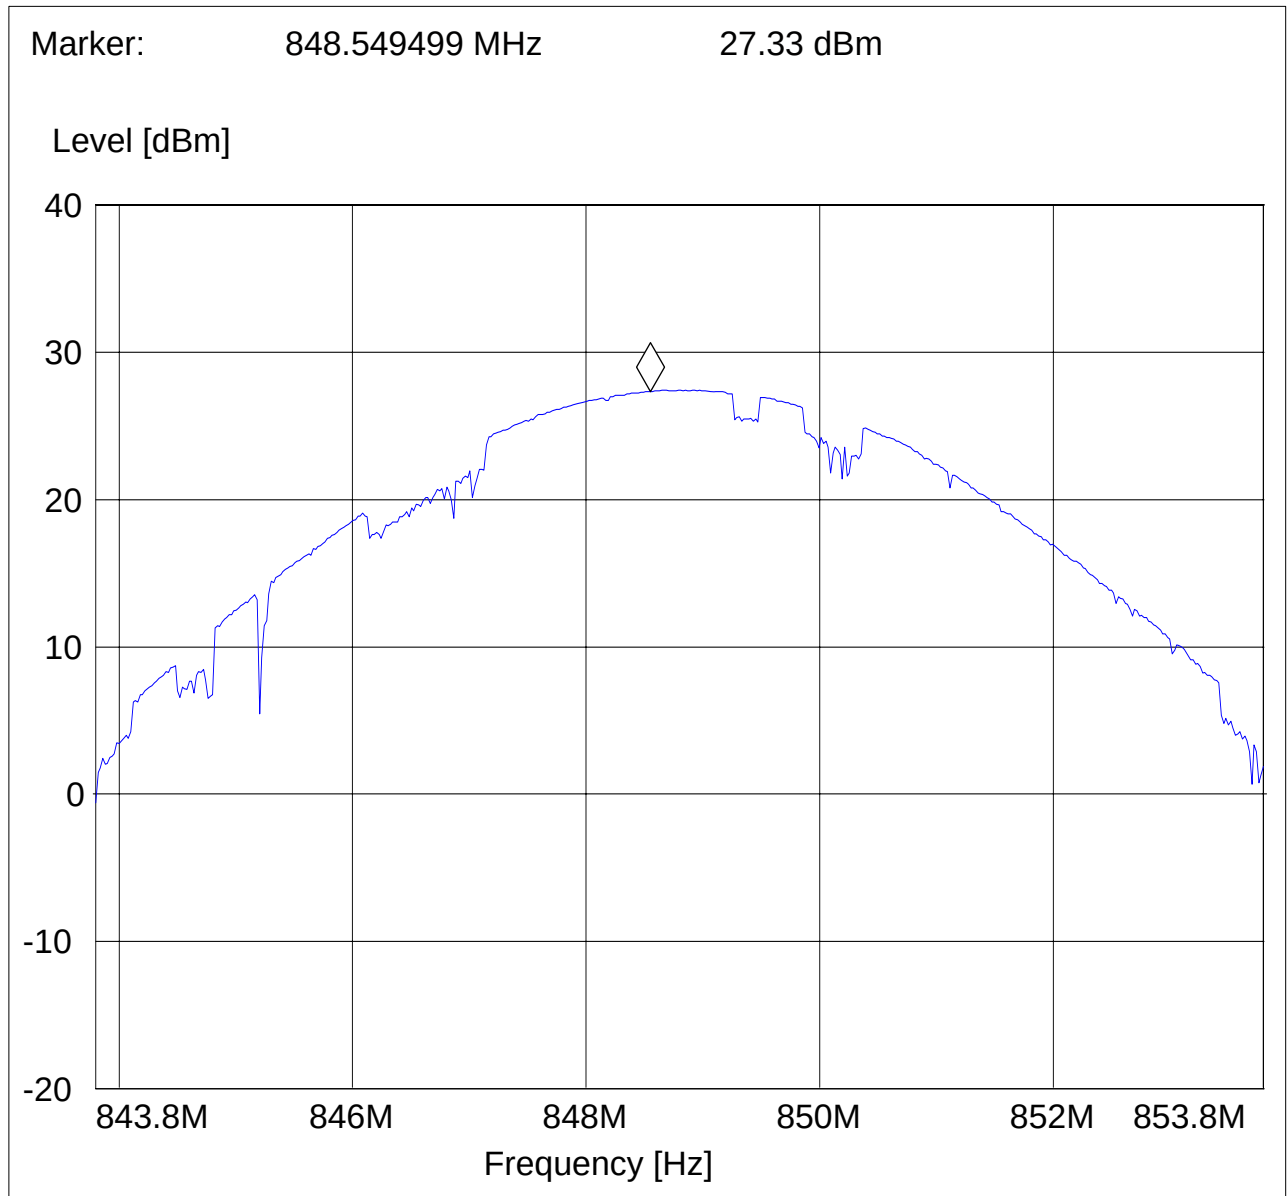

Note: The unit had stability issues with the connection status in EGPRS mode therefore curve is not filled up entirely. Sweep is performed till maximum is obtained and recorded.



**EIRP (PCS-1900)
CHANNEL 512 GPRS**

§24.232(b)


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "EIRP 1900 CH512"

Short Description:		EIRP PCS 1900 for channel-512			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.8 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

Marker: 1.8501499 GHz 26.87 dBm

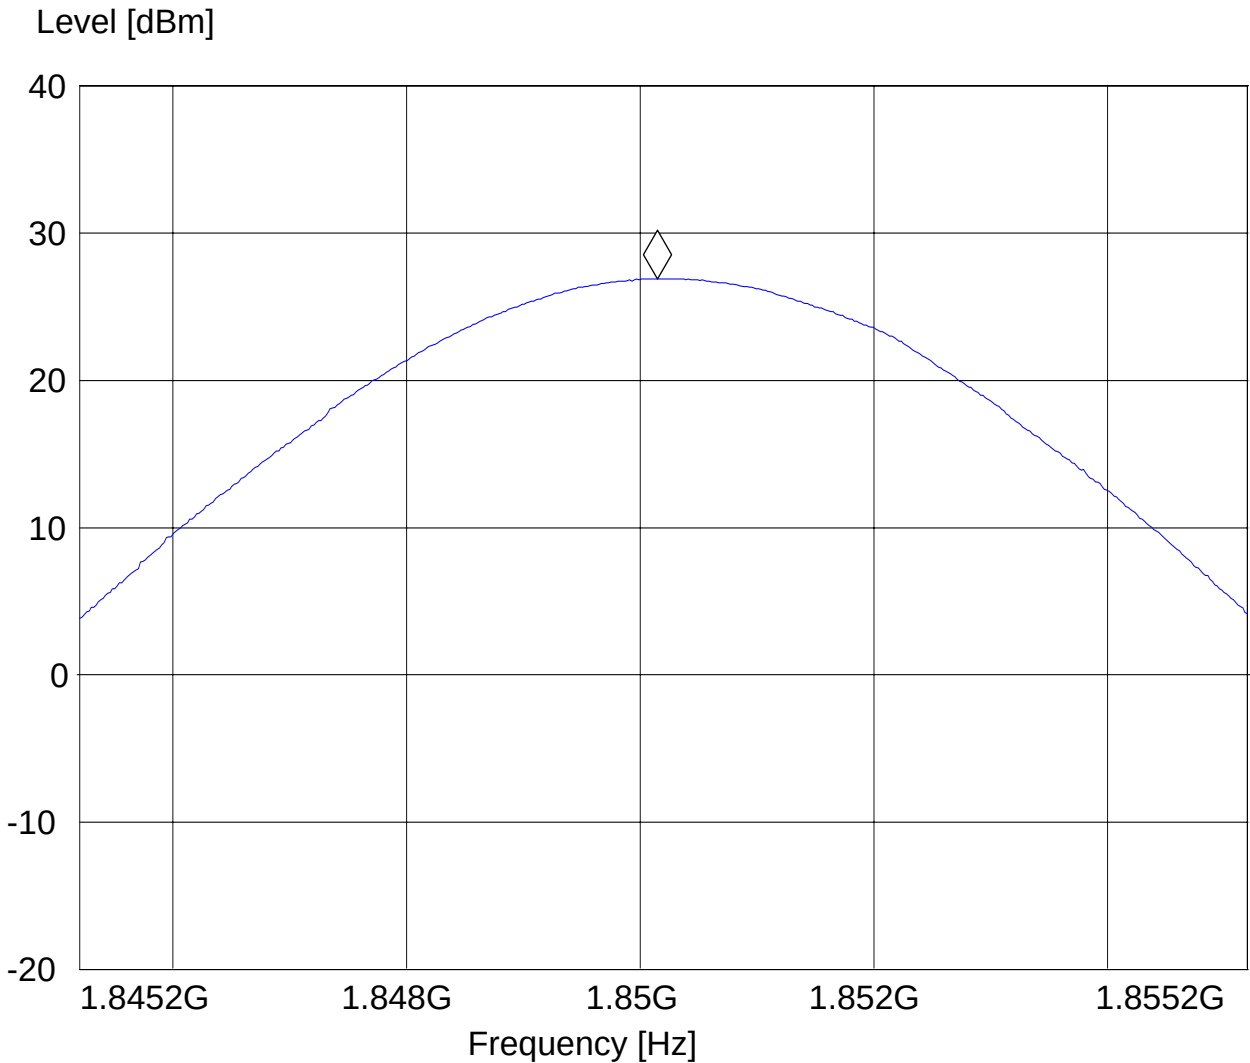


**EIRP (PCS-1900)
CHANNEL 661 GPRS**

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "EIRP 1900 CH661"

Short Description:		EIRP PCS 1900 for channel-661			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.9 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

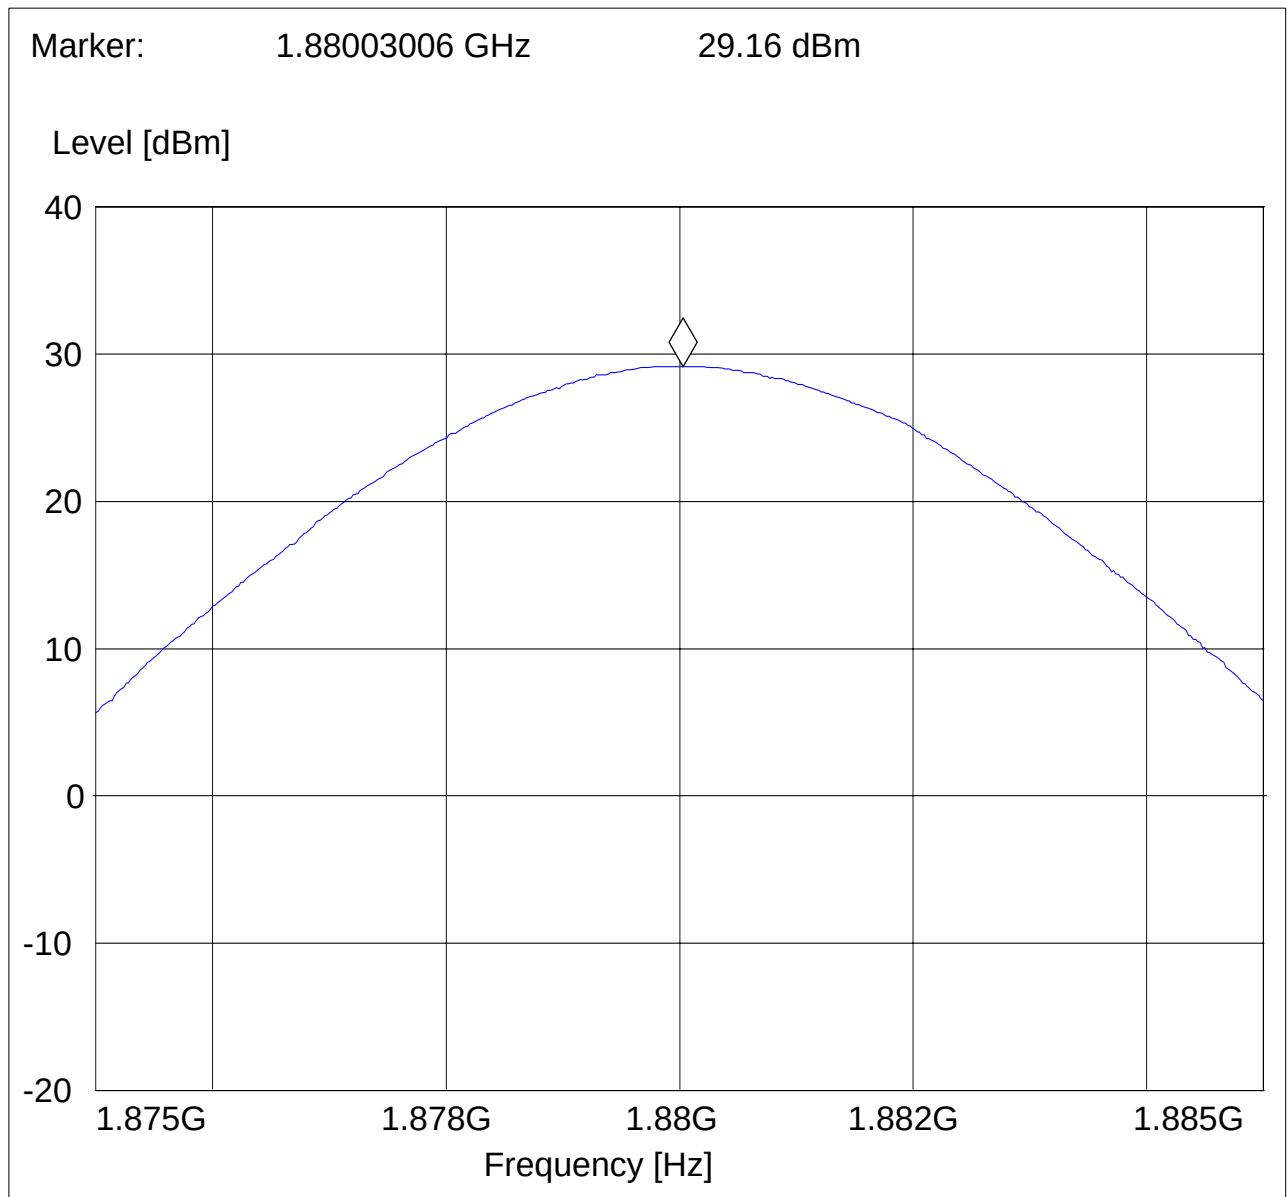


**EIRP (PCS-1900)
CHANNEL 810 GPRS**

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "EIRP 1900 CH810"

Short Description:		EIRP PCS 1900 for channel-810			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.9 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

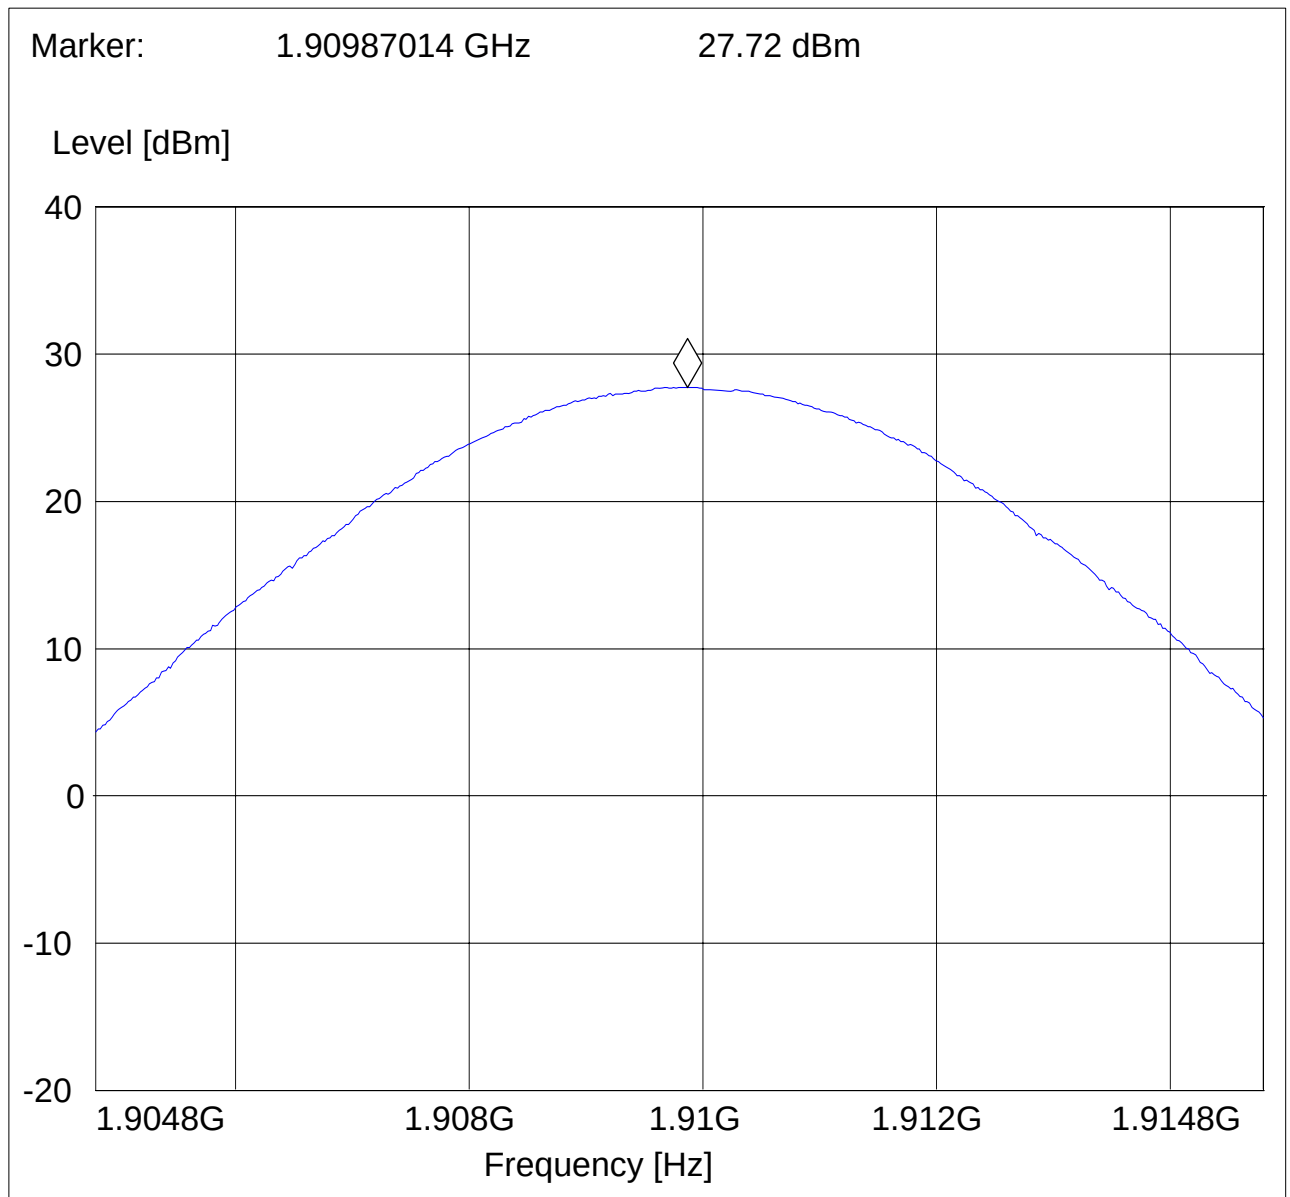



**EIRP (PCS-1900)
CHANNEL 512 EGPRS**


§24.232(b)

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "EIRP 1900 CH512"

Short Description:		EIRP PCS 1900 for channel-512			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.8 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

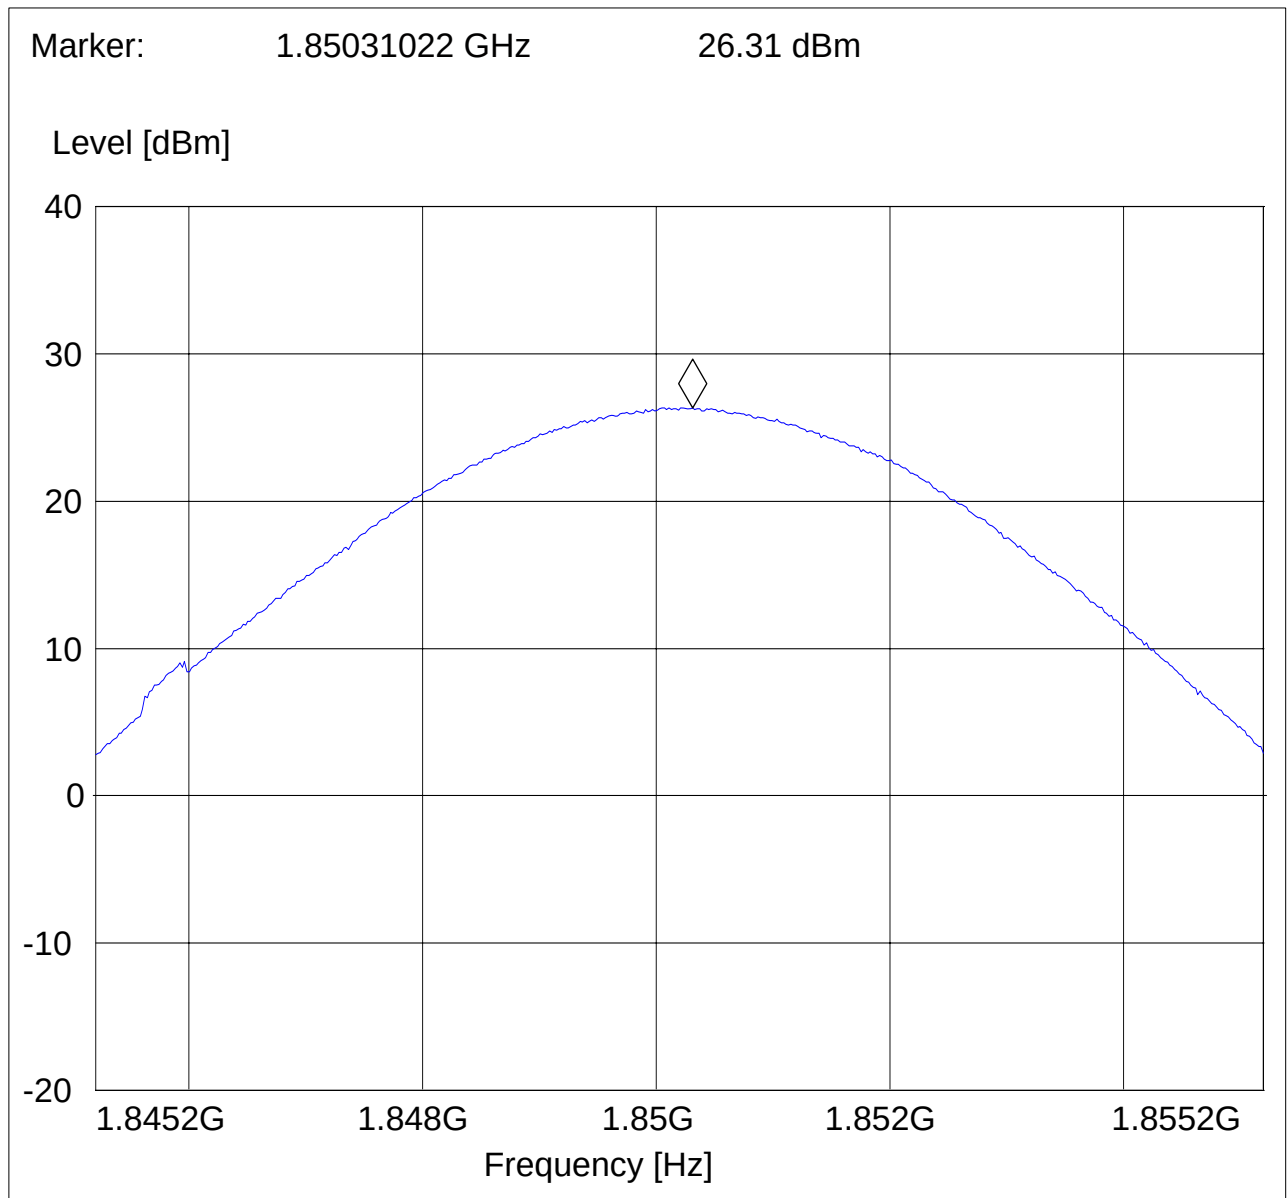

Note: The unit had stability issues with the connection status in EGPRS mode therefore curve is not filled up entirely. Sweep is performed till maximum is obtained and recorded.


**EIRP (PCS-1900)
CHANNEL 661 EGPRS**

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "EIRP 1900 CH661"

Short Description:		EIRP PCS 1900 for channel-661			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.9 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

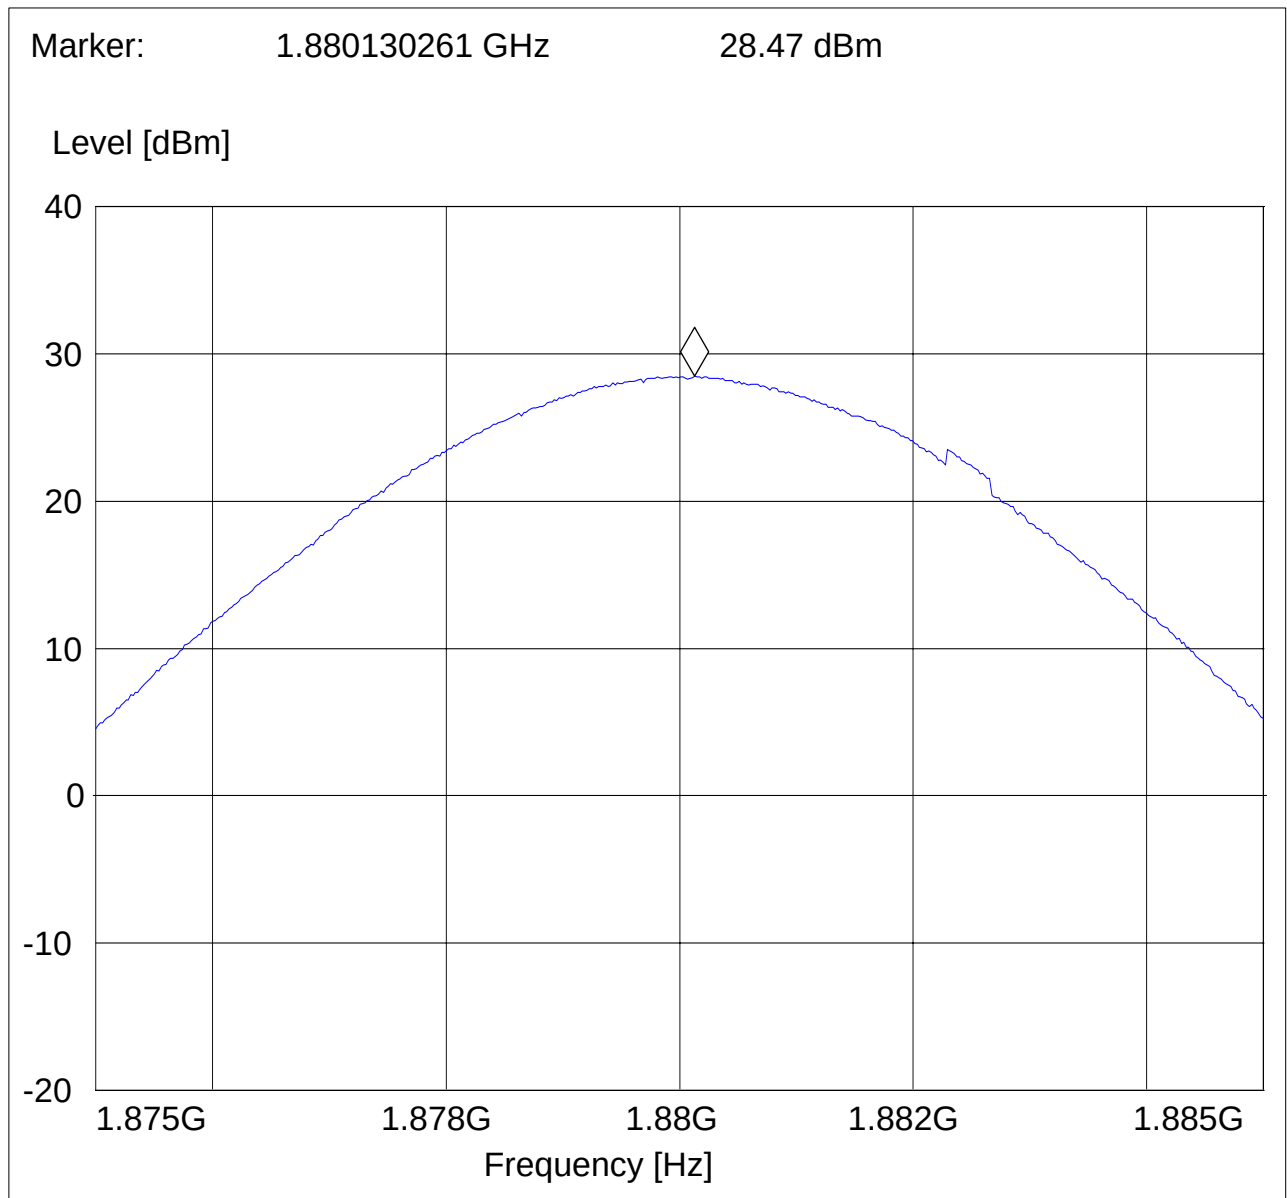

Note: The unit had stability issues with the connection status in EGPRS mode therefore curve is not filled up entirely. Sweep is performed till maximum is obtained and recorded.



**EIRP (PCS-1900)
 CHANNEL 810 EGPRS**


§24.232(b)

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "EIRP 1900 CH810"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.9 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

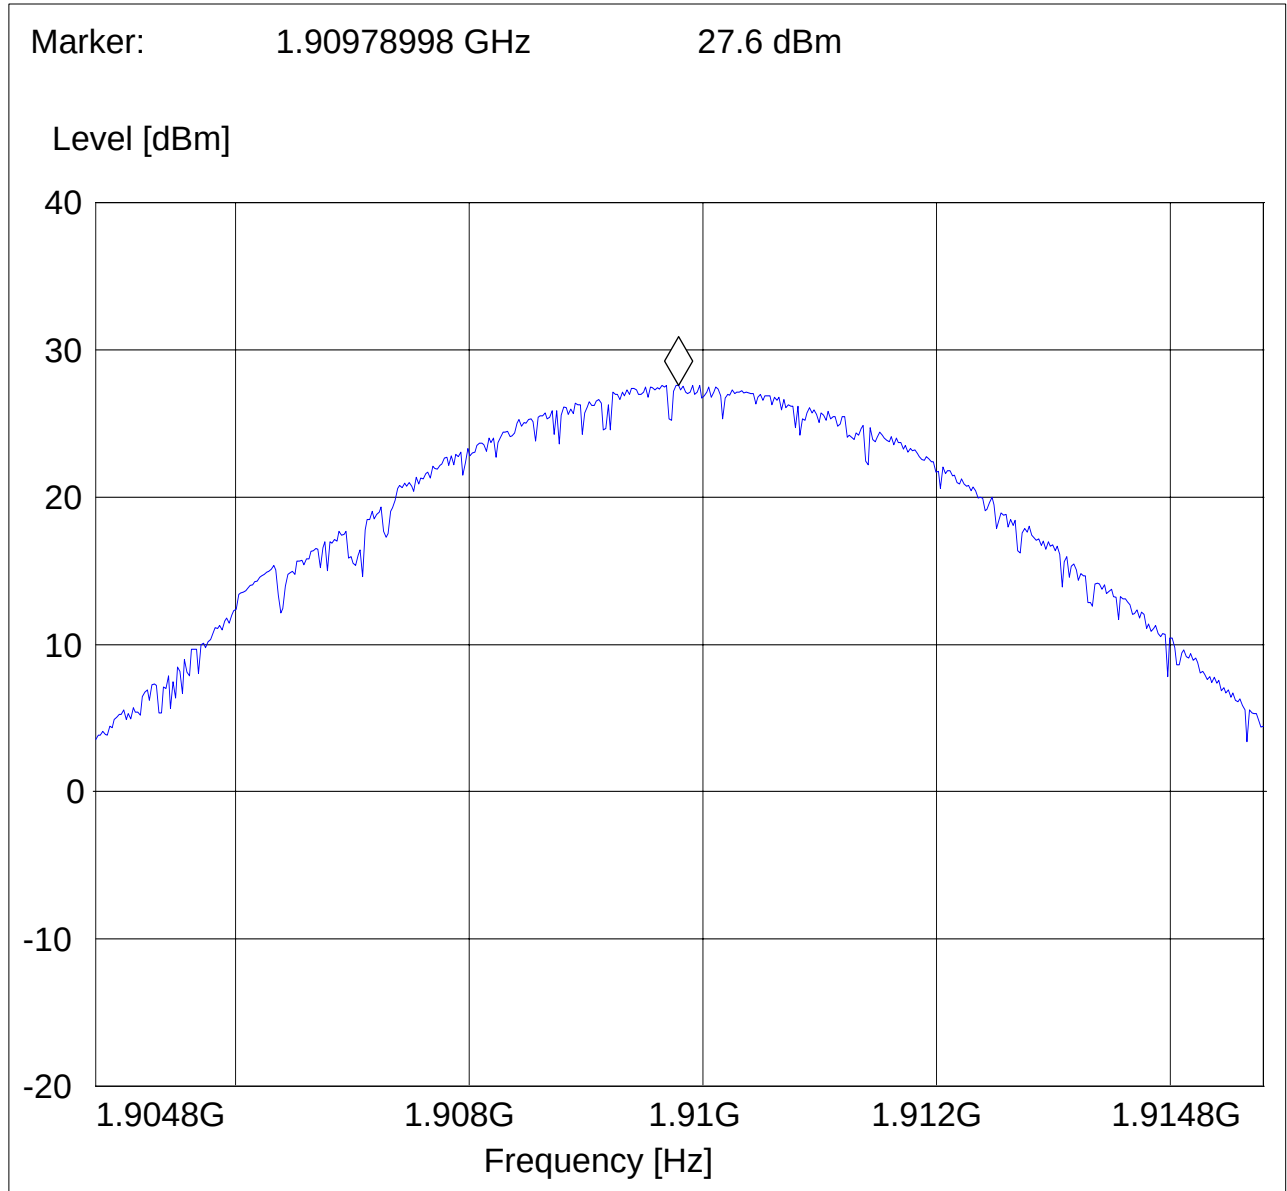

Note: The unit had stability issues with the connection status in EGPRS mode therefore curve is not filled up entirely. Sweep is performed till maximum is obtained and recorded.

5.2 Spurious Emissions Radiated

5.2.1 FCC 2.1053 Measurements required: Field strength of spurious radiation.

- (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

5.2.2 Limits:

5.2.2.1 FCC 22.917 Emission limitations for cellular equipment.

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.2.2.2 FCC 24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.


- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required

measurement bandwidth (i.e. 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.2.3 Radiated out of band measurement procedure:

Based on TIA-603C 2004 2.2.12 Unwanted emissions: Radiated Spurious

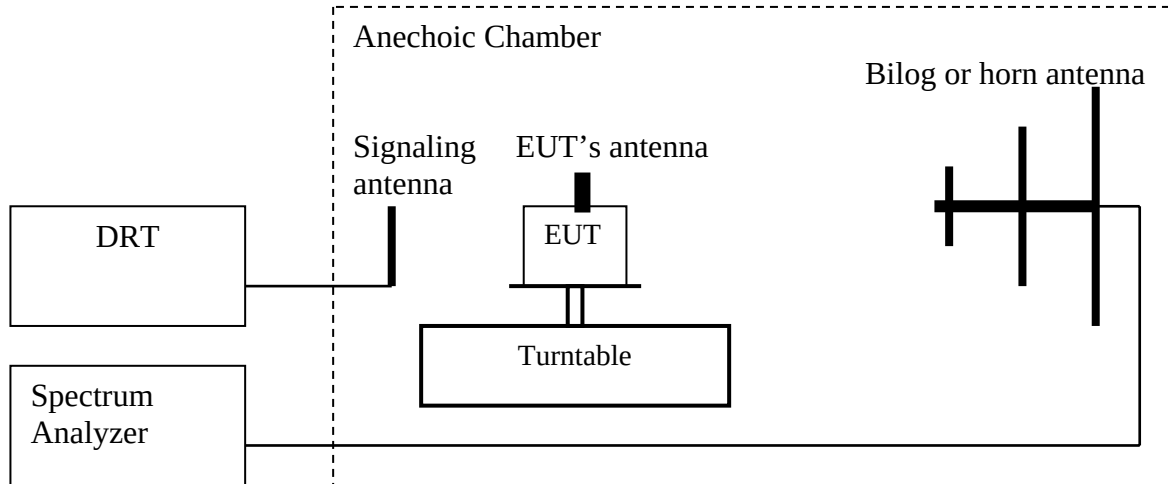

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360°. Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360° at each height to maximize all emissions. Measure and record all spurious emissions (**LVL**) up to the tenth harmonic of the carrier frequency.
5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
7. Determine the level of spurious emissions using the following equation:
Spurious (dBm) = **LVL** (dBm) + **LOSS** (dB):
8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
9. Determine the level of spurious emissions using the following equation:
Spurious (dBm) = **LVL** (dBm) + **LOSS** (dB):
10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.



(note: Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)

Spectrum analyzer settings:

Res B/W: 1 MHz

Vid B/W: 1 MHz

Measurement Survey:

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the GSM-850 & PCS-1900 bands. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the GSM-850 & PCS-1900 band into any of the other blocks respectively. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.



5.2.4 Radiated out of band emissions results on EUT:

5.2.4.1 RESULTS OF RADIATED TESTS GSM-850:

Harmonics	Tx ch-128 Freq. (MHz)	Level (dBm)	Tx ch-190 Freq. (MHz)	Level (dBm)	Tx ch-251 Freq. (MHz)	Level (dBm)
2	1648.4	NF	1673.2	NF	1697.6	NF
3	2472.6	NF	2509.8	NF	2546.4	NF
4	3296.8	NF	3346.4	NF	3395.2	NF
5	4121	NF	4183	NF	4244	NF
6	4945.2	NF	5019.6	NF	5092.8	NF
7	5769.4	NF	5856.2	NF	5941.6	NF
8	6593.6	NF	6692.8	NF	6790.4	NF
9	7417.8	NF	7529.4	NF	7639.2	NF
10	8242	NF	8366	NF	8488	NF
NF = NOISE FLOOR						



RADIATED SPURIOUS EMISSIONS (GSM-850)

TX: 30MHz - 1GHz Spurious emission limit -13dBm

Antenna: vertical **Note: 1.** The peak above the limit line is the carrier freq.
2. This plot is valid for low, mid & high channels (worst-case plot)


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "FCC 24 Spur 30M-1G_V"

Short Description:		FCC 24 30MHz-1GHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 825.0501 MHz 25.87 dBm

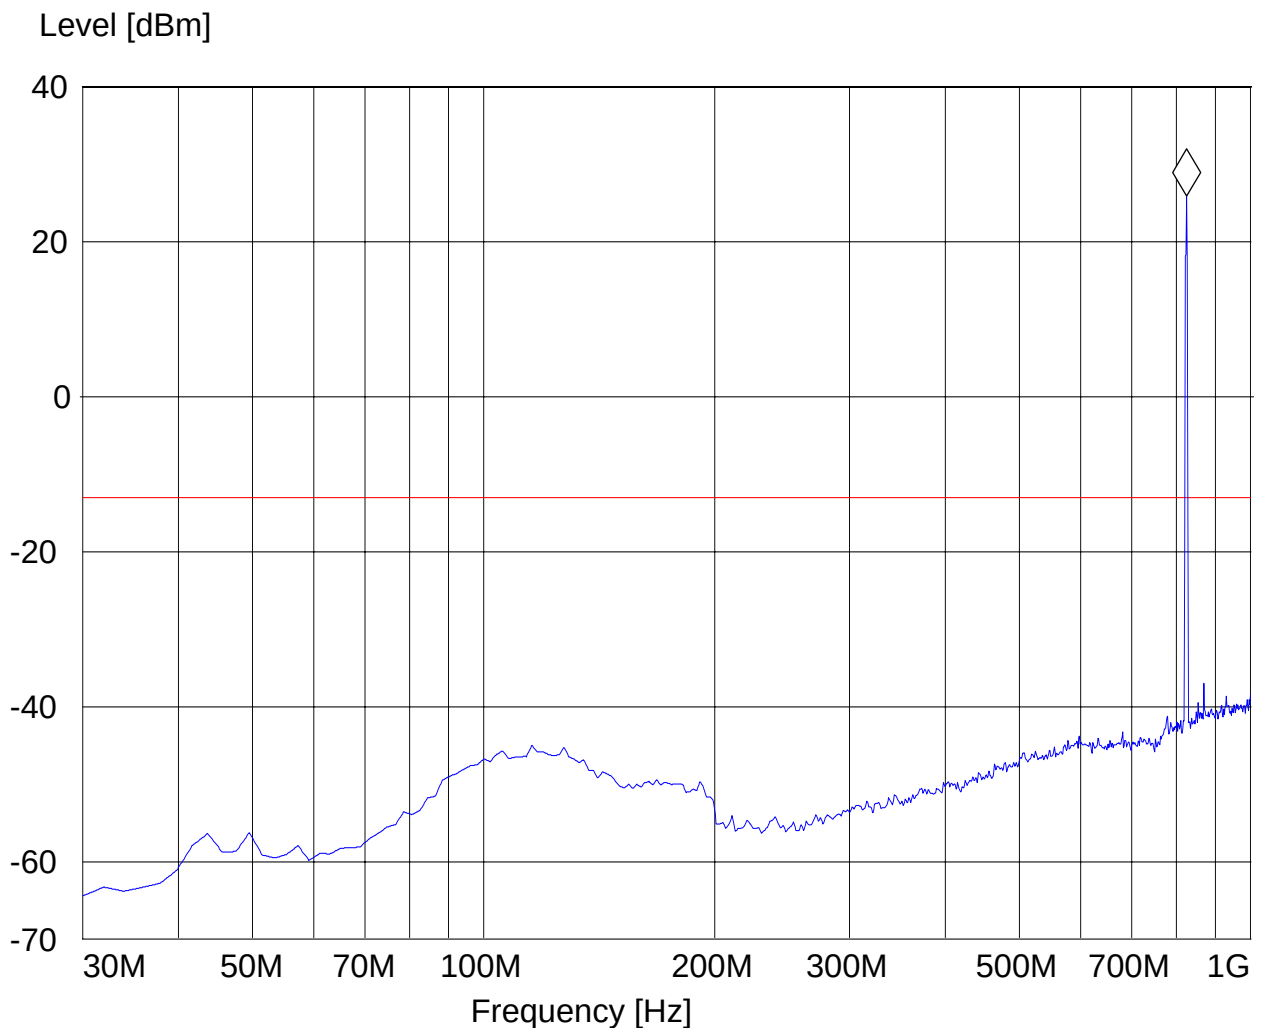



RADIATED SPURIOUS EMISSIONS (GSM-850)

Tx @ 824.2MHz: 1GHz – 1.58GHz

Spurious emission limit –13dBm


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "FCC 22Spuri 1-1.58G"

Short Description:		FCC 24 1GHz-8GHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1 GHz -53.43 dBm

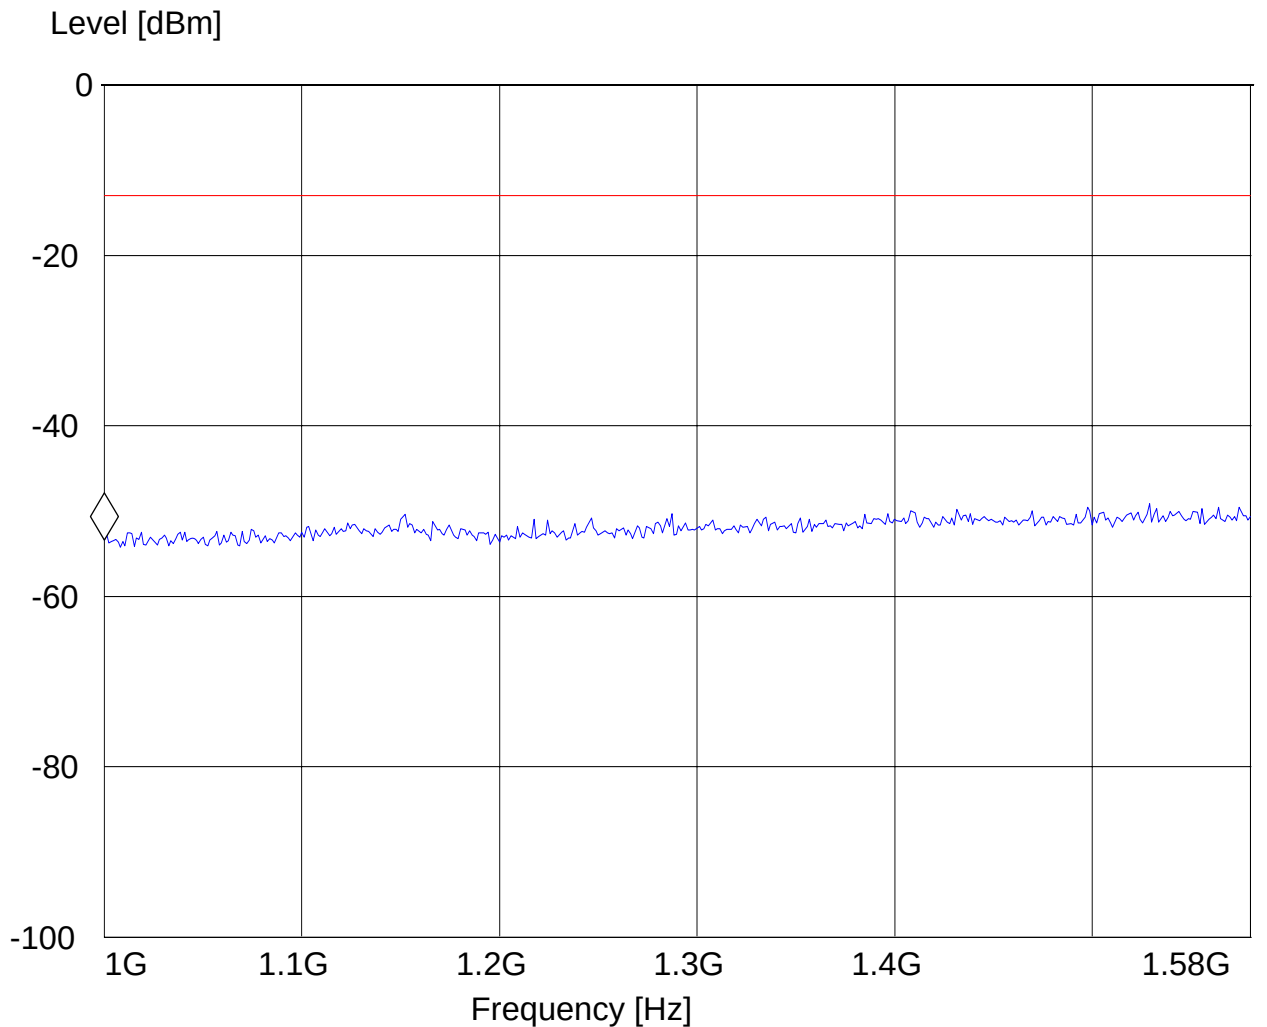



RADIATED SPURIOUS EMISSIONS (GSM-850)

Tx @ 824.2MHz: 1.58GHz – 3GHz

Spurious emission limit –13dBm


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "FCC 22Spuri 1.58-3G"

Short Description:		FCC 24 1GHz-8GHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency	Time	Bandw.		
1.6 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.58 GHz -26.12 dBm

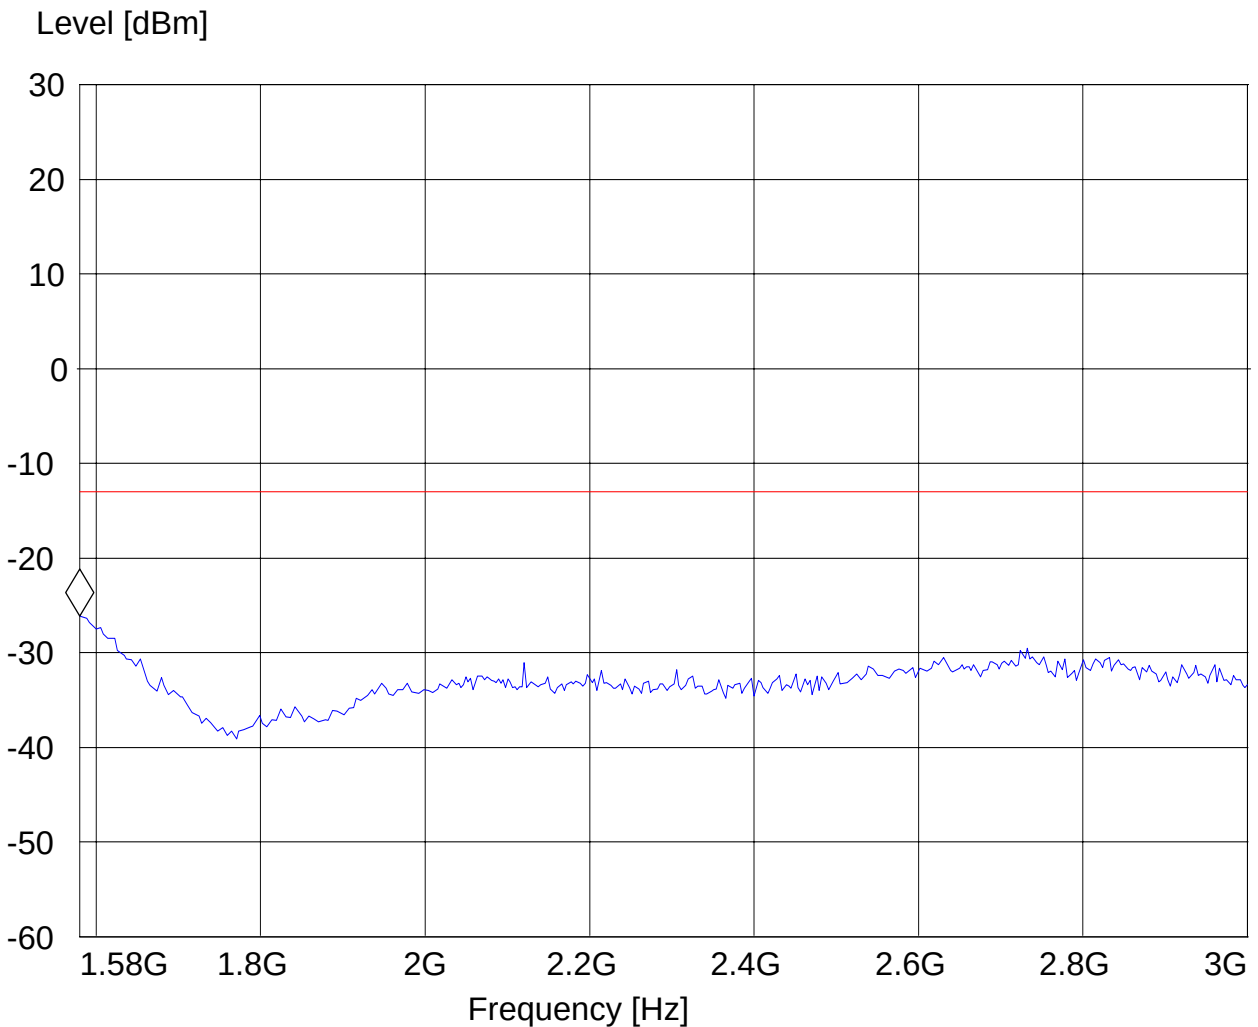



RADIATED SPURIOUS EMISSIONS (GSM-850)

Tx @ 824.2MHz: 3GHz – 9GHz

Spurious emission limit –13dBm


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "FCC 22Spuri 3-9G"

Short Description:		FCC 24 1GHz-8GHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
3.0 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 6.198396794 GHz -47.09 dBm

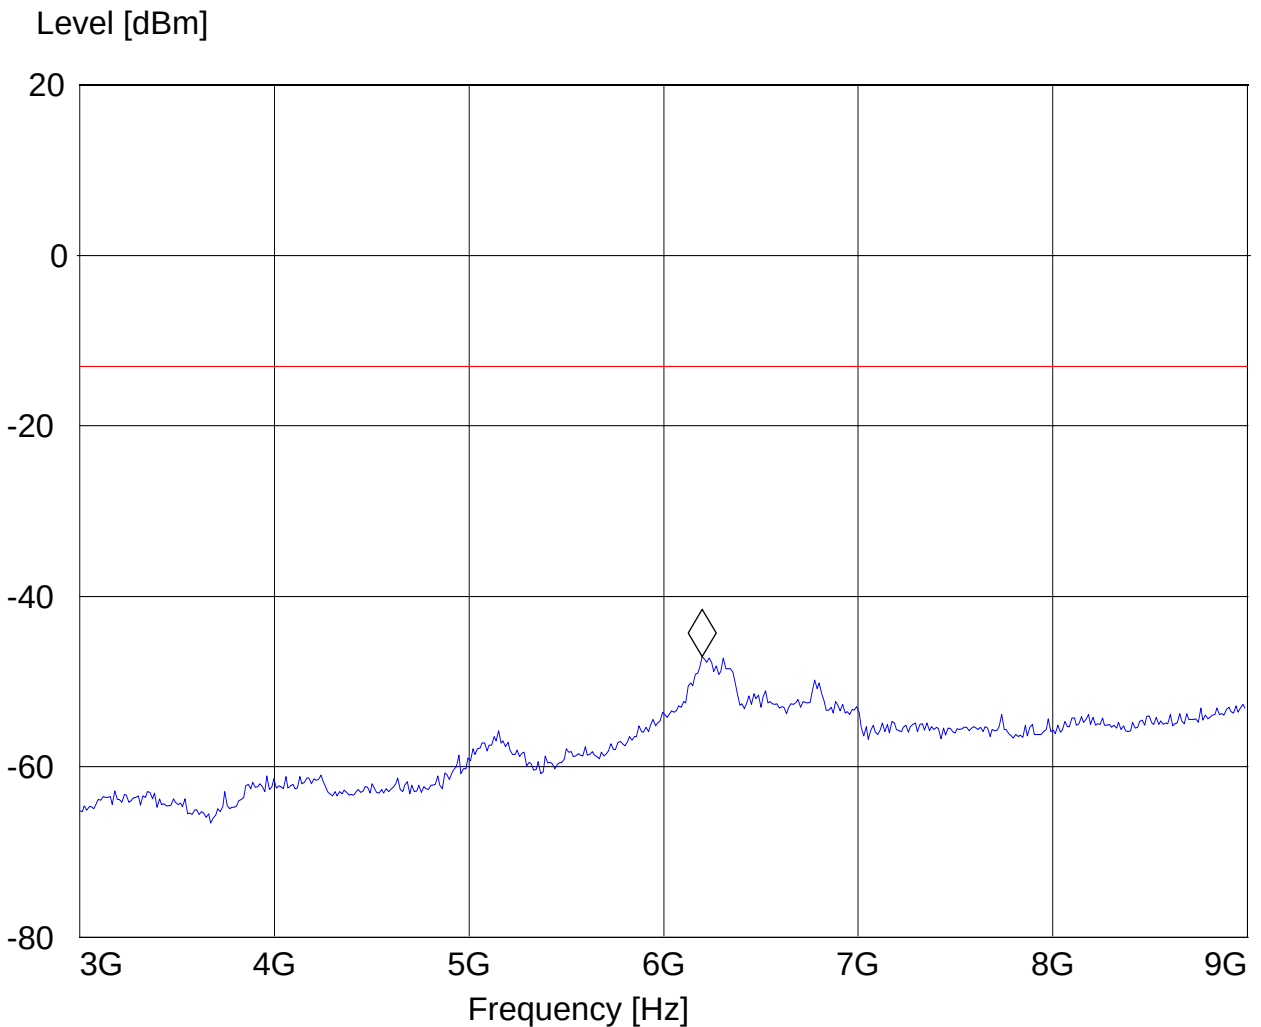



RADIATED SPURIOUS EMISSIONS (GSM-850)

Tx @ 836.6MHz: 1GHz – 1.58GHz

Spurious emission limit –13dBm


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "FCC 22Spuri 1-1.58G"

Short Description:		FCC 24 1GHz-8GHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.577675351 GHz -49.48 dBm

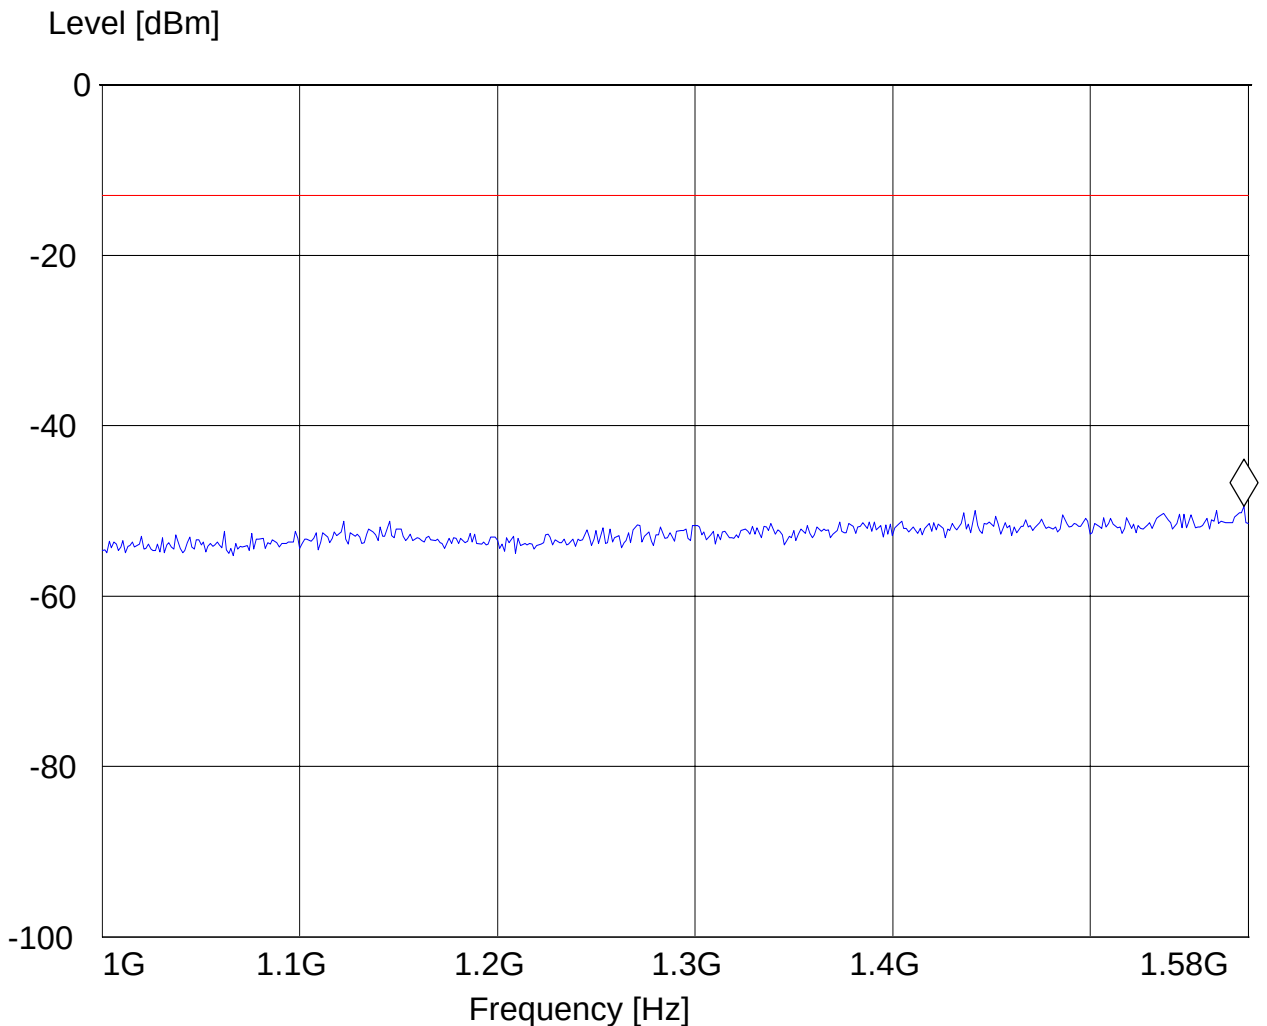



RADIATED SPURIOUS EMISSIONS (GSM-850)

Tx @ 836.6MHz: 1.58GHz – 3GHz

Spurious emission limit –13dBm


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "FCC 22Spuri 1.58-3G"

Short Description:		FCC 24 1GHz-8GHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.6 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.582845691 GHz -25.37 dBm

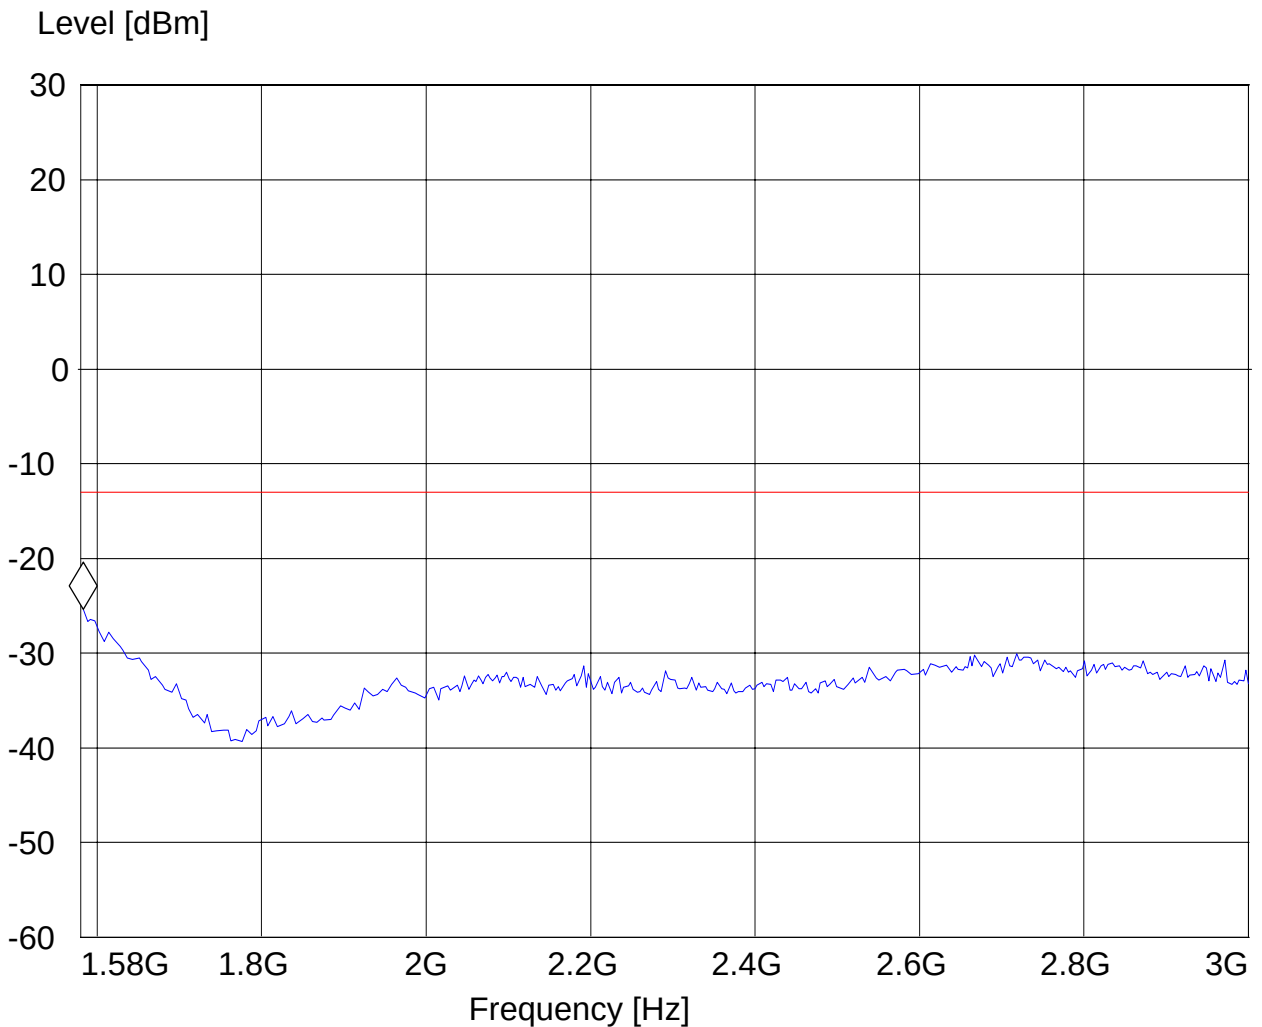



RADIATED SPURIOUS EMISSIONS (GSM-850)

Tx @ 836.6MHz: 3GHz – 9GHz

Spurious emission limit –13dBm


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "FCC 22Spuri 3-9G"

Short Description:		FCC 24 1GHz-8GHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
3.0 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 6.210420842 GHz -46.83 dBm

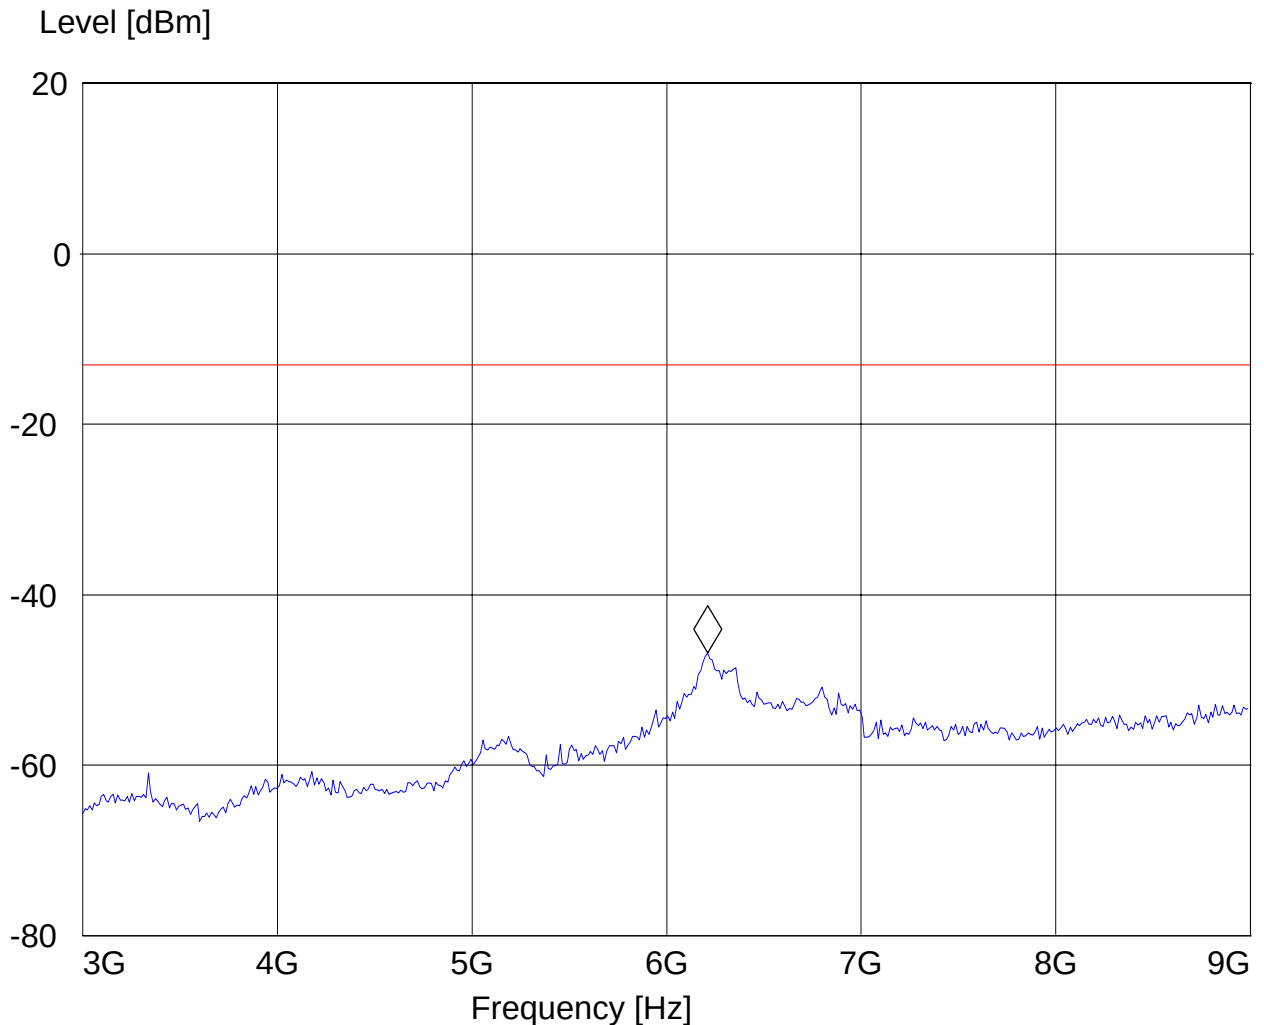



RADIATED SPURIOUS EMISSIONS (GSM-850)

Tx @ 848.8MHz: 1GHz – 1.58GHz

Spurious emission limit –13dBm


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "FCC 22Spuri 1-1.58G"

Short Description:		FCC 24 1GHz-8GHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.571863727 GHz -48.14 dBm

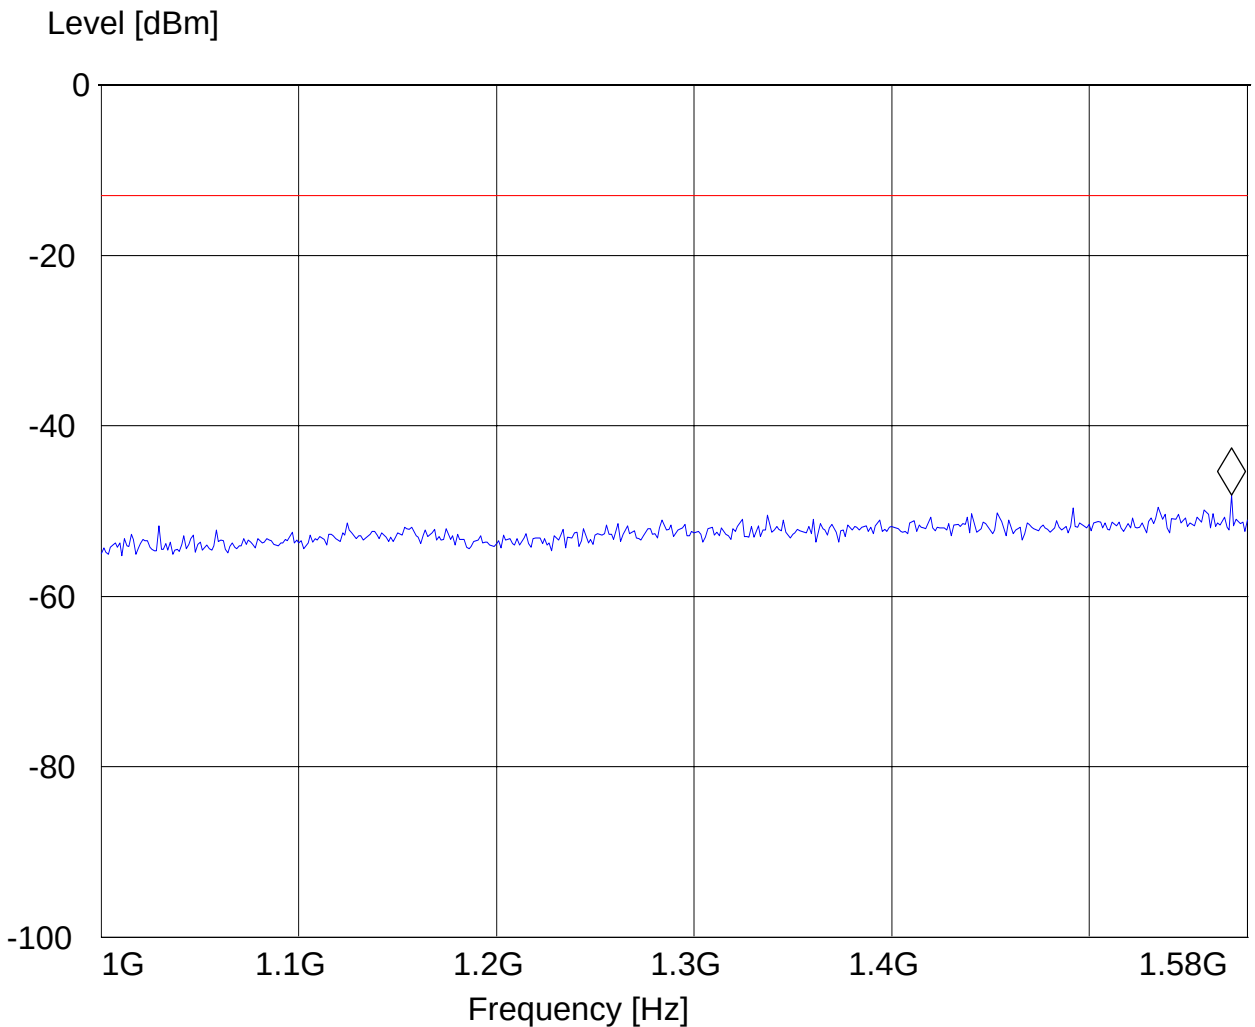



RADIATED SPURIOUS EMISSIONS (GSM-850)

Tx @ 848.8MHz: 1.58GHz – 3GHz

Spurious emission limit –13dBm


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "FCC 22Spuri 1.58-3G"

Short Description:		FCC 24 1GHz-8GHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.6 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.588537074 GHz -25.04 dBm

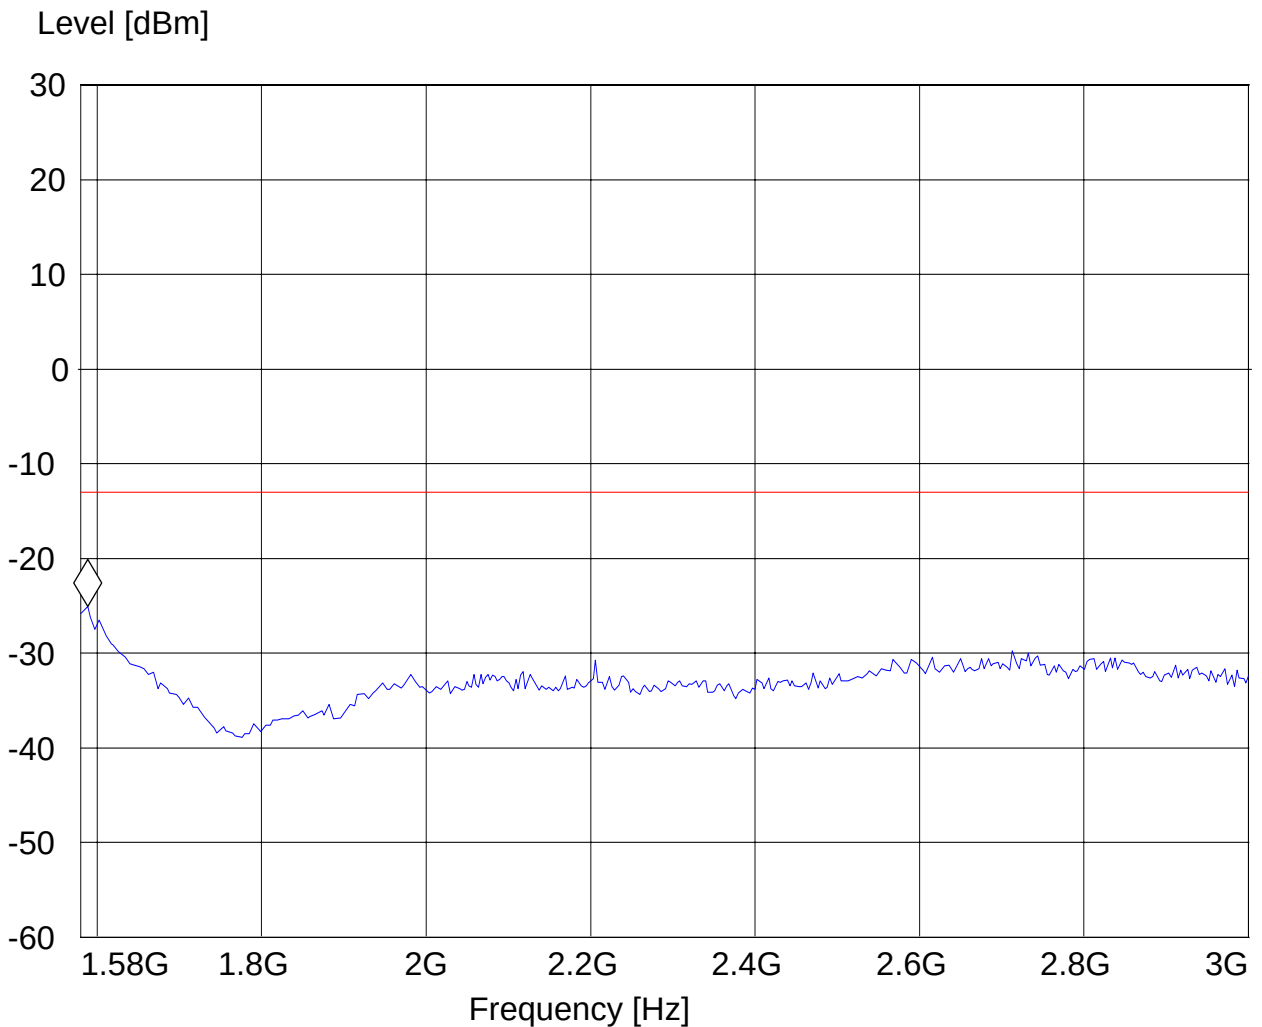



RADIATED SPURIOUS EMISSIONS (GSM-850)

Tx @ 848.8MHz: 3GHz – 9GHz

Spurious emission limit –13dBm


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "FCC 22Spuri 3-9G"

Short Description:		FCC 24 1GHz-8GHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency	Time	Bandw.		
3.0 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 6.198396794 GHz -47.16 dBm

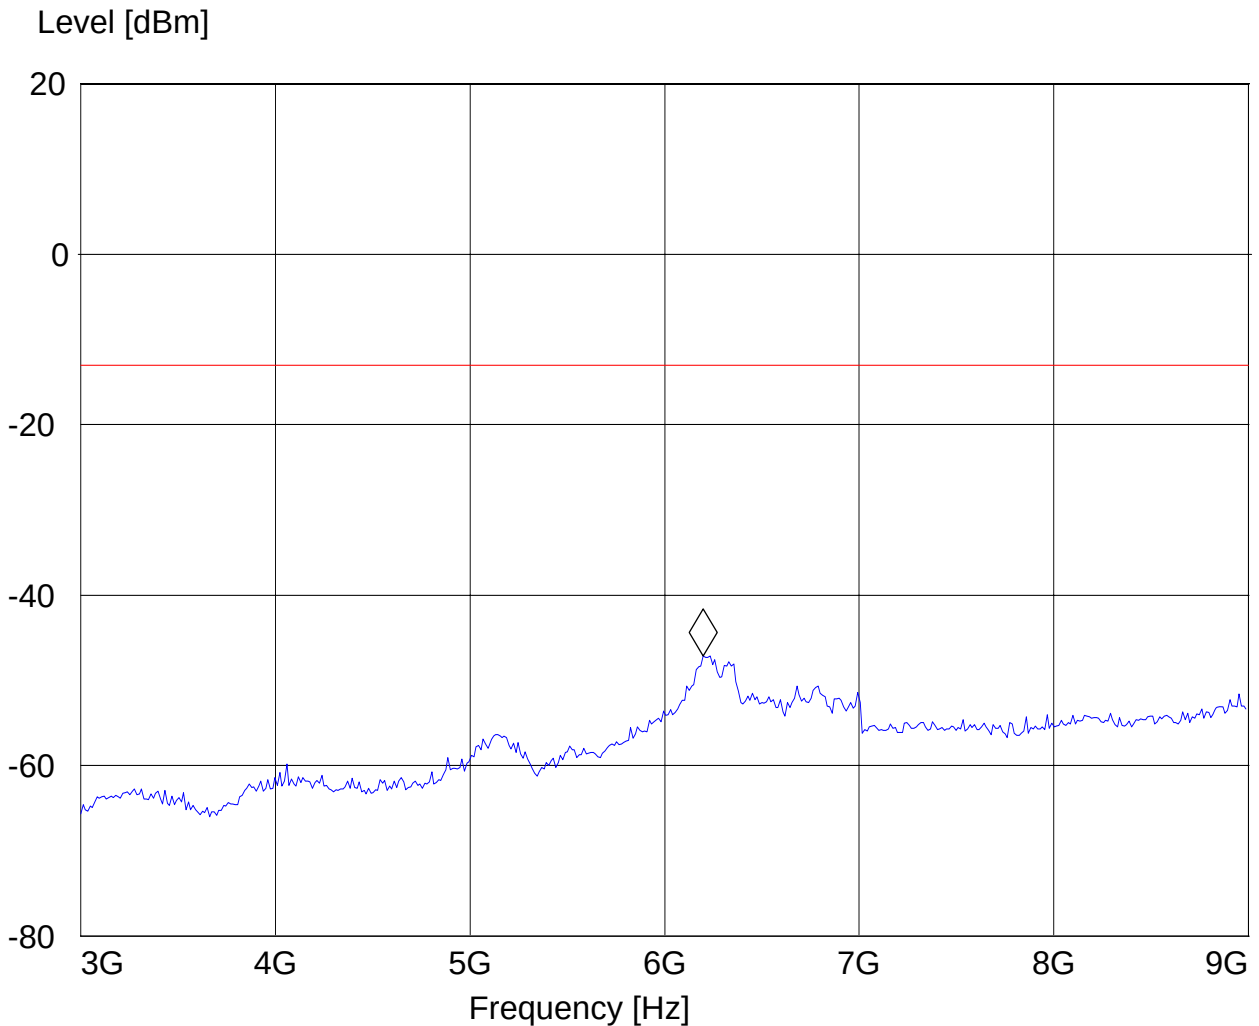



5.2.4.2 RESULTS OF RADIATED TESTS PCS-1900:

Harmonic	Tx ch-512 Freq.(MHz)	Level (dBm)	Tx ch-661 Freq. (MHz)	Level (dBm)	Tx ch-810 Freq. (MHz)	Level (dBm)
2	3700.4	NF	3760	NF	3819.6	NF
3	5550.6	NF	5640	NF	5729.4	NF
4	7400.8	NF	7520	NF	7639.2	NF
5	9251	NF	9400	NF	9549	NF
6	11101.2	NF	11280	NF	11458.8	NF
7	12951.4	NF	13160	NF	13368.6	NF
8	14801.6	NF	15040	NF	15278.4	NF
9	16651.8	NF	16920	NF	17188.2	NF
10	18502	NF	18800	NF	19098	NF
NF = NOISE FLOOR						



RADIATED SPURIOUS EMISSIONS(PCS 1900)

TX: 30MHz - 1GHz

Spurious emission limit -13dBm

Antenna: vertical

Note: This plot is valid for low, mid & high channels (worst-case plot)


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "FCC 24 Spur 30M-1G_V"

Short Description:		FCC 24 30MHz-1GHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 961.122244 MHz -38.95 dBm

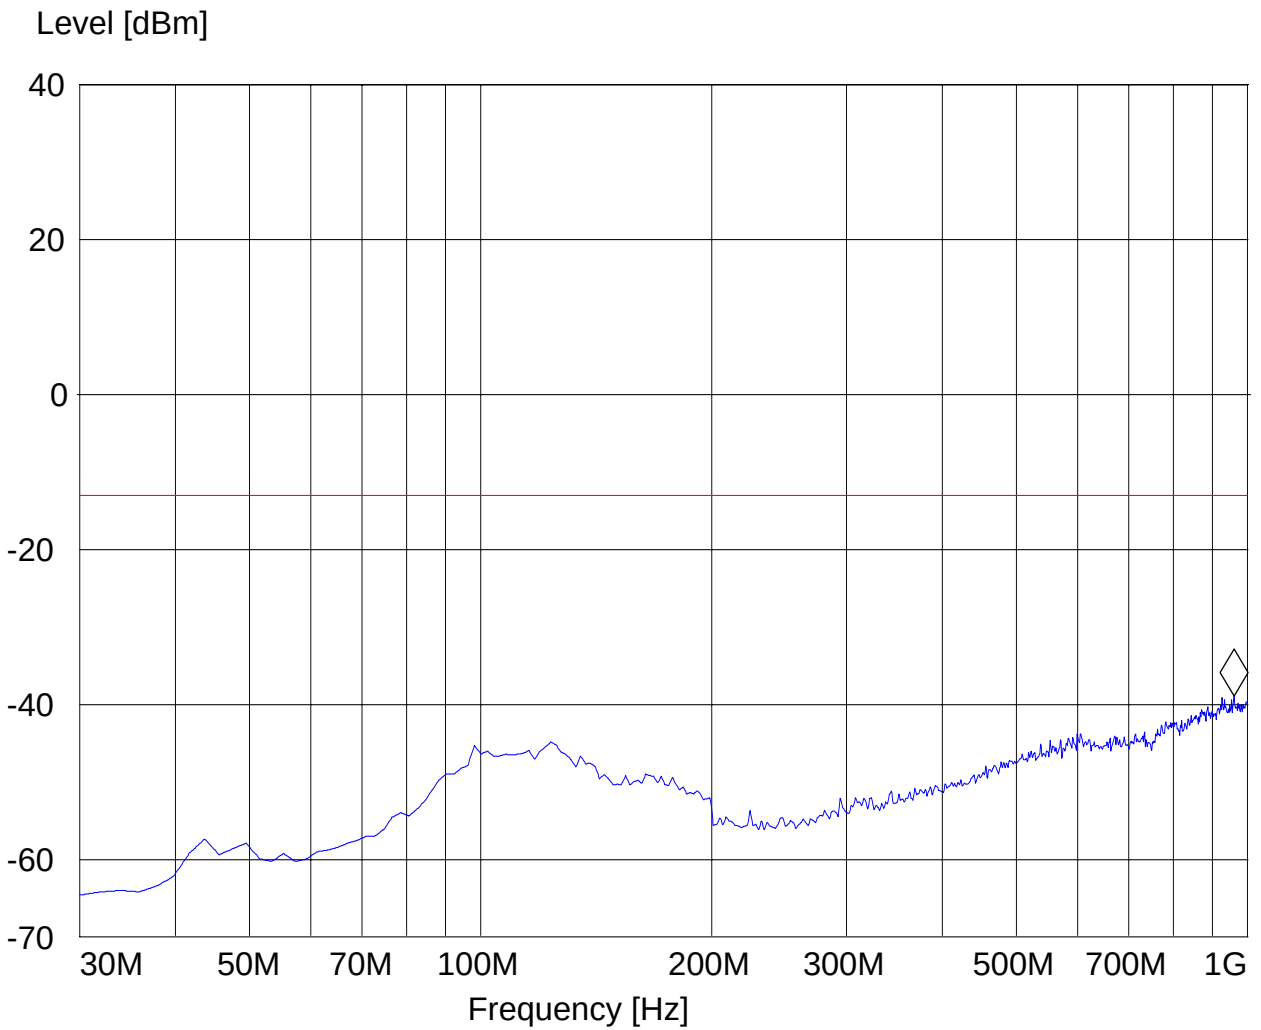



RADIATED SPURIOUS EMISSIONS(PCS 1900)

Tx @ 1850.2MHz: 1GHz – 3GHz

Spurious emission limit –13dBm

Note: The peak above the limit line is the carrier freq. at ch-512.


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "FCC 24Spuri 1-3G"

Short Description:		FCC 24 1GHz-8GHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.849699399 GHz 27.02 dBm

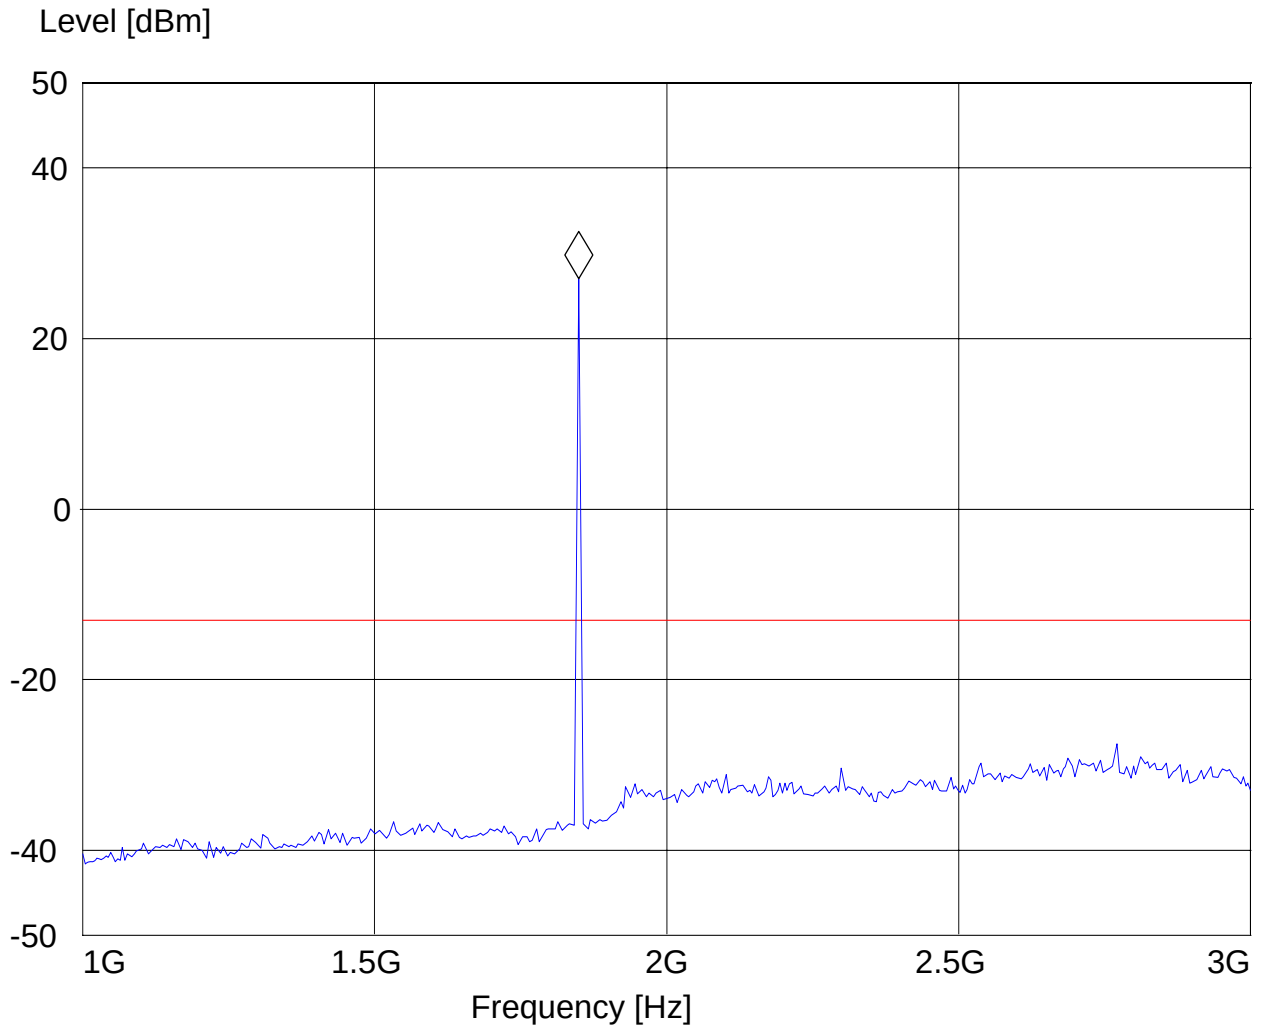



RADIATED SPURIOUS EMISSIONS(PCS 1900)

Tx @ 1850.2MHz: 3GHz – 18GHz

Spurious emission limit -13dBm


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "FCC 24Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 17.849699399 GHz -55.19 dBm

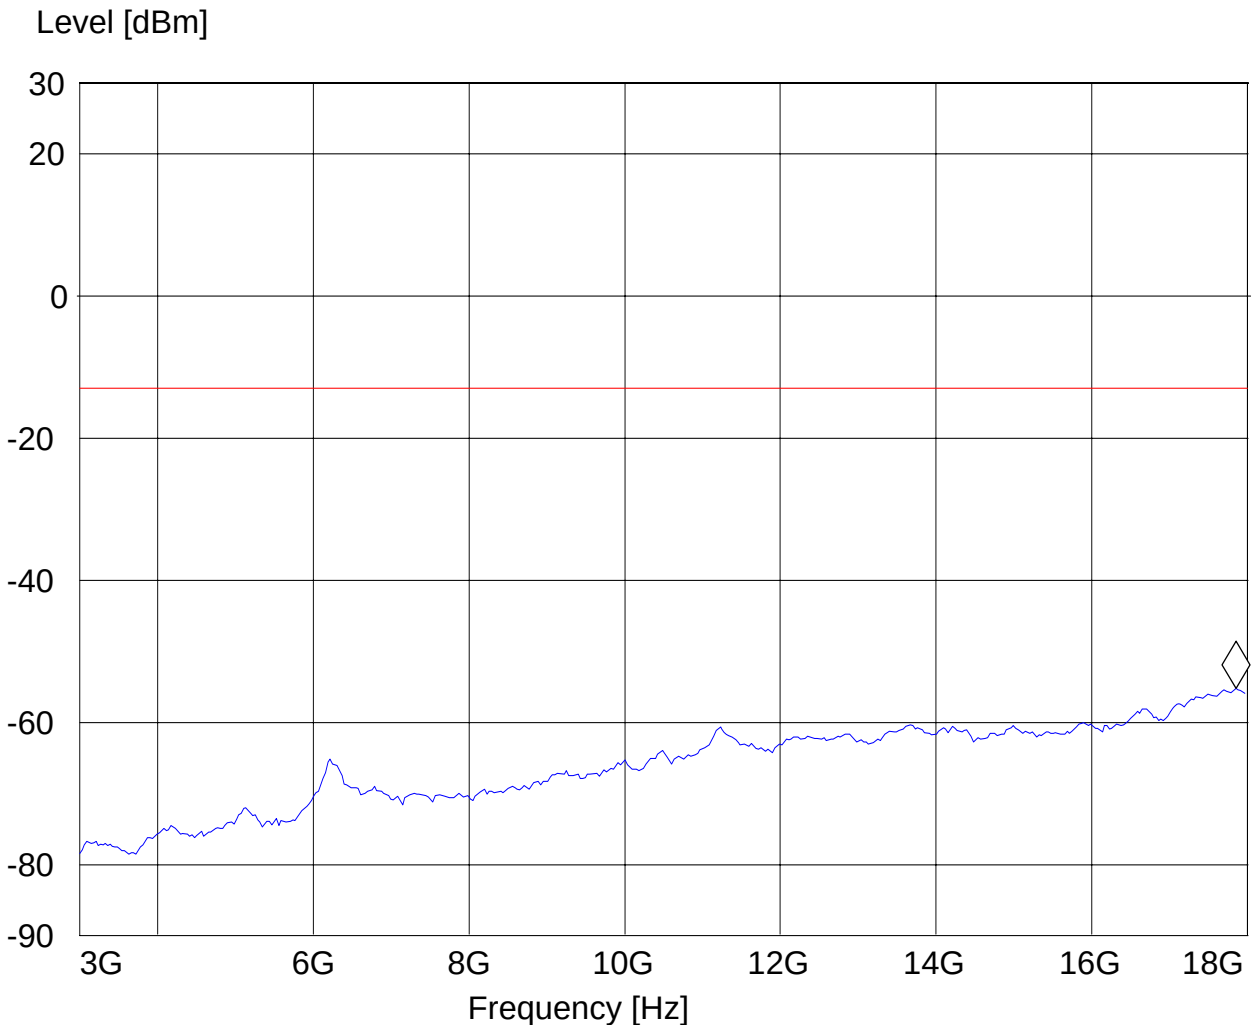



RADIATED SPURIOUS EMISSIONS(PCS 1900)

Tx @ 1880.0MHz: 1GHz – 3GHz

Spurious emission limit –13dBm

Note: The peak above/close to the limit line is the carrier freq. at ch-661.


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "FCC 24Spuri 1-3G"

Short Description:		FCC 24 1GHz-8GHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.909819639 GHz 27.62 dBm

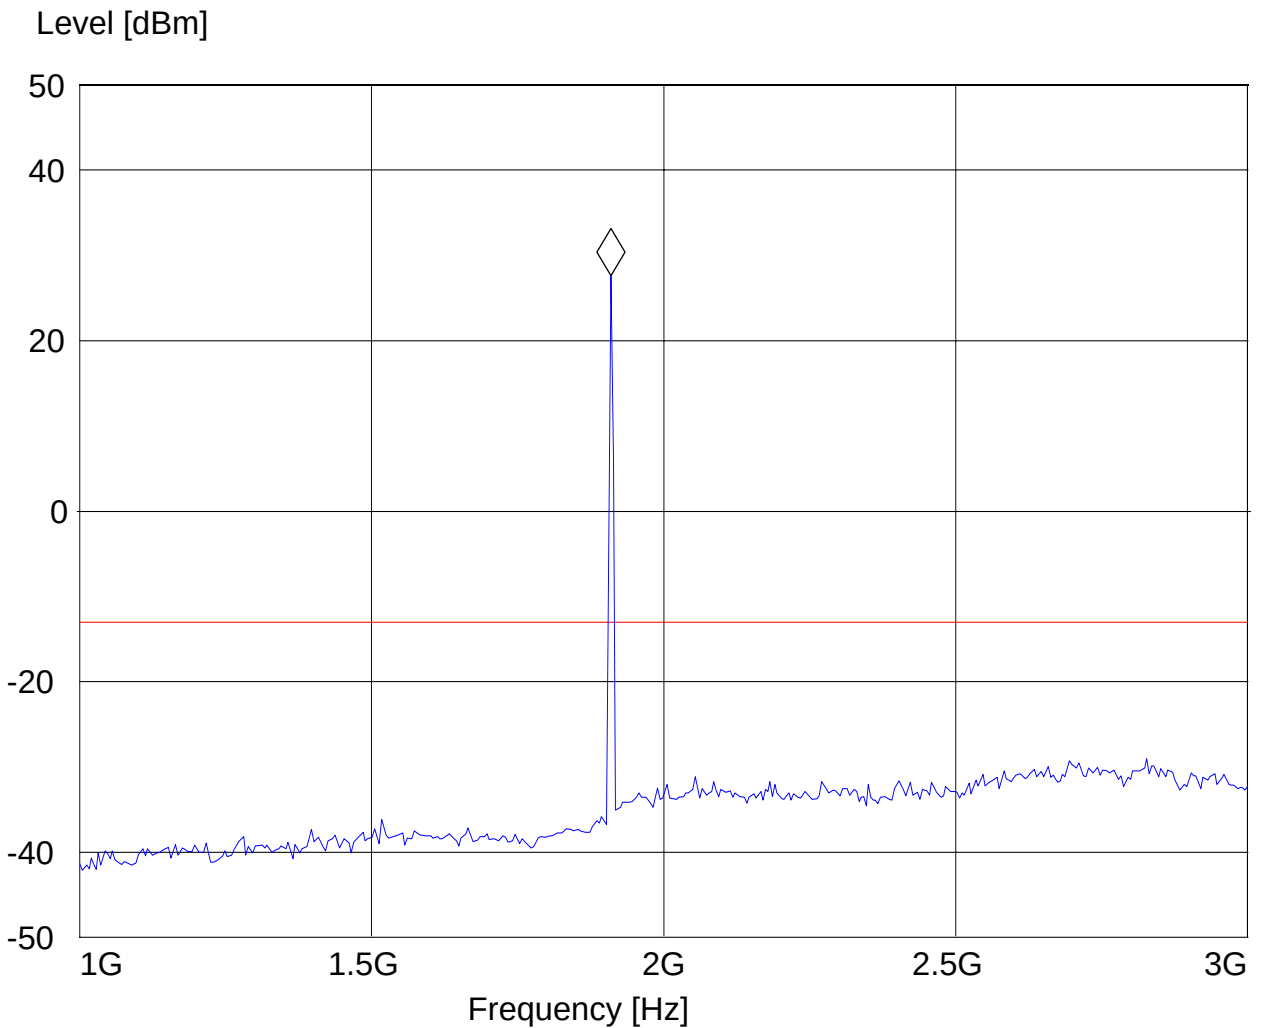



RADIATED SPURIOUS EMISSIONS(PCS 1900)

Tx @ 1880.0MHz: 3GHz – 18GHz

Spurious emission limit –13dBm


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "FCC 24Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 17.849699399 GHz -55.48 dBm

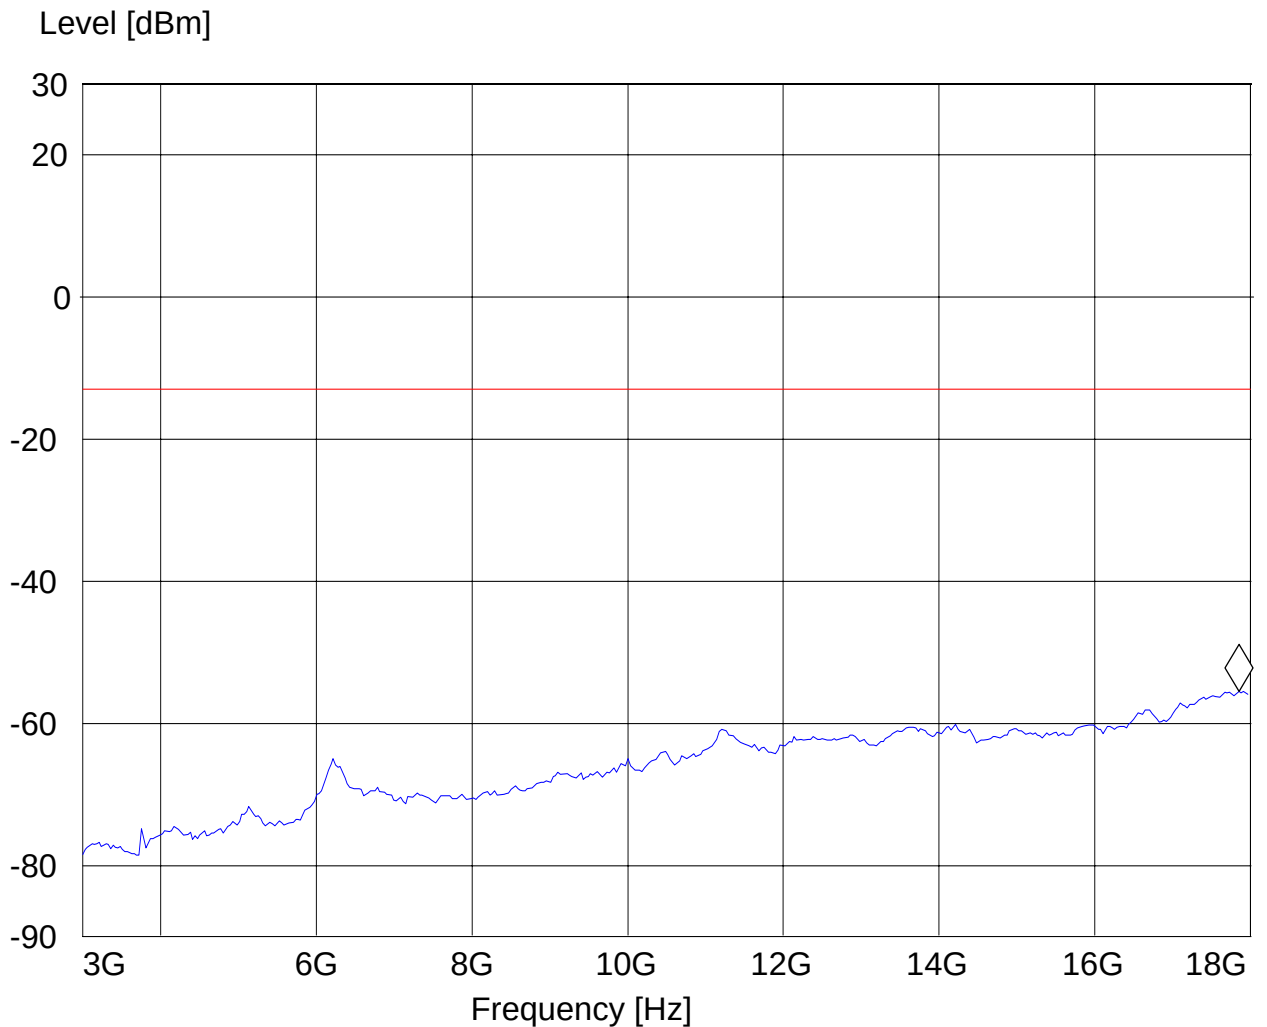



RADIATED SPURIOUS EMISSIONS(PCS 1900)

Tx @ 1909.8MHz: 1GHz – 3GHz

Spurious emission limit –13dBm

Note: The peak above the limit line is the carrier freq. at ch-810.


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "FCC 24Spuri 1-3G"

Short Description:	FCC 24 1GHz-8GHz				
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency	Time	Bandw.		
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.909819639 GHz 27.62 dBm

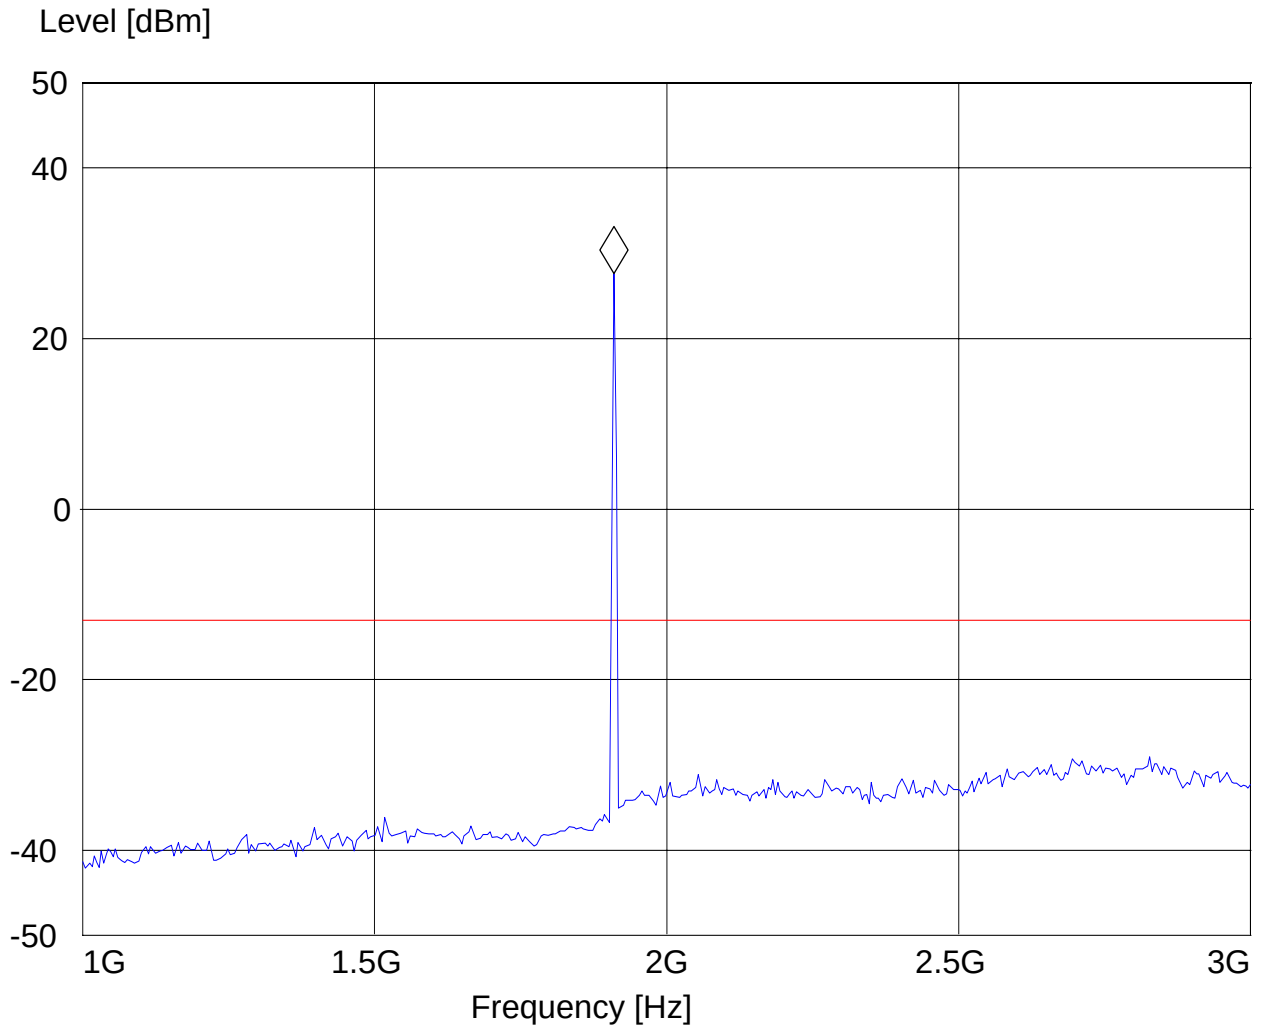



RADIATED SPURIOUS EMISSIONS(PCS 1900)

Tx @ 1909.8MHz: 3GHz – 18GHz

Spurious emission limit –13dBm


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "FCC 24Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 17.849699399 GHz -55.19 dBm

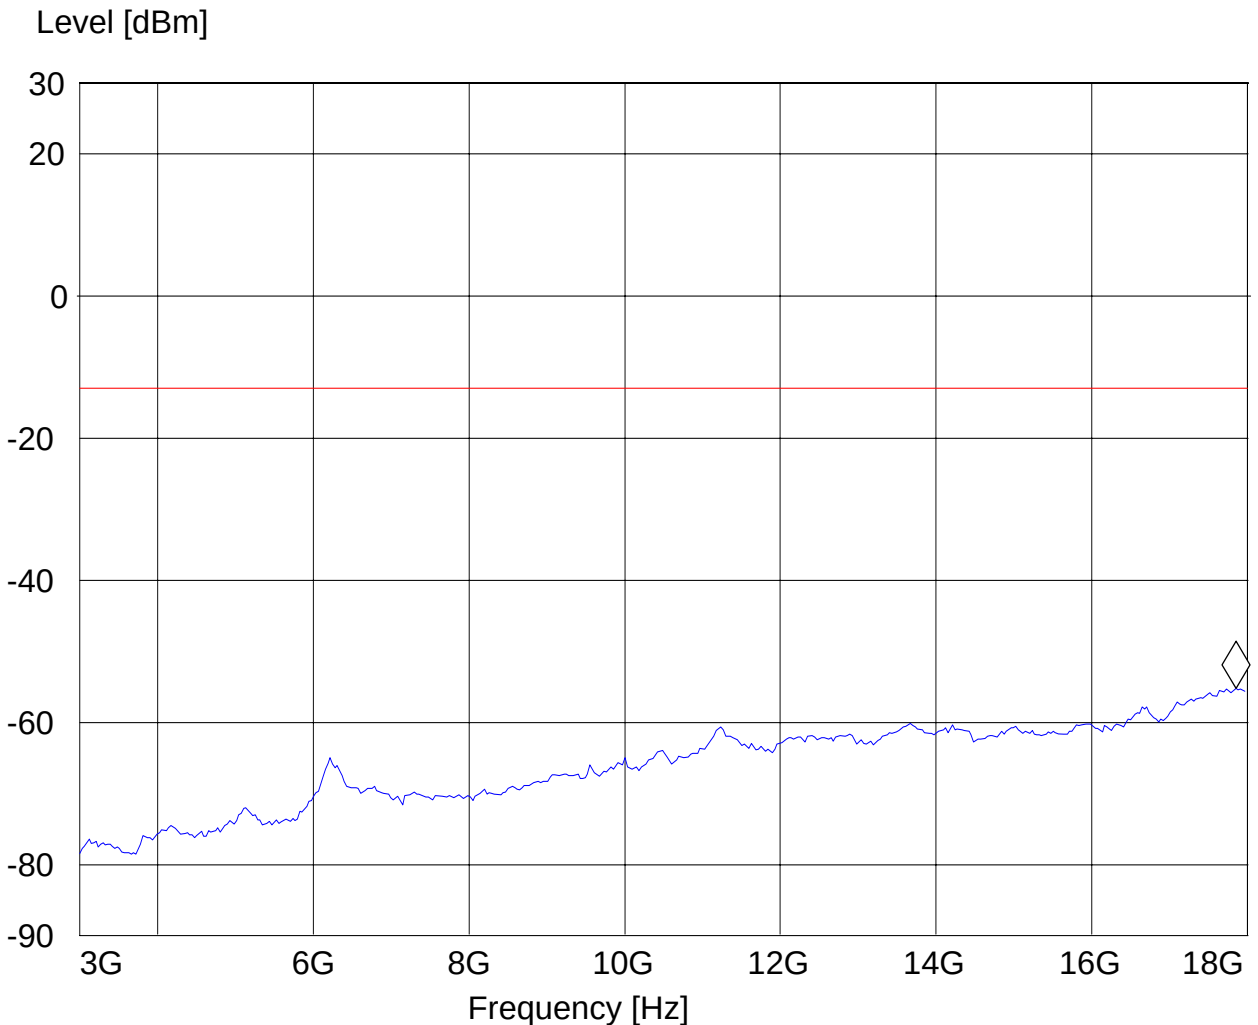



RADIATED SPURIOUS EMISSIONS(PCS 1900)

18GHz – 19.1GHz

Spurious emission limit –13dBm

Note: This plot is valid for low, mid & high channels (worst-case plot)


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "FCC 24spuri 18-19.1G"

Short Description:		FCC 24 18GHz-19.1GHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
18.0 GHz	19.1 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 18.996392786 GHz -59.64 dBm

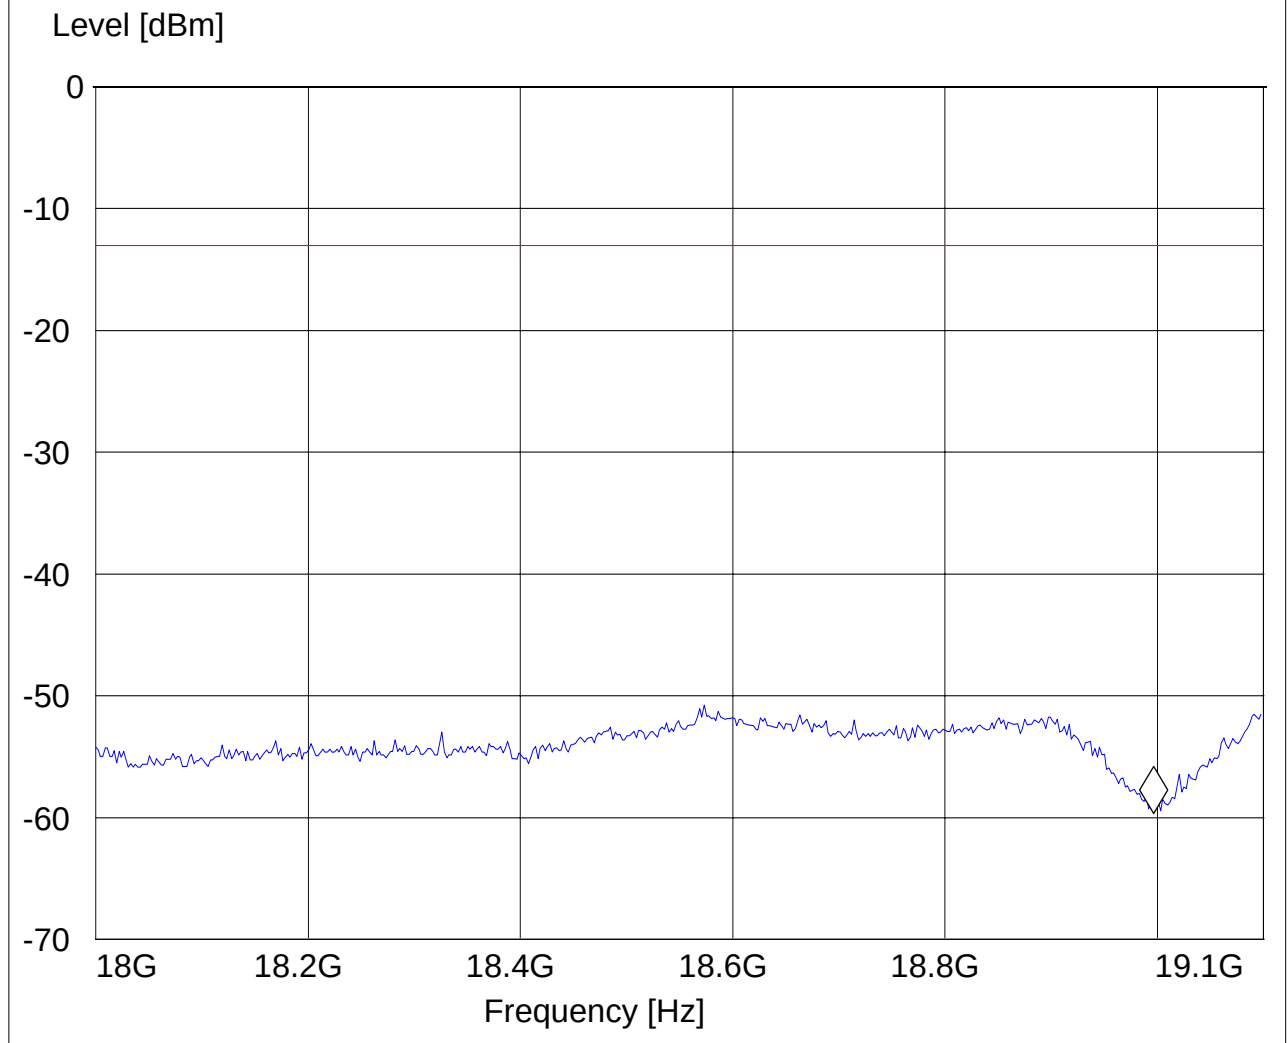



5.3 RECEIVER RADIATED EMISSIONS

§ 2.1053 / RSS-132 & 133

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 26.5GHz very short cable connections to the antenna was used to minimize the noise level.

Limits

SUBCLAUSE § RSS-133

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3



5.3.1 Receiver Spurious on EUT 850 MHz

RECEIVER RADIATED EMISSIONS

EUT in Idle Mode: 30MHz – 1GHz

Antenna: horizontal

Note: Peak Reading Vs. Quasi-Peak Limit.

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA


EUT / Description:

SWEEP TABLE: "CANADA RE_30M-1G_Hor"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

Marker: 883.366733 MHz 35.84 dBμV/m

Level [dBμV/m]

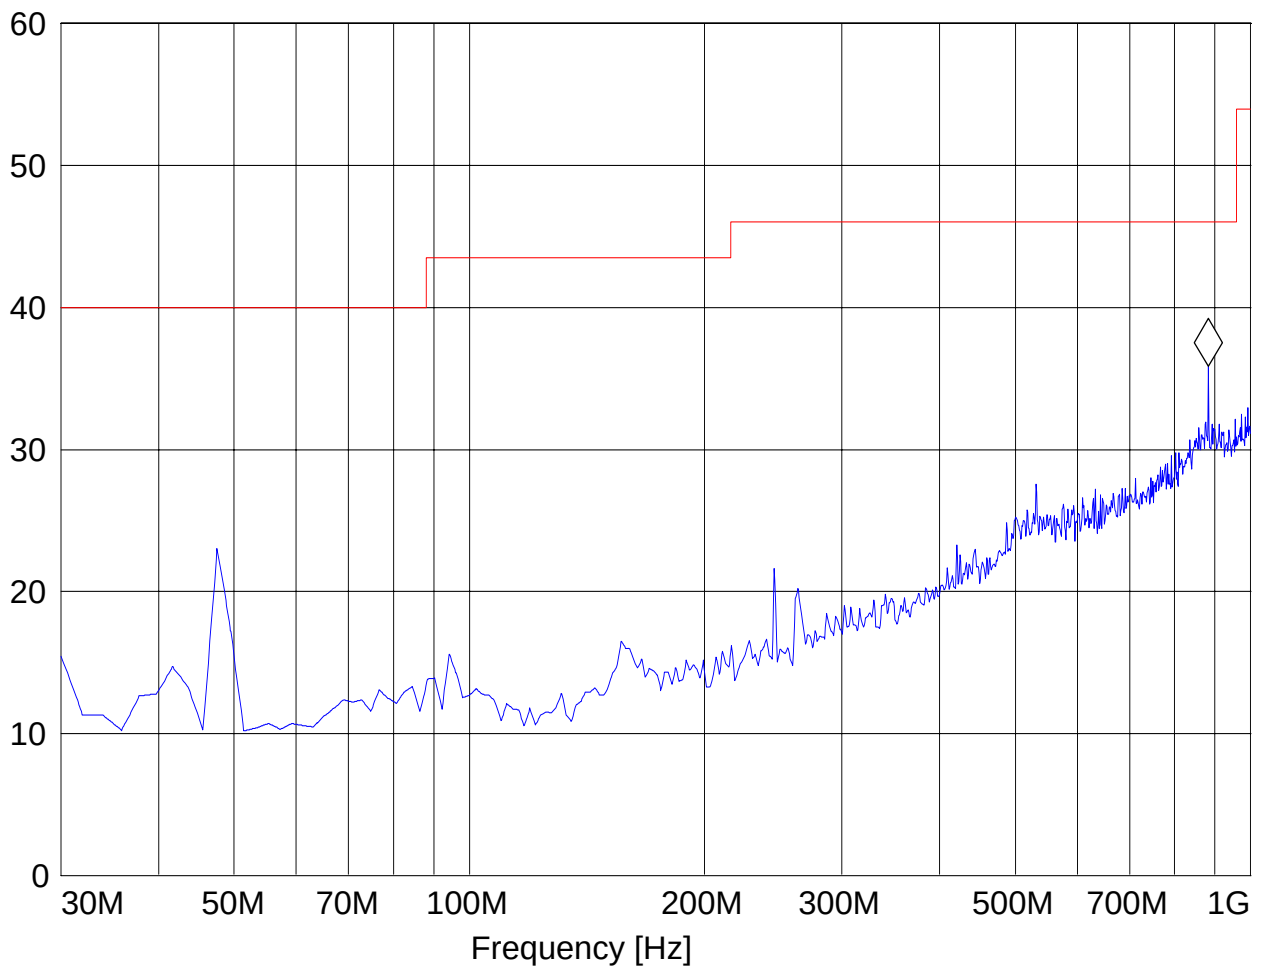



RECEIVER RADIATED EMISSIONS
EUT in Idle Mode: 1GHz – 3GHz

Note: Peak Reading Vs. Average Limit.


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "CANADA RE_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.76753507 GHz 47.82 dB μ V/m

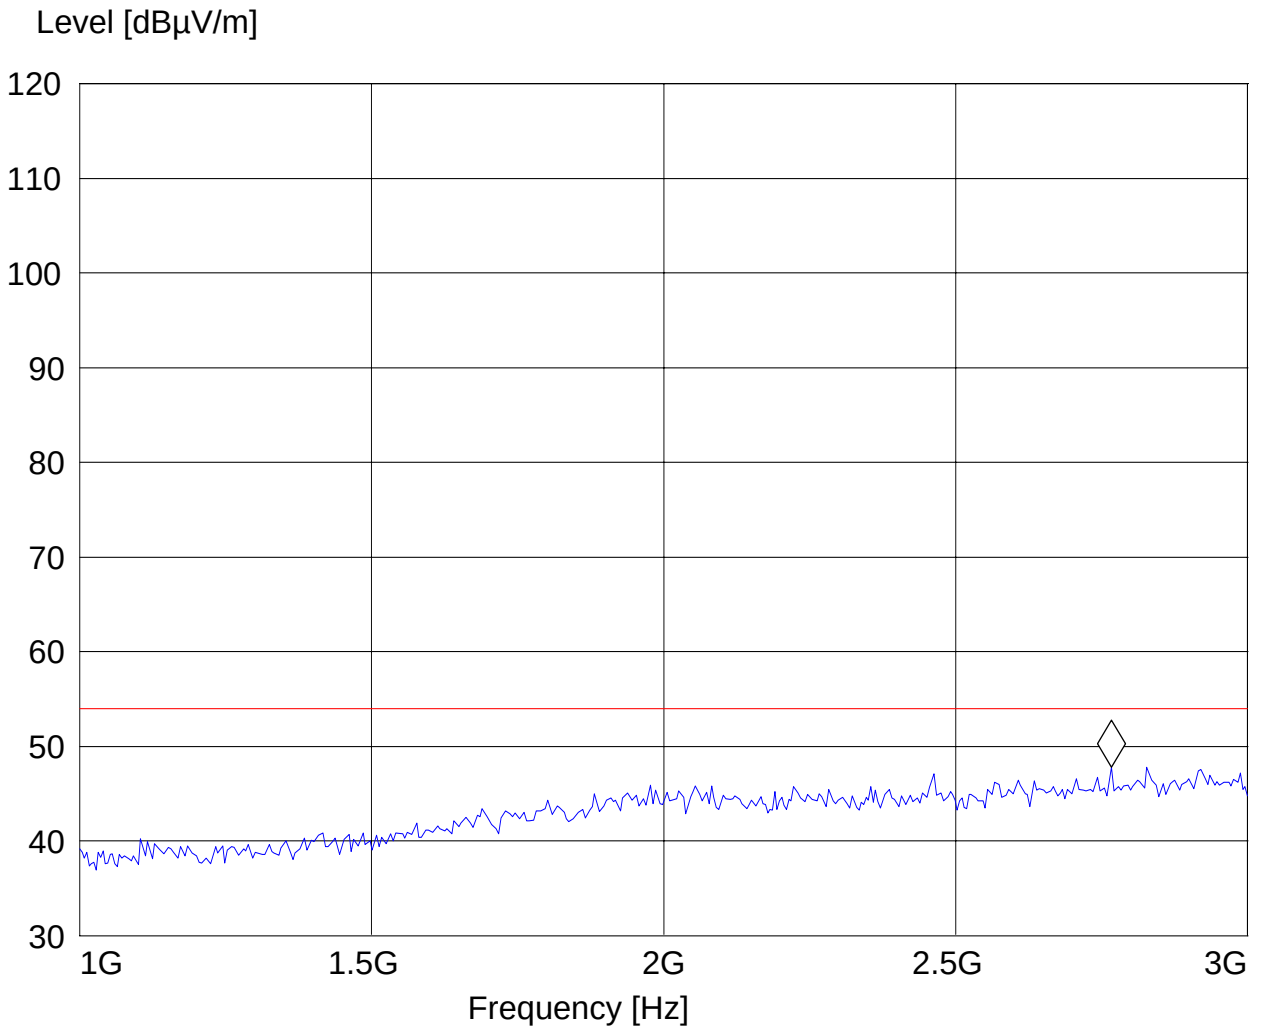



RECEIVER RADIATED EMISSIONS
EUT in Idle Mode: 3GHz – 18GHz

Note: Peak Reading Vs. Average Limit.


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "CANADA RE_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 17.386773547 GHz 40.44 dB μ V/m

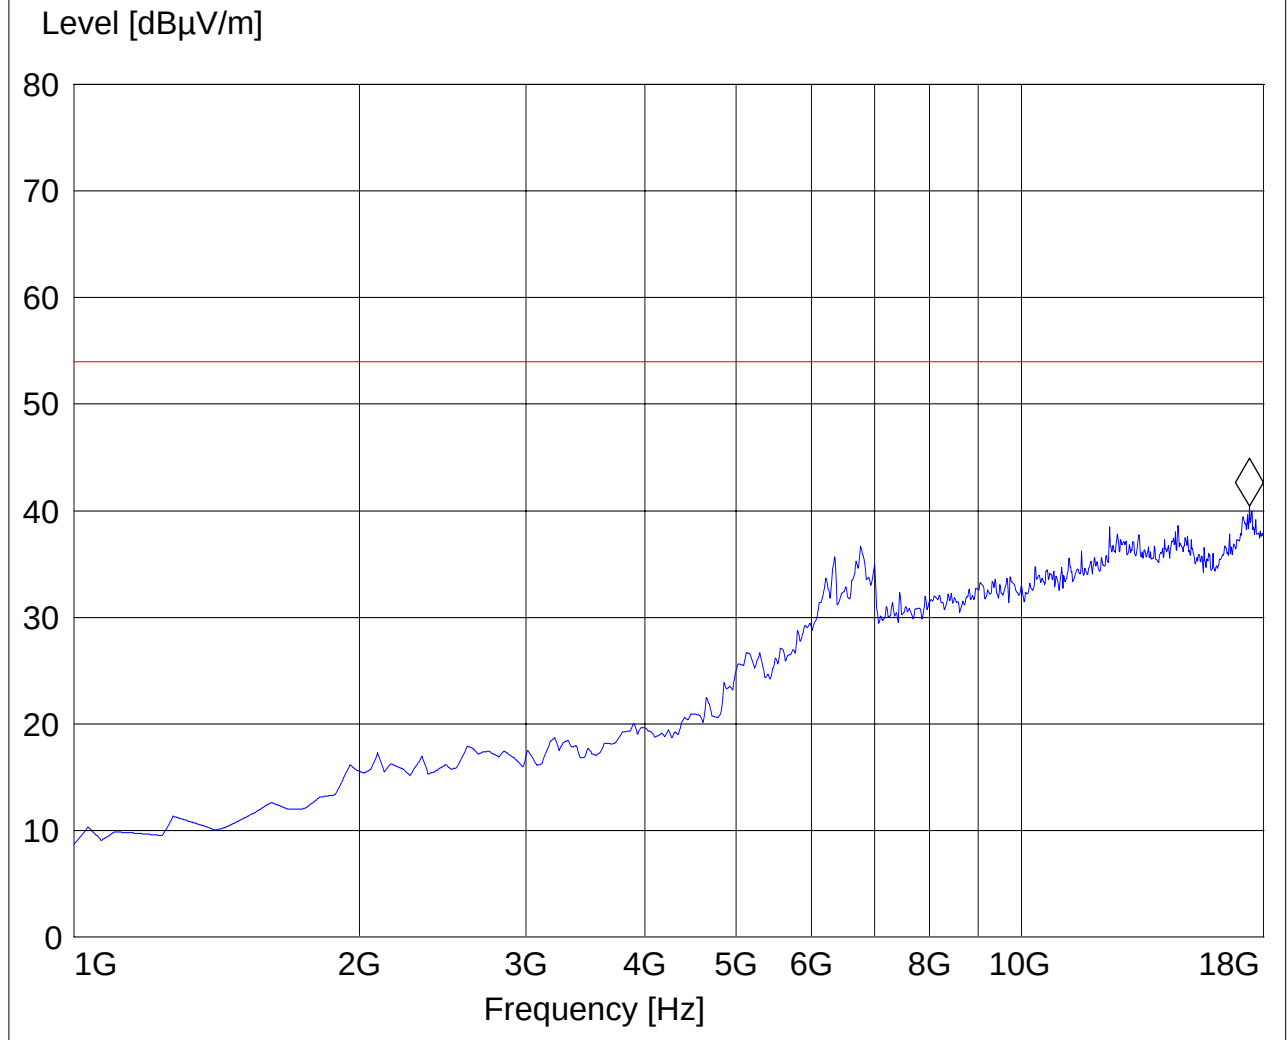



5.3.2 Receiver Spurious on EUT 1900 MHz

RECEIVER RADIATED EMISSIONS

EUT in Idle Mode: 30MHz – 1GHz

Antenna: vertical


Note: Peak Reading Vs. Quasi-Peak Limit.

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "CANADA RE_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

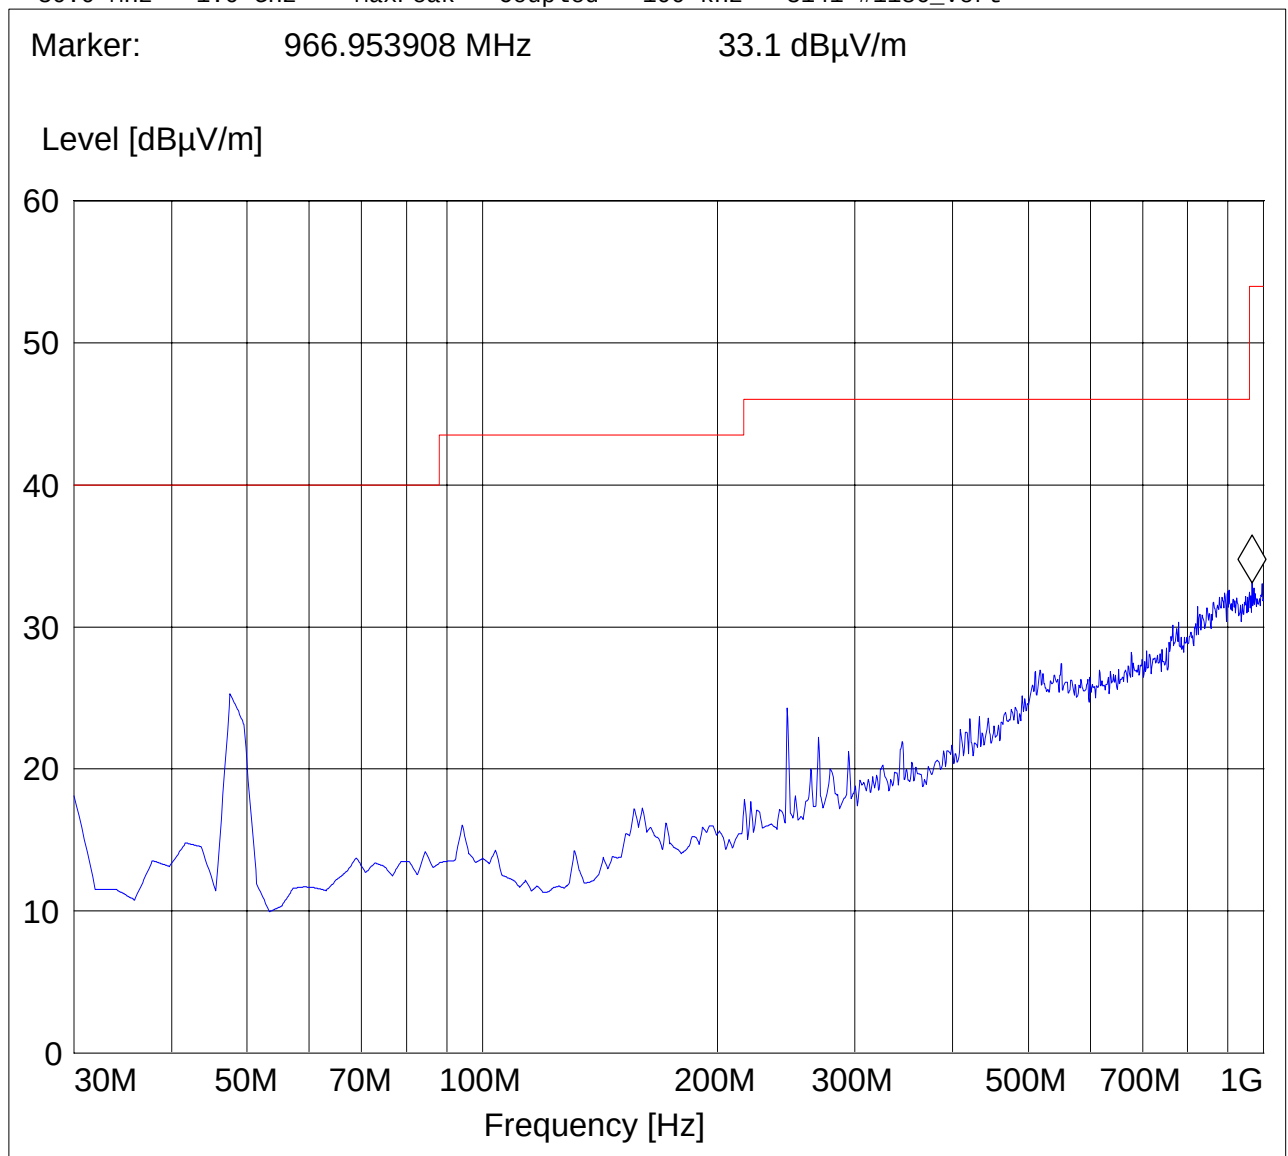



RECEIVER RADIATED EMISSIONS
EUT in Idle Mode: 1GHz – 3GHz

Note: Peak Reading Vs. Average Limit.


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "CANADA RE_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.851703407 GHz 48.38 dB μ V/m

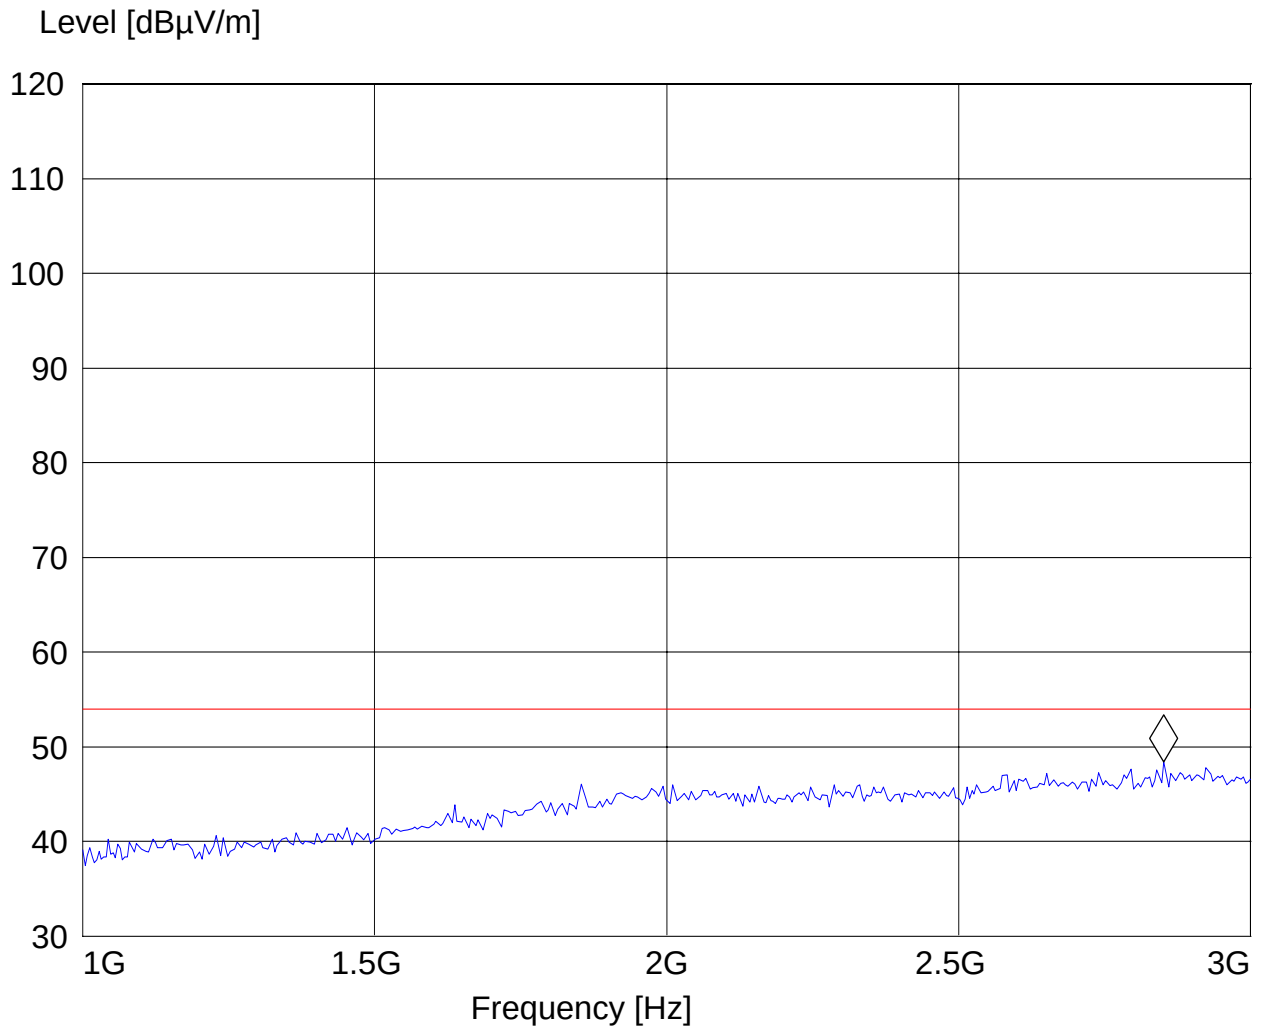



RECEIVER RADIATED EMISSIONS
EUT in Idle Mode: 3GHz – 18GHz

Note: Peak Reading Vs. Average Limit.


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description:

SWEEP TABLE: "CANADA RE_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 17.420841683 GHz 40.05 dB μ V/m

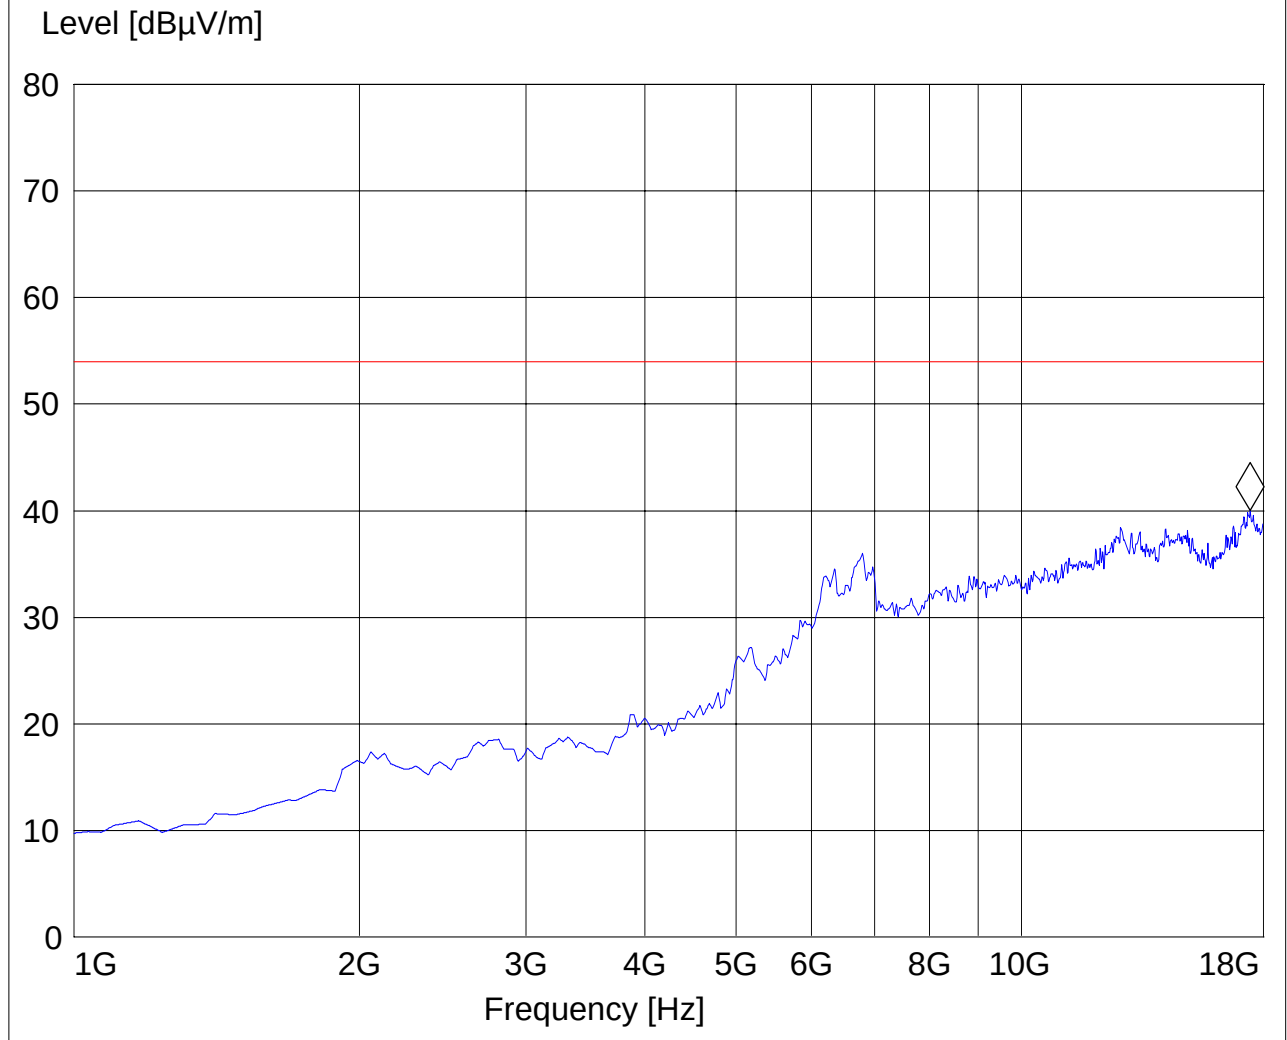



RECEIVER RADIATED EMISSIONS
EUT in Idle Mode: 18GHz – 19.1GHz

Note: Peak Reading Vs. Average Limit.

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA


EUT / Description:

SWEEP TABLE: "CANADA RE_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	3160 Horn 18-26.5G

Marker: 22.873747495 GHz 26.86 dB μ V/m

Level [dB μ V/m]

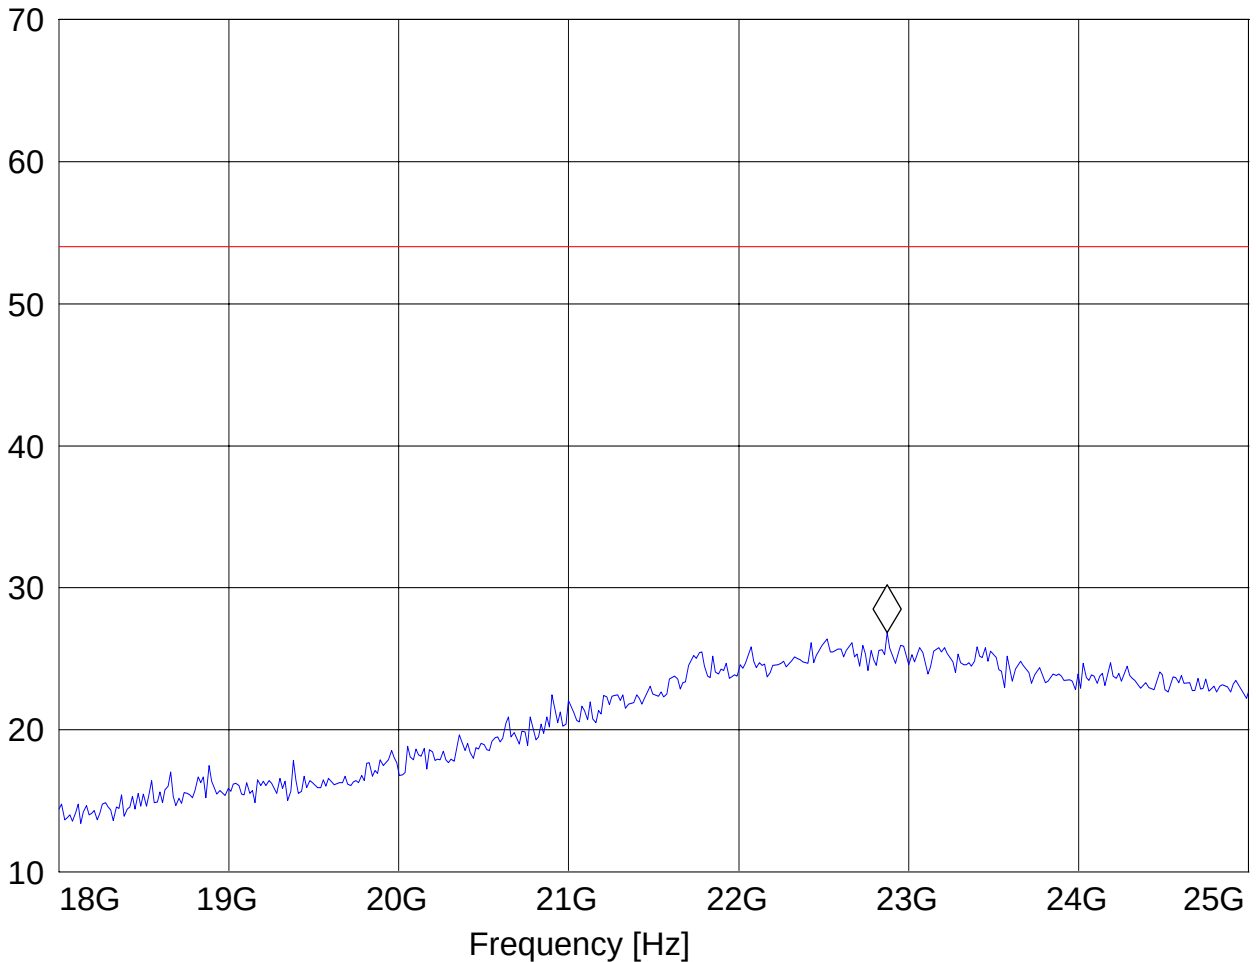



TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2007	1 year
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	August 2007	1 year
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2007	1 year
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2007	1 year
05	Biconilog Antenna	3141	EMCO	0005-1186	June 2007	1 year
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2007	1 year
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2007	1 year
08	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
09	Climatic Chamber	VT4004	Voltsch	G1115	May 2007	1 year
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
12	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2007	1 year
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2007	1 year
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2007	1 year
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2007	1 year
16	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2007	1 year
17	Loop Antenna	6512	EMCO	00049838	July 2007	2 years



6 References

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION,
PART 2--FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS October 1, 2001.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION,
PART 22 PUBLIC MOBILE SERVICES October 1, 1998.

FCC Report and order 02-229 September 24, 2002.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION,
PART 24 PERSONAL COMMUNICATIONS SERVICES October 1, 1998.

ANSI / TIA-603-C-2004 Land Mobile FM or PM Communications Equipment Measurement and Performance Standard November 7, 2002.

7 BLOCK DIAGRAMS

Radiated Testing

ANECHOIC CHAMBER

