



Engineering and Testing for EMC and Safety Compliance

CLASS II PERMISSIVE CHANGE TEST REPORT

Ohmart/VEGA
c/o The Ohmart Corporation
4241 Allendorf Drive
Cincinnati, OH 45209
United States

MODEL: VEGAPULS 68
FCC ID: MOIPULS68

January 18, 2005

STANDARDS REFERENCED FOR THIS REPORT	
PART 2: 2001	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
PART 15: 2001	RADIO FREQUENCY DEVICES - §15.209: RADIATED EMISSIONS LIMITS
Industry Canada	RSS-210: Low Power License-Exempt Radio Communication Devices (All Frequency Bands)
ANSI C63.4-2003	STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS

Frequency Range	Output Power (W) Conducted	Frequency Tolerance (ppm)	Emission Designator
26 GHz	0.01	N/A	N/A

REPORT PREPARED BY TEST ENGINEER: DESMOND FRASER

Document Number: 2004236

This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc.

360 Herndon Parkway
Suite 1400
Herndon, VA 20170
Phone: 703-689-0368 Fax: 703-689-2056

TABLE OF CONTENTS

1	GENERAL INFORMATION	3
1.1	TEST FACILITY	3
1.2	RELATED SUBMITTAL(S)/GRANT(S).....	3
2	CONFORMANCE STATEMENT	4
3	TEST INFORMATION	5
3.1	EXERCISING THE EUT.....	5
3.2	TEST SYSTEM DETAILS	5
3.3	CONFIGURATION OF TESTED SYSTEM.....	6
4	CONDUCTED LIMITS - §15.207	7
5	CONDUCTED EMISSIONS	7
5.1	CONDUCTED EMISSION LIMITS TEST DATA	7
6	RADIATED EMISSION LIMITS - §15.209	8
6.1	RADIATED EMISSION LIMITS TEST PROCEDURE	8
6.2	FIELD STRENGTH CALCULATION	8
6.3	DUTY CYCLE CALCULATION	8
6.4	RADIATED EMISSION LIMITS TEST DATA.....	8
6.5	TEST EQUIPMENT USED FOR TESTING	10
7	TEST PLOTS	11
8	CONCLUSION	14

TABLE OF TABLES

TABLE 3-1:	EQUIPMENT UNDER TEST (EUT).....	5
TABLE 5-1:	CONDUCTED EMISSION LIMITS TEST DATA – NEUTRAL CONDUCTOR.....	7
TABLE 5-2:	CONDUCTED EMISSION LIMITS TEST DATA – PHASE CONDUCTOR	7
TABLE 6-1:	FIELD STRENGTH OF CARRIER WITH WORST CASE PLASTIC HOUSING – 26.5 GHZ	8
TABLE 6-2:	FIELD STRENGTH OF CARRIER WITH WORST CASE PLASTIC HOUSING – 0.009-110 GHZ	9
TABLE 6-3:	RADIATED SPURIOUS EMISSIONS TEST EQUIPMENT	10

TABLE OF PLOTS

PLOT 7-1	PULSE WIDTH AND RISE TIME NORMAL MEASUREMENT MODE.....	11
PLOT 7-2	EUT HORN 33DBI ANTENNA 100% DUTY CYCLE PEAK MODE H POL	12
PLOT 7-3	EUT HORN 33DBI ANTENNA 100% DUTY CYCLE PEAK MODE V POL.....	13

TABLE OF FIGURES

FIGURE 3-1:	CONFIGURATION OF TESTED SYSTEM	6
-------------	--------------------------------------	---

TABLE OF APPENDICES

APPENDIX A:	AGENCY AUTHORIZATION	15
APPENDIX B:	CHANGE DESCRIPTION.....	16
APPENDIX C:	DUTY CYCLE ATTESTATION	17
APPENDIX D:	ANTENNA SPECIFICATIONS.....	18
APPENDIX E:	MANUAL.....	19
APPENDIX F:	TEST CONFIGURATION PHOTOGRAPHS	20
APPENDIX G:	EXTERNAL PHOTOGRAPHS.....	24

TABLE OF PHOTOGRAPHS

PHOTOGRAPH 1:	CONDUCTED EMISSIONS FRONT VIEW	20
PHOTOGRAPH 2:	CONDUCTED EMISSIONS REAR VIEW	21
PHOTOGRAPH 3:	RADIATED EMISSIONS FRONT VIEW	22
PHOTOGRAPH 4:	RADIATED EMISSIONS REAR VIEW.....	23
PHOTOGRAPH 5:	EUT WITH 33 DBI HORN ANTENNA	24
PHOTOGRAPH 6:	33 DBI HORN ANTENNA FRONT VIEW	25
PHOTOGRAPH 7:	33 DBI HORN ANTENNA BACK VIEW	26
PHOTOGRAPH 8:	33 DBI HORN ANTENNA SIDE VIEW.....	27

1 GENERAL INFORMATION

The following Class II Permissive Change Report is prepared on behalf of Ohmart/VEGA Corporation, in accordance with the Federal Communications Commission and Industry Canada Rules and Regulations. The Equipment Under Test (EUT) was Model VEGAPULS 68; FCC ID: MOIPULS68. The test results reported in this document relate only to the item that was tested.

All measurements contained in this application were conducted in accordance with FCC Rules and Regulations CFR 47, Industry Canada RSS-210, and ANSI C63.4 Methods of Measurement of Radio Noise Emissions, 2003. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

1.1 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report dated March 3, 2000, submitted to and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 2001).

1.2 RELATED SUBMITTAL(S)/GRANT(S)

THIS IS A CLASS II PERMISSIVE CHANGE for the original certification granted on July 14, 2004. The only change since the original grant is the addition of a parabolic antenna option.

2 CONFORMANCE STATEMENT

STANDARDS REFERENCED FOR THIS REPORT	
PART 2: 2001	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
PART 15: 2001	RADIO FREQUENCY DEVICES - §15.209: RADIATED EMISSIONS LIMITS
ANSI C63.4-2003	STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS

Frequency Range	Output Power (W) Conducted	Frequency Tolerance (ppm)	Emission Designator
26 GHz	0.01	N/A	N/A

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this attached test record. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from, the above standards for certification methodology.

Signature: 

Date: January 18, 2005

Typed/Printed Name: Desmond Fraser

Position: President

Signature: 

Date: January 18, 2005

Typed/Printed Name: Desmond Fraser

Position: Test Engineer



Accredited by the National Voluntary Accreditation Program for the specific scope of accreditation under Lab Code 200061-0.

Note: This report may not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

3 TEST INFORMATION

3.1 EXERCISING THE EUT

The EUT was configured to continuously transmit data at 100% duty cycle in measurement mode in which the device maintains its full power. The manufacturer confirmed the conducted power under normal measurement mode to be 10 mW. The normal operating measurement mode is a radar pulse with a duty cycle less than 1:100. By configuring the unit to transmit continuously in the continuous measurement mode, a desensitization factor was not required, but a duty cycle factor calculated from the pulse width and the pulse period is used to calculate the average emission. This approach was used because of the 1:100 duty cycle normal operation that would have made it cumbersome to measure the spurious emission from the EUT. The EUT was set up at an antenna-to-EUT test distance of 3 meters. The unit's spurious emissions were also investigated and tested in the restricted and non-restricted band from 9 kHz to 110 GHz. The tests were performed with the EUT polarized horizontally and vertically in order to determine worst-case emissions. The EUT supports only one channel at 26.5 GHz.

3.2 TEST SYSTEM DETAILS

Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable.

TABLE 3-1: EQUIPMENT UNDER TEST (EUT)

DESCRIPTION	MANUFACTURER	MODEL	SERIAL NO.	FCC ID	CABLE DESCRIPTIONS	RTL BAR CODE
Transmitter (EUT)	Ohmart/VEGA	VEGAPULS 68	N/A	MOIPULS68	Unshielded	15811
Antenna	Ohmart/VEGA	33 dBi Horn	N/A	N/A	N/A	N/A

3.3 CONFIGURATION OF TESTED SYSTEM

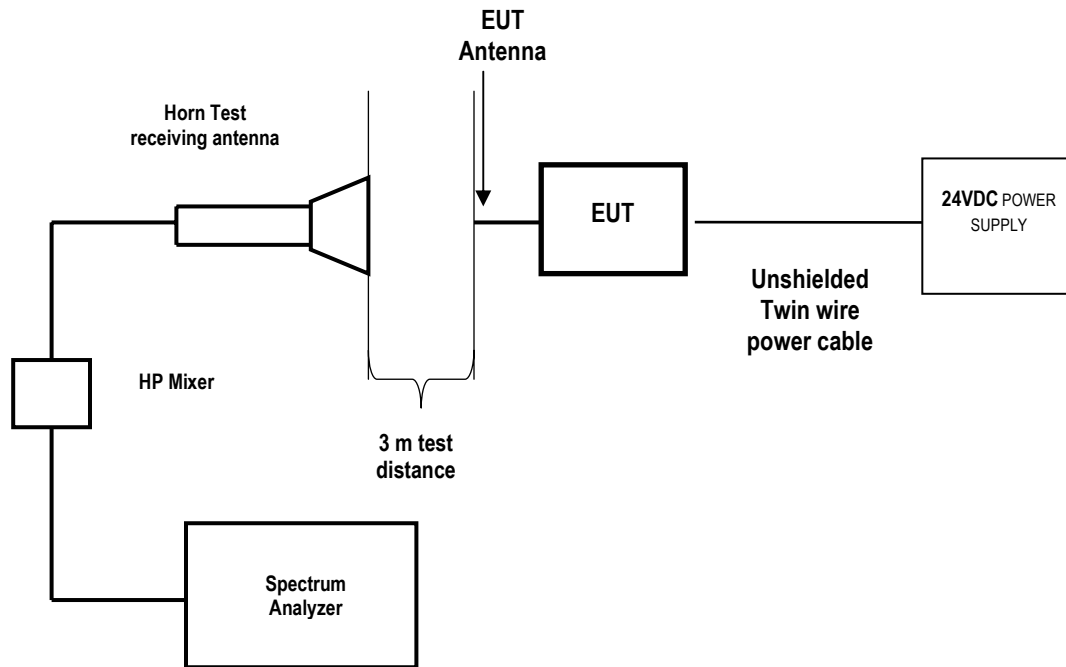


FIGURE 3-1: CONFIGURATION OF TESTED SYSTEM

4 CONDUCTED LIMITS - §15.207

Conducted emissions were performed on the EUT using an off-the-shelf 24 volt power supply. The general conducted limit under Part 15.207 was applied. The EUT was investigated and tested with four housings, namely Stainless Steel, Aluminum, Double Chamber Aluminum, and Plastic. The Plastic housing configuration demonstrated the worst case results. The data below is for the worst case configuration and four antenna configurations.

5 CONDUCTED EMISSIONS

5.1 CONDUCTED EMISSION LIMITS TEST DATA

TABLE 5-1: CONDUCTED EMISSION LIMITS TEST DATA – NEUTRAL CONDUCTOR

Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	CISPR A QP Limit (dBuV)	CISPR A QP Margin (dBuV)	CISPR A AV Limit (dBuV)	CISPR A AV Margin (dBuV)	Pass/Fail
0.270	Pk	54.6	0.4	45.0	61.1	-16.1	51.1	-6.1	Pass
1.190	Pk	42.3	0.6	42.9	56.0	-13.1	46.0	-3.1	Pass
2.720	Pk	40.4	0.9	41.3	56.0	-14.7	46.0	-4.7	Pass
6.240	Pk	38.3	1.2	39.5	60.0	-20.5	50.0	-10.5	Pass
16.210	Pk	29.7	1.5	31.2	60.0	-28.8	50.0	-18.8	Pass
19.850	Pk	36.5	1.4	37.9	60.0	-22.1	50.0	-12.1	Pass
26.600	Pk	32.2	1.7	33.9	60.0	-26.1	50.0	-16.1	Pass

TABLE 5-2: CONDUCTED EMISSION LIMITS TEST DATA – PHASE CONDUCTOR

Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	CISPR A QP Limit (dBuV)	CISPR A QP Margin (dBuV)	CISPR A AV Limit (dBuV)	CISPR A AV Margin (dBuV)	Pass/Fail
0.240	Pk	50.1	0.4	50.5	60.1	-11.6	52.1	-1.6	Pass
1.220	Pk	39.5	0.6	40.1	56.0	-15.9	46.0	-5.9	Pass
1.880	Pk	37.0	0.8	37.8	56.0	-18.2	46.0	-8.2	Pass
2.810	Pk	42.9	0.9	43.8	56.0	-12.2	46.0	-2.2	Pass
7.110	Pk	34.1	1.2	35.3	60.0	-24.7	50.0	-14.7	Pass
16.570	Pk	32.0	1.6	33.6	60.0	-26.4	50.0	-16.4	Pass
19.970	Pk	37.3	1.4	38.7	60.0	-21.3	50.0	-11.3	Pass
26.600	Pk	32.3	1.7	34.0	60.0	-26.0	50.0	-16.0	Pass

TEST PERSONNEL:

Desmond Fraser		January 5, 2005
Test Technician/Engineer	Signature	Date Of Test

6 RADIATED EMISSION LIMITS - §15.209

6.1 RADIATED EMISSION LIMITS TEST PROCEDURE

Radiated Spurious Emissions (harmonics and spurious emissions) in the restricted and non-restricted bands were investigated from 0.009 kHz to 110 GHz. The test methods used during testing conform to the ANSI C63.4, 2003. The restricted bands are listed in Part 15.205. The maximum permitted average field strength for the restricted band is listed in Part 15.209. The EUT was tested in three orthogonal planes namely X, Y, and Z. The test antenna was horizontally and vertically polarized during testing. The general limit under Part 15.209 was applied for all frequencies 0.009 kHz to 110 GHz per FCC 15.209. There was no spurious noise detected from 0.009 kHz to 110 GHz except the carrier at 26 GHz. The EUT was investigated and tested with four housings, namely Stainless Steel, Aluminum, Double Chamber Aluminum, and Plastic. The Plastic housing configuration demonstrated the worst case results. The data below is for the worst case configuration and four antenna configurations.

6.2 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor from the measured Spectrum Analyzer reading.

$$\text{Spectrum Analyzer Level Corrected (dBuV/m)} = \text{Spectrum Analyzer Level (dBuV/m)} + \text{AF (dB/m)} + \text{CL (dB)}$$

AF = antenna factor

CL = cable loss

6.3 DUTY CYCLE CALCULATION

Pulse width = 1.2 nS

Pulse period = 560 nS

$$\text{Duty Cycle} = 20 \cdot \log 1.2/560 = 53.4 \text{ dB}$$

6.4 RADIATED EMISSION LIMITS TEST DATA

TABLE 6-1: FIELD STRENGTH OF CARRIER WITH WORST CASE PLASTIC HOUSING – 26.5 GHZ

Frequency (GHz)	Detector	Antenna POL	Spectrum Analyzer Level (dBuV)	Cable Loss (dB)	Antenna Gain dB/m	Spectrum Analyzer Level Corrected (dBuV/m)	FCC Limit (dBuV)	Margin (dB)
26.5	Peak	H	33.3 ⁽¹⁾	0	40	73.3	74.0	-0.7
26.5	Avg	H	-20.1 ^(1,2)	0	40	19.9	54.0	-34.1
26.5	Peak	V	31.0 ⁽¹⁾	0	40	71.0	74.0	-3.0
26.5	Avg	V	-22.4 ^(1,2)	0	40	17.6	54.0	-36.4

Note 1: The mixer conversion loss plus cable loss is factored within the Spectrum Analyzer level reading shown on plot.

Note 2: 53.4 dB duty cycle correction factor is used in the final calculation found in the table above.


Note 3: The plot data is corrected by 20 dB from 20Log 0.3/3 test distance to limit distance ratio in the table above.

TABLE 6-2: FIELD STRENGTH OF CARRIER WITH WORST CASE PLASTIC HOUSING – 0.009-110 GHZ

Frequency (GHz)	Detector	Antenna POL	Spectrum Analyzer Level (dBuV)	Cable Loss (dB)	Antenna Gain	Spectrum Analyzer Level Corrected (dBuV/m)	FCC Limit (dBuV)	Margin (dB)
0.009-110	Peak	-(4)-	---	1	26.0	---	74.0	---
0.009-110	Avg	-(4)-	---	1	26.0	---	54.0	---

Note 4: No emission above the noise floor detected.

TEST PERSONNEL:


Desmond Fraser		January 5, 2005
Test Technician/Engineer	Signature	Date Of Test

6.5 TEST EQUIPMENT USED FOR TESTING


TABLE 6-3: RADIATED SPURIOUS EMISSIONS TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DATE
900717	Hewlett Packard	11970U	Harmonic Mixer (40 - 60 GHz)	2332A01110	2/19/06
901218	EMCO	3160-09	Horn Antenna (18 - 26 GHz)	960281-003	6/14/05
900392	Hewlett Packard	1197OK	Harmonic Mixer (18 - 26 GHz)	3525A00159	2/01/06
900715	Hewlett Packard	11970V	Harmonic Mixer (50 - 75 GHz)	2521A00512	7/19/05
900716	Hewlett Packard	11970W	Harmonic Mixer (75 - 110 GHz)	2521A00710	6/08/05
900126	Hewlett Packard	11970A	Harmonic Mixer (26 - 40 GHz)	2332A01199	6/08/05
900056	ATM	19-443-6	Horn Antenna (40 - 60 GHz)	8041704-01	6/08/05
901218	EMCO	3160-09	Horn Antenna (25 - 40 GHz)	960452-007	6/08/05
900826	ATM	08-443-6	Horn Antenna (90 - 140 GHz)	8041904-01	6/08/05
900719	ATM	05-443-6	Horn Antenna (140 - 220 GHz)	50685	6/08/05
90066	ATM	10-443-6	Horn Antenna (75 - 110GHz)	805 1905-1	6/08/05
901262	EMCO	3160-09	Horn Antenna (1 - 18 GHz)	6748	2/04/06
900723	Hewlett Packard		Amplifier (1 GHz - 26 GHz)	NA	6/08/05
900744	Olsen	Mixer	Mixer (90 - 220 GHz)	F80814-1	1/04/06
900744	Olsen	Mixer	Mixer (140 - 220 GHz)	G80814-1	1/04/06
900444	Miteq	Amplifier	Amplifier (30 - 1000 MHz)	PR1040	6/08/05
900791	Schaffner - Chase	CBL6112	Antenna (25 MHz - 2 GHz)	2099	7/07/05
900151	Rohde & Schwarz	HFH2-Z2	Loop Antenna (9 kHz - 30 MHz)	827525	8/09/06
900772	EMCO	3161-02	Antenna (2 - 4 GHz)	9804-1044	7/08/05
900321	EMCO	3161-03	Antenna (4 - 8.2 GHz)	9508-1020	7/08/05
900323	EMCO	3161-07	Antenna (8.2 - 12 GHz)	9508-1054	7/08/06


7 TEST PLOTS

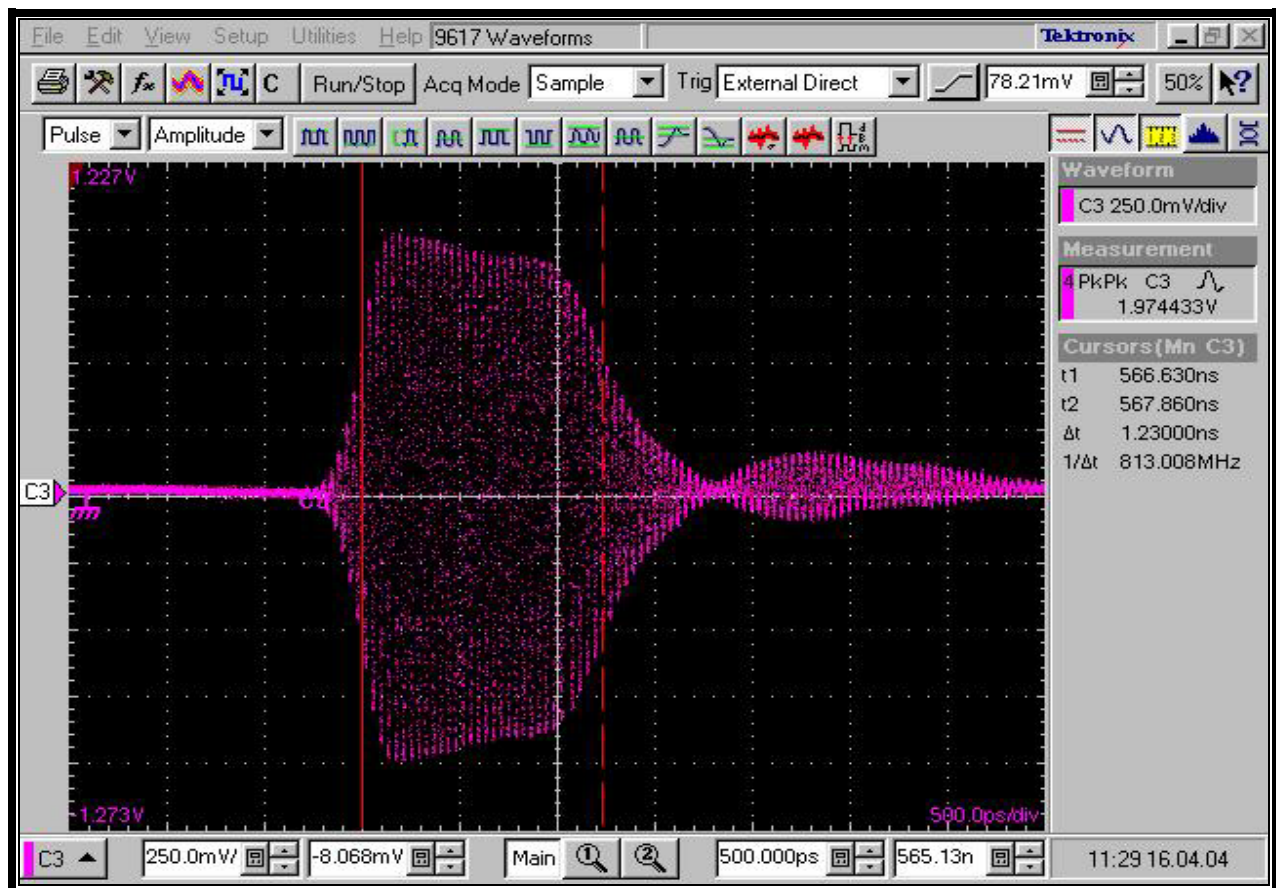

PLOT 7-1 PULSE WIDTH AND RISE TIME NORMAL MEASUREMENT MODE

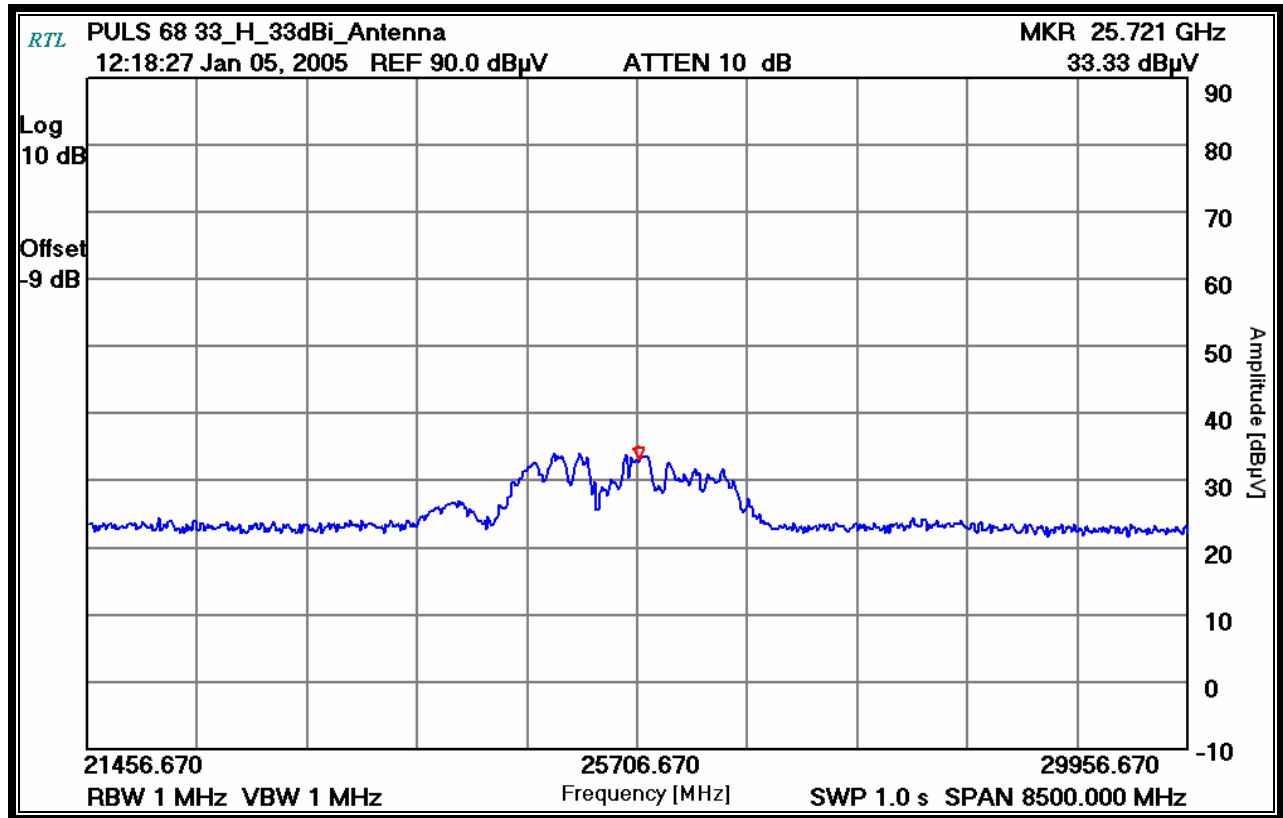


PLOT 7-2 EUT HORN 33DBI ANTENNA 100% DUTY CYCLE PEAK MODE H POL

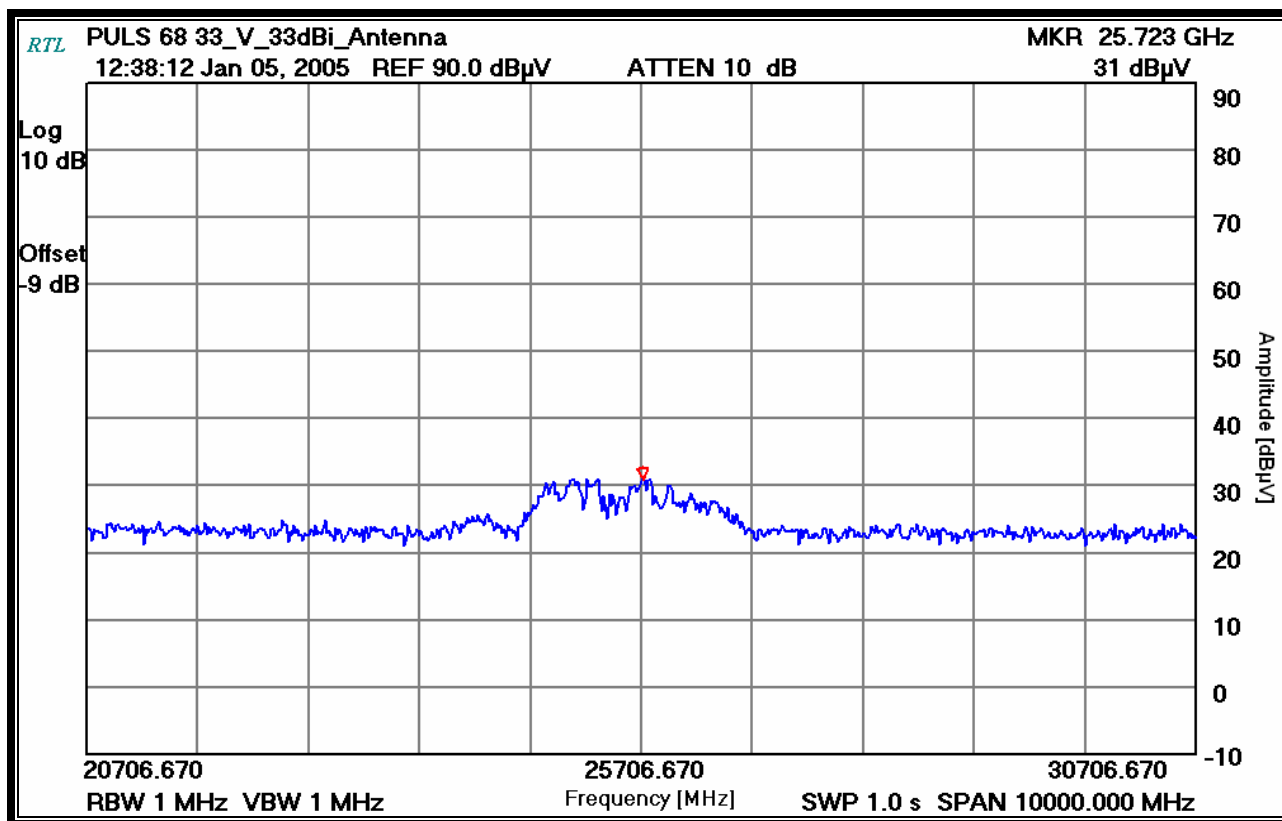

PLOT 7-3 EUT HORN 33DBI ANTENNA 100% DUTY CYCLE PEAK MODE V POL

TEST PERSONNEL:

Desmond Fraser		January 5, 2005
Test Technician/Engineer	Signature	Date Of Test

8 CONCLUSION

The data in this measurement report shows that the Ohmart/VEGA Inc., Model VEGAPULS 68, FCC ID: MOIPULS68, complies with all the requirements of Parts 2, and 15 of the FCC Rules and Regulations, and Industry Canada RSS-210.