

Straubing, 22 March 2006

TEST - REPORT

No. 50511-40907-4 (Edition 2)

for

Solid Radar FMR 25x

Level Measuring Transmitter

Applicant: Endress & Hauser GmbH & Co. KG

Test Specifications: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.205, 15.207 and 15.209

Limited Testing for Class II Permissive
Change to include additional antennas (3"
and 4" horn antennas with either DN 80 and
DN100 flange)

Note:

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

Table of Contents

1	Description of the Equipment Under Test (EUT).....	3
2	Administrative Data.....	4
3	Identification of the Test Laboratory.....	5
4	Summary	6
5	Operation Mode and Configuration of EUT.....	7
6	Measuring Methods	8
6.1	Radiated emission in Fully Anechoic Room.....	8
6.2	Radiated emission at Open Field Test Site.....	10
6.3	Desensitization of pulsed Emissions	11
7	Photographs Taken During Testing	12
8	Test Results.....	15
8.1	Occupied Bandwidth.....	16
8.2	Designation of Emissions	18
8.3	Duty Cycle Measurement	19
8.4	Restricted bands of operation.....	22
8.5	Radiated Emission Measurement 30 MHz to 110 GHz	23
9	Referenced Regulations	24
10	Charts taken during testing	26

1 Description of the Equipment Under Test (EUT)

General data of EUT	
Type designation ¹ :	Solid Radar FMR 25x
Serial number(s):	7C007901083
Manufacturer:	Endress & Hauser GmbH & Co. KG
Type of equipment:	Level Measuring Transmitter
Version:	with Horn Antenna
FCC ID:	
Additional parts/accessories:	

Technical data of EUT					
Application frequency range:	24.00 – 24.12 GHz				
Frequency range:	24.00 – 24.12 GHz				
Operating frequency:	24.12 GHz (nominal)				
Type of modulation:	1G08P0NAN				
Pulse train:	558.5 ns				
Pulse width:	2.79 ns				
Number of RF-channels:	1				
Channel spacing:	Not Applicable				
Designation of emissions ² :	1G08P0NAN				
Type of antenna:	Horn Antenna				
Size/length of antenna:	Type	Gain	Length	Tested	
	80 mm / 3"	23.8 dBi	211 mm	No	
	100 mm / 4"	26 dBi	282 mm	No	
	100 mm / 4"	26 dBi	430 mm	Yes	
Statement:	All antennas are of the same type and the antenna with the highest gain has been tested: The antennas can be equipped with either DN 80 or DN flange which does not affect the antenna gain.				
Type of power supply:	DC supply				
Specifications for power supply:	nominal voltage:		24 V		
	minimum voltage:		16 V		
	maximum voltage:		36 V		

¹ Type designation of the system if EUT consists of more than one part.

² Also known as "Class of Emission".

2 Administrative Data

Application details	
Applicant (full address):	Endress & Hauser GmbH & Co. KG Hauptstraße 1 D 79689 Maulburg Germany
Contact person:	Mr. Peter Klöfer
Contract identification:	
Receipt of EUT:	January 2006
Date(s) of test:	February – March 2006
Note(s):	

Report details	
Report number:	50511-40907-4
Edition:	1
Issue date:	22 March 2006

3 Identification of the Test Laboratory

Details of the Test Laboratory	
Company name:	Senton GmbH EMI/EMC Test Center
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory Accreditation:	DAR-Registration No. DAT-P-171/94-02
FCC Test Site registration number	90926
Industry Canada Test site registration:	IC 3050
Contact person:	Mr. Johann Roidt Phone: (+49) (0)9421 5522-0 Fax: (+49) (0)9421 5522-99

4 Summary

Summary of test results
The tested sample complies with the requirements set forth in the Code of Federal Regulations CFR 47, Part 15, Sections 15.205, 15.207 and 15.209 of the Federal Communication Commission (FCC)

Personnel involved in this report	
Laboratory Manager:	 Mr. Johann Roidt
Responsible for testing:	Mr. Johann Roidt
Responsible for test report:	Mr. Johann Roidt

5 Operation Mode and Configuration of EUT

Operation Mode

Normal operation mode: Measurement with pulsed signal.

Configuration of EUT

FCC test setup.
 DC 24 V power supply.
 EUT in vertical position.

List of ports and cables

<i>Port</i>	<i>Description</i>	<i>Classification³</i>	<i>Cable type</i>	<i>Cable length</i>
1	DC supply with HART communication	dc power signal/control port	Shielded	> 3 m

List of devices connected to EUT

<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>

List of support devices


<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>

³ Ports shall be classified as ac power, dc power or signal/control port

6 Measuring Methods

6.1 Radiated emission in Fully Anechoic Room

Measurement Procedure:	
Rules and Specifications:	CFR 47 Part 15, section 15.209
Guide:	ANSI C63.4
Radiated emission in fully anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33. Measurements are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz). Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used. All tests below 18 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance is reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary. If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions. For final testing below 1 GHz an open field test-site is used and the plots recorded in the fully anechoic room are indicated as prescans.	

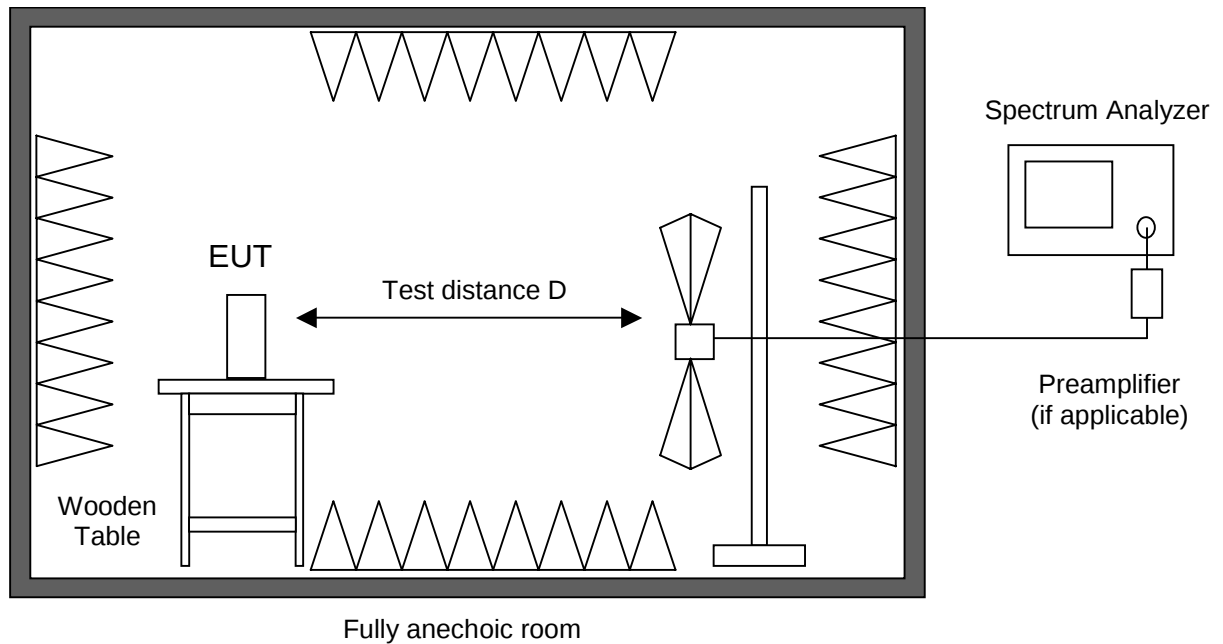


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
☒	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
☐	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
☒	Preamplifier	CPA9231A	3393	Schaffner
☒	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
☐	Preamplifier 0.5-8 GHz	AMF-4D-005080-25-13P	860149	Miteq
☒	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
☒	External Mixer	WM782A	845881/005	Tektronix
☒	Harmonic Mixer	FS-Z30	843389/007	Rohde & Schwarz
	Accessories			
☒	Trilog broadband antenna	VULB 9163	9163-188	Schwarzbeck
☒	Horn antenna	3115	9508-4553	EMCO
☐	Horn antenna	3160-03	9112-1003	EMCO
☐	Horn antenna	3160-04	9112-1001	EMCO
☒	Horn antenna	3160-05	9112-1001	EMCO
☒	Horn antenna	3160-06	9112-1001	EMCO
☒	Horn antenna	3160-07	9112-1008	EMCO
☒	Horn antenna	3160-08	9112-1002	EMCO
☒	Horn antenna	3160-09	9403-1025	EMCO
☒	Horn antenna	3160-10	399185	EMCO
☒	Fully anechoic room	No. 2	1452	Albatross Projects

6.2 Radiated emission at Open Field Test Site

Measurement Procedure:	
Rules and Specifications:	CFR 47 Part 15, section 15.209
Guide:	ANSI C63.4
Radiated emission at open field test site is measured in the frequency range 30 MHz to 1 GHz using a biconical antenna up to 300 MHz and a logarithmic periodic antenna above. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected. If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value. Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in the fully anechoic room. EUT is rotated all around and receiving antenna is raised and lowered within 1 meter to 4 meters to find the maximum levels of emission. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions. For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.	

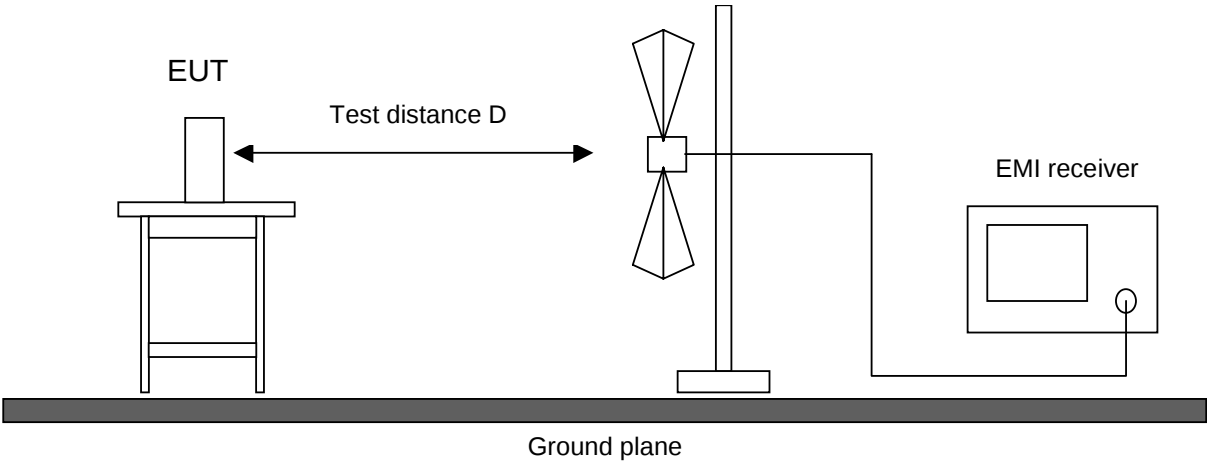

Test instruments used:

Used	Type		Model	Serial No. or ID	Manufacturer
☐	EMI receiver		ESVP	881414/009	Rohde & Schwarz
☐	Biconical antenna	EG 1	HK 116	842204/001	Rohde & Schwarz
☐	Log. per. antenna	EG 1	HL 223	841516/023	Rohde & Schwarz
☐	Open field test site		EG 1	1450	Senton

6.3 Desensitization of pulsed Emissions

Since the EUT transmits pulsed energy, the desensitization factor α has been calculated and included in the calculation for the final peak value.

In the HP Application Note 150-2 the analyzer settings to measure a line spectrum are defined as follows:

- a) Bandwidth $B < 0.3 \times \text{PRF}$
- b) Scan time $T_s > F_s / B^2$

With the pulse repetition frequency (PRF) of the EUT of 3.6 MHz and the selected measuring bandwidth of $B = 1$ MHz the requirement a) was observed.

The scan width of $F_s = 3$ GHz and Bandwidth of $B = 1$ MHz leads to following values:

$$F_s/B^2 = 3 \text{ GHz} / (1 \text{ GHz})^2 = 3 \times 10^{-9} \text{ s}$$

The selected scan time of $T_s = 20$ ms meets requirement b). Hence, a line spectrum was measured, which could be seen, when the Pseudo-Noise-mode of the EUT was switched off (no influence on the measured amplitudes) and the frequency scale of the analyser zoomed.

The desensitization factor α_i was calculated according to HP Application note 150-2:

$$\alpha_i = 20 \log (\tau_{\text{eff}} / T) = -46 \text{ dB}$$

The calculation based on the pulse width $\tau_{\text{eff}} = 2.79$ ns and the pulse period $T = 558.5$ ns, which have been supplied by the applicant.

To avoid overloading the spectrum analyzer the internal preselector has been activated during final testing. A linearity check by adding a 3 dB attenuator to the input was used to ensure integrity of the test data.

Sample Calculation of Field Strength values for pulsed systems:


- 1) Measure Peak value with analyzer RBW set to 1 MHz, VBW set to 1 MHz, T_s set to 20 ms
- 2) Calculate Field Strength by adding antenna correction factor
- 3) Calculate True Peak Field Strength by adding Desensitization Factor
- 4) Calculate Average value by subtracting Duty Cycle Correction Factor from True Peak Field Strength Value

7 Photographs Taken During Testing

**Test setup for radiated emission measurement
(fully anechoic room)**



**Test setup for radiated emission measurement
(fully anechoic room) - continued -**

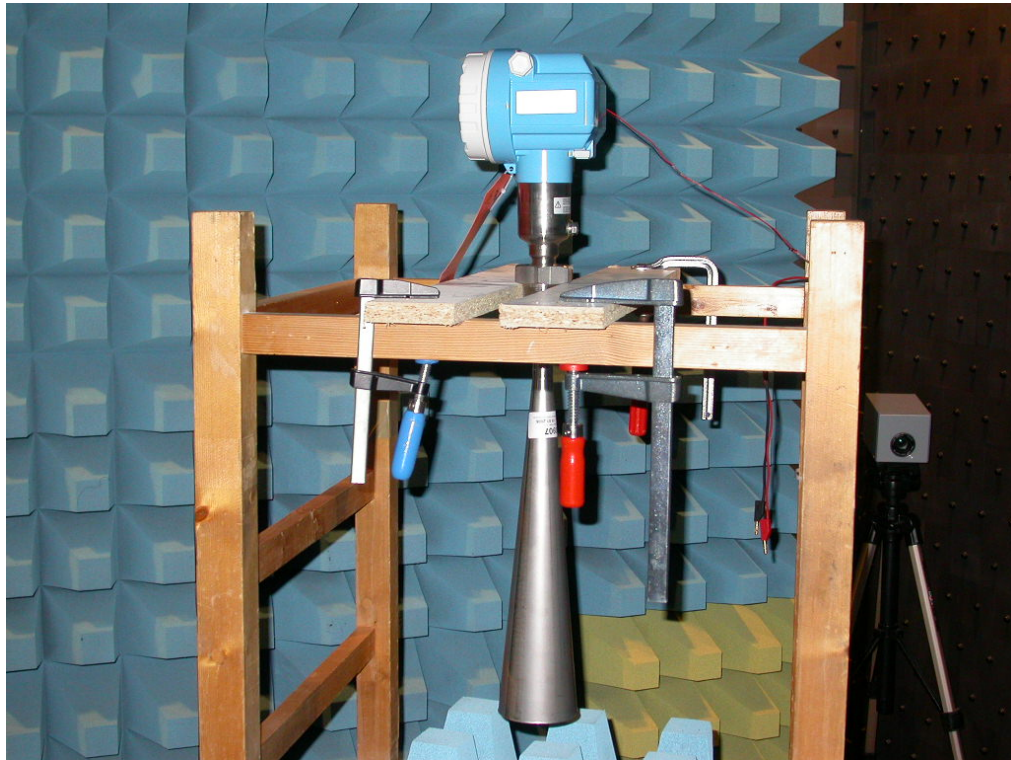

8 Test Results


FCC CFR 47 Parts 2 and 15			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
2.202(a)	Occupied bandwidth	16	Recorded
2.201, 2.202	Class of emission	18	Calculated
15.35(c)	Pulse train measurement for pulsed operation	19	Recorded
15.205(a)	Restricted bands of operation	22	Test passed
15.207	Conducted AC powerline emission 150 kHz to 30 MHz		See test report 50511-40907-2 ⁴
15.205(b) 15.209	Radiated emission 9 kHz to 30 MHz	---	See test report 50511-40907-2
15.205(b) 15.209	Radiated emission 30 MHz to 110 GHz	23	Test passed

⁴ Conducted AC powerline emission not applicable. Conducted DC powerline emission performed instead.

8.1 Occupied Bandwidth

Rules and specifications:	CFR 47 Part 2, section 2.202(a) ANSI C63.4, annex H.6	
Guide:	ANSI C63.4	
Description:	The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission. The occupied bandwidth according to ANSI C63.4, annex H.6; is measured as the frequency range defined by the points that are 26 dB down relative to the maximum level of the modulated carrier. The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.	
Comment:	Test performed up to 26.5 GHz only	
Date of test:	11 March 2005	
Test site:	Fully anechoic room, cabin no. 2	

Occupied Bandwidth (-26 dB):

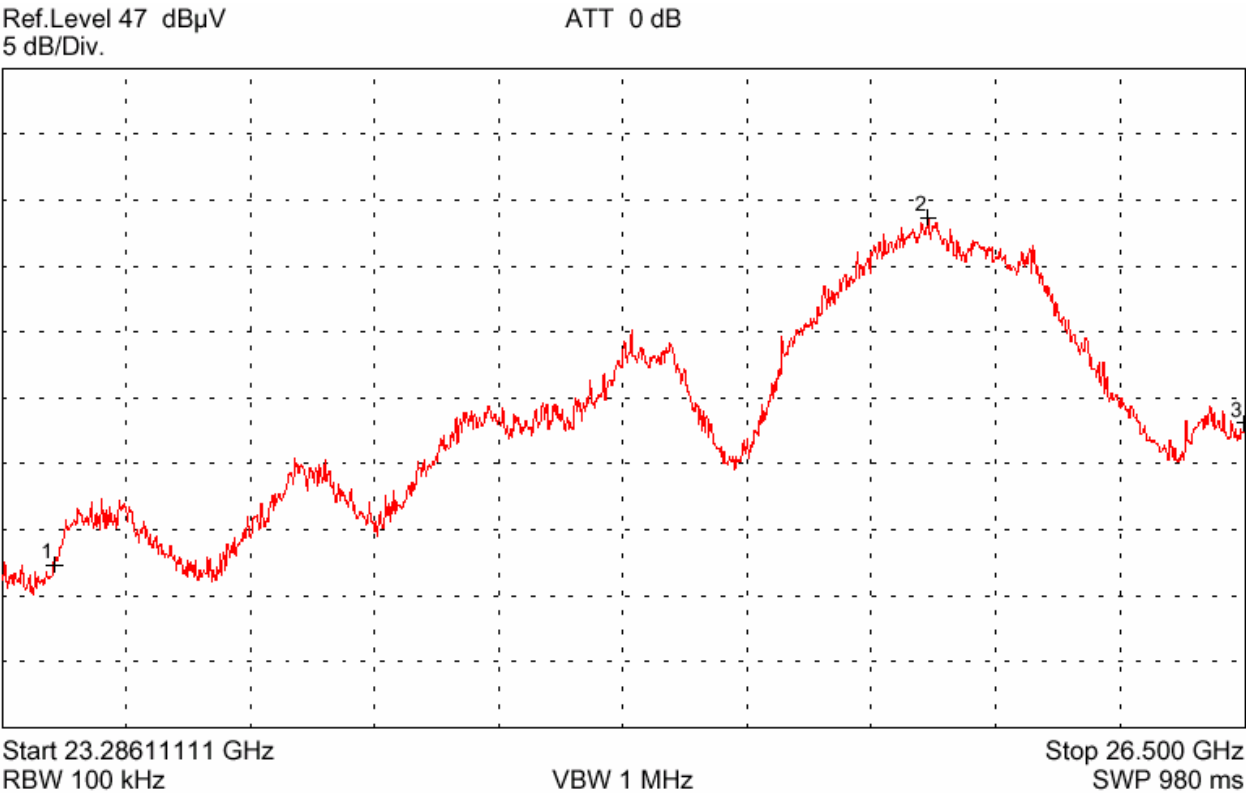

Occupied Bandwidth (-26 dB):	> 3.0 GHz
------------------------------	---------------------

8.2 Designation of Emissions

Rules and specifications:	CFR 47 Part 2, sections 2.201 and 2.202
Guide:	ANSI C63.4 / TRC-43

Type of modulation:	Unmodulated Pulse Emission
---------------------	----------------------------

B_n = Necessary Bandwidth	$B_n = 2 K / t$
K = Overall numerical factor	K = 1.5
t = Pulse duration in seconds at half-amplitude	t = 2.79ns
Calculation:	$B_n = 2 \cdot 1.5 / 2.79\text{ns} = 1.075 \text{ GHz}$


Designation of Emissions:	1G08P0NAN
---------------------------	------------------

8.3 Duty Cycle Measurement


Rules and specifications:	CFR 47 Part 15, section 15.35(c)
Guide:	ANSI C63.4


Comment:	Measurement with negative diode detector.
Date of test:	8 March 2005
Test site:	Fully anechoic room, cabin no. 2

Total Pulse Train:

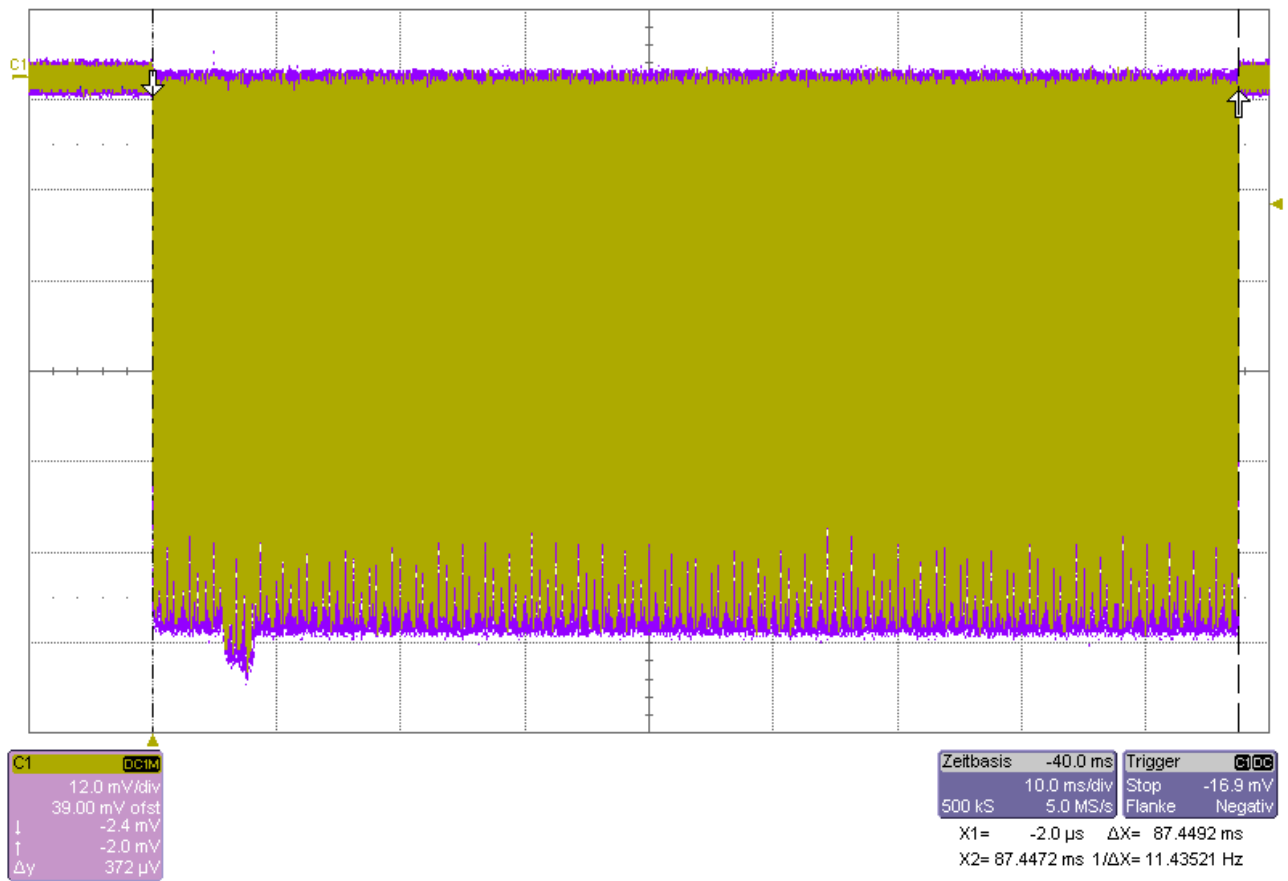

Worst case:

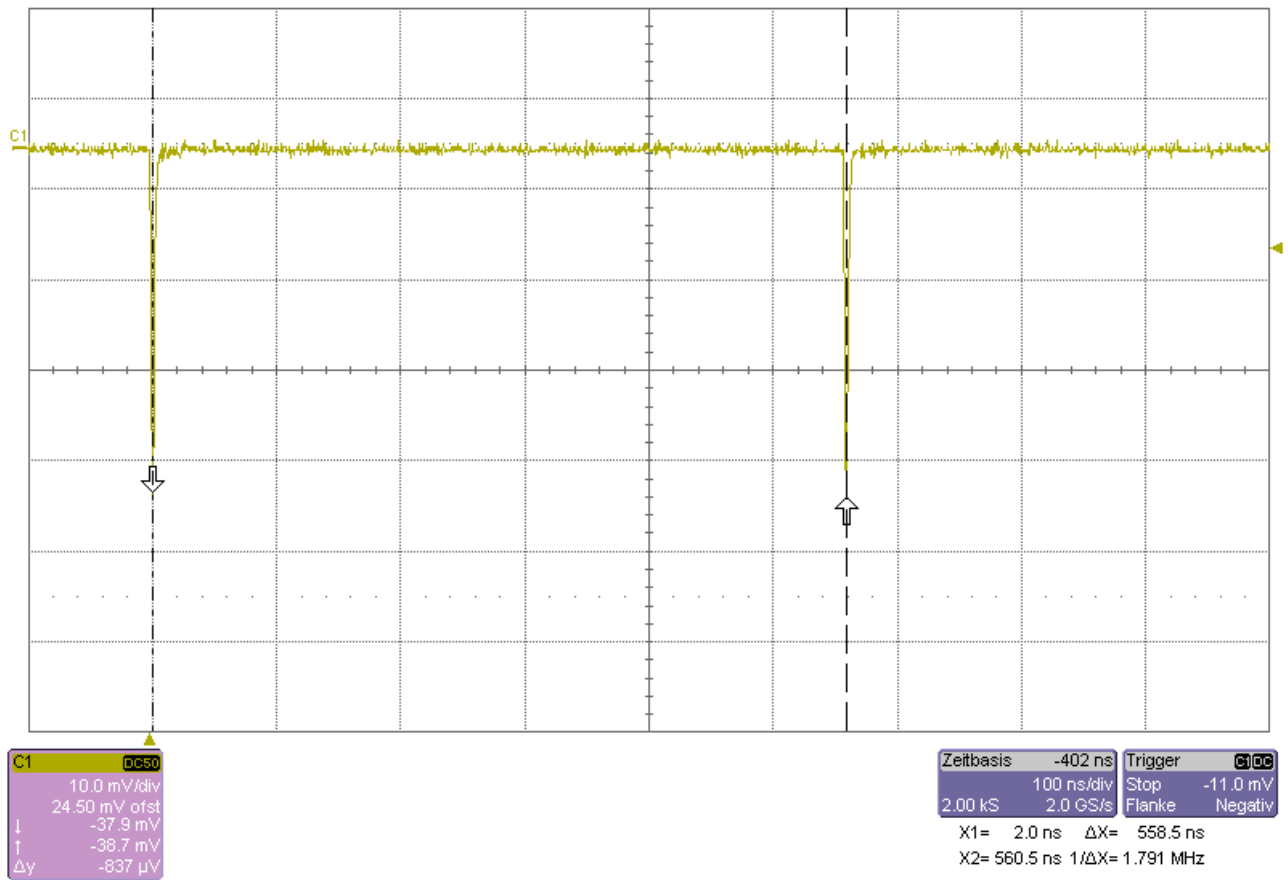

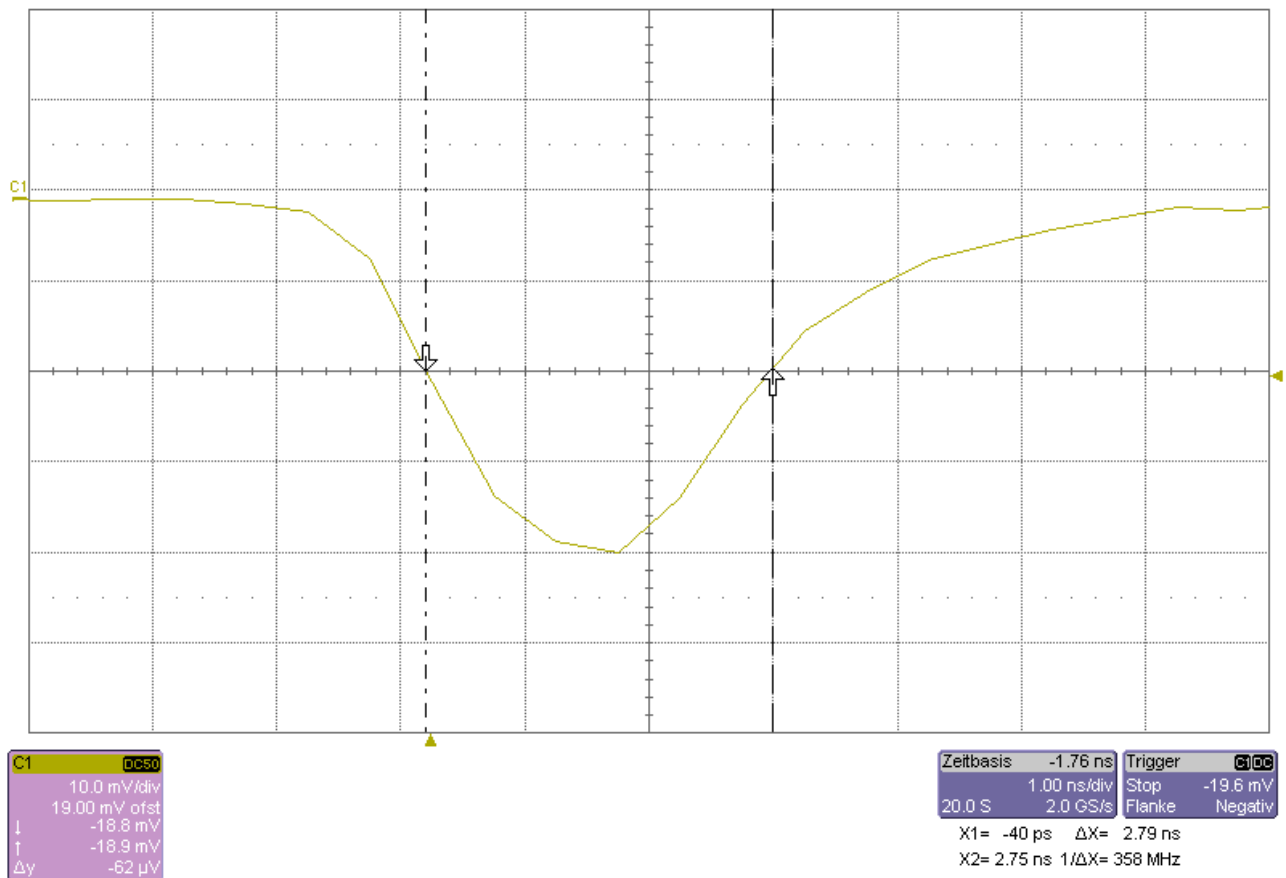


Calculation of Duty cycle correction:

TX-On-Time (worst case):	T_{on}	=	2.79 ns
Pulse Train Time:	T_{pt}	=	558.5 ns
Mod Time:	T_{period}	=	558.5 ns
Pulse Train Correction:	C_{pt}	=	$20 \cdot \text{Log}(T_{on} / T_{period}) \text{ dB}$
		=	-46.0 dB

8.4 Restricted bands of operation

Rules and specifications:	CFR 47 Part 15, section 15.205(a)
Guide:	ANSI C63.4
Limit:	Only spurious emissions are permitted in any of the frequency bands listed in CFR 47 Part 15, section 15.205(a)

Comment:	
Date of test:	
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters

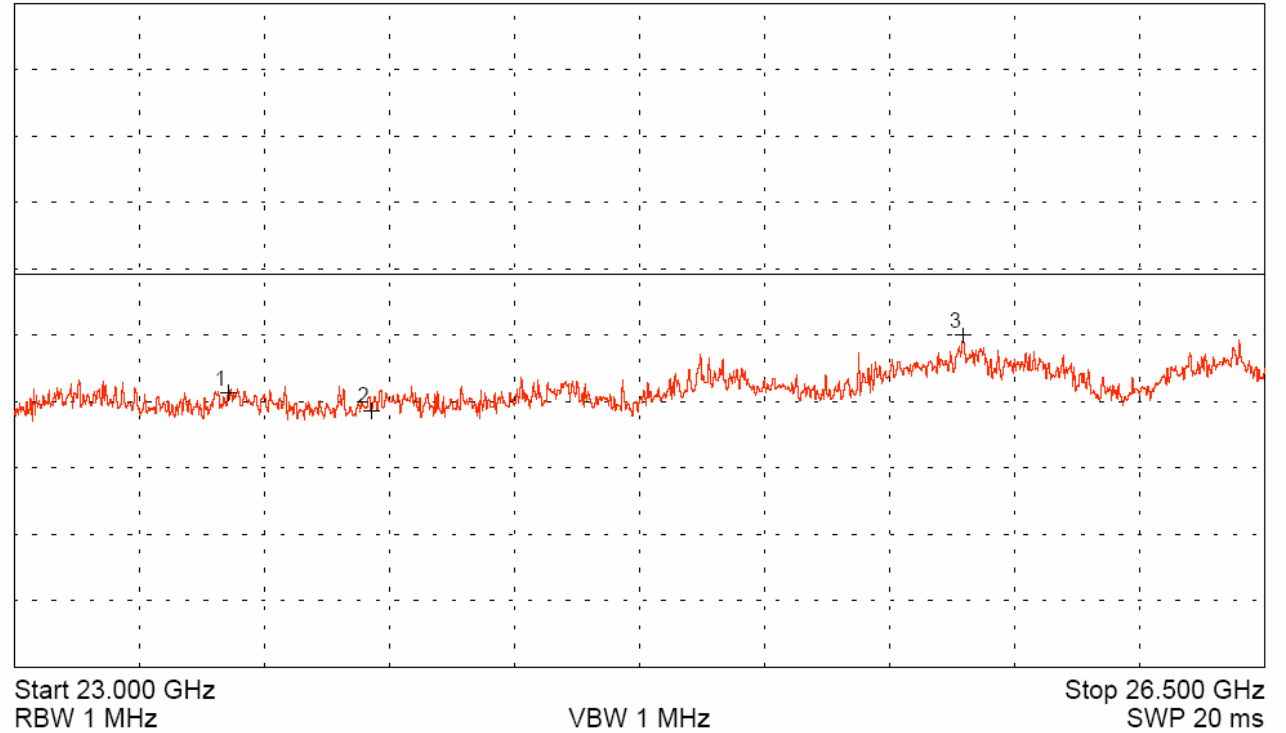

Test Result:	Test passed
--------------	-------------

8.5 Radiated Emission Measurement 30 MHz to 110 GHz

Rules and specifications:	CFR 47 Part 15, section 15.209		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0

Comment:	
Date of test:	
Test site:	
	Frequencies ≤ 1 GHz: Open field test site Frequencies > 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	3 meters

Test Result:	Test passed
--------------	-------------

Frequency (MHz)	Polarization	Detector	Reading (dBμV)	Correction (dB/m)	Pulse Train Corr. (dB)	Final Value (dBμV(m)	Limit (dBμV/m)	Margin (dB)
26390.000	horizontal	Peak	6.0	43.0	0.0	49.0	54.0	5.0

9 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

☒	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 10, 2004
☒	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	September 19, 2005
☒	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	December 11, 2003 (published on January 30, 2004)
☒	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997


Page intenionally left blank

10 Charts taken during testing

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: FMR-25X	Comment: - "Virtual Tank" Mode (EUT Antenna pointing downwards)
Serial no.: Horn Antenna	
Applicant: Endress + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 03/08/2006	Operator: J. Roidt
Test performed: automatically	File name: default.emi


Detector: Peak	List of values: 10 dB Margin 50 Subranges
--------------------------	--

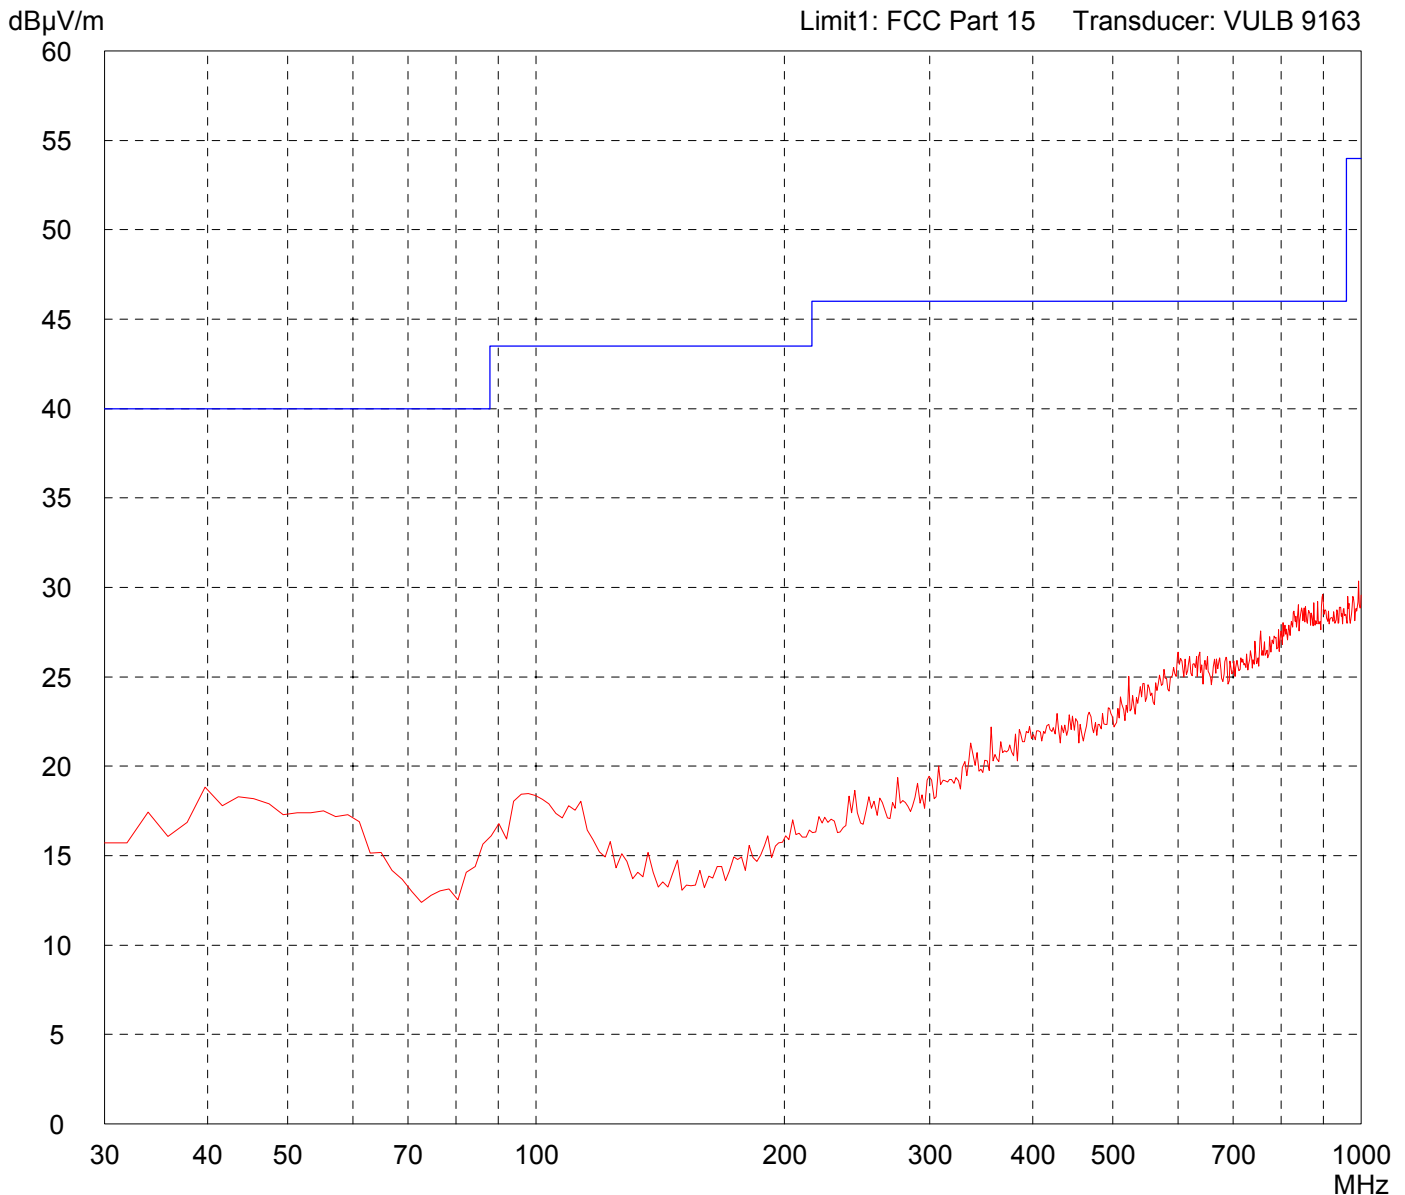

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: FMR-25X	Comment: - "Virtual Tank" Mode (EUT Antenna pointing downwards)
Serial no.: Horn Antenna	
Applicant: Endress + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 03/08/2006	Operator: J. Roidt
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: 10 dB Margin 50 Subranges
--------------------------	--

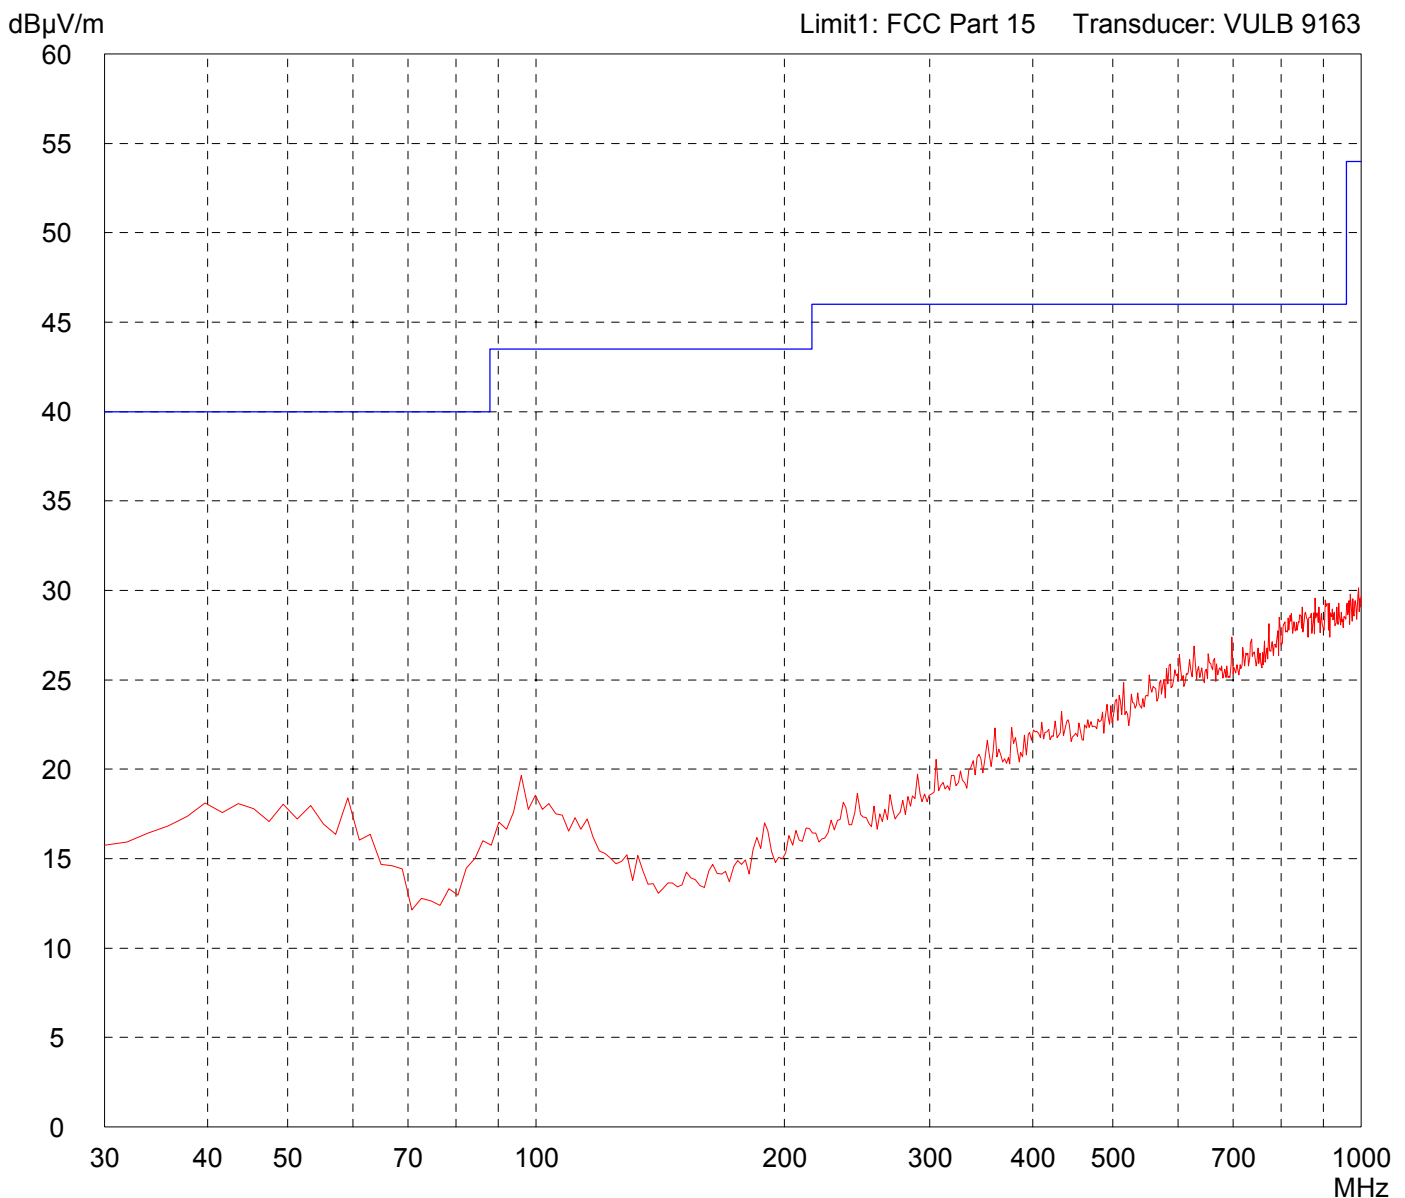


Result: Prescan	Project file: 50511-40907-3
	Page 28 of 45 Pages

Radiated Emission Test 1 GHz - 4 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: FMR-25X	Comment: - "Virtual Tank" Mode (EUT Antenna pointing downwards)
Serial no.: Horn Antenna	
Applicant: Endress + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 03/08/2006	Operator: J. Roidt
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

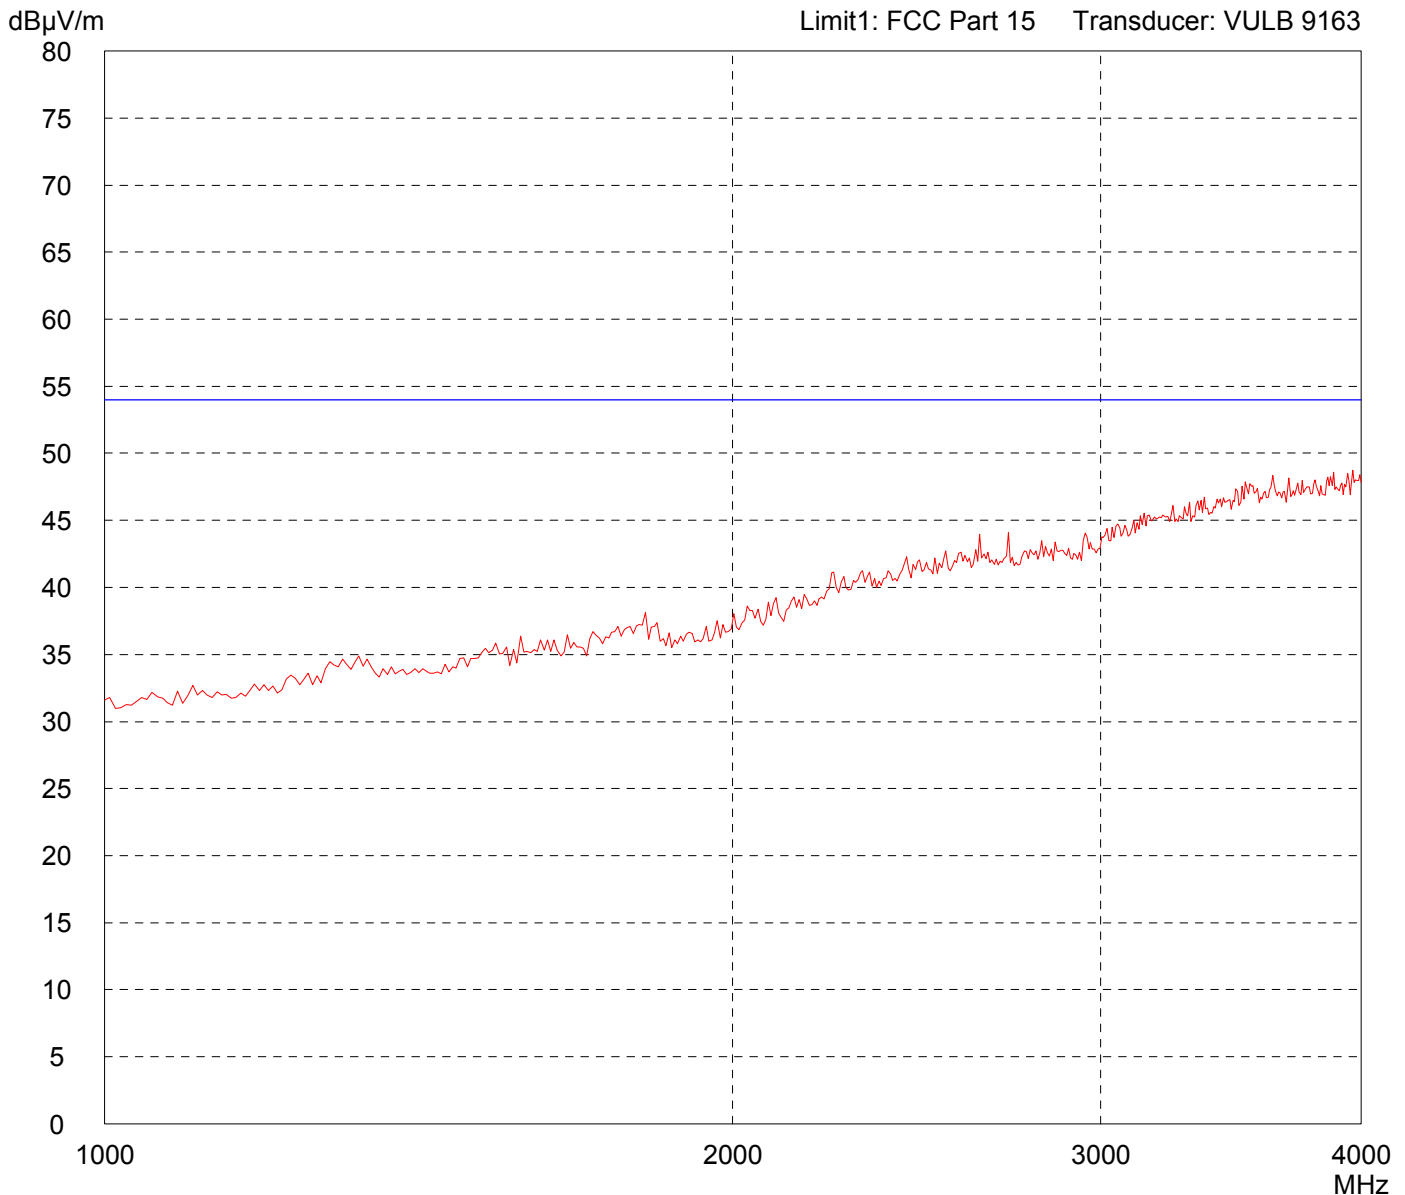


Result: Limit kept	Project file: 50511-40907-3
------------------------------	---------------------------------------

Page 29 of 45 Pages

Radiated Emission Test 1 GHz - 4 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: FMR-25X	Comment: - "Virtual Tank" Mode (EUT Antenna pointing downwards)
Serial no.: Horn Antenna	
Applicant: Endress + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 03/08/2006	Operator: J. Roidt
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

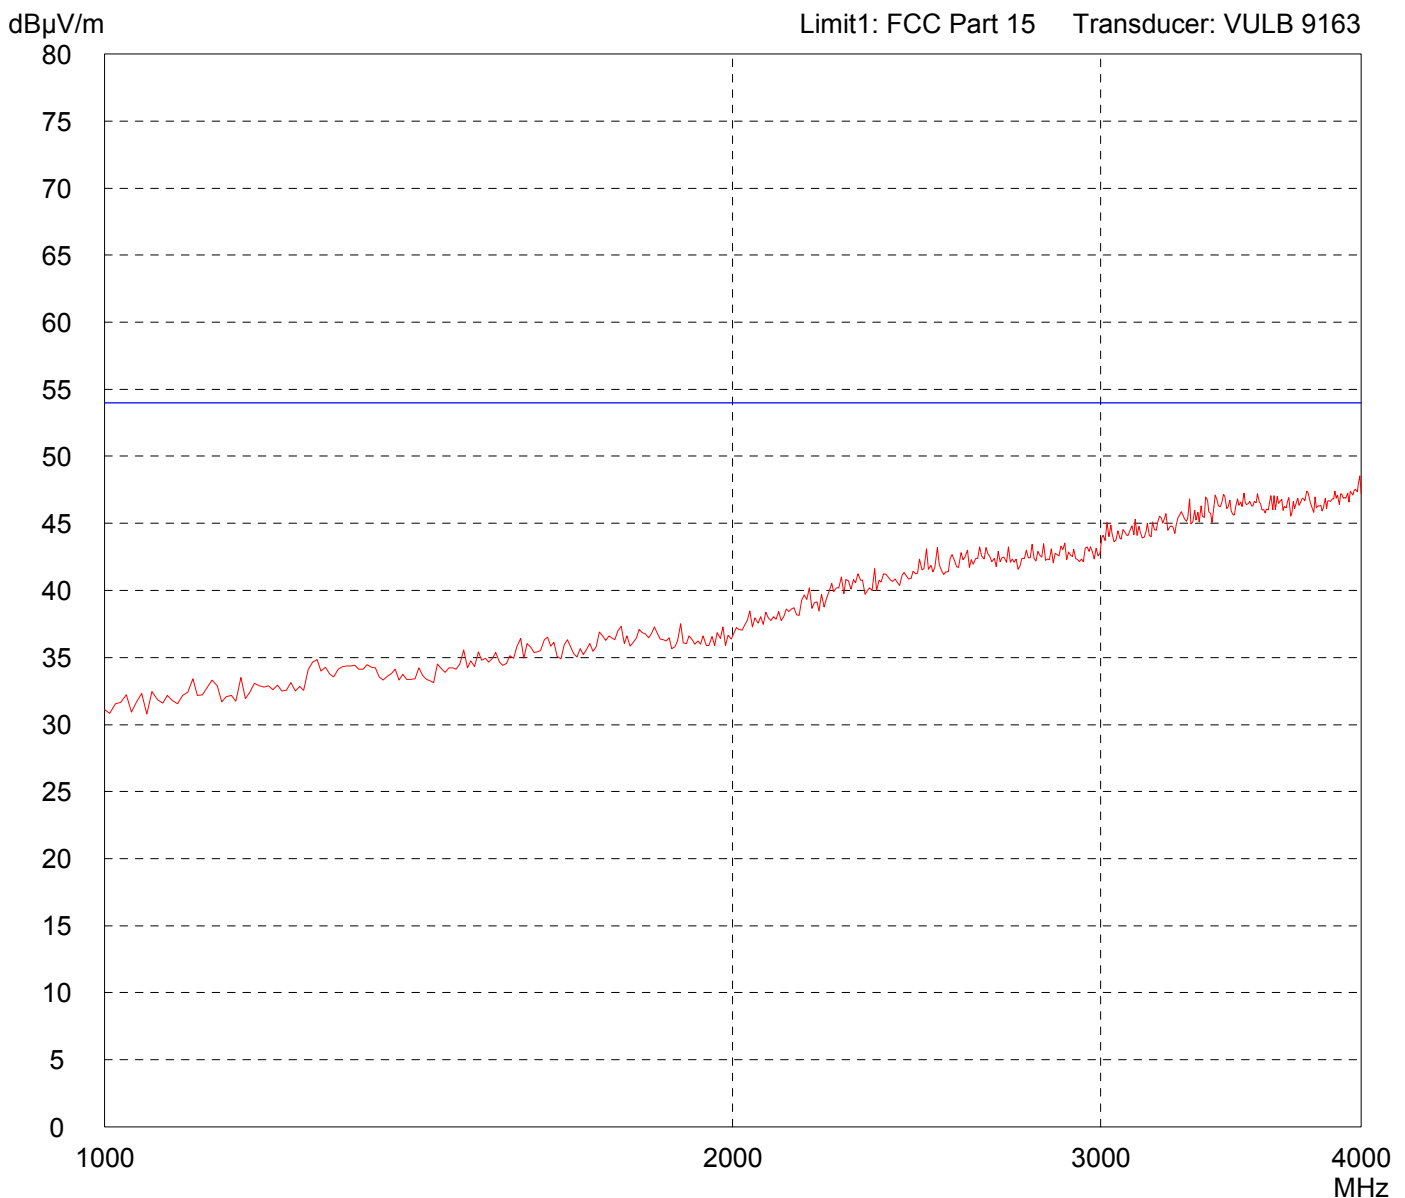


Result: Limit kept	Project file: 50511-40907-3
	Page 30 of 45 Pages

Radiated Emission Test 3.95 GHz - 5.85 GHz acc. to FCC Part 15 (EMCO 3160)

Model: FMR-25X	Comment: - "Virtual Tank" Mode (EUT Antenna pointing downwards)
Serial no.: Horn Antenna	
Applicant: Endress + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Horizontal Polarization	
Date of test: 03/08/2006	Operator: J. Roidt
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: 10 dB Margin 50 Subranges
--------------------------	--

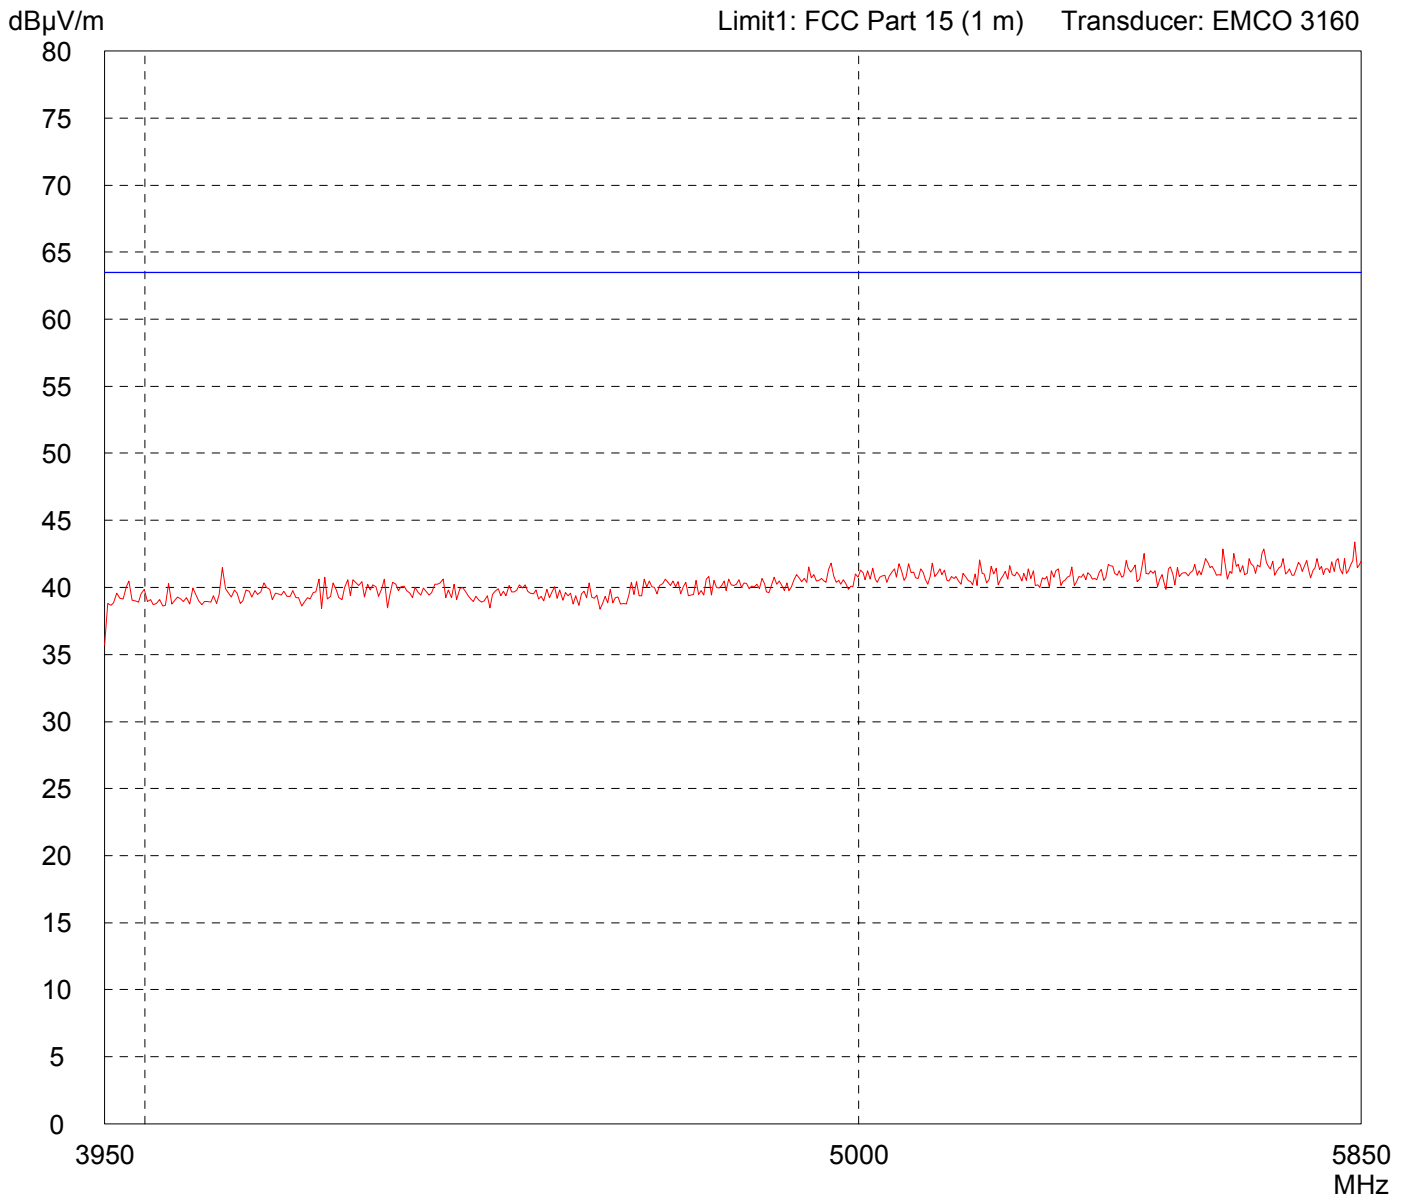


Result: Limit kept	Project file: 50511-40907-3
	Page 31 of 45 Pages

Radiated Emission Test 3.95 GHz - 5.85 GHz acc. to FCC Part 15 (EMCO 3160)

Model: FMR-25X	Comment: - "Virtual Tank" Mode (EUT Antenna pointing downwards)
Serial no.: Horn Antenna	
Applicant: Endress + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Vertical Polarization	
Date of test: 03/08/2006	Operator: J. Roidt
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: 10 dB Margin 50 Subranges
--------------------------	--

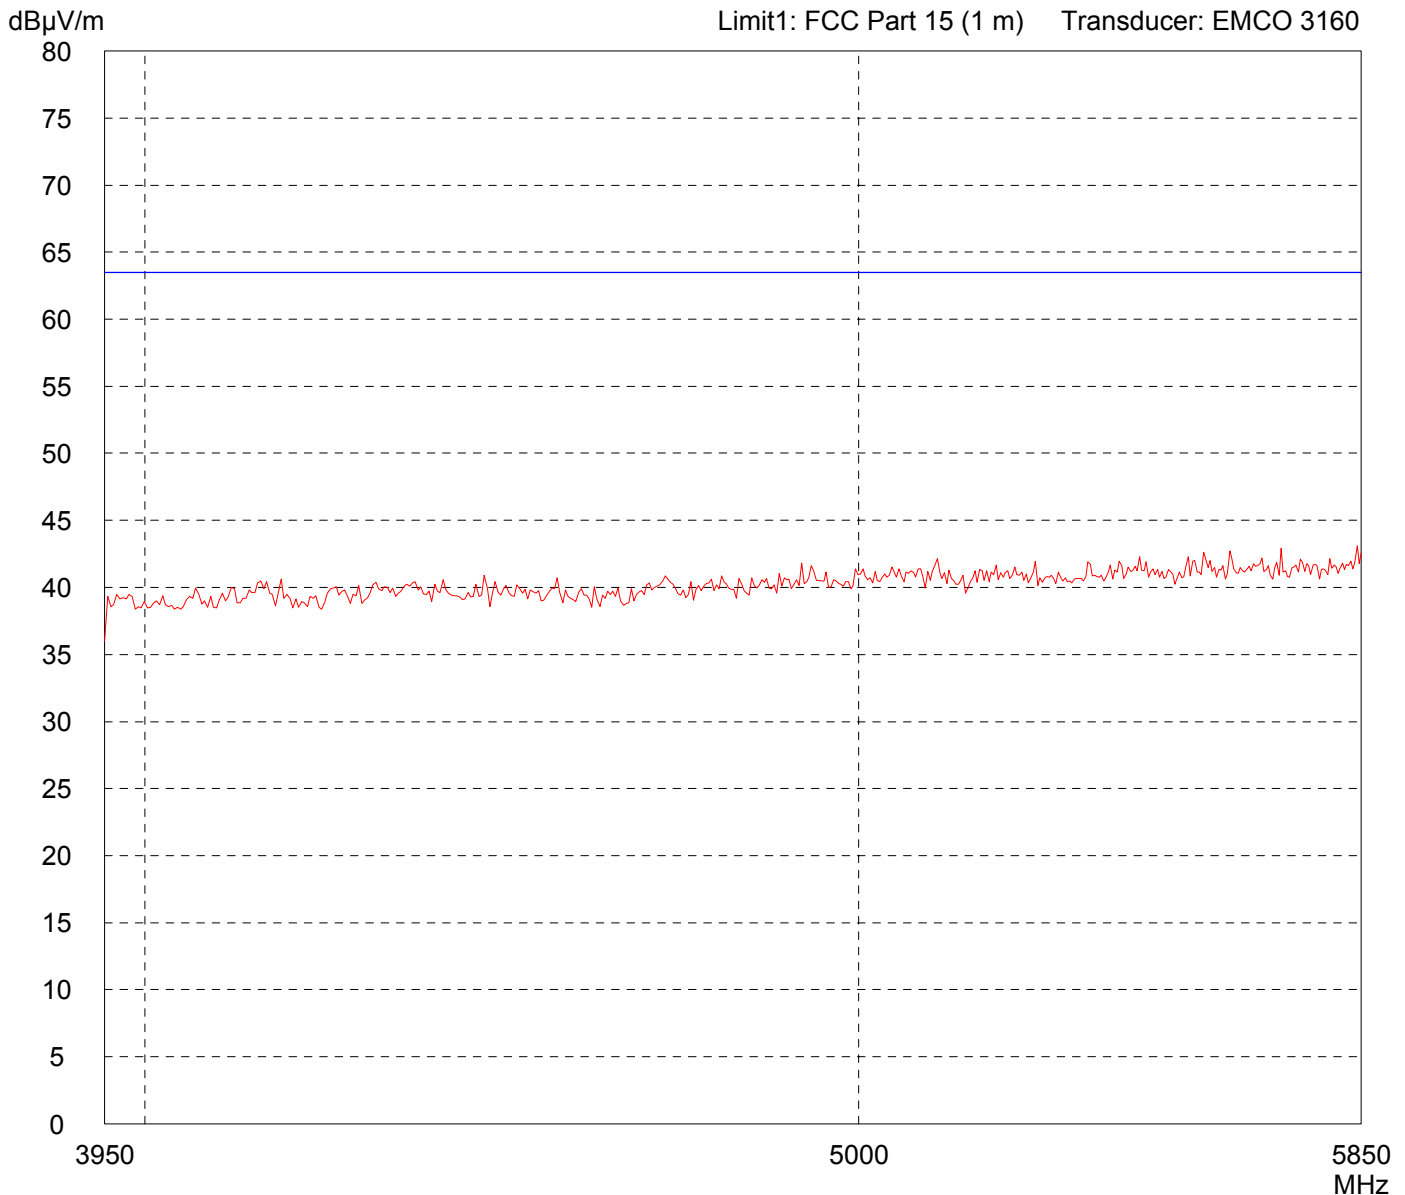


Result: Limit kept	Project file: 50511-40907-3
	Page 32 of 45 Pages

Radiated Emission Test 5.85 GHz - 8.2 GHz acc. to FCC Part 15 (EMCO 3160)

Model: FMR-25X	Comment: - "Virtual Tank" Mode (EUT Antenna pointing downwards)
Serial no.: Horn Antenna	
Applicant: Endress + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Horizontal Polarization	
Date of test: 03/08/2006	Operator: J. Roidt
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: 10 dB Margin 50 Subranges
--------------------------	--

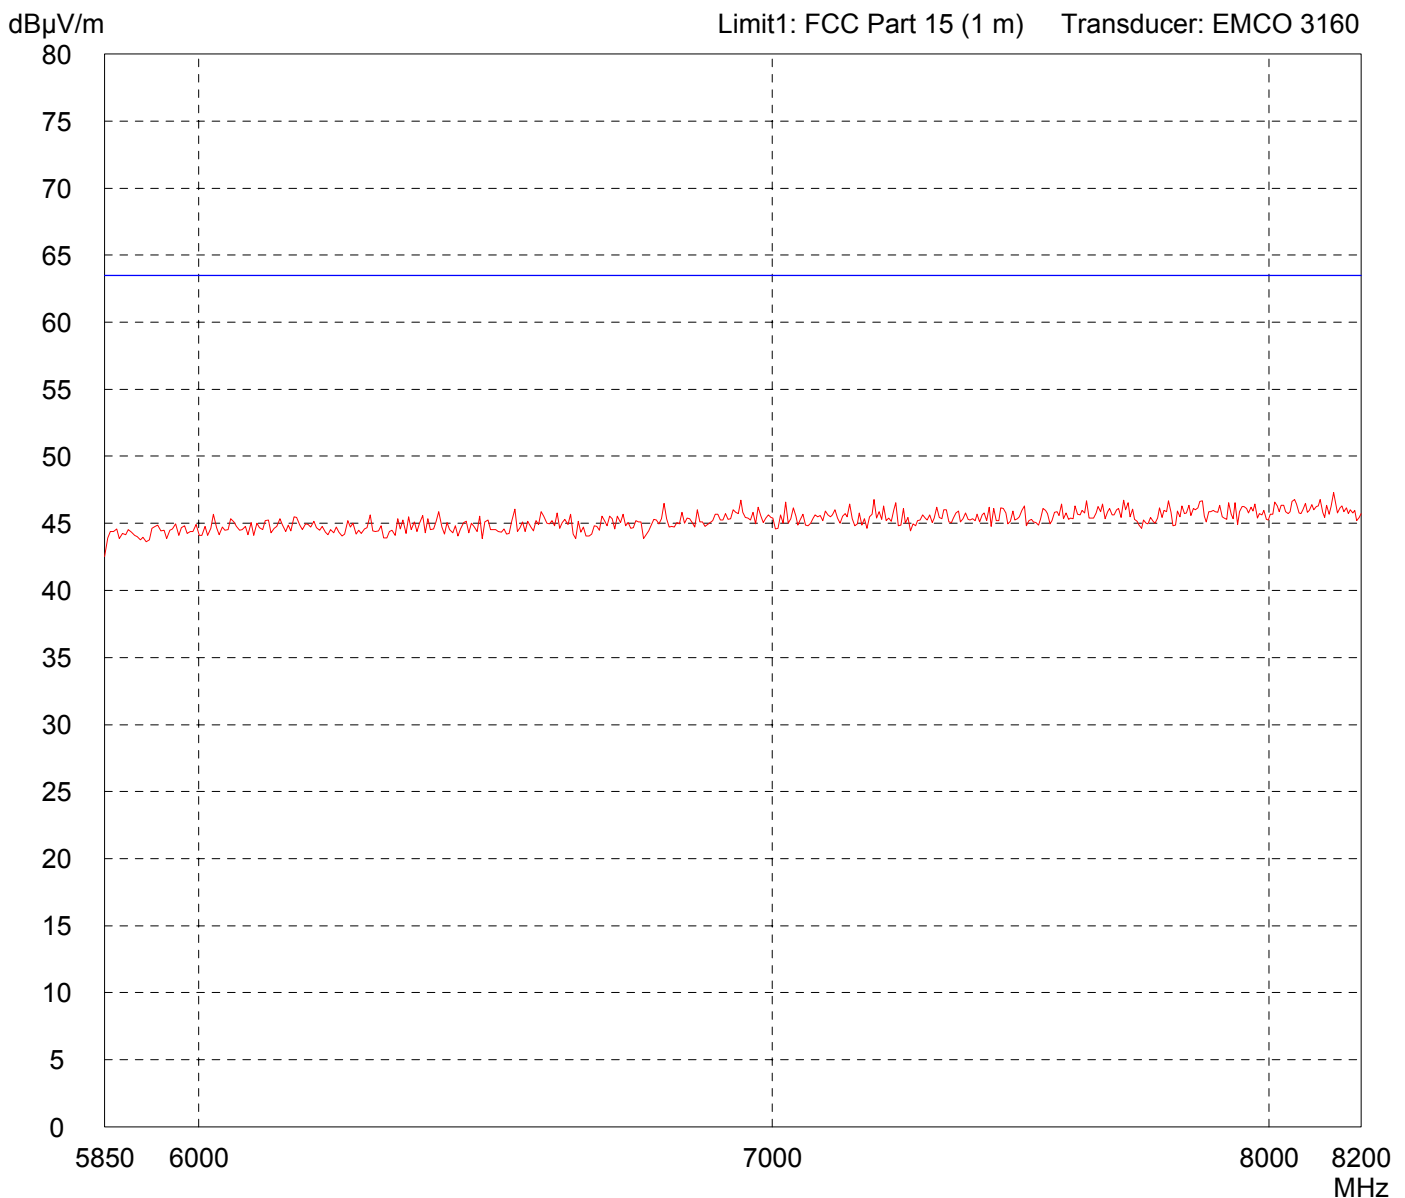


Result: Limit kept	Project file: 50511-40907-3
	Page 33 of 45 Pages

Radiated Emission Test 5.85 GHz - 8.2 GHz acc. to FCC Part 15 (EMCO 3160)

Model: FMR-25X	Comment: - "Virtual Tank" Mode (EUT Antenna pointing downwards)
Serial no.: Horn Antenna	
Applicant: Endress + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Vertical Polarization	
Date of test: 03/08/2006	Operator: J. Roidt
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: 10 dB Margin 50 Subranges
--------------------------	--

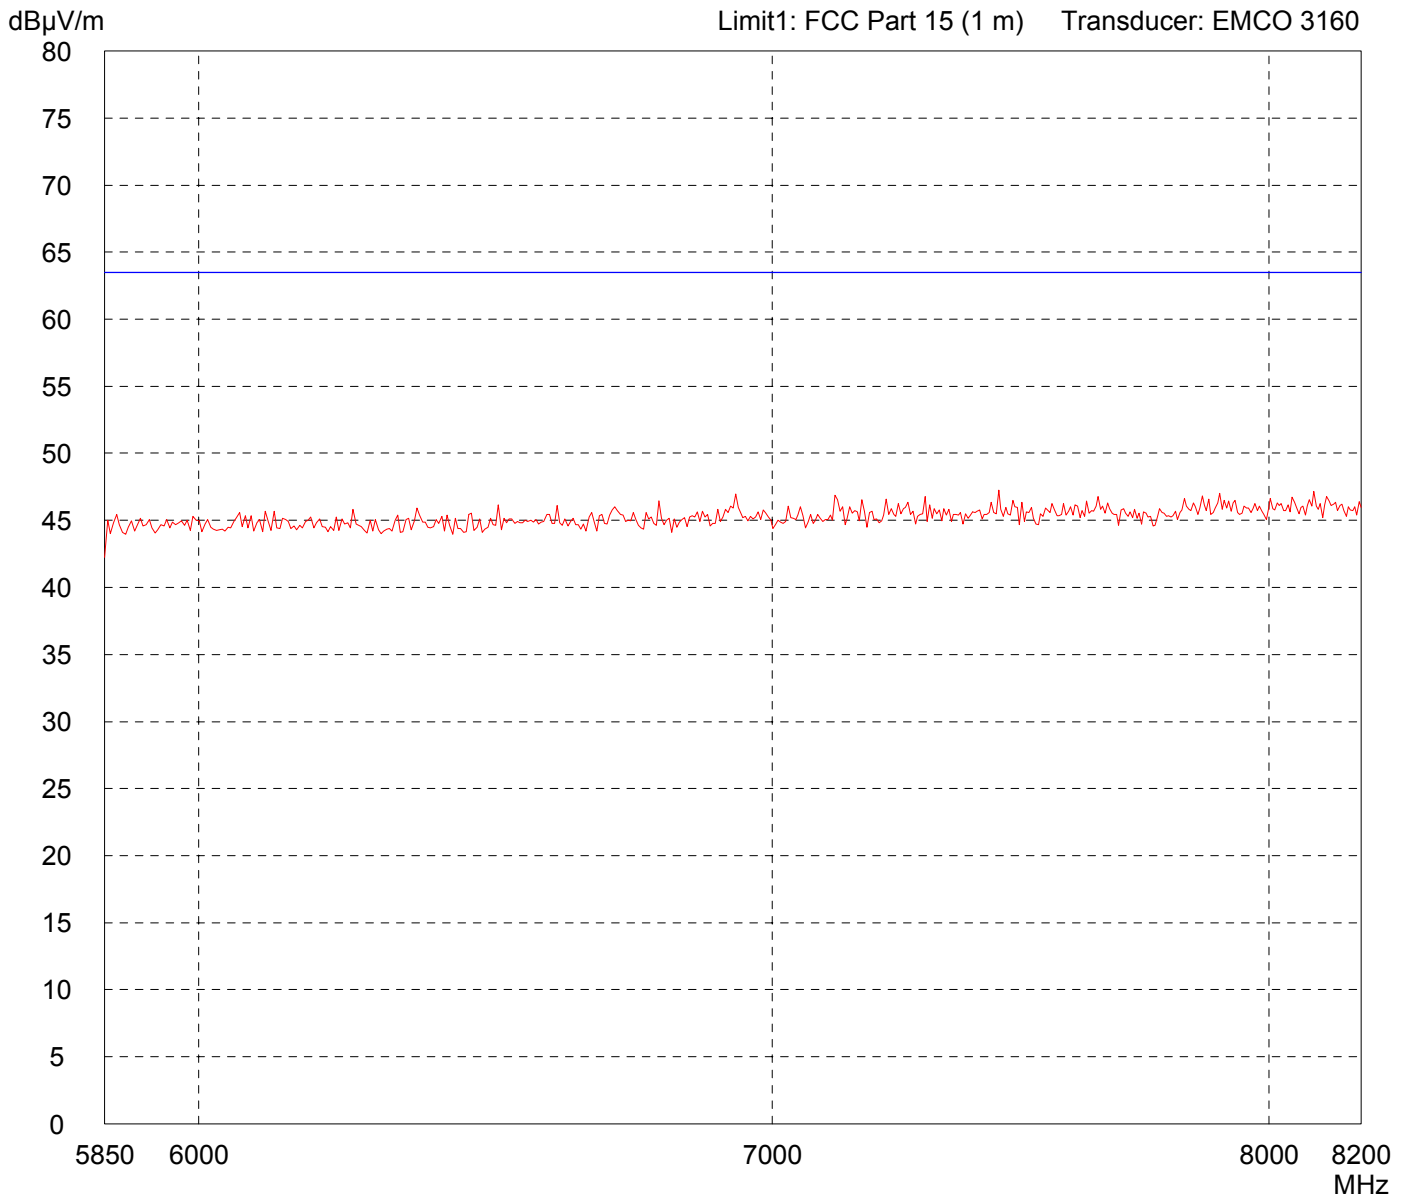


Result: Limit kept	Project file: 50511-40907-3
	Page 34 of 45 Pages

Radiated Emission Test 8.2 GHz - 12.4 GHz acc. to FCC Part 15 (EMCO 3160)

Model: FMR-25X	Comment: - "Virtual Tank" Mode (EUT Antenna pointing downwards)
Serial no.: Horn Antenna	
Applicant: Endress + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Horizontal Polarization	
Date of test: 03/08/2006	Operator: J. Roidt
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

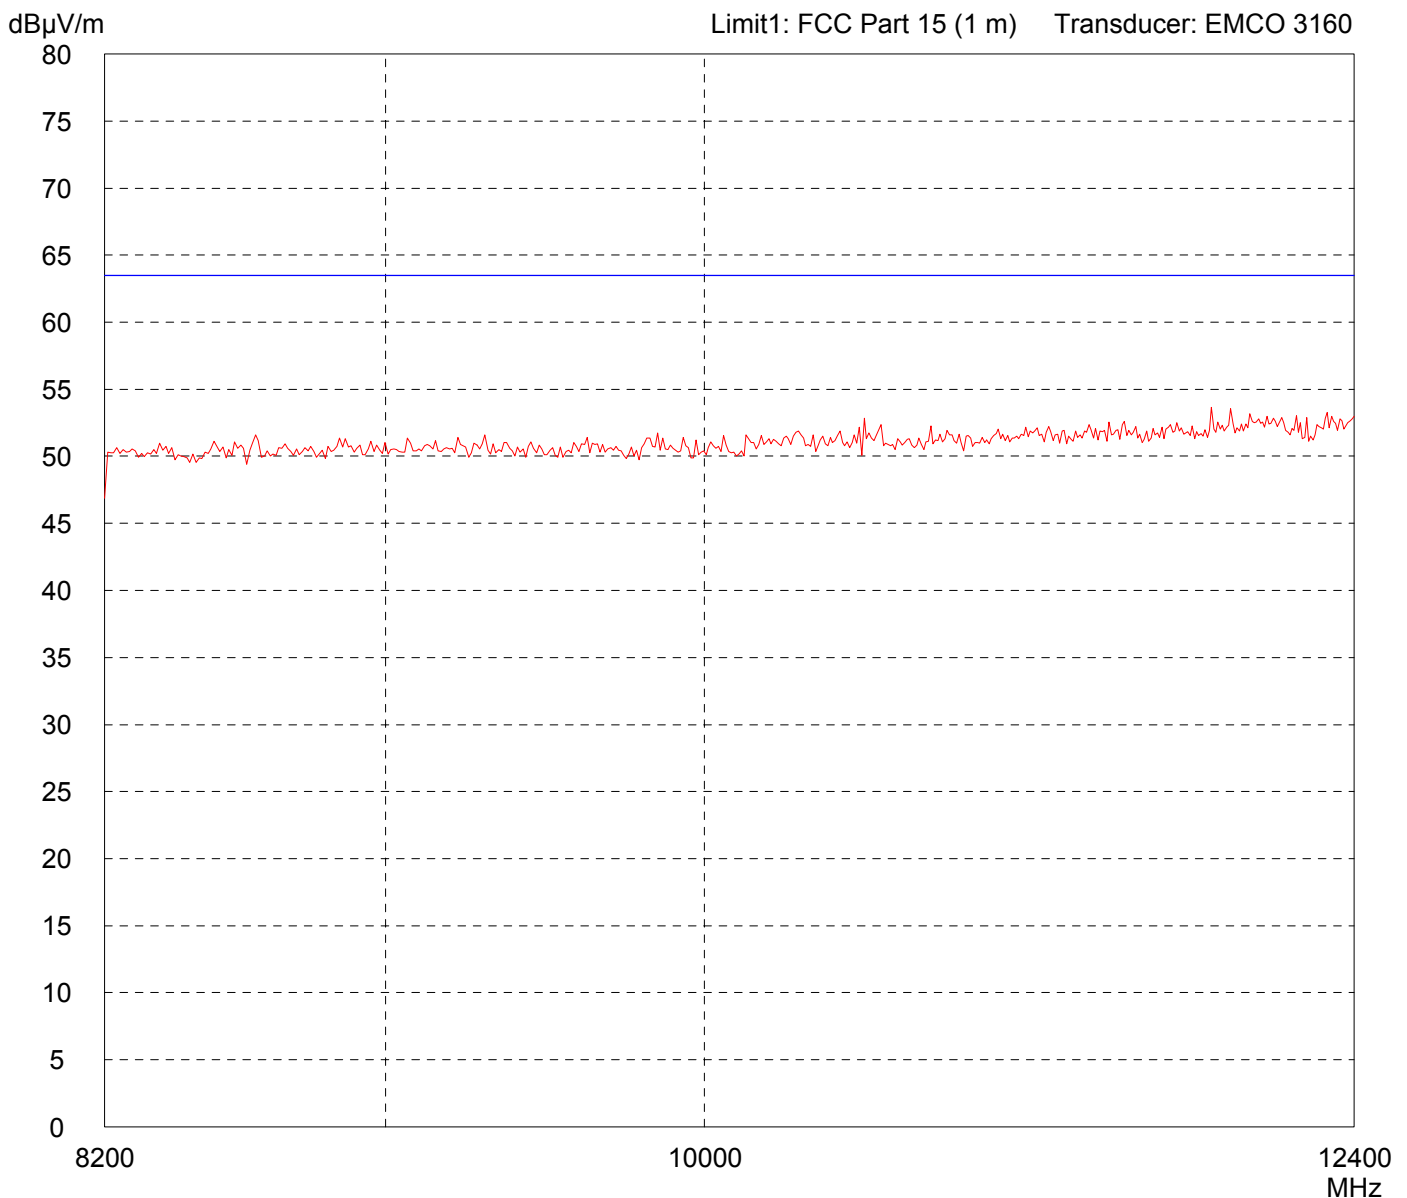


Result: Limit kept	Project file: 50511-40907-3
	Page 35 of 45 Pages

Radiated Emission Test 8.2 GHz - 12.4 GHz acc. to FCC Part 15 (EMCO 3160)

Model: FMR-25X	Comment: - "Virtual Tank" Mode (EUT Antenna pointing downwards)
Serial no.: Horn Antenna	
Applicant: Endress + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Vertical Polarization	
Date of test: 03/08/2006	Operator: J. Roidt
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

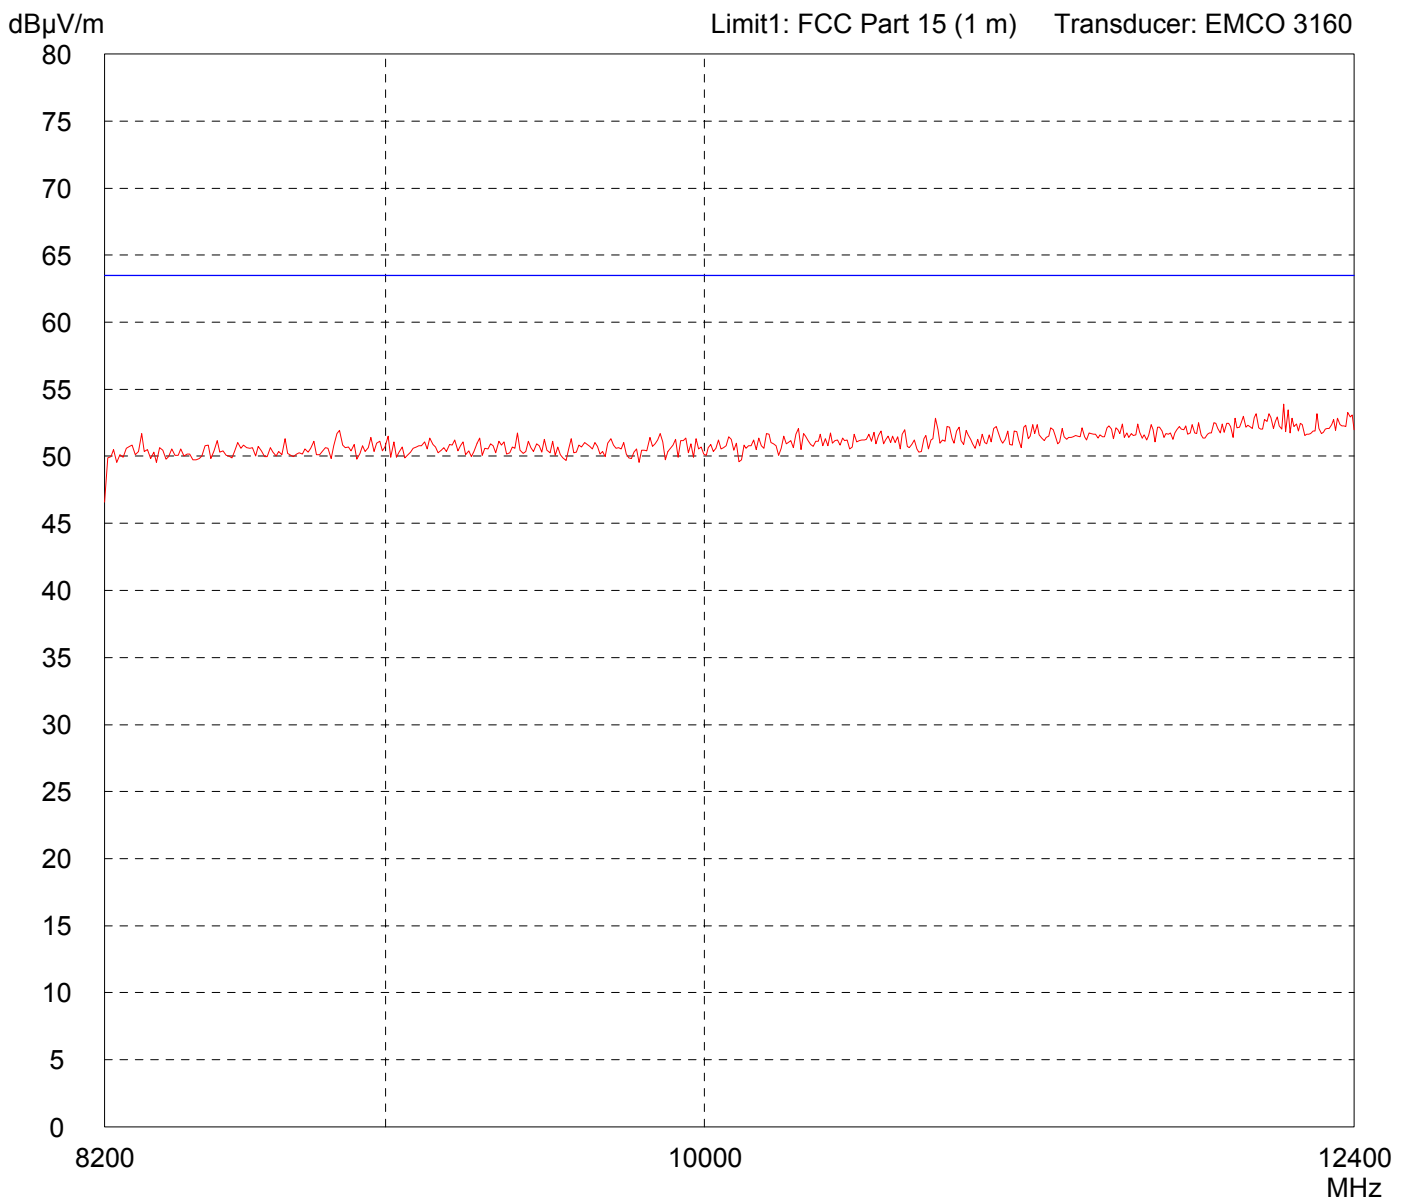


Result: Limit kept	Project file: 50511-40907-3
	Page 36 of 45 Pages

Radiated Emission Test 12.4 GHz - 18 GHz acc. to FCC Part 15 (EMCO 3160)

Model: FMR-25X	Comment: - "Virtual Tank" Mode (EUT Antenna pointing downwards)
Serial no.: Horn Antenna	
Applicant: Endress + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Horizontal Polarization	
Date of test: 03/08/2006	Operator: J. Roidt
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

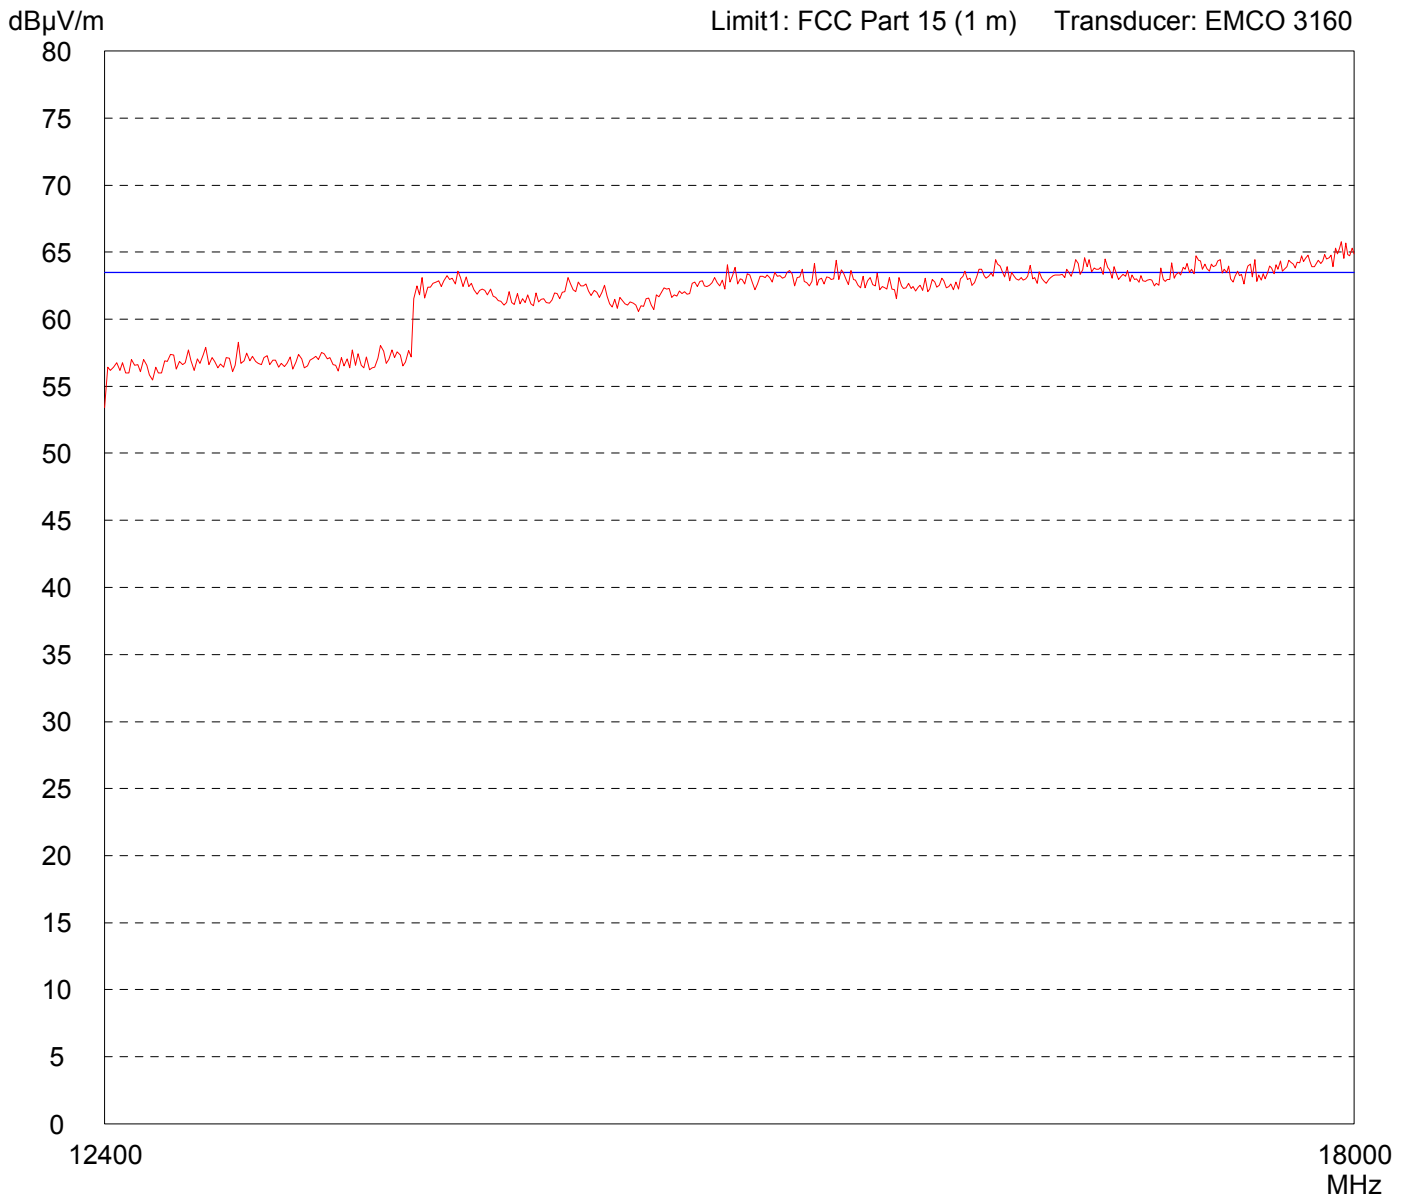


Result: Limit kept	Project file: 50511-40907-3
	Page 37 of 45 Pages

Radiated Emission Test 12.4 GHz - 18 GHz acc. to FCC Part 15 (EMCO 3160)

Model: FMR-25X	Comment: - "Virtual Tank" Mode (EUT Antenna pointing downwards)
Serial no.: Horn Antenna	
Applicant: Endress + Hauser GmbH & Co. KG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 1 meter Vertical Polarization	
Date of test: 03/08/2006	Operator: J. Roidt
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

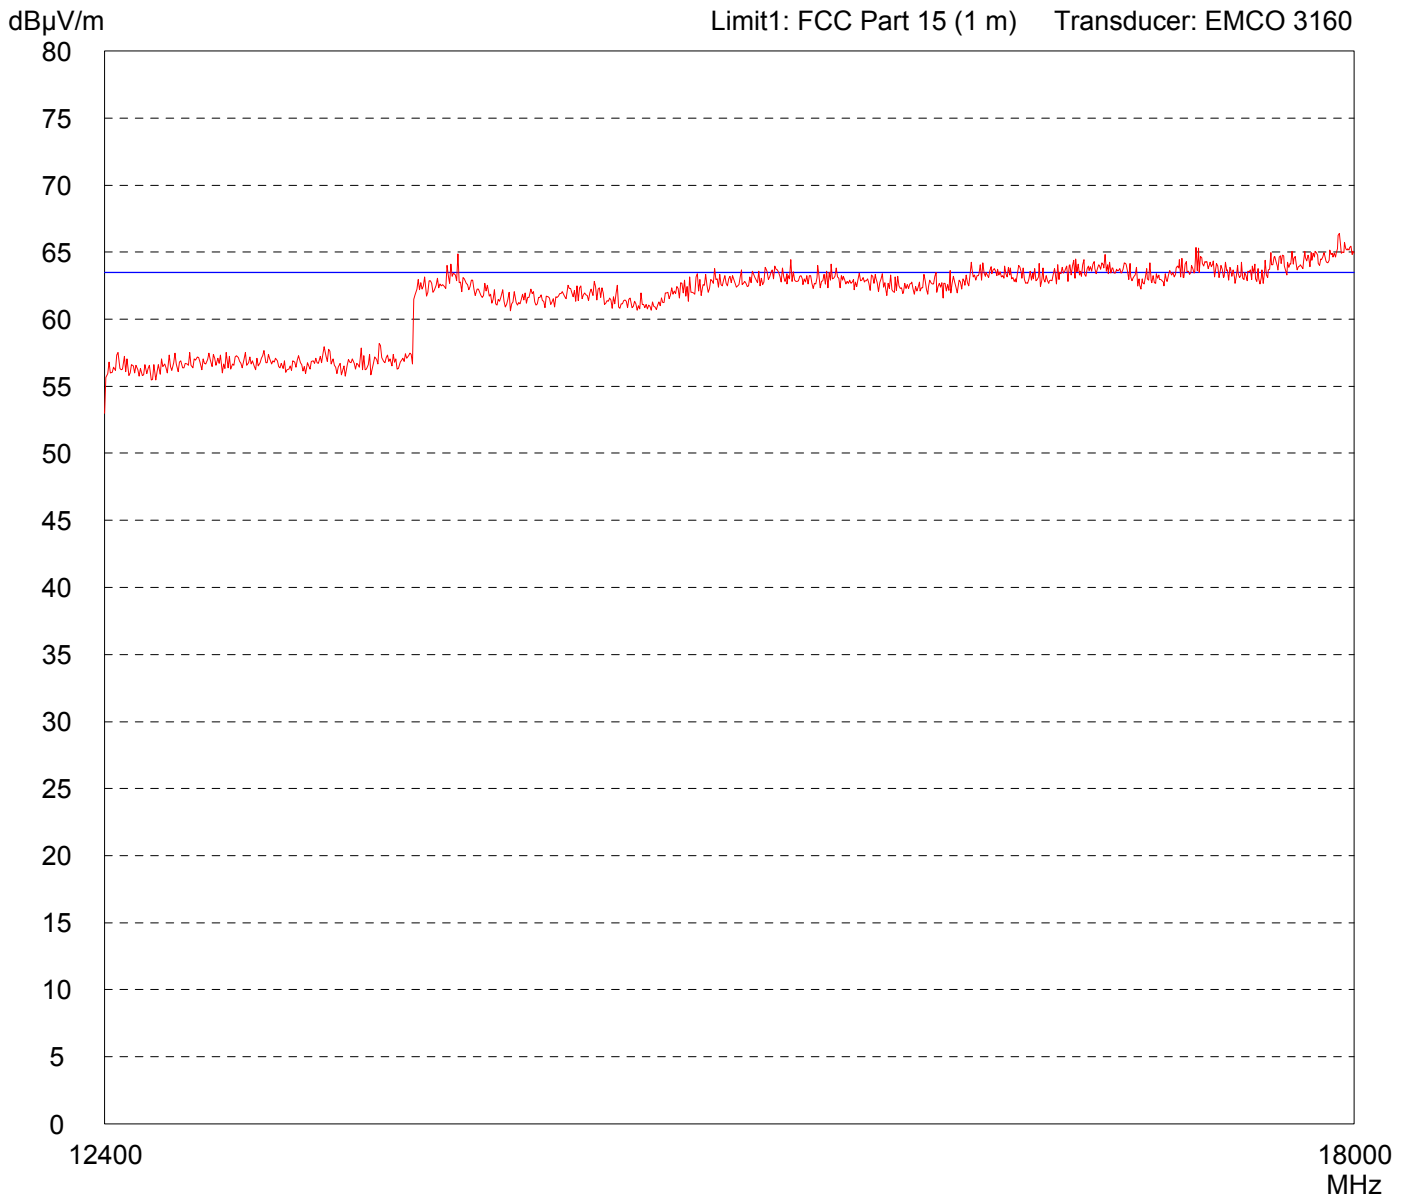

Result: Limit kept	Project file: 50511-40907-3
	Page 38 of 45 Pages

Spurious emissions according to FCC Rules, Section 15.209

Model:
Solid Radar FMR 25X

Serial No.:

Applicant:
Endress + Hauser GmbH & Co. KG


Mode:

- EUT with Horn Antenna
- DC 24 V power supply
- EUT in vertical position
- continuous measurement
- Measurement Distance: 0.50 m
- Polarisation: horizontal

Ref.Level 75 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset 43 dB

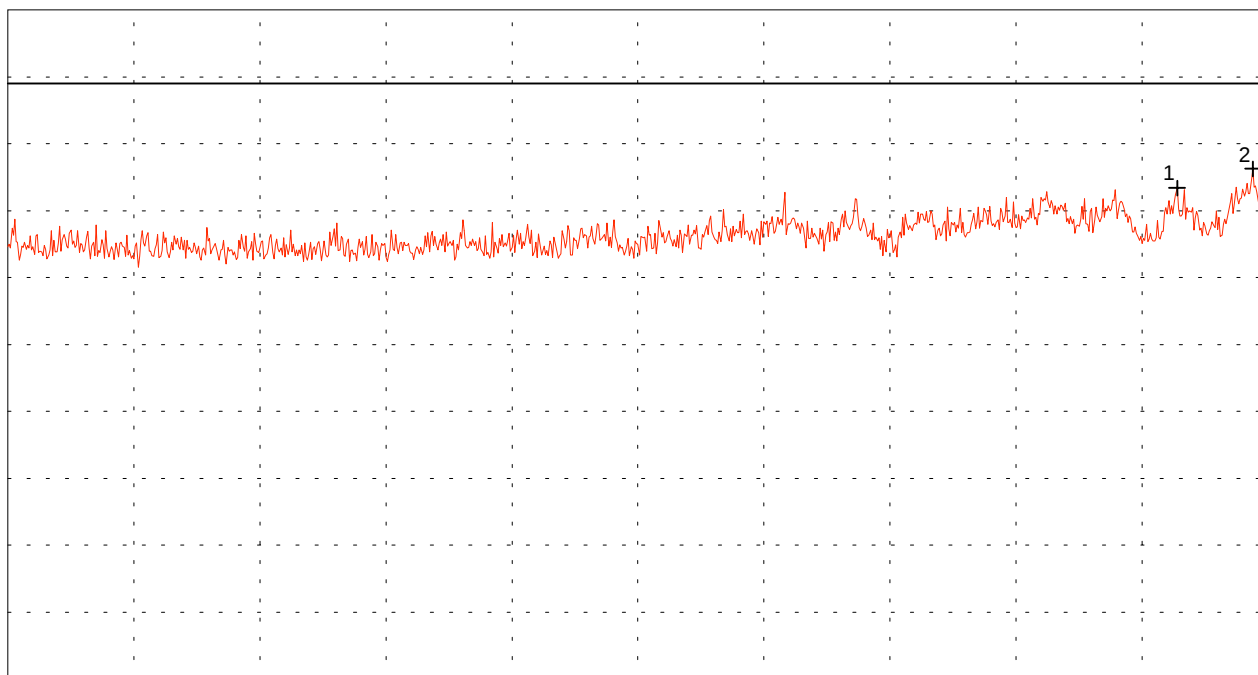

Start 18.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 26.500 GHz
SWP 40 ms

Multi Marker List

No. 1	25.886111 GHz	61.70 dB μ V
No. 2	26.396111 GHz	63.12 dB μ V

Tested by:
Johann Roidt

Date:
01 March 2006

Project-No.:
505011-40907

Page 39 of 45 Pages

Spurious emissions according to FCC Rules, Section 15.209

Model:
Solid Radar FMR 25X

Serial No.:

Applicant:
Endress + Hauser GmbH & Co. KG


Mode:

- EUT with Horn Antenna
- DC 24 V power supply
- EUT in vertical position
- continuous measurement
- Measurement Distance: 0.50 m
- Polarisation: vertical

Ref.Level 75 dB μ V
5 dB/Div.

ATT 0 dB

Ref. Offset 43 dB

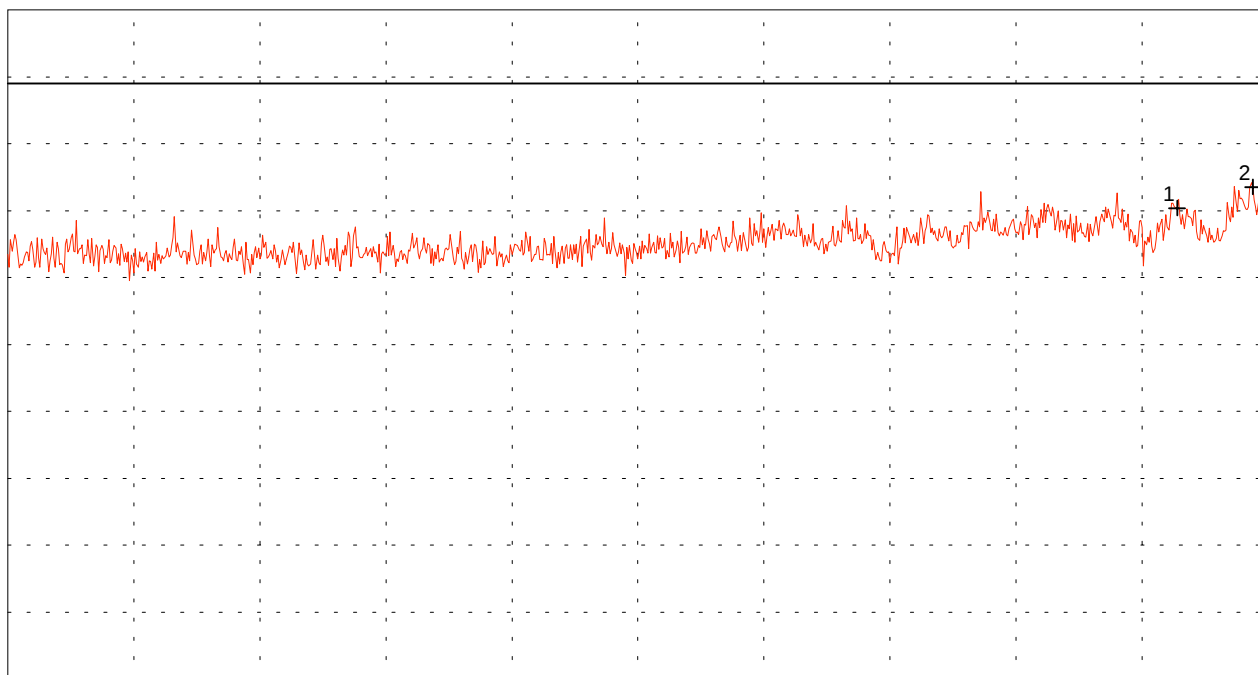

Start 18.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 26.500 GHz
SWP 40 ms

Multi Marker List

No. 1	25.886111 GHz	60.19 dB μ V
No. 2	26.396111 GHz	61.77 dB μ V

Tested by:
Johann Roidt

Date:
01 March 2006

Project-No.:
505011-40907

Page 40 of 45 Pages

Spurious emissions according to FCC 15 C

Model:
Solid Radar 25x*

Serial No.:
Horn Antenna

Applicant:
Endres + Hauser GmbH & Co. KG

Mode:

- DC 24 V power supply
with 330 Ohms communication resistor

- EUT in vertical position


- continuous measurement

- Measurement Distance: 0.50 m

- Polarisation: horizontal

Ref.Level 22 dB μ V
5 dB/Div.

ATT 0 dB

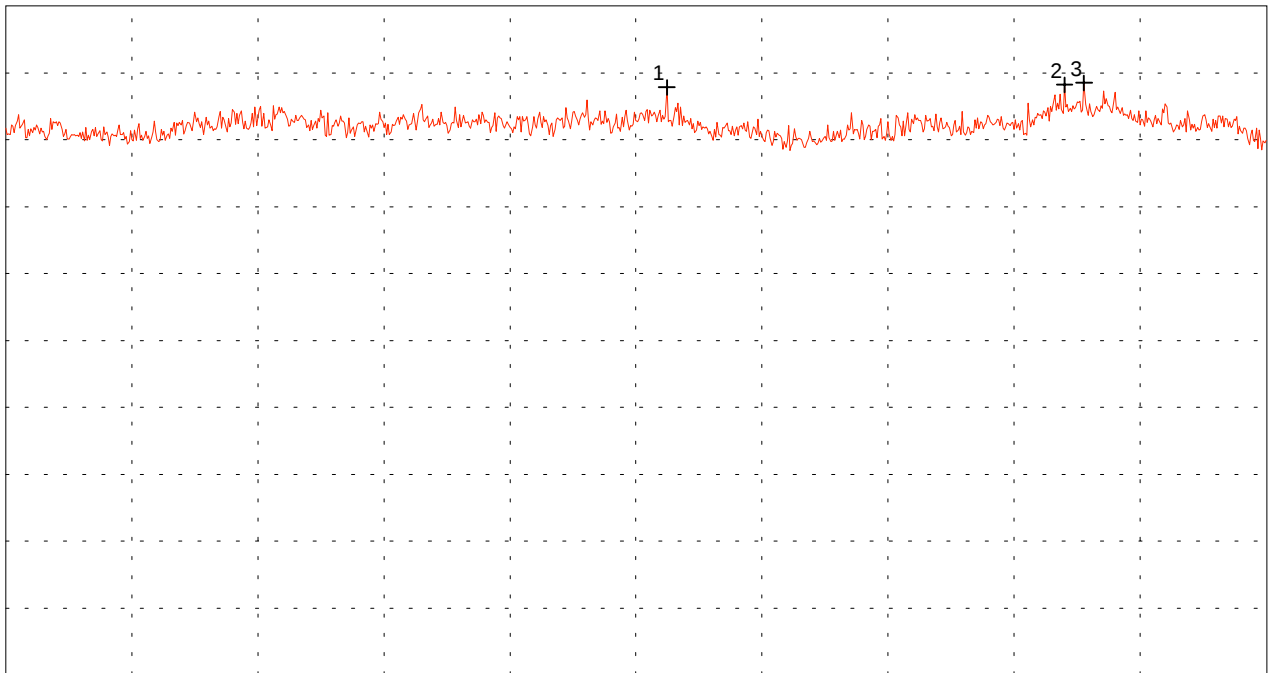

Start 26.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 40.000 GHz
SWP 60 ms

Multi Marker List

No. 1	33.342222 GHz	15.91 dB μ V
No. 2	37.760000 GHz	16.11 dB μ V
No. 3	37.977778 GHz	16.25 dB μ V

Tested by:
M. Steindl

Date:
02/22/2005

Project-No.:
50511-40907

Page 41 of 45 Pages

Spurious emissions according to FCC 15 C

Model:
Solid Radar 25x

Serial No.:
Horn Antenna

Applicant:
Endres + Hauser GmbH & Co. KG

Mode:

- DC 24 V power supply
with 330 Ohms communication resistor

- EUT in vertical position


- continuous measurement

- Measurement Distance: 0.50 m

- Polarisation: vertical

Ref.Level 22 dB μ V
5 dB/Div.

ATT 0 dB

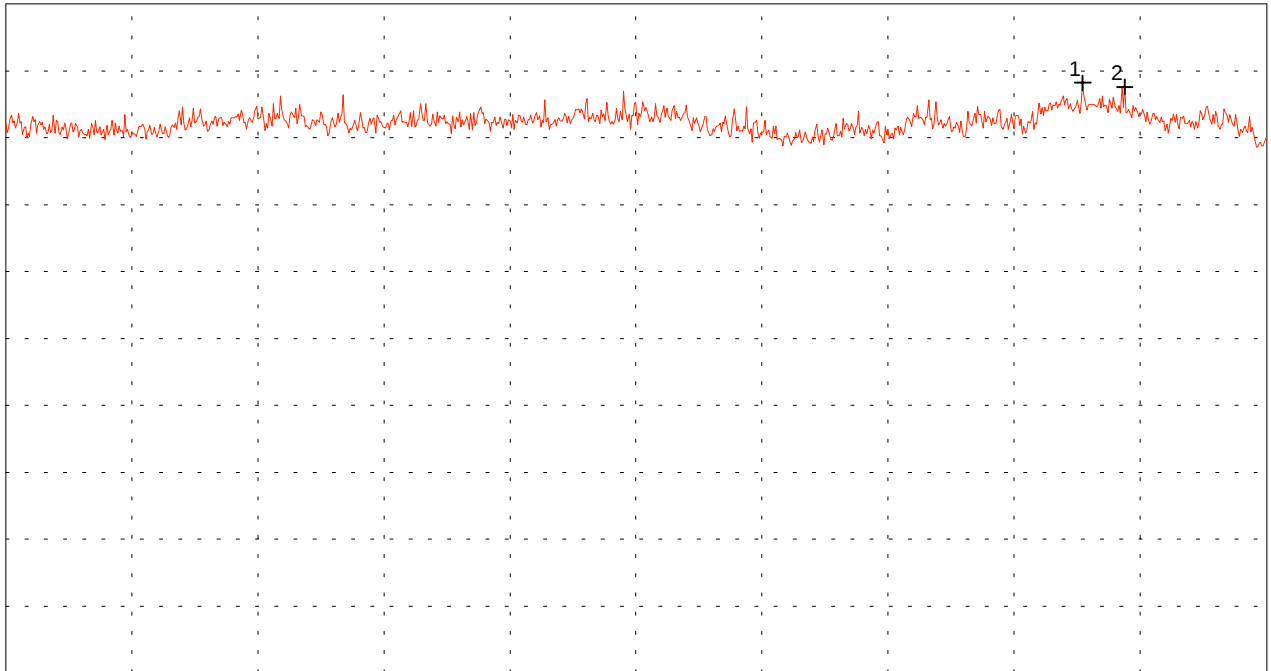

Start 26.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 40.000 GHz
SWP 60 ms

Multi Marker List

No. 1	37.962222 GHz	16.11 dB μ V
No. 2	38.428889 GHz	15.80 dB μ V


Tested by:
M. Steindl

Date:
02/22/2005


Project-No.:
50511-40907

Page 42 of 45 Pages

Radiated Emissions according to FCC Rules, Section 15.209
Test Chart 40 - 50 GHz

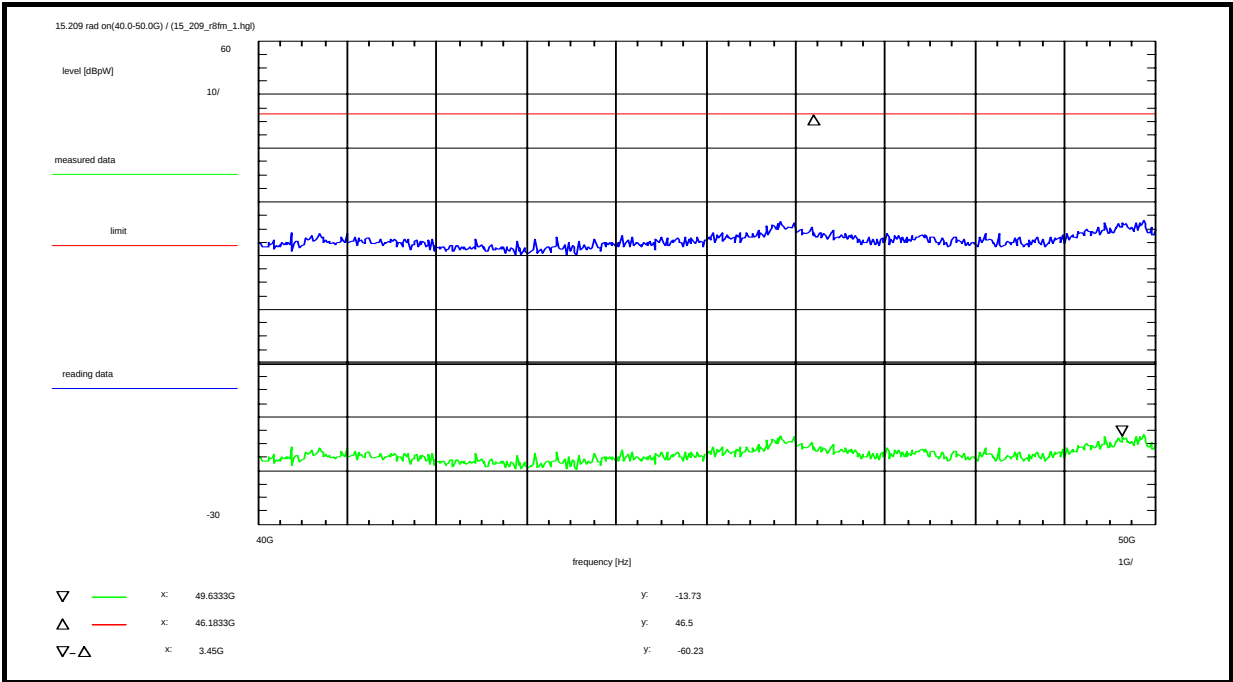

Test Chart 50 - 75 GHz

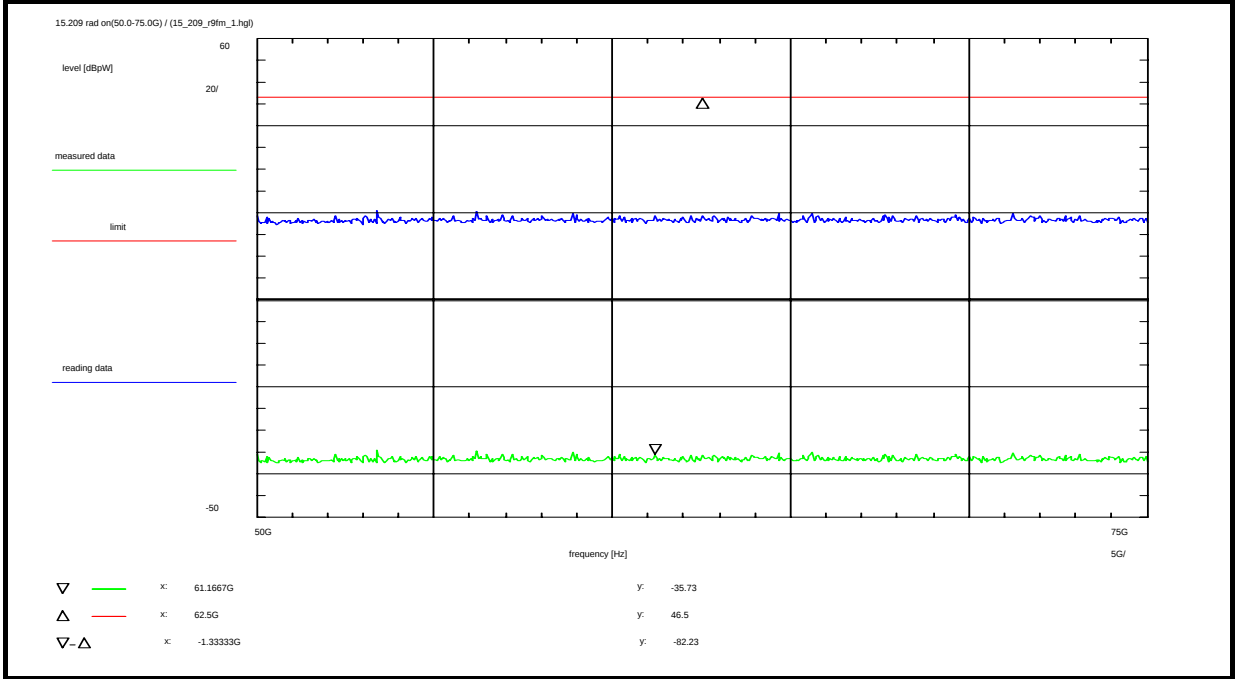

Test Chart 75 - 110 GHz

