

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 187 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11a 5180MHz(Ant 1)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/5 08:37:26

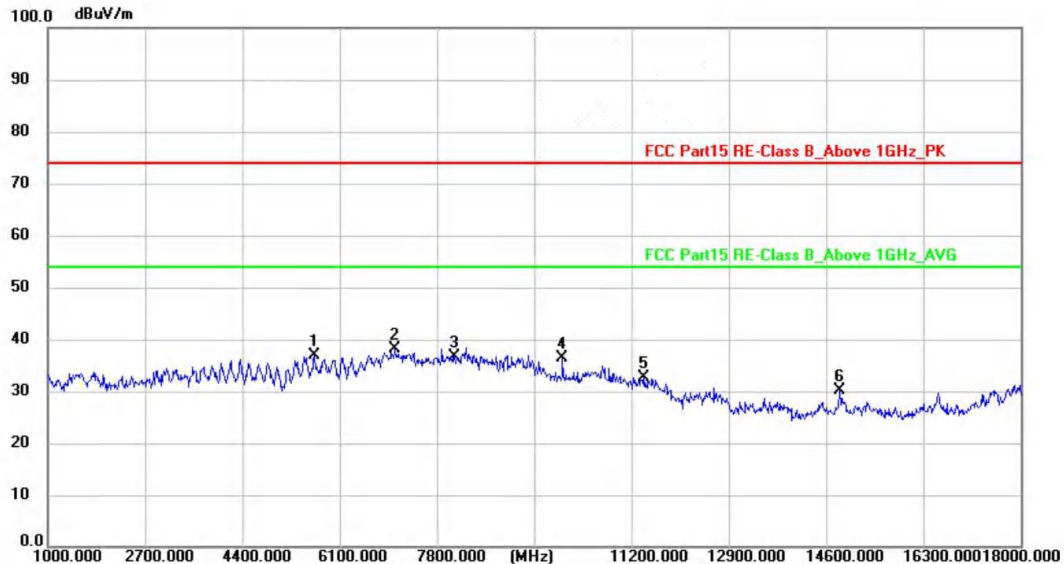

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5660.125	48.40	-11.43	36.97	74.00	-37.03	peak	150	218	P	
2 *	7075.375	46.17	-7.97	38.20	74.00	-35.80	peak	150	104	P	
3	8118.750	43.80	-7.05	36.75	74.00	-37.25	peak	150	288	P	
4	9999.375	42.05	-5.61	36.44	74.00	-37.56	peak	150	65	P	
5	11429.500	36.84	-4.25	32.59	74.00	-41.41	peak	150	74	P	
6	14852.875	32.39	-2.18	30.21	74.00	-43.79	peak	150	177	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 188 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11a 5200MHz(Ant 1)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/5 08:42:10

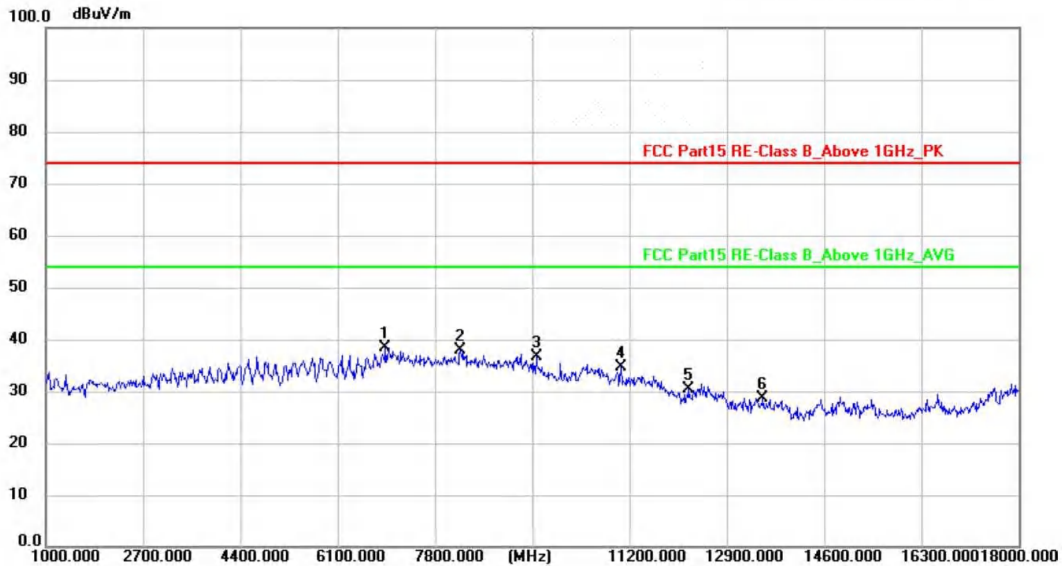

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	6947.875	46.58	-8.20	38.38	74.00	-35.62	peak	150	121	P	
2	8248.375	44.88	-6.92	37.96	74.00	-36.04	peak	150	320	P	
3	9580.750	42.42	-5.86	36.56	74.00	-37.44	peak	150	24	P	
4	11051.250	38.90	-4.30	34.60	74.00	-39.40	peak	150	70	P	
5	12239.125	34.27	-3.89	30.38	74.00	-43.62	peak	150	310	P	
6	13535.375	31.17	-2.44	28.73	74.00	-45.27	peak	150	55	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 189 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11a 5200MHz(Ant 1)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/5 08:48:38

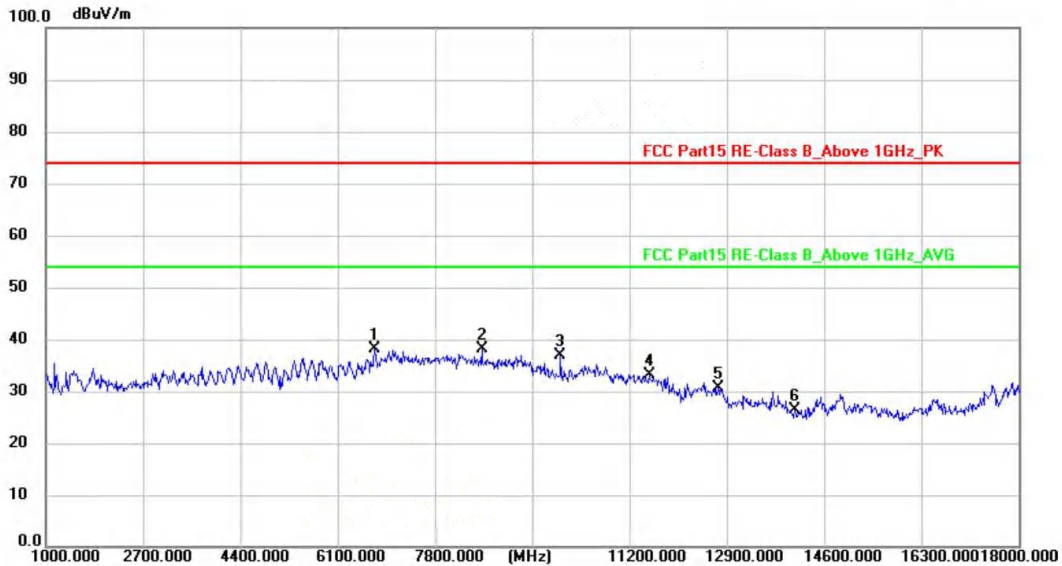

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	6760.875	46.96	-8.72	38.24	74.00	-35.76	peak	150	201	P	
2	8628.750	44.63	-6.57	38.06	74.00	-35.94	peak	150	78	P	
3	9999.375	42.58	-5.61	36.97	74.00	-37.03	peak	150	106	P	
4	11544.250	37.37	-4.24	33.13	74.00	-40.87	peak	150	124	P	
5	12757.625	33.79	-3.22	30.57	74.00	-43.43	peak	150	84	P	
6	14096.375	28.39	-2.06	26.33	74.00	-47.67	peak	150	168	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 190 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11a 5240MHz(Ant 1)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/5 08:53:27

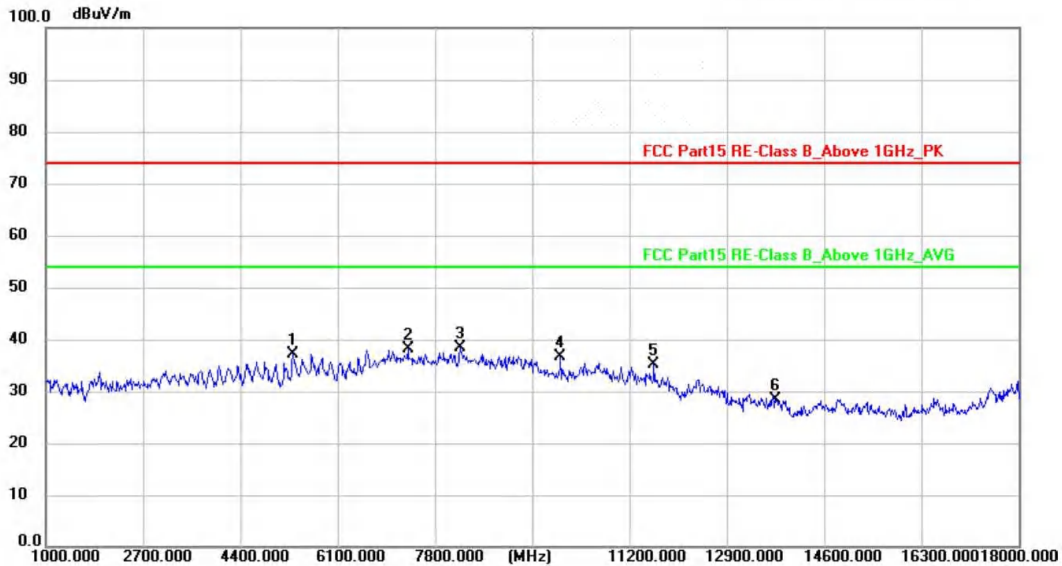

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5326.500	49.86	-12.67	37.19	74.00	-36.81	peak	150	124	P	
2	7336.750	45.91	-7.75	38.16	74.00	-35.84	peak	150	218	P	
3 *	8242.000	45.25	-6.93	38.32	74.00	-35.68	peak	150	134	P	
4	9999.375	42.16	-5.61	36.55	74.00	-37.45	peak	150	52	P	
5	11635.625	39.45	-4.24	35.21	74.00	-38.79	peak	150	247	P	
6	13760.625	30.60	-2.25	28.35	74.00	-45.65	peak	150	90	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 191 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11a 5240MHz(Ant 1)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/5 08:57:54

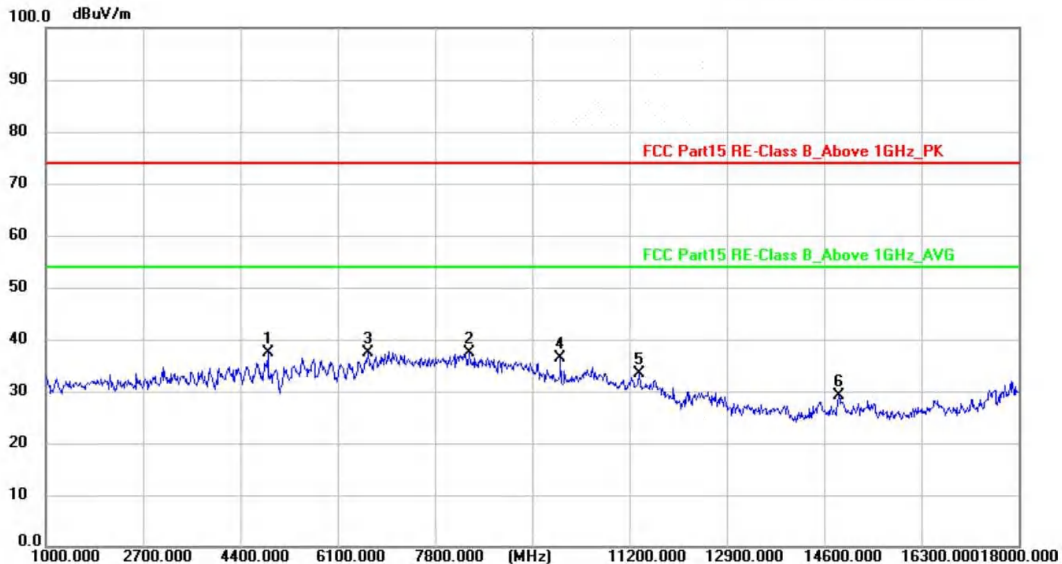

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	4878.125	51.21	-13.87	37.34	74.00	-36.66	peak	150	132	P	
2	8403.500	44.10	-6.78	37.32	74.00	-36.68	peak	150	204	P	
3	6633.375	46.39	-9.08	37.31	74.00	-36.69	peak	150	137	P	
4	9999.375	42.06	-5.61	36.45	74.00	-37.55	peak	150	205	P	
5	11370.000	37.70	-4.27	33.43	74.00	-40.57	peak	150	168	P	
6	14857.125	31.28	-2.18	29.10	74.00	-44.90	peak	150	91	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 192 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11n20 5180MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/5 09:02:57

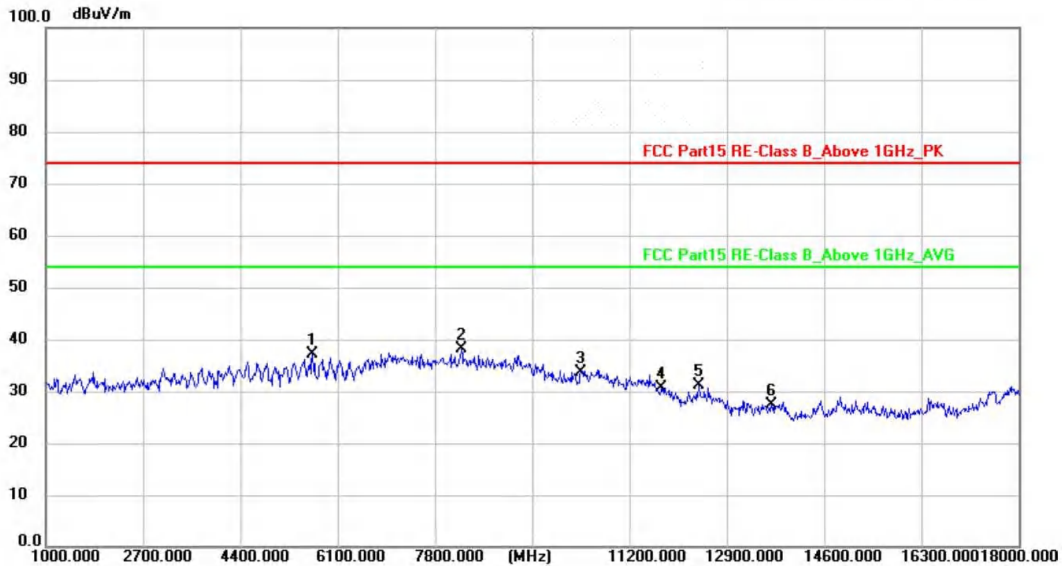

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5658.000	49.00	-11.78	37.22	74.00	-36.78	peak	150	74	P	
2 *	8267.500	45.08	-6.90	38.18	74.00	-35.82	peak	150	24	P	
3	10354.250	38.78	-5.14	33.64	74.00	-40.36	peak	150	124	P	
4	11775.875	34.83	-4.24	30.59	74.00	-43.41	peak	150	201	P	
5	12415.500	34.70	-3.68	31.02	74.00	-42.98	peak	150	154	P	
6	13692.625	29.57	-2.30	27.27	74.00	-46.73	peak	150	305	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 193 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11n20 5180MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/5 09:06:25

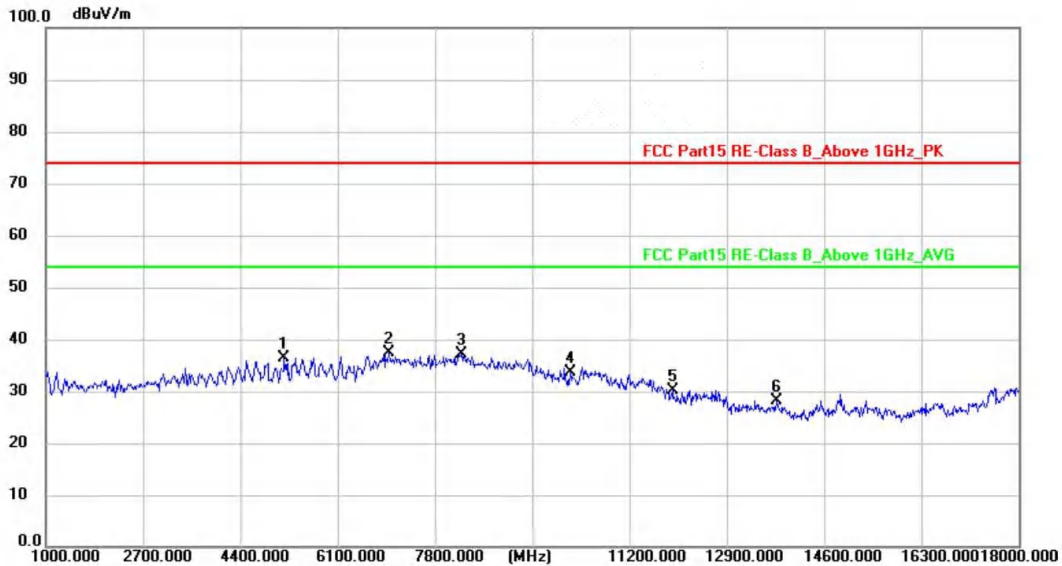

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5179.875	49.56	-13.08	36.48	74.00	-37.52	peak	150	214	P	
2 *	6998.875	45.53	-8.04	37.49	74.00	-36.51	peak	150	324	P	
3	8263.250	43.95	-6.90	37.05	74.00	-36.95	peak	150	134	P	
4	10169.375	38.99	-5.39	33.60	74.00	-40.40	peak	150	102	P	
5	11958.625	34.38	-4.23	30.15	74.00	-43.85	peak	150	201	P	
6	13771.250	30.38	-2.24	28.14	74.00	-45.86	peak	150	45	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 194 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11n20 5200MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/5 09:09:05

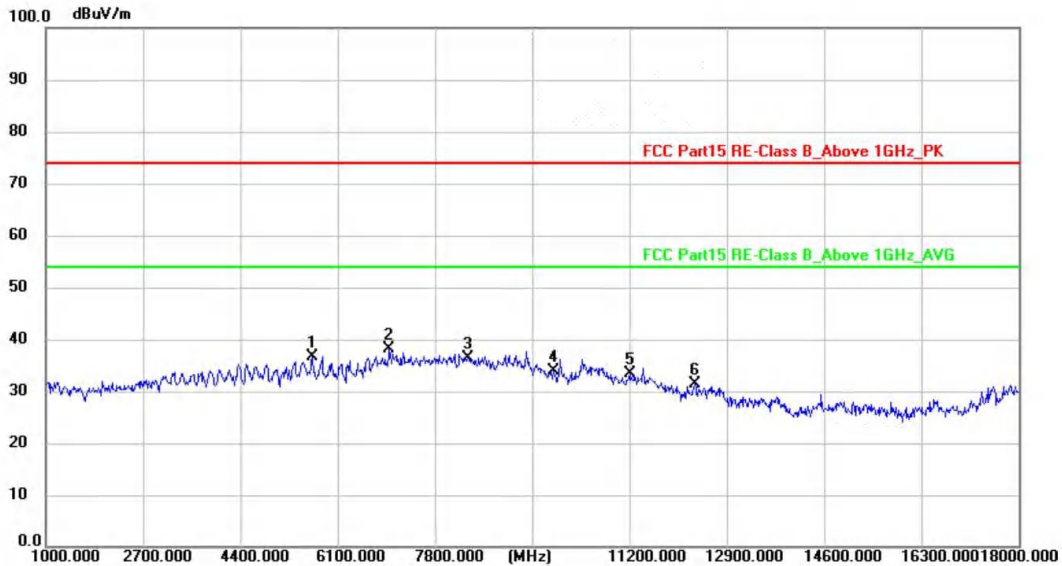

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5662.250	48.45	-11.77	36.68	74.00	-37.32	peak	150	21	P	
2 *	7001.000	46.06	-8.04	38.02	74.00	-35.98	peak	150	87	P	
3	8392.875	43.22	-6.79	36.43	74.00	-37.57	peak	150	132	P	
4	9882.500	39.45	-5.69	33.76	74.00	-40.24	peak	150	205	P	
5	11202.125	37.69	-4.28	33.41	74.00	-40.59	peak	150	174	P	
6	12339.000	35.05	-3.76	31.29	74.00	-42.71	peak	150	278	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 195 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11n20 5200MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/5 09:14:33

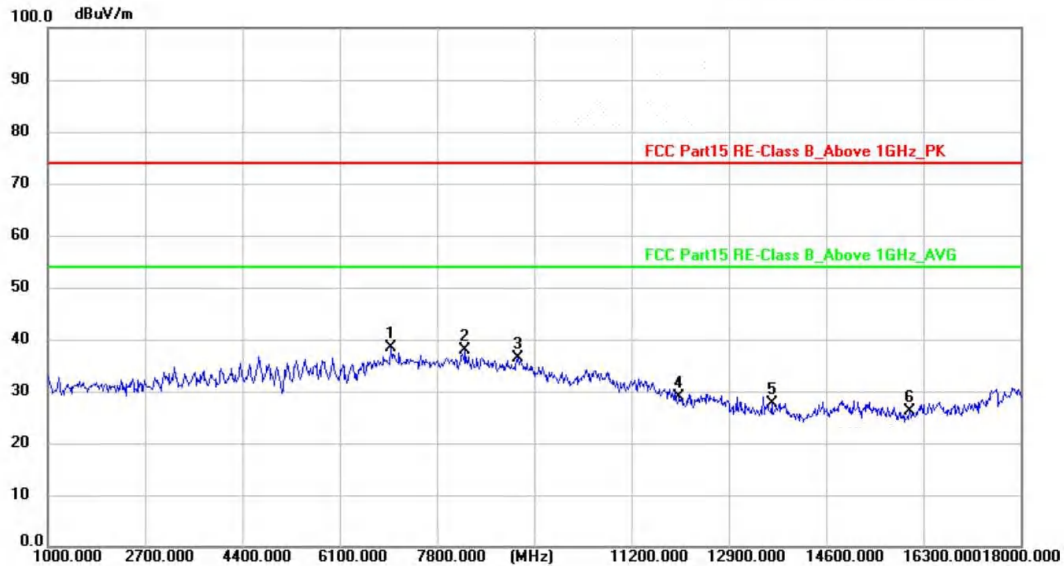

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	6998.875	46.33	-8.04	38.29	74.00	-35.71	peak	150	102	P	
2	8305.750	44.76	-6.86	37.90	74.00	-36.10	peak	150	214	P	
3	9213.125	42.39	-6.09	36.30	74.00	-37.70	peak	150	121	P	
4	12043.625	33.03	-4.16	28.87	74.00	-45.13	peak	150	46	P	
5	13662.875	29.97	-2.33	27.64	74.00	-46.36	peak	150	314	P	
6	16076.875	29.20	-3.06	26.14	74.00	-47.86	peak	150	106	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 196 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11n20 5240MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/5 09:18:35

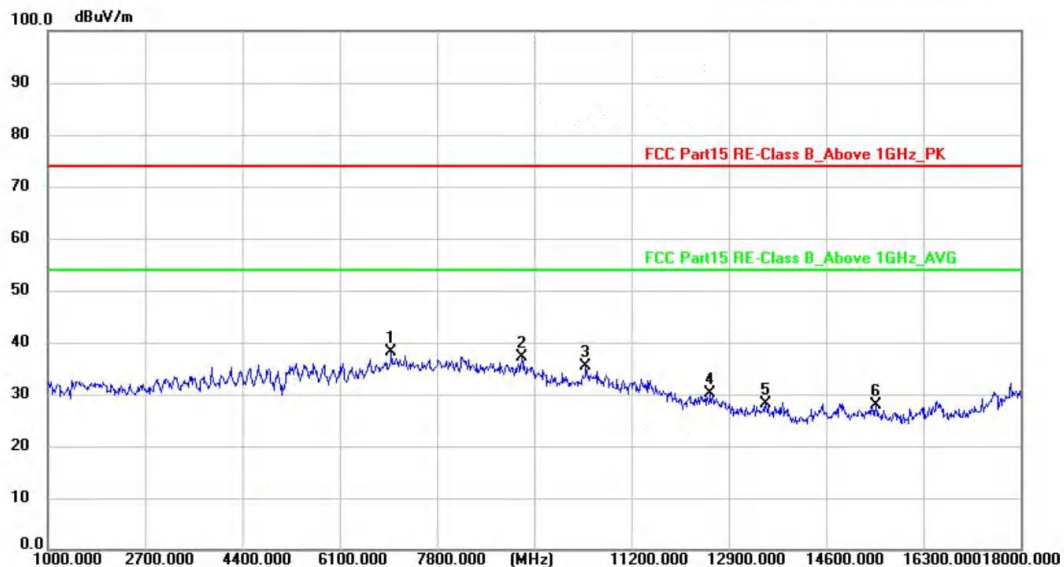

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	7001.000	46.05	-8.04	38.01	74.00	-35.99	peak	150	78	P	
2	9279.000	43.27	-6.04	37.23	74.00	-36.77	peak	150	320	P	
3	10411.625	40.38	-5.08	35.30	74.00	-38.70	peak	150	201	P	
4	12583.375	33.52	-3.45	30.07	74.00	-43.93	peak	150	245	P	
5	13550.250	30.56	-2.41	28.15	74.00	-45.85	peak	150	102	P	
6	15477.625	30.57	-2.62	27.95	74.00	-46.05	peak	150	354	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 197 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11n20 5240MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/5 09:23:17

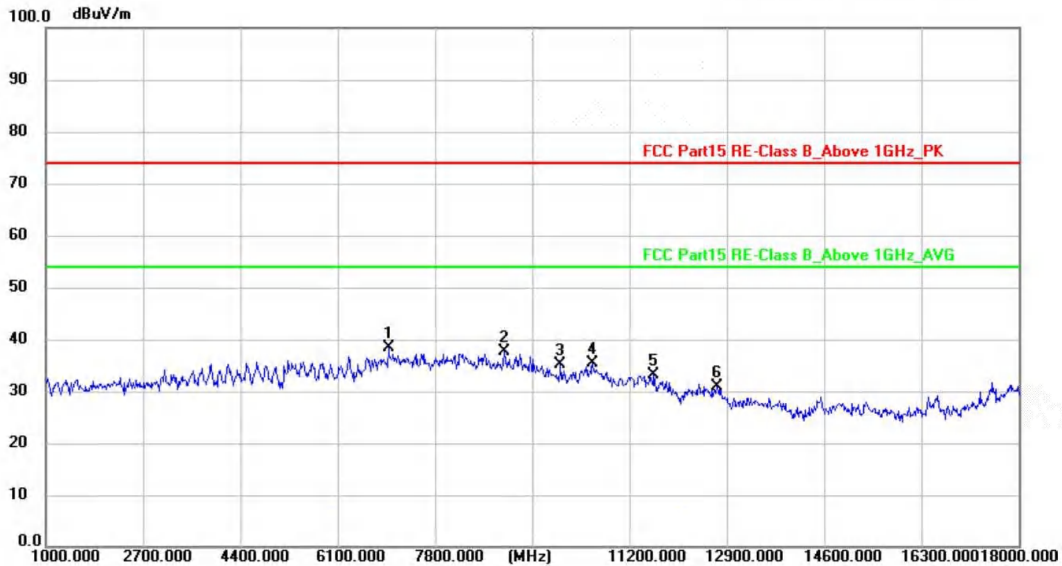

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	6998.875	46.43	-8.04	38.39	74.00	-35.61	peak	150	120	P	
2	9021.875	43.85	-6.20	37.65	74.00	-36.35	peak	150	128	P	
3	9999.375	40.71	-5.61	35.10	74.00	-38.90	peak	150	215	P	
4	10560.375	40.14	-4.87	35.27	74.00	-38.73	peak	150	47	P	
5	11637.750	37.42	-4.24	33.18	74.00	-40.82	peak	150	52	P	
6	12732.125	34.24	-3.24	31.00	74.00	-43.00	peak	150	103	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 198 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11ac20 5180MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/5 09:27:56

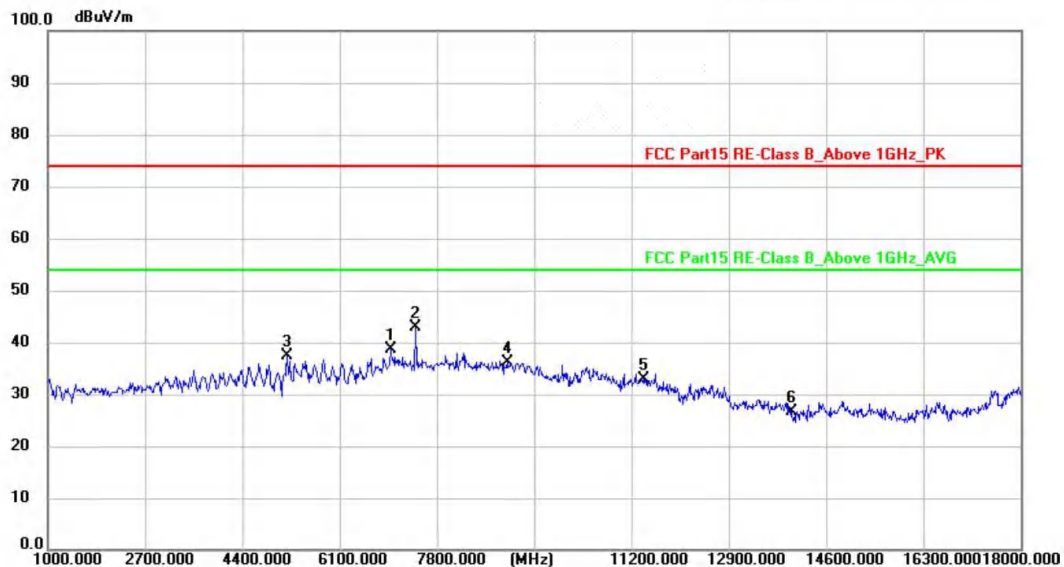

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	6998.875	46.71	-8.04	38.67	74.00	-35.33	peak	150	45	P	
2 *	7440.875	50.60	-7.66	42.94	74.00	-31.06	peak	150	190	P	
3	5186.250	50.43	-13.06	37.37	74.00	-36.63	peak	150	254	P	
4	9036.750	42.27	-6.19	36.08	74.00	-37.92	peak	150	157	P	
5	11418.875	37.24	-4.26	32.98	74.00	-41.02	peak	150	89	P	
6	13994.375	28.75	-2.04	26.71	74.00	-47.29	peak	150	63	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 199 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11ac20 5180MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/5 09:31:22

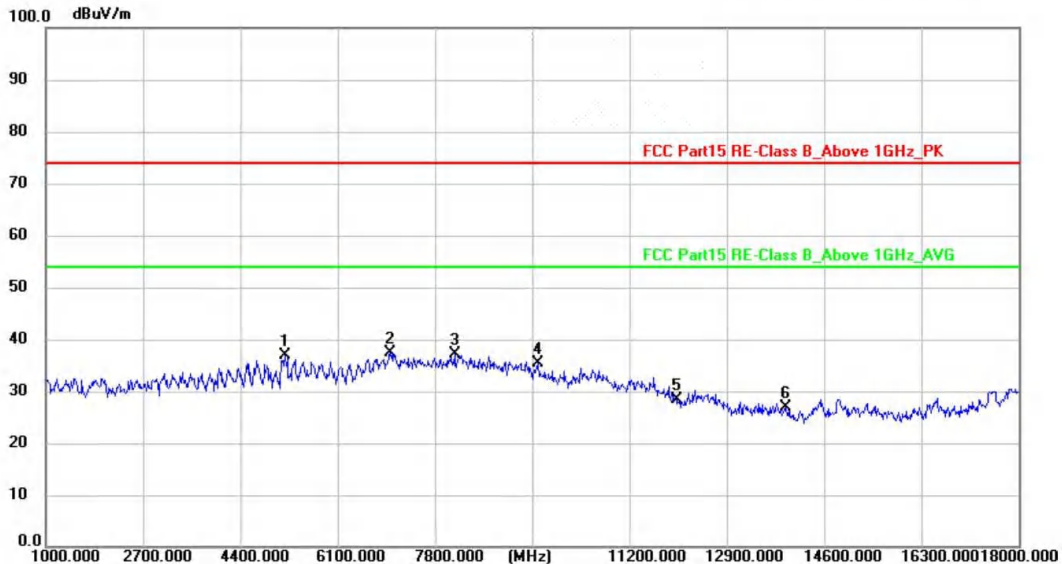

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5182.000	49.09	-12.26	36.83	74.00	-37.17	peak	150	255	P	
2 *	7020.125	45.35	-8.01	37.34	74.00	-36.66	peak	150	310	P	
3	8146.375	44.17	-7.02	37.15	74.00	-36.85	peak	150	124	P	
4	9608.375	41.25	-5.85	35.40	74.00	-38.60	peak	150	251	P	
5	12028.750	32.62	-4.17	28.45	74.00	-45.55	peak	150	230	P	
6	13951.875	29.05	-2.07	26.98	74.00	-47.02	peak	150	268	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 200 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11ac20 5200MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/5 09:36:29

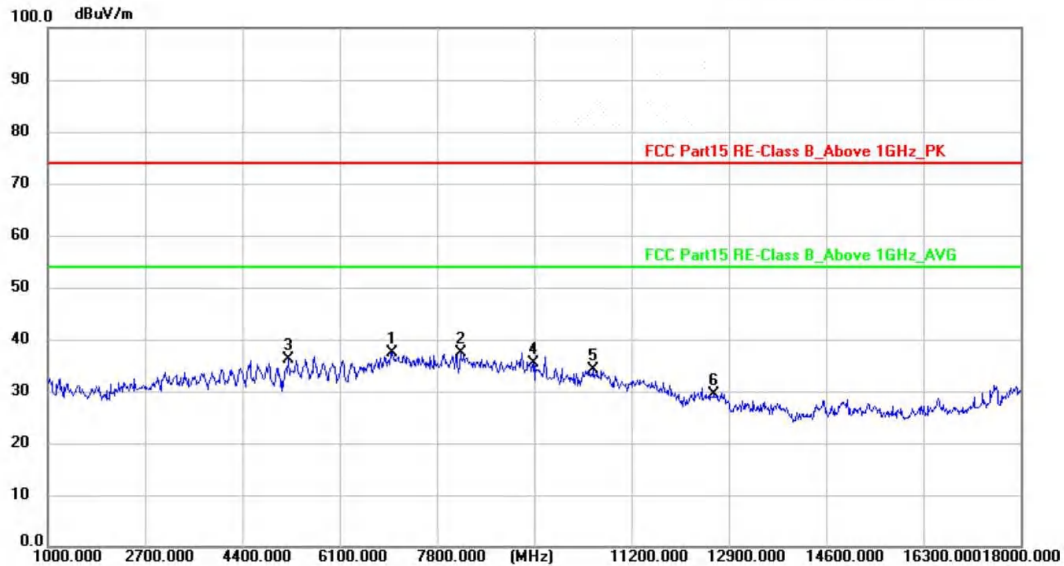

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7030.750	45.36	-8.02	37.34	74.00	-36.66	peak	150	42	P	
2 *	8210.125	44.40	-6.97	37.43	74.00	-36.57	peak	150	132	P	
3	5199.000	48.40	-12.23	36.17	74.00	-37.83	peak	150	103	P	
4	9489.375	41.33	-5.92	35.41	74.00	-38.59	peak	150	265	P	
5	10551.875	38.90	-4.87	34.03	74.00	-39.97	peak	150	89	P	
6	12657.750	32.68	-3.35	29.33	74.00	-44.67	peak	150	52	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 201 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11ac20 5200MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/5 09:39:57

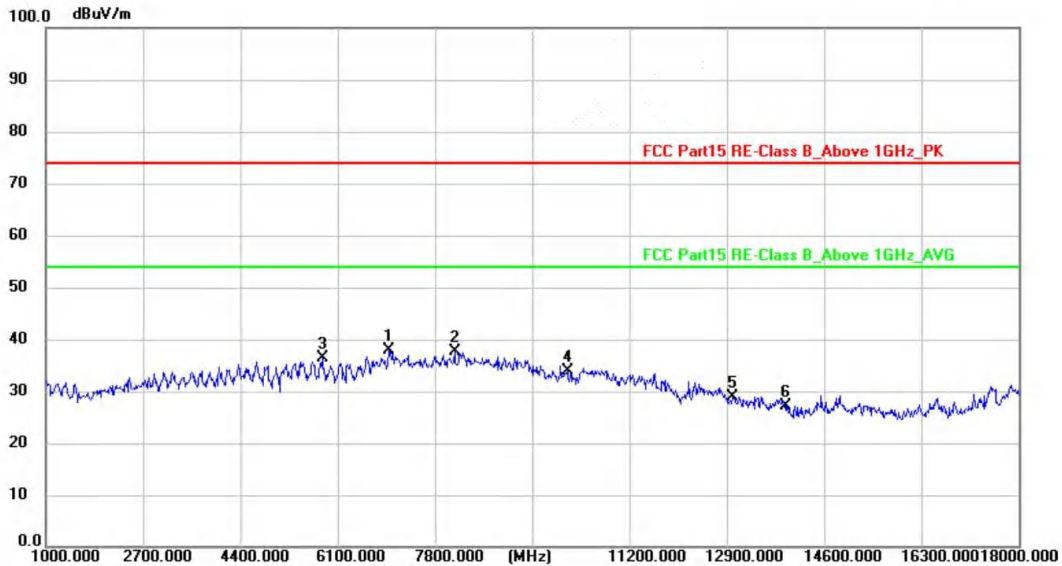

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	7001.000	46.00	-8.04	37.96	74.00	-36.04	peak	150	147	P	
2	8154.875	44.63	-7.01	37.62	74.00	-36.38	peak	150	214	P	
3	5834.375	47.46	-11.14	36.32	74.00	-37.68	peak	150	221	P	
4	10116.250	39.46	-5.47	33.99	74.00	-40.01	peak	150	236	P	
5	13002.000	31.85	-2.90	28.95	74.00	-45.05	peak	150	209	P	
6	13945.500	29.29	-2.09	27.20	74.00	-46.80	peak	150	89	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 202 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11ac20 5240MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/5 09:43:54

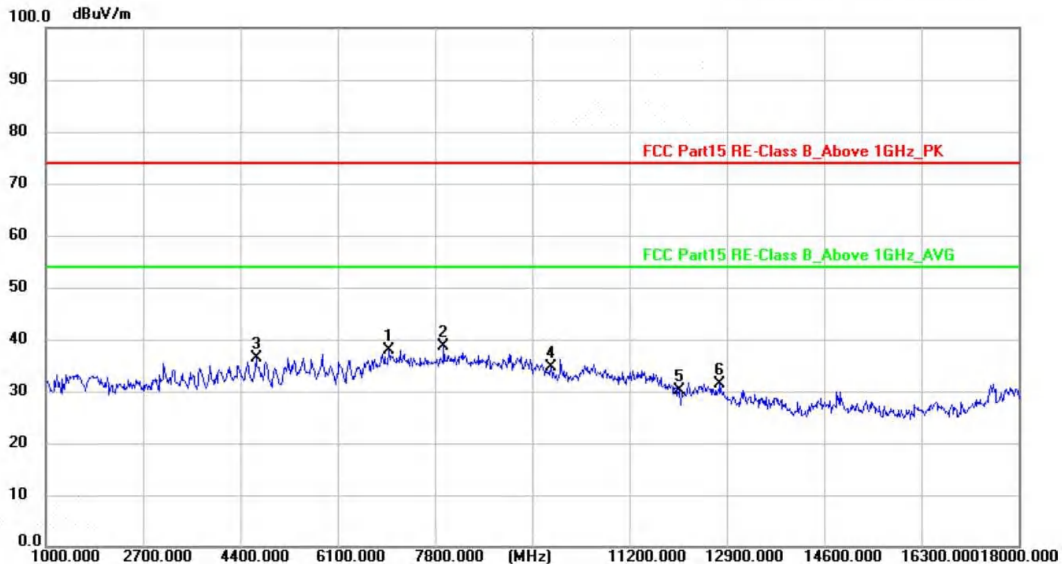

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7001.000	45.99	-8.04	37.95	74.00	-36.05	peak	150	215	P	
2 *	7965.750	45.80	-7.19	38.61	74.00	-35.39	peak	150	328	P	
3	4684.750	49.95	-13.67	36.28	74.00	-37.72	peak	150	121	P	
4	9835.750	40.39	-5.71	34.68	74.00	-39.32	peak	150	215	P	
5	12075.500	34.14	-4.11	30.03	74.00	-43.97	peak	150	65	P	
6	12785.250	34.50	-3.17	31.33	74.00	-42.67	peak	150	50	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 203 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11ac20 5240MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/5 09:46:20

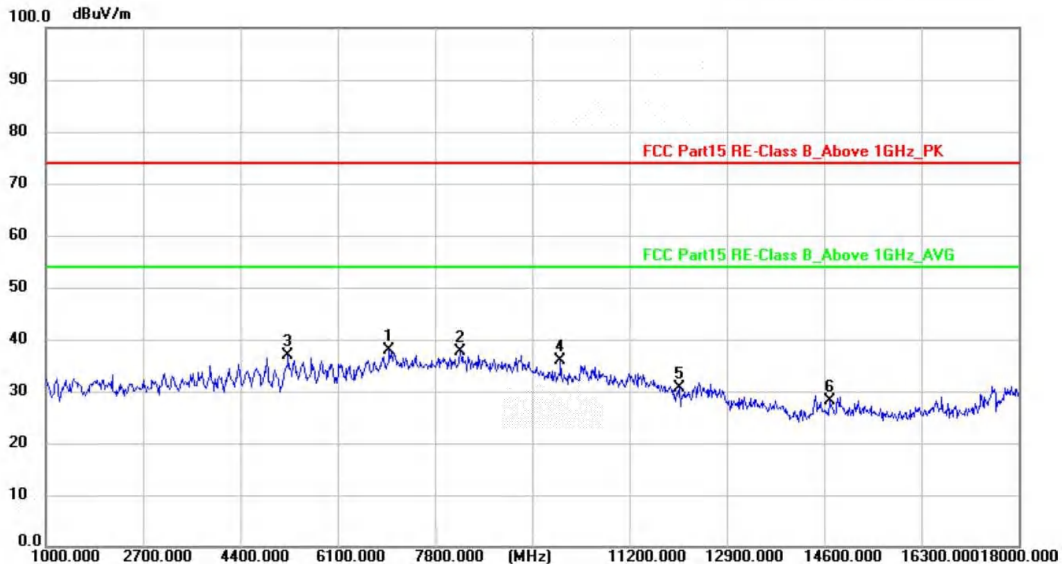

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	7001.000	45.96	-8.04	37.92	74.00	-36.08	peak	150	8	P	
2	8252.625	44.53	-6.92	37.61	74.00	-36.39	peak	150	241	P	
3	5239.375	49.07	-12.16	36.91	74.00	-37.09	peak	150	103	P	
4	10001.500	41.61	-5.61	36.00	74.00	-38.00	peak	150	210	P	
5	12075.500	34.66	-4.11	30.55	74.00	-43.45	peak	150	54	P	
6	14712.625	30.34	-2.16	28.18	74.00	-45.82	peak	150	81	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 204 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11ax20 5180MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/5 09:51:23

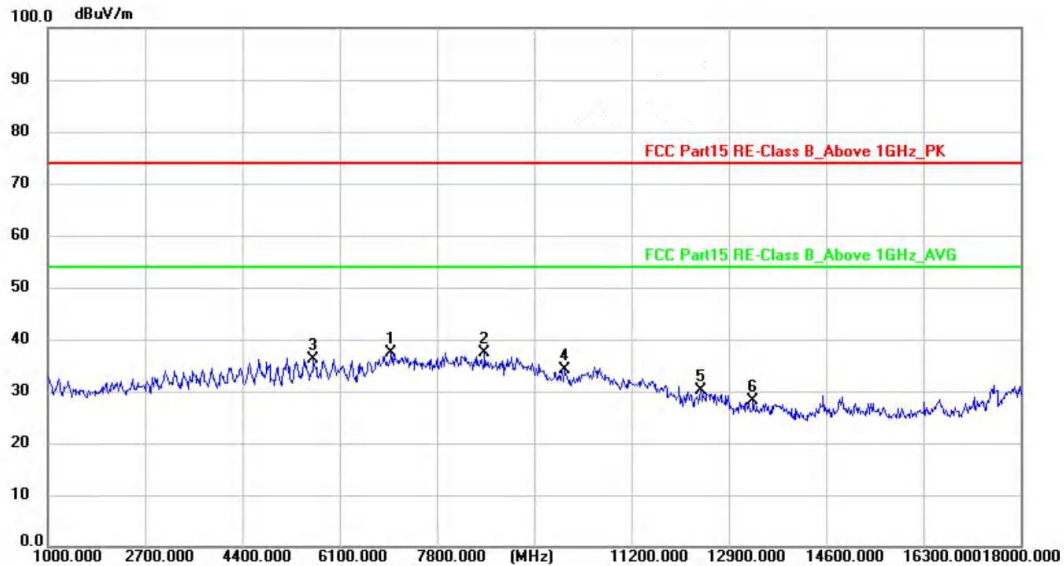

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	7005.250	45.43	-8.04	37.39	74.00	-36.61	peak	150	217	P	
2	8647.875	43.92	-6.54	37.38	74.00	-36.62	peak	150	80	P	
3	5647.375	47.88	-11.83	36.05	74.00	-37.95	peak	150	102	P	
4	10029.125	39.72	-5.57	34.15	74.00	-39.85	peak	150	214	P	
5	12413.375	33.79	-3.68	30.11	74.00	-43.89	peak	150	57	P	
6	13329.250	30.82	-2.61	28.21	74.00	-45.79	peak	150	81	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B

CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 205 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11ax20 5180MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/5 09:56:12

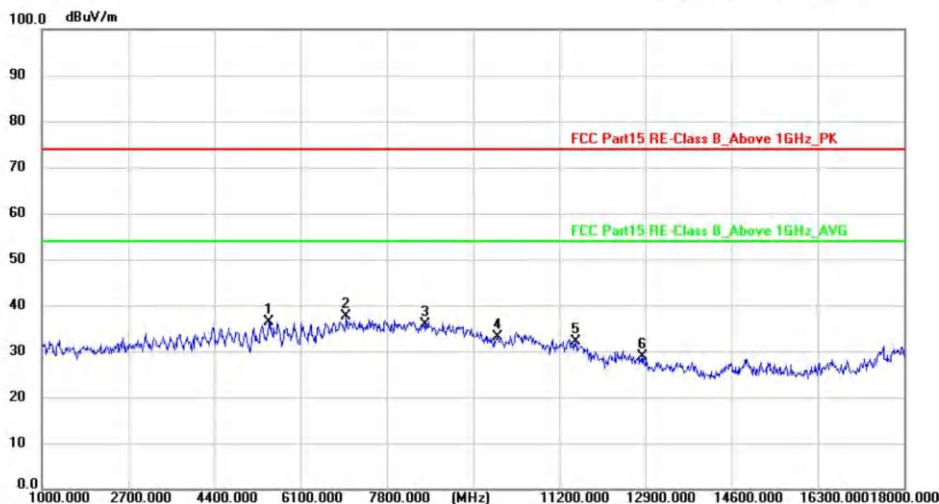

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5475.250	48.66	-12.28	36.38	74.00	-37.62	peak	150	257	P	
2 *	7015.875	45.69	-8.03	37.66	74.00	-36.34	peak	150	160	P	
3	8569.250	42.43	-6.62	35.81	74.00	-38.19	peak	150	124	P	
4	9999.375	38.75	-5.61	33.14	74.00	-40.86	peak	150	58	P	
5	11527.250	36.31	-4.25	32.06	74.00	-41.94	peak	150	92	P	
6	12851.125	31.90	-3.09	28.81	74.00	-45.19	peak	150	103	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: TX 1-18G\Data :#20

Page: 1

Engineer Signature:

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 206 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: ax20 5180MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/6 09:37:55

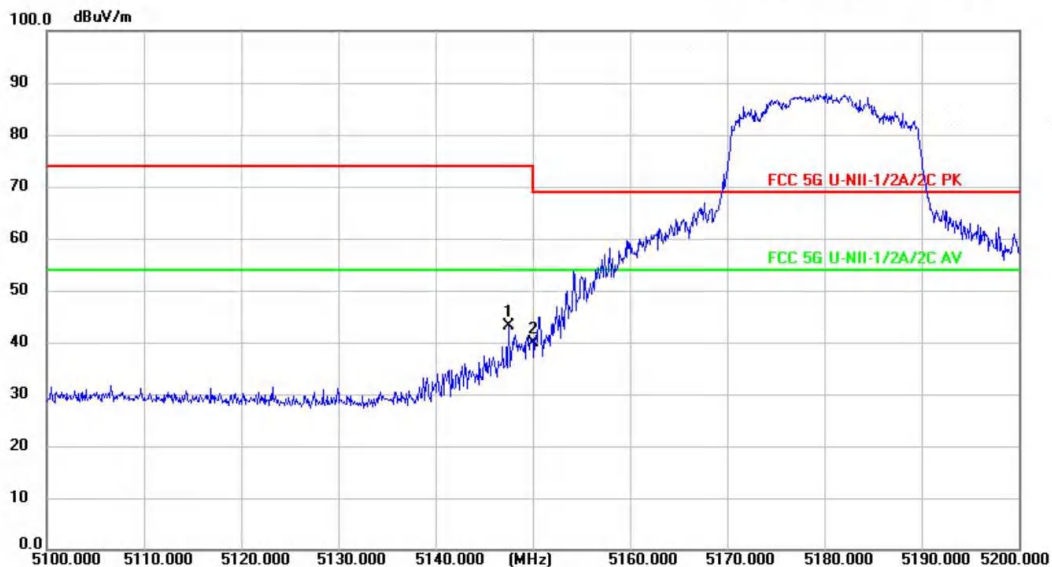

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5147.500	61.55	-18.32	43.23	74.00	-30.77	peak	150	135	P	
2 *	5150.000	58.13	-18.31	39.82	68.82	-29.00	peak	150	217	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 207 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: ax20 5180MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/6 09:42:56

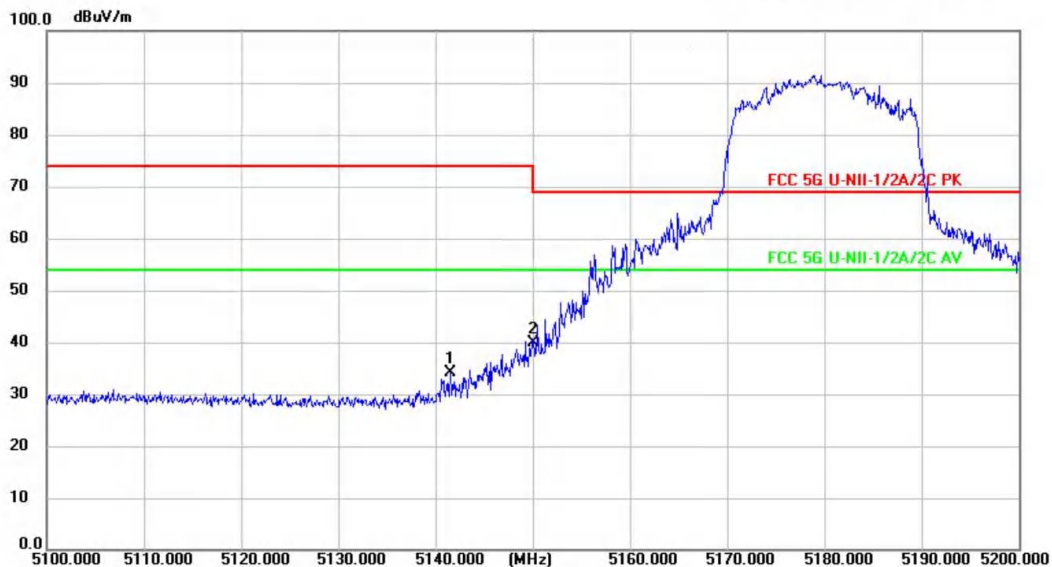

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5141.500	53.33	-19.18	34.15	74.00	-39.85	peak	150	310	P	
2 *	5150.000	59.05	-19.16	39.89	68.82	-28.93	peak	150	27	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 208 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: ax20 5240MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/6 09:46:31

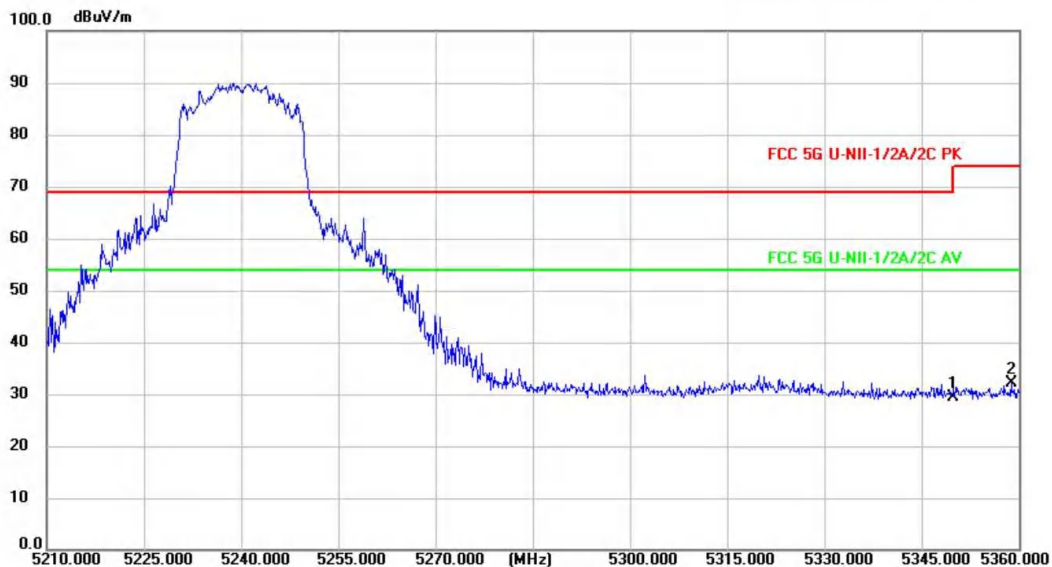

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5350.000	47.98	-18.63	29.35	68.82	-39.47	peak	150	102	P	
2	5358.800	50.66	-18.60	32.06	74.00	-41.94	peak	150	245	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 209 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: ax20 5240MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/6 09:49:32

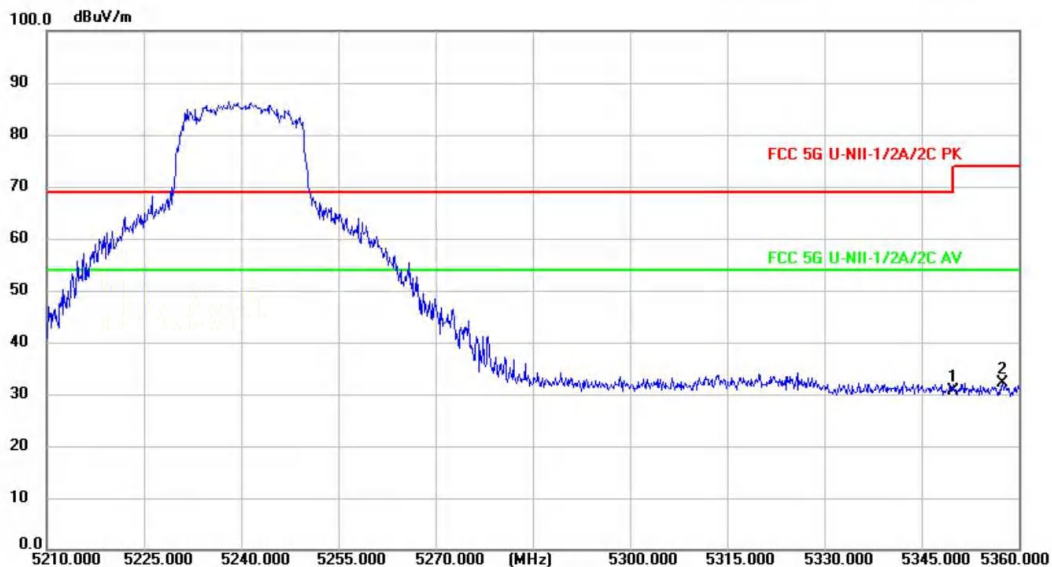

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5350.000	48.54	-17.98	30.56	68.82	-38.26	peak	150	134	P	
2	5357.450	50.20	-17.96	32.24	74.00	-41.76	peak	150	247	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 210 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: n40 5190MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/6 09:53:02

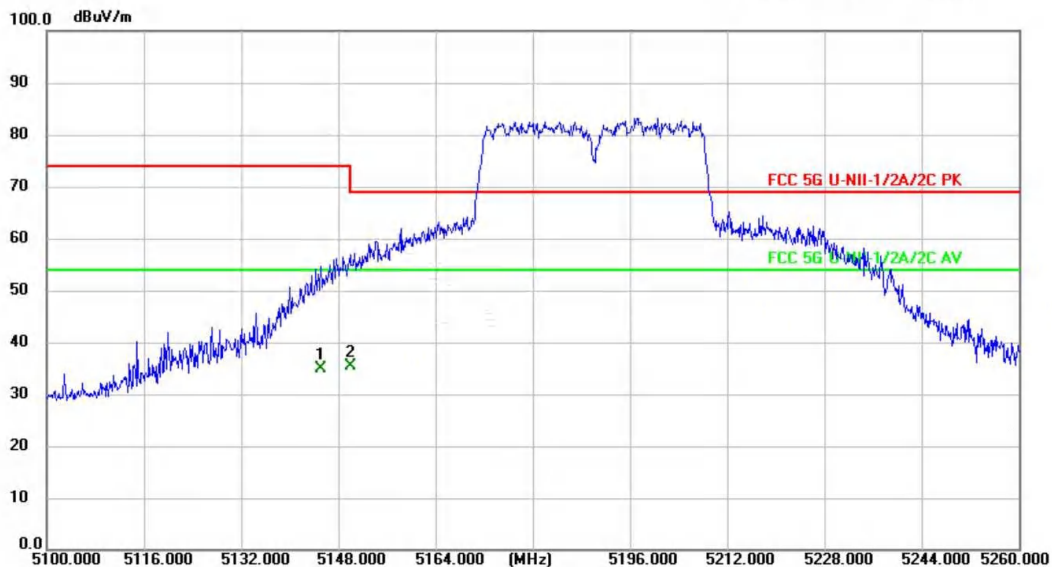

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5145.120	53.18	-18.32	34.86	54.00	-19.14	AVG	150	78	P	
2 *	5150.000	53.57	-18.31	35.26	54.00	-18.74	AVG	150	105	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 211 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: n40 5190MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/6 09:58:54

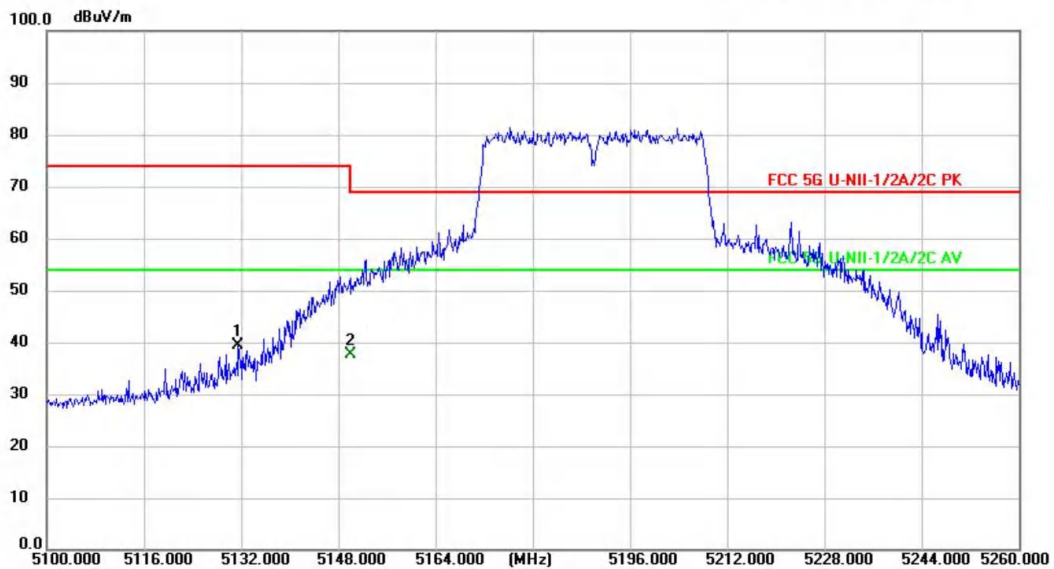

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5131.520	58.58	-19.20	39.38	74.00	-34.62	peak	150	122	P	
2 *	5150.000	56.84	-19.16	37.68	54.00	-16.32	AVG	150	17	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 212 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: n40 5230MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/6 10:03:05

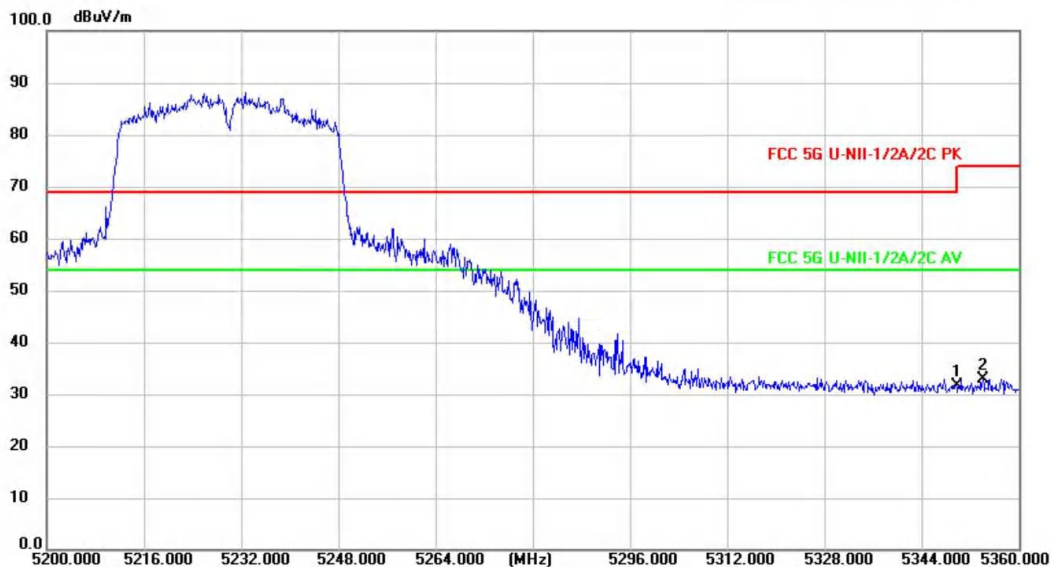

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5350.000	50.26	-18.63	31.63	68.82	-37.19	peak	150	78	P	
2	5354.080	51.60	-18.61	32.99	74.00	-41.01	peak	150	214	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 213 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: n40 5230MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/6 10:08:21

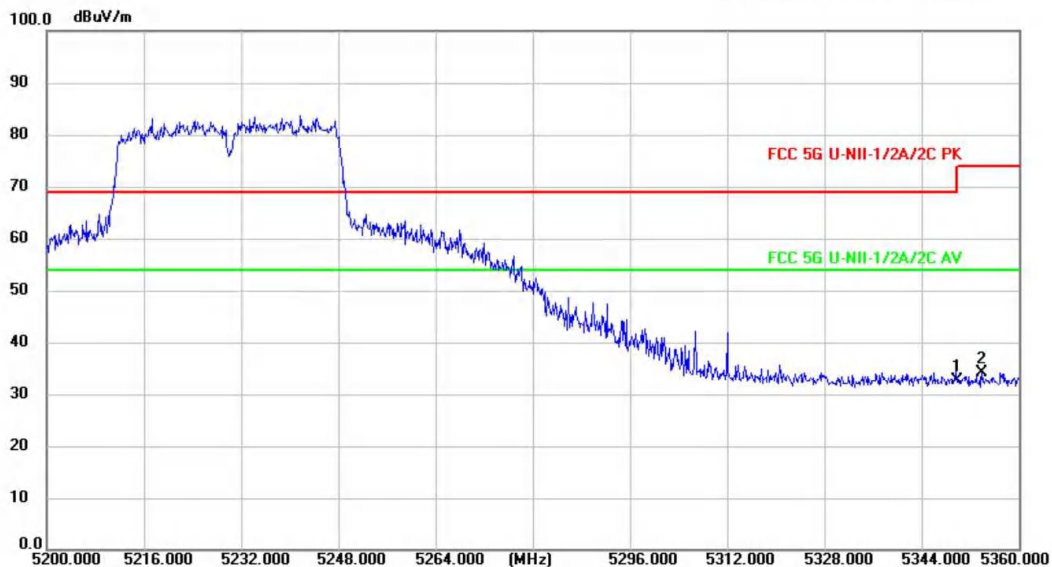

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5350.000	50.51	-17.98	32.53	68.82	-36.29	peak	150	124	P	
2	5353.920	52.09	-17.96	34.13	74.00	-39.87	peak	150	127	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 214 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: ac40 5190MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/6 10:13:07

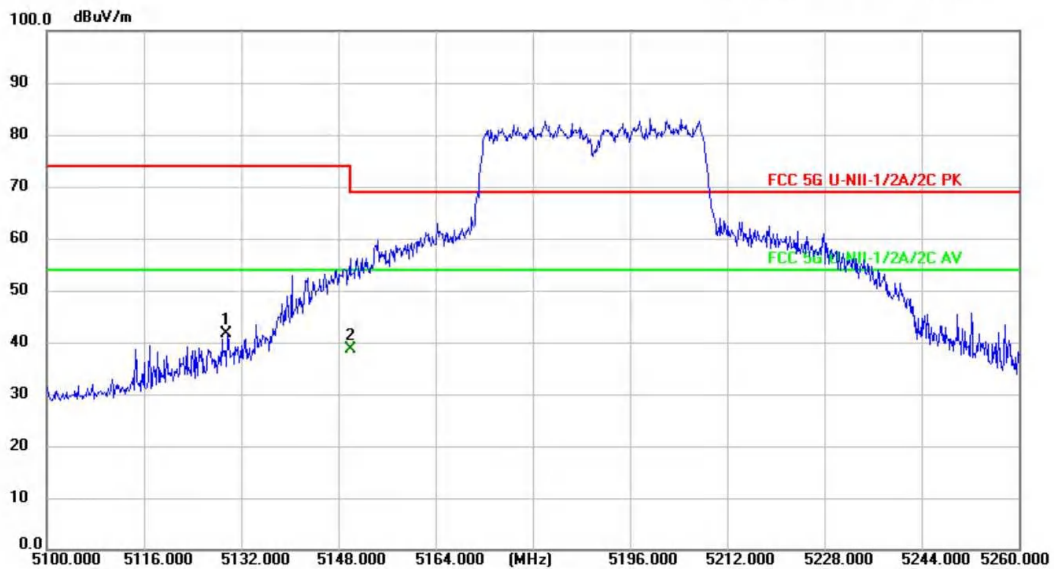

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5129.760	60.05	-18.34	41.71	74.00	-32.29	peak	150	157	P	
2 *	5150.000	56.96	-18.31	38.65	54.00	-15.35	AVG	150	217	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 215 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: ac40 5190MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/6 10:18:29

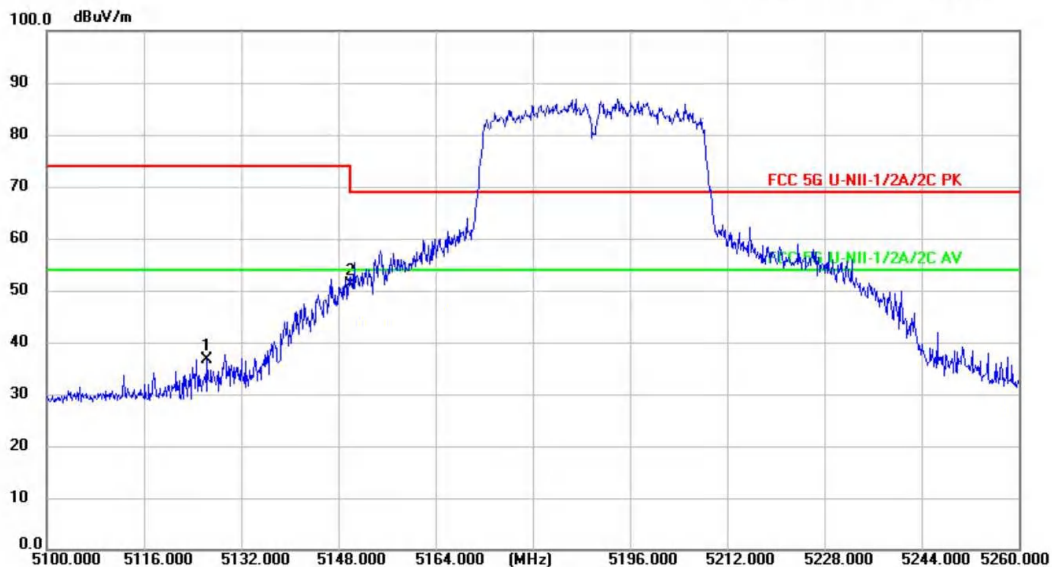

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5126.400	55.91	-19.22	36.69	74.00	-37.31	peak	150	119	P	
2 *	5150.000	70.20	-19.16	51.04	68.82	-17.78	peak	150	247	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 216 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: ac40 5230MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/6 10:23:01

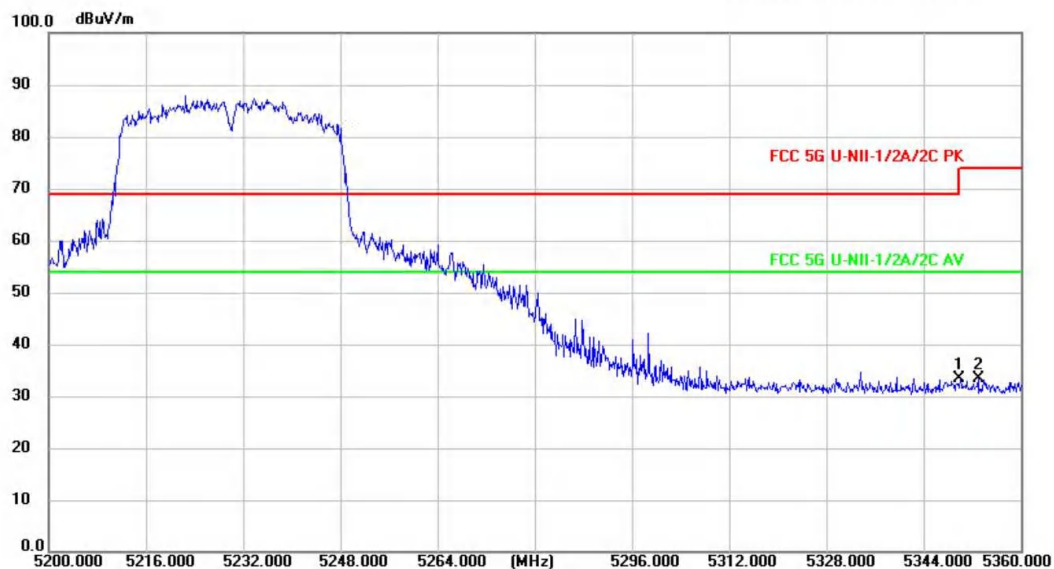

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5350.000	52.10	-18.63	33.47	68.82	-35.35	peak	150	98	P	
2	5352.960	51.96	-18.61	33.35	74.00	-40.65	peak	150	109	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN24K76Q 003

Prüfbericht - Produkte
Test Report - Products

Page 217 of 311




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: ac40 5230MHz(MIMO)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeScan TE25 W)

Radiated Emission Measurement

Test Date: 2024/11/6 10:28:22

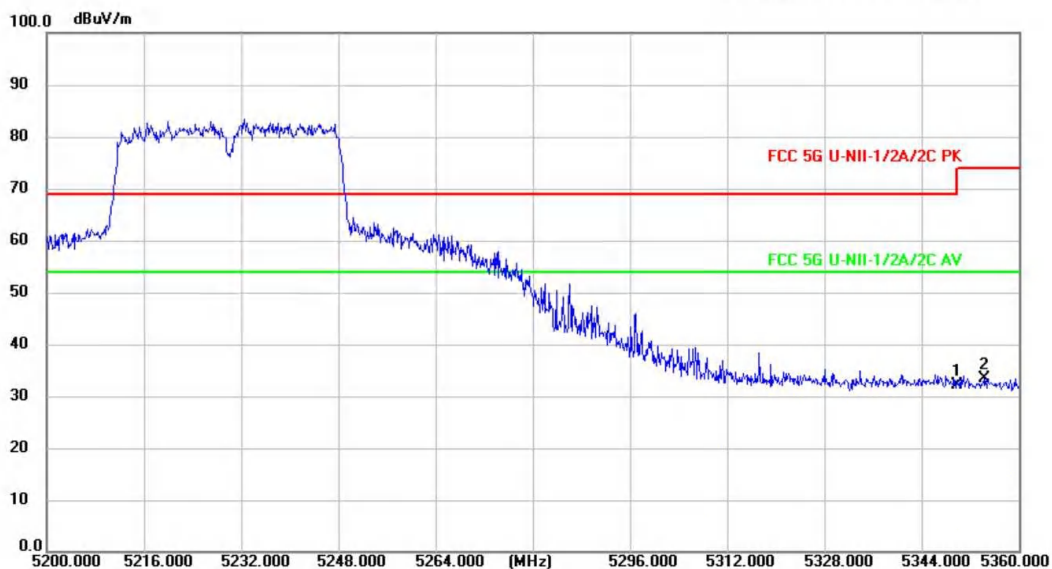

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5350.000	50.20	-17.98	32.22	68.82	-36.60	peak	150	127	P	
2	5354.240	51.38	-17.96	33.42	74.00	-40.58	peak	150	157	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit