

September 30, 2020

CalAmp  
2200 Faraday Ave, Suite 220  
Carlsbad, CA 92008  
USA

Dear Imad Rizk,

Enclosed is the EMC Wireless test report for compliance testing of the CalAmp., TTU2830MBas tested to the requirements of the FCC Certification rules under Title 47 of the CFR Part 27 Subpart L for Broadband Radio Service (BRS) Devices.

Thank you for using the services of Eurofins E&E North America. If you have any questions regarding these results or if MET can be of further service to you, please contact me.

Sincerely yours,  
EUROFINS E&E NORTH AMERICA



Arsalan Hasan  
Wireless Laboratory

Reference: (\CalAmp\WIRS109402-FCC27 Rev 4)



Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins E&E North America. While use of the A2LA logo in this report reflects MET accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.

Eurofins MET Laboratories Inc. (Eurofins E&E North America) is part of the Eurofins Electrical & Electronics (E&E) global compliance network.

## **Electromagnetic Compatibility Criteria Test Report**

for the

**CalAmp.  
TTU2830MB**

**Tested under  
FCC Certification Rules  
Title 47 of the CFR, Part 27 Subpart L**

**Report: WIRS109402-FCC27 Rev 4**

September 30, 2020

**Prepared For:**

**CalAmp.  
2200 Faraday Ave, Suite 220  
Carlsbad, CA 92008  
USA**

**Prepared By:  
Eurofins E&E North America  
3162 Belick St.  
Santa Clara, CA 95054**


**Electromagnetic Compatibility Criteria  
Test Report**

for the

**CalAmp.  
TTU2830MB**

**Tested Under**

**FCC Certification Rules  
Title 47 of the CFR, Part 27 Subpart L**




Felix Huang  
Engineer, Wireless Laboratory



Arsalan Hasan  
Manager, Wireless Laboratory

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 27 L of the FCC Rules under normal use and maintenance.



Eleazar Zuniga, PhD.  
Director, Wireless Technologies

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	September 12, 2020	Initial Issue.
1	September 17, 2020	TCB Updates
2	September 27, 2020	TCB Updates
3	September 29, 2020	TCB Updates
4	September 30, 2020	TCB Updates

## Table of Contents

<b>I.</b>	<b>Executive Summary .....</b>	<b>1</b>
	A. Purpose of Test .....	2
	B. Executive Summary .....	2
<b>II.</b>	<b>Equipment Configuration .....</b>	<b>3</b>
	A. Overview .....	4
	B. References.....	5
	C. Test Site .....	5
	D. Measurement Uncertainty .....	5
	E. Description of Test Sample.....	6
	F. Equipment Configuration.....	6
	G. Ports and Cabling Information.....	6
	H. Mode of Operation.....	6
	I. Method of Monitoring EUT Operation.....	6
	J. Modifications .....	7
	Modifications to EUT .....	7
	Modifications to Test Standard .....	7
	K. Disposition of EUT .....	7
<b>III.</b>	<b>Electromagnetic Compatibility Criteria for Intentional Radiators.....</b>	<b>8</b>
	§ 27.50(d)(4) Effective Isotropic Radiated Power .....	9
	§ 2.1053 Radiated Spurious Emissions .....	15
<b>IV.</b>	<b>Test Equipment .....</b>	<b>22</b>

## List of Terms and Abbreviations

<b>AC</b>	<b>Alternating Current</b>
<b>ACF</b>	<b>Antenna Correction Factor</b>
<b>Cal</b>	<b>Calibration</b>
<b><i>d</i></b>	<b>Measurement Distance</b>
<b>dB</b>	<b>Decibels</b>
<b>dB<sub>μ</sub>A</b>	<b>Decibels above one <b>micro</b>amp</b>
<b>dB<sub>μ</sub>V</b>	<b>Decibels above one <b>micro</b>volt</b>
<b>dB<sub>μ</sub>A/m</b>	<b>Decibels above one <b>micro</b>amp <b>per</b> meter</b>
<b>dB<sub>μ</sub>V/m</b>	<b>Decibels above one <b>micro</b>volt <b>per</b> meter</b>
<b>DC</b>	<b>Direct Current</b>
<b>E</b>	<b>Electric Field</b>
<b>DSL</b>	<b>Digital Subscriber Line</b>
<b>ESD</b>	<b>Electrostatic Discharge</b>
<b>EUT</b>	<b>Equipment Under Test</b>
<b><i>f</i></b>	<b>Frequency</b>
<b>FCC</b>	<b>Federal Communications Commission</b>
<b>GRP</b>	<b>Ground Reference Plane</b>
<b>H</b>	<b>Magnetic Field</b>
<b>HCP</b>	<b>Horizontal Coupling Plane</b>
<b>Hz</b>	<b>Hertz</b>
<b>IEC</b>	<b>International Electrotechnical Commission</b>
<b>kHz</b>	<b>kilohertz</b>
<b>kPa</b>	<b>kilopascal</b>
<b>kV</b>	<b>kilovolt</b>
<b>LISN</b>	<b>Line Impedance Stabilization Network</b>
<b>MHz</b>	<b>Megahertz</b>
<b>μH</b>	<b>microhenry</b>
<b>μ</b>	<b>microfarad</b>
<b>μs</b>	<b>microseconds</b>
<b>NEBS</b>	<b>Network Equipment-Building System</b>
<b>PRF</b>	<b>Pulse Repetition Frequency</b>
<b>RF</b>	<b>Radio Frequency</b>
<b>RMS</b>	<b>Root-Mean-Square</b>
<b>TWT</b>	<b>Traveling Wave Tube</b>
<b>V/m</b>	<b>Volts <b>per</b> meter</b>
<b>VCP</b>	<b>Vertical Coupling Plane</b>

# **I. Executive Summary**

## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the CalAmp TTU2830MB, with the requirements of Part 27. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the TTU2830MB. CalAmp should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the TTU2830MB, has been **permanently** discontinued.

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 27, in accordance with CalAmp., purchase order number 401701.

Reference	Description	Compliance
§2.1046; §27.50(d)	Radiated Output Power	Compliant
§2.1049	Occupied Bandwidth	Data valid from module original certification FCC-ID: XMR201707BG96
§27.50	Peak to Average Ration	Data valid from module original certification FCC-ID: XMR201707BG96
§2.1051; §27.53( m)	Spurious Emissions at Antenna Terminals	Data valid from module original certification FCC-ID: XMR201707BG96
§2.1053(g); §2.1053(h)	Radiated Spurious Emissions	Compliant
§2.1055	Frequency Stability	Data valid from module original certification FCC-ID: XMR201707BG96

**Table 1. Executive Summary of EMC Compliance Testing**

**Rationale:** Per KDB KDB 996369 D04 “Modular Transmitter Integration Guide – Guidance for Host Product Manufacturers” only worst-case radiated measurements are reported in this filing.



## **II. Equipment Configuration**

## A. Overview

Eurofins E&E North America was contracted by CalAmp to perform testing on the TTU2830MB, under CalAmp.'s purchase order number 401701.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the CalAmp, TTU2830MB.

The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	TTU2830MB			
<b>Model(s) Covered:</b>	TTU2830MB			
<b>Filing Status:</b>	Original			
<b>EUT Specifications:</b>	Primary Power: 12V DC			
	FCC ID: APV-2830MB			
	Module Original Report Number(s): Part 27: Report R2007A0435-R6 Date Available in FCC Database: 09/04/2020			
	Type of Modulations:	QPSK, 16QAM		
	Equipment Code:	PCB		
	Technology	Frequency Range	(Measured) Power Output	(Rated) Power Output
	LTE CAT-M1 Band 4	1710 – 1755 MHz	28.56 dBm EIRP	29.98 dBm EIRP
	LTE CAT-M1 Band 12	699 – 716 MHz	26.32 dBm ERP	27.79 dBm ERP
	LTE CAT-M1 Band 13	777 – 787 MHz	25.91 dBm ERP	27.17 dBm ERP
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.			
<b>Environmental Test Conditions:</b>	Temperature: 15-35° C			
	Relative Humidity: 30-60%			
	Barometric Pressure: 860-1060 mbar			
<b>Evaluated by:</b>	Arsalan Hasan			
<b>Date(s):</b>	September 30, 2020			

**Table 2. EUT Summary Table**

## B. References

<b>CFR 47, Part 27</b>	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 27: Rules and Regulations for Advanced Wireless Services
<b>KDB 996369 D04</b>	Modular Transmitter Integration Guide – Guidance For Host Product Manufacturers
<b>ANSI C63.4:2014</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ANSI C63.26: 2015</b>	Compliance Testing of Transmitters Used in Licensed Radio Services
<b>ISO/IEC 17025:2017</b>	General Requirements for the Competence of Testing and Calibration Laboratories
<b>EIA/TIA-603-A-2001</b>	Land Mobile FM or PM Communication Equipment Measurement and Performance Standards
<b>KDB 971168 v02r02</b>	Measurement Guidance For Certification Of Licensed Digital Transmitters

**Table 3. Standard References**

## C. Test Site

All testing was performed at Eurofins E&E North America, 3162 Belick St. Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 5 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

MET Laboratories is a ISO/IEC 17025 accredited site by A2LA, California #0591.02.

## D. Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
<b>RF Frequencies</b>	±4.52 Hz	2	95%
<b>RF Power Conducted Emissions</b>	±2.32 dB	2	95%
<b>RF Power Conducted Spurious Emissions</b>	±2.25 dB	2	95%
<b>RF Power Radiated Emissions</b>	±3.01 dB	2	95%
<b>Radiated Emissions, (30 MHz – 1 GHz)</b>	±3.24	2	95%
<b>Radiated Emissions, (1 - 6 GHz)</b>	±3.92	2	95%
<b>Conducted Emission</b>	±3.53	2	95%
<b>CEV Telecom Port</b>	±2.44	2	95%

**Table 4. Uncertainty Calculations Summary**

## E. Description of Test Sample

The CalAmp TTU2830MB is a vehicle tracking device using LTE connectivity and GPS for fleet management.



Figure 1: Block Diagram of Test Configuration

## F. Equipment Configuration

Ref. ID	Slot #	Name / Description	Model Number	Part Number	Serial Number	Revision
1		Asset Tracker	TTU2830MB	TTU2830MB	4672001045	1

Table 5: Equipment Configuration

## G. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number	*Customer Supplied Calibration Data
3	Serial Adaptor	CalAmp	134364-SER	NA
4	Laptop	Dell	Latitude	NA

Table 6: Support Equipment

## H. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty	Length as tested (m)	Max Length (m)	Shielded? (Y/N)	Termination Box ID & Port Name
2	Power/Data Port	12 wire BUS	1	1m	1m	n	na

Table 7: Ports and Cabling Information

## **I. Mode of Operation During Testing**

The TTU2830MB was paired with CMW500 and the callbox on screen indication was used to monitor proper connection.

## **J. Method of Monitoring EUT Operation**

The signal will be displayed on a spectrum analyzer.

## **K. Modifications**

### **a) Modifications to EUT**

No modifications were made to the EUT.

### **b) Modifications to Test Standard**

No modifications were made to the test standard.

## **L. Disposition of EUT**

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to CalAmp upon completion of testing.

### **III. Electromagnetic Compatibility Criteria for Intentional Radiators**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 27.50 Radiated Output Power

**Test Requirement(s):**    **§27.50 (b)(10):** Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

**§27.50 (b)(10):** Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

**§27.50 (d)(4):** Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

**Test Procedures:**        The EUT was tested according to the average power integration procedures of ANSI C63.26 (2015) 5.5.3.

Radiated measurements shall be performed using the test arrangement shown in Figure . After a direct field strength measurement of the maximum emission amplitude level (maximized as described previously), a signal generator and transmit antenna are substituted in place of the EUT, as shown in Figure 7. The output power of the signal generator is adjusted to replicate the maximized signal amplitude measured in the direct field strength measurement. The signal generator power setting is then used to determine the ERP or EIRP of the EUT spurious emission(s). These measurements shall be performed in accordance with the common requirements specified in 5.5.2 and the specific requirements provided in this subclause.

A step-by-step procedure is as follows.

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
  - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
  - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
  - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
  - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
  - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.

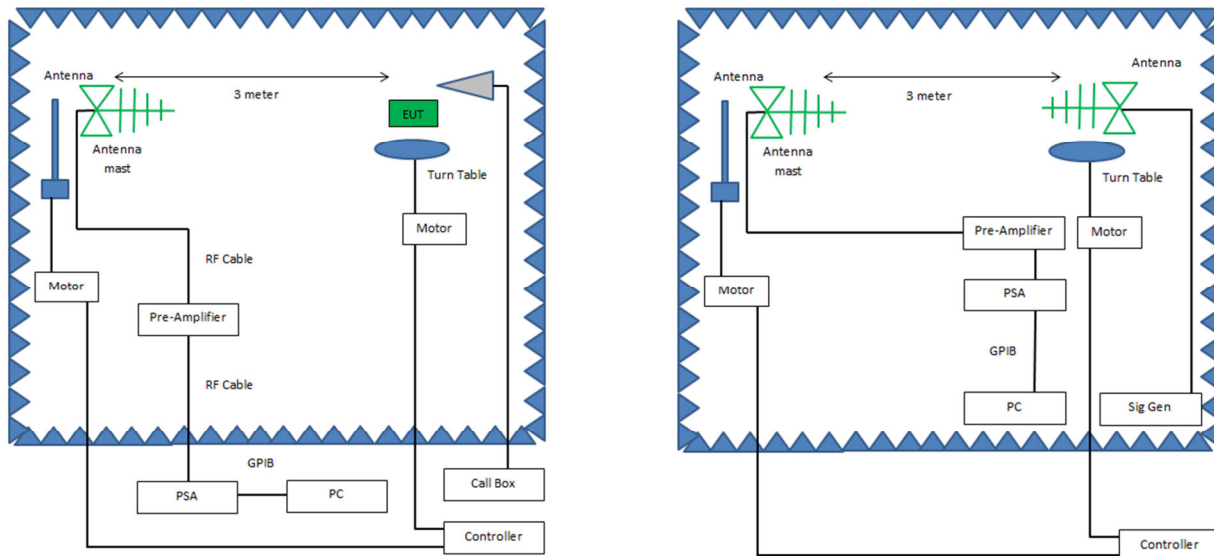


Figure 2. ERP / EIRP, Block Diagram, Test Setup Below 1GHz

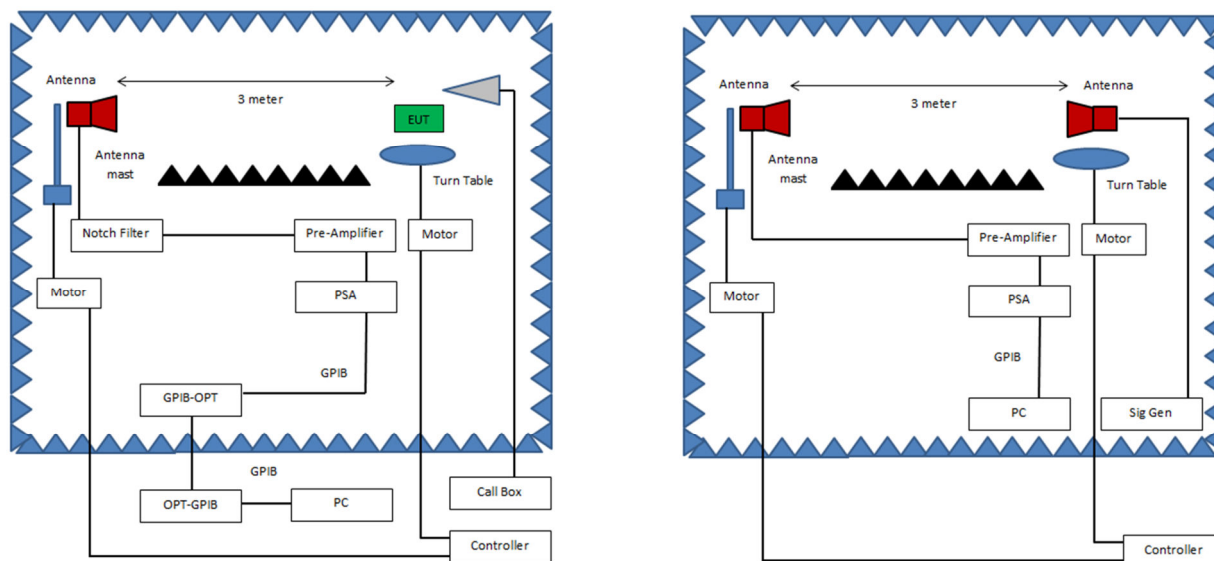


Figure 3. ERP / EIRP, Block Diagram, Test Setup Above 1GHz



- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
  - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
  - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
  - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

where

$P_e$  = equivalent emission power in dBm

$P_s$  = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.

- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from: gain (dBd) = gain (dBi) - 2.15 dB. If necessary, the antenna gain can be calculated from calibrated antenna factor information

**Test Results:** The EUT was found compliant with the requirements of this section.

**Test Engineer(s):** Felix Huang

**Test Date(s):** 09/03/2020 & 09/25/2020 & 09/30/2020

## Test Results

Mode	Bandwidth	Channel/ Frequency (MHz)	Index	RB# RBstart	Conducted Power (dBm)	
					QPSK	16QAM
Band 4	10 MHz	20000/1725	3	1#0	22.39	21.96
			0	4#0	22.22	22.10
		20175/1732.5	0	1#0	22.34	22.03
			0	4#0	22.14	22.08
		20350/1750	4	1#5	22.39	22.15
			7	4#2	22.28	22.23

Table 8. Module Original Conducted Powers from Module Report R2007A0435-R6

### Note:

Highest conducted power listed in green. Channels with highest conducted power were selected for spot checking.

### Note:

Only 10MHz Bandwidth is supported by the host device.

Mode	Freq. (MHz)	SG (dBm)	CL (dB)	AG (dBi)	Ant. Pol.	EIRP Level (dBm)	Limit (dBm)	Margin
LTE Band 4 10 MHz BW QPSK	1750	0.51	1.26	29.31	Vertical	28.56	30.00	1.44
LTE Band 4 10 MHz BW 16QAM	1750	-1.78	1.26	29.31	Vertical	26.27	30.00	3.73

Table 9. ERP, Test Results, Part 27, LTE Band 4

### Note:

$EIRP = SG - CL + AG$   
 $ERP = EIRP - 2.15$

Mode	Bandwidth	Channel/ Frequency (MHz)	Index	RB# RBstart	Conducted Power (dBm)	
					QPSK	16QAM
Band 12	10 MHz	23060/704	3	1#0	22.72	23.18
			0	4#0	22.51	22.69
		23095/707.5	0	1#0	23.05	22.78
			0	4#0	22.59	22.86
		23130/711	4	1#5	23.35	22.97
			7	4#2	22.59	22.76

Table 10. Module Original Conducted Powers from Module Report R2007A0435-R6

**Note:**

Highest conducted power listed in green. Channels with highest conducted power were selected for spot checking.

**Note:**

Only 10MHz Bandwidth is supported by the host device.

Mode	Freq. (MHz)	SG (dBm)	CL (dB)	AG (dBi)	Ant. Pol.	ERP Level (dBm)	Limit (dBm)	Margin
LTE Band 12 10 MHz BW QPSK	711.0	25.76	0.80	3.6	Vertical	26.41	34.77	8.36
LTE Band 12 10 MHz BW 16QAM	704.0	24.98	0.79	3.7	Vertical	25.63	34.77	9.14

Table 11. ERP, Test Results, Part 27, LTE Band 12

**Note:**

$$\text{EIRP} = \text{SG} - \text{CL} + \text{AG}$$

$$\text{ERP} = \text{EIRP} - 2.15$$

Mode	Bandwidth	Channel/ Frequency (MHz)	Index	RB# RBstart	Conducted Power (dBm)	
					QPSK	16QAM
Band 13	10 MHz	23230/782	0	1#0	23.07	23.70
			0	4#0	22.77	22.95

**Table 12. Module Original Conducted Powers from Module Report R2007A0435-R6**

**Note:**

Highest conducted power listed in green. Channels with highest conducted power were selected for spot checking.

**Note:**

Only 10MHz Bandwidth is supported by the host device.

Mode	Freq. (MHz)	SG (dBm)	CL (dB)	AG (dBi)	Ant. Pol.	ERP Level (dBm)	Limit (dBm)	Margin
LTE Band 13 10 MHz BW QPSK	782.0	24.43	0.83	3.1	Vertical	24.55	34.77	10.22
LTE Band 13 10 MHz BW 16QAM	782.0	25.79	0.83	3.1	Vertical	25.91	34.77	8.86

**Table 13. ERP, Test Results, Part 27, LTE Band 13**

**Note:**

$$\text{EIRP} = \text{SG} - \text{CL} + \text{AG}$$

$$\text{ERP} = \text{EIRP} - 2.15$$

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 2.1053 Radiated Spurious Emissions

**Test Requirement(s):** § 2.1053 Field strength of spurious radiation.

**§ 2.1053 (a)** Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of § 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.

**§ 2.1053 (b):** The measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emissions are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz.
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

**§ 27.53(h):** For operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB.

**§ 27.53(g):** For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

**§ 27.53(f):** For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to  $-70$  dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and  $-80$  dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

**Test Procedures:** The EUT was tested according to the average power integration procedures of ANSI C63.26 (2015) 5.5.3.

Radiated measurements shall be performed using the test arrangement shown in Figure. After a direct field strength measurement of the maximum emission amplitude level (maximized as described previously), a signal generator and transmit antenna are substituted in place of the EUT, as shown in Figure 7. The output power of the signal generator is adjusted to replicate the maximized signal amplitude measured in the direct field strength measurement. The signal generator power setting is then used to determine the ERP or EIRP of the EUT spurious emission(s). These measurements shall be performed in accordance with the common requirements specified in 5.5.2 and the specific requirements provided in this subclause.

A step-by-step procedure is as follows.

- k) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- l) Each emission under consideration shall be evaluated:
  - 6) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
  - 7) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
  - 8) Return the turntable to the azimuth where the highest emission amplitude level was observed.
  - 9) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
  - 10) Record the measured emission amplitude level and frequency using the appropriate RBW.
- m) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- n) Set-up the substitution measurement with the reference point of the substitution a antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.

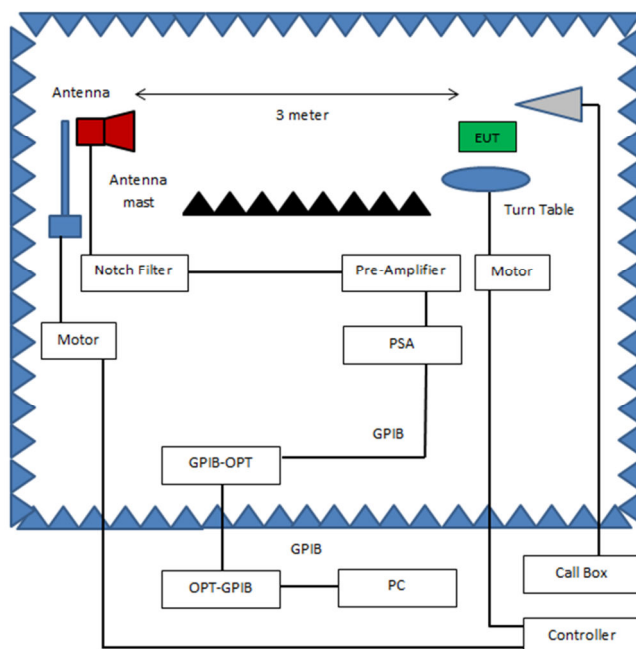


Figure 4. Radiated Spurious Emissions, Block Diagram, Test Setup

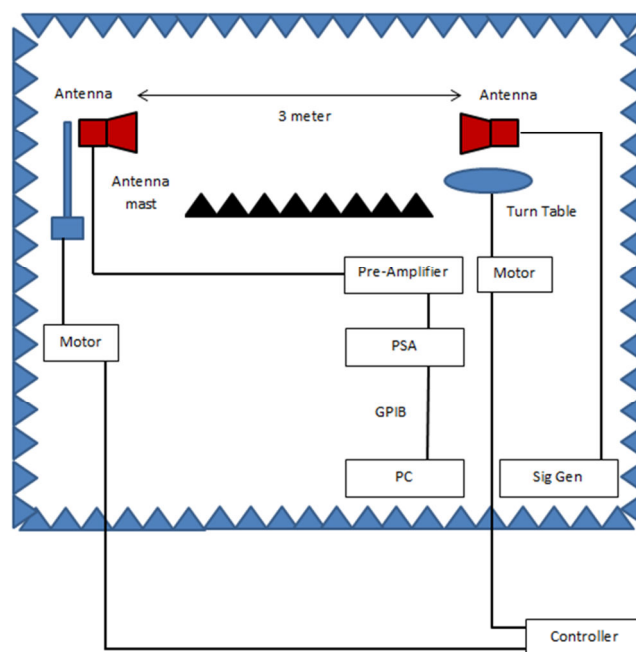


Figure 5. Radiated Spurious Emissions, Block Diagram, Test Setup

- o) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- p) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- q) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
  - 4) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
  - 5) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
  - 6) Record the output power level of the signal generator when equivalence is achieved in step 2).
- r) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- s) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

where

$P_e$  = equivalent emission power in dBm

$P_s$  = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.

- t) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:  
 $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$ . If necessary, the antenna gain can be calculated from calibrated antenna factor information

**Test Results:** The EUT was found compliant with the requirements of this section.

Measurements were made in each configuration. Data is presented for the worse case configuration.

**Test Engineer(s):** Felix Huang

**Test Date(s):** 09/03/2020 & 9/30/2020



## Radiated Spurious Emissions Test Results,

LTE Band 4 - QPSK								
Harmonic	Freq. (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Ant. Pol.	ERP Level (dBm)	Limit (dBm)	Margin
2	3500	-64	1.85	32.73	Vertical	-35.27	-13	22.27
3	5250	-63	2.51	34.48	Vertical	-33.18	-13	20.18
4	7000	-62	2.94	35.49	Vertical	-31.60	-13	18.60
5	8750	-60	3.48	36.01	Vertical	-29.62	-13	16.62
6	10500	-61	3.84	37.43	Vertical	-29.56	-13	16.56
7	12250	-61	4.38	38.84	Vertical	-28.69	-13	15.69
8	14000	-60	4.51	38.78	Vertical	-27.88	-13	14.88
9	15750	-59	4.48	41.01	Vertical	-24.62	-13	11.62
10	17500	-60	5.16	41.32	Vertical	-25.99	-13	12.99

Table 14. Radiated Spurious Emissions, Test Results, Part 27, LTE Band 4

LTE Band 4 – 16QAM								
Harmonic	Freq. (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Ant. Pol.	ERP Level (dBm)	Limit (dBm)	Margin
2	3500	-67	1.85	32.73	Vertical	-38.27	-13	25.27
3	5250	-66	2.51	34.48	Vertical	-36.18	-13	23.18
4	7000	-65	2.94	35.49	Vertical	-34.60	-13	21.60
5	8750	-63	3.48	36.01	Vertical	-32.62	-13	19.62
6	10500	-63	3.84	37.43	Vertical	-31.56	-13	18.56
7	12250	-62	4.38	38.84	Vertical	-29.69	-13	16.69
8	14000	-60	4.51	38.78	Vertical	-27.88	-13	14.88
9	15750	-59	4.48	41.01	Vertical	-24.62	-13	11.62
10	17500	-58	5.16	41.32	Vertical	-23.99	-13	10.99

Table 15. Radiated Spurious Emissions, Test Results, Part 27, LTE Band 4

Note:

$$\text{EIRP} = \text{SG} - \text{CL} + \text{AG}$$

$$\text{ERP} = \text{EIRP} - 2.15$$

LTE Band 12 - QPSK								
Harmonic	Freq. (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Ant. Pol.	ERP Level (dBm)	Limit (dBm)	Margin
2	1422	-66	1.13	28.76	Vertical	-40.53	-13	27.53
3	2133	-65	1.45	31.78	Vertical	-36.82	-13	23.82
4	2844	-64	1.68	32.30	Vertical	-35.53	-13	22.53
5	3555	-64	1.84	32.82	Vertical	-35.16	-13	22.16
6	4266	-62	2.05	33.14	Vertical	-33.06	-13	20.06
7	4977	-62	2.49	33.90	Vertical	-32.75	-13	19.75
8	5688	-61	2.70	34.62	Vertical	-31.23	-13	18.23
9	6399	-61	2.75	35.50	Vertical	-30.41	-13	17.41
10	7110	-60	3.07	35.57	Vertical	-29.66	-13	16.66

Table 16. Radiated Spurious Emissions, Test Results, Part 27, LTE Band 12

LTE Band 12 – 16QAM								
Harmonic	Freq. (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Ant. Pol.	ERP Level (dBm)	Limit (dBm)	Margin
2	1408	-66	1.14	28.91	Vertical	-40.38	-13	27.38
3	2112	-65	1.45	31.82	Vertical	-36.78	-13	23.78
4	2816	-64	1.65	32.38	Vertical	-35.42	-13	22.42
5	3520	-64	1.83	32.78	Vertical	-35.20	-13	22.20
6	4224	-62	2.03	33.24	Vertical	-32.94	-13	19.94
7	4928	-62	2.31	33.45	Vertical	-33.01	-13	20.01
8	5716	-61	2.56	34.34	Vertical	-31.37	-13	18.37
9	6336	-61	2.34	35.35	Vertical	-30.14	-13	17.14
10	7040	-60	2.87	35.76	Vertical	-29.26	-13	16.26

Table 17. Radiated Spurious Emissions, Test Results, Part 27, LTE Band 12

Note:

$$\text{EIRP} = \text{SG} - \text{CL} + \text{AG}$$

$$\text{ERP} = \text{EIRP} - 2.15$$

LTE Band 13 - QPSK								
Harmonic	Freq. (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Ant. Pol.	ERP Level (dBm)	Limit (dBm)	Margin
2	1564.0	-73	1.26	28.57	Vertical	-47.84	-13	34.84
3	2346.0	-71	1.48	32.53	Vertical	-42.10	-13	29.10
4	3128.0	-70	1.71	33.29	Vertical	-40.57	-13	27.57
5	3910.0	-69	1.91	33.85	Vertical	-39.21	-13	26.21
6	4692.0	-68	2.2	34.52	Vertical	-37.83	-13	24.83
7	5474.0	-70	2.69	35.03	Vertical	-39.81	-13	26.81
8	6256.0	-71	2.73	36.05	Vertical	-39.83	-13	26.83
9	7038.0	-70	3.03	35.95	Vertical	-39.23	-13	26.23
10	7820.0	-65	3.38	36.08	Vertical	-34.45	-13	21.45

Table 18. Radiated Spurious Emissions, Test Results, Part 27, LTE Band 13

LTE Band 13 – 16QAM								
Harmonic	Freq. (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Ant. Pol.	ERP Level (dBm)	Limit (dBm)	Margin
2	1564.0	-70	1.26	28.57	Vertical	-44.84	-40	4.84
3	2346.0	-70	1.48	32.53	Vertical	-41.10	-13	28.10
4	3128.0	-69	1.71	33.29	Vertical	-39.57	-13	26.57
5	3910.0	-70	1.91	33.85	Vertical	-40.21	-13	27.21
6	4692.0	-68	2.2	34.52	Vertical	-37.83	-13	24.83
7	5474.0	-72	2.69	35.03	Vertical	-41.81	-13	28.81
8	6256.0	-71	2.73	36.05	Vertical	-39.83	-13	26.83
9	7038.0	-69	3.03	35.95	Vertical	-38.23	-13	25.23
10	7820.0	-67	3.38	36.08	Vertical	-36.45	-13	23.45

Table 19. Radiated Spurious Emissions, Test Results, Part 27, LTE Band 13

Note:

$$\text{EIRP} = \text{SG} - \text{CL} + \text{AG}$$

$$\text{ERP} = \text{EIRP} - 2.15$$

## IV. Test Equipment

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S4075	RADIO COMMUNICATION TESTER	ROHDE & SCHWARZ	CMW500	09/18/2018	09/18/2020
1S2399	TURNTABLE/MAST CONTROLLER	SUNOL SCIENCES	SC99V	SEE NOTE 1	
1S2600	BILOG ANTENNA	TESEQ	CBL6112D	03/19/2019	03/19/2021
1S2733	BILOG ANTENNA	TESEQ	CBL6112D	06/05/2019	06/05/2021
1S3826	DRG HORN ANTENNA	ETS-LINDGREN	3117	12/03/2018	12/03/2020
1S2198	DRG HORN ANTENNA	ETS-LINDGREN	3117	10/07/2019	10/07/2021
1S2000	SPECTRUM ANALYZER	AGILENT	E4448A	11/06/2019	11/06/2020
1S2587	PRE AMPLIFIER	AML COMMUNICATIONS	AML0126L3801	SEE NOTE 1	
1S2653	AMPLIFIER	SONOMA INSTRUMENT	310 N	SEE NOTE 1	
1S2486	5 METER CHAMBER	PANASHIELD - ETS	5M	SEE NOTE 2	
1S3824	SIGNAL GENERATOR	ROHDE & SCHWARZ	SMA100B	11/06/2019	05/06/2021

**Table 20. Test Equipment List**

Note 1: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

Note 2: Latest NSA and VSWR data available upon request.

**End of Report**