



REPORT No.: SZ20060377S01

Annex D Plots of Maximum SAR Test Results

GSM850_GPRS(3 TX slots)_Right Cheek_Ch189

Communication System: UID 0, GSM850(class 11) (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.77
Medium: HSL_835 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.033$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(9.3, 9.3, 9.3); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch189/Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.308 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.912 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.398 W/kg; SAR(10 g) = 0.292 W/kg

Maximum value of SAR (measured) = 0.310 W/kg

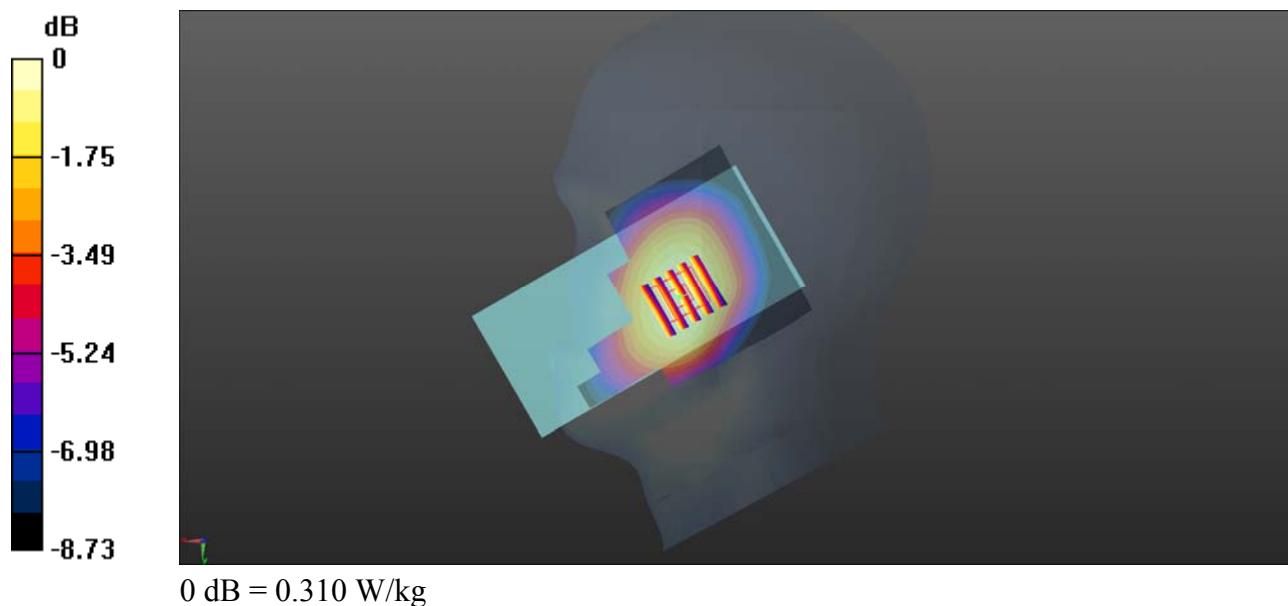

GSM1900_GPRS(2 TX slots)_Left Cheek_Ch810

Communication System: UID 0, PCS1900(Class 10) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:4.15
Medium: HSL_1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 41.267$; $\rho = 1000$

kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.74, 7.74, 7.74); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch810/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.120 W/kg



Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.536 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.110 W/kg

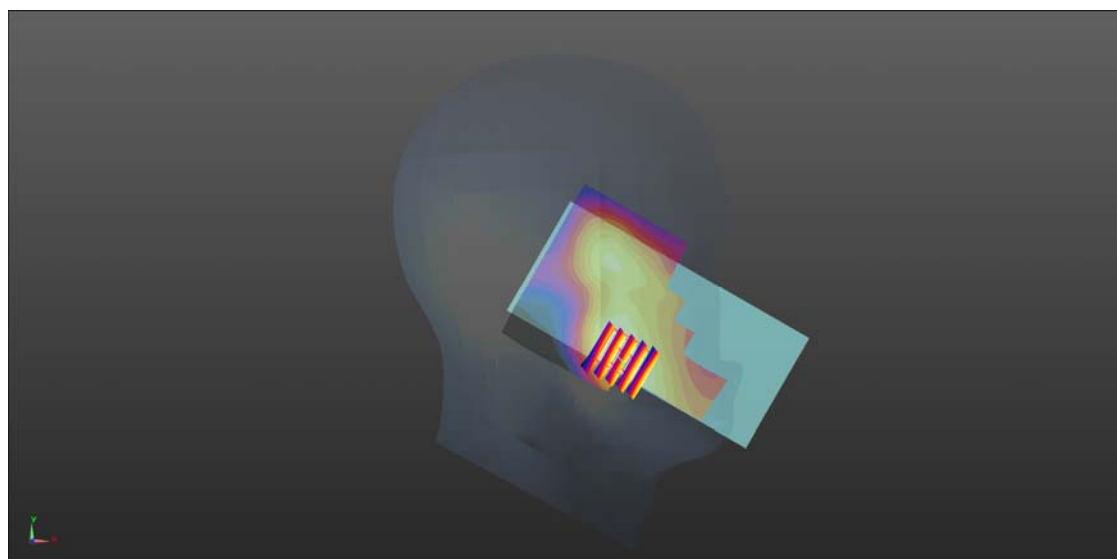

0 dB = 0.110 W/kg

LTE Band 5_10MHz_QPSK_1RB_0Offset_Right Cheek_Ch20525

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.018$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(9.3, 9.3, 9.3); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20525/Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.160 W/kg


Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.129 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 0.158 W/kg

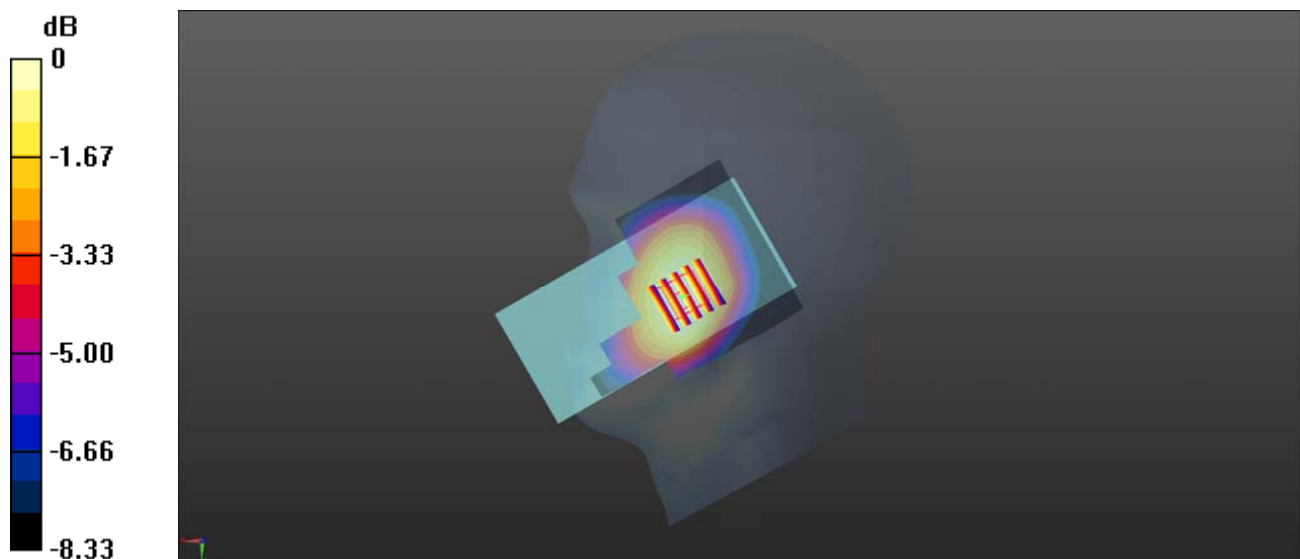

0 dB = 0.158 W/kg

LTE Band 38_20MHz_QPSK_1RB_0Offset_Right Cheek_Ch38000

Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 2.047$ S/m; $\epsilon_r = 38.008$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7, 7, 7); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch38000/Area Scan (91x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0299 W/kg



Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.9370 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0600 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0293 W/kg

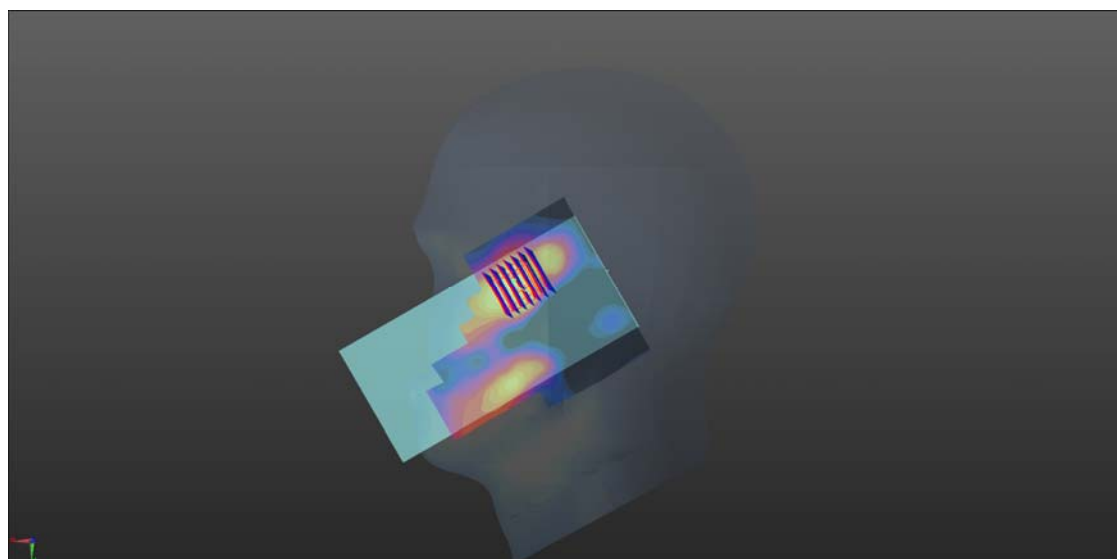

0 dB = 0.0293 W/kg

LTE Band 40A_10MHz_QPSK_1RB_0Offset_Right Cheek_Ch38750

Communication System: UID 0, LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.59

Medium: HSL_2300 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.698$ S/m; $\epsilon_r = 38.758$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.56, 7.56, 7.56); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch38750/Area Scan (91x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0718 W/kg



Ch38750/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.587 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.0698 W/kg

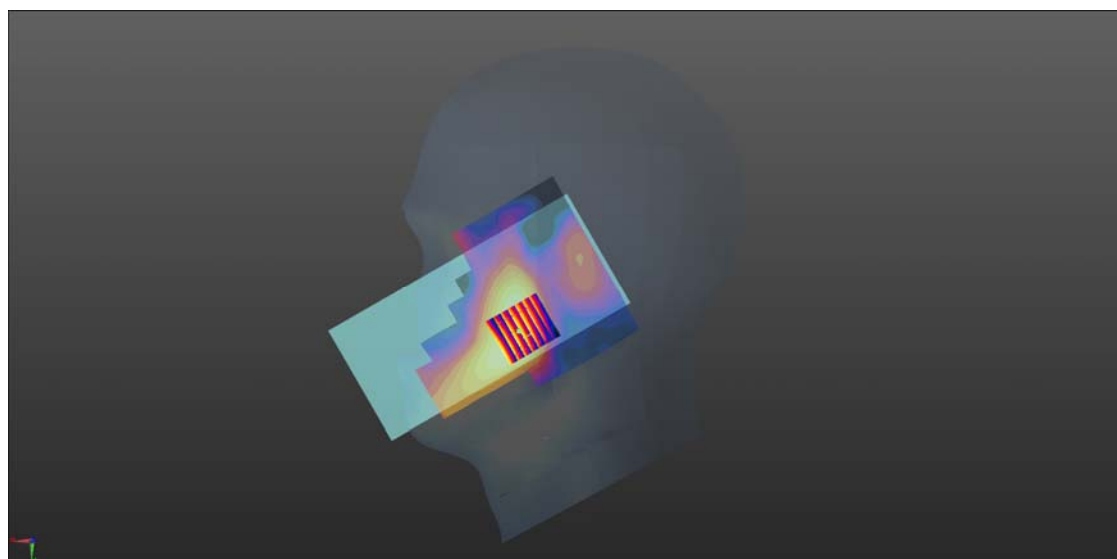

0 dB = 0.0698 W/kg

LTE Band 40B_10MHz_QPSK_1RB_0Offset_Right Cheek_Ch39200

Communication System: UID 0, LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.59

Medium: HSL_2300 Medium parameters used: $f = 2355$ MHz; $\sigma = 1.722$ S/m; $\epsilon_r = 38.606$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.56, 7.56, 7.56); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch39200/Area Scan (91x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0460 W/kg



Ch39200/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.137 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.0453 W/kg

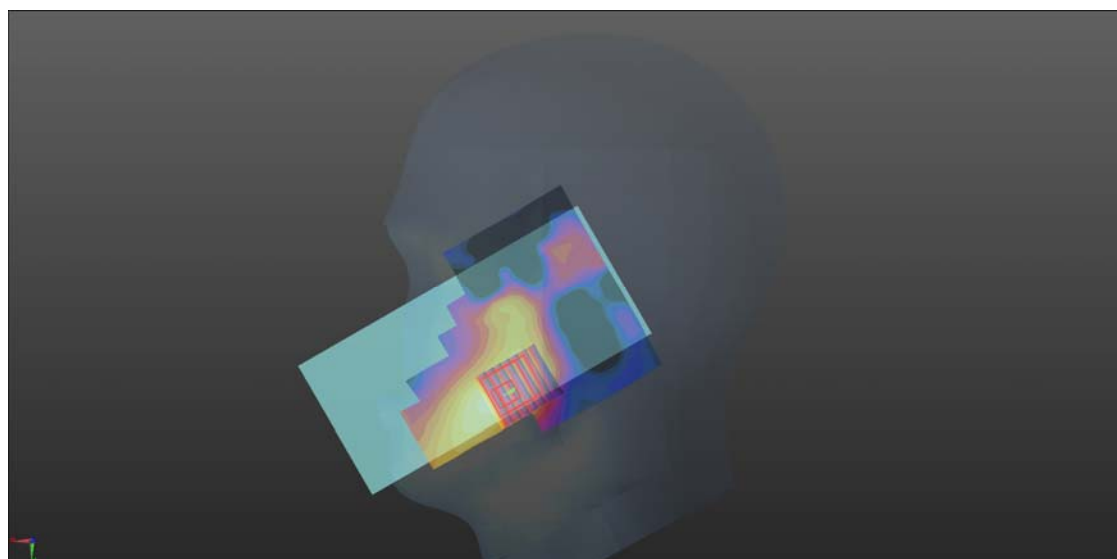

0 dB = 0.0453 W/kg

LTE Band 41_20MHz_QPSK_1RB_0Offset_Right Cheek_Ch40400

Communication System: UID 0, LTE (0); Frequency: 2571 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600 Medium parameters used: $f = 2571$ MHz; $\sigma = 2.019$ S/m; $\epsilon_r = 38.145$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7, 7, 7); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch40400/Area Scan (91x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0292 W/kg


Ch40400/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.245 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0290 W/kg

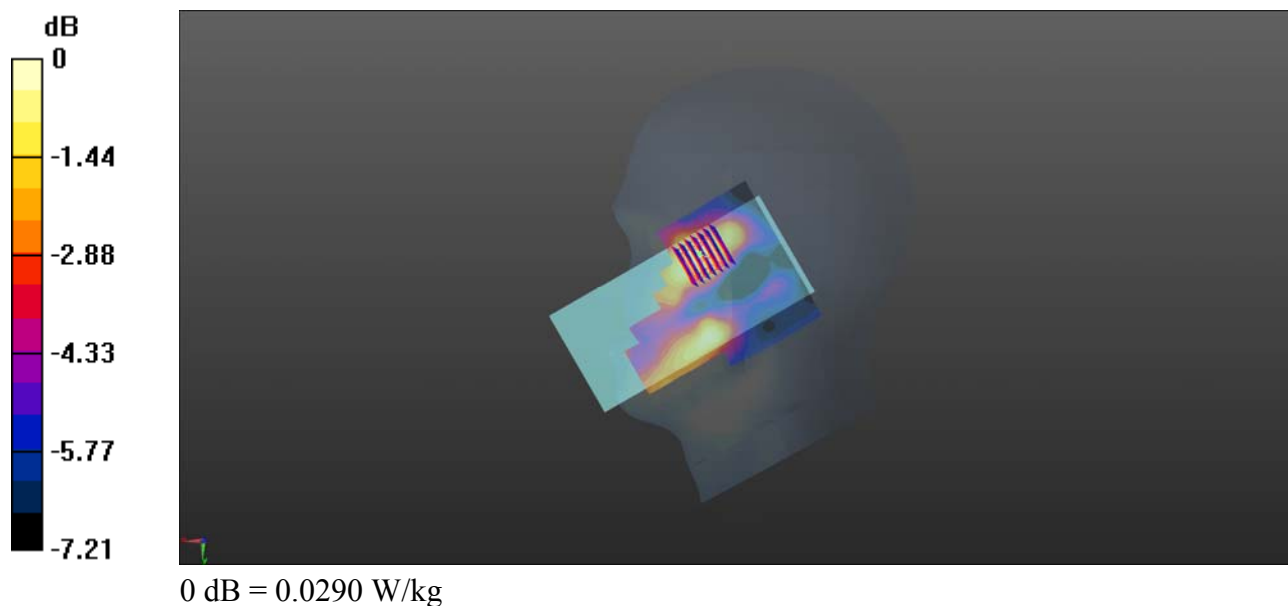

WLAN 2.4GHz_802.11b 1Mbps_Right Cheek_Ch13

Communication System: UID 0, WLAN 2.4GHz 802.11b (0); Frequency: 2472 MHz; Duty Cycle: 1:1
Medium: HSL_2450 Medium parameters used: $f = 2472$ MHz; $\sigma = 1.904$ S/m; $\epsilon_r = 38.455$; $\rho = 1000$

kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.3, 7.3, 7.3); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch13/Area Scan (91x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.10 W/kg


Ch13/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.345 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 0.931 W/kg; SAR(10 g) = 0.481 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

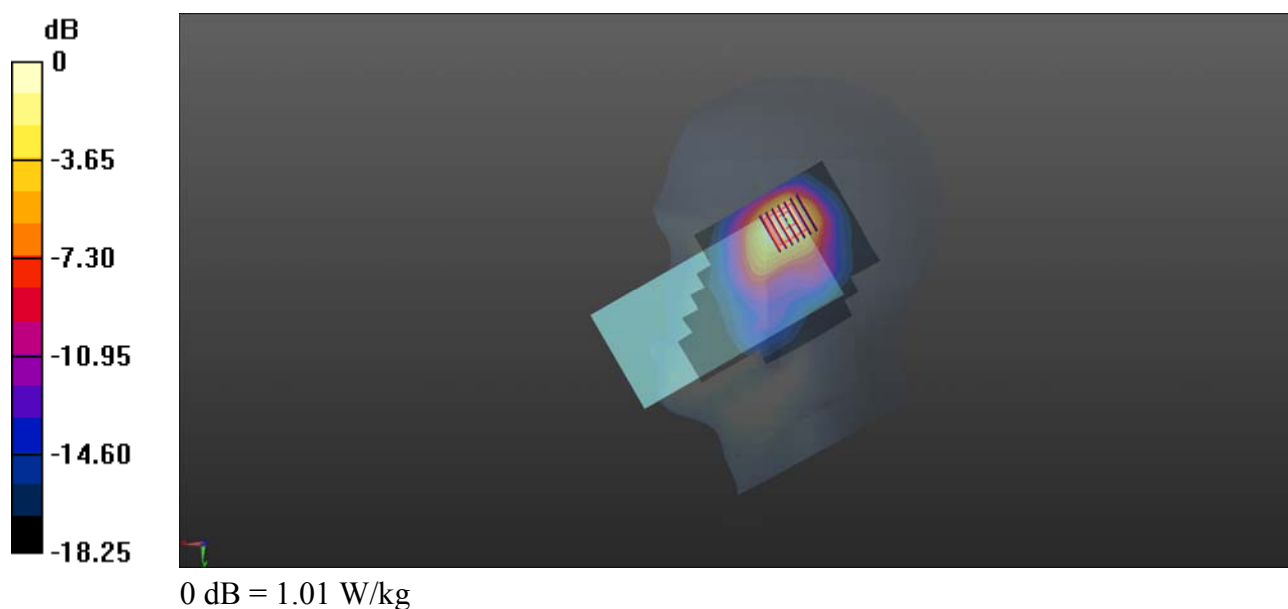

GSM850_GPRS(3 TX slots)_Back Side_10mm_Ch189

Communication System: UID 0, GSM850(class 11) (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.77
Medium: HSL_835 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.033$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(9.3, 9.3, 9.3); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch189/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.368 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.90 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.315 W/kg

Maximum value of SAR (measured) = 0.368 W/kg

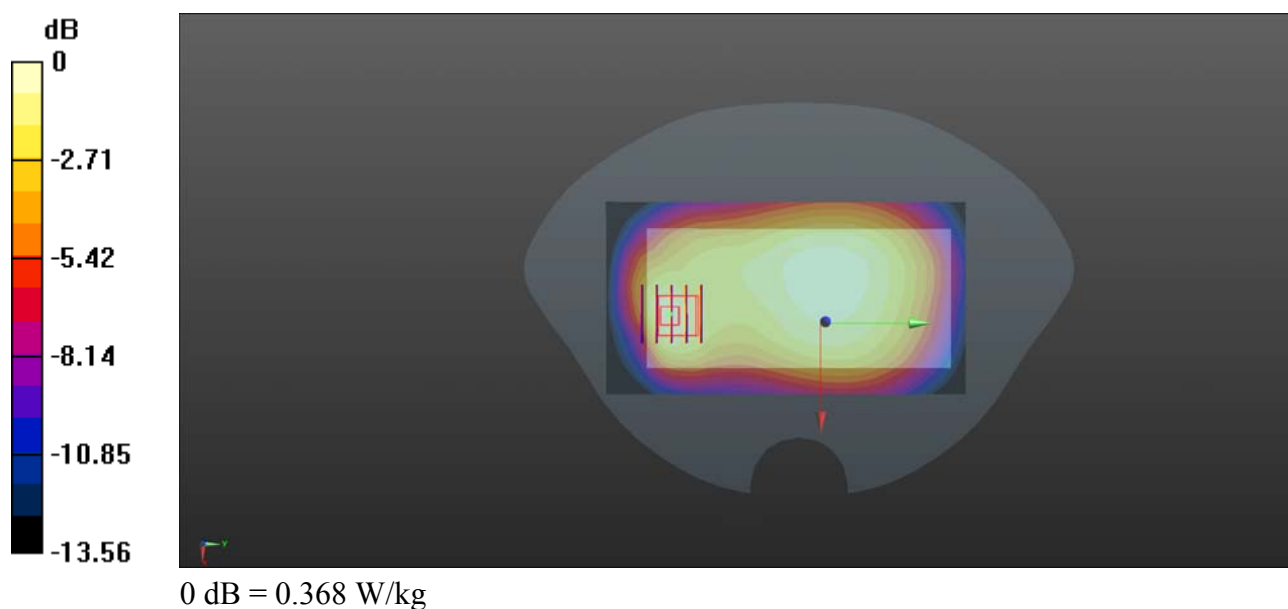

GSM1900_GPRS(2 TX slots)_Back Side_10mm_Ch810

Communication System: UID 0, PCS1900(Class 10) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium: HSL_1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 41.267$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.74, 7.74, 7.74); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch810/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.81 W/kg



Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.126 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 8.11 W/kg

SAR(1 g) = 0.681 W/kg; SAR(10 g) = 0.361 W/kg

Maximum value of SAR (measured) = 0.81 W/kg

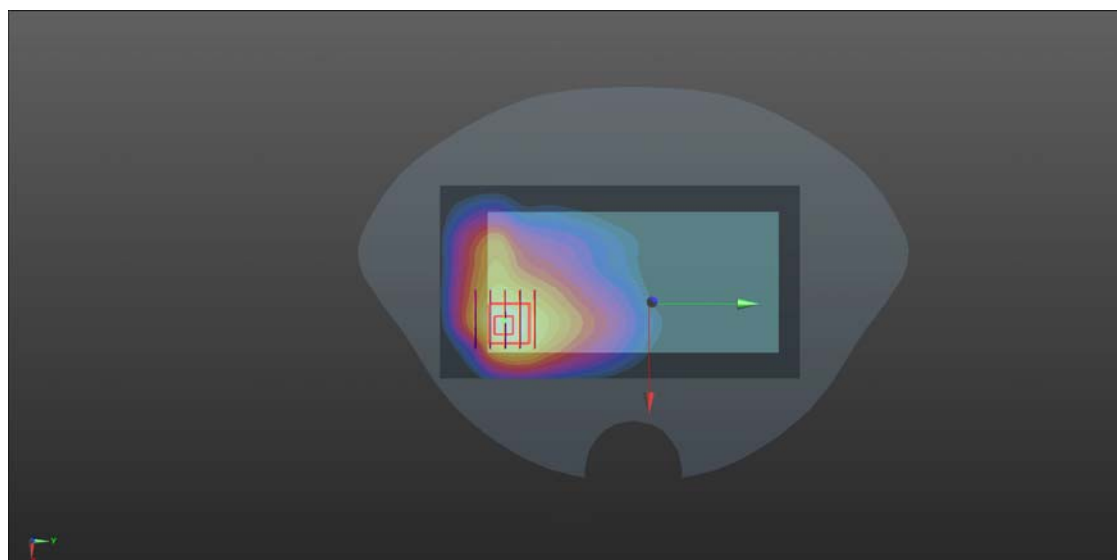

0 dB = 0.81 W/kg

LTE Band 5_10MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch20525

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.018$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(9.3, 9.3, 9.3); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20525/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.182 W/kg


Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.87 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.246 W/kg

SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

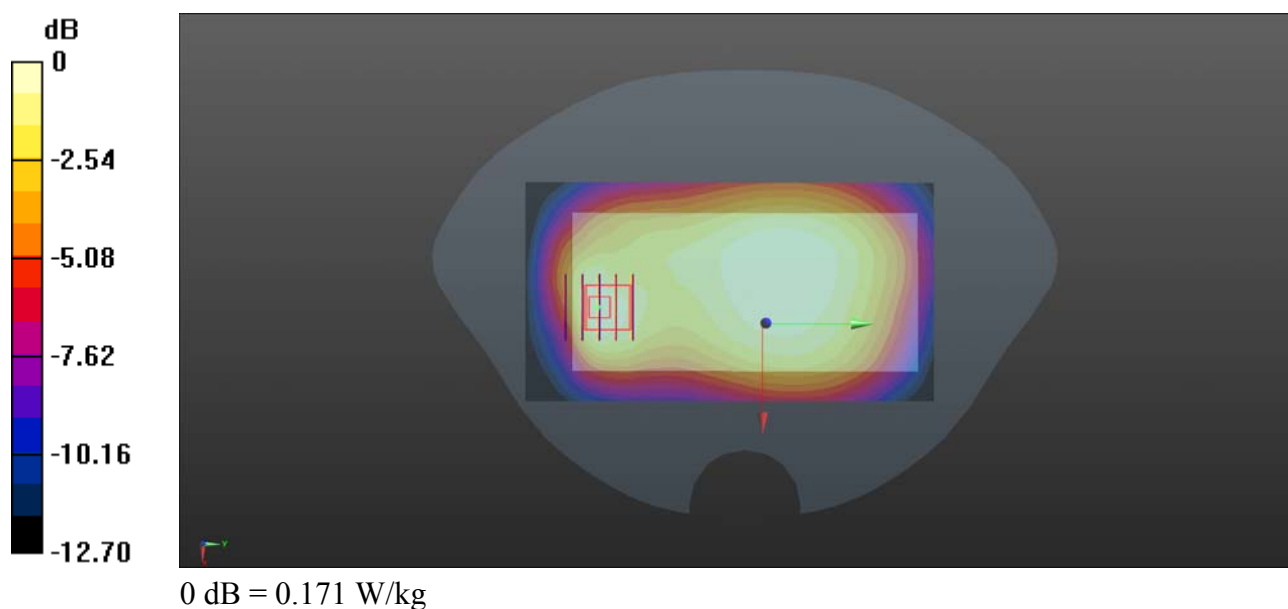

LTE Band 38_20MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch38000

Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 2.047$ S/m; $\epsilon_r = 38.008$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7, 7, 7); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch38000/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.341 W/kg



Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.439 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.657 W/kg

SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.349 W/kg

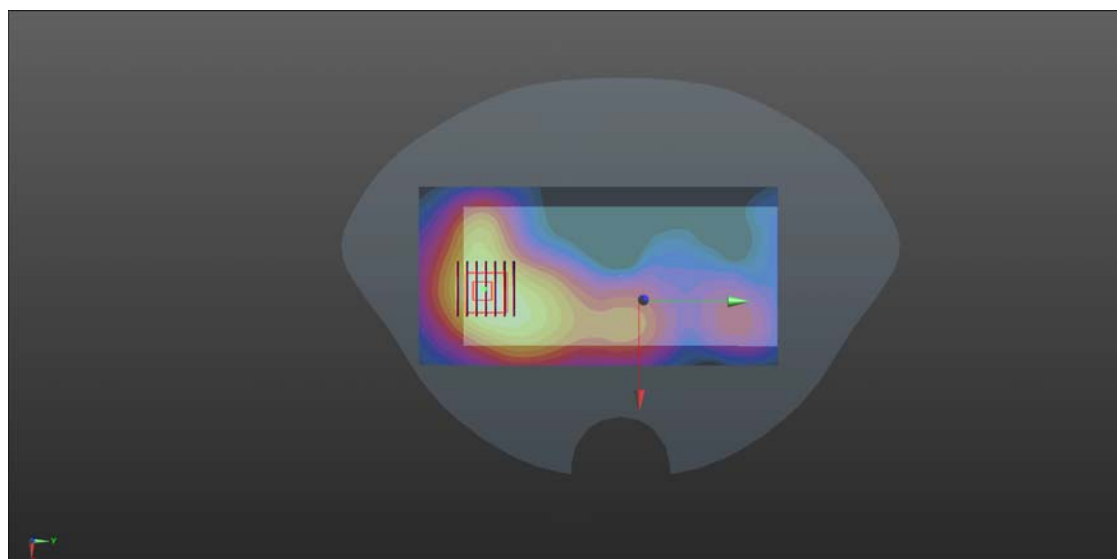

0 dB = 0.349 W/kg

LTE Band 40A_10MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch38750

Communication System: UID 0, LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.59

Medium: HSL_2300 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.698$ S/m; $\epsilon_r = 38.758$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.56, 7.56, 7.56); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch38750/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.415 W/kg


Ch38750/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.673 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.714 W/kg

SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.377 W/kg

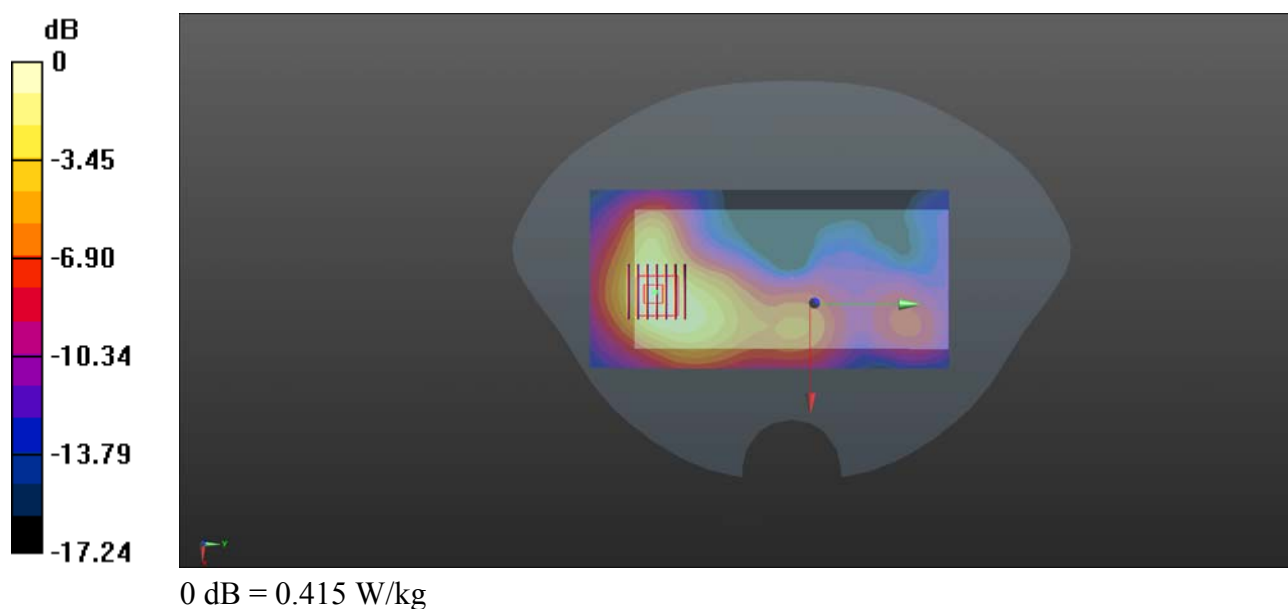

LTE Band 40B_10MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch39200

Communication System: UID 0, LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.59

Medium: HSL_2300 Medium parameters used: $f = 2355$ MHz; $\sigma = 1.722$ S/m; $\epsilon_r = 38.606$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.56, 7.56, 7.56); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch39200/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.471 W/kg



Ch39200/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.542 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.858 W/kg

SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 0.464 W/kg

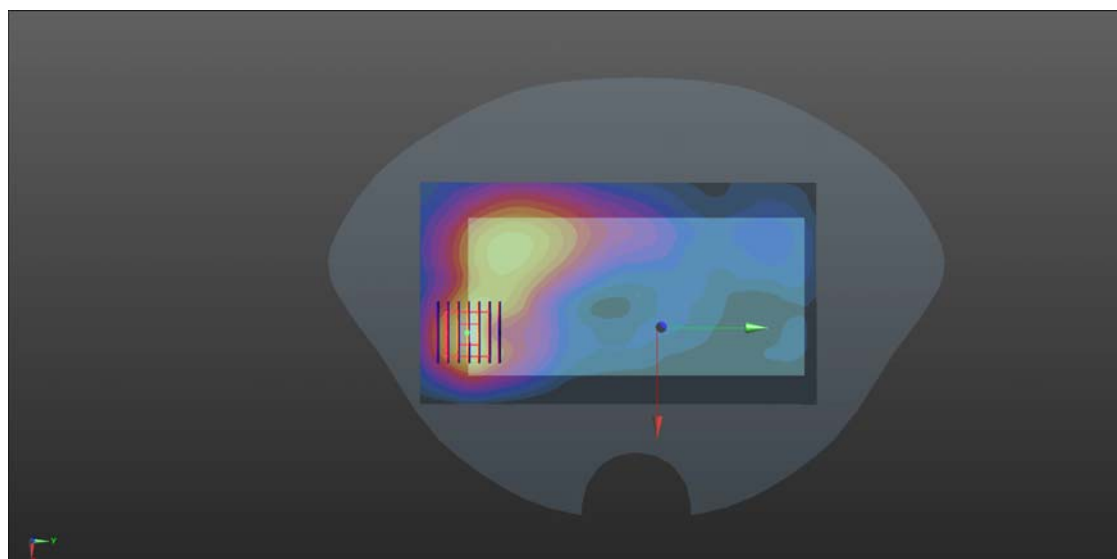

0 dB = 0.464 W/kg

LTE Band 41_20MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch40400

Communication System: UID 0, LTE (0); Frequency: 2571 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600 Medium parameters used: $f = 2571$ MHz; $\sigma = 2.019$ S/m; $\epsilon_r = 38.145$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7, 7, 7); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch40400/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.331 W/kg


Ch40400/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.916 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.612 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.333 W/kg

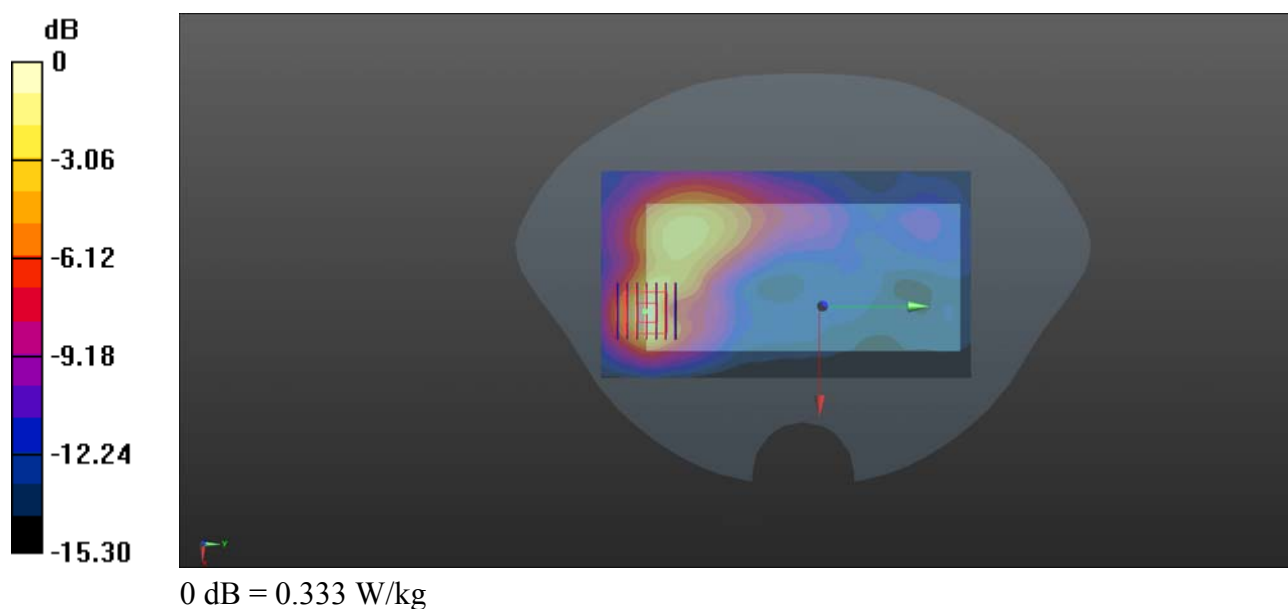

WLAN 2.4GHz_802.11b 1Mbps_Back Side_10mm_Ch7

Communication System: UID 0, WLAN 2.4GHz 802.11b (0); Frequency: 2442 MHz; Duty Cycle: 1:1
Medium: HSL_2450 Medium parameters used : $f = 2442$ MHz; $\sigma = 1.869$ S/m; $\epsilon_r = 38.546$; $\rho = 1000$

kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.3, 7.3, 7.3); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch7/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.378 W/kg


Ch7/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.752 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.634 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.170 W/kg

Maximum value of SAR (measured) = 0.361 W/kg

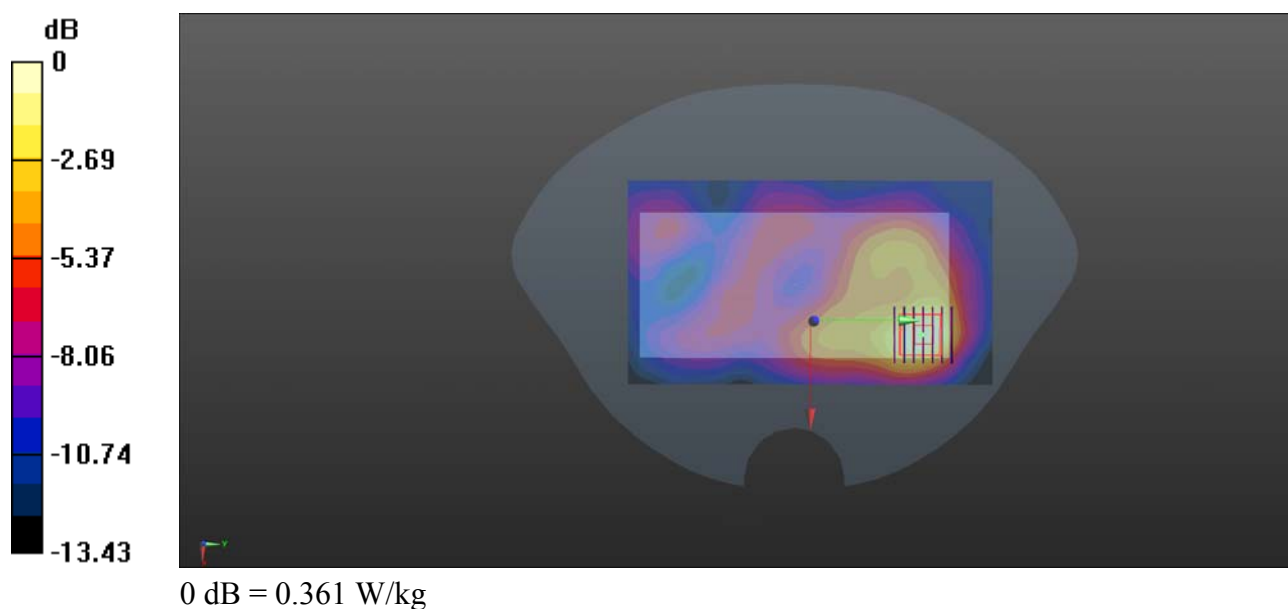

GSM850_GPRS(3 TX slots)_Back Side_10mm_Ch189

Communication System: UID 0, GSM850(class 11) (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.77
Medium: HSL_835 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.033$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(9.3, 9.3, 9.3); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch189/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.368 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.90 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.315 W/kg

Maximum value of SAR (measured) = 0.368 W/kg

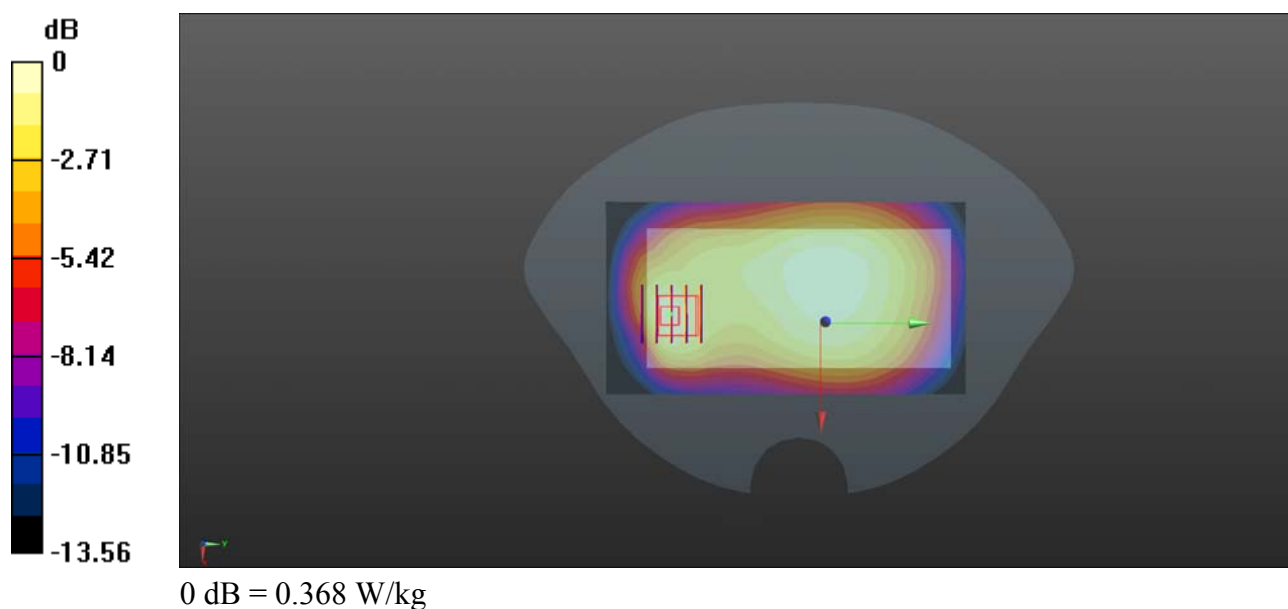

GSM1900_GPRS(2 TX slots)_Bottom Side_10mm_Ch512

Communication System: UID 0, PCS1900(class 10) (0); Frequency: 1850.2 MHz; Duty Cycle: 1:4.15
Medium: HSL_1900 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.282$ S/m; $\epsilon_r = 41.338$; $\rho =$

1000 kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.74, 7.74, 7.74); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch512/Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.18 W/kg


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.69 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 1 W/kg; SAR(10 g) = 0.540 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

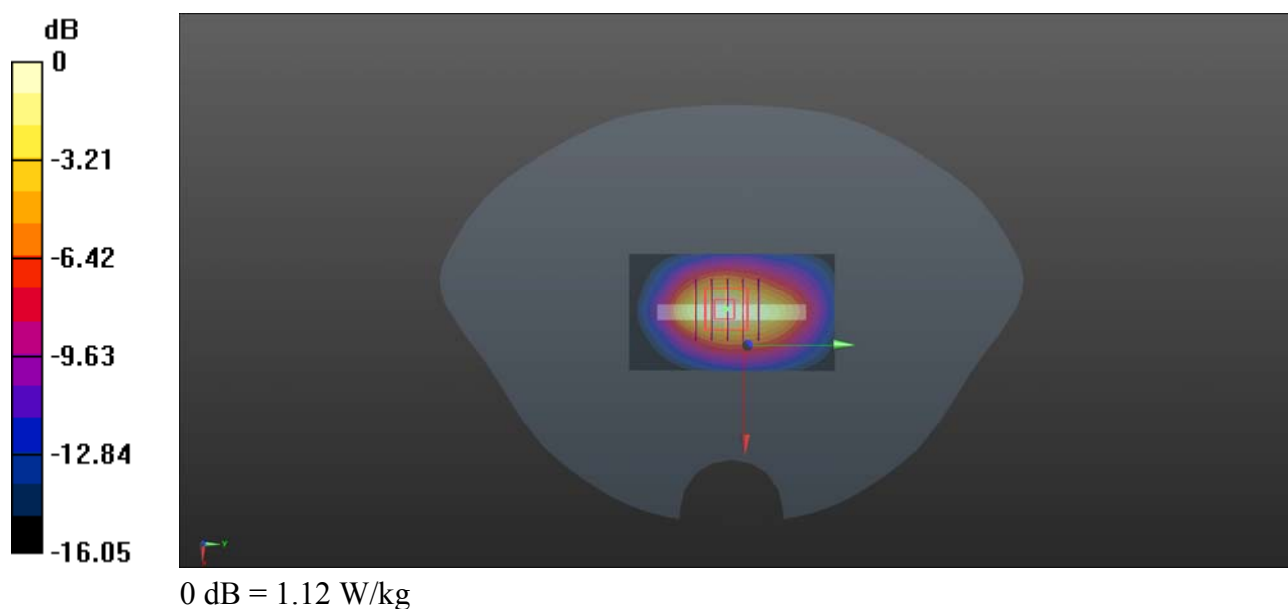

LTE Band 5_10MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch20525

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.018$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(9.3, 9.3, 9.3); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20525/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.182 W/kg


Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.87 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.246 W/kg

SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

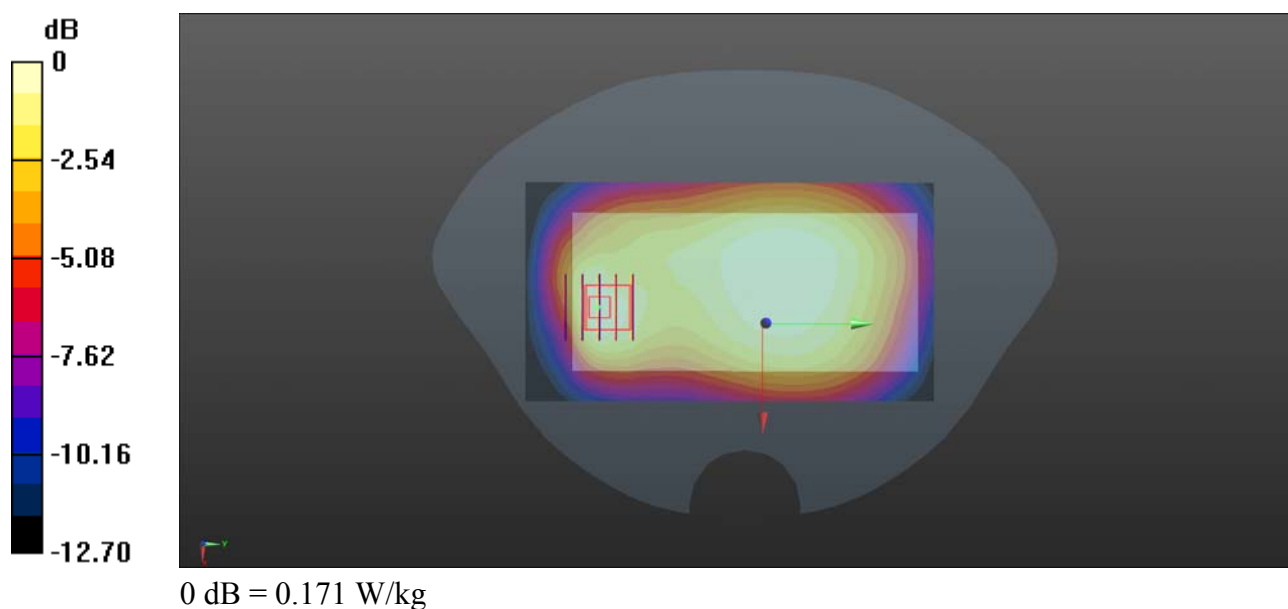

LTE Band 38_20MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch38000

Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 2.047$ S/m; $\epsilon_r = 38.008$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7, 7, 7); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch38000/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.341 W/kg



Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.439 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.657 W/kg

SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.349 W/kg

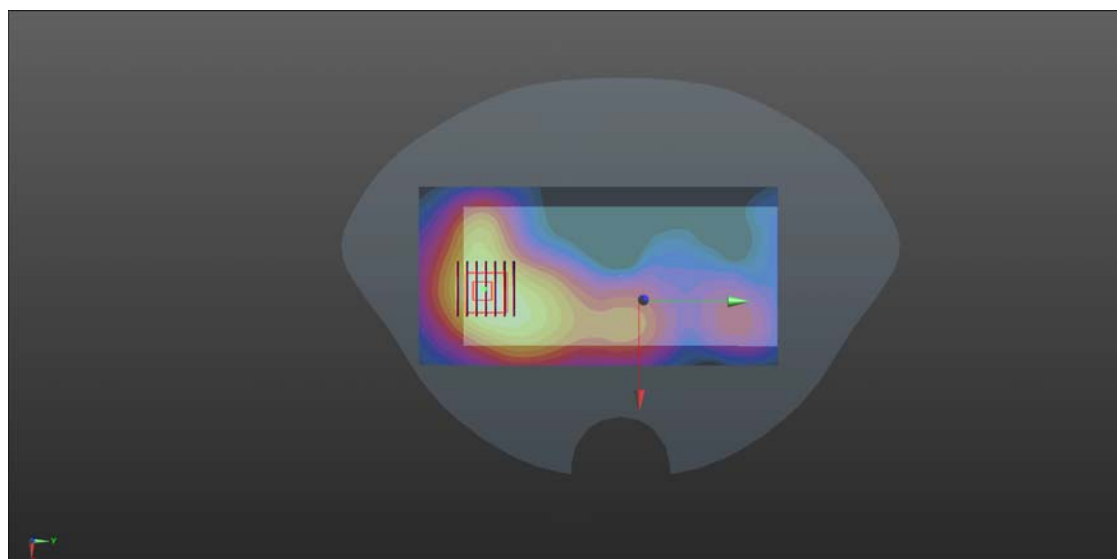

0 dB = 0.349 W/kg

LTE Band 40A_10MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch38750

Communication System: UID 0, LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.59

Medium: HSL_2300 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.698$ S/m; $\epsilon_r = 38.758$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.56, 7.56, 7.56); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch38750/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.415 W/kg


Ch38750/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.673 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.714 W/kg

SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.377 W/kg

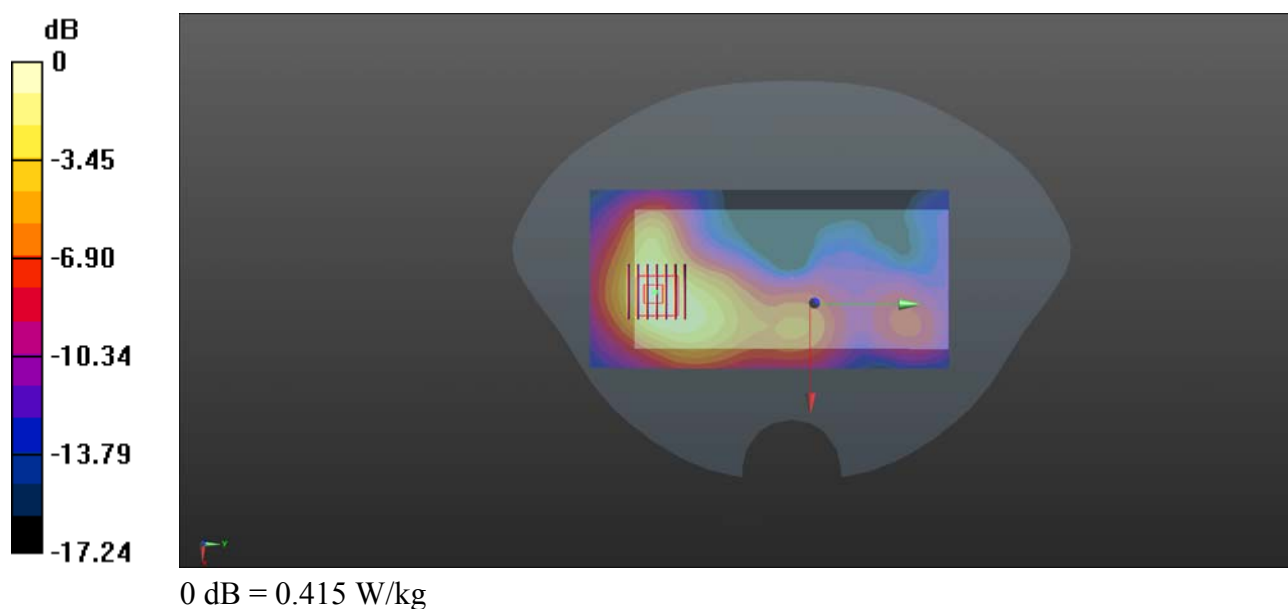

LTE Band 40B_10MHz_QPSK_1RB_0Offset_Bottom Side_10mm_Ch39200

Communication System: UID 0, LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.59

Medium: HSL_2300 Medium parameters used: $f = 2355$ MHz; $\sigma = 1.722$ S/m; $\epsilon_r = 38.606$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.56, 7.56, 7.56); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch39200/Area Scan (51x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.561 W/kg


Ch39200/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.41 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.874 W/kg

SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.175 W/kg

Maximum value of SAR (measured) = 0.476 W/kg

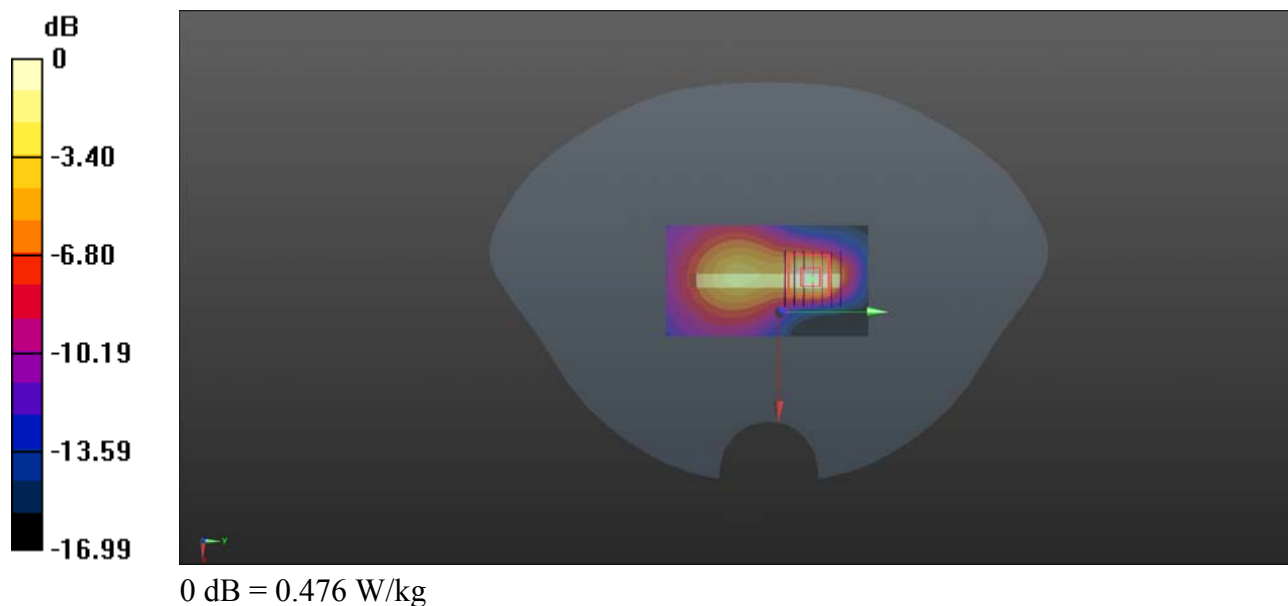

LTE Band 41_20MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch40400

Communication System: UID 0, LTE (0); Frequency: 2571 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600 Medium parameters used: $f = 2571$ MHz; $\sigma = 2.019$ S/m; $\epsilon_r = 38.145$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7, 7, 7); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch40400/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.331 W/kg



Ch40400/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.916 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.612 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.333 W/kg

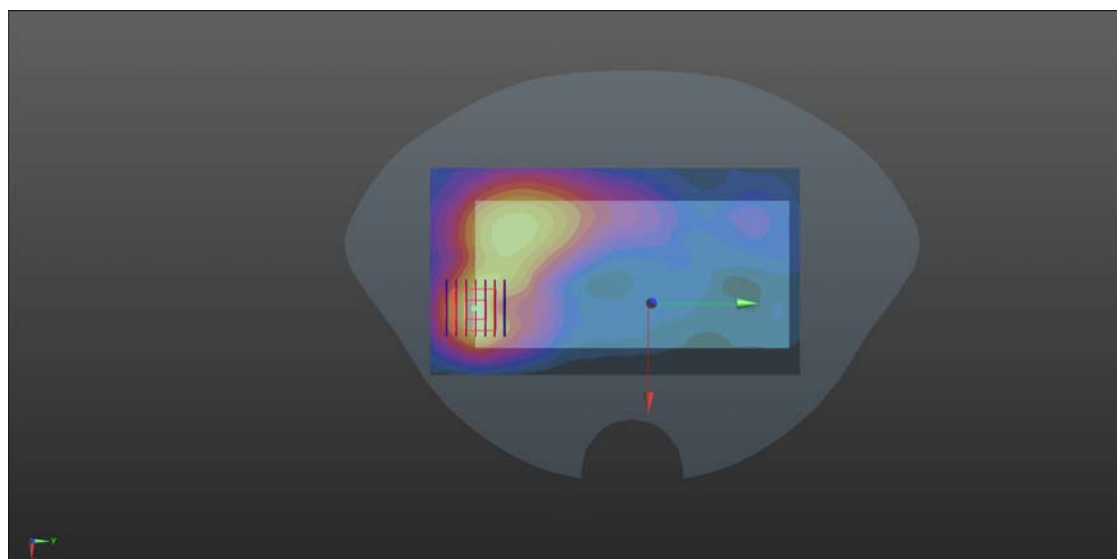

0 dB = 0.333 W/kg

WLAN 2.4GHz_802.11b 1Mbps_Back Side_10mm_Ch7

Communication System: UID 0, WLAN 2.4GHz 802.11b (0); Frequency: 2442 MHz; Duty Cycle: 1:1
Medium: HSL_2450 Medium parameters used : $f = 2442$ MHz; $\sigma = 1.869$ S/m; $\epsilon_r = 38.546$; $\rho = 1000$

kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.3, 7.3, 7.3); Calibrated: 2020.01.03;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2020.06.02
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch7/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.378 W/kg

Ch7/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.752 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.634 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.170 W/kg

Maximum value of SAR (measured) = 0.361 W/kg

