

FCC PART 15.247



TEST REPORT

For

Shanghai Loostone Information Technology Co., Ltd.

Room 601, Building 9, No. 351, Sizhuan Road, Sijing Town, Songjiang District, Shanghai, China

FCC ID: 2A7ZR-M7AMZ7

Report Type: Original Report	Product Name: Puremic MagicMic M7
Report Number:	RSA240311001-00C
Report Date:	2024-04-25
Reviewed By:	Bard Liu 
Approved By:	Kyle Xu 
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu Province, China Tel: +86-512-86175000 Fax: +86-512-88934268 www.baclcorp.com.cn

This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S. Government.

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	6
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	7
EXTERNAL I/O CABLE.....	9
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS	12
TEST EQUIPMENT LIST	13
FCC §15.203 - ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
TEST SYSTEM SETUP.....	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	16
TEST RESULTS SUMMARY	16
TEST DATA: SEE APPENDIX	16
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	17
APPLICABLE STANDARD	17
TEST SYSTEM SETUP.....	17
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	18
TEST RESULTS SUMMARY	19
TEST DATA: SEE APPENDIX	19
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	20
APPLICABLE STANDARD	20
TEST PROCEDURE	20
TEST DATA: SEE APPENDIX	20
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST DATA: SEE APPENDIX	21
FCC §15.247(d) - BAND EDGE	22
APPLICABLE STANDARD	22
TEST PROCEDURE	22
TEST DATA: SEE APPENDIX	22
FCC §15.247(e) - POWER SPECTRAL DENSITY	23
APPLICABLE STANDARD	23
TEST PROCEDURE	23
TEST DATA: SEE APPENDIX	23

Appendix - TEST DATA.....	24
ENVIRONMENTAL CONDITIONS & TEST INFORMATION.....	24
AC LINE CONDUCTED EMISSIONS	25
SPURIOUS EMISSIONS.....	27
6 dB EMISSION BANDWIDTH	36
MAXIMUM CONDUCTED OUTPUT POWER.....	38
BAND EDGE	40
POWER SPECTRAL DENSITY	41
EUT PHOTOGRAPHS	43
TEST SETUP PHOTOGRAPHS	44

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	RSHA240311001-00C	R1V1	2024-04-25	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Shanghai Loostone Information Technology Co., Ltd.
Product Name:	Puremic MagicMic M7
Tested Model:	MS-M7
Power Supply:	DC 5V from USB port or DC 3.7V from battery
Maximum Conducted Peak Output Power:	5.01 dBm
RF Function:	BLE
Operating Band/Frequency:	2402-2480 MHz
Channel Number:	40
Channel Separation:	2 MHz
Modulation Type:	GFSK
★Maximum Antenna Gain:	1.3 dBi

Note: The maximum antenna gain is provided by the applicant.

All measurement and test data in this report was gathered from production sample serial number: RSHA240311001-1 (Assigned by the BACL (Kunshan) The EUT supplied by the applicant was received on 2024-03-11.)

Objective

This report is prepared for *Shanghai Loostone Information Technology Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 15.247 Meas Guidance v05r02.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	9 kHz~150 kHz	3.8dB
	150 kHz~30 MHz	3.4dB
	30MHz~1GHz	4.61dB
	1GHz~6GHz	4.52dB
	6GHz~18GHz	5.39dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu Province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No. : CN5055.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Test channel list is as below:

For BLE mode, EUT was tested with channel 0, 19 and 39.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
18	2438	38	2478
19	2440	39	2480

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

RF test tool: EspRFTestTool


Pre-scan with all the data rates, and the worst case was performed as below:

Mode	Data Rate	Channel	★Power Level setting
BLE	1Mbps	Low	Default
		Middle	Default
		High	Default

Note: The power level setting was declared by the applicant.

Duty Cycle:

BLE(1Mbps) Mode Middle Channel

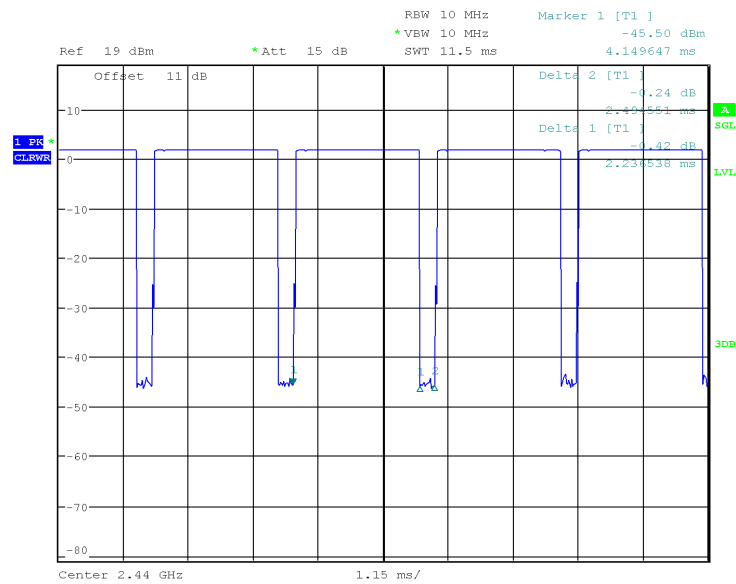

ProjectNo.:RSHA240311001 Tester:Bard Liu
Date: 22.MAR.2024 14:51:44

Mode	Duty Cycle (%)	T _{on} (ms)	T _{on+off} (ms)
BLE(1Mbps)	89.6%	2.236	2.495

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
SHENZHEN TIANYIN ELECTRONICS CO.,LTD	Adapter	TPA-23A050200UU01	/
DELL	Notebook	015K3N	00190-098-766-241
/	Debug board	/	/
/	Earphone	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Power Cable 1	3.0	Notebook	Adapter
Power Cable 2	3.0	Adapter	LISN/AC source
Data cable	0.3	EUT	Debug board
USB Cable	8.0	Debug board	Notebook

Block Diagram of Test Setup


For Conducted Emissions:

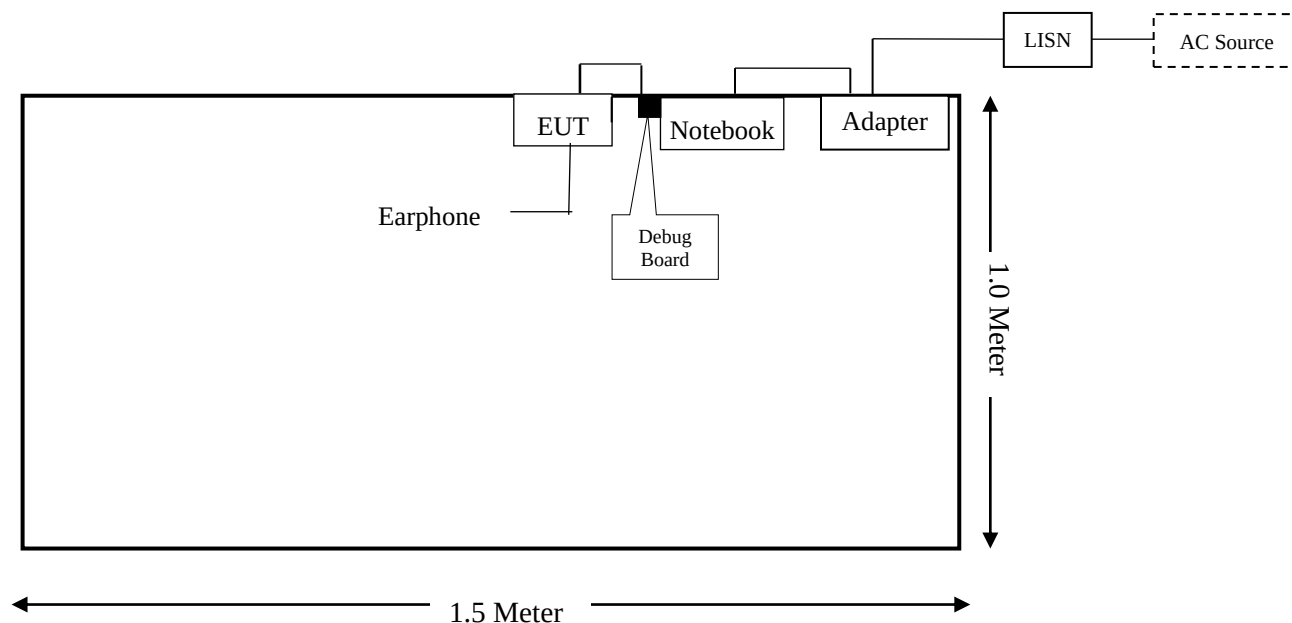


For Radiated Emissions (9 kHz – 30MHz):

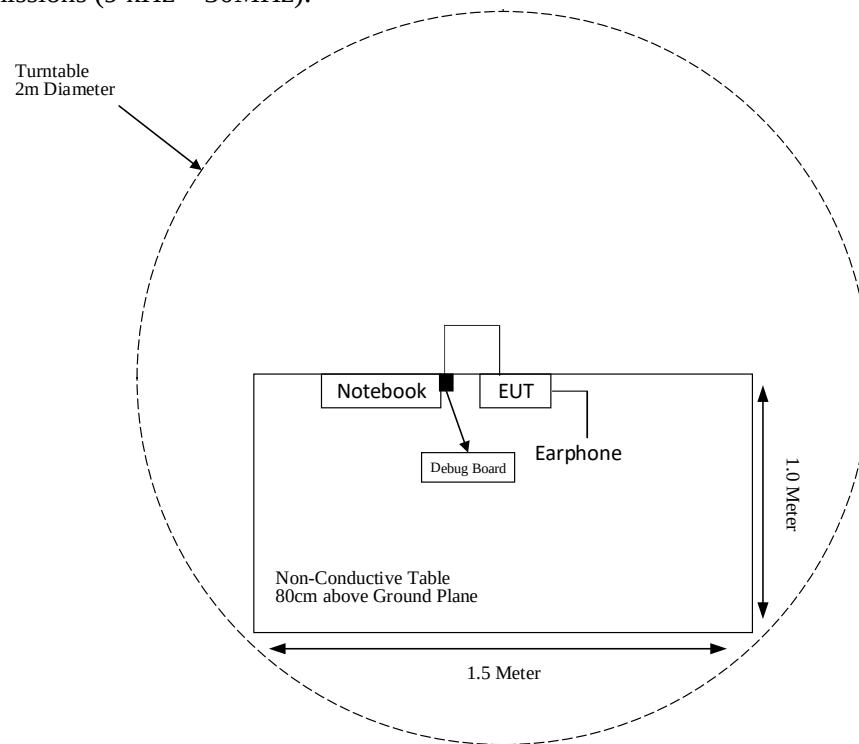

For Radiated Emissions (30MHz – 1GHz):

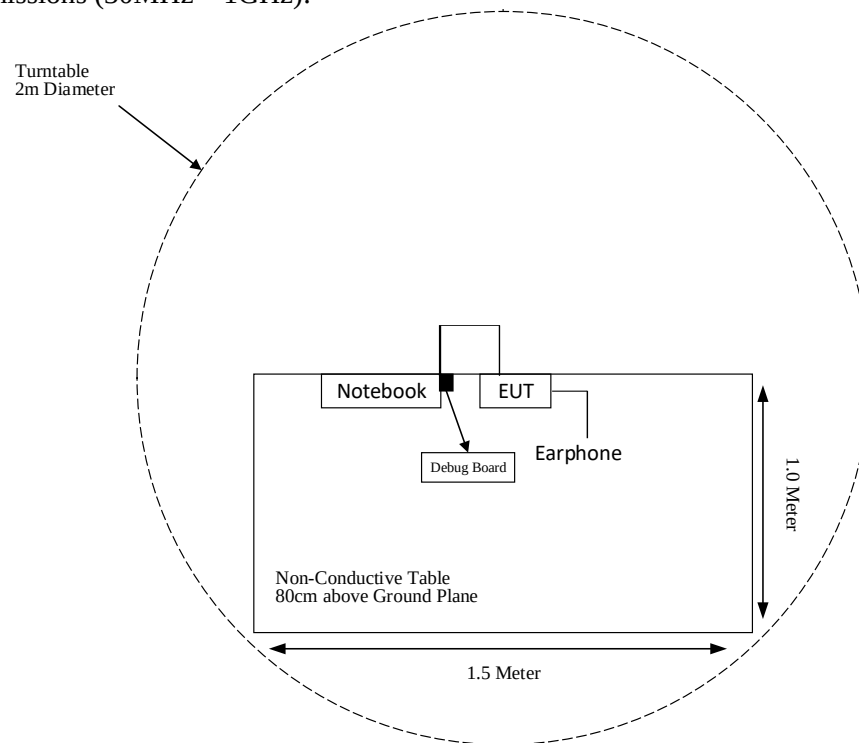

For Radiated Emissions (1GHz – 25GHz):

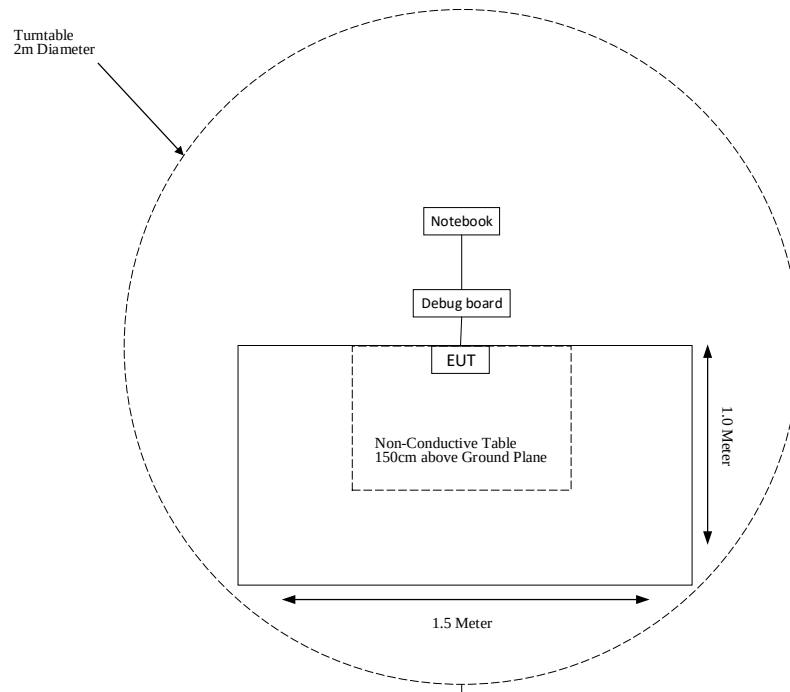

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test(Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2023-05-23	2024-05-22
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2023-11-11	2024-11-10
ETS-LINDGREN	Loop Antenna	6512	108100	2023-11-09	2024-11-08
Narda	6 dB Attenuator	773-6	10690812-2-1	2023-11-11	2024-11-10
Sonoma Instrument	Pre-amplifier	310N	171205	2023-05-23	2024-05-22
Rohde & Schwarz	Auto Test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2023-05-23	2024-05-22
MICRO-COAX	Coaxial Cable	Cable-9	009	2023-05-23	2024-05-22
Radiated Emission Test(Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207/040	2023-05-19	2024-05-18
ETS-LINDGREN	Horn Antenna	3115	9311-4159	2023-12-02	2024-12-01
ETS-LINDGREN	Horn Antenna	3116	2516	2023-12-08	2024-12-07
A.H.Systems,inc	Amplifier	PAM-0118P	512	2023-05-23	2024-05-22
EM Electronics Corporation	Amplifier	EM18G40G	060726	2023-05-23	2024-05-22
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2023-08-05	2024-08-04
Narda	Attenuator	10dB	010	2023-08-15	2024-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2023-05-23	2024-05-22
MICRO-COAX	Coaxial Cable	Cable-11	011	2023-05-23	2024-05-22
MICRO-COAX	Coaxial Cable	Cable-12	012	2023-05-23	2024-05-22
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2023-05-23	2024-05-22
Narda	Attenuator	10dB	010	2023-10-10	2024-10-09
XHFDZ	RG178 Coaxial Cable	SMA-178	XHF-1102	Each time	N/A
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2023-07-28	2024-07-27
Rohde & Schwarz	LISN	ENV216	101115	2023-05-23	2024-05-22
Audix	Test Software	e3	V9	N/A	N/A
Rohde & Schwarz	Pulse limiter	ESH3-Z2	100552	2023-05-23	2024-05-22
MICRO-COAX	Coaxial Cable	Cable-15	015	2023-05-23	2024-05-22

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a PCB antenna for BLE which the antenna gain is 1.3dBi, which permanently attached to EUT fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

Test System Setup

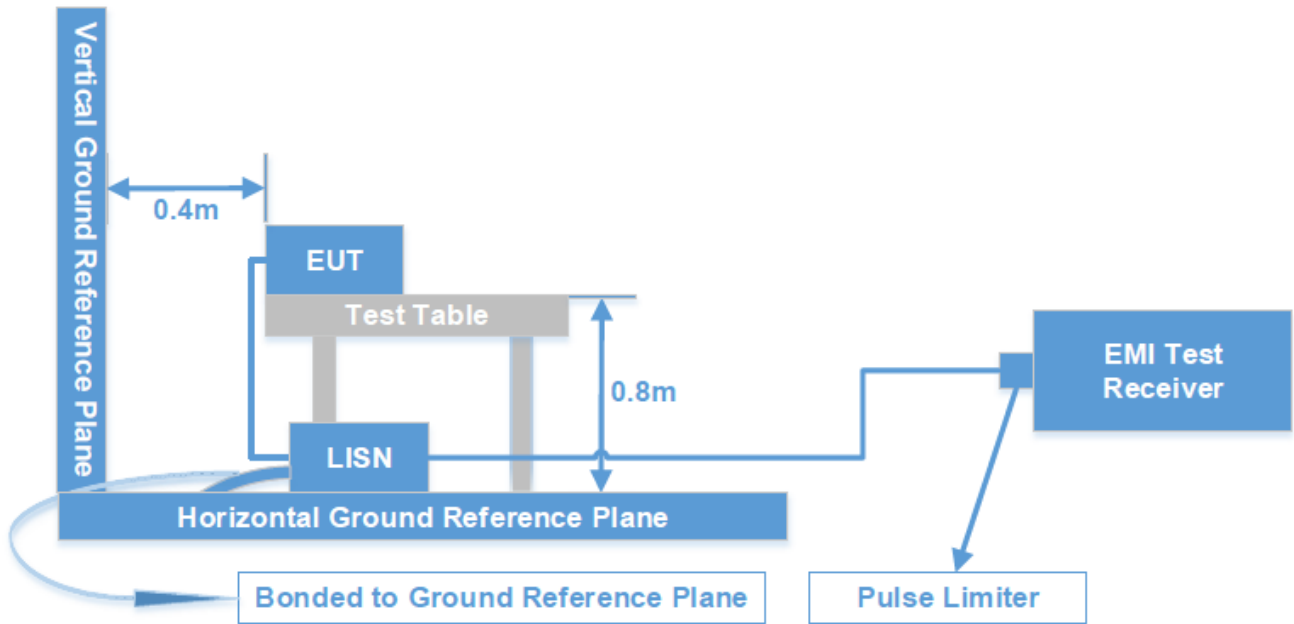

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	VBW
150 kHz - 30 MHz	9 kHz	30 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

If the maximum peak value of the emissions is below the average limit, the QP value and average value measurement will not need to be performed and only record the maximum peak measured value to meet the requirements.

Level & Over Limit Calculation

The Level is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

$$\begin{aligned}\text{Factor (dB)} &= \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)} \\ \text{Level (dB}\mu\text{V)} &= \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)}\end{aligned}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Level (dB}\mu\text{V)} - \text{Limit (dB}\mu\text{V)}$$



Test Results Summary


According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data: See Appendix

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

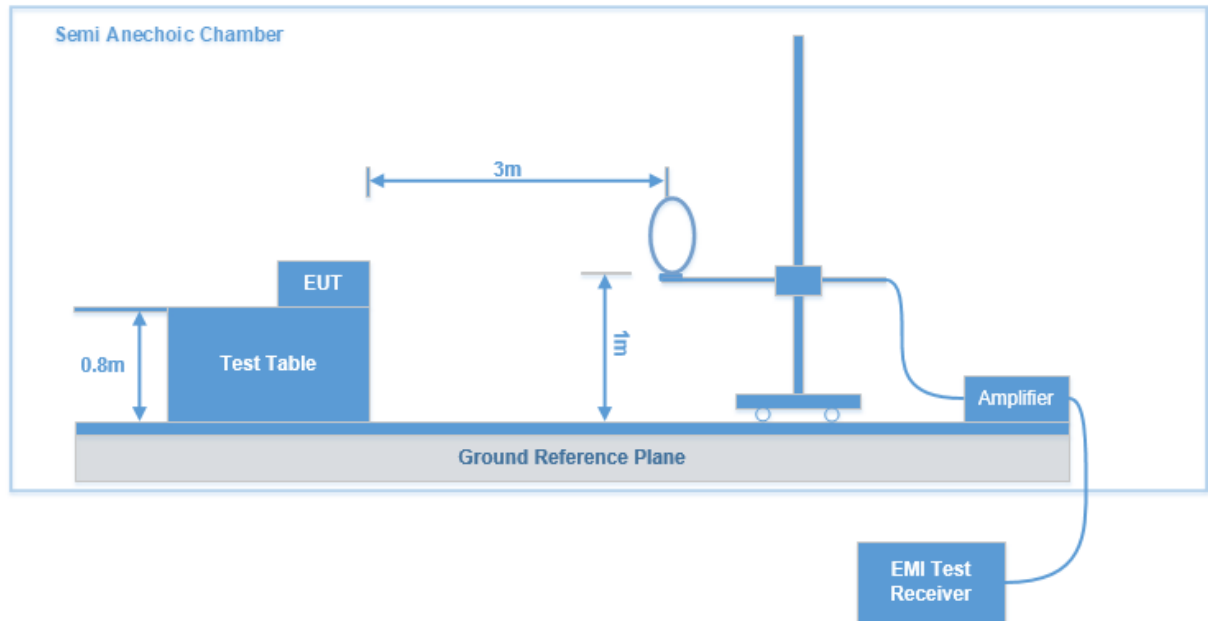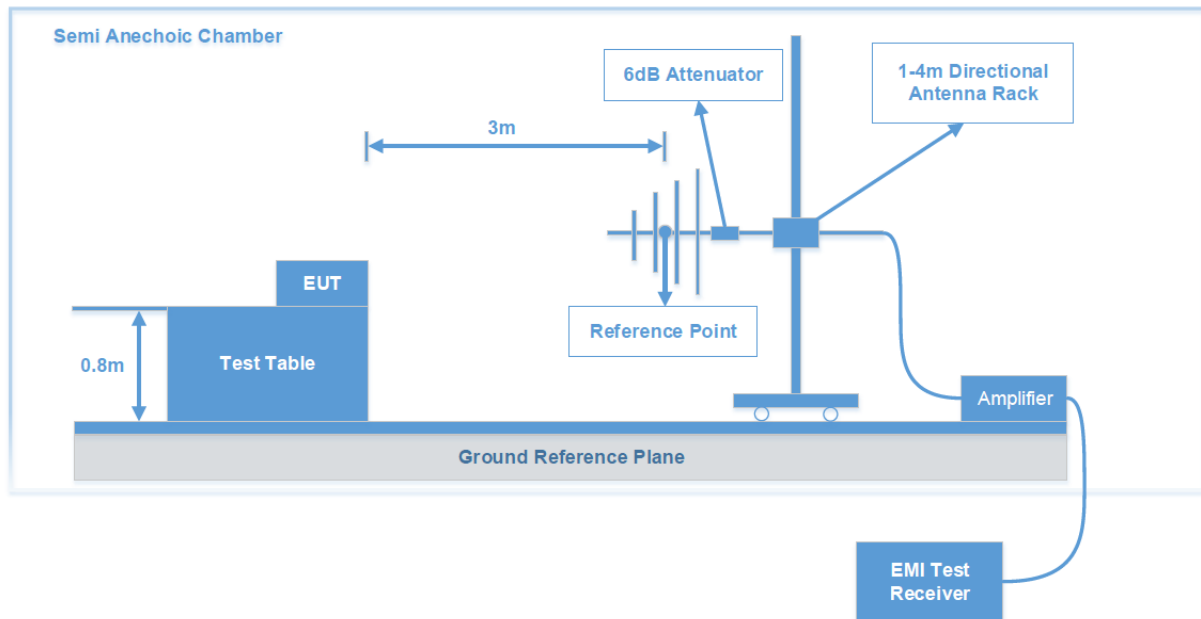Test System Setup**9 kHz-30MHz:****30MHz-1GHz:**

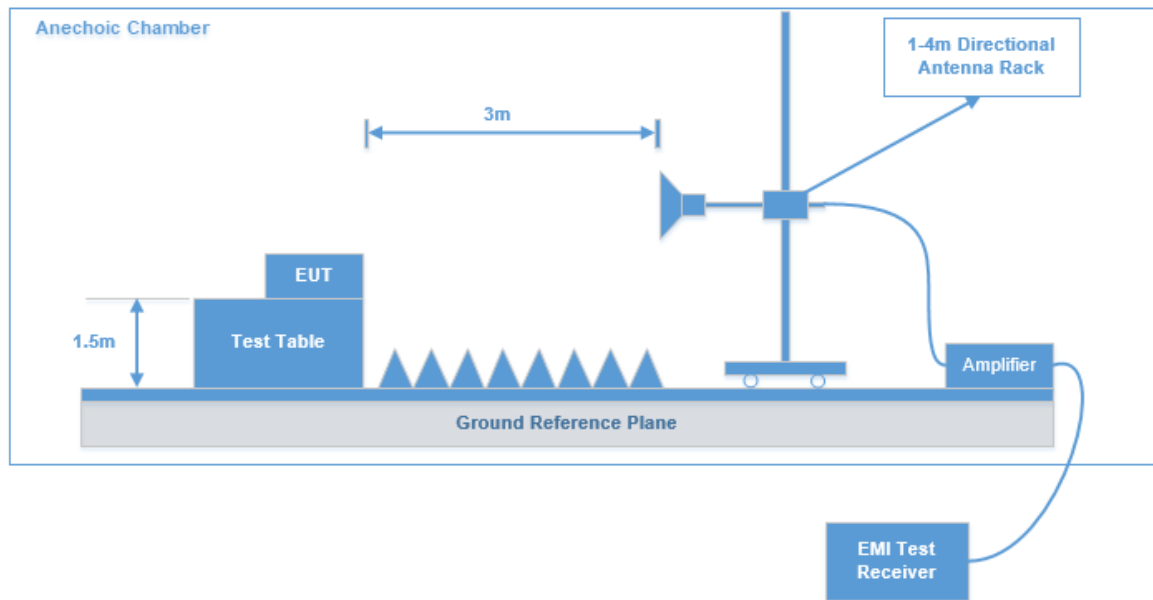Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	VBW	IF B/W	Detector
9 kHz - 150 kHz	200 Hz	1 kHz	200 Hz	QP/Average
150 kHz - 30 MHz	9 kHz	30 kHz	9 kHz	QP/ Average
30 MHz - 1000 MHz	100 kHz	300 kHz	/	Peak
	/	/	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	Peak
	1MHz	3 MHz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 6 dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

For 9 kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dBμV/m) = Meter Reading (dBμV) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Note: The QuasiPeak (dBμV/m), MaxPeak (dBμV/m), Average (dBμV/m) which shown in the data table are all Corrected Amplitude.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data: See Appendix

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data: See Appendix

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

For BLE:

According to ANSI C63.10-2013 sub-clause 11.9.1.1

1. Set the RBW $\geq$ DTS bandwidth.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 3 \times$ RBW
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.



Test Data: See Appendix

FCC §15.247(d) - BAND EDGE


Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data: See Appendix

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 \times \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.




Test Data: See Appendix

Appendix - TEST DATA

Environmental Conditions & Test Information


Test Item:	AC LINE CONDUCTED EMISSIONS	SPURIOUS EMISSIONS		
		9kHz-1GHz	1 GHz - 18 GHz	18 GHz - 25 GHz
Test Date:	2024-03-20	2024-03-26	2024-03-23	2024-04-18
Temperature:	16.5°C	17.3 °C	20.3 °C	17.8 °C
Relative Humidity:	43 %	56 %	52 %	47 %
ATM Pressure:	102.8kPa	102.0kPa	102.6kPa	102.5kPa
Test Result:	Pass	Pass	Pass	Pass
Test Engineer:	Frank Liu	Leah Li	Peter Wang	Peter Wang

Test Item:	6 DB EMISSION BANDWIDTH	MAXIMUM CONDUCTED OUTPUT POWER	BAND EDGE	POWER SPECTRAL DENSITY
Test Date:	2024-03-19	2024-03-19	2024-03-19	2024-03-19
Temperature:	21.3 °C	21.3 °C	21.3 °C	21.3 °C
Relative Humidity:	45 %	45 %	45 %	45 %
ATM Pressure:	102.3kPa	102.3kPa	102.3kPa	102.3kPa
Test Result:	Pass	Pass	Pass	Pass
Test Engineer:	Bard Liu	Bard Liu	Bard Liu	Bard Liu

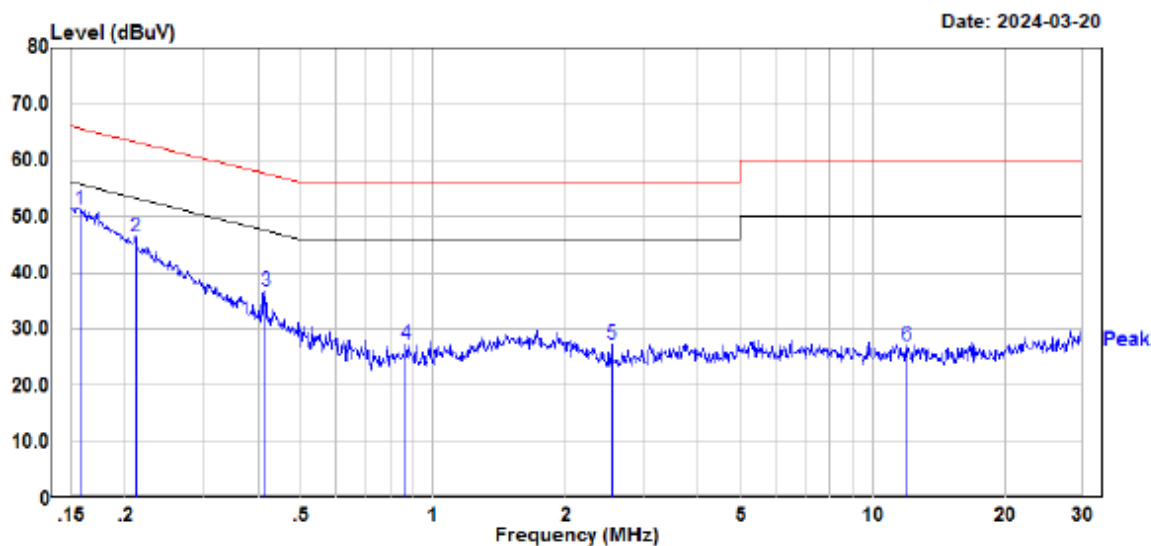AC LINE CONDUCTED EMISSIONS*EUT operation mode: Transmitting in low channel (maximum output power)***Line**

Site : CE
Condition : limit\FCC Part 15.207\Class B QP.csv Line
: DET:Peak
Project No. : RSHA240311001
Model : MS-M7
Phase : L
Voltage : 120V/60Hz
Mode : BLE 1M
Test Equipment : ENV216,ESR
Temperature : 16.5°C
Humidity : 43%
Atmospheric pressure: 102.8kPa
Test Engineer : Frank Liu

		Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.158	31.25	20.00	51.25	65.59	-14.34	Peak
2	0.211	26.37	20.04	46.41	63.18	-16.77	Peak
3	0.417	16.78	20.00	36.78	57.51	-20.73	Peak
4	0.867	7.70	19.73	27.43	56.00	-28.57	Peak
5	2.545	7.29	20.06	27.35	56.00	-28.65	Peak
6	11.931	7.34	19.76	27.10	60.00	-32.90	Peak

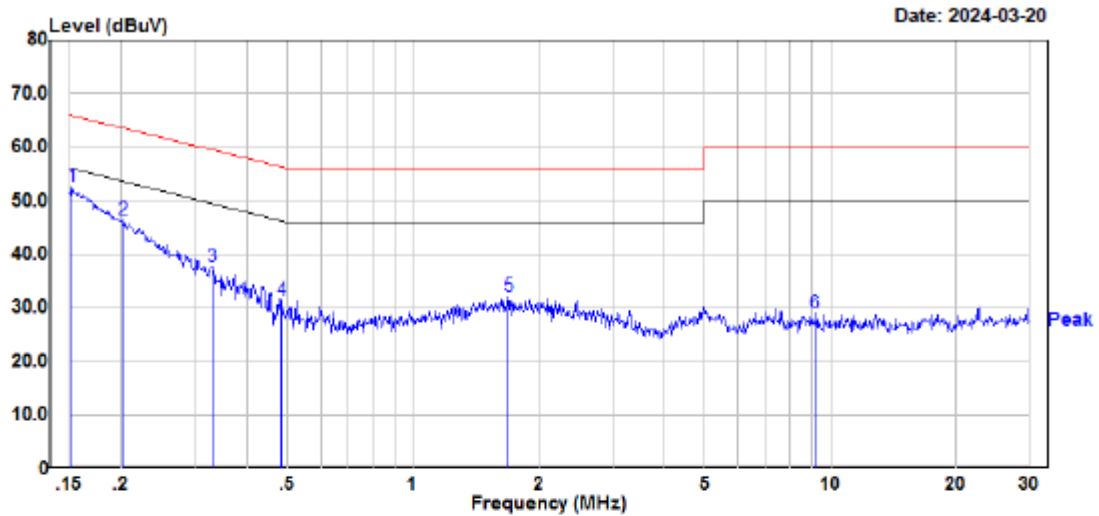Neutral

Site : CE
 Condition : limit\FCC Part 15.207\Class B QP.csv Line
 : DET:Peak
 Project No. : RSHA240311001
 Model : MS-M7
 Phase : N
 Voltage : 120V/60Hz
 Mode : BLE 1M
 Test Equipment : ENV216, ESR
 Temperature : 16.5°C
 Humidity : 43%
 Atmospheric pressure: 102.8kPa
 Test Engineer : Frank Liu

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.152	32.80	19.99	52.79	65.88	-13.09	Peak
2	0.201	26.44	20.04	46.48	63.56	-17.08	Peak
3	0.330	17.69	20.02	37.71	59.46	-21.75	Peak
4	0.484	11.33	19.99	31.32	56.27	-24.95	Peak
5	1.691	12.19	19.93	32.12	56.00	-23.88	Peak
6	9.161	9.16	19.91	29.07	60.00	-30.93	Peak

SPURIOUS EMISSIONS

Test Result: Compliant.

EUT operation mode: Transmitting

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

9 kHz-30 MHz: (Transmitting in maximum output power low channel)


The amplitude of spurious emissions attenuated more than 20 dB below the limit was not be recorded.

30MHz-1GHz:

Low Channel: 2402MHz

Common Information

Project No:	RSHA240311001
EUT Model:	MS-M7
Test Mode:	BLE 1M
Standard:	FCC Part 15.247
Test Equipment:	ESCI, JB3, 310N
Temperature:	17.3°C
Humidity:	56%
Barometric Pressure:	102.0kPa
Test Engineer:	Leah Li
Test Date:	2024/3/26

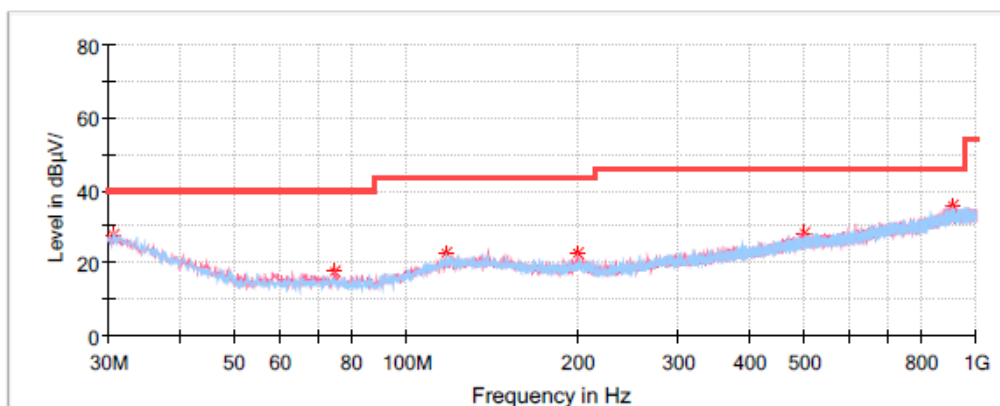

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Pol	Corr. (dB /m)
30.727500	27.79	40.00	12.21	H	-4.9
74.862500	17.46	40.00	22.54	V	-17.2
117.785000	22.86	43.50	20.64	H	-11.6
200.356250	22.45	43.50	21.05	V	-12.5
500.935000	28.33	46.00	17.67	V	-5.8
909.911250	35.56	46.00	10.44	V	1.4

Middle Channel: 2440MHz

Common Information

Project No:RSHA240311001

EUT Model:MS-M7

Test Mode:BLE 1M

Standard:FCC Part 15.247

Test Equipment:ESCI, JB3, 310N


Temperature:17.3℃

Humidity:56%

Barometric Pressure:102.0kPa

Test Engineer:Leah Li

Test Date:2024/3/26

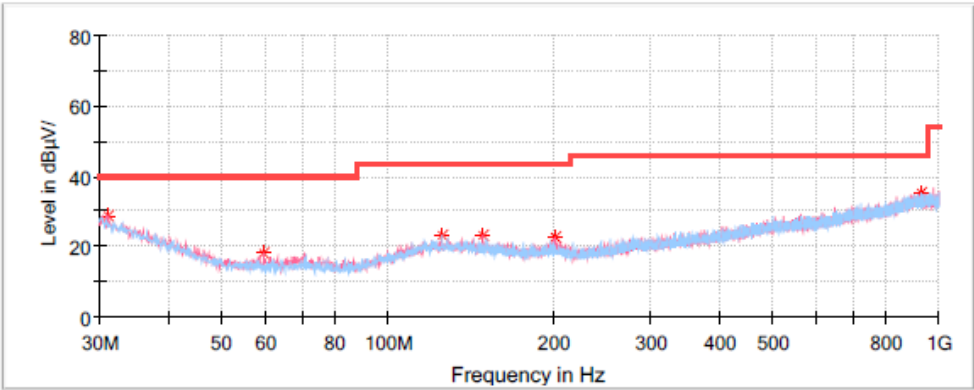


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Pol	Corr. (dB /m)
31.212500	28.43	40.00	11.57	V	-5.3
59.585000	18.18	40.00	21.82	V	-17.5
125.423750	22.90	43.50	20.60	H	-11.3
149.067500	23.00	43.50	20.50	V	-12.0
200.962500	22.84	43.50	20.66	V	-12.6
926.522500	35.40	46.00	10.60	H	1.4

High Channel: 2480MHz

Common Information

Project No: RSHA240311001
EUT Model: MS-M7
Test Mode: BLE 1M
Standard: FCC Part 15.247
Test Equipment: ESCI, JB3, 310N
Temperature: 17.3°C
Humidity: 56%
Barometric Pressure: 102.0kPa
Test Engineer: Leah Li
Test Date: 2024/3/26

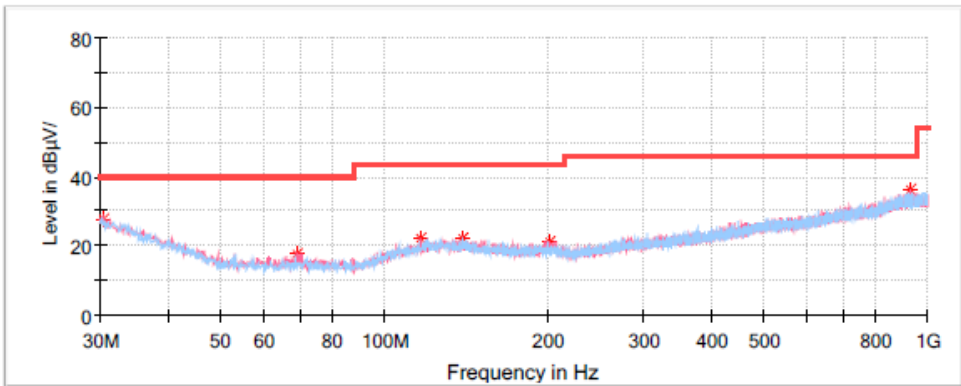

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Pol	Corr. (dB/m)
30.485000	27.89	40.00	12.11	V	-4.8
69.285000	17.70	40.00	22.30	V	-16.8
116.572500	21.91	43.50	21.59	V	-11.8
139.367500	22.22	43.50	21.28	H	-11.5
201.932500	21.31	43.50	22.19	V	-12.6
929.917500	36.09	46.00	9.91	V	1.4

1GHz-18GHz:

Low Channel: 2402MHz

Common Information

Project No.:	RSHA240311001
EUT Model:	MS-M7
Test Mode:	BLE 1M
Standard:	FCC Part 15.247 & FCC Part 15.209 & FCC Part 15.205
Test Equipment:	ESU40,3115,PAM-0118P
Temperature:	20.3℃
Humidity:	52%
Atmospheric pressure:	102.6kPa
Test Engineer:	Peter Wang
Test Date:	2024/3/23

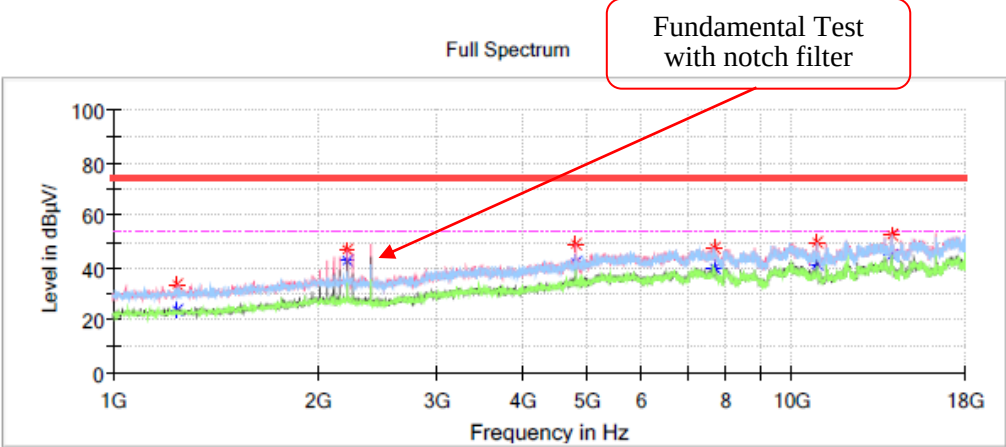


Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1243.100000	---	23.47	54.00	30.53	V	-14.7
1243.100000	33.73	---	74.00	40.27	V	-14.7
2208.700000	---	42.33	54.00	11.67	V	-10.2
2208.700000	47.20	---	74.00	26.80	V	-10.2
4802.900000	---	42.28	54.00	11.72	V	-2.2
4802.900000	48.97	---	74.00	25.03	V	-2.2
7679.300000	---	39.70	54.00	14.30	V	4.1
7679.300000	47.34	---	74.00	26.66	V	4.1
10863.400000	---	41.05	54.00	12.95	H	6.6
10863.400000	49.40	---	74.00	24.60	H	6.6
14001.600000	---	44.86	54.00	9.14	V	10.5
14001.600000	52.38	---	74.00	21.62	V	10.5

Middle Channel: 2440MHz**Common Information**

Project No.:	RSHA240311001
EUT Model:	MS-M7
Test Mode:	BLE 1M
Standard:	FCC Part 15.247 & FCC Part 15.209 & FCC Part 15.205
Test Equipment:	ESU40,3115,PAM-0118P
Temperature:	20.3°C
Humidity:	52%
Atmospheric pressure:	102.6kPa
Test Engineer:	Peter Wang
Test Date:	2024/3/23

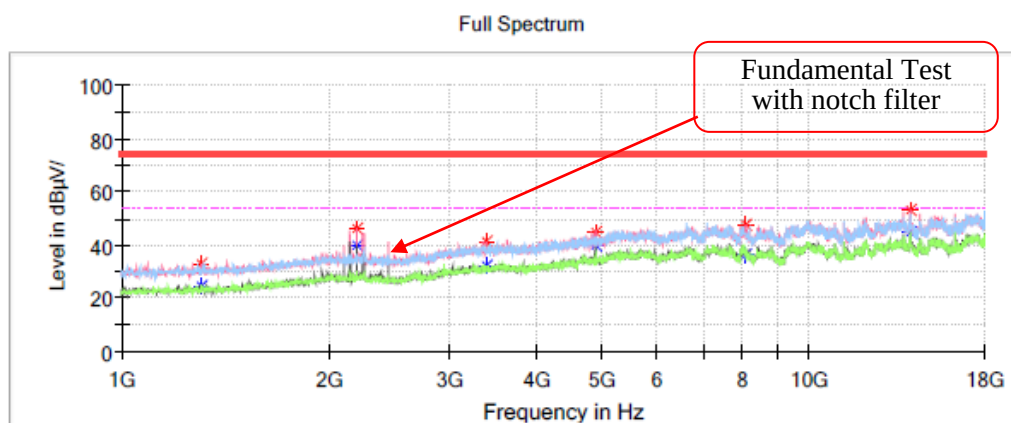
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1309.400000	---	24.16	54.00	29.84	H	-14.5
1309.400000	33.03	---	74.00	40.97	H	-14.5
2198.500000	---	40.13	54.00	13.87	V	-10.2
2198.500000	45.85	---	74.00	28.15	V	-10.2
3385.100000	---	32.30	54.00	21.70	V	-6.5
3385.100000	41.40	---	74.00	32.60	V	-6.5
4879.400000	---	39.74	54.00	14.26	V	-1.8
4879.400000	44.96	---	74.00	29.04	V	-1.8
8085.600000	---	36.20	54.00	17.80	V	3.8
8085.600000	47.55	---	74.00	26.45	V	3.8
14001.600000	---	45.09	54.00	8.91	H	10.5
14001.600000	53.14	---	74.00	20.86	H	10.5

High Channel: 2480MHz**Common Information**

Project No.: RSHA240311001
 EUT Model: MS-M7
 Test Mode: BLE 1M
 Standard: FCC Part 15.247 & FCC Part 15.209 & FCC Part 15.205
 Test Equipment: ESU40,3115,PAM-0118P
 Temperature: 20.3℃
 Humidity: 52%
 Atmospheric pressure: 102.6kPa
 Test Engineer: Peter Wang
 Test Date: 2024/3/23

Fundamental Test
with notch filter

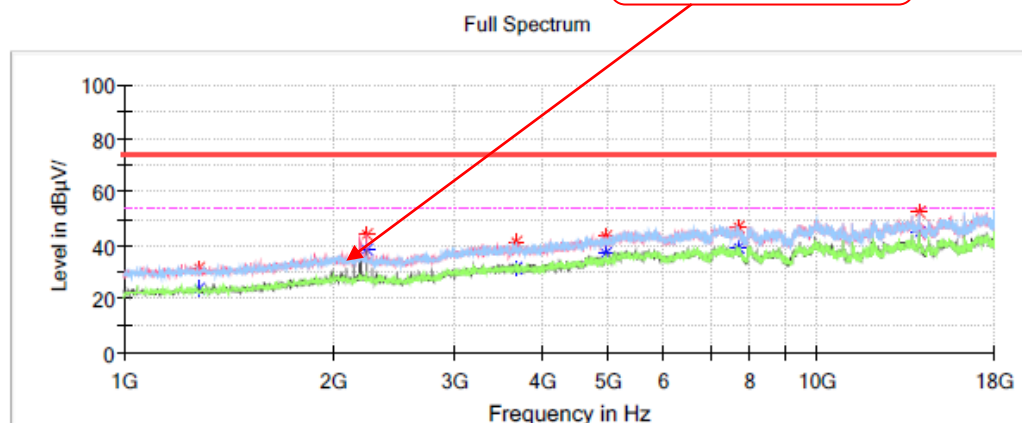
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1283.900000	---	23.53	54.00	30.47	V	-14.6
1283.900000	31.49	---	74.00	42.51	V	-14.6
2239.300000	---	38.81	54.00	15.19	V	-10.2
2239.300000	44.11	---	74.00	29.89	V	-10.2
3680.900000	---	31.26	54.00	22.74	H	-5.7
3680.900000	41.00	---	74.00	33.00	H	-5.7
4959.300000	43.07	---	74.00	30.93	V	-1.4
4959.300000	---	37.24	54.00	16.76	V	-1.4
7692.900000	---	39.09	54.00	14.91	V	4.0
7692.900000	47.09	---	74.00	26.91	V	4.0
14003.300000	---	45.02	54.00	8.98	V	10.5
14003.300000	52.46	---	74.00	21.54	V	10.5

Band Edge:**Low Channel****Common Information**

Project No.: RSHA240311001
EUT Model: MS-M7
Test Mode: BLE 1M
Standard: FCC Part 15.247 & FCC Part 15.205 & FCC 15.209
Test Equipment: ESU40,3115,PAM-0118P
Temperature: 20.3℃
Humidity: 52%
Atmospheric pressure: 102.6kPa
Test Engineer: Peter Wang
Test Date: 2024/3/23

Full Spectrum

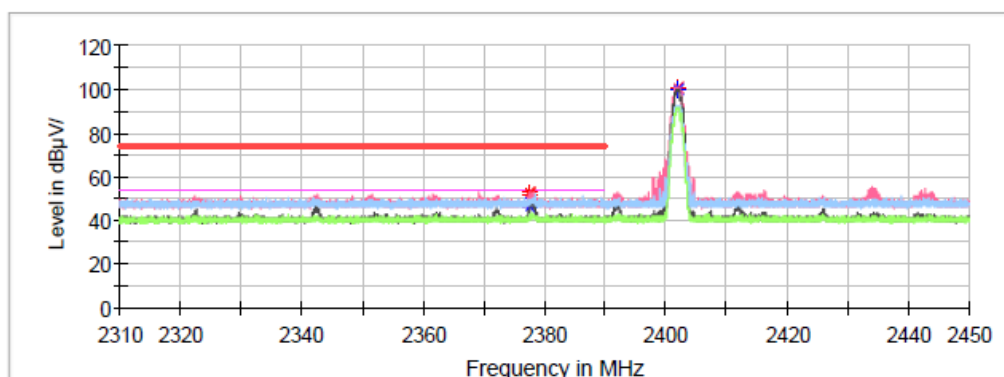**Critical Freqs**


Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2377.662000	---	45.86	54.00	8.14	V	0.0
2377.662000	53.12	---	74.00	20.88	V	0.0
2377.718000	51.95	---	74.00	22.05	V	0.0
2377.718000	---	48.58	54.00	5.42	V	0.0

High Channel

Common Information

Project No.: RSHA240311001
EUT Model: MS-M7
Test Mode: BLE 1M
Standard: FCC Part 15.247 & FCC Part 15.205 & FCC 15.209
Test Equipment: ESU40,3115,PAM-0118P
Temperature: 20.3℃
Humidity: 52%
Atmospheric pressure: 102.6kPa
Test Engineer: Peter Wang
Test Date: 2024/3/23

Full Spectrum

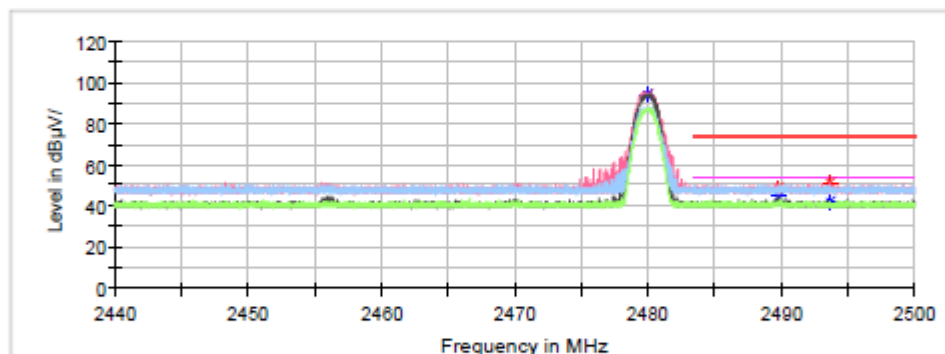


Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2489.830000	---	44.89	54.00	9.11	V	0.2
2489.830000	48.67	---	74.00	25.33	V	0.2
2493.706000	---	41.69	54.00	12.31	V	0.2
2493.706000	51.03	---	74.00	22.97	V	0.2


18 GHz-25 GHz:

Horizontal

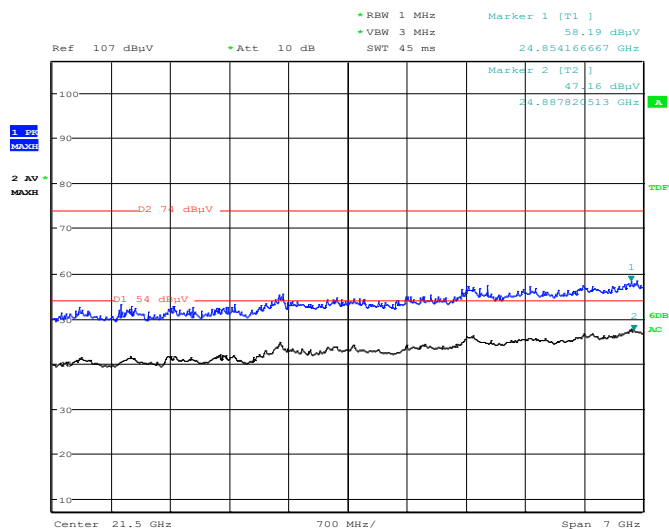

Project No.: RSHA240311001 Tester: Peter Wang
Date: 18.APR.2024 14:57:13

Vertical

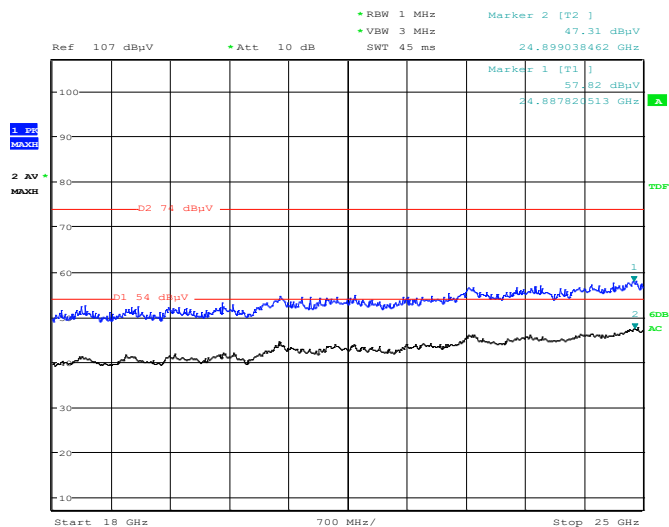


Project No.: RSHA240311001 Tester: Peter Wang
Date: 18.APR.2024 14:40:50

Note: The test distance is 3m. The limit is 74dBμV/m(Peak) and 54dBμV/m(Average).

6 dB EMISSION BANDWIDTH**Test Result:** Compliant.*EUT operation mode: Transmitting*

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
BLE(1Mbps) Mode			
Low	2402	0.668	≥ 0.5
Middle	2440	0.664	≥ 0.5
High	2480	0.668	≥ 0.5

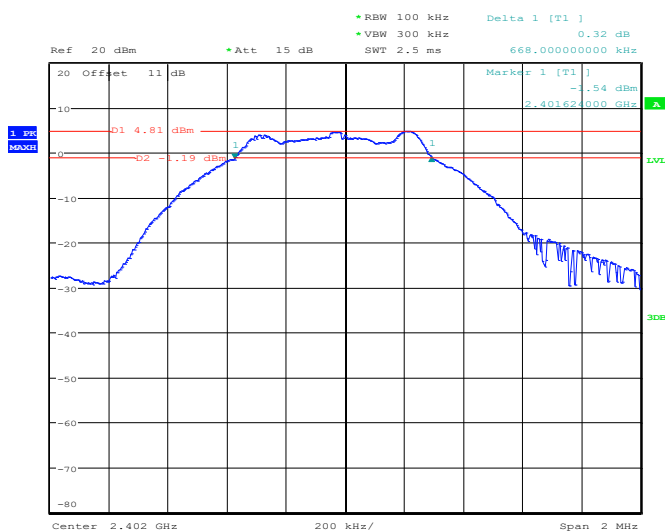BLE(1Mbps) Mode Low Channel

ProjectNo.:RSHA240311001 Tester:Bard Liu
Date: 19.MAR.2024 11:26:33

Ref 20 dBm Att 15 dB SWT 2.5 ms 664.000000000 kHz

Offset 11 dB

Marker 1 [T1]
-1.94 dBm
2.439620000 GHz

D1 2.04 dBm
D2 -3.96 dBm

Center 2.44 GHz 200 kHz/ Span 2 MHz

ProjectNo.:RSHA240311001 Tester:Bard Liu
Date: 19.MAR.2024 11:28:23

• RBW 100 kHz
 • VBW 300 kHz
 Delta 1 [T1]
 0.31 dB
 668.00000000 kHz
 Ref 20 dBm
 • Att 15 dB
 SWT 2.5 ms

Marker 1 [T1]
 -7.69 dBm
 2.479614000 GHz

D1 -1.38 dBm
 D2 -7.38 dBm

1 PK MAXH

Center 2.48 GHz
 200 kHz/
 Span 2 MHz

ProjectNo.:RSHA240311001 Tester:Bard Liu
Date: 19.MAR.2024 11:30:41


MAXIMUM CONDUCTED OUTPUT POWER

Test Result: Compliant.

EUT operation mode: Transmitting


Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Limit (dBm)	Result
BLE (1Mbps) Mode				
Low	2402	5.01	30	Pass
Middle	2440	2.33	30	Pass
High	2480	-1.01	30	Pass

BLE(1Mbps) Mode Low Channel

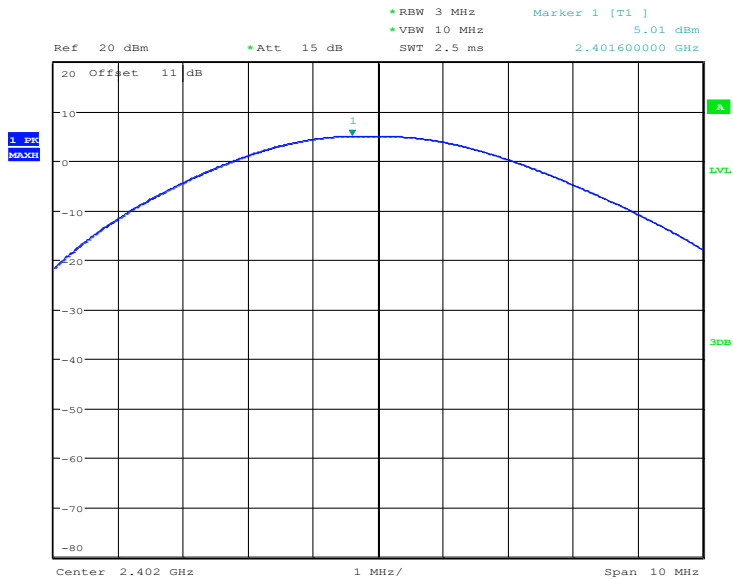


ProjectNo.:RSHA240311001 Tester:Bard Liu
Date: 19.MAR.2024 11:26:55

BLE(1Mbps) Mode Middle Channel

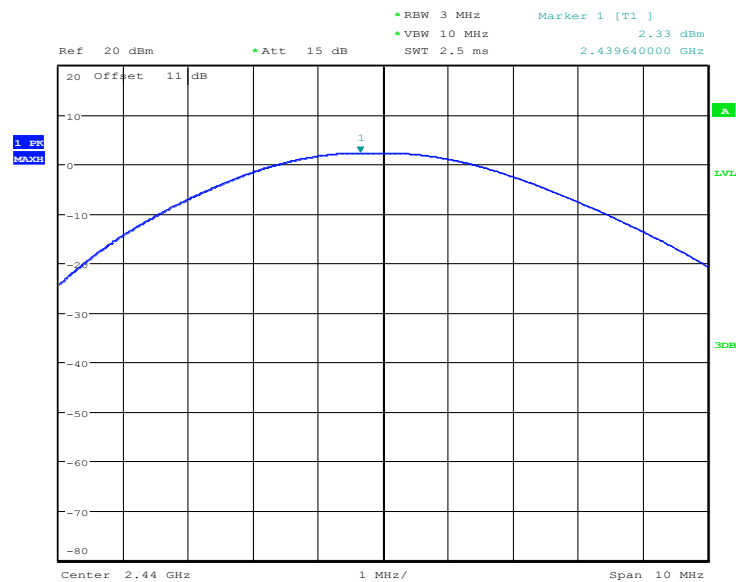

ProjectNo.:RSHA240311001 Tester:Bard Liu
Date: 19.MAR.2024 11:28:45

BLE(1Mbps) Mode High Channel

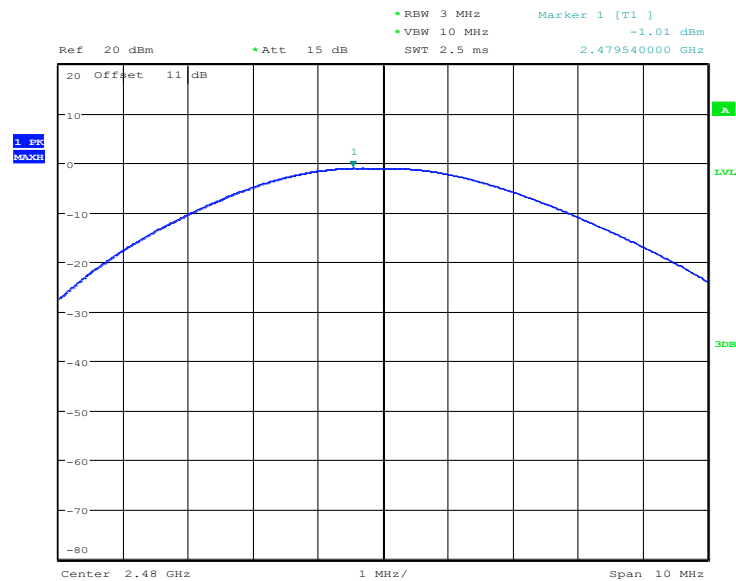


ProjectNo.:RSHA240311001 Tester:Bard Liu
Date: 19.MAR.2024 11:31:06

Band Edge

Test Result: Compliant.


EUT operation mode: Transmitting

BLE(1Mbps) Mode Left Side

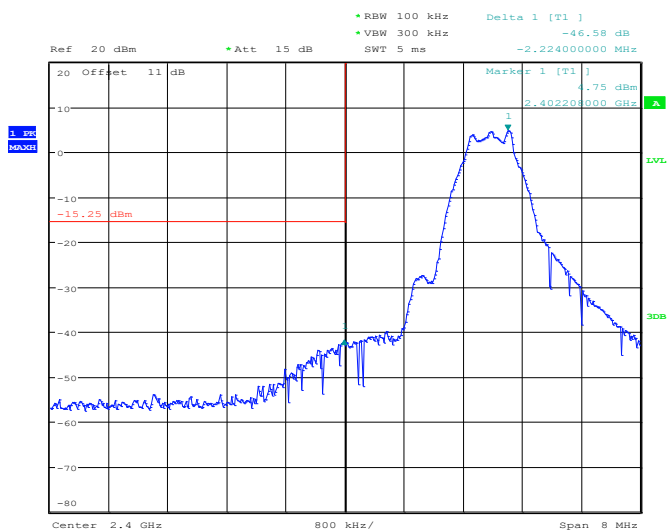

ProjectNo.:RSHA240311001 Tester:Bard Liu
Date: 19.MAR.2024 11:27:48

BLE(1Mbps) Mode: Right Side

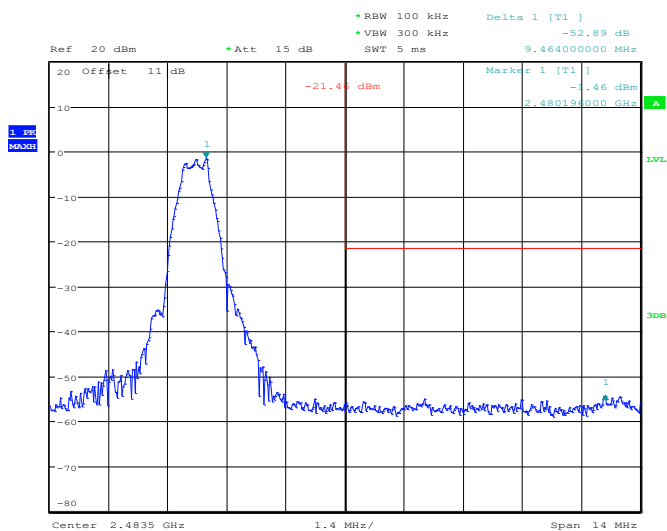

ProjectNo.:RSHA240311001 Tester:Bard Liu
Date: 19.MAR.2024 11:31:56


POWER SPECTRAL DENSITY

Test Result: Compliant.

EUT operation mode: Transmitting


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
BLE (1Mbps) mode			
Low	2402	-11.34	≤8
Middle	2440	-14.12	≤8
High	2480	-17.77	≤8

BLE(1Mbps) Mode Low Channel

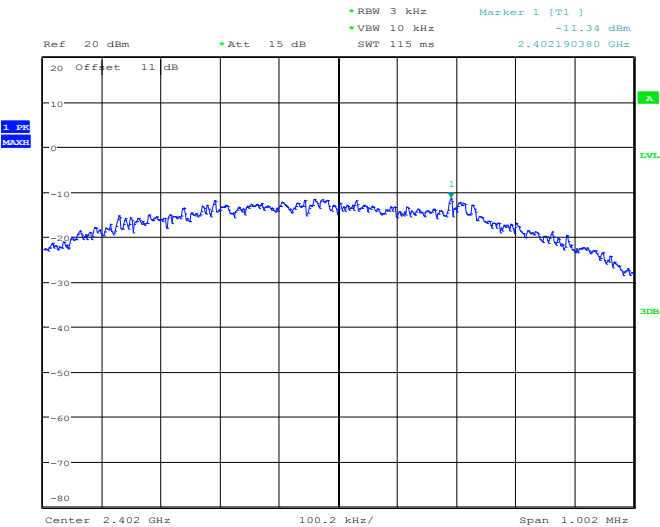


ProjectNo.:RSHA240311001 Tester:Bard Liu
Date: 19.MAR.2024 11:27:03

BLE(1Mbps) Mode Middle Channel

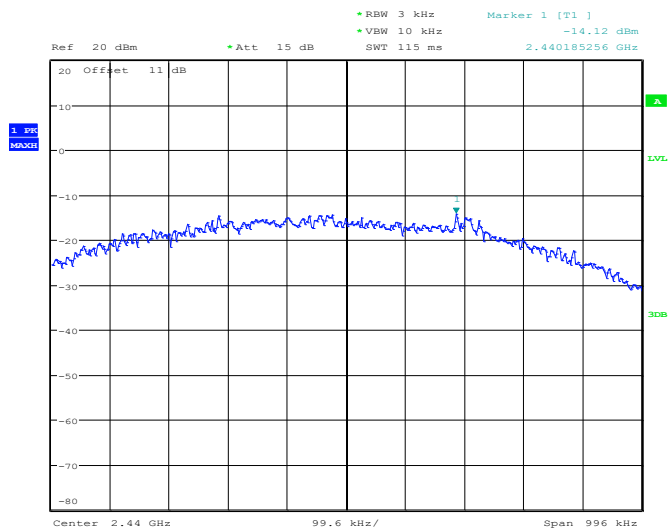

ProjectNo.:RSHA240311001 Tester:Bard Liu
Date: 19.MAR.2024 11:28:52

BLE(1Mbps) Mode High Channel

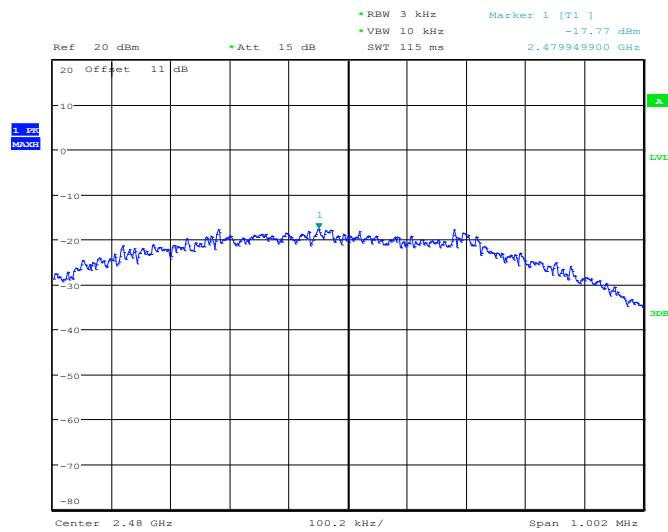

ProjectNo.:RSHA240311001 Tester:Bard Liu
Date: 19.MAR.2024 11:31:14

EUT PHOTOGRAPHS

Please refer to the attachment EXHIBIT A - EUT EXTERNAL PHOTOGRAPHS and EXHIBIT B - EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment EXHIBIT C - TEST SETUP PHOTOGRAPHS.

Declarations

1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with “★”.
2. The test data was only valid for the test sample(s).
3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95.45% confidence interval.

******* END OF REPORT *******