



Project No.: 2403Z107562E-RF
 Tester: Mack Huang
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: Horizontal
 Note: 802.11b Mode High Channel 2462MHz

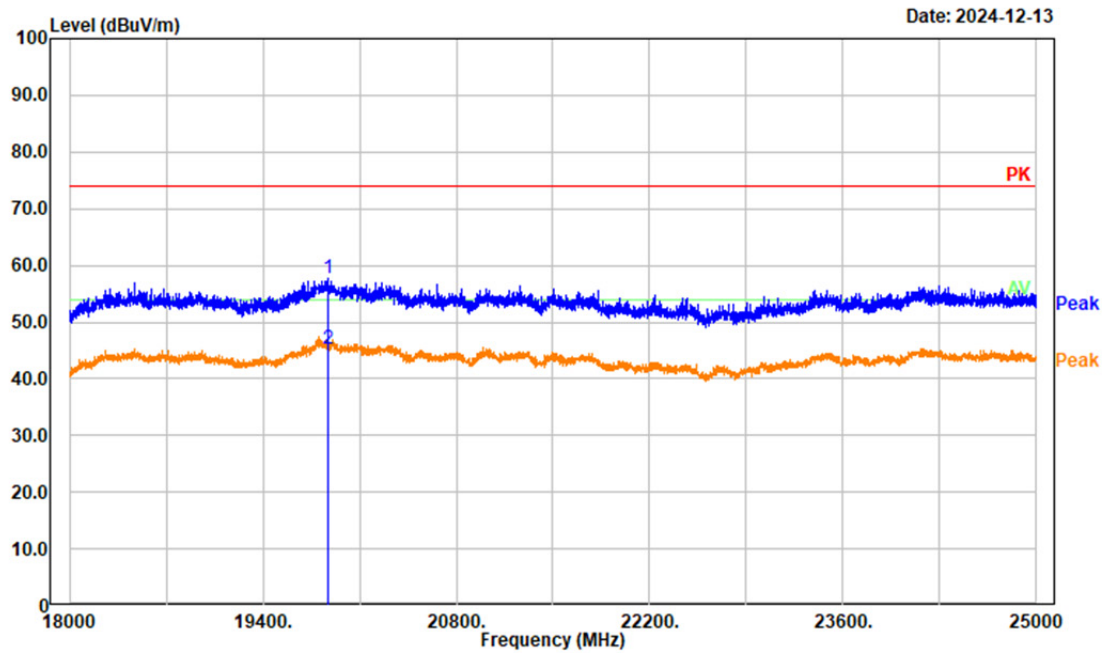


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	19876.000	49.76	7.97	57.73	74.00	16.27	Peak
2	19876.000	37.39	7.97	45.36	54.00	8.64	Average

Project No.: 2403Z107562E-RF
 Tester: Mack Huang
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: Vertical
 Note: 802.11b Mode High Channel 2462MHz

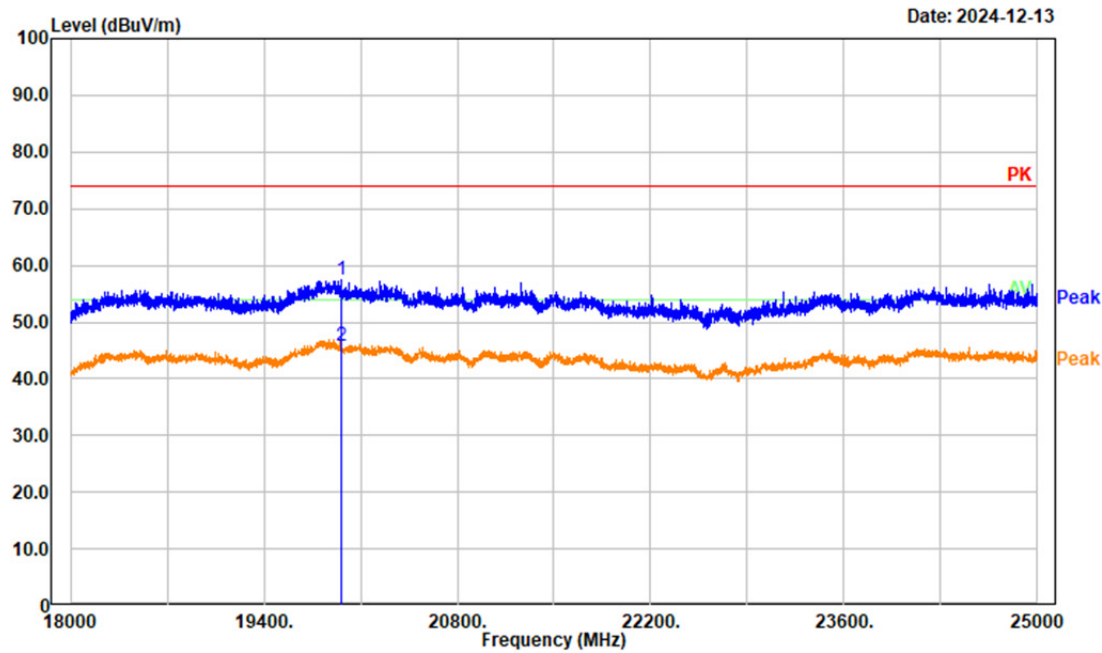


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	19961.400	49.75	7.64	57.39	74.00	16.61	Peak
2	19961.400	38.05	7.64	45.69	54.00	8.31	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: 802.11g Mode Middle Channel 2437MHz

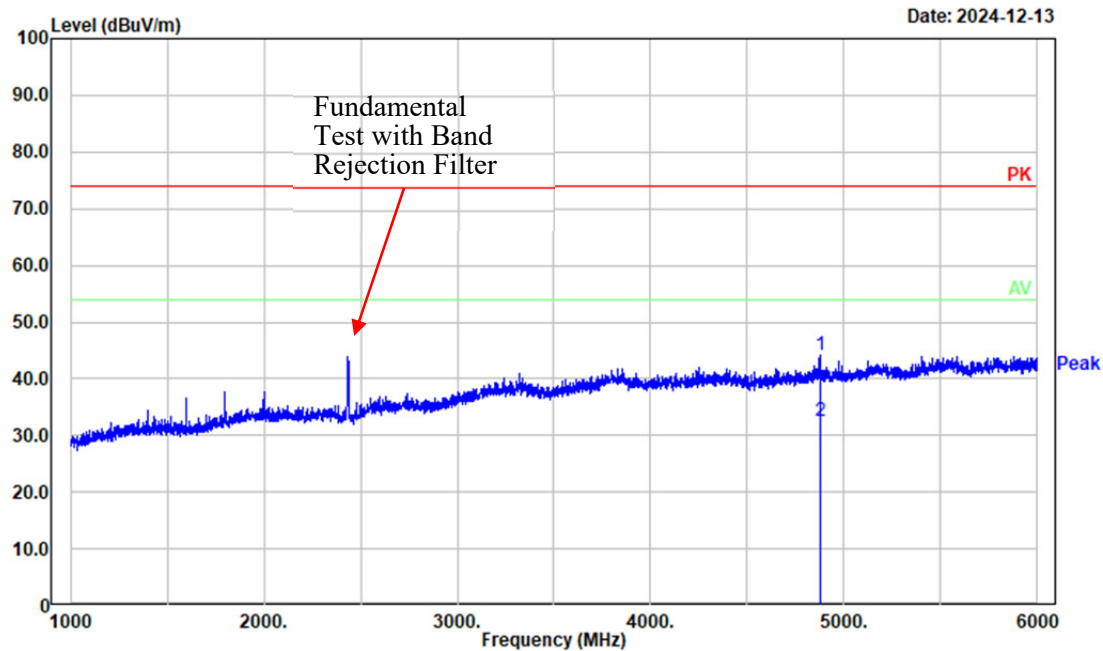


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4874.000	35.25	8.99	44.24	74.00	29.76	Peak
2	4874.000	23.41	8.99	32.40	54.00	21.60	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: 802.11g Mode Middle Channel 2437MHz

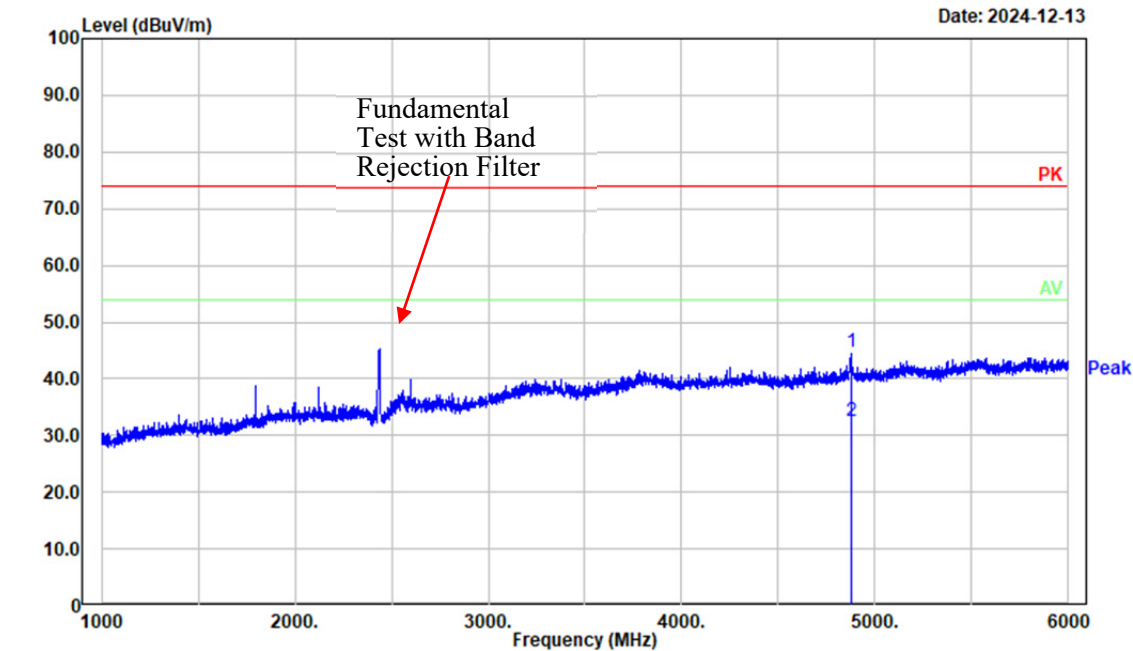


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4874.000	35.68	8.99	44.67	74.00	29.33	Peak
2	4874.000	23.50	8.99	32.49	54.00	21.51	Average

Project No.: 2403Z107562E-RF
 Tester: Mack Huang
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: 802.11g Mode Middle Channel 2437MHz

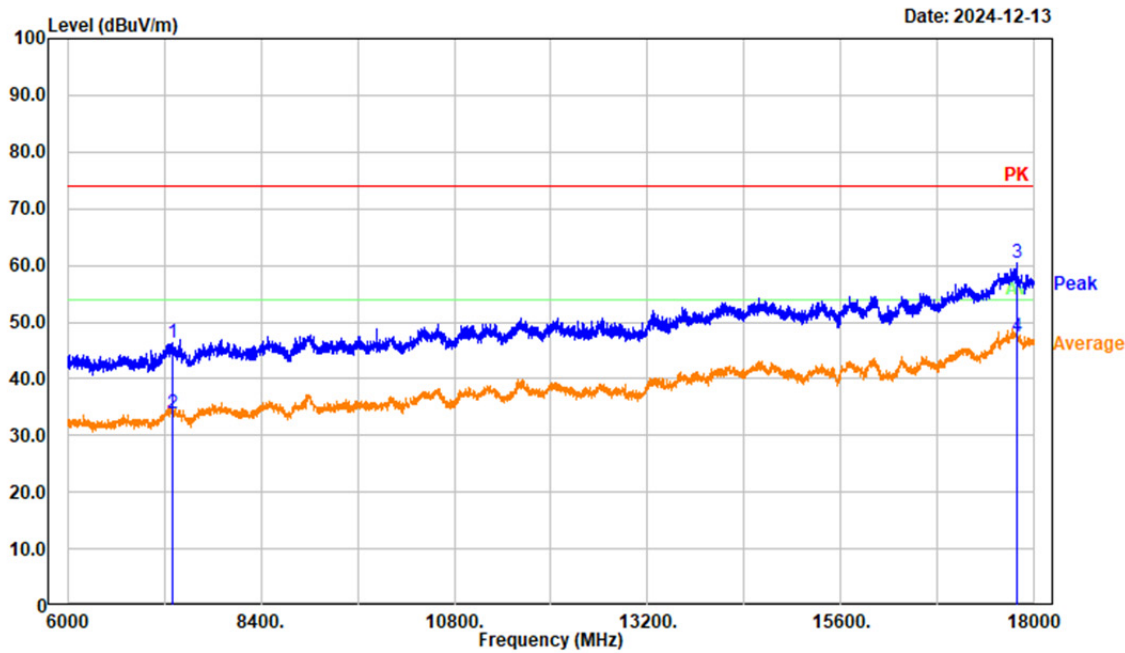


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7311.000	34.77	11.52	46.29	74.00	27.71	Peak
2	7311.000	22.30	11.52	33.82	54.00	20.18	Average
3	17774.400	34.64	25.81	60.45	74.00	13.55	Peak
4	17774.400	21.58	25.81	47.39	54.00	6.61	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: 802.11g Mode Middle Channel 2437MHz

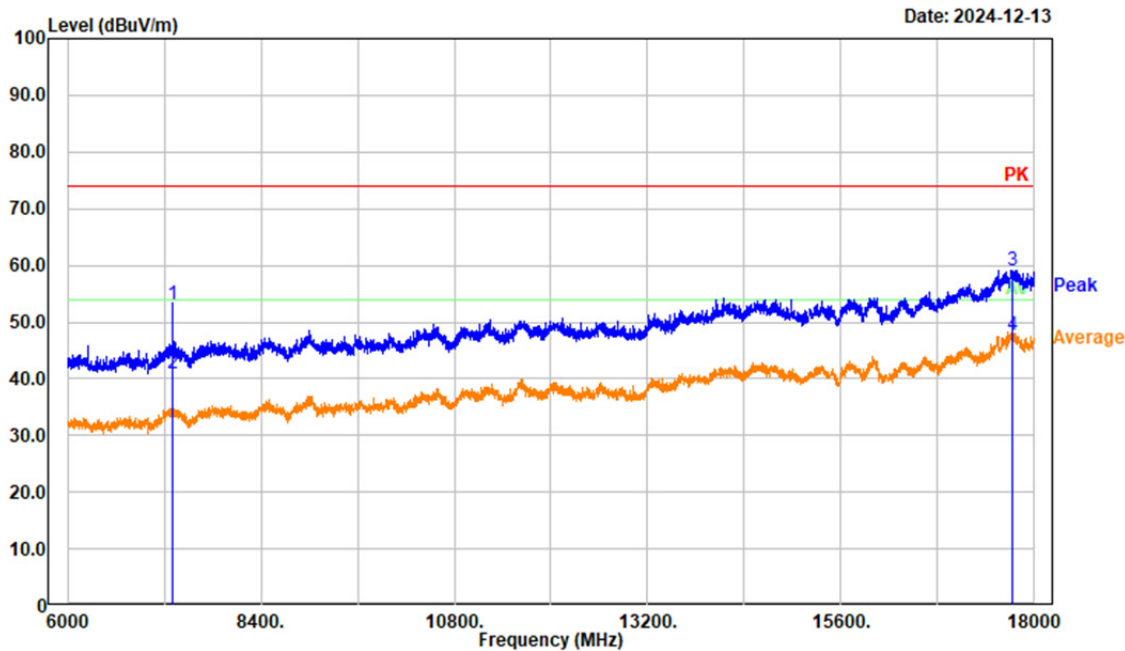


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7311.000	41.69	11.52	53.21	74.00	20.79	Peak
2	7311.000	29.35	11.52	40.87	54.00	13.13	Average
3	17726.400	33.33	25.87	59.20	74.00	14.80	Peak
4	17726.400	21.78	25.87	47.65	54.00	6.35	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: 802.11n ht20 Mode High Channel 2462MHz

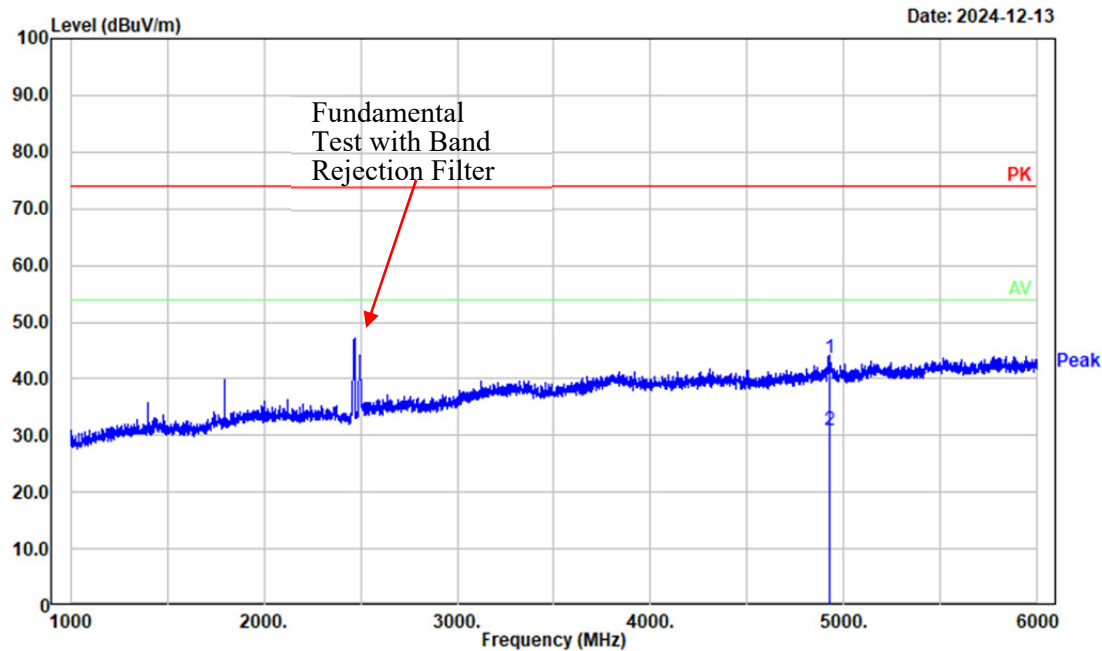


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4924.000	34.74	8.88	43.62	74.00	30.38	Peak
2	4924.000	22.12	8.88	31.00	54.00	23.00	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: 802.11n ht20 Mode High Channel 2462MHz

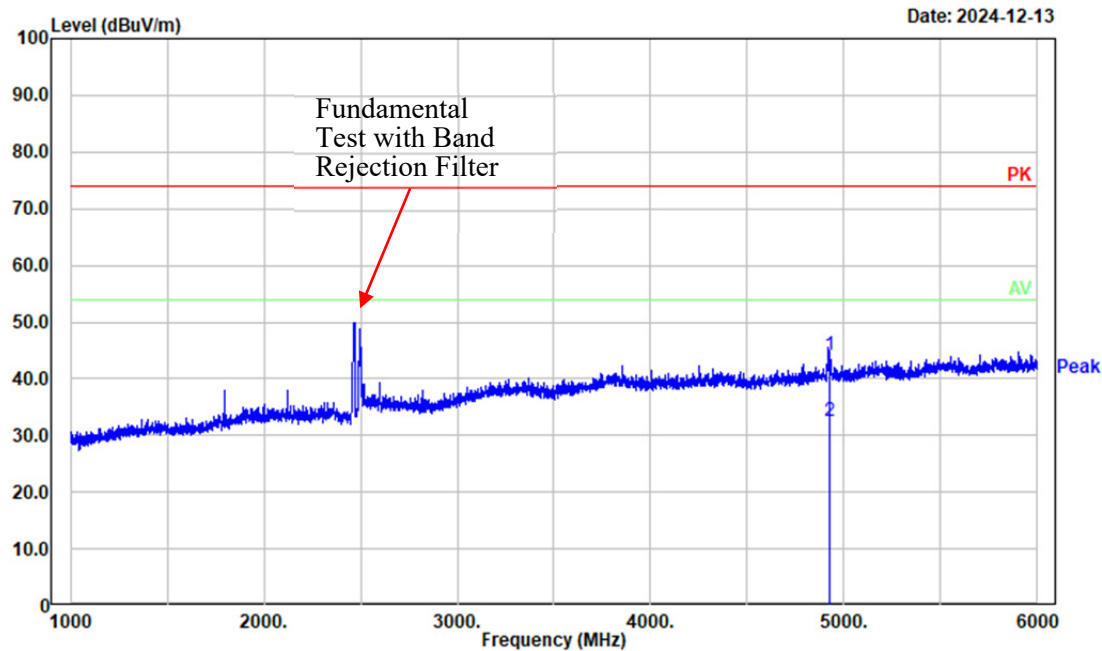


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4924.000	35.39	8.88	44.27	74.00	29.73	Peak
2	4924.000	23.58	8.88	32.46	54.00	21.54	Average

Project No.: 2403Z107562E-RF
 Tester: Mack Huang
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: 802.11n ht20 Mode High Channel 2462MHz

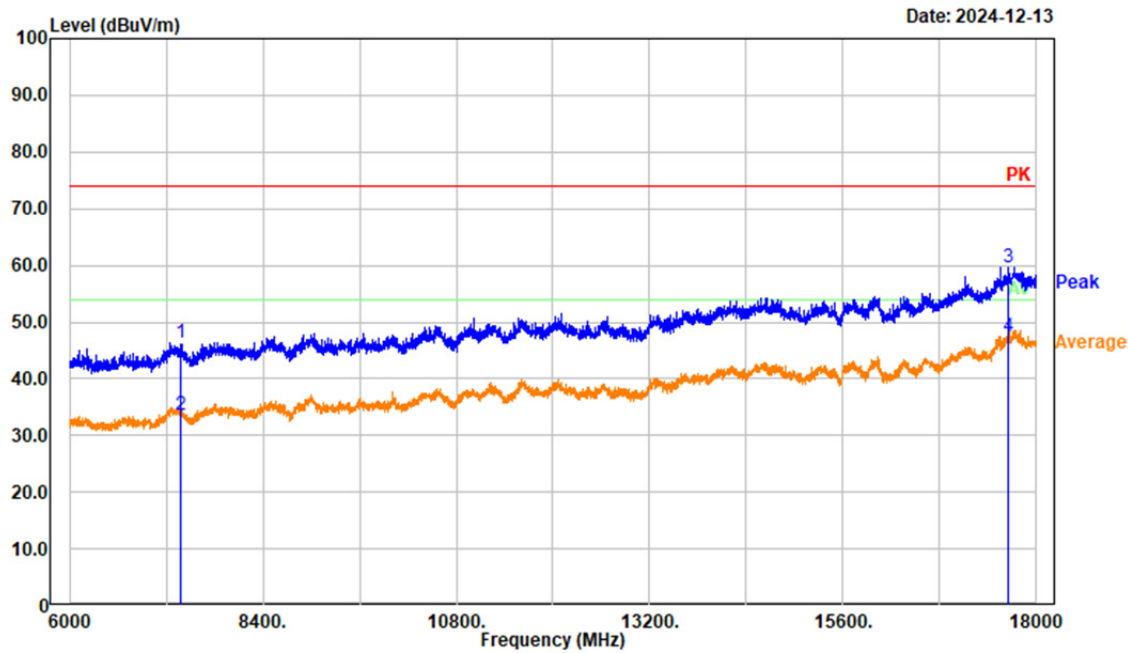


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7386.000	34.79	11.54	46.33	74.00	27.67	Peak
2	7386.000	22.11	11.54	33.65	54.00	20.35	Average
3	17656.800	34.30	25.28	59.58	74.00	14.42	Peak
4	17656.800	22.17	25.28	47.45	54.00	6.55	Average

Project No.: 2403Z107562E-RF
 Tester: Mack Huang
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: vertical
 Note: 802.11n ht20 Mode High Channel 2462MHz

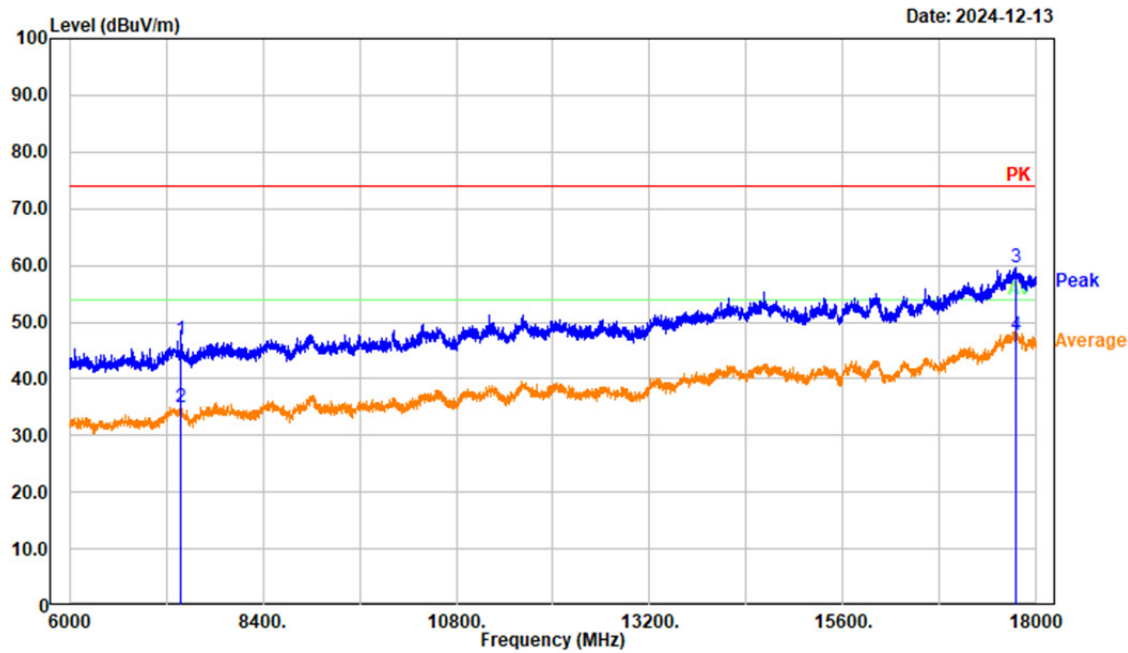


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7386.000	35.28	11.54	46.82	74.00	27.18	Peak
2	7386.000	23.35	11.54	34.89	54.00	19.11	Average
3	17738.400	33.81	25.86	59.67	74.00	14.33	Peak
4	17738.400	21.76	25.86	47.62	54.00	6.38	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: 802.11n ht40 Mode Low Channel 2422MHz

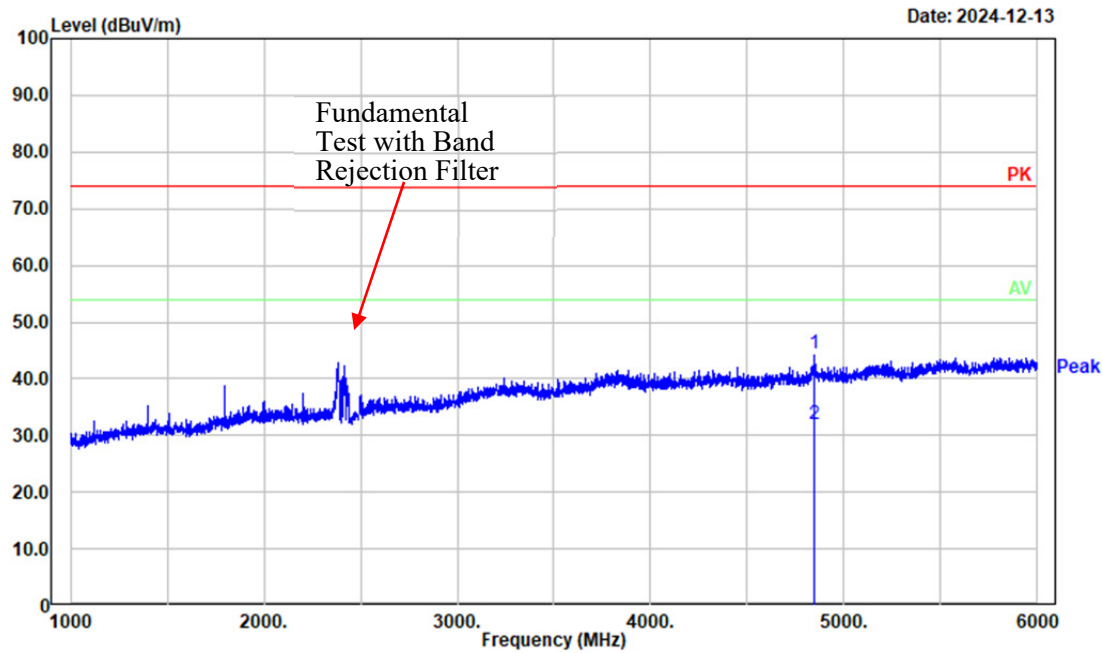


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4844.000	35.52	8.97	44.49	74.00	29.51	Peak
2	4844.000	23.11	8.97	32.08	54.00	21.92	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: 802.11n ht40 Mode Low Channel 2422MHz

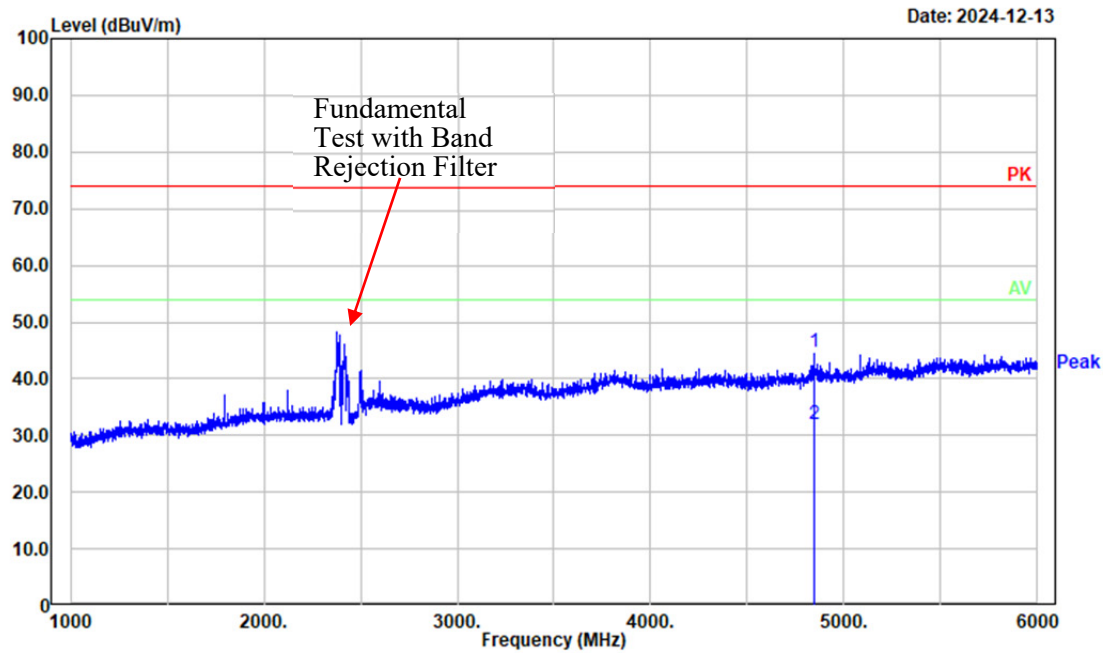


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4844.000	35.68	8.97	44.65	74.00	29.35	Peak
2	4844.000	23.07	8.97	32.04	54.00	21.96	Average

Project No.: 2403Z107562E-RF
 Tester: Mack Huang
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: 802.11n ht40 Mode Low Channel 2422MHz

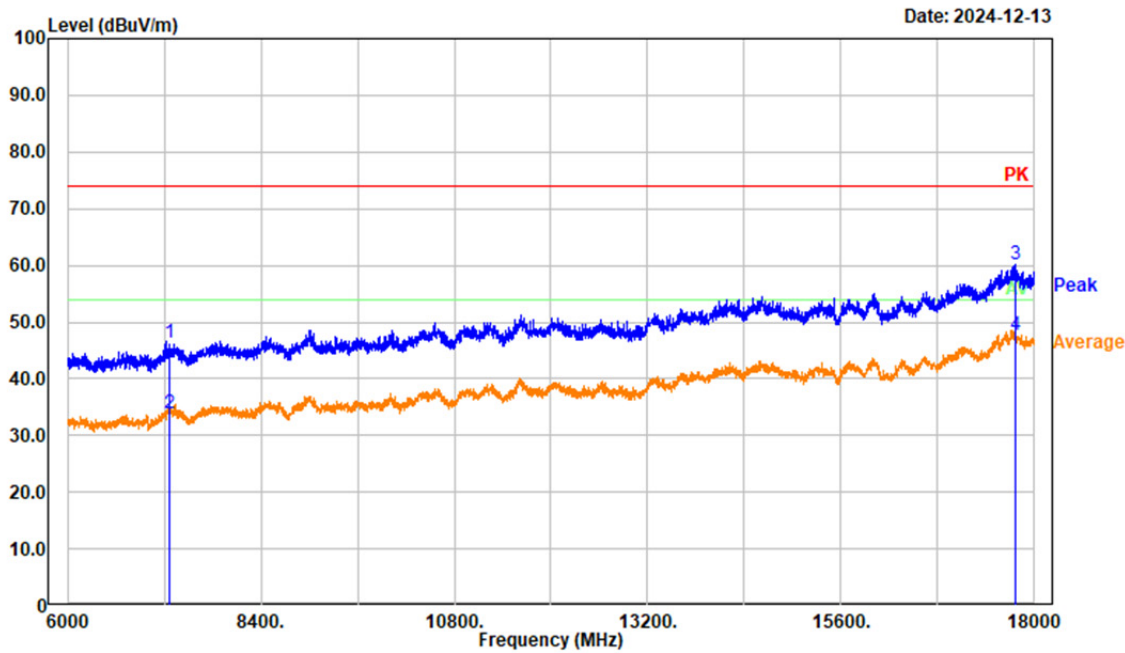


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7266.000	34.85	11.43	46.28	74.00	27.72	Peak
2	7266.000	22.44	11.43	33.87	54.00	20.13	Average
3	17755.200	34.23	25.84	60.07	74.00	13.93	Peak
4	17755.200	21.81	25.84	47.65	54.00	6.35	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: 802.11n ht40 Mode Low Channel 2422MHz

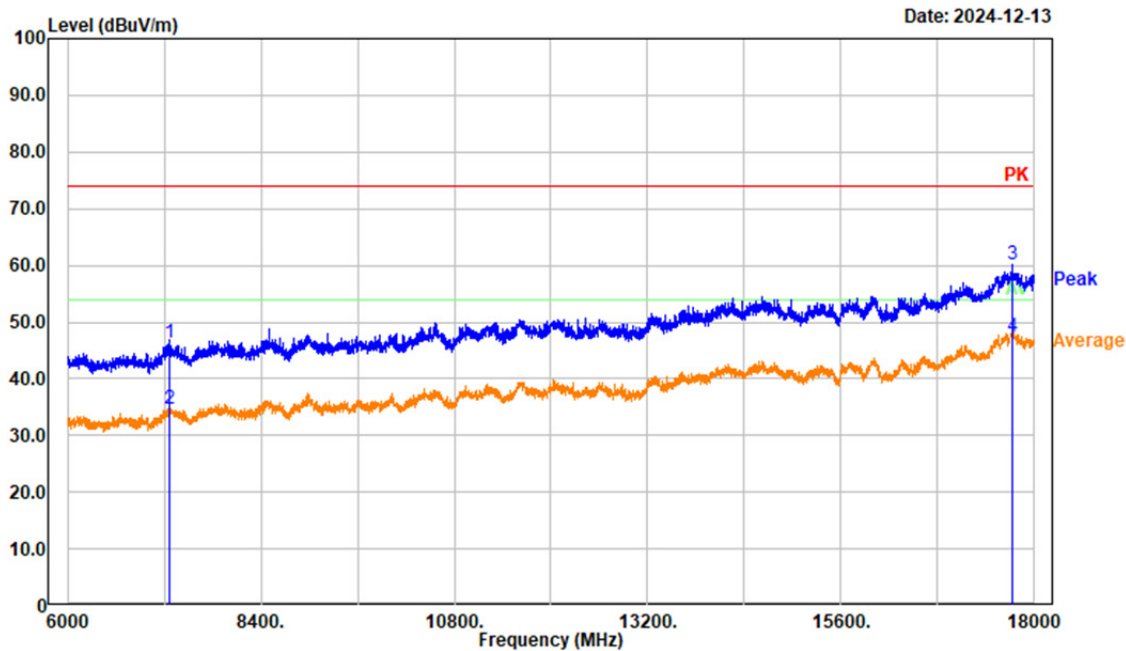


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7266.000	35.01	11.43	46.44	74.00	27.56	Peak
2	7266.000	23.30	11.43	34.73	54.00	19.27	Average
3	17726.400	34.24	25.87	60.11	74.00	13.89	Peak
4	17726.400	21.61	25.87	47.48	54.00	6.52	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: 802.11ax ht20 Mode High Channel 2462MHz

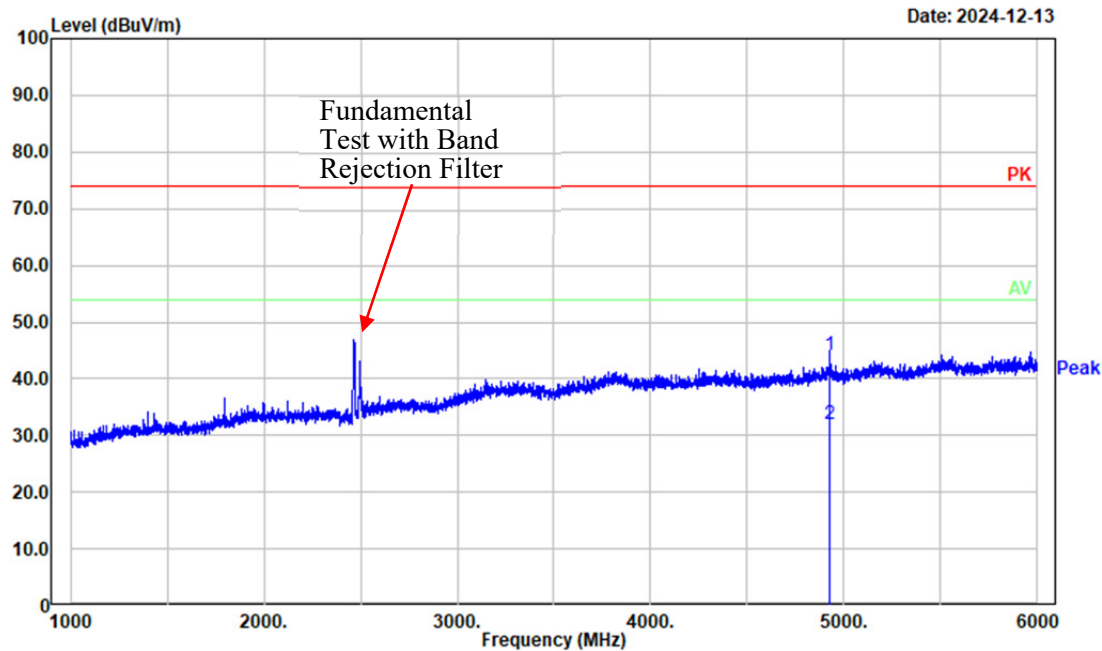


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4924.000	35.23	8.88	44.11	74.00	29.89	Peak
2	4924.000	23.11	8.88	31.99	54.00	22.01	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: 802.11ax ht20 Mode High Channel 2462MHz

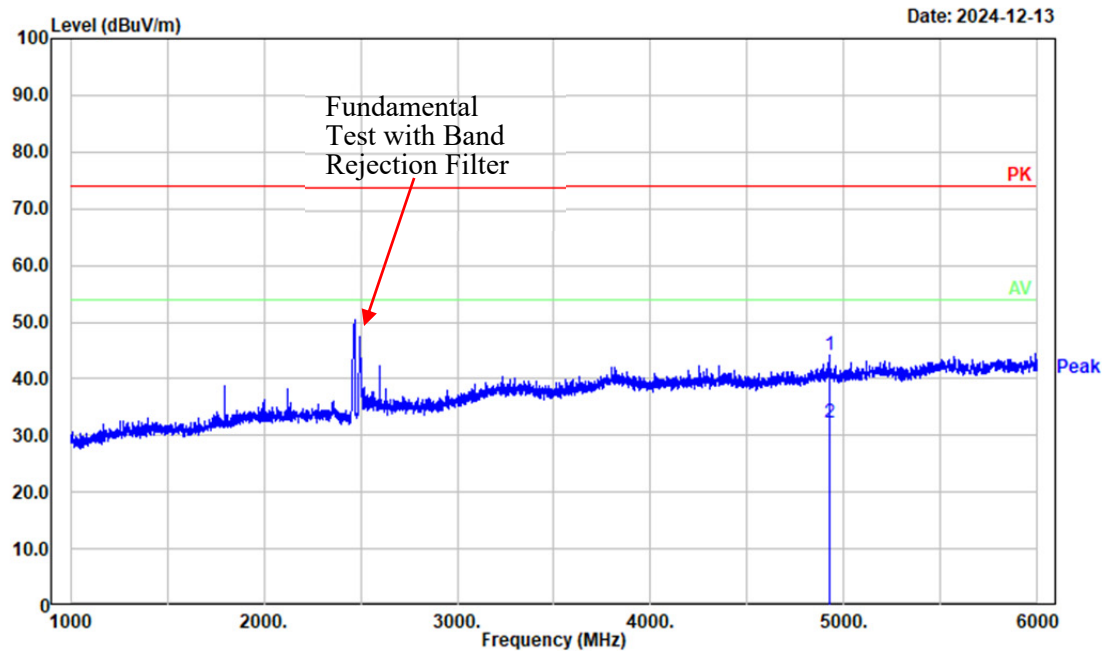


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4924.000	35.39	8.88	44.27	74.00	29.73	Peak
2	4924.000	23.45	8.88	32.33	54.00	21.67	Average

Project No.: 2403Z107562E-RF
 Tester: Mack Huang
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: 802.11ax ht20 Mode High Channel 2462MHz

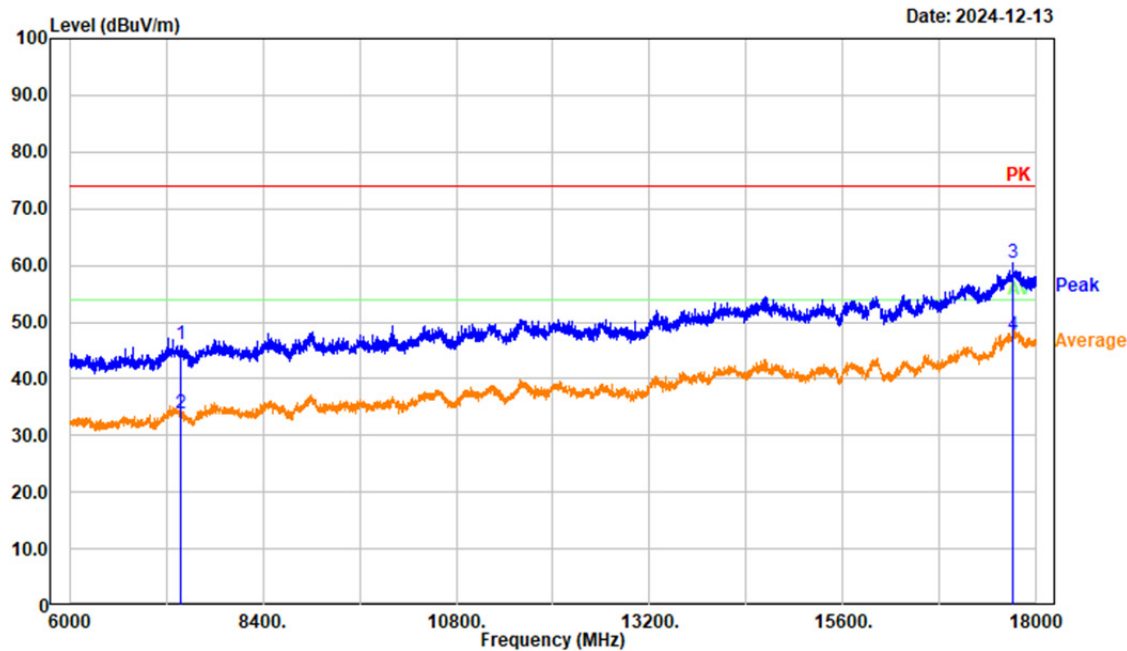


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7386.000	34.61	11.54	46.15	74.00	27.85	Peak
2	7386.000	22.20	11.54	33.74	54.00	20.26	Average
3	17709.600	34.54	25.89	60.43	74.00	13.57	Peak
4	17709.600	21.80	25.89	47.69	54.00	6.31	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: 802.11ax ht20 Mode High Channel 2462MHz

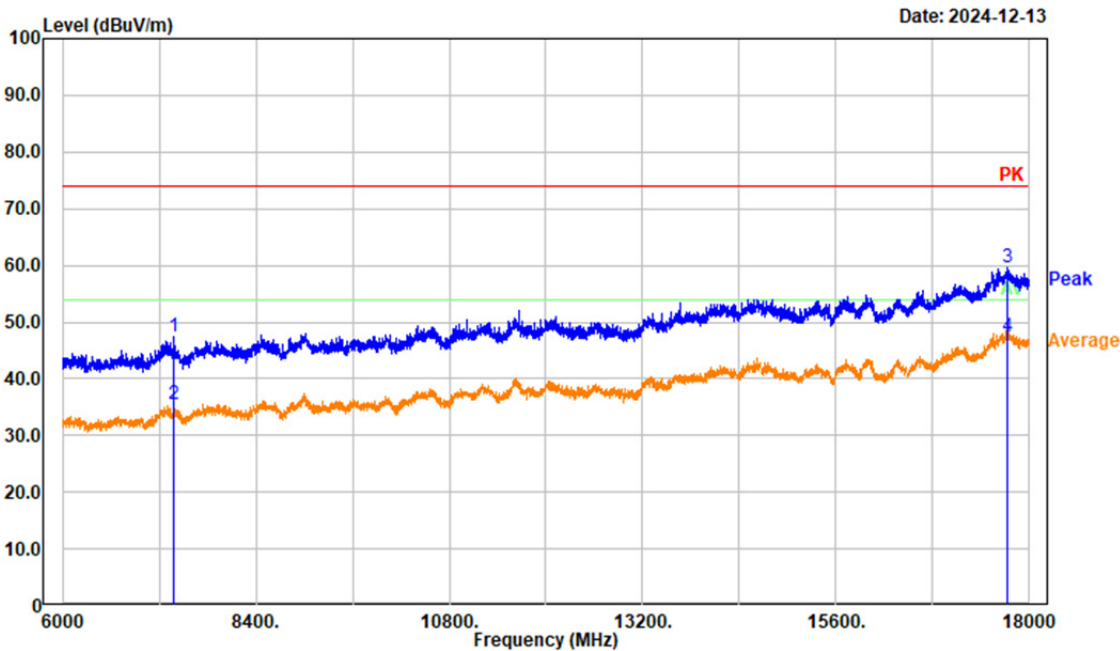


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7386.000	35.85	11.54	47.39	74.00	26.61	Peak
2	7386.000	23.94	11.54	35.48	54.00	18.52	Average
3	17721.600	33.71	25.87	59.58	74.00	14.42	Peak
4	17721.600	21.68	25.87	47.55	54.00	6.45	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: 802.11ax ht40 Mode High Channel 2452MHz

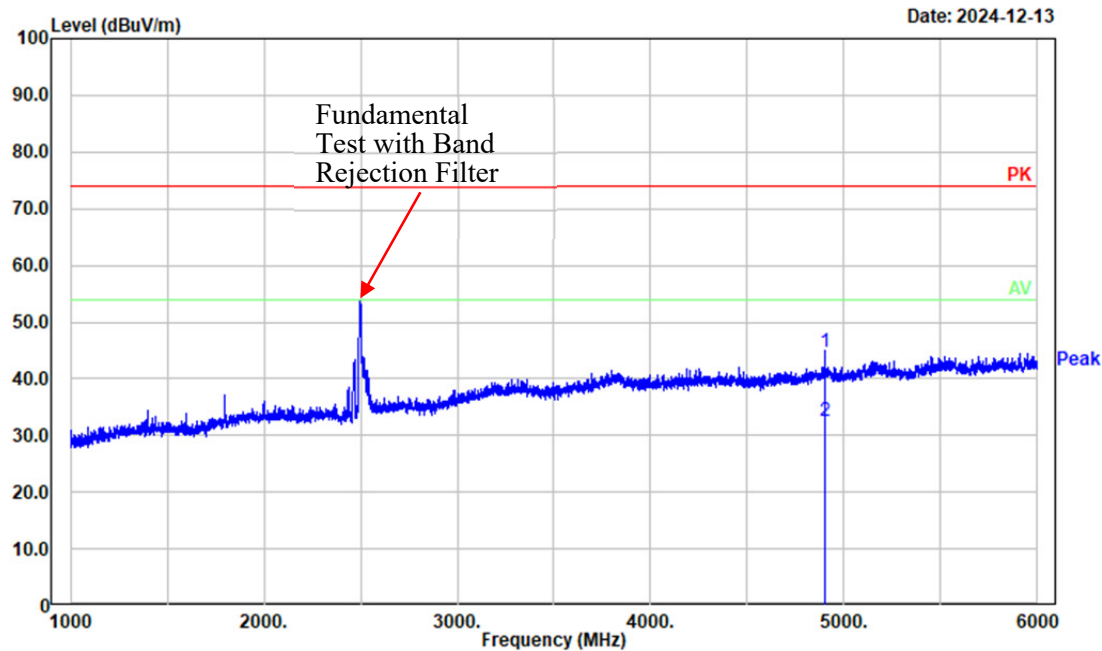


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4904.000	35.89	8.91	44.80	74.00	29.20	Peak
2	4904.000	23.64	8.91	32.55	54.00	21.45	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: 802.11ax ht40 Mode High Channel 2452MHz

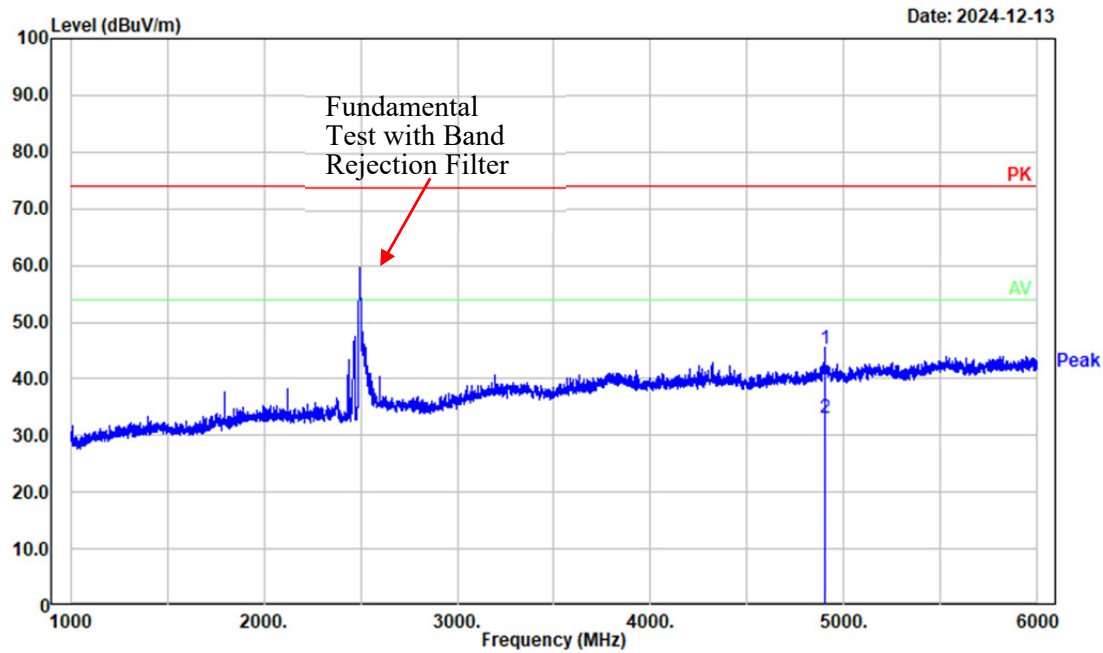


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4904.000	36.32	8.91	45.23	74.00	28.77	Peak
2	4904.000	24.12	8.91	33.03	54.00	20.97	Average

Project No.: 2403Z107562E-RF
 Tester: Mack Huang
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: 802.11ax ht40 Mode High Channel 2452MHz

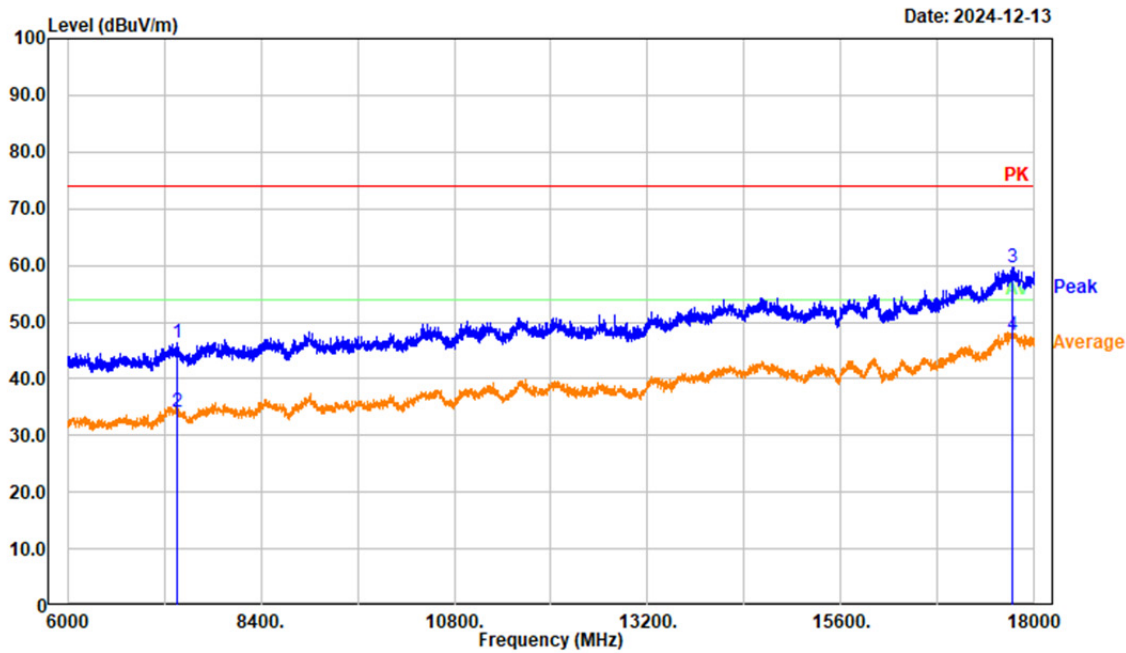

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7356.000	34.74	11.68	46.42	74.00	27.58	Peak
2	7356.000	22.35	11.68	34.03	54.00	19.97	Average
3	17724.000	33.64	25.87	59.51	74.00	14.49	Peak
4	17724.000	21.81	25.87	47.68	54.00	6.32	Average

Project No.: 2403Z107562E-RF
 Tester: Mack Huang
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: vertical
 Note: 802.11ax ht40 Mode High Channel 2452MHz

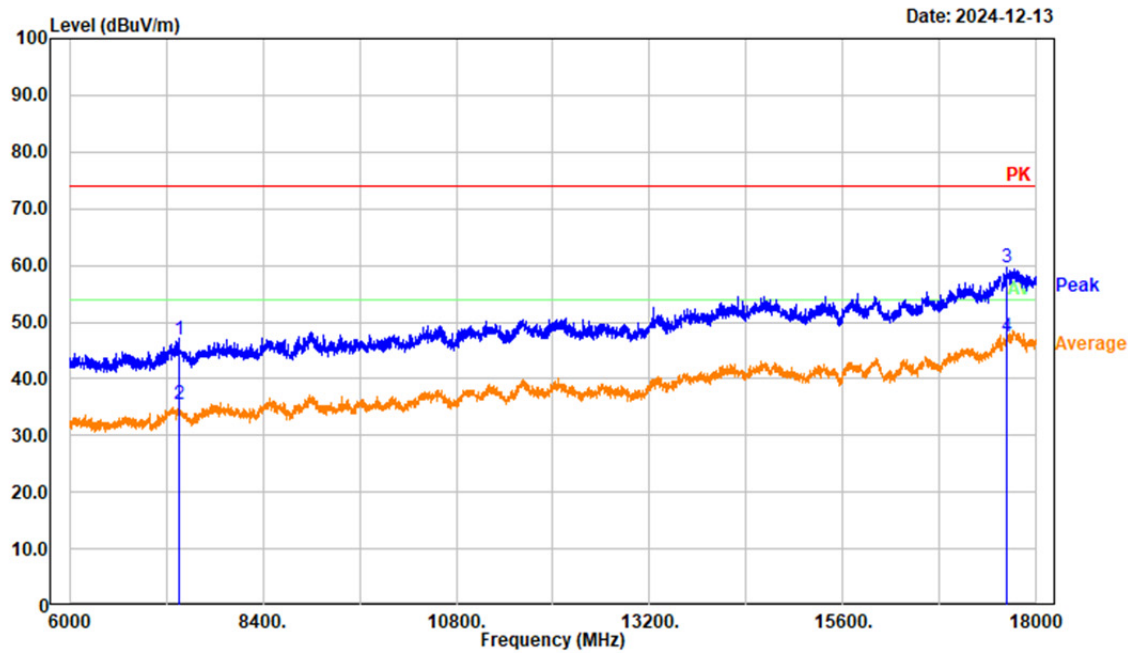

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7356.000	35.08	11.68	46.76	74.00	27.24	Peak
2	7356.000	23.69	11.68	35.37	54.00	18.63	Average
3	17623.200	34.96	24.79	59.75	74.00	14.25	Peak
4	17623.200	22.69	24.79	47.48	54.00	6.52	Average

4.3 RF Conducted Data

Please refer to Annex "2403Z107562E-RF-00C_Appendix A" for detail test data.

5. EUT PHOTOGRAPHS

Please refer to the attachment 2403Z107562E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2403Z107562E-RF-INP EUT INTERNAL PHOTOGRAPHS

6. TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2403Z107562E-RF-00C-TSP TEST SETUP PHOTOGRAPHS.

==== END OF REPORT ====