



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / [www.sporton.com.tw](http://www.sporton.com.tw)

## FCC RADIO TEST REPORT

Applicant's company	Realtek Semiconductor Corp.
Applicant Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan
FCC ID	TX2-RTL8821AE
Manufacturer's company	Realtek Semiconductor Corp.
Manufacturer Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

Product Name	802.11a/b/g/n/ac RTL8821AE Combo module
Brand Name	REALTEK
Model Name	RTL8821AE
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Apr. 26, 2013
Final Test Date	Jun. 21, 2013
Submission Type	Original Equipment

### Statement

**Test result included is only for the Bluetooth BR/EDR part of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies .....	5
3.5. Table for Test Modes .....	6
3.6. Table for Testing Locations.....	8
3.7. Table for Supporting Units .....	9
3.8. Table for Parameters of Test Software Setting .....	10
3.9. EUT Operation during Test .....	10
3.10. Test Configurations .....	11
<b>4. TEST RESULT .....</b>	<b>15</b>
4.1. AC Power Line Conducted Emissions Measurement.....	15
4.2. Maximum Conducted Output Power Measurement.....	19
4.3. Hopping Channel Separation Measurement .....	21
4.4. Number of Hopping Frequency Measurement.....	32
4.5. Dwell Time Measurement.....	34
4.6. Radiated Emissions Measurement .....	41
4.7. Emissions Measurement .....	65
4.8. Antenna Requirements .....	83
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>84</b>
<b>6. TEST LOCATION.....</b>	<b>86</b>
<b>7. MEASUREMENT UNCERTAINTY.....</b>	<b>87</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A11</b>
<b>APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE .....</b>	<b>B1 ~ B4</b>
<b>APPENDIX C. CO-LOCATION REPORT.....</b>	<b>C1 ~ C13</b>
<b>APPENDIX D. ANTENNA LIST</b>	


## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR342603AC	Rev. 01	Initial issue of report	Jul. 02, 2013

## 1. CERTIFICATE OF COMPLIANCE

Product Name : 802.11a/b/g/n/ac RTL8821AE Combo module  
Brand Name : REALTEK  
Model No. : RTL8821AE  
Applicant : Realtek Semiconductor Corp.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Apr. 26, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	10.97 dB
4.2	15.247(b)(1)	Maximum Conducted Output Power	Complies	13.11 dB
4.3	15.247(a)(1)	Hopping Channel Separation	Complies	-
4.4	15.247(b)(1)	Number of Hopping Frequency	Complies	-
4.5	15.247(a)(1)	Dwell Time	Complies	-
4.6	15.247(d)	Radiated Emissions	Complies	4.78 dB
4.7	15.247(d)	Band Edge Emissions	Complies	5.60 dB
4.8	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Power Type	From host system
Modulation	FHSS (GFSK / $\pi/4$ -DQPSK / 8DPSK)
Data Rate (Mbps)	GFSK: 1 ; $\pi/4$ -DQPSK: 2 ; 8DPSK: 3
Frequency Range	2400 ~ 2483.5MHz
Channel Number	79
Channel Band Width (99%)	BR-1Mbps: 0.9240 MHz EDR-2Mbps: 1.2080 MHz EDR-3Mbps: 1.1840 MHz
Maximum Conducted Output Power	BR-1Mbps: 7.89 dBm EDR-2Mbps: 7.12 dBm EDR-3Mbps: 7.08 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3
Note 1: Bluetooth BR uses a combination of GFSK (1Mbps).	
Note 2: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps).	

#### 3.2. Accessories

N/A

### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	LYNwave	ALA110-222050-300011	PIFA Antenna	I-PEX MHF4	3.5	5.0
2	LYNwave	ALA110-222050-300010	PIFA Antenna	I-PEX	3.5	5.0
3	JOYMAX	TWF-614XMPXX-500	Dipole Antenna	I-PEX	3.0	5.0
4	Realtek	PANT-001	SLOT Antenna	I-PEX	3.33	4.52
5	Realtek	PANT-002	SLOT Antenna	I-PEX MHF4	3.33	4.52

There are six configurations of EUT. The more information is listed as below table.

Configuration	Type	Power Type	Antenna Variety	Type of Antenna
1	HMC	PCI-E	Diversity	PIFA with I-PEX connector
				Dipole with I-PEX connector
				SLOT with I-PEX connector
2	HMC	PCI-E	Fixed	PIFA with I-PEX connector
				Dipole with I-PEX connector
				SLOT with I-PEX connector
3	NGFF	PCI-E	Diversity	PIFA with I-PEX MHF4 connector
				SLOT with I-PEX MHF4 connector
4	NGFF	SDIO	Diversity	PIFA with I-PEX MHF4 connector
				SLOT with I-PEX MHF4 connector
5	NGFF	PCI-E	Fixed	PIFA with I-PEX MHF4 connector
				SLOT with I-PEX MHF4 connector
6	NGFF	SDIO	Fixed	PIFA with I-PEX MHF4 connector
				SLOT with I-PEX MHF4 connector

Note: The more detail information of diversity type and fixed type is listed as below.

**For diversity type: (Both of those two antenna connectors can be used.)**

**<For 2.4GHz Band:>**

The EUT supports the antenna with TX/RX diversity function for 2.4GHz WLAN and Bluetooth, but only one of them will be used at the same time.

Base on WLAN's operation mode to select the other antenna to work.

(Ex. Assume Main port was selected to conduct transmitting function in 2.4GHz WLAN, so AUX port was selected in Bluetooth Mode. Vice versa.)

**<For 5GHz Band:>**

The EUT supports the antenna with TX/RX diversity function for 5GHz WLAN and Bluetooth, and both them can transmit and receive signal simultaneously.

#### For WLAN function (1TX, 1RX):

Both of Chain 1 and Chain 2 can be used as transmitting/receiving functions, but only one antenna can be used as transmitting/receiving functions at the same time.

Chain 1 generated the worst case than Chain 2, so it is tested and recorded in the report.

#### For Bluetooth function (1TX, 1RX):

Both of Chain 1 and Chain 2 can be used as transmitting/receiving functions, but only one antenna can be used as transmitting/receiving functions at the same time.

Chain 1 generated the worst case than Chain 2, so it is tested and recorded in the report.

**For fixed type: (Chain 1 is designated for 2.4GHz WLAN function, Chain 2 is designated for 5GHz WLAN and Bluetooth Functions.)**

#### For 2.4GHz WLAN function (1TX, 1RX):


Only Chain 1 can be used as transmitting/receiving functions.

#### For 5GHz WLAN function (1TX, 1RX):

Only Chain 2 can be used as transmitting/receiving functions.

#### For Bluetooth function (1TX, 1RX):

Only Chain 2 can be used as transmitting/receiving functions.

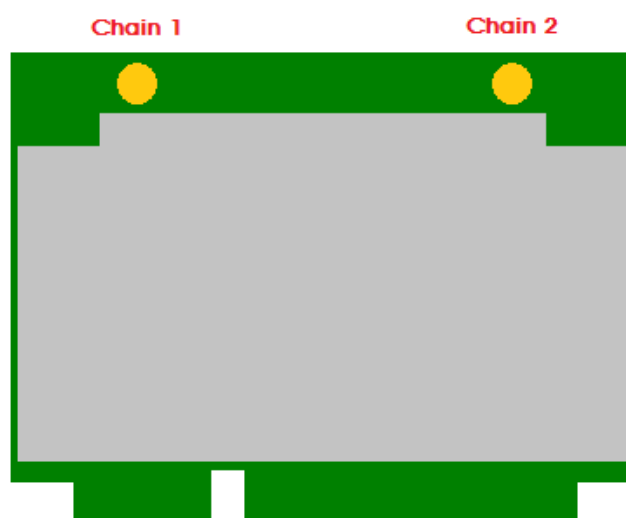

### 3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	0	2402 MHz	40	2442 MHz
	1	2403 MHz	:	:
	:	:	77	2479 MHz
	38	2440 MHz	78	2480 MHz
	39	2441 MHz	-	-



### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Chain
AC Power Conducted Emissions	Normal Link		-	-	-
Maximum Conducted Output Power	BR-1Mbps	GFSK	1 Mbps	0/39/78	1
	EDR-2Mbps	$\pi/4$ -DQPSK	2 Mbps		
	EDR-3Mbps	8DPSK	3 Mbps		
Hopping Channel Separation	BR-1Mbps	GFSK	1 Mbps	0~1/	1
	EDR-2Mbps	$\pi/4$ -DQPSK	2 Mbps	39~40/	
	EDR-3Mbps	8DPSK	3 Mbps	77~78	
Number of Hopping Frequency	BR-1Mbps	GFSK	1 Mbps	0~78	1
Dwell Time	EDR-3Mbps	3DH1/3DH3/3DH5	1 Mbps	0/39/78	1
Radiated Emissions Below 1GHz	Normal Link		-	-	-
Radiated Emissions Above 1GHz	BR-1Mbps	GFSK	1 Mbps	0/39/78	1
	EDR-3Mbps	8DPSK	3 Mbps		
Band Edge Emissions	BR-1Mbps	GFSK	1 Mbps	0/39/78	1
	EDR-3Mbps	8DPSK	3 Mbps		

The following test modes were performed for all tests:

#### For Conducted Emission test:

The mode “diversity + SLOT antenna” has been evaluated to be the worst case for Radiated emission below 1GHz test.

Consequently, measurement for Conducted emission test will follow this same test mode.

Mode 1. HMC + PCI-E + Diversity + SLOT antenna (I-PEX connector)

Mode 2. NGFF + PCI-E + Diversity + SLOT antenna (I-PEX MHF4 connector)

Mode 3. NGFF + SDIO + Diversity + SLOT antenna (I-PEX MHF4 connector)

Mode 2 is found as the worst case among Mode 1 ~ Mode 3, so it was recorded in the report.

**For Radiated Emission below 1GHz test:**

Mode 1. HMC + PCI-E + Diversity + SLOT antenna (I-PEX connector)

Mode 2. HMC + PCI-E + Fixed + SLOT antenna (I-PEX connector)

Mode 1 is found as the worse case between Mode 1 and Mode 2, thus the measurement (Diversity type) for Mode 3 ~ Mode 8 will follow this same test mode.

Mode 3. HMC + PCI-E + Diversity + PIFA antenna (I-PEX connector)

Mode 4. HMC + PCI-E + Diversity + Dipole antenna (I-PEX connector)

Mode 5. NGFF + SDIO + Diversity + SLOT antenna (I-PEX MHF4 connector)

Mode 6. NGFF + PCI-E + Diversity + SLOT antenna (I-PEX MHF4 connector)

Mode 7. NGFF + SDIO + Diversity + PIFA antenna (I-PEX MHF4 connector)

Mode 8. NGFF + PCI-E + Diversity + PIFA antenna (I-PEX MHF4 connector)

Mode 1 is the worst case, so it was selected to record in this test report.

**For Radiated Emission above 1GHz test:**

Mode 1. HMC + PCI-E + Diversity + SLOT antenna (I-PEX connector)

Mode 2. HMC + PCI-E + Fixed + SLOT antenna (I-PEX connector)

Mode 3. NGFF + PCI-E + Diversity + SLOT antenna (I-PEX MHF4 connector)

Mode 4. NGFF + SDIO + Diversity + SLOT antenna (I-PEX MHF4 connector)

Mode 5. NGFF + PCI-E + Fixed + SLOT antenna (I-PEX MHF4 connector)

Mode 6. NGFF + SDIO + Fixed + SLOT antenna (I-PEX MHF4 connector)

Mode 7. HMC + PCI-E + Diversity + PIFA antenna (I-PEX connector)

Mode 8. HMC + PCI-E + Fixed + PIFA antenna (I-PEX connector)

Mode 9. NGFF + PCI-E + Diversity + PIFA antenna (I-PEX MHF4 connector)

Mode 10. NGFF + SDIO + Diversity + PIFA antenna (I-PEX MHF4 connector)

Mode 11. NGFF + PCI-E + Fixed + PIFA antenna (I-PEX MHF4 connector)

Mode 12. NGFF + SDIO + Fixed + PIFA antenna (I-PEX MHF4 connector)

Mode 13. HMC + PCI-E + Diversity + Dipole antenna (I-PEX connector)

Mode 14. HMC + PCI-E + Fixed + Dipole antenna (I-PEX connector)

Mode 3, Mode 9 and Mode 13 generated the worst test result, so these three modes were recorded in the report.

**For Other Tests:**

After pre-testing, the mode "Configuration 3 + SLOT antenna" has been evaluated to be the worst case for Conducted output power test.

Therefore, it was selected to perform other test items and record in the report.

Mode 1. NGFF + PCI-E + Diversity + SLOT antenna (I-PEX MHF4 connector)

### For Co-location Test:

The mode "PCI-E + diversity" has been evaluated to be the worst case for Radiated emission above 1GHz test.

Consequently, measurement for Co-location test will follow this same test mode.

Mode 1. NGFF + PCI-E + Diversity + SLOT antenna (I-PEX MHF4 connector) / 2.4GHz WLAN + Bluetooth

Mode 2. NGFF + PCI-E + Diversity + SLOT antenna (I-PEX MHF4 connector) / 5GHz WLAN + Bluetooth

Mode 3. NGFF + PCI-E + Diversity + PIFA antenna (I-PEX MHF4 connector) / 2.4GHz WLAN + Bluetooth

Mode 4. NGFF + PCI-E + Diversity + PIFA antenna (I-PEX MHF4 connector) / 5GHz WLAN + Bluetooth

Mode 5. HMC + PCI-E + Diversity + Dipole antenna (I-PEX connector) / 2.4GHz WLAN + Bluetooth

Mode 6. HMC + PCI-E + Diversity + Dipole antenna (I-PEX connector) / 5GHz WLAN + Bluetooth

All the test result were recorded in the report.

The EUT could be applied with WLAN function and Bluetooth function; therefore Maximum Permissible Exposure (Please refer to Appendix B) and Co-location (please refer to Appendix C) tests are added for simultaneously transmit between WLAN function and Bluetooth function.

### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

#### Test Site: CO01-CB

Support Unit	Brand	Model	FCC ID
Wireless AP	Planex	GW-AP54SGX	N/A
Notebook	DELL	E6430	QDS-BRCM1049LE
Notebook	DELL	E6220	QDS-BRCM1049LE
Mouse	Logitech	M-U0026	DoC
Earphone	SHYARO CHI	MIC-04	N/A
Test Fixture (For HMC type)	REALTEK	PCIE Adapter	N/A
Test Fixture (For NGFF type)	REALTEK	PCIE & SDIO Adapter	N/A

#### Test Site: 03CH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	QDS-BRCM1049LE
Mouse	Logitech	M-U0026	DoC
Earphone	E-BOOKI	E-EPC040	N/A
Wireless AP	Planex	GW-AP54SGX	N/A
Notebook	DELL	E6430	QDS-BRCM1049LE
Test Fixture (For HMC type)	REALTEK	PCIE Adapter	N/A
Test Fixture (For NGFF type)	REALTEK	PCIE & SDIO Adapter	N/A

#### Test Site: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6220	D2A62L1989V5
Test Fixture (For HMC type)	REALTEK	PCIE Adapter	N/A
Test Fixture (For NGFF type)	REALTEK	PCIE & SDIO Adapter	N/A

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of Bluetooth

For BR-1Mbps / GFSK:

Test Software Version	Realtek Bluetooth MP v2.862 --- RTL8821a		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	Default	Default	Default

For EDR-2Mbps /  $\pi/4$ -DQPSK:

Test Software Version	Realtek Bluetooth MP v2.862 --- RTL8821a		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	Default	Default	Default

For EDR-3Mbps / 8DPSK:

Test Software Version	Realtek Bluetooth MP v2.862 --- RTL8821a		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	Default	Default	Default


### 3.9. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 3.10. Test Configurations

#### 3.10.1.AC Power Line Conduction Emissions Test Configuration

Test Mode: Mode 2

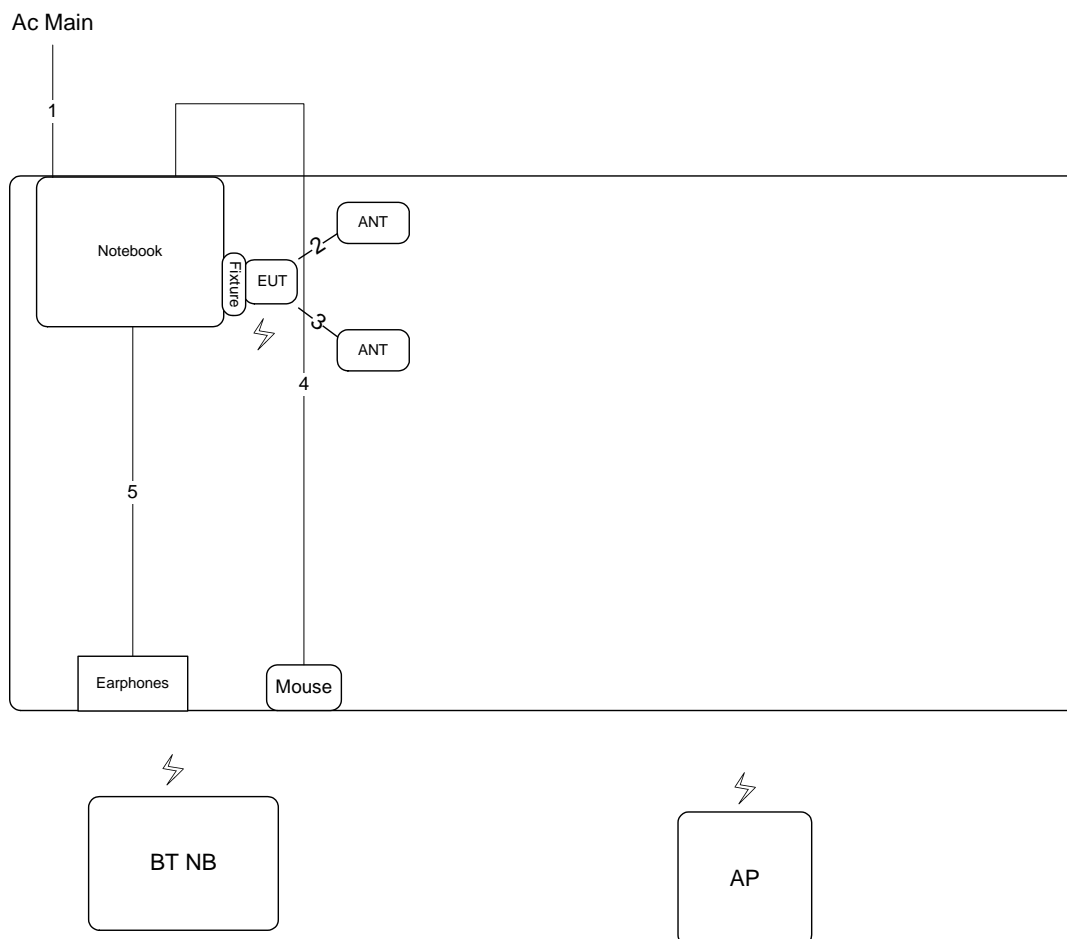


Item	Connection	Shield	Length	Remark
1	Power cable	No	2.6m	-
2	ANT cable	Yes	0.3m	-
3	ANT cable	Yes	0.3m	-
4	USB cable	No	1.8m	-
5	Audio cable	No	1.1m	-

### 3.10.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz


Test Mode: Mode 1

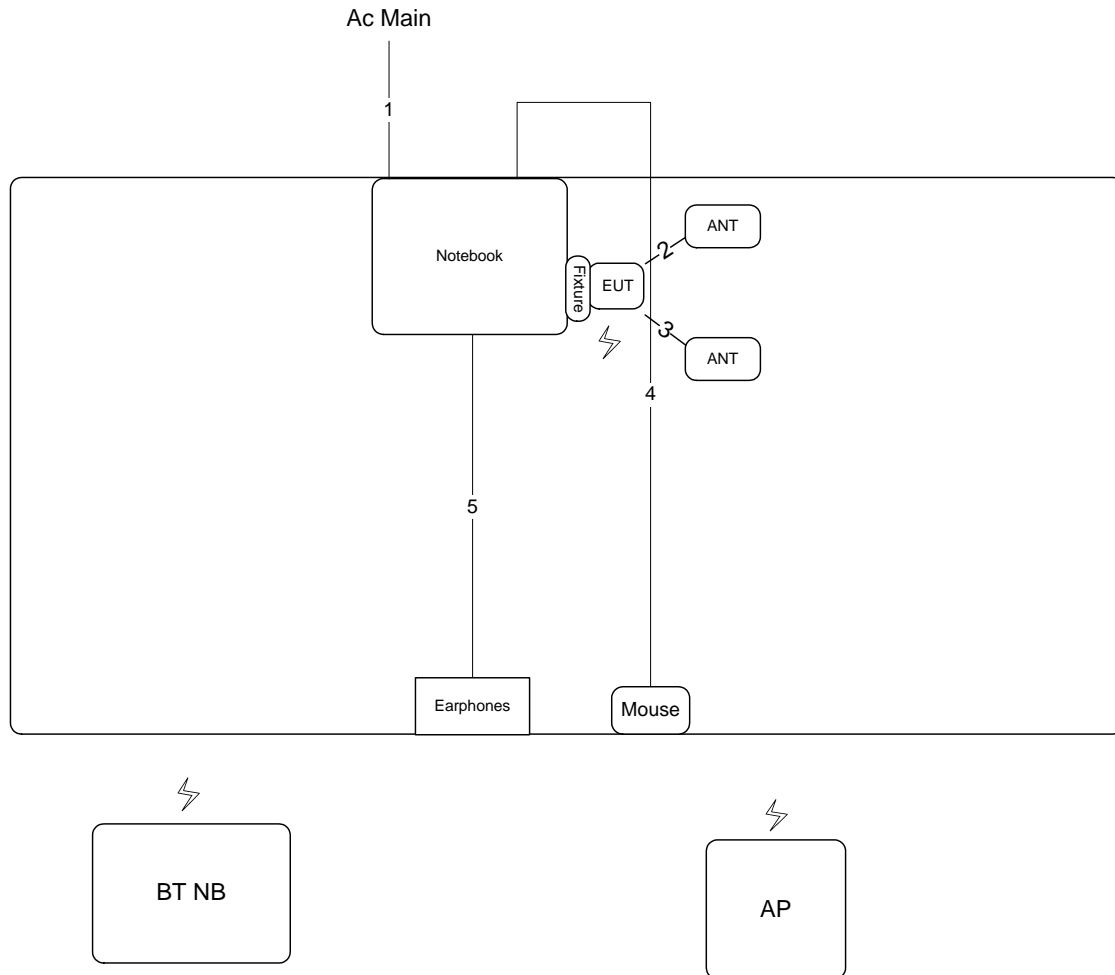

Item	Connection	Shield	Length	Remark
1	Power cable	No	2.6m	-
2	ANT cable	Yes	0.3m	-
3	ANT cable	Yes	0.3m	-
4	USB cable	No	1.8m	-
5	Audio cable	No	1.1m	-

Test Configuration: Radiated emission above 1GHz

Test Mode: Mode 3 / Mode 9

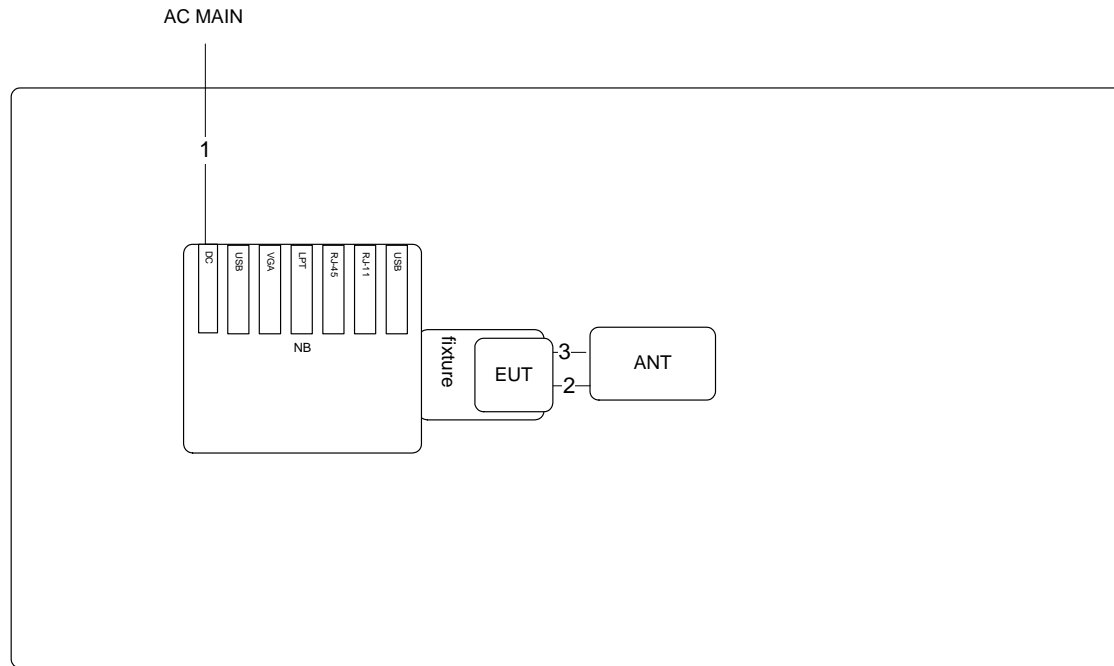


Item	Connection	Shield	Length	Remark
1	Power cable	No	2.6m	-
2	ANT cable	No	0.3m	-
3	ANT cable	No	0.3m	-



Test Configuration: Radiated emission above 1GHz

Test Mode: Mode 13

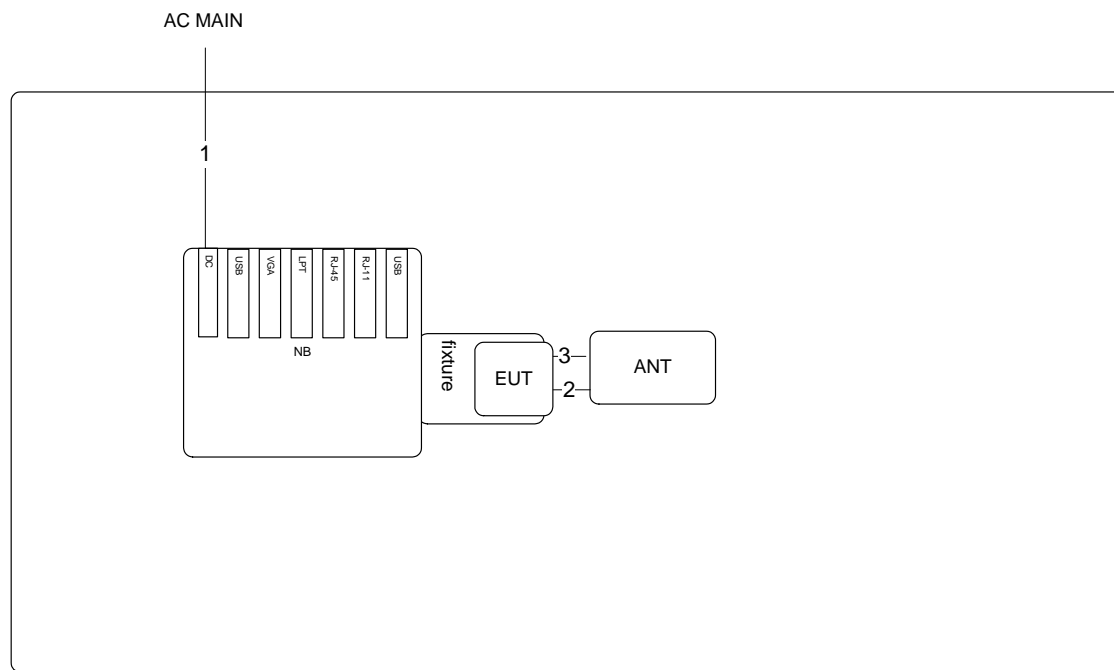

Item	Connection	Shield	Length	Remark
1	Power cable	No	2.6m	-
2	ANT cable	No	0.18m	-
3	ANT cable	No	0.18m	-

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

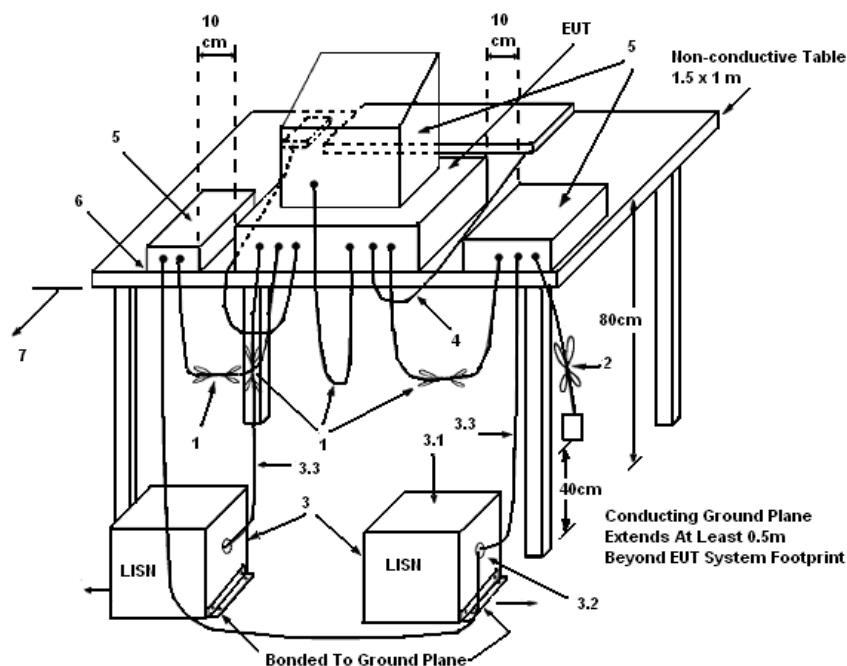

**LEGEND:**

(1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

(2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

(3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.

(3.1) All other equipment powered from additional LISN(s).

(3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.

(3.3) LISN at least 80 cm from nearest part of EUT chassis.

(4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.

(5) Non-EUT components of EUT system being tested.

(6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.

(7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	60%
Test Engineer	Kane Liu	Phase	Line
Configuration	Normal Link	Test Mode	Mode 2

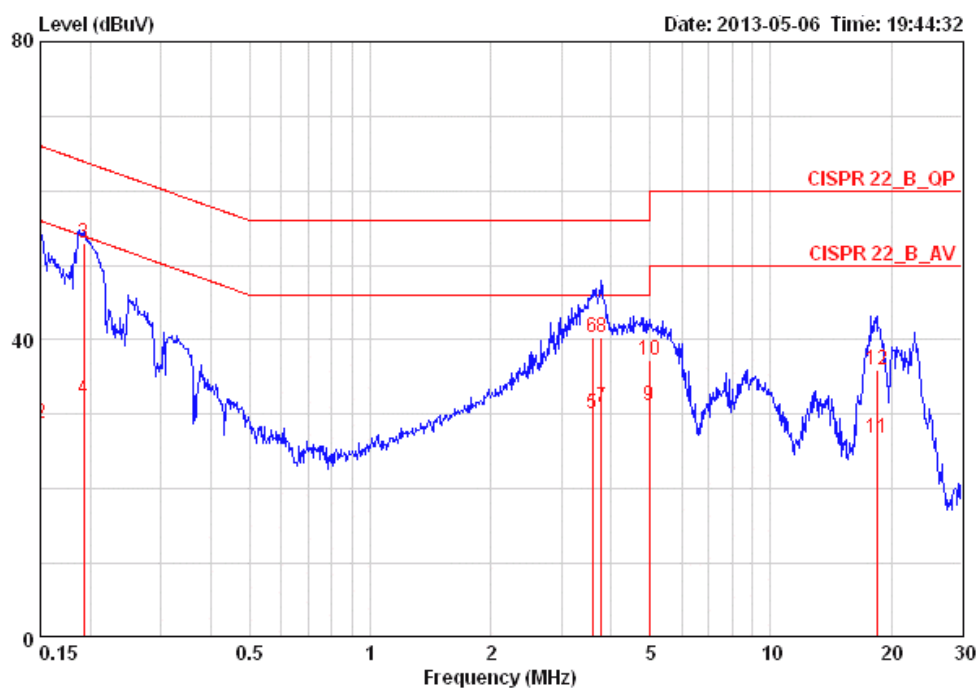

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15000	45.07	-20.93	66.00	44.73	0.16	0.18	LINE	QP
2	0.15000	28.87	-27.13	56.00	28.53	0.16	0.18	LINE	AVERAGE
3	0.19242	52.96	-10.97	63.93	52.61	0.15	0.20	LINE	QP
4	0.19242	32.06	-21.87	53.93	31.71	0.15	0.20	LINE	AVERAGE
5	3.584	30.19	-15.81	46.00	29.69	0.21	0.28	LINE	AVERAGE
6	3.584	40.30	-15.70	56.00	39.80	0.21	0.28	LINE	QP
7	3.779	30.86	-15.14	46.00	30.35	0.22	0.29	LINE	AVERAGE
8	3.779	40.36	-15.64	56.00	39.85	0.22	0.29	LINE	QP
9	4.978	31.14	-14.86	46.00	30.58	0.24	0.32	LINE	AVERAGE
10	4.978	37.27	-18.73	56.00	36.71	0.24	0.32	LINE	QP
11	18.426	26.90	-23.10	50.00	25.95	0.46	0.49	LINE	AVERAGE
12	18.426	36.01	-23.99	60.00	35.06	0.46	0.49	LINE	QP

Temperature	25°C	Humidity	60%
Test Engineer	Kane Liu	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 2

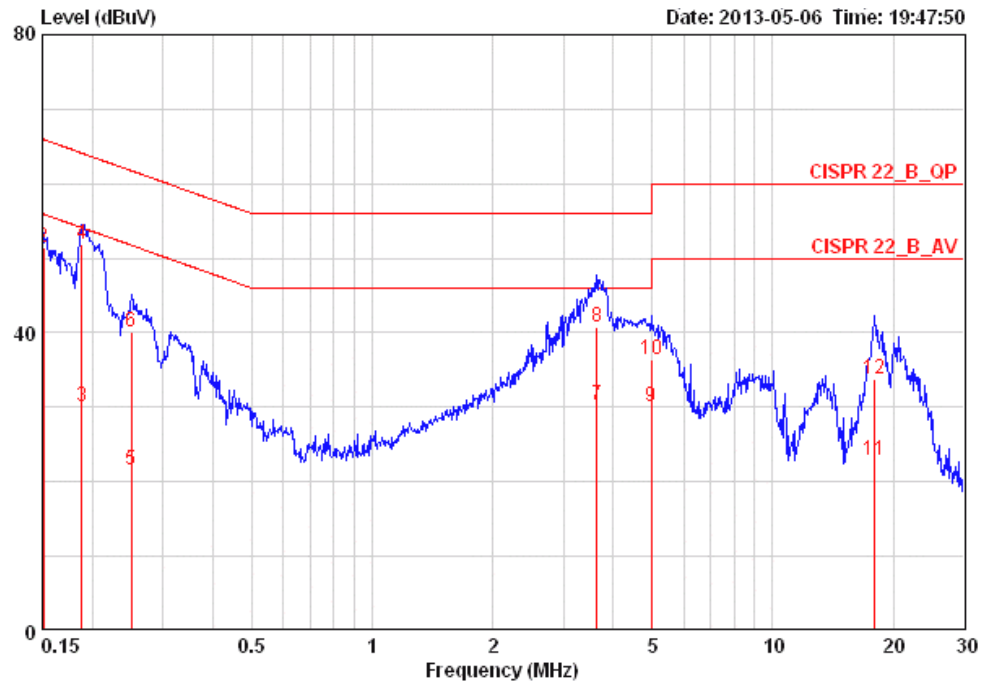

	Freq	Level	Over	Limit	Read	LISN	Cable		
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15080	32.19	-23.77	55.96	31.93	0.08	0.18	NEUTRAL	AVERAGE
2	0.15080	51.40	-14.56	65.96	51.14	0.08	0.18	NEUTRAL	QP
3	0.18838	30.12	-23.99	54.11	29.84	0.08	0.20	NEUTRAL	AVERAGE
4	0.18838	51.89	-12.22	64.11	51.61	0.08	0.20	NEUTRAL	QP
5	0.25078	21.57	-30.16	51.73	21.29	0.08	0.20	NEUTRAL	AVERAGE
6	0.25078	40.21	-21.52	61.73	39.93	0.08	0.20	NEUTRAL	QP
7	3.642	30.28	-15.72	46.00	29.87	0.13	0.28	NEUTRAL	AVERAGE
8	3.642	40.69	-15.31	56.00	40.28	0.13	0.28	NEUTRAL	QP
9	4.978	30.11	-15.89	46.00	29.64	0.15	0.32	NEUTRAL	AVERAGE
10	4.978	36.37	-19.63	56.00	35.90	0.15	0.32	NEUTRAL	QP
11	17.944	22.89	-27.11	50.00	22.05	0.36	0.48	NEUTRAL	AVERAGE
12	17.944	33.77	-26.23	60.00	32.93	0.36	0.48	NEUTRAL	QP

Note: Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, the limit for peak output power is 1Watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts (21dBm). The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

### 4.2.3. Test Procedures

This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout



### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	GFSK, $\pi/4$ -DQPSK, 8DPSK
Test Mode	Mode 1	Test Date	May 30, 2013

##### For BR-1Mbps / GFSK:

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	7.89	21.00	Complies
39	2441 MHz	7.46	21.00	Complies
78	2480 MHz	6.64	21.00	Complies

##### For EDR-2Mbps / $\pi/4$ -DQPSK:

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	7.12	21.00	Complies
39	2441 MHz	6.69	21.00	Complies
78	2480 MHz	6.02	21.00	Complies

##### For EDR-3Mbps / 8DPSK:

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	7.08	21.00	Complies
39	2441 MHz	6.65	21.00	Complies
78	2480 MHz	6.00	21.00	Complies

### 4.3. Hopping Channel Separation Measurement

#### 4.3.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VBW	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilized for 20 dB bandwidth measurement.
3. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilized for channel separation measurement.

#### 4.3.4. Test Setup Layout

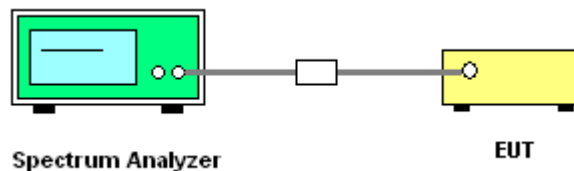

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



#### 4.3.7. Test Result of Hopping Channel Separation

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	GFSK, $\pi/4$ -DQPSK, 8DPSK
Test Mode	Mode 1		

For BR-1Mbps / GFSK:

Frequency	Ch. Separation (MHz)	20dB Bandwidth (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
2402 MHz	1.00	1.0320	0.9200	0.688	Complies
2441 MHz	1.00	1.0400	0.9240	0.693	Complies
2480 MHz	1.00	1.0320	0.9200	0.688	Complies

Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth

For EDR-2Mbps /  $\pi/4$ -DQPSK:

Frequency	Ch. Separation (MHz)	20dB Bandwidth (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
2402 MHz	1.00	1.3560	1.2080	0.904	Complies
2441 MHz	1.00	1.3560	1.2040	0.904	Complies
2480 MHz	1.00	1.3600	1.2040	0.907	Complies


Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth

For EDR-3Mbps / 8DPSK:

Frequency	Ch. Separation (MHz)	20dB Bandwidth (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
2402 MHz	1.00	1.2960	0.864	1.1840	Complies
2441 MHz	1.00	1.2960	0.864	1.1800	Complies
2480 MHz	1.00	1.2960	0.864	1.1800	Complies


Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth

### 20 dB Bandwidth Plot on BR-1Mbps / GFSK / Channel 0 / 2402 MHz

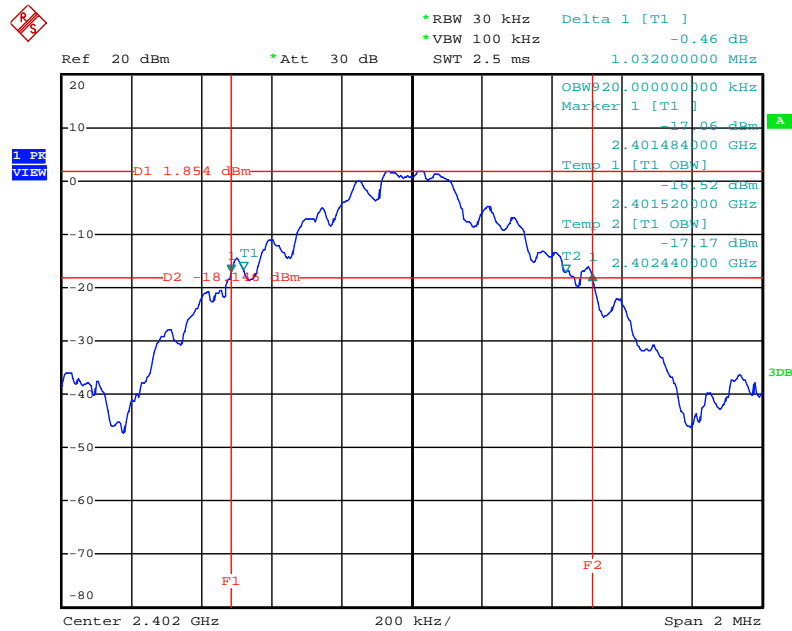


Date: 29.MAY.2013 22:13:50

### 20 dB Bandwidth Plot on BR-1Mbps / GFSK / Channel 39 / 2441 MHz

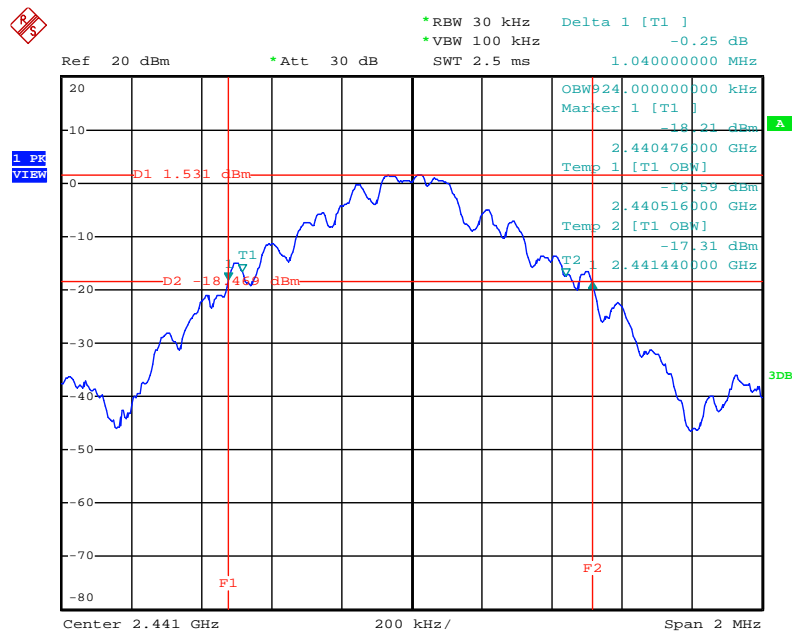


Date: 29.MAY.2013 22:14:24

### 20 dB Bandwidth Plot on BR-1Mbps / GFSK / Channel 78 / 2480 MHz

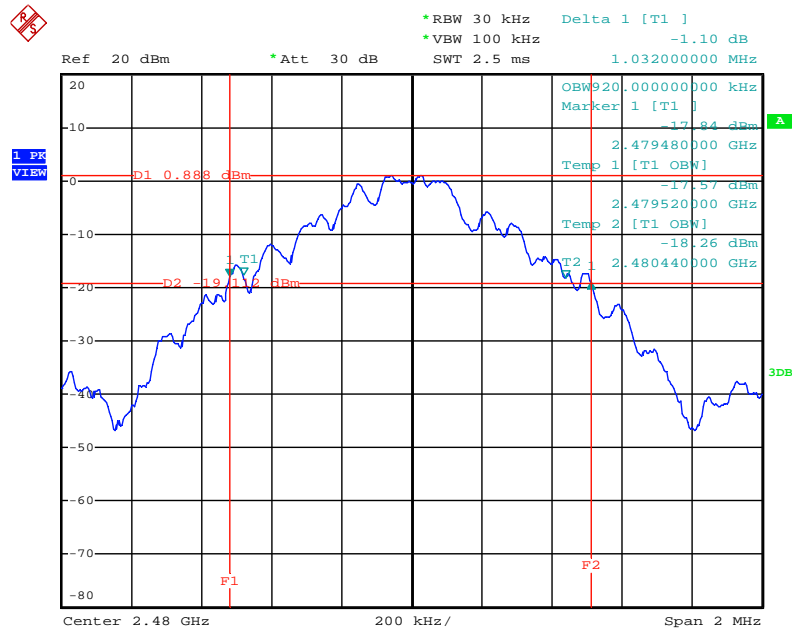


Date: 29.MAY.2013 22:14:47

### Channel Separation Plot on BR-1Mbps / GFSK / Channel 0~1 / 2402 MHz ~ 2403 MHz

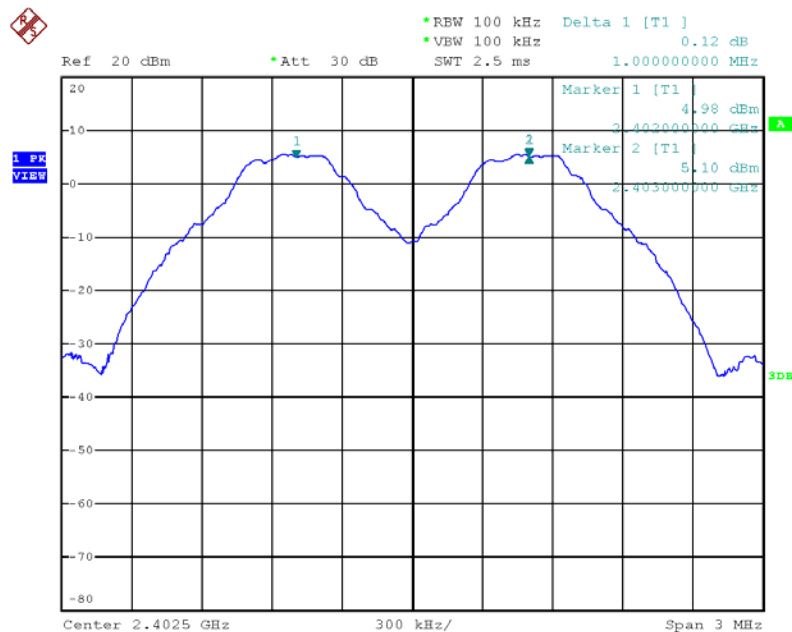


Date: 29.MAY.2013 22:39:47

### Channel Separation Plot on BR-1Mbps / GFSK / Channel 39~40 / 2441 MHz ~ 2442 MHz

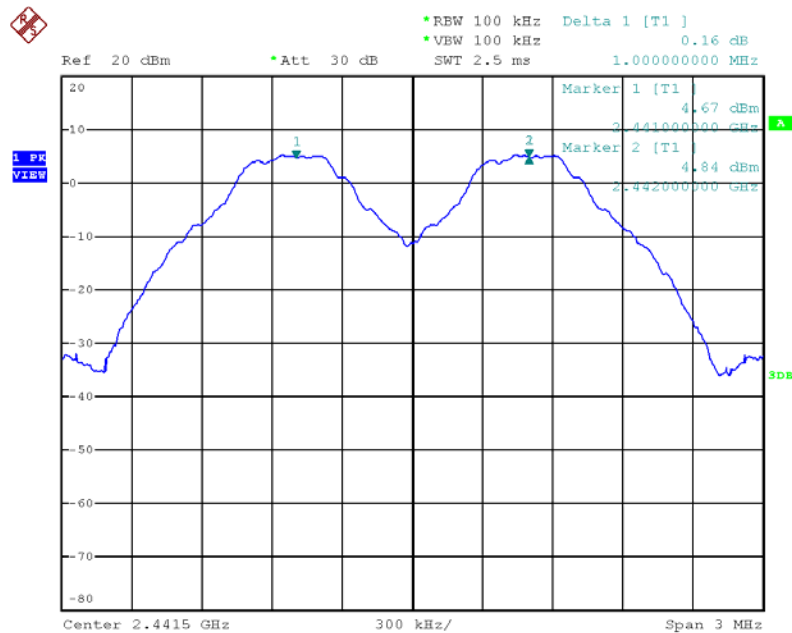


Date: 29.MAY.2013 22:40:30

### Channel Separation Plot on BR-1Mbps / GFSK / Channel 77~78 / 2479 MHz ~ 2480 MHz

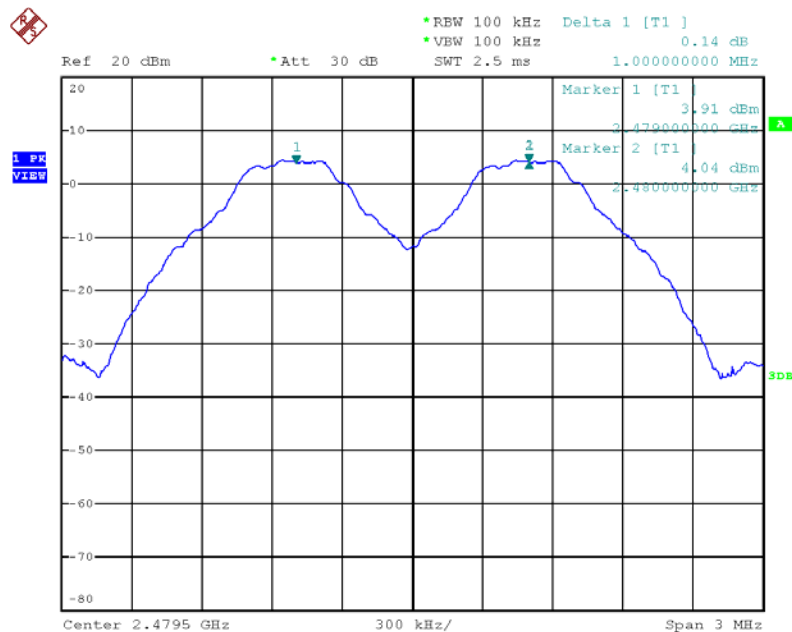


Date: 29.MAY.2013 22:41:21

### 20 dB Bandwidth Plot on EDR-2Mbps / $\pi/4$ -QPSK / Channel 0 / 2402 MHz

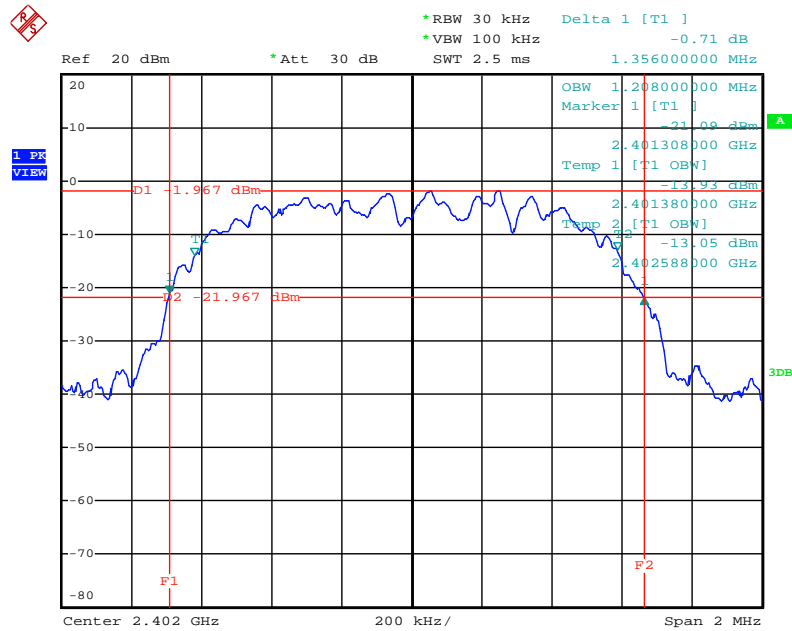


Date: 29.MAY.2013 22:13:21

### 20 dB Bandwidth Plot on EDR-2Mbps / $\pi/4$ -QPSK / Channel 39 / 2441 MHz

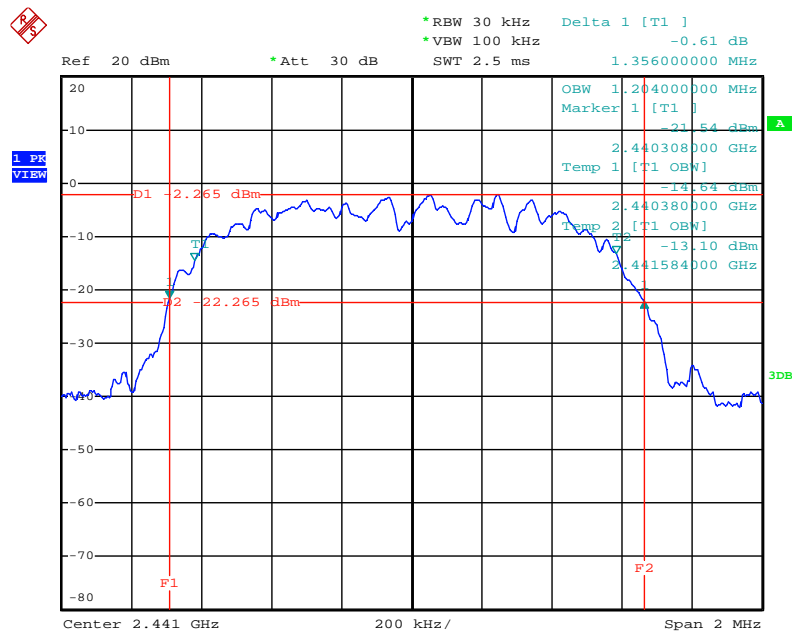


Date: 29.MAY.2013 22:12:46

### 20 dB Bandwidth Plot on EDR-2Mbps / $\pi/4$ -DQPSK / Channel 78 / 2480 MHz

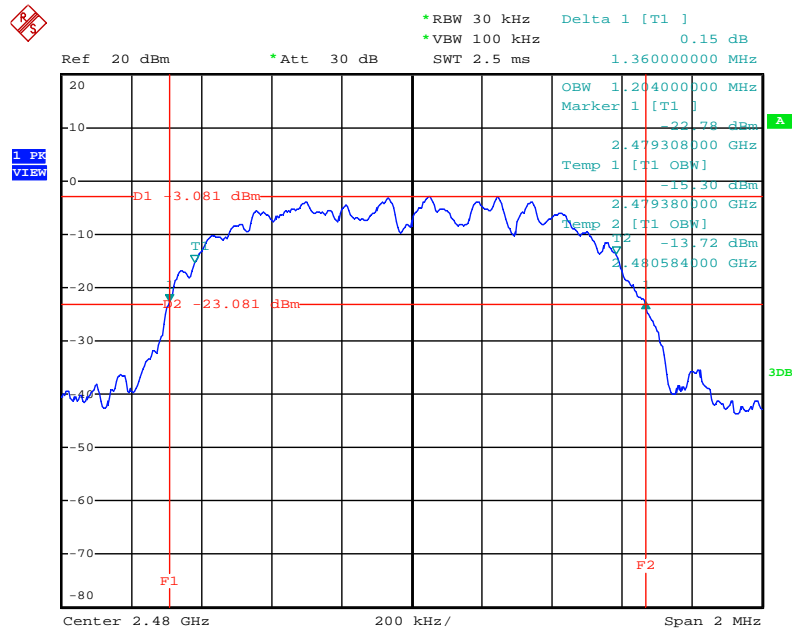


Date: 29.MAY.2013 22:12:18

### Channel Separation Plot on EDR-2Mbps / $\pi/4$ -DQPSK / Channel 0~1 / 2402 MHz ~ 2403 MHz

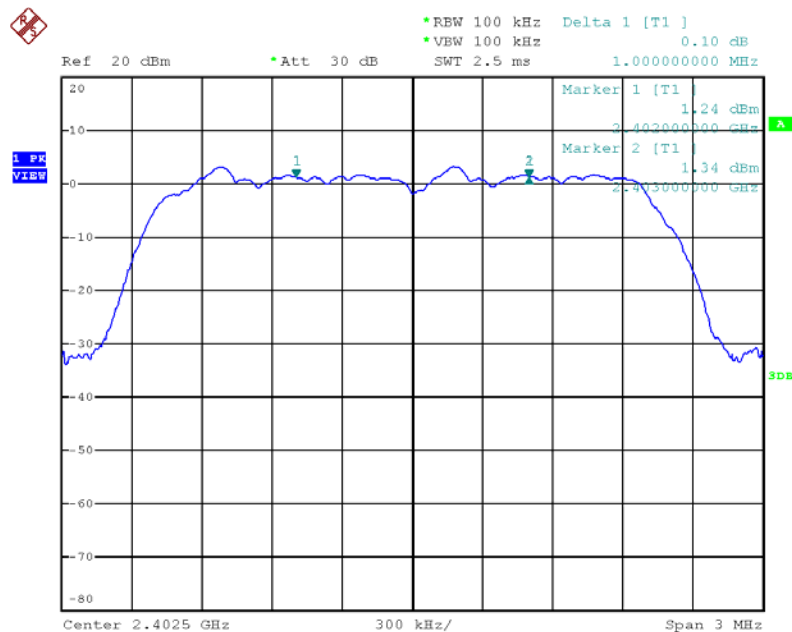


Date: 29.MAY.2013 22:38:48

### Channel Separation Plot on EDR-2Mbps / $\pi/4$ -DQPSK / Channel 39~40 / 2441 MHz ~ 2442 MHz

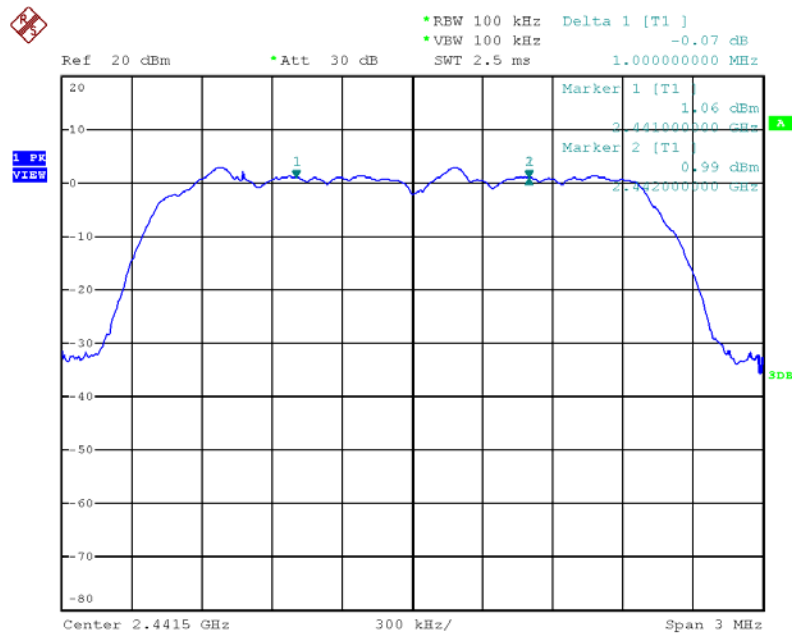


Date: 29.MAY.2013 22:37:57

### Channel Separation Plot on EDR-2Mbps / $\pi/4$ -DQPSK / Channel 77~78 / 2479 MHz ~ 2480 MHz

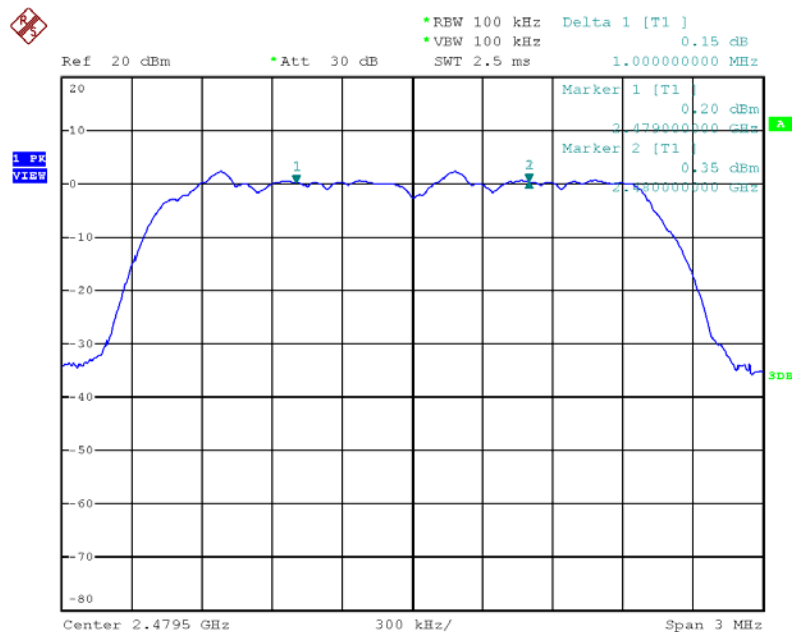


Date: 29.MAY.2013 22:37:12

### 20 dB Bandwidth Plot on EDR-3Mbps / 8DPSK / Channel 0 / 2402 MHz

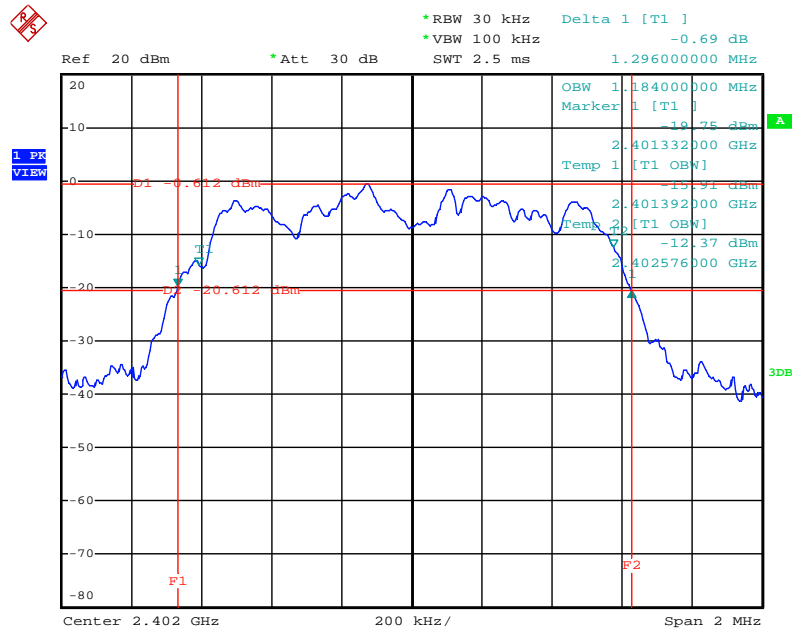

Date: 29.MAY.2013 22:08:56


### 20 dB Bandwidth Plot on EDR-3Mbps / 8DPSK / Channel 39 / 2441 MHz

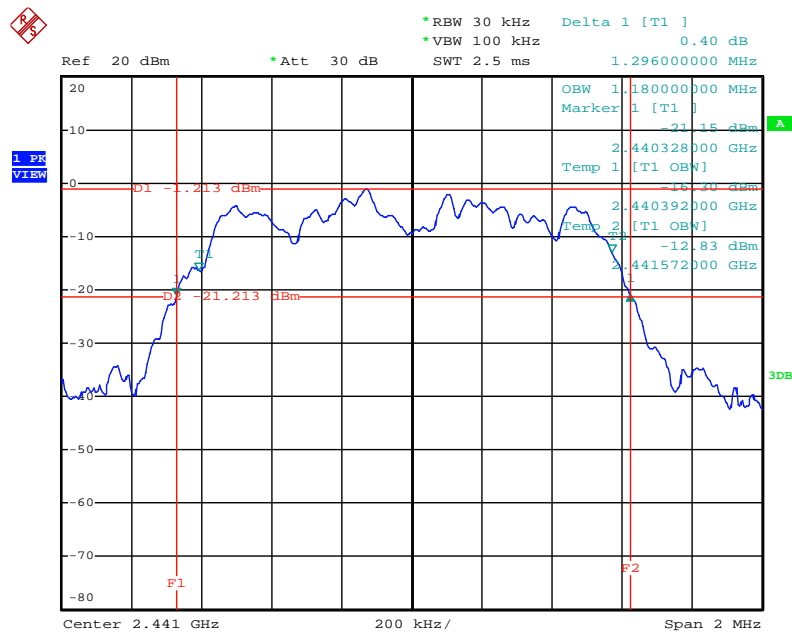

Date: 29.MAY.2013 22:11:24




### 20 dB Bandwidth Plot on EDR-3Mbps / 8DPSK / Channel 78 / 2480 MHz

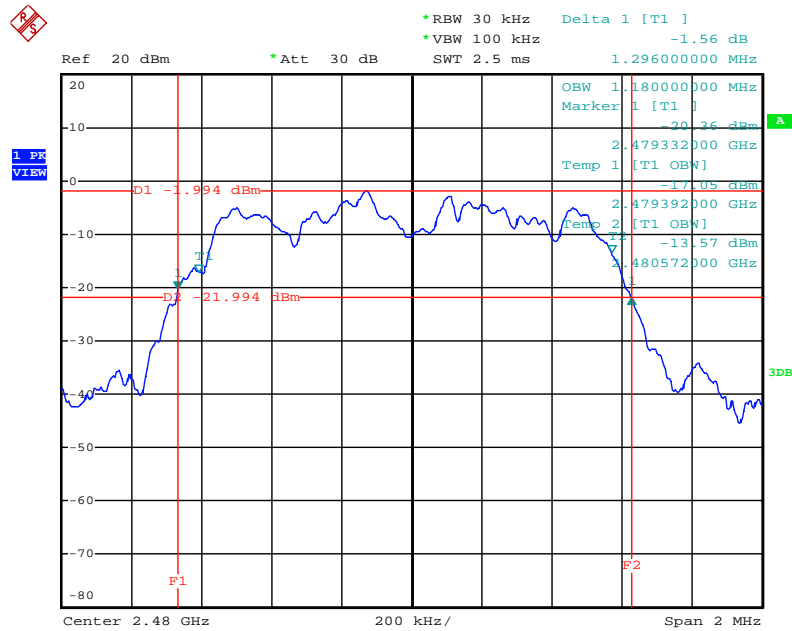


Date: 29.MAY.2013 22:11:56

### Channel Separation Plot on EDR-3Mbps / 8DPSK / Channel 0~1 / 2402 MHz ~ 2403 MHz

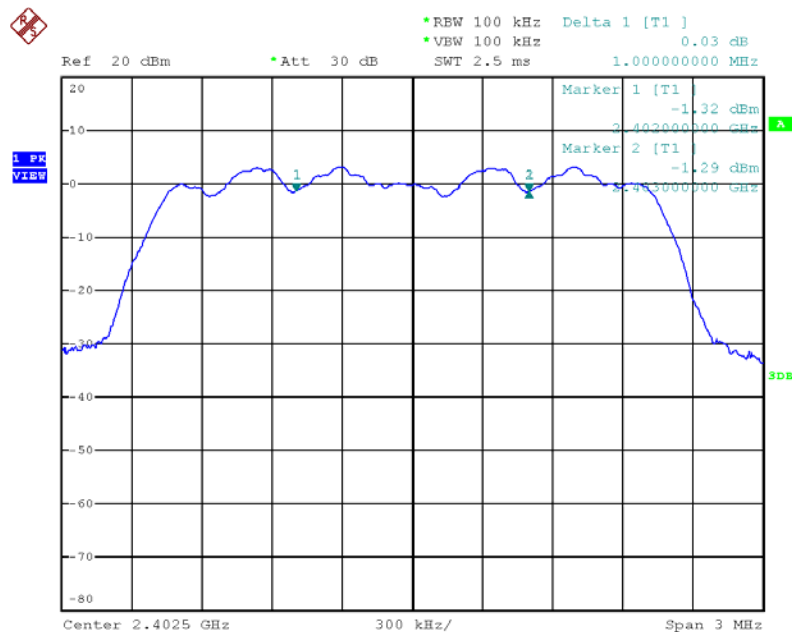


Date: 29.MAY.2013 22:31:21

### Channel Separation Plot on EDR-3Mbps / 8DPSK / Channel 39~40 / 2441 MHz ~ 2442 MHz

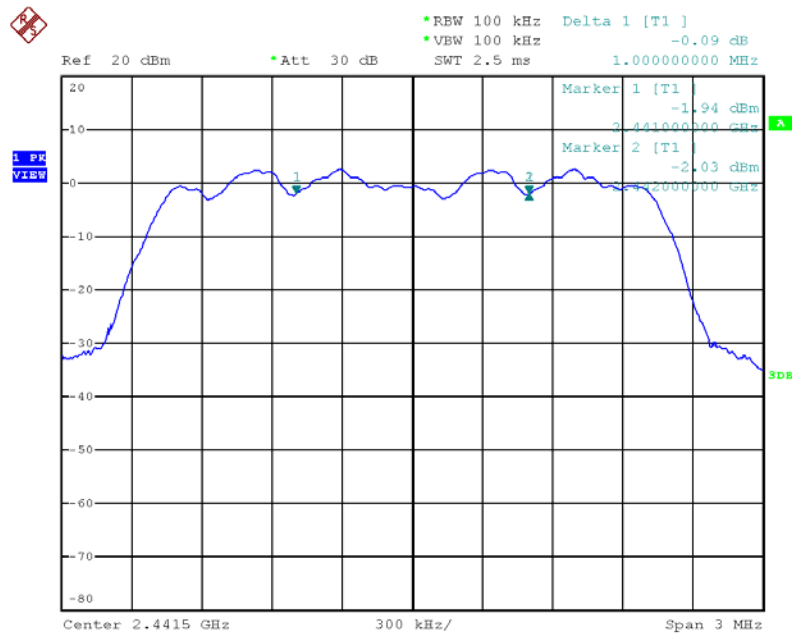

Date: 29.MAY.2013 22:32:24

### Channel Separation Plot on EDR-3Mbps / 8DPSK / Channel 77~78 / 2479 MHz ~ 2480 MHz

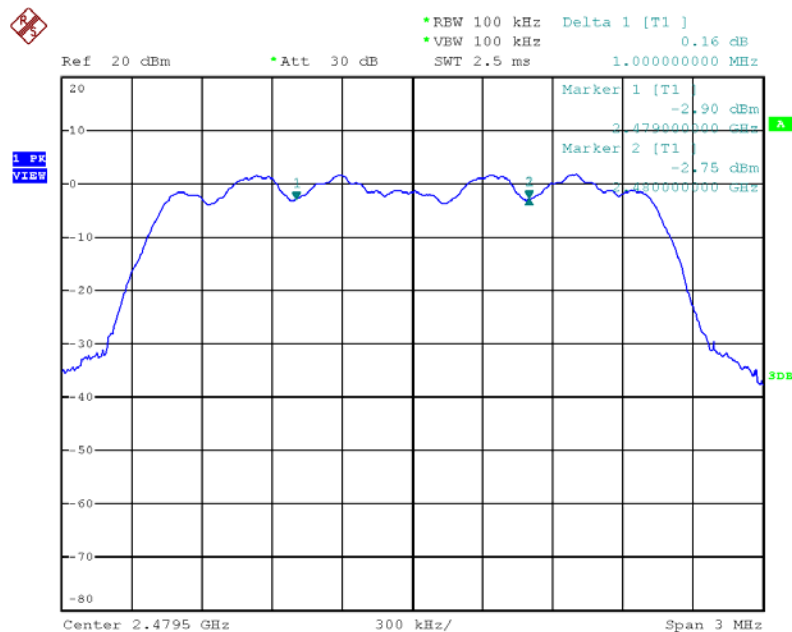

Date: 29.MAY.2013 22:33:14

#### 4.4. Number of Hopping Frequency Measurement

##### 4.4.1. Limit

At least 15 hopping frequencies, and should be equally spaced.

##### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	1000 kHz
VBW	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

##### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 1000 kHz and the video bandwidth of 1000 kHz were utilized.
3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.

##### 4.4.4. Test Setup Layout

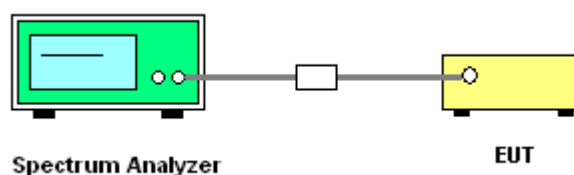

##### 4.4.5. Test Deviation

There is no deviation with the original standard.

##### 4.4.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Number of Hopping Frequency

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	GFSK
Test Mode	Mode 1		

Modulation Type	Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
GFSK	0 ~ 78	2402 ~ 2480	79	15	Complies

#### Number of Hopping Channel Plot on GFSK / Channel 0~78 / 2402 MHz ~ 2480 MHz

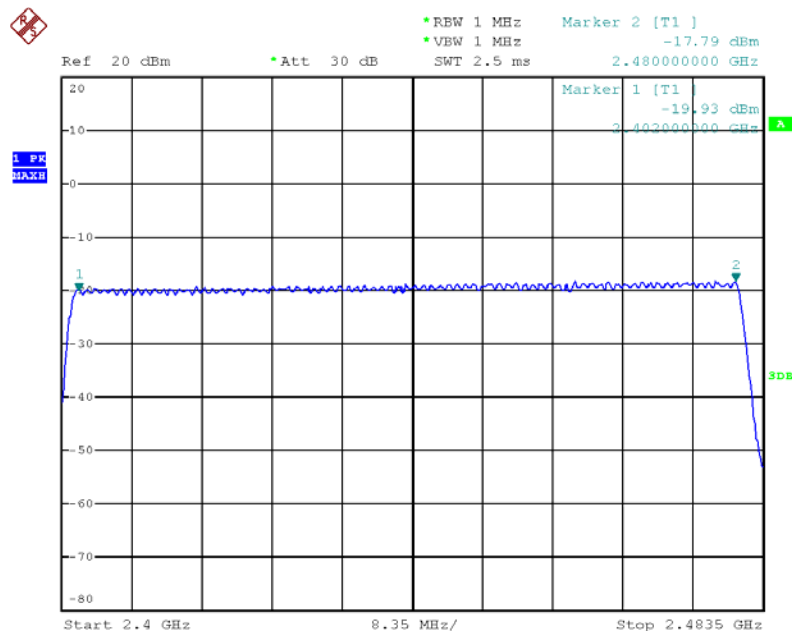

Date: 21.JUN.2013 18:28:13

## 4.5. Dwell Time Measurement

### 4.5.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 MHz
RBW	1000 kHz
VBW	1000 kHz
Detector	Peak
Trace	Single Trigger

### 4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.
7. Set the EUT for DH5, DH3 and DH1 packet transmitting.
8. Measure the maximum time duration of one single pulse.

### 4.5.4. Test Setup Layout

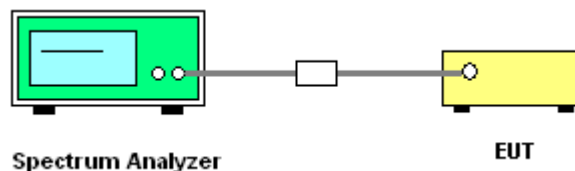

### 4.5.5. Test Deviation

There is no deviation with the original standard.

### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Test Result of Dwell Time

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	GFSK / DH1, DH3, DH5
Test Mode	Mode 1		

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402 MHz	2.9000	0.3093	0.4000	Complies
DH3	2402 MHz	1.6400	0.2624	0.4000	Complies
DH1	2402 MHz	0.3800	0.1216	0.4000	Complies
DH5	2441 MHz	2.9000	0.3093	0.4000	Complies
DH3	2441 MHz	1.6400	0.2624	0.4000	Complies
DH1	2441 MHz	0.3800	0.1216	0.4000	Complies
DH5	2480 MHz	2.9000	0.3093	0.4000	Complies
DH3	2480 MHz	1.6400	0.2624	0.4000	Complies
DH1	2480 MHz	0.3800	0.1216	0.4000	Complies

**Note:** Pulse Duration \* Number of Pulses\*(Dwell time / measure time)


**Remark:**

Dwell Time = 79(channels) x 0.4(s) x average hopping channel x package transfer time (us)

79 channels come from the Hopping Channel number.


Average Hopping Channel = hops / sweep time

### Dwell Time Plot on GFSK / Channel 0 / DH1 / 2402 MHz

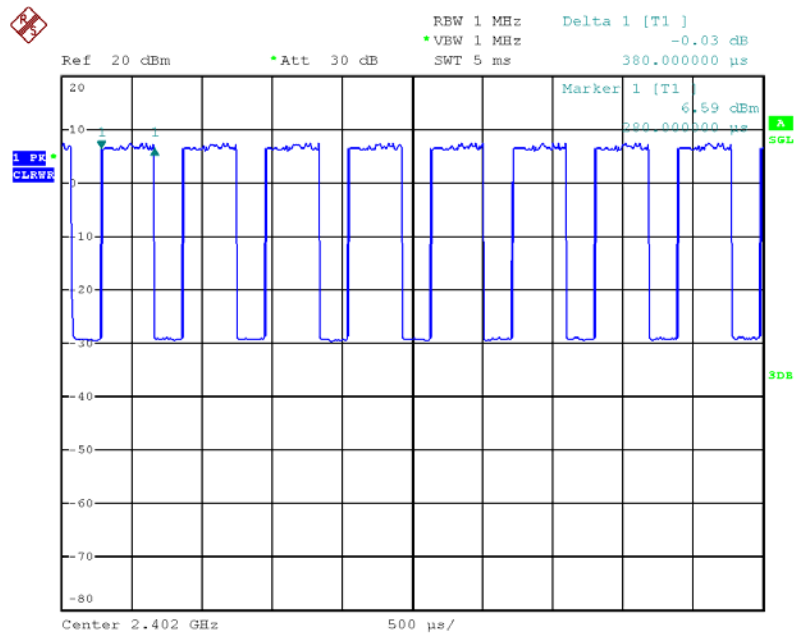


Date: 29.MAY.2013 22:47:08

### Dwell Time Plot on GFSK / Channel 39 / DH1 / 2441 MHz

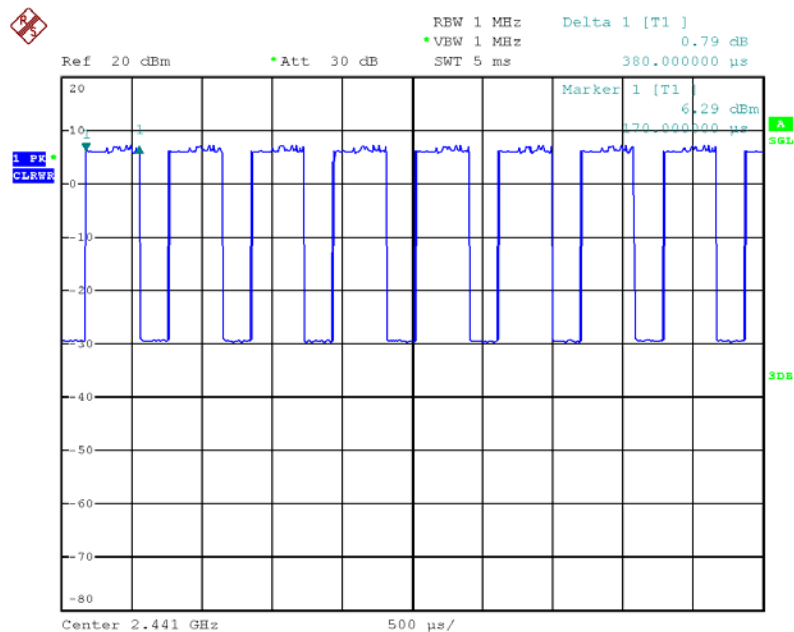


Date: 29.MAY.2013 22:47:50

### Dwell Time Plot on GFSK / Channel 78 / DH1 / 2480 MHz

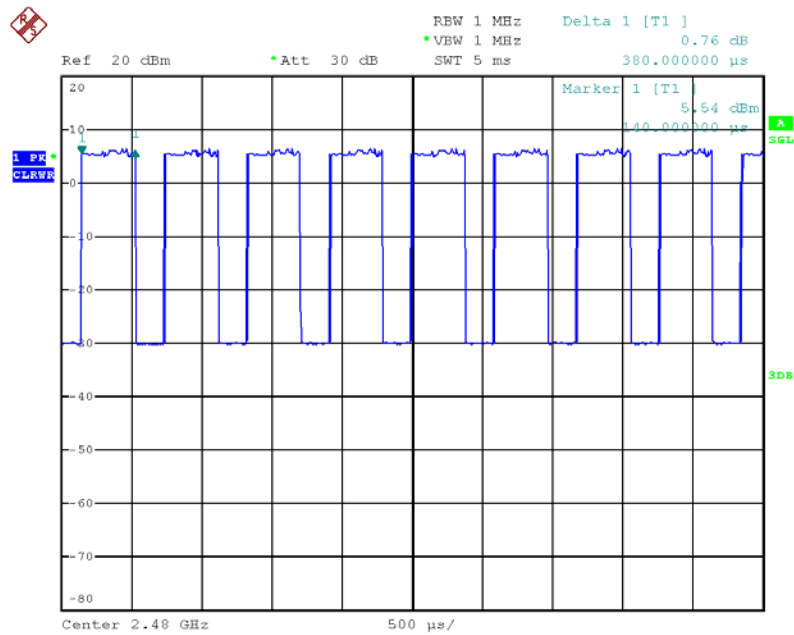

Date: 29.MAY.2013 22:51:02


### Dwell Time Plot on GFSK / Channel 0 / DH3 / 2402 MHz

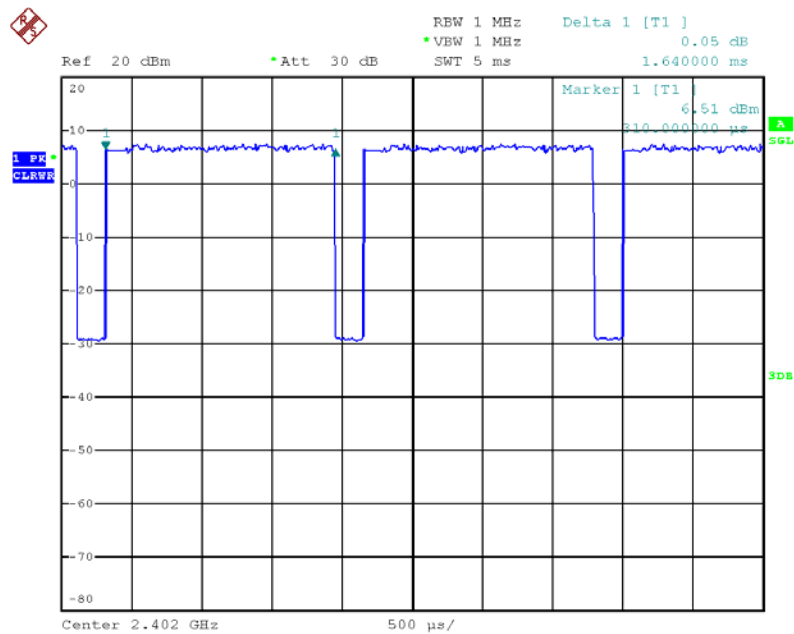

Date: 29.MAY.2013 22:46:41




### Dwell Time Plot on GFSK / Channel 39 / DH3 / 2441 MHz

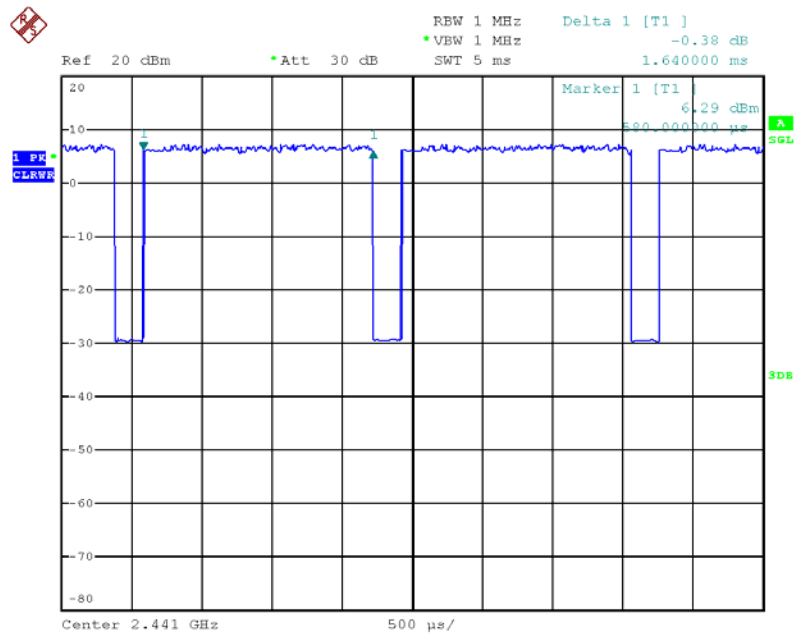


Date: 29.MAY.2013 22:48:15

### Dwell Time Plot on GFSK / Channel 78 / DH3 / 2480 MHz

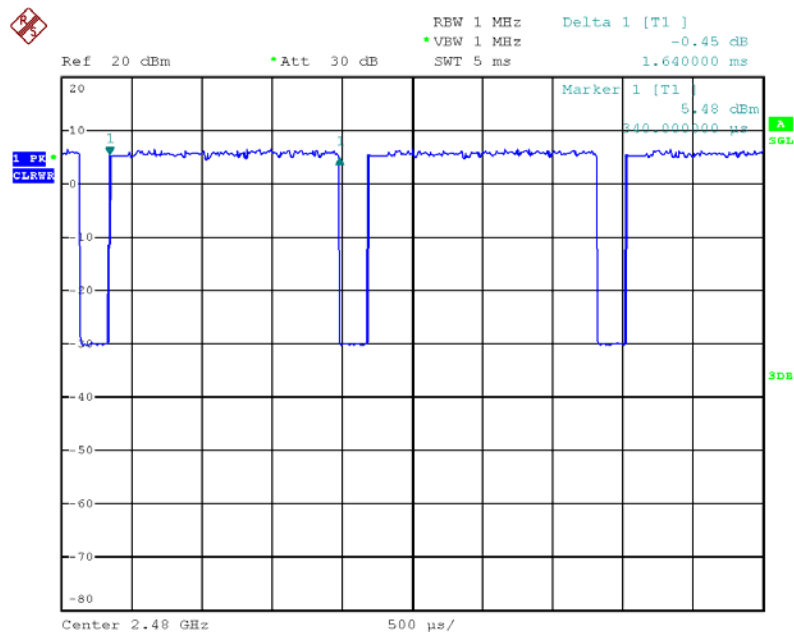


Date: 29.MAY.2013 22:50:31

### Dwell Time Plot on GFSK / Channel 0 / DH5 / 2402 MHz

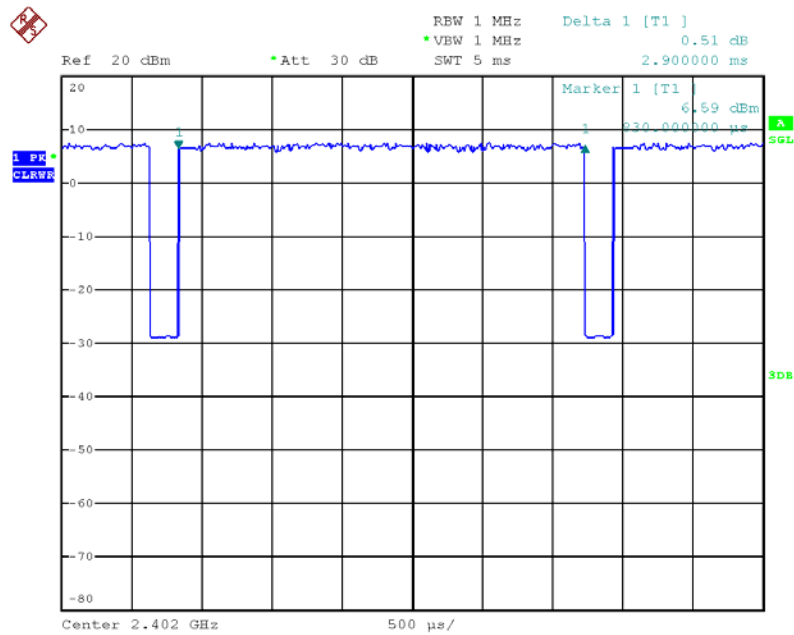


Date: 29.MAY.2013 22:45:06

### Dwell Time Plot on GFSK / Channel 39 / DH5 / 2441 MHz

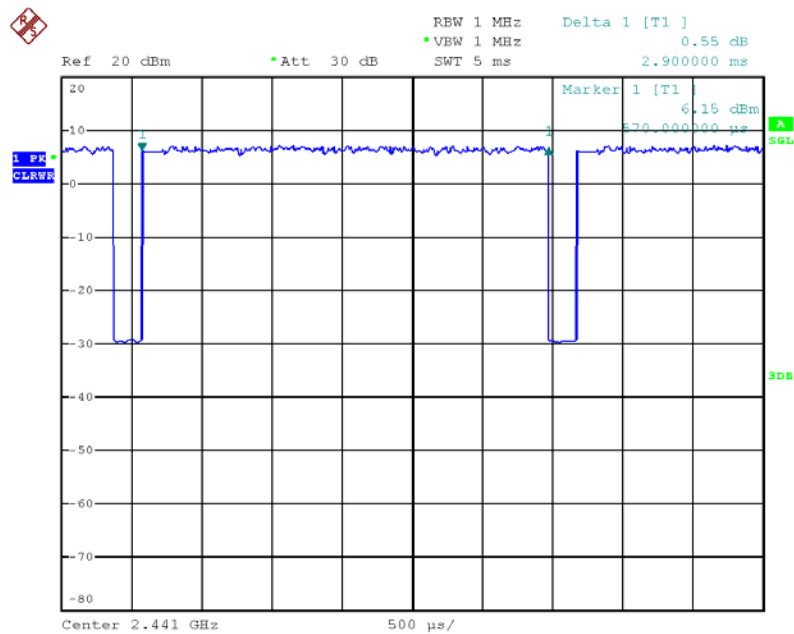

Date: 29.MAY.2013 22:49:04

### Dwell Time Plot on GFSK / Channel 78 / DH5 / 2480 MHz

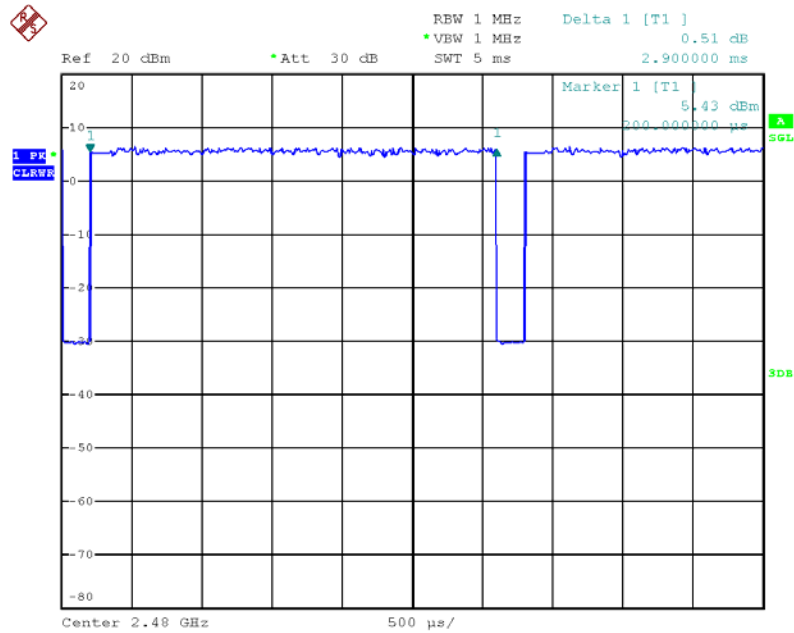

Date: 29.MAY.2013 22:49:54

## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.6.4. Test Setup Layout

For radiated emissions below 1GHz

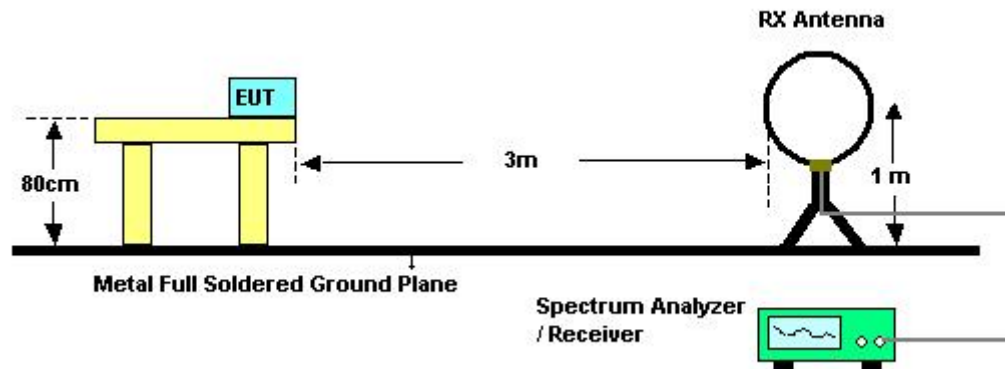

For radiated emissions above 1GHz

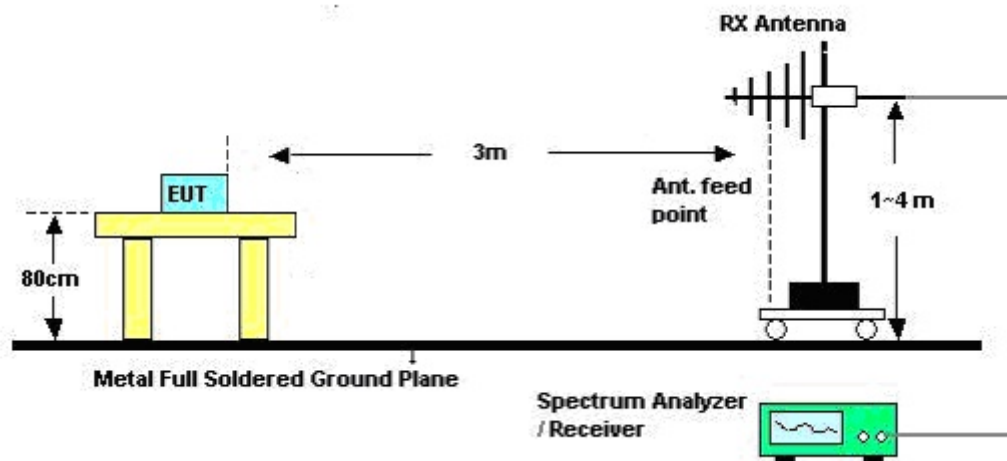

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24.5°C	Humidity	60%
Test Engineer	Kenneth Huang	Test Date	May 23, 2013
Configurations	Normal Link	Test Mode	Mode 1

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 4.6.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	24.5°C	Humidity	60%
Test Engineer	Kenneth Huang	Configurations	Normal Link
Test Mode	Mode 1		


##### Horizontal

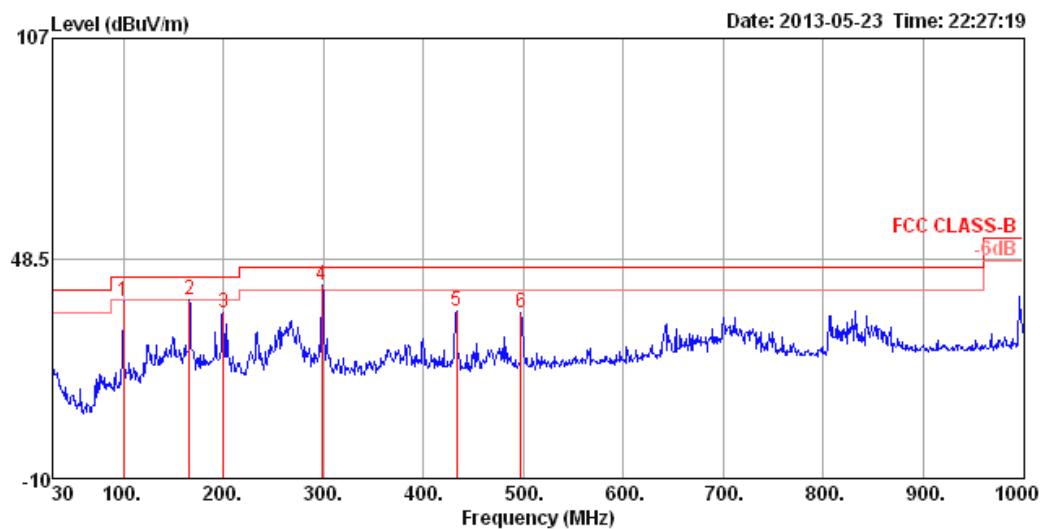

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	99.84	37.13	43.50	-6.37	57.25	1.18	10.31	31.61	400	357	HORIZONTAL	Peak
2	165.80	37.46	43.50	-6.04	58.06	1.56	9.38	31.54	300	179	HORIZONTAL	Peak
3	199.75	33.95	43.50	-9.55	55.01	1.70	8.75	31.51	150	174	HORIZONTAL	Peak
4 pp	298.69	41.22	46.00	-4.78	57.55	2.12	12.98	31.43	100	126	HORIZONTAL	Peak
5	433.52	34.65	46.00	-11.35	47.04	2.59	16.17	31.15	100	285	HORIZONTAL	Peak
6	497.54	33.83	46.00	-12.17	45.53	2.81	16.88	31.39	100	130	HORIZONTAL	Peak



## Vertical

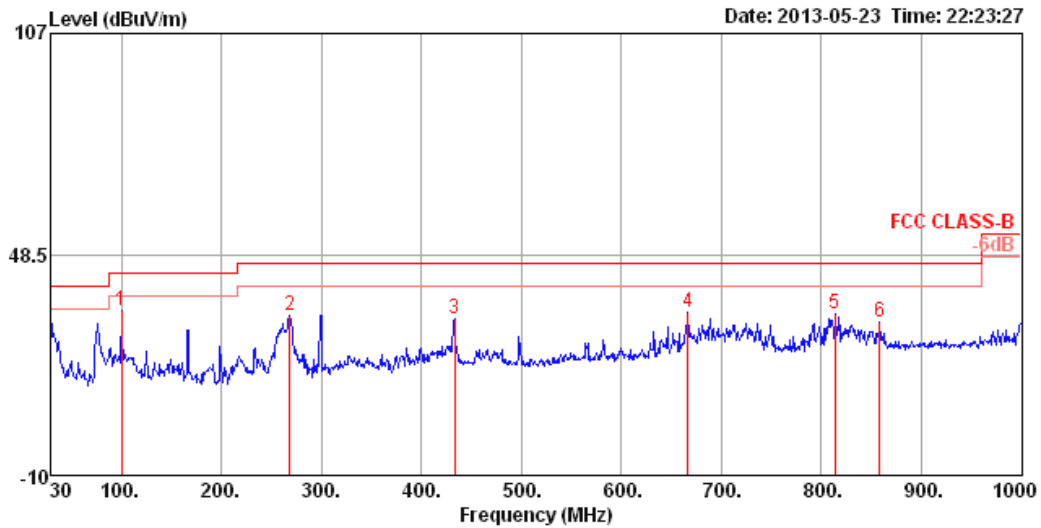

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	pp	99.84	33.59	43.50	-9.91	53.71	1.18	10.31	31.61	150	242	VERTICAL	Peak
2		268.62	32.23	46.00	-13.77	49.39	1.98	12.41	31.55	150	2	VERTICAL	Peak
3		433.52	31.58	46.00	-14.42	43.97	2.59	16.17	31.15	125	112	VERTICAL	Peak
4		666.32	33.03	46.00	-12.97	42.31	3.31	18.81	31.40	125	315	VERTICAL	Peak
5		813.76	32.90	46.00	-13.10	40.20	3.70	20.21	31.21	100	133	VERTICAL	Peak
6		858.38	30.44	46.00	-15.56	37.51	3.84	20.28	31.19	150	121	VERTICAL	Peak

### Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.6.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	BR-1Mbps / GFSK / Channel 0
Test Mode	Mode 3	Test Date	May 29, 2013

##### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 pk	2375.74	52.83	74.00	-21.17	56.95	3.67	27.90	35.69	156	248	HORIZONTAL	Peak
2 pp	2376.17	41.62	54.00	-12.38	45.74	3.67	27.90	35.69	156	248	HORIZONTAL	Average
3	4804.03	34.55	54.00	-19.45	31.44	5.66	32.74	35.29	151	272	HORIZONTAL	Average
4	4804.13	45.76	74.00	-28.24	42.65	5.66	32.74	35.29	151	272	HORIZONTAL	Peak

##### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2374.90	40.45	74.00	-33.55	44.57	3.67	27.90	35.69	100	171	VERTICAL	Peak
2	2375.06	32.45	54.00	-21.55	36.57	3.67	27.90	35.69	100	171	VERTICAL	Average
3 pk	4803.93	45.34	74.00	-28.66	42.23	5.66	32.74	35.29	100	177	VERTICAL	Peak
4 pp	4804.29	32.66	54.00	-21.34	29.55	5.66	32.74	35.29	100	177	VERTICAL	Average

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	BR-1Mbps / GFSK / Channel 39
Test Mode	Mode 3	Test Date	May 29, 2013

#### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4882.00	33.98	54.00	-20.02	30.73	5.76	32.81	35.32	144	250	HORIZONTAL	Average
2	4882.00	45.58	74.00	-28.42	42.33	5.76	32.81	35.32	144	250	HORIZONTAL	Peak
3 pp	7323.00	38.21	54.00	-15.79	29.37	7.06	37.13	35.35	100	214	HORIZONTAL	Average
4 pk	7323.00	50.86	74.00	-23.14	42.02	7.06	37.13	35.35	100	214	HORIZONTAL	Peak

#### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4881.75	44.14	74.00	-29.86	40.89	5.76	32.81	35.32	100	149	VERTICAL	Peak
2	4881.97	33.50	54.00	-20.50	30.25	5.76	32.81	35.32	100	149	VERTICAL	Average
3 pk	7322.30	50.60	74.00	-23.40	41.76	7.06	37.13	35.35	100	216	VERTICAL	Peak
4 pp	7323.00	38.39	54.00	-15.61	29.55	7.06	37.13	35.35	100	216	VERTICAL	Average

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	BR-1Mbps / GFSK / Channel 78
Test Mode	Mode 3	Test Date	May 29, 2013

#### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 pk	3306.70	51.17	74.00	-22.83	52.51	4.46	30.20	36.00	141	268	HORIZONTAL	Peak
2 pp	3306.73	48.30	54.00	-5.70	49.64	4.46	30.20	36.00	141	268	HORIZONTAL	Average
3	4960.36	34.20	54.00	-19.80	30.83	5.85	32.87	35.35	137	247	HORIZONTAL	Average
4	4965.30	45.47	74.00	-28.53	42.09	5.86	32.87	35.35	137	247	HORIZONTAL	Peak
5	7446.12	38.09	54.00	-15.91	29.08	7.11	37.18	35.28	100	149	HORIZONTAL	Average
6	7446.32	50.67	74.00	-23.33	41.66	7.11	37.18	35.28	100	149	HORIZONTAL	Peak

#### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	3306.58	34.52	54.00	-19.48	35.86	4.46	30.20	36.00	116	179	VERTICAL	Average
2	3306.59	43.10	74.00	-30.90	44.44	4.46	30.20	36.00	116	179	VERTICAL	Peak
3	4957.14	33.82	54.00	-20.18	30.44	5.85	32.87	35.34	100	163	VERTICAL	Average
4	4966.42	44.92	74.00	-29.08	41.54	5.86	32.87	35.35	100	163	VERTICAL	Peak
5 pk	7442.94	51.19	74.00	-22.81	42.19	7.11	37.17	35.28	100	34	VERTICAL	Peak
6 pp	7443.96	38.21	54.00	-15.79	29.20	7.11	37.18	35.28	100	34	VERTICAL	Average

#### Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	EDR-3Mbps / 8DPSK / Channel 0
Test Mode	Mode 3	Test Date	May 29, 2013

#### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1 pk	2376.07	48.50	74.00	-25.50	52.62	3.67	27.90	35.69	159	249	HORIZONTAL	Peak
2 pp	2376.21	42.69	54.00	-11.31	46.81	3.67	27.90	35.69	159	249	HORIZONTAL	Average
3	4803.46	45.03	74.00	-28.97	41.92	5.66	32.74	35.29	147	295	HORIZONTAL	Peak
4	4804.03	35.85	54.00	-18.15	32.74	5.66	32.74	35.29	147	295	HORIZONTAL	Average

#### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	2376.05	43.71	74.00	-30.29	47.83	3.67	27.90	35.69	100	171	VERTICAL	Peak
2	2376.12	35.79	54.00	-18.21	39.91	3.67	27.90	35.69	100	171	VERTICAL	Average
3 pk	4803.77	46.70	74.00	-27.30	43.59	5.66	32.74	35.29	102	161	VERTICAL	Peak
4 pp	4804.02	37.35	54.00	-16.65	34.24	5.66	32.74	35.29	102	161	VERTICAL	Average

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	EDR-3Mbps / 8DPSK / Channel 39
Test Mode	Mode 3	Test Date	May 29, 2013

#### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4881.56	45.32	74.00	-28.68	42.07	5.76	32.81	35.32	138	272	HORIZONTAL	Peak
2	4881.89	34.31	54.00	-19.69	31.06	5.76	32.81	35.32	138	272	HORIZONTAL	Average
3 pp	7320.81	38.61	54.00	-15.39	29.77	7.06	37.13	35.35	117	286	HORIZONTAL	Average
4 pk	7322.12	52.28	74.00	-21.72	43.44	7.06	37.13	35.35	117	286	HORIZONTAL	Peak

#### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4880.08	32.81	54.00	-21.19	29.58	5.75	32.80	35.32	100	270	VERTICAL	Average
2	4881.02	44.25	74.00	-29.75	41.01	5.76	32.80	35.32	100	270	VERTICAL	Peak
3 pk	7320.78	51.26	74.00	-22.74	42.42	7.06	37.13	35.35	100	134	VERTICAL	Peak
4 pp	7320.89	38.64	54.00	-15.36	29.80	7.06	37.13	35.35	100	134	VERTICAL	Average

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	EDR-3Mbps / 8DPSK / Channel 78
Test Mode	Mode 3	Test Date	May 29, 2013

#### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 pk	3306.56	51.14	74.00	-22.86	52.48	4.46	30.20	36.00	148	300	HORIZONTAL	Peak
2 pp	3306.69	48.29	54.00	-5.71	49.63	4.46	30.20	36.00	148	300	HORIZONTAL	Average
3	4960.21	33.99	54.00	-20.01	30.62	5.85	32.87	35.35	144	280	HORIZONTAL	Average
4	4964.24	44.55	74.00	-29.45	41.17	5.86	32.87	35.35	144	280	HORIZONTAL	Peak
5	7437.87	49.31	74.00	-24.69	40.32	7.11	37.17	35.29	100	200	HORIZONTAL	Peak
6	7448.68	38.48	54.00	-15.52	29.47	7.11	37.18	35.28	100	200	HORIZONTAL	Average

#### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	3306.67	44.73	74.00	-29.27	46.07	4.46	30.20	36.00	100	340	VERTICAL	Peak
2 pp	3306.73	39.51	54.00	-14.49	40.85	4.46	30.20	36.00	100	340	VERTICAL	Average
3	4953.25	45.78	74.00	-28.22	42.41	5.84	32.87	35.34	100	240	VERTICAL	Peak
4	4960.28	33.90	54.00	-20.10	30.53	5.85	32.87	35.35	100	240	VERTICAL	Average
5 pk	7442.83	49.50	74.00	-24.50	40.50	7.11	37.17	35.28	100	115	VERTICAL	Peak
6	7443.05	38.48	54.00	-15.52	29.48	7.11	37.17	35.28	100	115	VERTICAL	Average

#### Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	BR-1Mbps / GFSK / Channel 0
Test Mode	Mode 9	Test Date	May 30, 2013

#### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 pp	4804.05	37.86	54.00	-16.14	34.75	5.66	32.74	35.29	124	315	HORIZONTAL	Average
2 pk	4804.06	45.39	74.00	-28.61	42.28	5.66	32.74	35.29	124	315	HORIZONTAL	Peak

#### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 pk	4803.57	43.63	74.00	-30.37	40.52	5.66	32.74	35.29	100	175	VERTICAL	Peak
2 pp	4803.95	34.63	54.00	-19.37	31.52	5.66	32.74	35.29	100	175	VERTICAL	Average



Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	BR-1Mbps / GFSK / Channel 39
Test Mode	Mode 9	Test Date	May 30, 2013

#### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4882.11	45.18	74.00	-28.82	41.93	5.76	32.81	35.32	100	221	HORIZONTAL	Peak
2	4882.18	34.05	54.00	-19.95	30.80	5.76	32.81	35.32	100	221	HORIZONTAL	Average
3 pp	7319.10	37.87	54.00	-16.13	29.03	7.06	37.13	35.35	100	114	HORIZONTAL	Average
4 pk	7326.28	48.33	74.00	-25.67	39.49	7.06	37.13	35.35	100	114	HORIZONTAL	Peak

#### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4881.77	34.58	54.00	-19.42	31.33	5.76	32.81	35.32	100	178	VERTICAL	Average
2	4882.70	43.56	74.00	-30.44	40.31	5.76	32.81	35.32	100	178	VERTICAL	Peak
3 pp	7318.35	37.86	54.00	-16.14	29.03	7.06	37.13	35.36	100	237	VERTICAL	Average
4 pk	7324.88	48.48	74.00	-25.52	39.64	7.06	37.13	35.35	100	237	VERTICAL	Peak

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	BR-1Mbps / GFSK / Channel 78
Test Mode	Mode 9	Test Date	May 30, 2013

#### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4959.66	42.89	74.00	-31.11	39.52	5.85	32.87	35.35	100	315	HORIZONTAL	Peak
2	4960.23	32.38	54.00	-21.62	29.01	5.85	32.87	35.35	100	315	HORIZONTAL	Average
3 pp	7438.84	37.78	54.00	-16.22	28.79	7.11	37.17	35.29	100	209	HORIZONTAL	Average
4 pk	7443.12	49.50	74.00	-24.50	40.50	7.11	37.17	35.28	100	209	HORIZONTAL	Peak

#### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4957.86	43.05	74.00	-30.95	39.67	5.85	32.87	35.34	100	240	VERTICAL	Peak
2	4960.32	31.55	54.00	-22.45	28.18	5.85	32.87	35.35	100	240	VERTICAL	Average
3 pp	7440.64	37.09	54.00	-16.91	28.09	7.11	37.17	35.28	100	148	VERTICAL	Average
4 pk	7443.34	49.15	74.00	-24.85	40.15	7.11	37.17	35.28	100	148	VERTICAL	Peak

#### Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	EDR-3Mbps / 8DPSK / Channel 0
Test Mode	Mode 9	Test Date	May 30, 2013

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 pp	4803.96	36.10	54.00	-17.90	32.99	5.66	32.74	35.29	111	321	HORIZONTAL	Average
2 pk	4804.57	46.47	74.00	-27.53	43.36	5.66	32.74	35.29	111	321	HORIZONTAL	Peak

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 pp	4803.84	34.53	54.00	-19.47	31.42	5.66	32.74	35.29	106	298	VERTICAL	Average
2 pk	4804.00	43.99	74.00	-30.01	40.88	5.66	32.74	35.29	106	298	VERTICAL	Peak

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	EDR-3Mbps / 8DPSK / Channel 39
Test Mode	Mode 9	Test Date	May 30, 2013

#### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4881.80	35.29	54.00	-18.71	32.04	5.76	32.81	35.32	122	296	HORIZONTAL	Average
2	4882.70	44.43	74.00	-29.57	41.18	5.76	32.81	35.32	122	296	HORIZONTAL	Peak
3 pp	7314.42	38.04	54.00	-15.96	29.22	7.06	37.12	35.36	100	217	HORIZONTAL	Average
4 pk	7322.28	50.19	74.00	-23.81	41.35	7.06	37.13	35.35	100	217	HORIZONTAL	Peak

#### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4881.57	32.31	54.00	-21.69	29.06	5.76	32.81	35.32	100	162	VERTICAL	Average
2	4882.94	43.10	74.00	-30.90	39.85	5.76	32.81	35.32	100	163	VERTICAL	Peak
3 pp	7320.95	38.15	54.00	-15.85	29.31	7.06	37.13	35.35	100	272	VERTICAL	Average
4 pk	7322.48	49.21	74.00	-24.79	40.37	7.06	37.13	35.35	100	272	VERTICAL	Peak

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	EDR-3Mbps / 8DPSK / Channel 78
Test Mode	Mode 9	Test Date	May 30, 2013

#### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4959.80	32.15	54.00	-21.85	28.78	5.85	32.87	35.35	100	150	HORIZONTAL	Average
2	4965.88	43.11	74.00	-30.89	39.73	5.86	32.87	35.35	100	150	HORIZONTAL	Peak
3 pp	7444.38	37.73	54.00	-16.27	28.72	7.11	37.18	35.28	100	97	HORIZONTAL	Average
4 pk	7447.06	48.47	74.00	-25.53	39.46	7.11	37.18	35.28	100	97	HORIZONTAL	Peak

#### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4959.90	32.20	54.00	-21.80	28.83	5.85	32.87	35.35	100	246	VERTICAL	Average
2	4960.59	42.98	74.00	-31.02	39.61	5.85	32.87	35.35	100	246	VERTICAL	Peak
3 pp	7440.61	37.12	54.00	-16.88	28.12	7.11	37.17	35.28	100	155	VERTICAL	Average
4 pk	7444.06	48.63	74.00	-25.37	39.62	7.11	37.18	35.28	100	155	VERTICAL	Peak

#### Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	BR-1Mbps / GFSK / Channel 0
Test Mode	Mode 13	Test Date	May 31, 2013

#### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4803.43	44.45	74.00	-29.55	40.44	5.85	33.36	35.20	Peak	100	233	HORIZONTAL
2	4803.45	32.38	54.00	-21.62	28.37	5.85	33.36	35.20	Average	100	233	HORIZONTAL

#### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4803.77	47.55	74.00	-26.45	43.54	5.85	33.36	35.20	Peak	111	75	VERTICAL
2	4803.99	37.66	54.00	-16.34	33.65	5.85	33.36	35.20	Average	111	75	VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	BR-1Mbps / GFSK / Channel 39
Test Mode	Mode 13	Test Date	May 31, 2013

#### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4881.73	32.17	54.00	-21.83	27.97	5.92	33.48	35.20 Average	100	239	HORIZONTAL
2	4881.82	44.86	74.00	-29.14	40.66	5.92	33.48	35.20 Peak	100	239	HORIZONTAL

#### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4881.91	37.92	54.00	-16.08	33.72	5.92	33.48	35.20 Average	100	277	VERTICAL
2	4882.29	47.74	74.00	-26.26	43.54	5.92	33.48	35.20 Peak	100	277	VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	BR-1Mbps / GFSK / Channel 78
Test Mode	Mode 13	Test Date	May 31, 2013

#### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4959.39	32.45	54.00	-21.55	28.01	6.00	33.64	35.20	Average	100	226	HORIZONTAL
2	4959.61	45.30	74.00	-28.70	40.86	6.00	33.64	35.20	Peak	100	226	HORIZONTAL

#### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4959.58	46.34	74.00	-27.66	41.90	6.00	33.64	35.20	Peak	100	164	VERTICAL
2	4959.85	35.04	54.00	-18.96	30.60	6.00	33.64	35.20	Average	100	164	VERTICAL

#### Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	EDR-3Mbps / 8DPSK / Channel 0
Test Mode	Mode 13	Test Date	May 31, 2013

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4804.47	45.33	74.00	-28.67	41.32	5.85	33.36	35.20	Peak	100	239	HORIZONTAL
2	4806.01	32.31	54.00	-21.69	28.30	5.85	33.36	35.20	Average	100	239	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4803.21	47.63	74.00	-26.37	43.62	5.85	33.36	35.20	Peak	111	75	VERTICAL
2	4803.92	36.11	54.00	-17.89	32.10	5.85	33.36	35.20	Average	111	75	VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	EDR-3Mbps / 8DPSK / Channel 39
Test Mode	Mode 13	Test Date	May 31, 2013

#### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4882.16	32.27	54.00	-21.73	28.07	5.92	33.48	35.20	Average	100	233	HORIZONTAL
2	4882.66	45.08	74.00	-28.92	40.88	5.92	33.48	35.20	Peak	100	233	HORIZONTAL

#### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4881.73	47.31	74.00	-26.69	43.11	5.92	33.48	35.20	Peak	100	277	VERTICAL
2	4881.93	36.13	54.00	-17.87	31.93	5.92	33.48	35.20	Average	100	277	VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	EDR-3Mbps / 8DPSK / Channel 78
Test Mode	Mode 13	Test Date	May 31, 2013

#### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	cm	deg	Pol/Phase
1	4959.01	32.50	54.00	-21.50	28.06	6.00	33.64	35.20	Average	100	214	HORIZONTAL
2	4959.07	45.40	74.00	-28.60	40.96	6.00	33.64	35.20	Peak	100	214	HORIZONTAL

#### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	cm	deg	Pol/Phase
1	4959.95	34.55	54.00	-19.45	30.11	6.00	33.64	35.20	Average	117	283	VERTICAL
2	4960.04	46.85	74.00	-27.15	42.41	6.00	33.64	35.20	Peak	117	283	VERTICAL

#### Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Emissions Measurement

### 4.7.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100 kHz / 100 kHz for Peak

### 4.7.3. Test Procedures

For Radiated band edges Measurement:

- The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

- The radiated emission test is performed on each TX port of operating mode without summing or adding  $10\log(N)$  since the limit is relative emission limit. Only worst data of each operating mode is presented.

#### **4.7.4. Test Setup Layout**

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.6.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.6.4.

#### **4.7.5. Test Deviation**

There is no deviation with the original standard.

#### **4.7.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	BR-1Mbps / GFSK / Channel 0, 39, 78
Test Mode	Mode 3	Test Date	May 29, 2013

##### Channel 0

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2376.00	41.15	54.00	-12.85	9.58	3.67	27.90	0.00	151	307	HORIZONTAL	Average
2	2376.40	58.24	74.00	-15.76	26.67	3.67	27.90	0.00	151	307	HORIZONTAL	Peak
3 pk	2401.80	108.30			76.71	3.69	27.90	0.00	151	307	HORIZONTAL	Peak
4 pp	2402.00	106.92			75.33	3.69	27.90	0.00	151	307	HORIZONTAL	Average

Item 3, 4 are the fundamental frequency at 2402 MHz.

##### Channel 39

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.40	56.35	74.00	-17.65	24.77	3.68	27.90	0.00	174	298	HORIZONTAL	Peak
2	2390.00	38.33	54.00	-15.67	6.75	3.68	27.90	0.00	174	298	HORIZONTAL	Average
3 pk	2440.80	107.19			75.58	3.71	27.90	0.00	174	298	HORIZONTAL	Peak
4 pp	2441.00	106.79			75.18	3.71	27.90	0.00	174	298	HORIZONTAL	Average
5	2483.50	38.46	54.00	-15.54	6.83	3.73	27.90	0.00	174	298	HORIZONTAL	Average
6	2485.50	54.95	74.00	-19.05	23.32	3.73	27.90	0.00	174	298	HORIZONTAL	Peak

Item 3, 4 are the fundamental frequency at 2441 MHz.

##### Channel 78

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 pk	2479.90	109.30			77.67	3.73	27.90	0.00	178	282	HORIZONTAL	Peak
2 pp	2480.00	108.87			77.24	3.73	27.90	0.00	178	282	HORIZONTAL	Average
3	2483.50	44.14	54.00	-9.86	12.51	3.73	27.90	0.00	178	282	HORIZONTAL	Average
4	2483.50	60.00	74.00	-14.00	28.37	3.73	27.90	0.00	178	282	HORIZONTAL	Peak

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	EDR-3Mbps / 8DPSK / Channel 0, 39, 78
Test Mode	Mode 3	Test Date	May 29, 2013

#### Channel 0

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2376.00	41.02	54.00	-12.98	9.45	3.67	27.90	0.00	151	275	HORIZONTAL Average
2	2382.10	56.59	74.00	-17.41	25.01	3.68	27.90	0.00	151	275	HORIZONTAL Peak
3 pp	2402.00	105.77			74.18	3.69	27.90	0.00	151	275	HORIZONTAL Average
4 pk	2402.00	109.39			77.80	3.69	27.90	0.00	151	275	HORIZONTAL Peak

Item 3, 4 are the fundamental frequency at 2402 MHz.

#### Channel 39

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.20	56.43	74.00	-17.57	24.85	3.68	27.90	0.00	177	289	HORIZONTAL Peak
2	2390.00	38.55	54.00	-15.45	6.97	3.68	27.90	0.00	177	289	HORIZONTAL Average
3 pp	2441.00	106.50			74.89	3.71	27.90	0.00	177	289	HORIZONTAL Average
4 pk	2441.00	110.10			78.49	3.71	27.90	0.00	177	289	HORIZONTAL Peak
5	2483.50	38.77	54.00	-15.23	7.14	3.73	27.90	0.00	177	289	HORIZONTAL Average
6	2485.70	56.35	74.00	-17.65	24.72	3.73	27.90	0.00	177	289	HORIZONTAL Peak

Item 3, 4 are the fundamental frequency at 2441 MHz.

#### Channel 78

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1 pk	2479.90	99.94			68.31	3.73	27.90	0.00	106	146	VERTICAL Peak
2 pp	2480.00	96.29			64.66	3.73	27.90	0.00	106	146	VERTICAL Average
3	2483.50	38.63	54.00	-15.37	7.00	3.73	27.90	0.00	106	146	VERTICAL Average
4	2483.50	54.98	74.00	-19.02	23.35	3.73	27.90	0.00	106	146	VERTICAL Peak

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	BR-1Mbps / GFSK / Channel 0, 39, 78
Test Mode	Mode 9	Test Date	May 30, 2013

#### Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2375.20	57.36	74.00	-16.64	25.79	3.67	27.90	0.00	151	244	HORIZONTAL	Peak
2	2375.50	43.38	54.00	-10.62	11.81	3.67	27.90	0.00	151	244	HORIZONTAL	Average
3 pk	2401.90	108.72			77.13	3.69	27.90	0.00	151	244	HORIZONTAL	Peak
4 pp	2402.00	108.18			76.59	3.69	27.90	0.00	151	244	HORIZONTAL	Average

Item 3, 4 are the fundamental frequency at 2402 MHz.

#### Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2388.20	37.95	54.00	-16.05	6.37	3.68	27.90	0.00	149	251	HORIZONTAL	Average
2	2390.00	54.14	74.00	-19.86	22.56	3.68	27.90	0.00	149	251	HORIZONTAL	Peak
3 pp	2441.00	106.24			74.63	3.71	27.90	0.00	149	251	HORIZONTAL	Average
4 pk	2441.00	106.88			75.27	3.71	27.90	0.00	149	251	HORIZONTAL	Peak
5	2483.50	35.89	54.00	-18.11	4.26	3.73	27.90	0.00	149	251	HORIZONTAL	Average
6	2483.50	53.12	74.00	-20.88	21.49	3.73	27.90	0.00	149	251	HORIZONTAL	Peak

Item 3, 4 are the fundamental frequency at 2441 MHz.

#### Channel 78

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 pk	2479.80	104.52			72.89	3.73	27.90	0.00	173	247	HORIZONTAL	Peak
2 pp	2480.10	103.91			72.28	3.73	27.90	0.00	173	247	HORIZONTAL	Average
3	2483.50	38.97	54.00	-15.03	7.34	3.73	27.90	0.00	173	247	HORIZONTAL	Average
4	2483.50	55.60	74.00	-18.40	23.97	3.73	27.90	0.00	173	247	HORIZONTAL	Peak

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	EDR-3Mbps / 8DPSK / Channel 0, 39, 78
Test Mode	Mode 9	Test Date	May 30, 2013

#### Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2375.40	56.81	74.00	-17.19	25.24	3.67	27.90	0.00	154	246	HORIZONTAL	Peak
2	2375.70	42.18	54.00	-11.82	10.61	3.67	27.90	0.00	154	246	HORIZONTAL	Average
3 pp	2402.00	105.89			74.30	3.69	27.90	0.00	154	246	HORIZONTAL	Average
4 pk	2402.00	109.53			77.94	3.69	27.90	0.00	154	246	HORIZONTAL	Peak

Item 3, 4 are the fundamental frequency at 2402 MHz.

#### Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2388.00	38.62	54.00	-15.38	7.04	3.68	27.90	0.00	150	252	HORIZONTAL	Average
2	2390.60	55.53	74.00	-18.47	23.95	3.68	27.90	0.00	150	252	HORIZONTAL	Peak
3 pp	2441.00	104.19			72.58	3.71	27.90	0.00	150	252	HORIZONTAL	Average
4 pk	2441.00	107.89			76.28	3.71	27.90	0.00	150	252	HORIZONTAL	Peak
5	2483.50	37.58	54.00	-16.42	5.95	3.73	27.90	0.00	150	252	HORIZONTAL	Average
6	2483.50	54.27	74.00	-19.73	22.64	3.73	27.90	0.00	150	252	HORIZONTAL	Peak

Item 3, 4 are the fundamental frequency at 2441 MHz.

#### Channel 78

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 pp	2480.00	100.62			68.99	3.73	27.90	0.00	147	249	HORIZONTAL	Average
2 pk	2480.00	104.41			72.78	3.73	27.90	0.00	147	249	HORIZONTAL	Peak
3	2483.50	39.56	54.00	-14.44	7.93	3.73	27.90	0.00	147	249	HORIZONTAL	Average
4	2483.50	55.05	74.00	-18.95	23.42	3.73	27.90	0.00	147	249	HORIZONTAL	Peak

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	BR-1Mbps / GFSK / Channel 0, 39, 78
Test Mode	Mode 13	Test Date	May 30, 2013

#### Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2375.80	44.91	54.00	-9.09	12.82	4.08	28.01	0.00	Average	100	218	VERTICAL
2	2385.60	56.16	74.00	-17.84	24.02	4.09	28.05	0.00	Peak	100	218	VERTICAL
3	2401.80	106.40			74.22	4.09	28.09	0.00	Peak	100	218	VERTICAL
4	2402.00	105.28			73.10	4.09	28.09	0.00	Average	100	218	VERTICAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

#### Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2386.80	55.21	74.00	-18.79	23.07	4.09	28.05	0.00	Peak	100	290	VERTICAL
2	2390.00	43.08	54.00	-10.92	10.94	4.09	28.05	0.00	Average	100	290	VERTICAL
3	2441.00	104.50			72.19	4.13	28.18	0.00	Average	100	290	VERTICAL
4	2441.00	105.50			73.19	4.13	28.18	0.00	Peak	100	290	VERTICAL
5	2483.50	43.36	54.00	-10.64	10.94	4.16	28.26	0.00	Average	100	290	VERTICAL
6	2483.50	54.21	74.00	-19.79	21.79	4.16	28.26	0.00	Peak	100	290	VERTICAL

Item 3, 4 are the fundamental frequency at 2441 MHz.

#### Channel 78

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2480.00	103.98			71.56	4.16	28.26	0.00	Average	100	290	VERTICAL
2	2480.20	105.07			72.65	4.16	28.26	0.00	Peak	100	290	VERTICAL
3	2483.50	48.39	54.00	-5.61	15.97	4.16	28.26	0.00	Average	100	290	VERTICAL
4	2483.50	56.71	74.00	-17.29	24.29	4.16	28.26	0.00	Peak	100	290	VERTICAL

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	Kenneth Huang	Configurations	EDR-3Mbps / 8DPSK / Channel 0, 39, 78
Test Mode	Mode 13	Test Date	May 30, 2013

#### Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2376.00	44.02	54.00	-9.98	11.93	4.08	28.01	0.00 Average	100	284	VERTICAL
2	2378.40	54.71	74.00	-19.29	22.62	4.08	28.01	0.00 Peak	100	284	VERTICAL
3	2402.00	102.08			69.90	4.09	28.09	0.00 Average	100	284	VERTICAL
4	2402.00	106.08			73.90	4.09	28.09	0.00 Peak	100	284	VERTICAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

#### Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2384.00	55.78	74.00	-18.22	23.65	4.08	28.05	0.00 Peak	100	284	VERTICAL
2	2386.00	43.36	54.00	-10.64	11.22	4.09	28.05	0.00 Average	100	284	VERTICAL
3	2441.00	101.62			69.31	4.13	28.18	0.00 Average	100	284	VERTICAL
4	2441.00	105.77			73.46	4.13	28.18	0.00 Peak	100	284	VERTICAL
5	2487.10	54.90	74.00	-19.10	22.44	4.16	28.30	0.00 Peak	100	284	VERTICAL
6	2491.50	43.46	54.00	-10.54	10.99	4.17	28.30	0.00 Average	100	284	VERTICAL

Item 3, 4 are the fundamental frequency at 2441 MHz.

#### Channel 78

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2480.00	100.99			68.57	4.16	28.26	0.00 Average	100	291	VERTICAL
2	2480.20	105.09			72.67	4.16	28.26	0.00 Peak	100	291	VERTICAL
3	2483.50	48.40	54.00	-5.60	15.98	4.16	28.26	0.00 Average	100	291	VERTICAL
4	2483.50	56.63	74.00	-17.37	24.21	4.16	28.26	0.00 Peak	100	291	VERTICAL


Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

### Plot on Configuration For BR-1Mbps / GFSK / Channel 0 / Reference Level / Test Mode: Mode 1

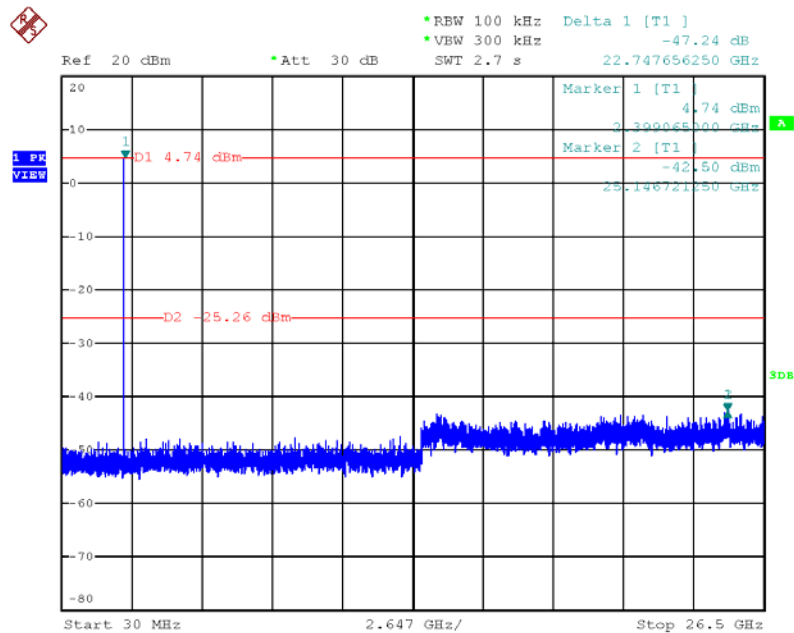


Date: 29.MAY.2013 23:28:47

### Plot on Configuration For BR-1Mbps / GFSK / Channel 0 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 1

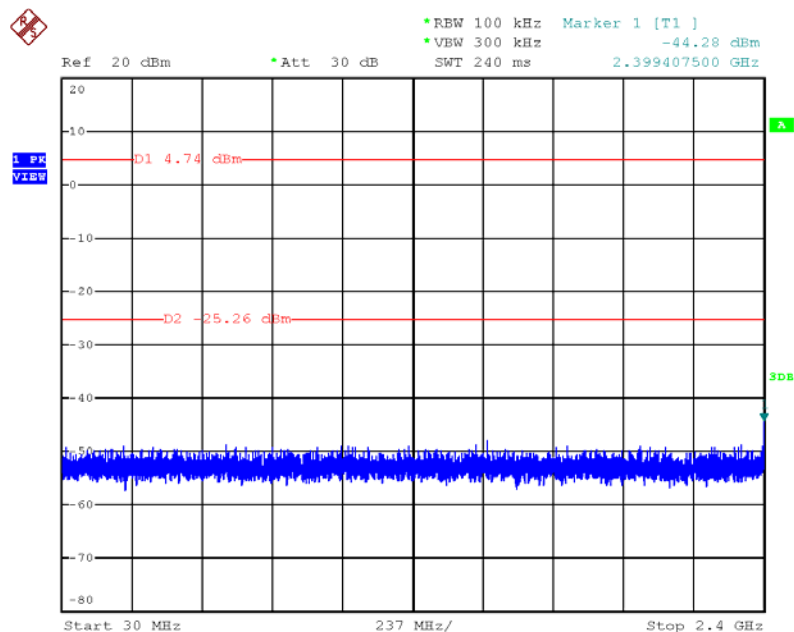


Date: 29.MAY.2013 23:29:13

Plot on Configuration For BR-1Mbps / GFSK / Channel 0 / 2500MHz~26500MHz (down 30dBc)  
/ Test Mode: Mode 1

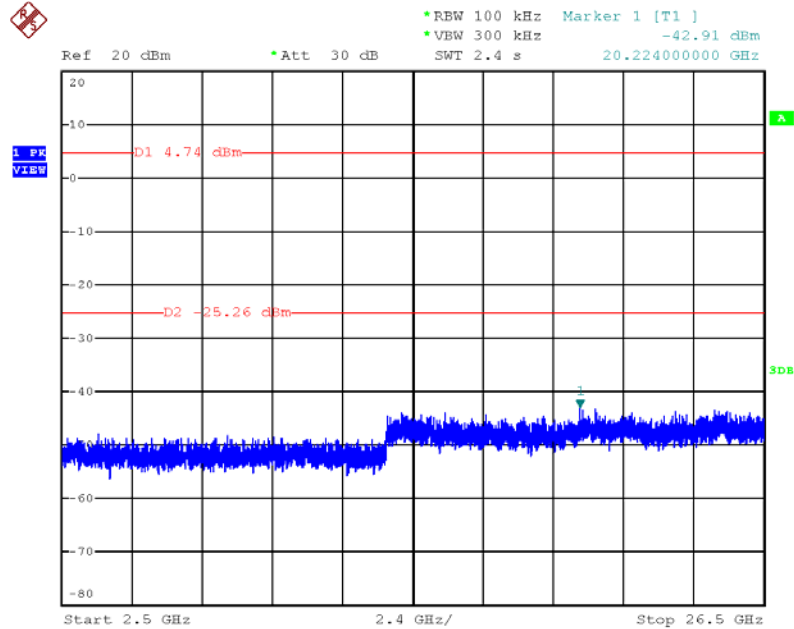

Date: 29.MAY.2013 23:29:38


Plot on Configuration For BR-1Mbps / GFSK / Channel 78 / Reference Level / Test Mode: Mode 1

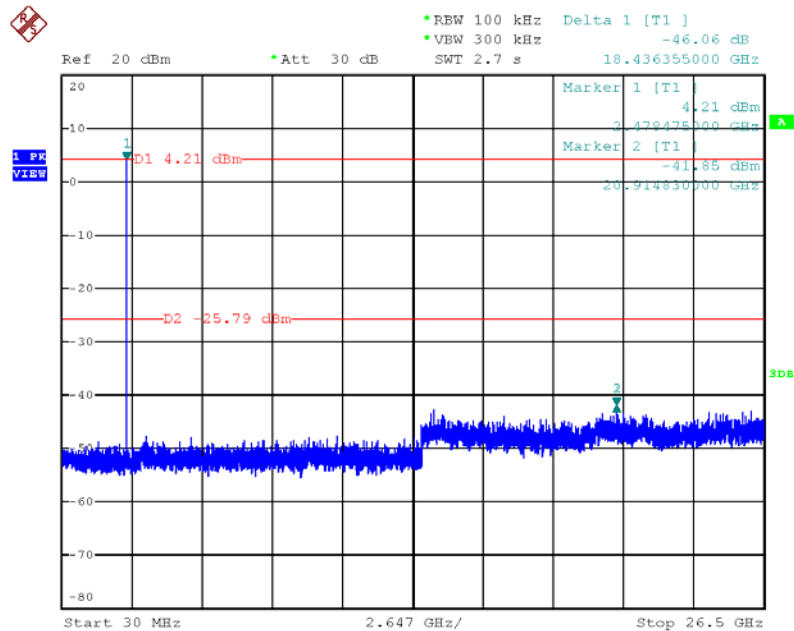

Date: 29.MAY.2013 23:30:47

# Plot on Configuration For BR-1Mbps / GFSK / Channel 78 / 30MHz~2400MHz (down 30dBc)


/ Test Mode: Mode 1

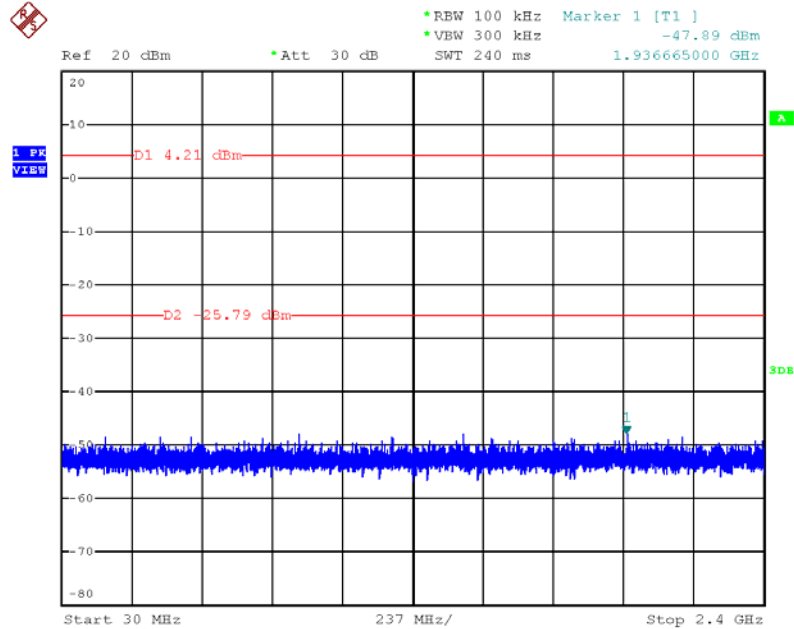

Date: 29.MAY.2013 23:31:07


# Plot on Configuration For BR-1Mbps 1.0 / GFSK / Channel 78 / 2500MHz~26500MHz (down 30dBc)

/ Test Mode: Mode 1

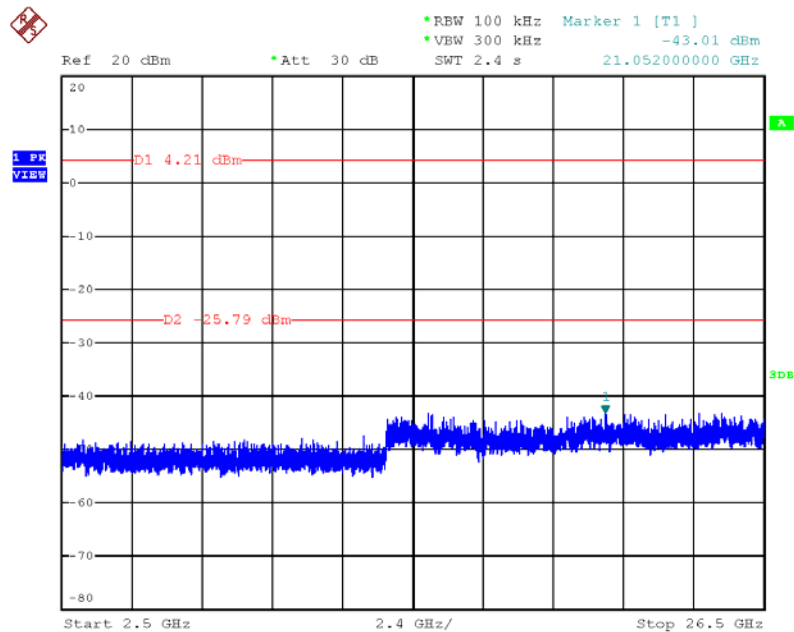


Date: 29.MAY.2013 23:31:28

### Plot on Configuration For BR-1Mbps / GFSK / Hopping / Reference Level / Test Mode: Mode 1

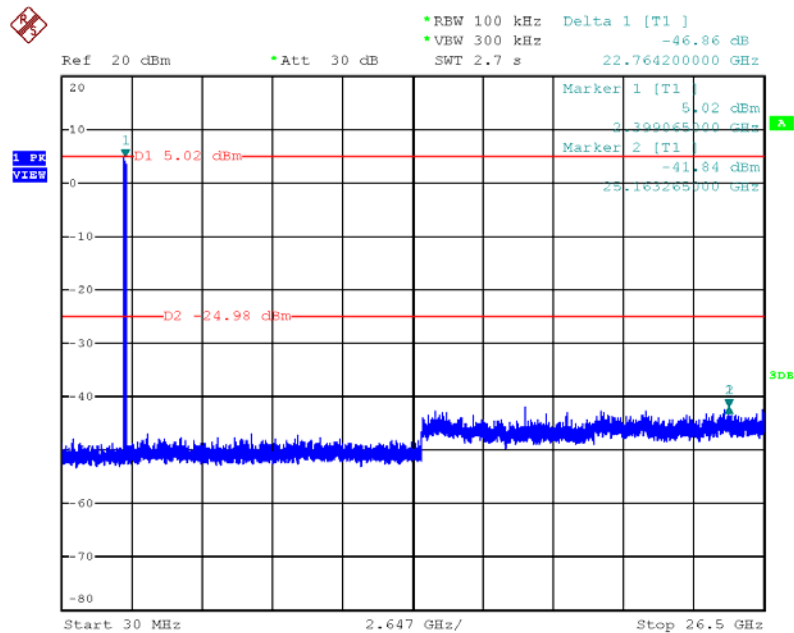


Date: 29.MAY.2013 23:33:22

### Plot on Configuration For BR-1Mbps / GFSK / Hopping / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 1

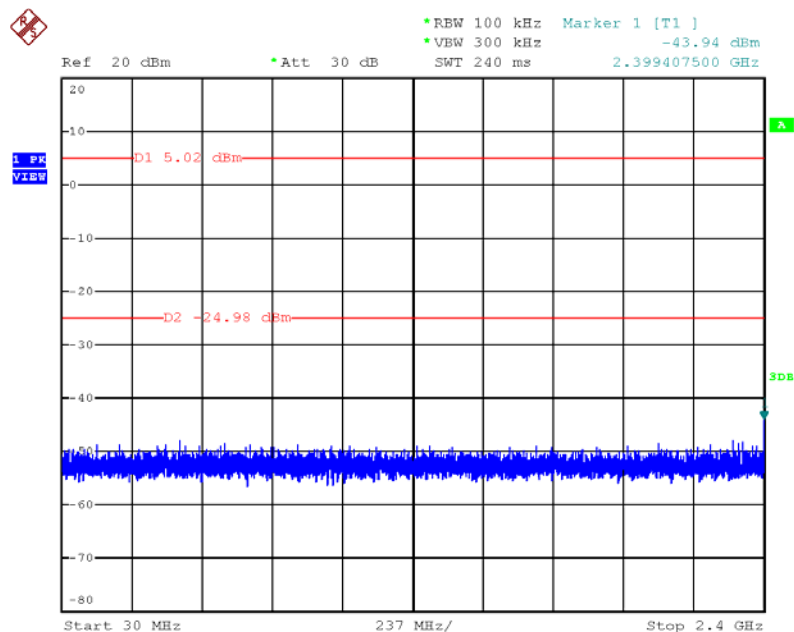

Date: 29.MAY.2013 23:34:16


Plot on Configuration For BR-1Mbps / GFSK / Hopping / 2500MHz~26500MHz (down 30dBc)  
/ Test Mode: Mode 1

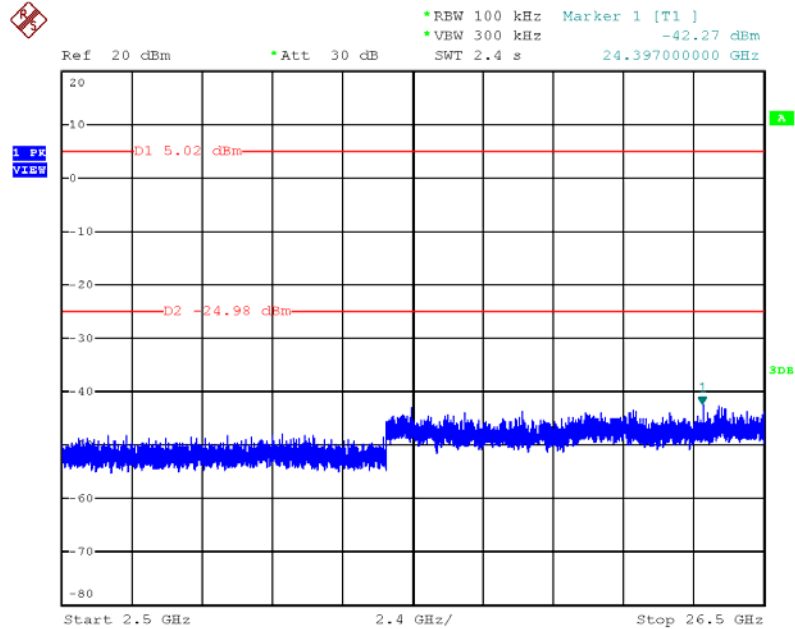

Date: 29.MAY.2013 23:34:43




### Plot on Configuration For EDR-3Mbps / 8DPSK / Channel 0 / Reference Level / Test Mode: Mode 1

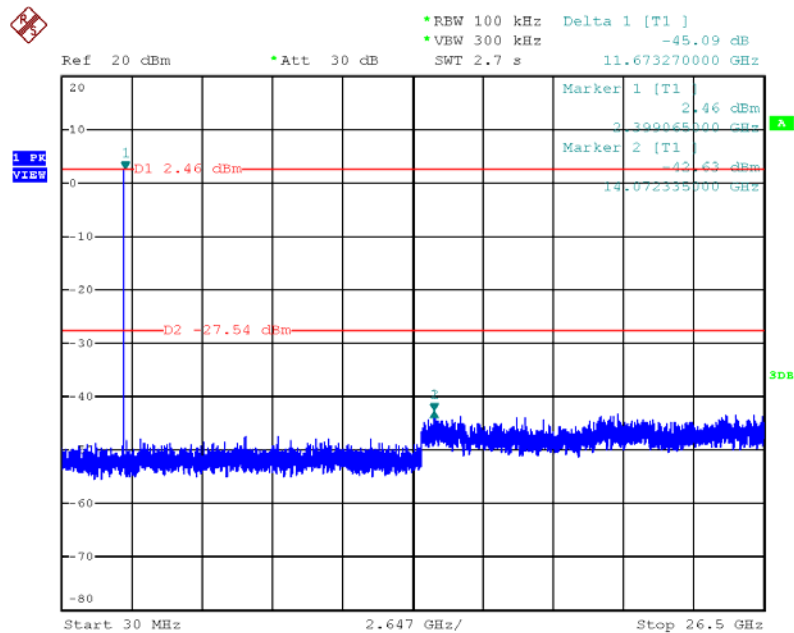


Date: 29.MAY.2013 23:11:09

### Plot on Configuration For EDR-3Mbps / 8DPSK / Channel 0 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 1

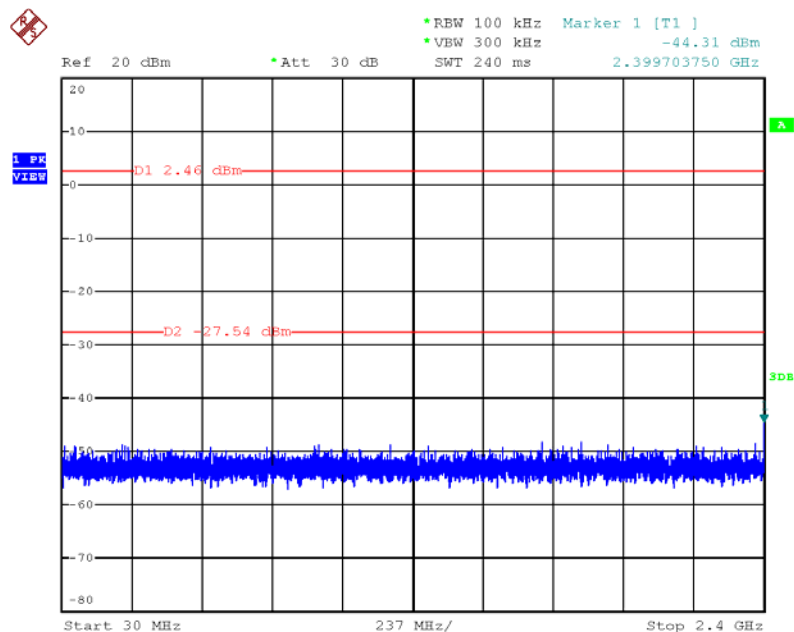


Date: 29.MAY.2013 23:12:14

Plot on Configuration For EDR-3Mbps / 8DPSK / Channel 0 / 2500MHz~26500MHz (down 30dBc)  
/ Test Mode: Mode 1

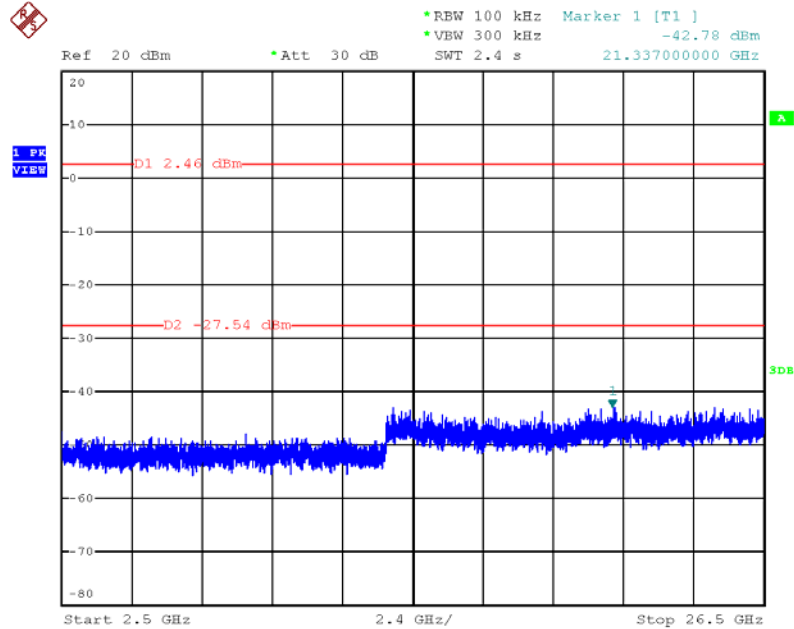


Date: 29.MAY.2013 23:12:56

Plot on Configuration For EDR-3Mbps / 8DPSK / Channel 78 / Reference Level / Test Mode: Mode 1

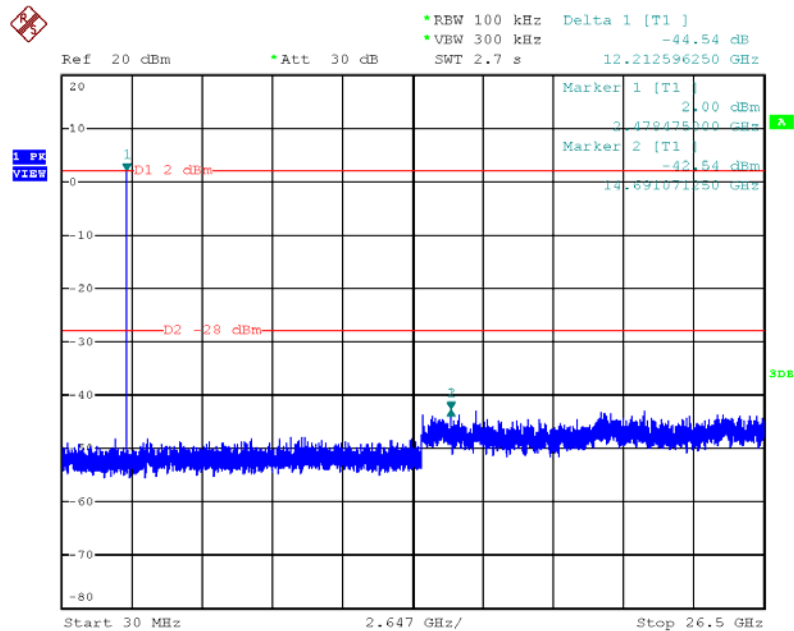


Date: 29.MAY.2013 23:17:13

Plot on Configuration For EDR-3Mbps / 8DPSK / Channel 78 / 30MHz~2400MHz (down 30dBc)  
/ Test Mode: Mode 1

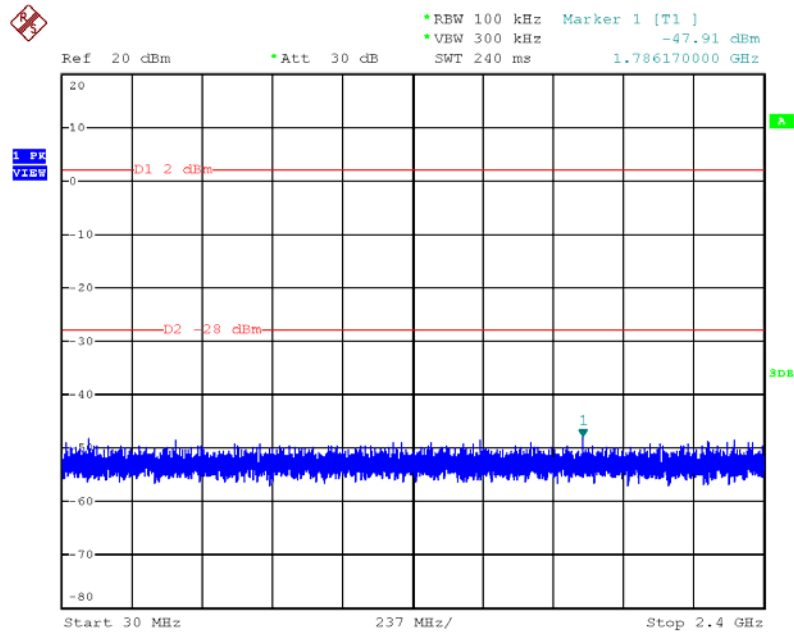


Date: 29.MAY.2013 23:17:32

Plot on Configuration For EDR-3Mbps / 8DPSK / Channel 78 / 2500MHz~26500MHz (down 30dBc)  
/ Test Mode: Mode 1

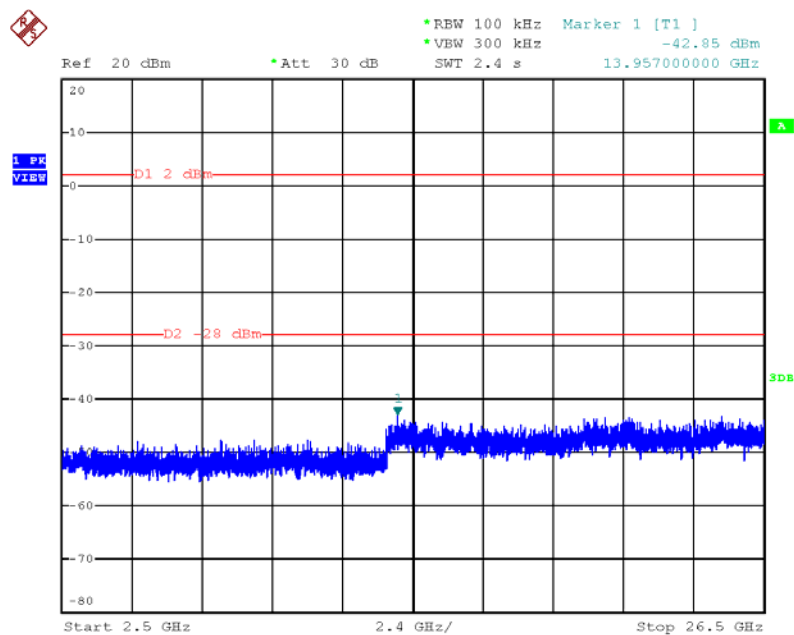


Date: 29.MAY.2013 23:17:48

### Plot on Configuration For EDR-3Mbps / 8DPSK / Hopping / Reference Level / Test Mode: Mode 1

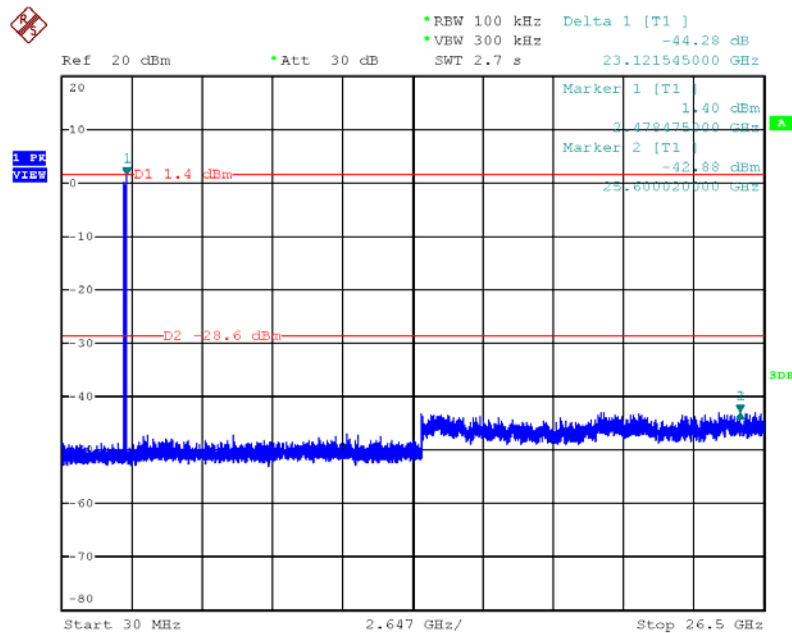


Date: 29.MAY.2013 23:21:37

### Plot on Configuration For EDR-3Mbps / 8DPSK / Hopping / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 1

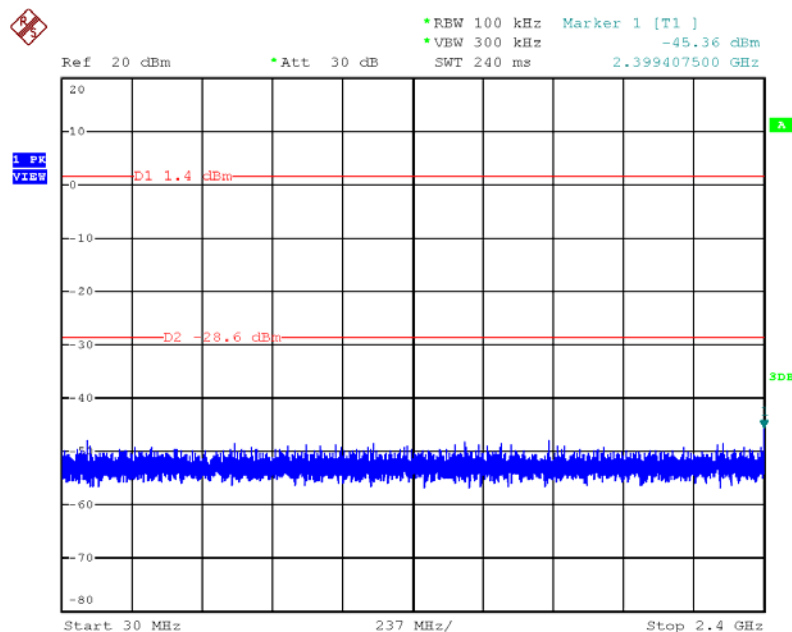

Date: 29.MAY.2013 23:22:25

Plot on Configuration For EDR-3Mbps / 8DPSK / Hopping / 2500MHz~26500MHz (down 30dBc)  
/ Test Mode: Mode 1

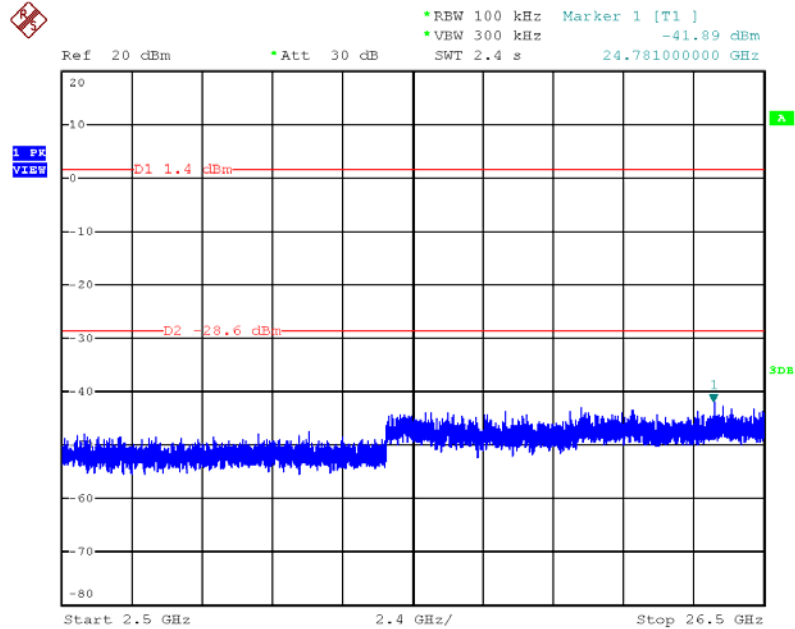

Date: 29.MAY.2013 23:23:04

## **4.8. Antenna Requirements**

### **4.8.1. Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

### **4.8.2. Antenna Connector Construction**

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Oct. 23, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9kHz ~ 30MHz	Jun. 22, 2012	Conduction (CO01-CB)
Impulsbegrenzer Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz~30MHz	Feb. 21, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz~40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Apr. 15, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 28, 2012	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

Note: \* Calibration Interval of instruments listed above is two years.



## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 7. MEASUREMENT UNCERTAINTY

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch Receiver VSWR 1 = AMN/LISN VSWR 2 =	-0.080	dB	U-shaped	0.060
combined standard uncertainty $Ue(y)$	1.2			
Measuring uncertainty for a level of confidence of 95% $U=2Ue(y)$	2.4			

### Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	0.038	dB	normal(k=2)	0.019
Attenuator	0.047	dB	normal(k=2)	0.024
Power Meter specification	0.300	dB	normal(k=2)	0.150
Power Sensor specification	0.300	dB	normal(k=2)	0.150
Mismatch Receiver VSWR 1 = Antenna VSWR 2 = Pre Amplifier VSWR 3 =	-0.080	dB	U-shaped	0.060
combined standard uncertainty $Ue(y)$	0.403			
Measuring uncertainty for a level of confidence of 95% $U=2Ue(y)$	0.806			