
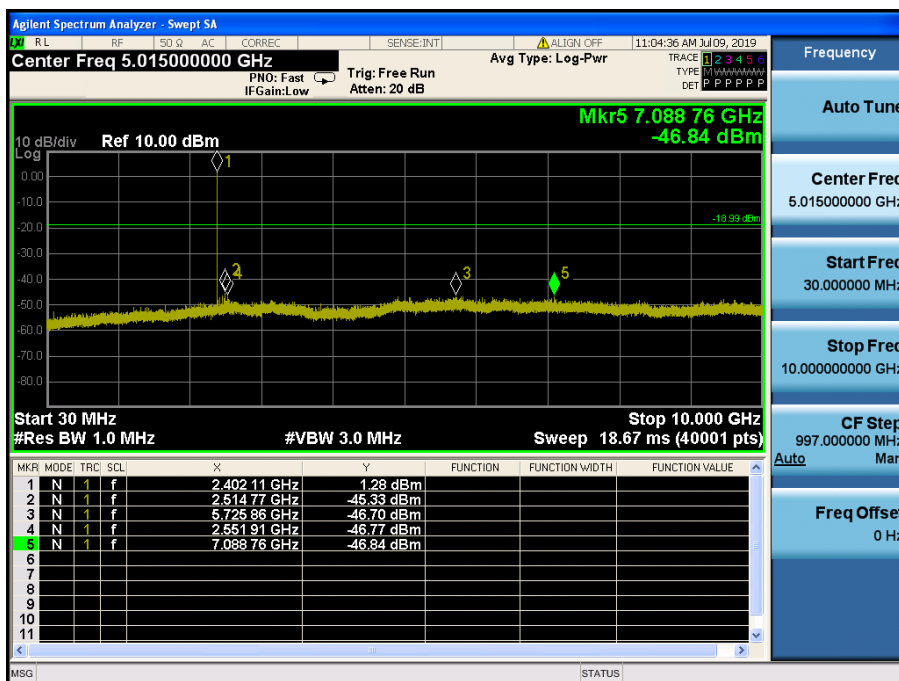



Conducted Spurious Emissions ***Lowest Channel & Modulation : GFSK***

Conducted Spurious Emissions *Lowest Channel & Modulation : GFSK*

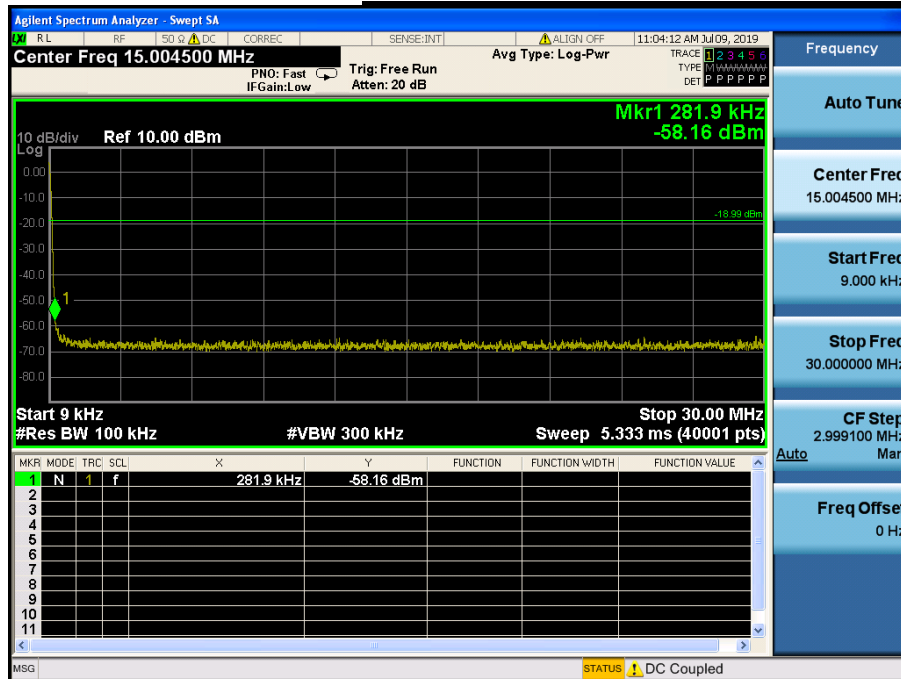


Reference for limit

Middle Channel & Modulation : GFSK


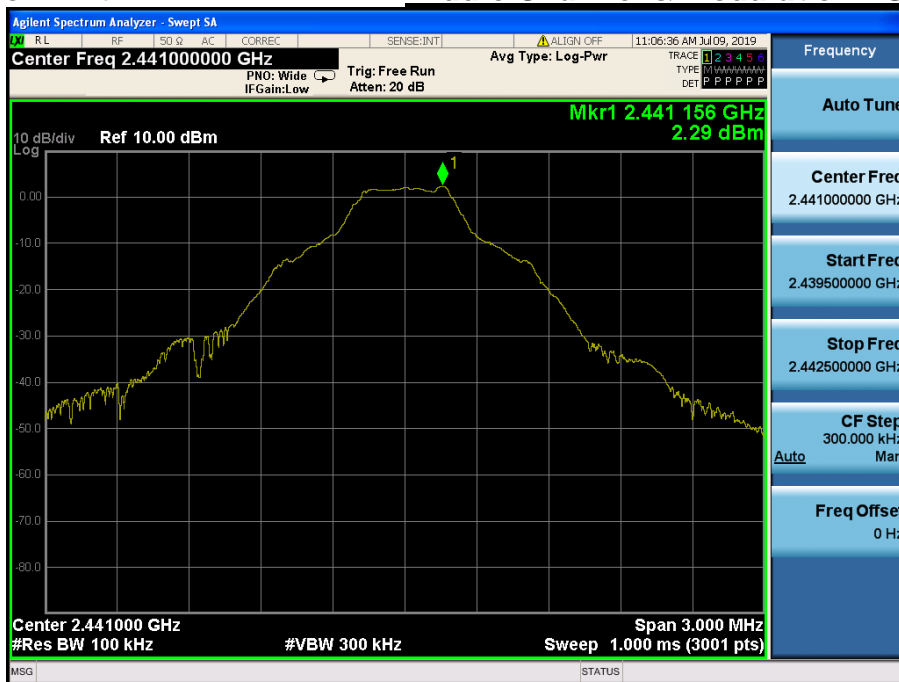


Conducted Spurious Emissions


Middle Channel & Modulation : GFSK

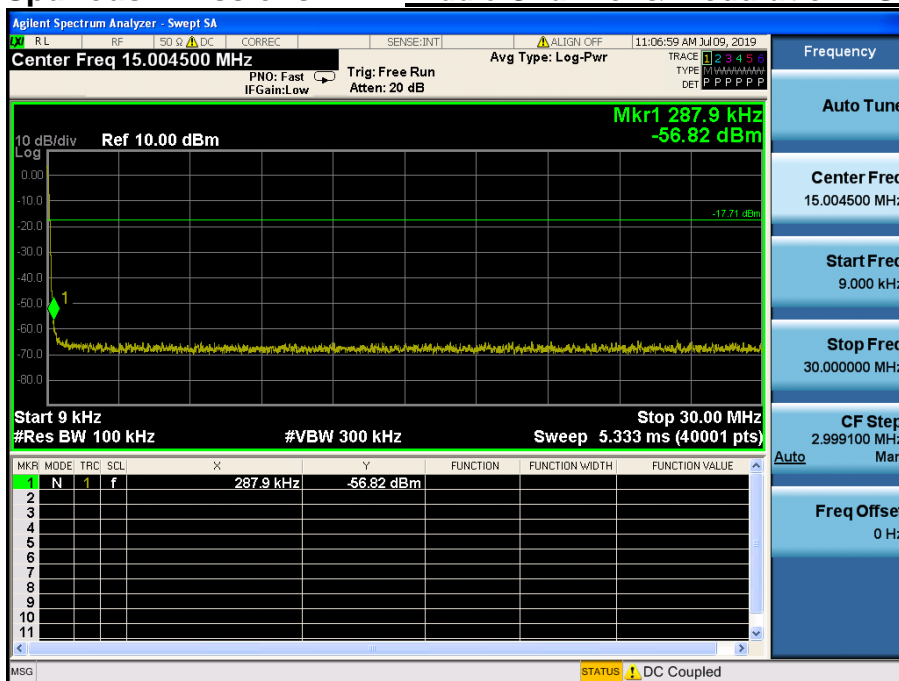

Conducted Spurious Emissions

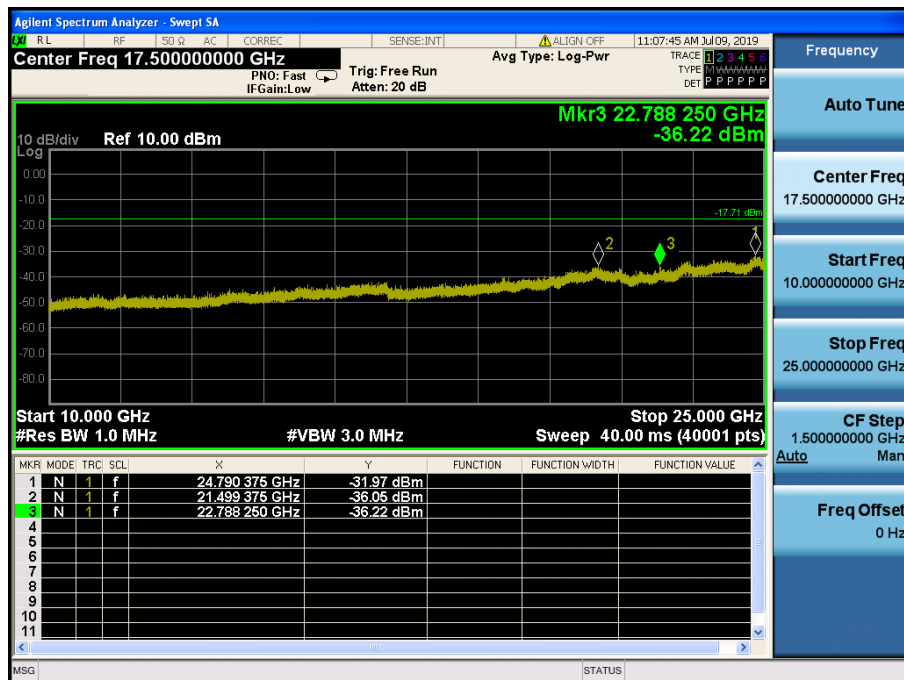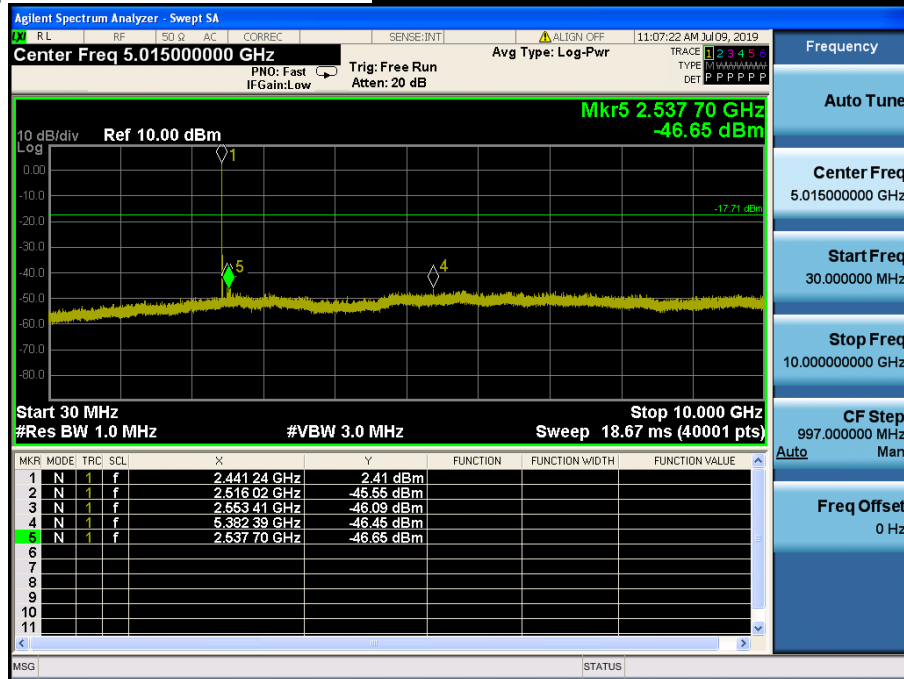Middle Channel & Modulation : GFSK



High Band-edge

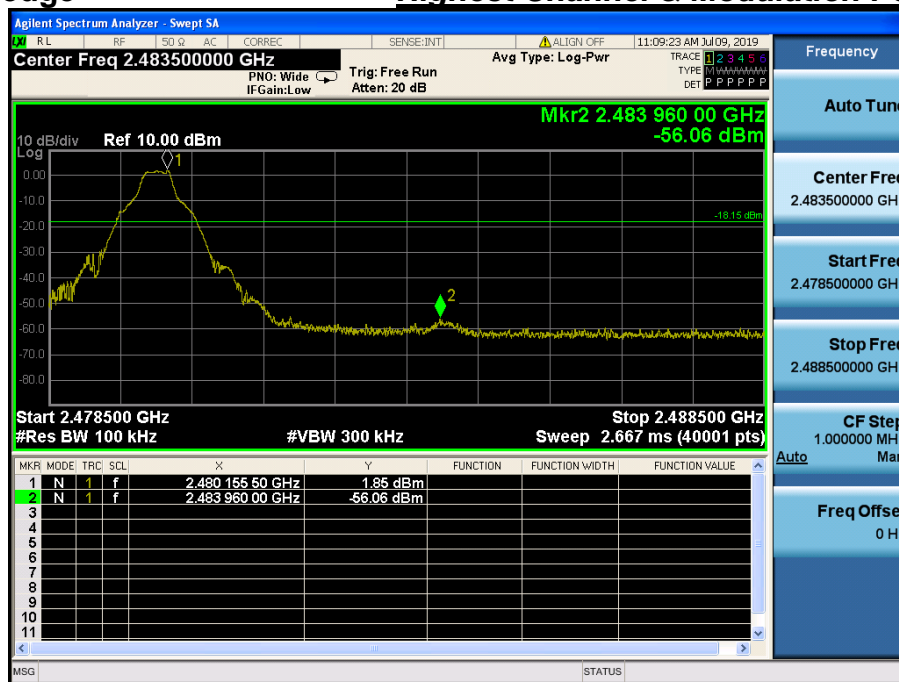Highest Channel & Modulation : GFSK

High Band-edge

Hopping mode & Modulation : GFSK


Conducted Spurious Emissions *Highest Channel & Modulation : GFSK*

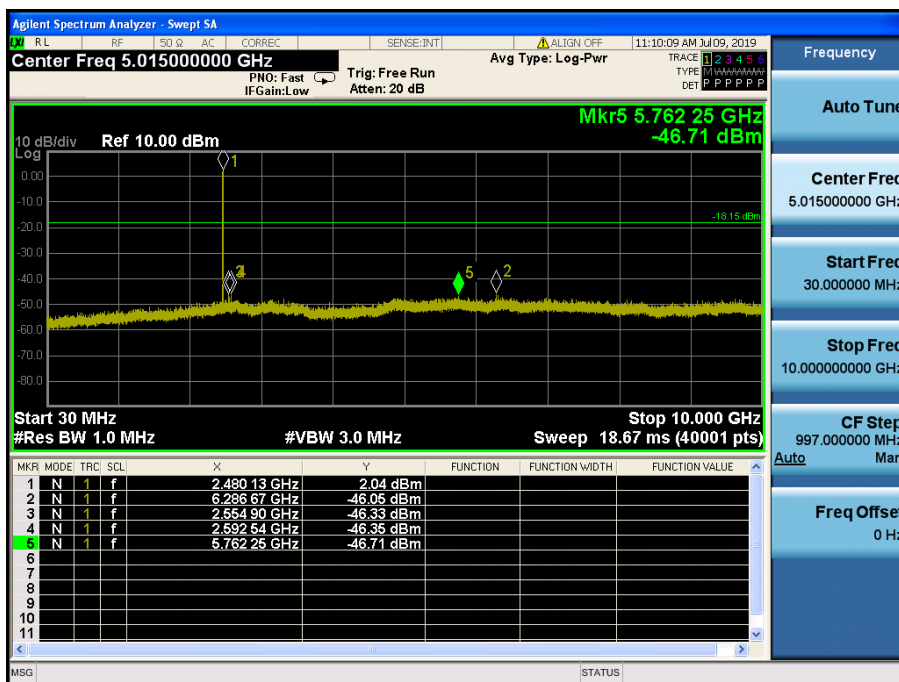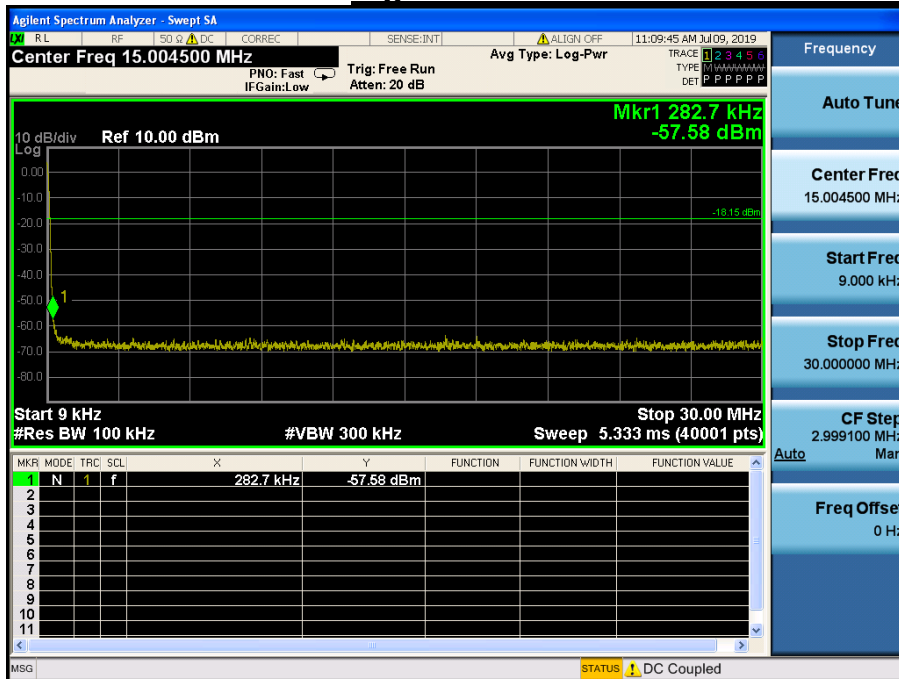


Conducted Spurious Emissions *Highest Channel & Modulation : GFSK*



Low Band-edge

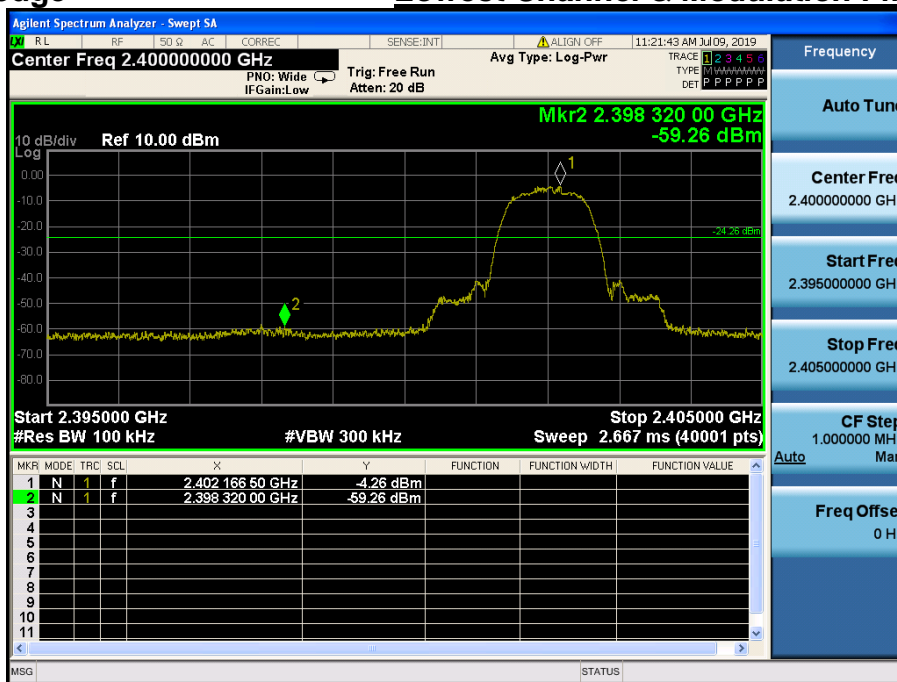Lowest Channel & Modulation : $\pi/4$ DQPSK


Low Band-edge

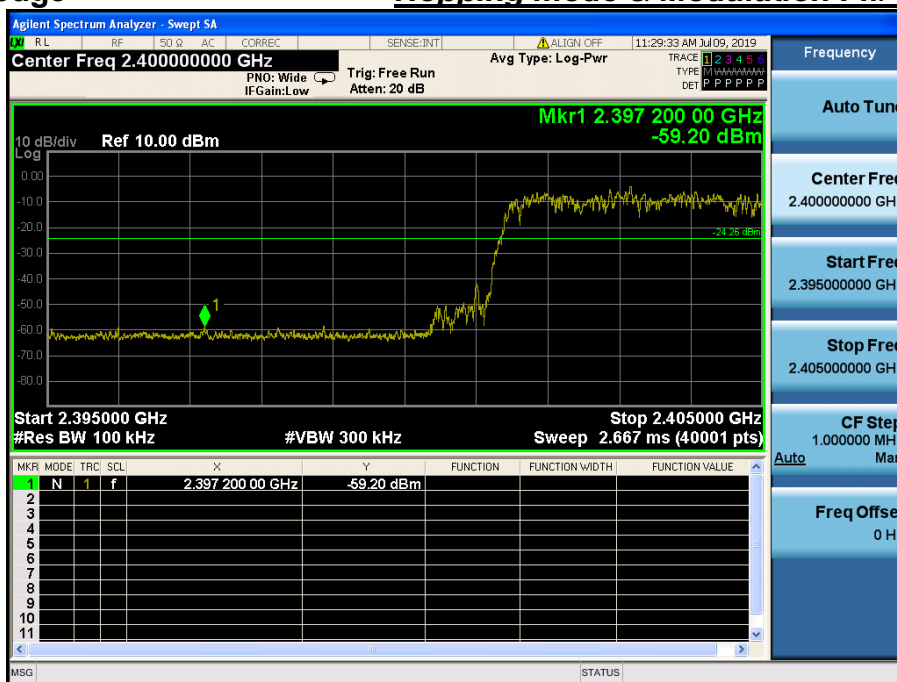Hopping mode & Modulation : $\pi/4$ DQPSK


Conducted Spurious Emissions Lowest Channel & Modulation : $\pi/4$ DQPSK




Reference for limit

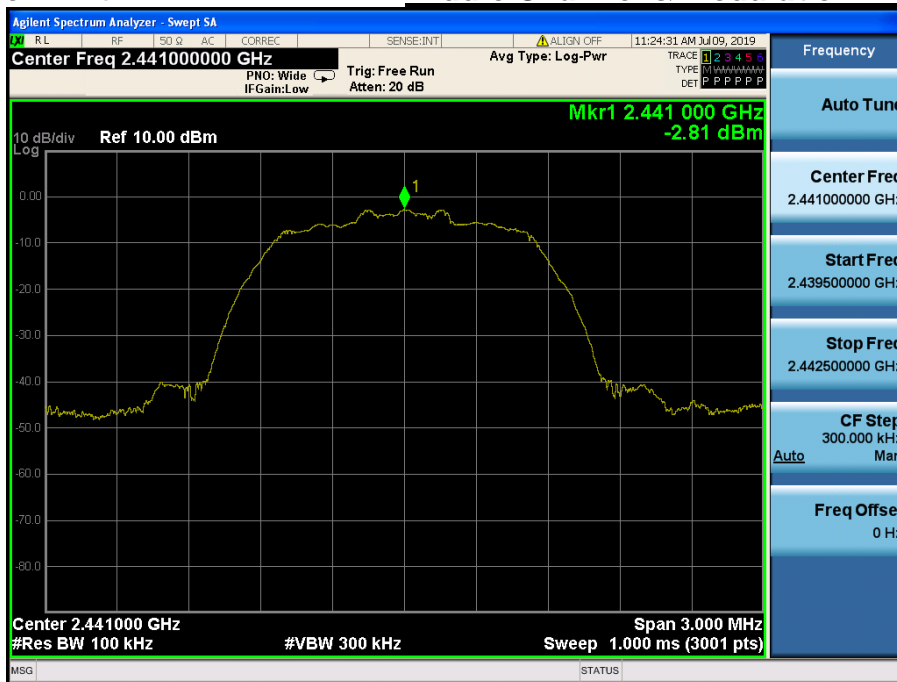Middle Channel & Modulation : $\pi/4$ DQPSK


Conducted Spurious Emissions

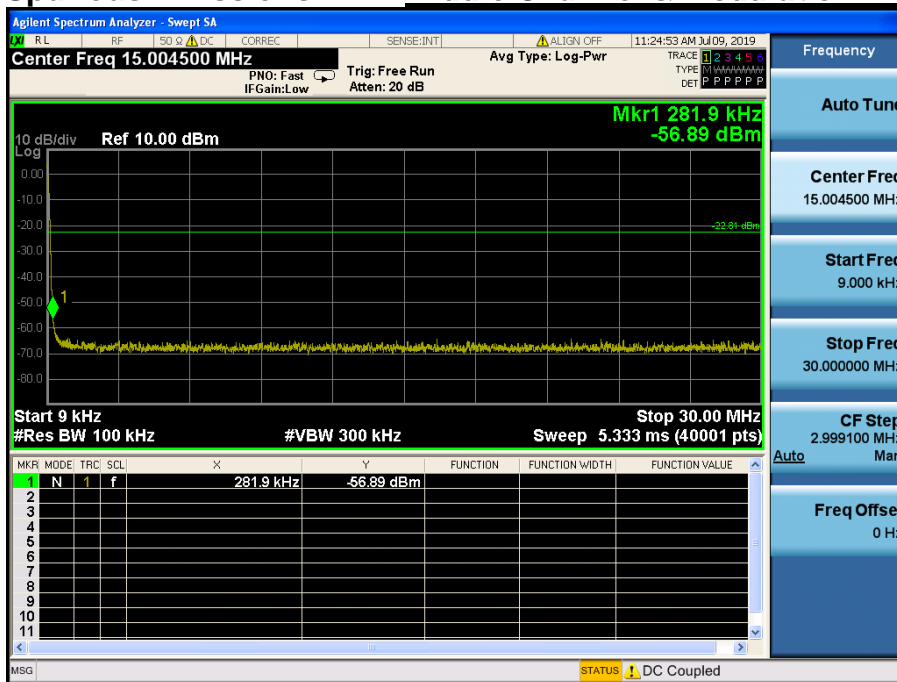Middle Channel & Modulation : $\pi/4$ DQPSK


Conducted Spurious Emissions

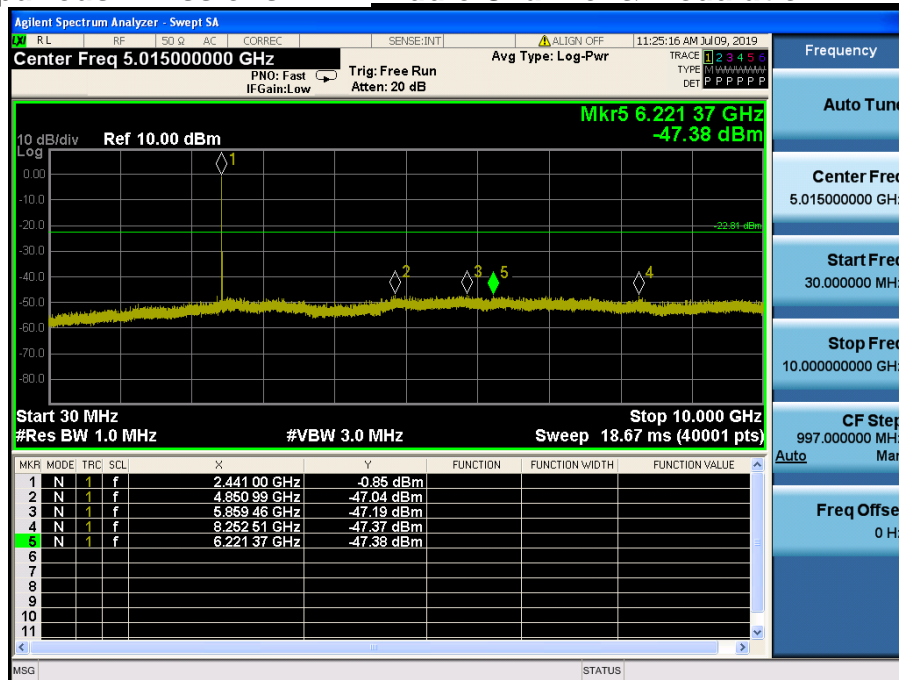Middle Channel & Modulation : $\pi/4$ DQPSK

High Band-edge


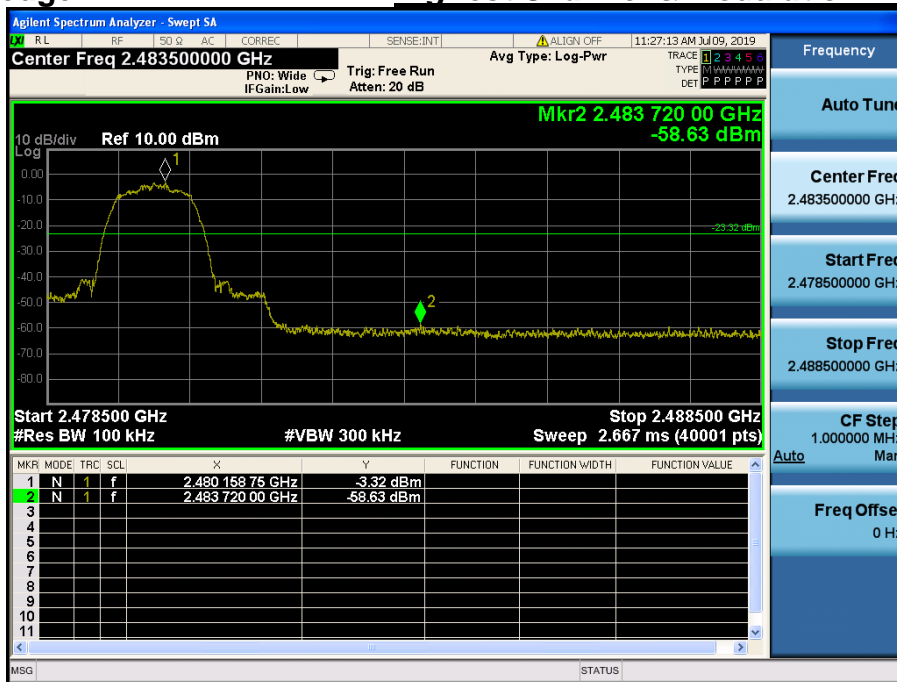
Highest Channel & Modulation : $\pi/4$ DQPSK

High Band-edge

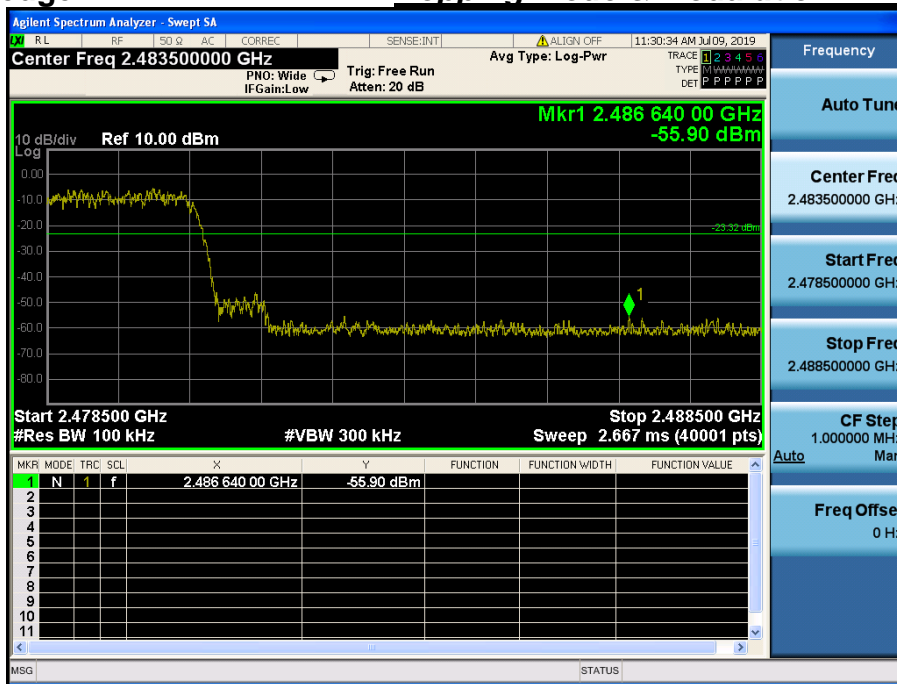Hopping mode & Modulation : $\pi/4$ DQPSK


Conducted Spurious Emissions

Highest Channel & Modulation : $\pi/4$ DQPSK

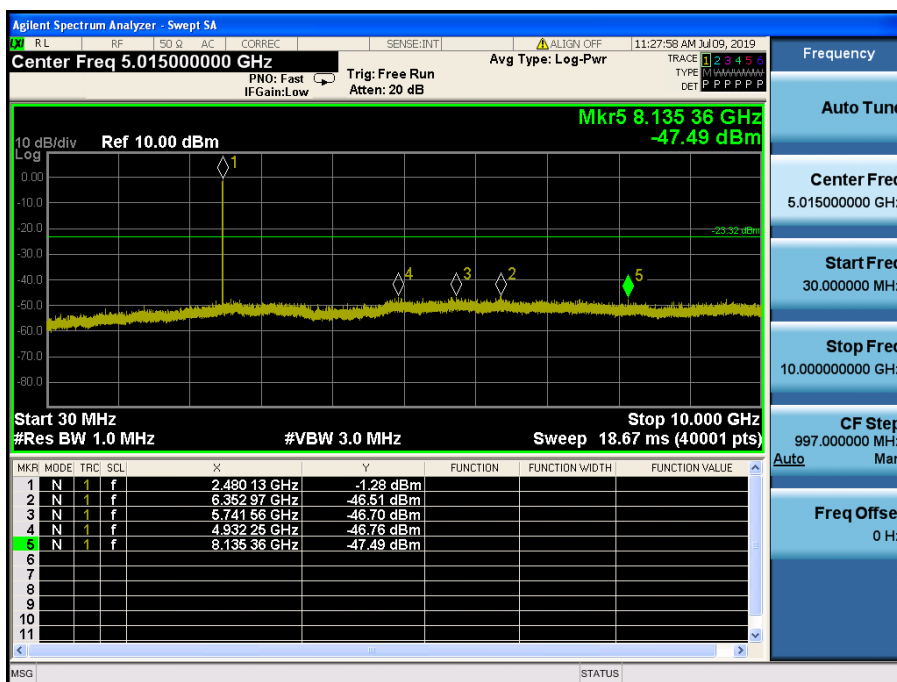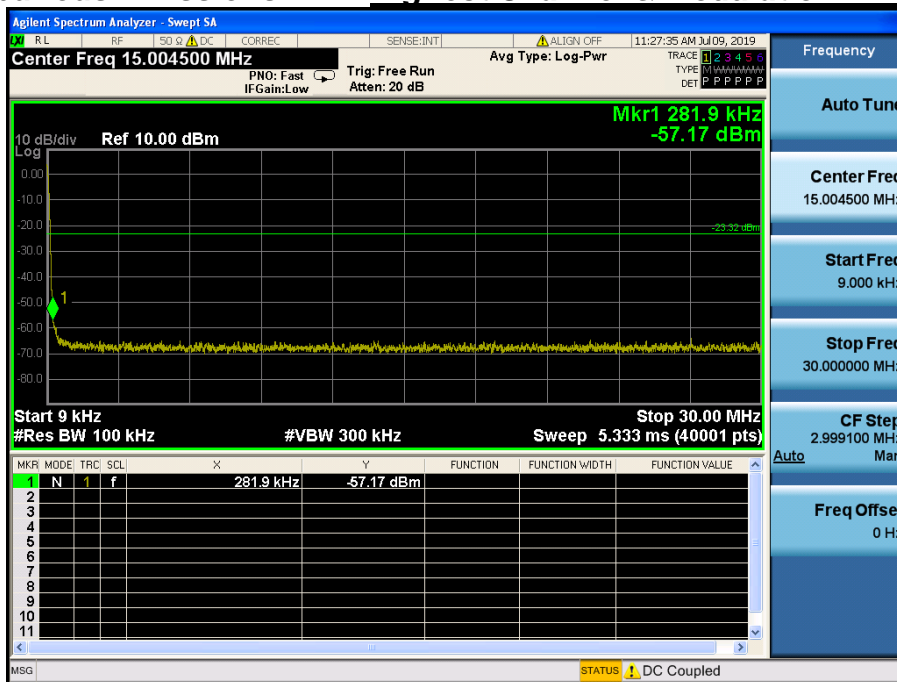


Conducted Spurious Emissions

Highest Channel & Modulation : $\pi/4$ DQPSK

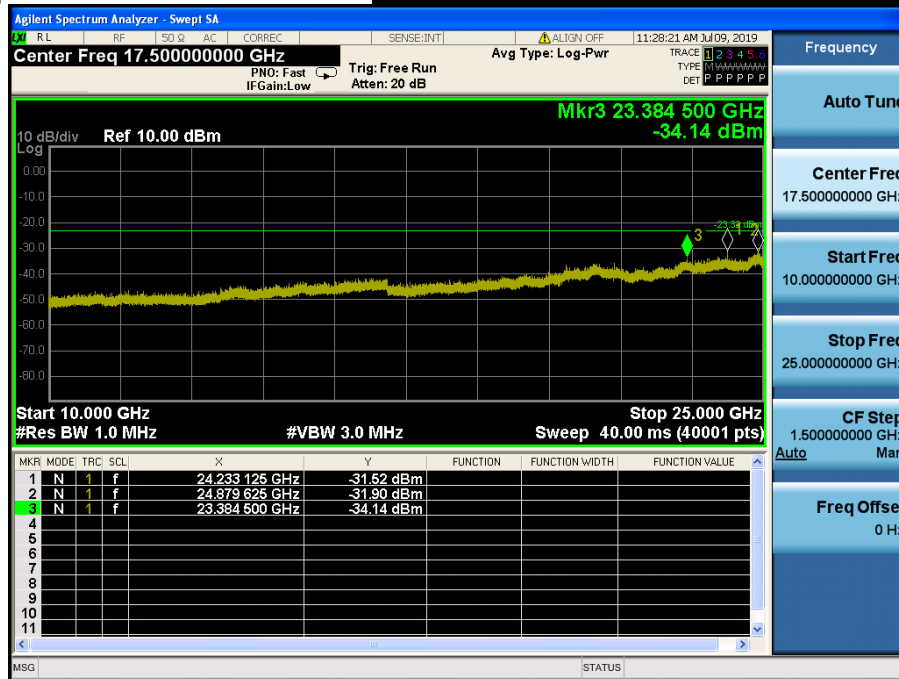


Low Band-edge

Lowest Channel & Modulation : 8DPSK

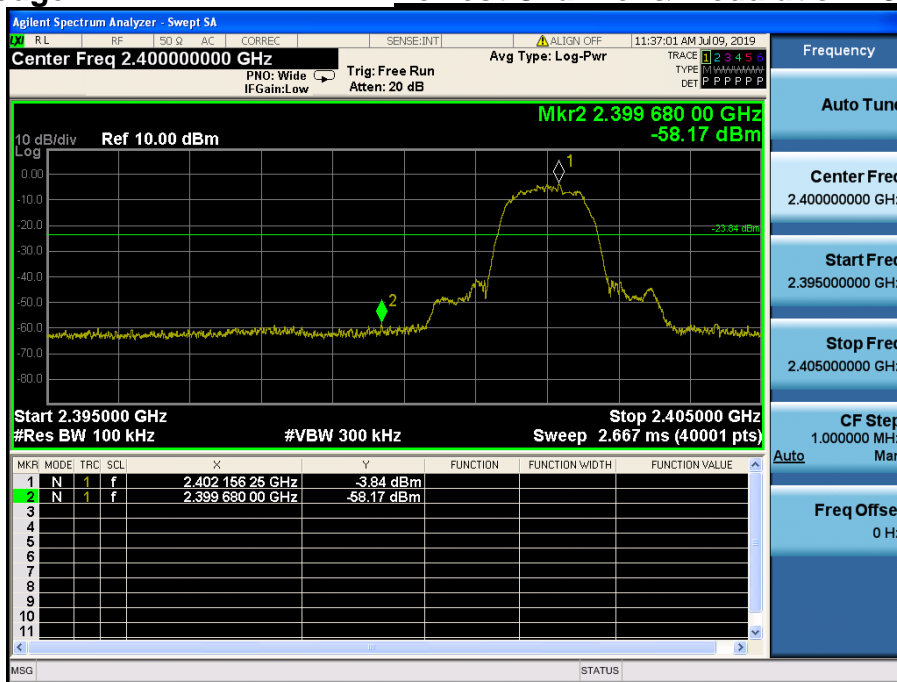



Low Band-edge

Hopping mode & Modulation : 8DPSK

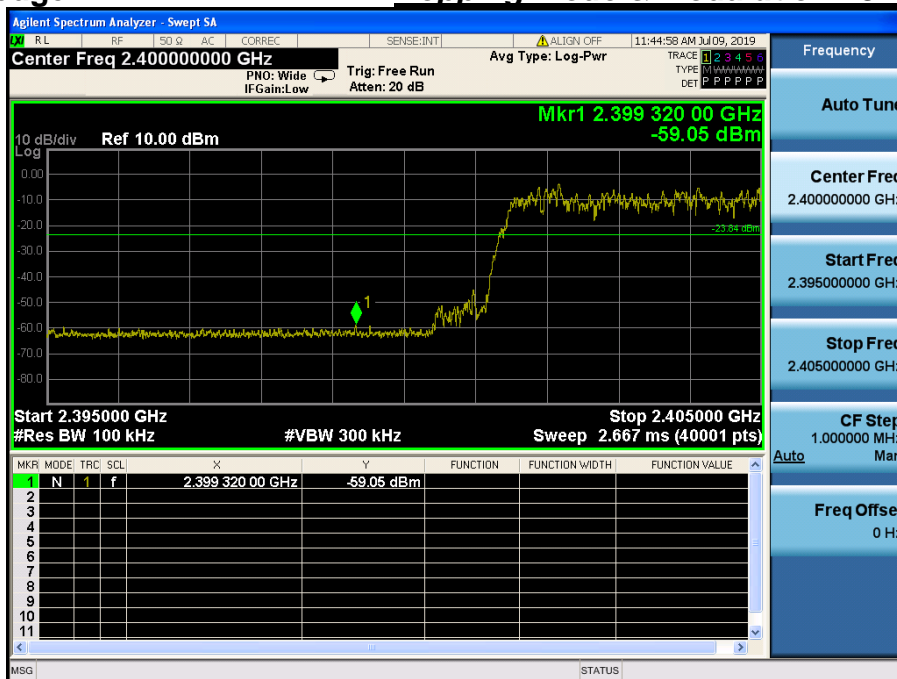


Conducted Spurious Emissions

Lowest Channel & Modulation : 8DPSK

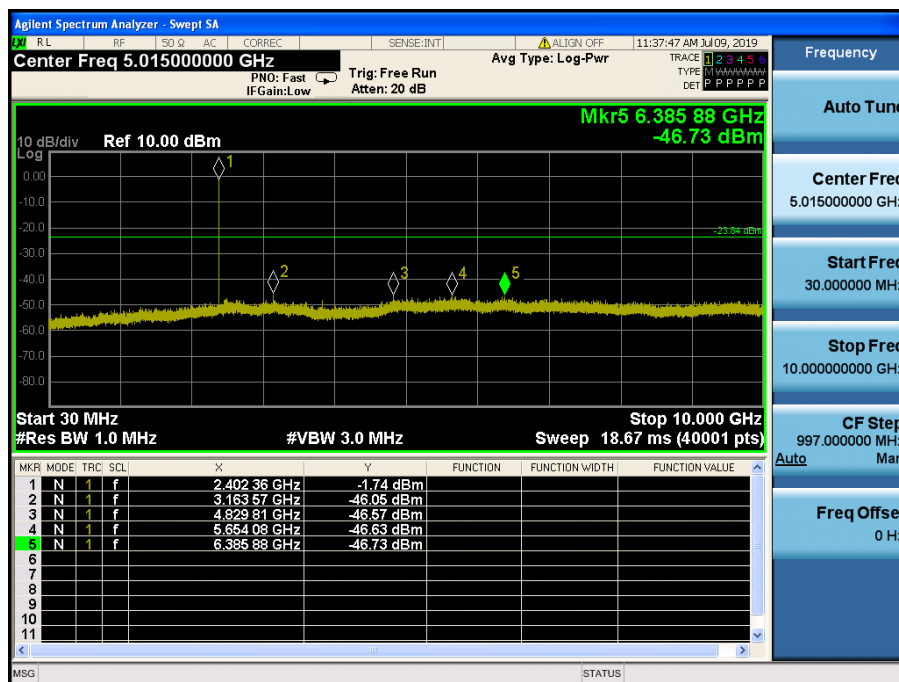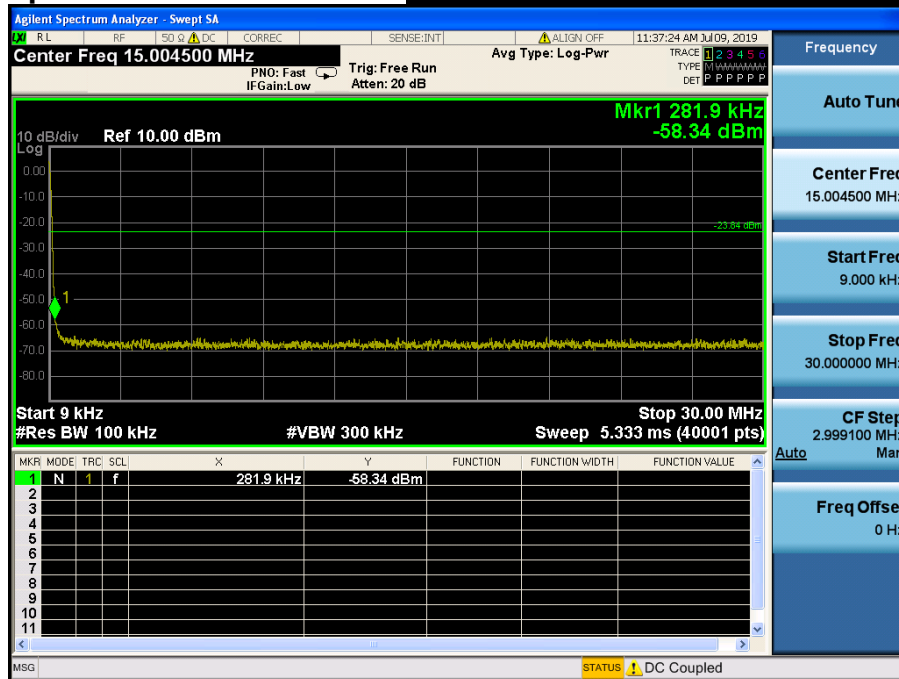


Conducted Spurious Emissions

Lowest Channel & Modulation : 8DPSK

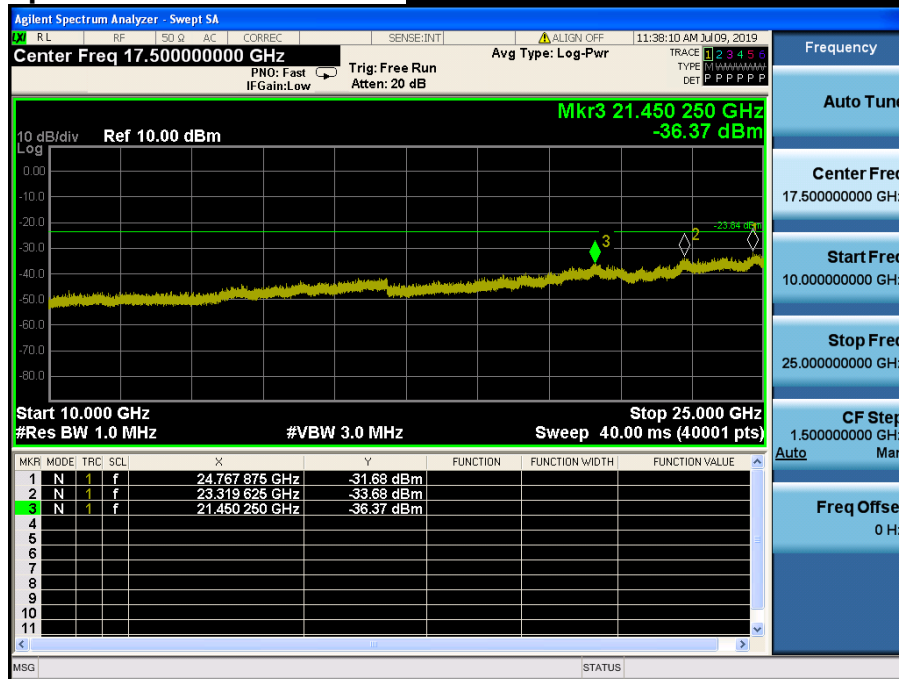


Reference for limit

Middle Channel & Modulation : 8DPSK

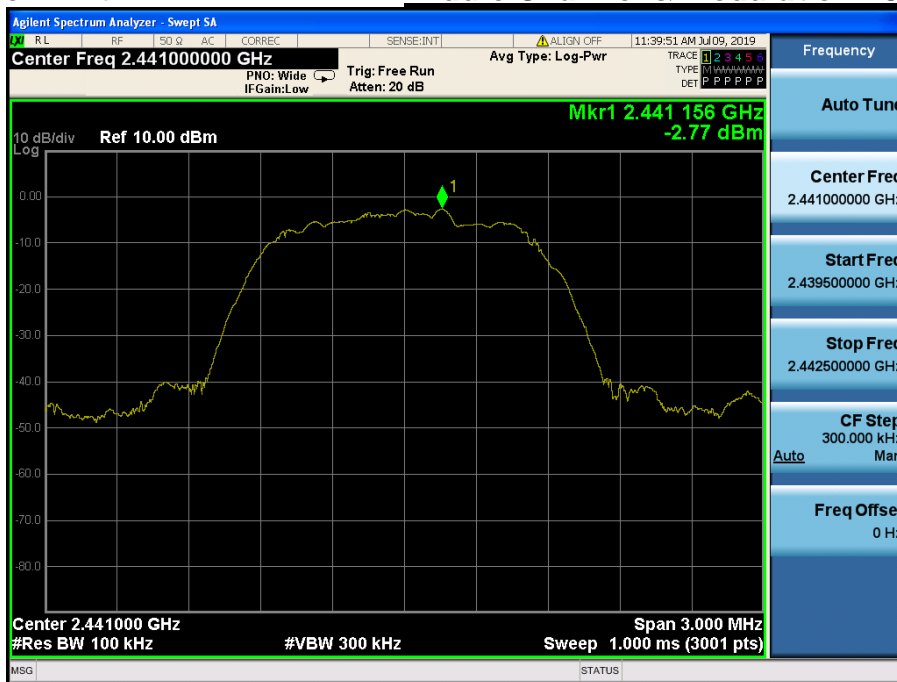


Conducted Spurious Emissions

Middle Channel & Modulation : 8DPSK

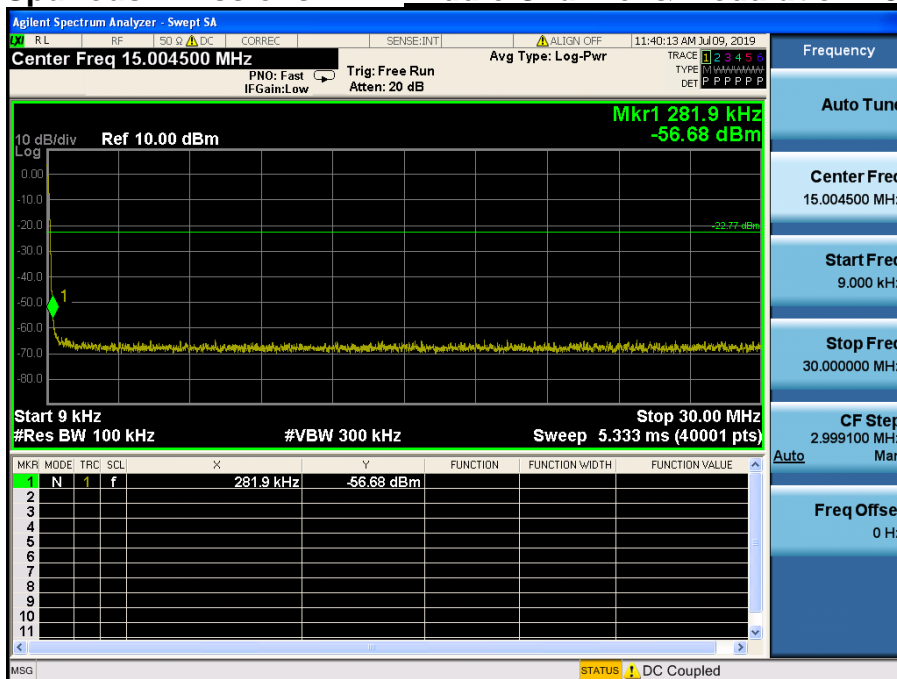


Conducted Spurious Emissions

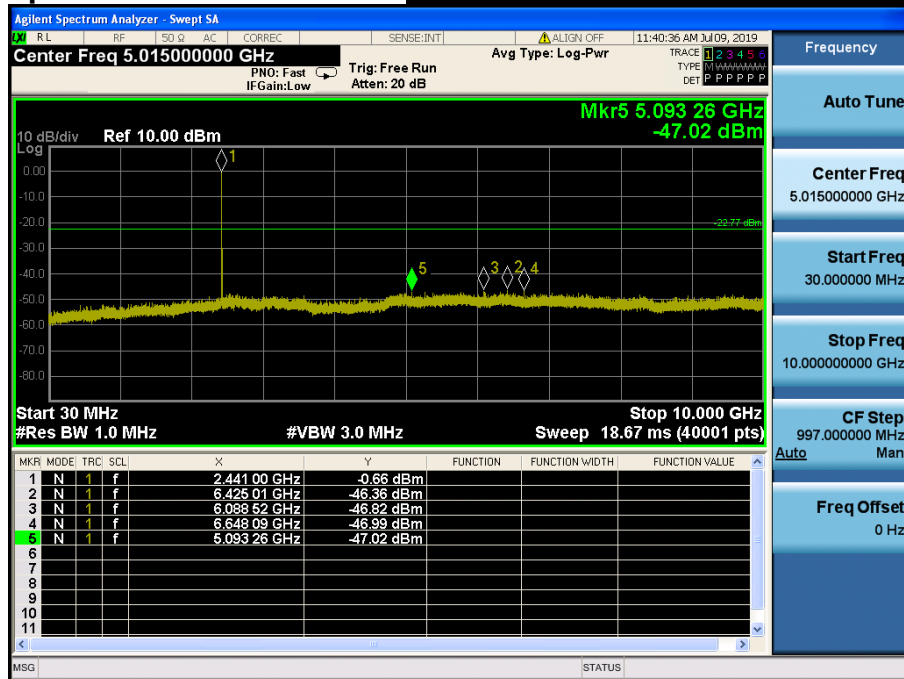Middle Channel & Modulation : 8DPSK


High Band-edge

Highest Channel & Modulation : 8DPSK

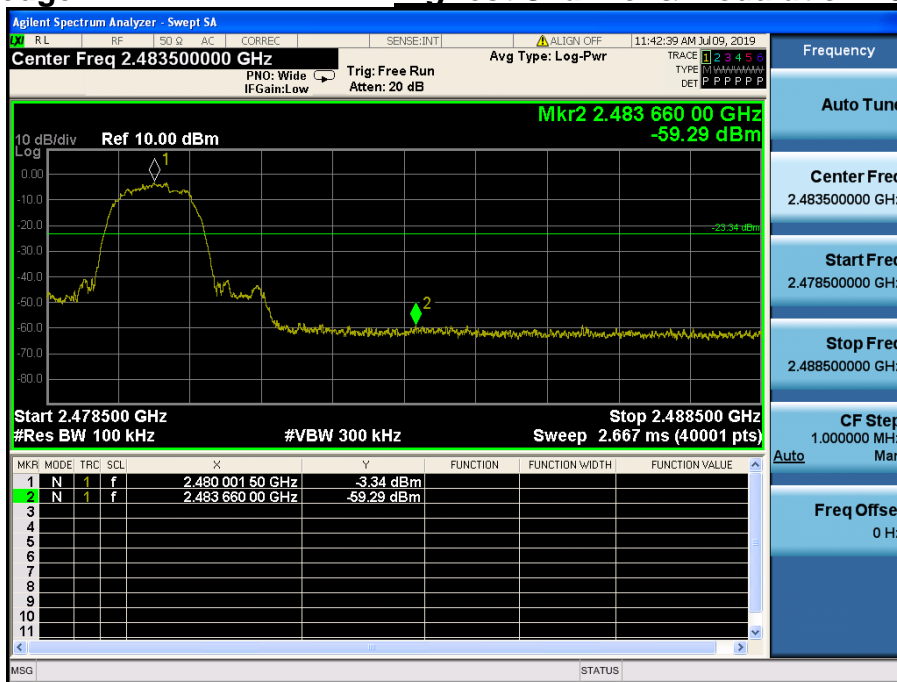



High Band-edge

Hopping mode & Modulation : 8DPSK

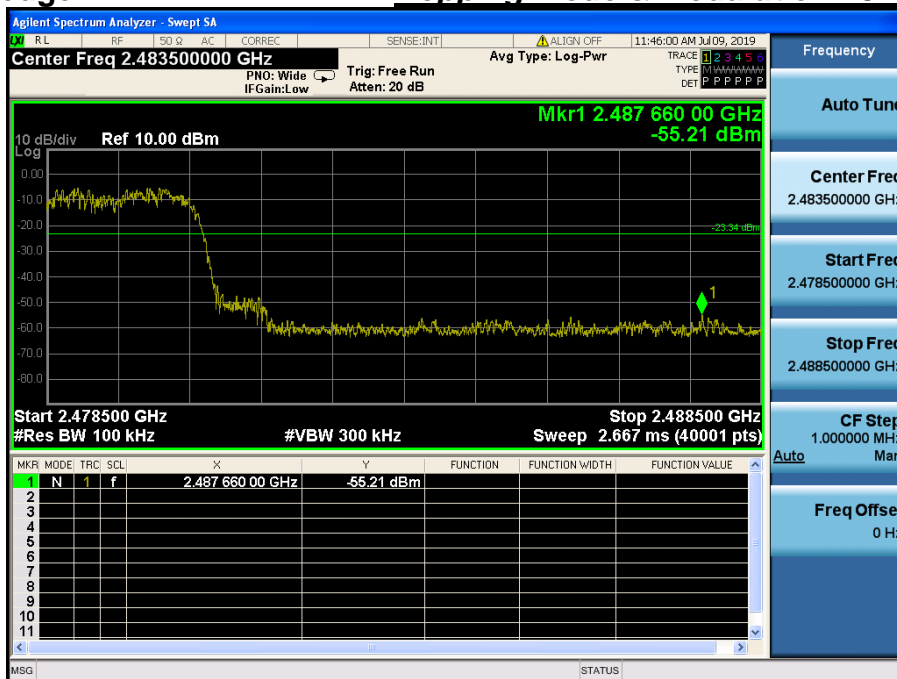


Conducted Spurious Emissions

Highest Channel & Modulation : 8DPSK

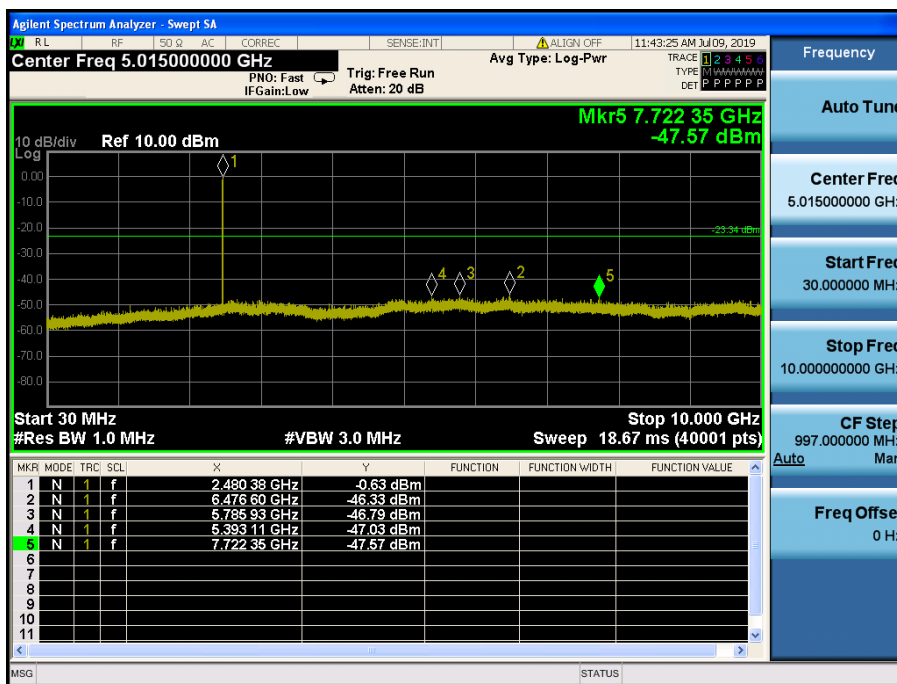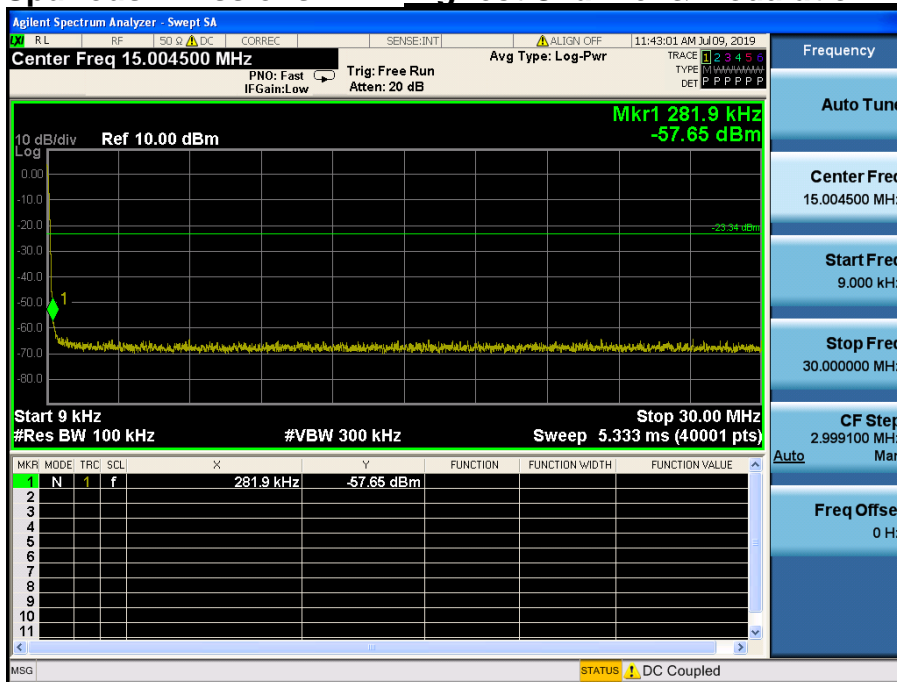

Conducted Spurious Emissions

Highest Channel & Modulation : 8DPSK

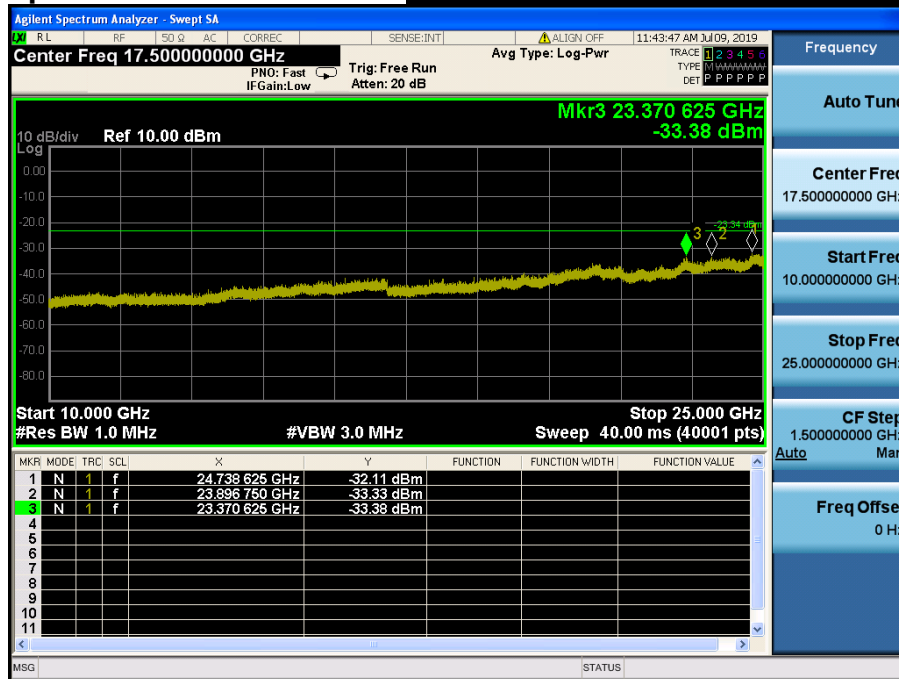

8. Transmitter AC Power Line Conducted Emission

8.1 Test Setup

NA

8.2 Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

8.3 Test Procedures

Conducted emissions from the EUT were measured according to the ANSI C63.10.

1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

8.4 Test Results

NA

9. Antenna Requirement

Describe how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.

Conclusion: Comply

The internal antenna is permanently attached.


- Minimum Standard :

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions.


APPENDIX I

Test set up diagrams

▪ Radiated Measurement

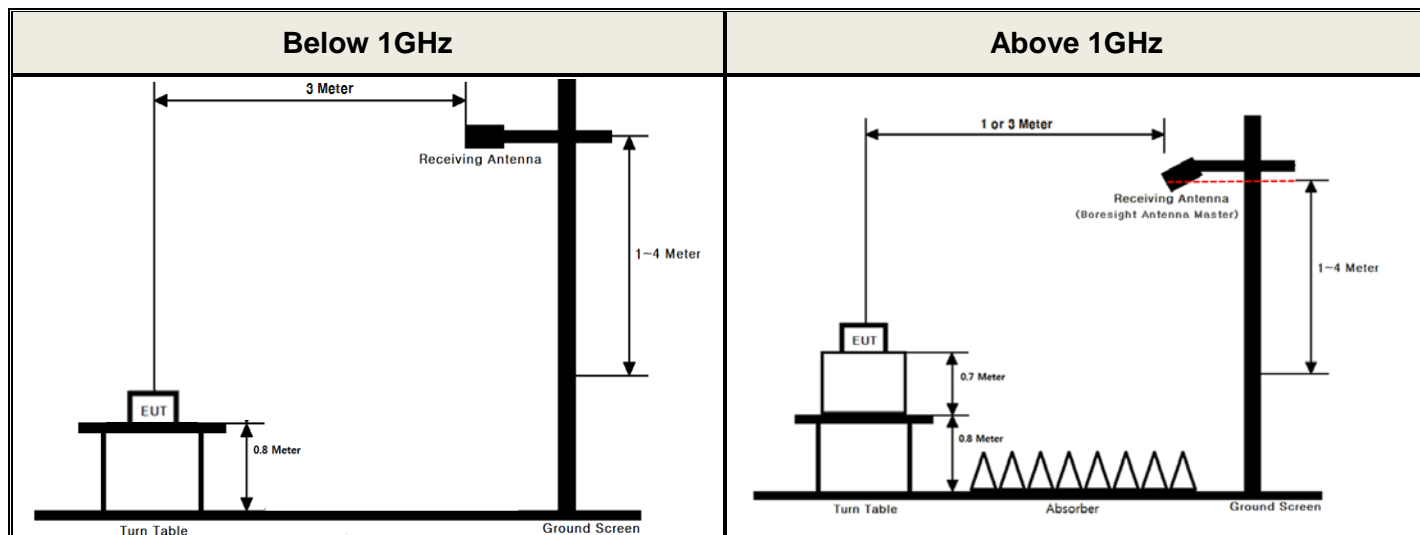

▪ Conducted Measurement

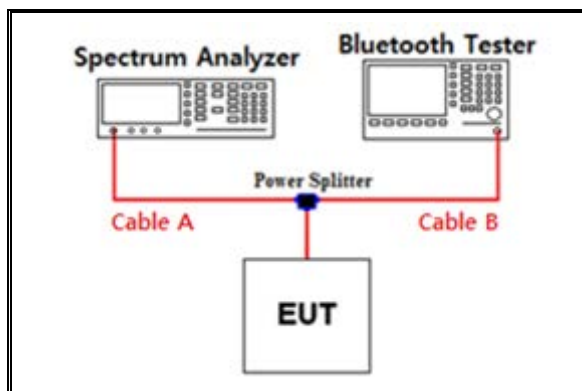

Path loss information

Frequency (GHz)	Path Loss (dB)	Frequency (GHz)	Path Loss (dB)
0.03	6.89	15	10.36
1	7.01	20	10.57
2.402 & 2.440 & 2.480	7.63	25	11.52
5	8.41	-	-
10	9.41	-	-

Note 1 : The path loss from EUT to Spectrum analyzer were measured and used for test.


Path loss (S/A's Correction factor) = Cable A + Power splitter

APPENDIX II

Unwanted Emissions (Radiated) Test Plot


GFSK & Lowest & X & Ver

Detector Mode : PK

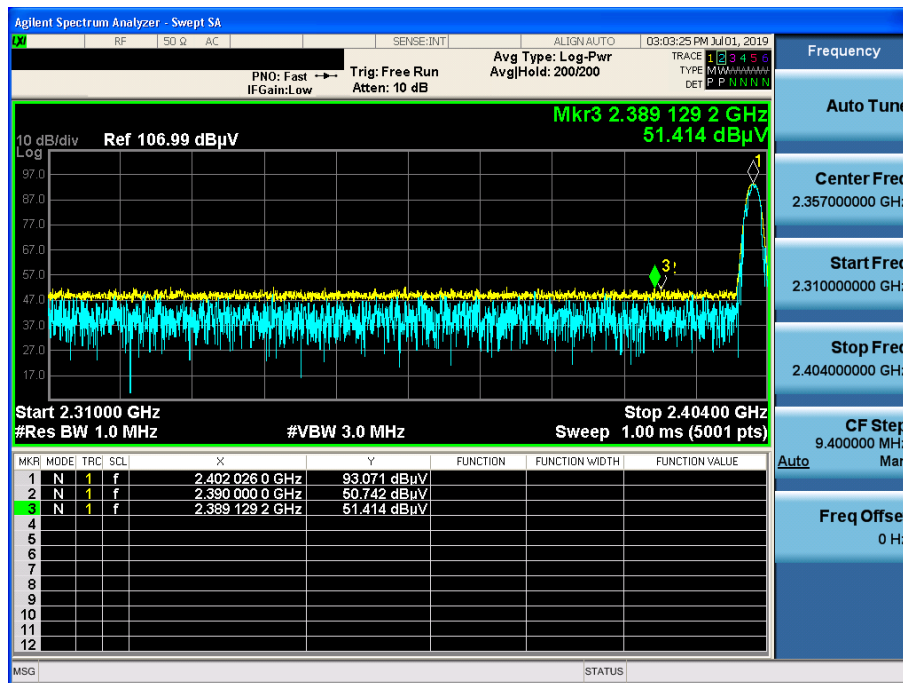


GFSK & Highest & X & Ver

Detector Mode : PK

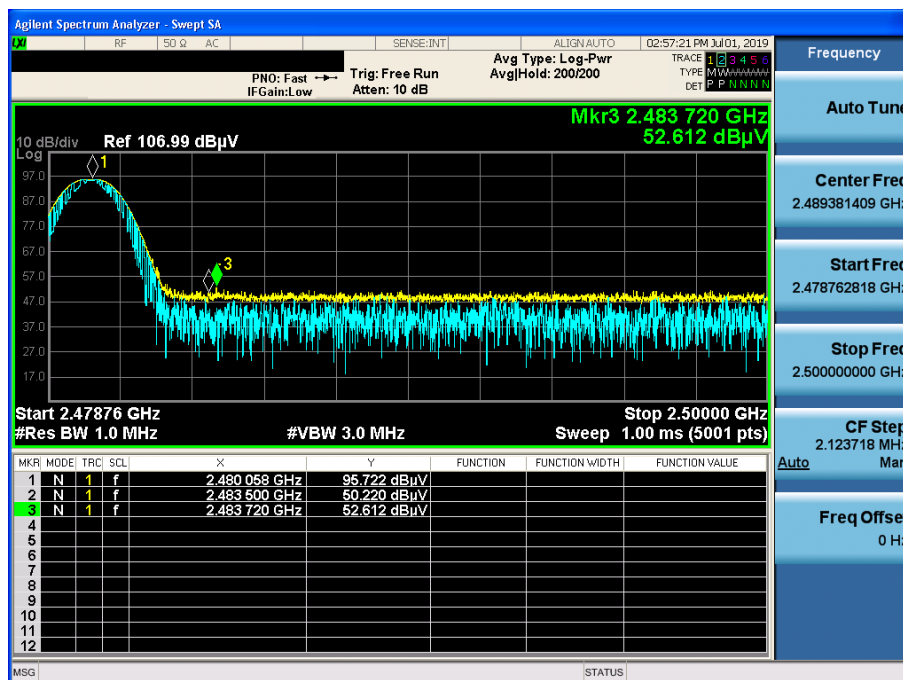


π /4DQPSK & Lowest & X & Hor

Detector Mode : PK

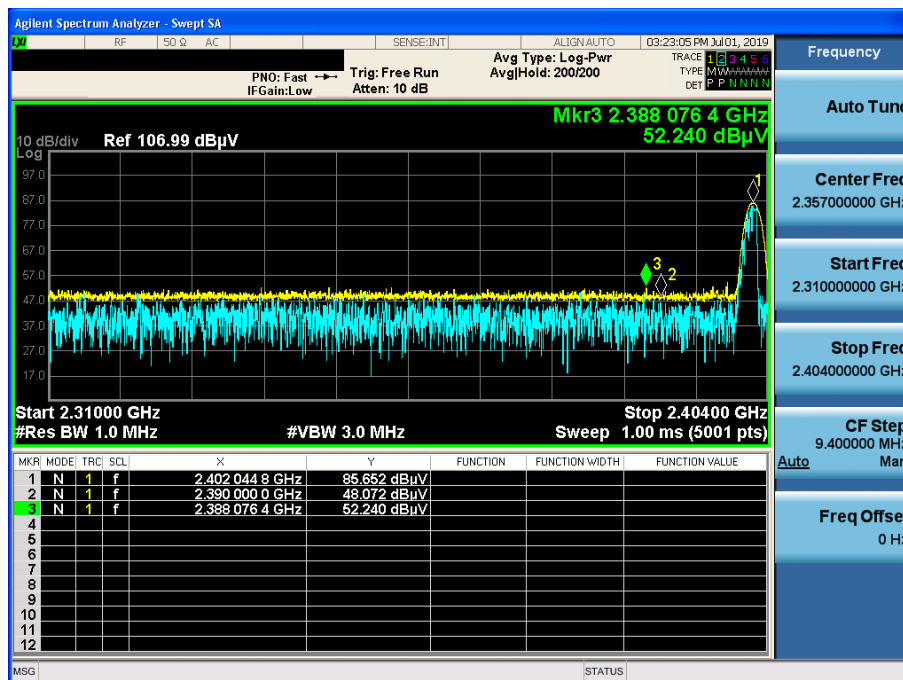


π /4DQPSK & Highest & X & Hor

Detector Mode : PK

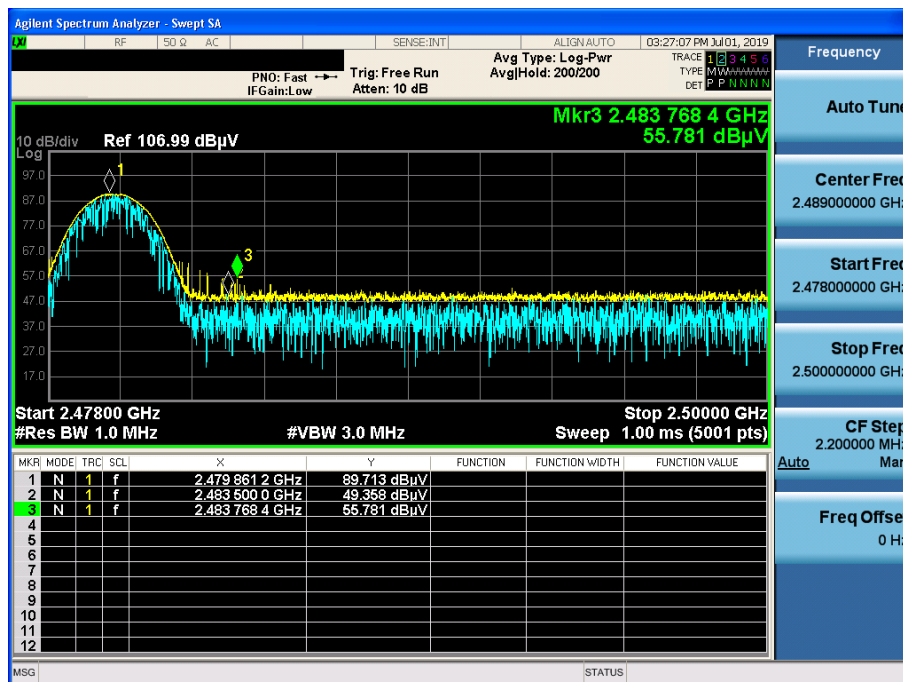


8DPSK & Lowest & X & Hor

Detector Mode : PK

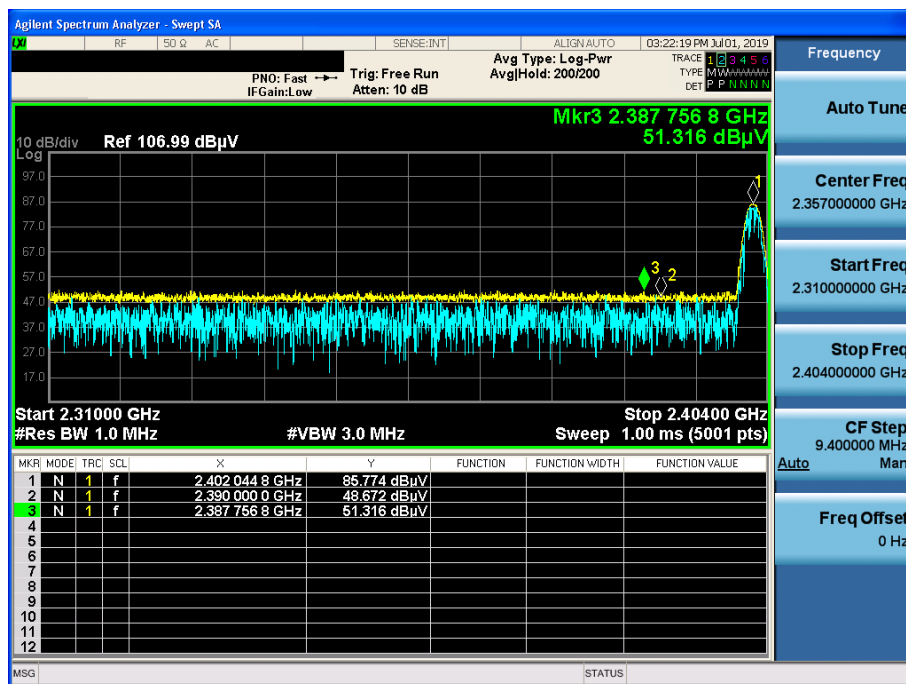


8DPSK & Highest & X & Hor

Detector Mode : PK

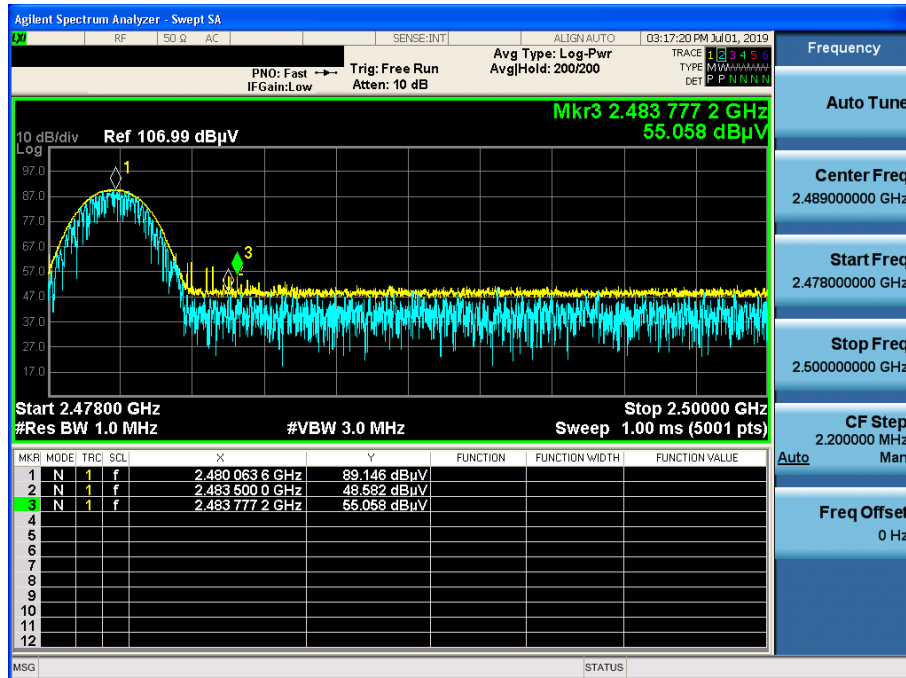


GFSK & Lowest & X & Ver

Detector Mode : PK

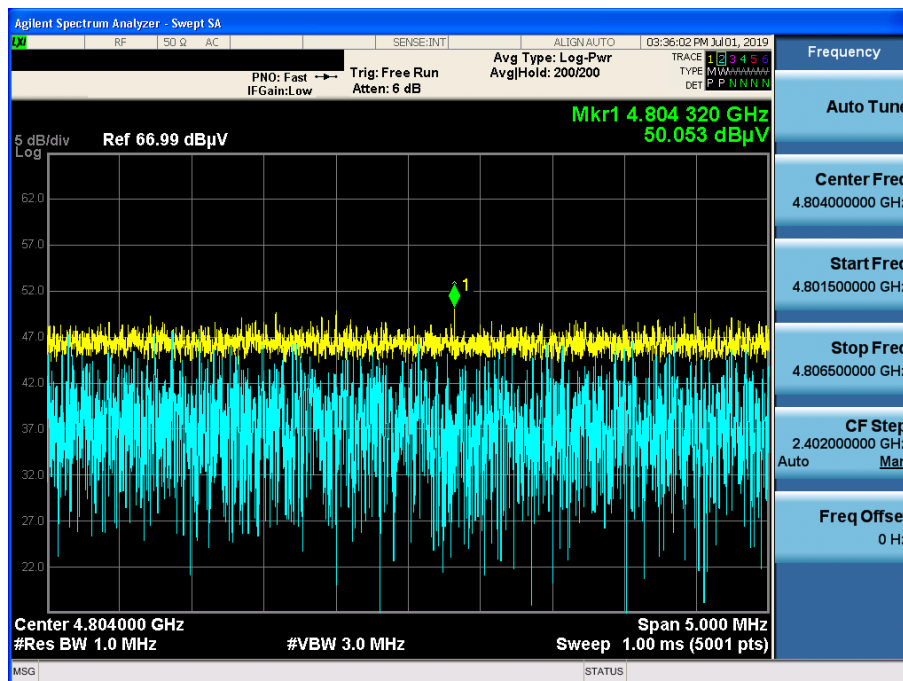 π /4DQPSK & Middle & X & Hor

Detector Mode : PK

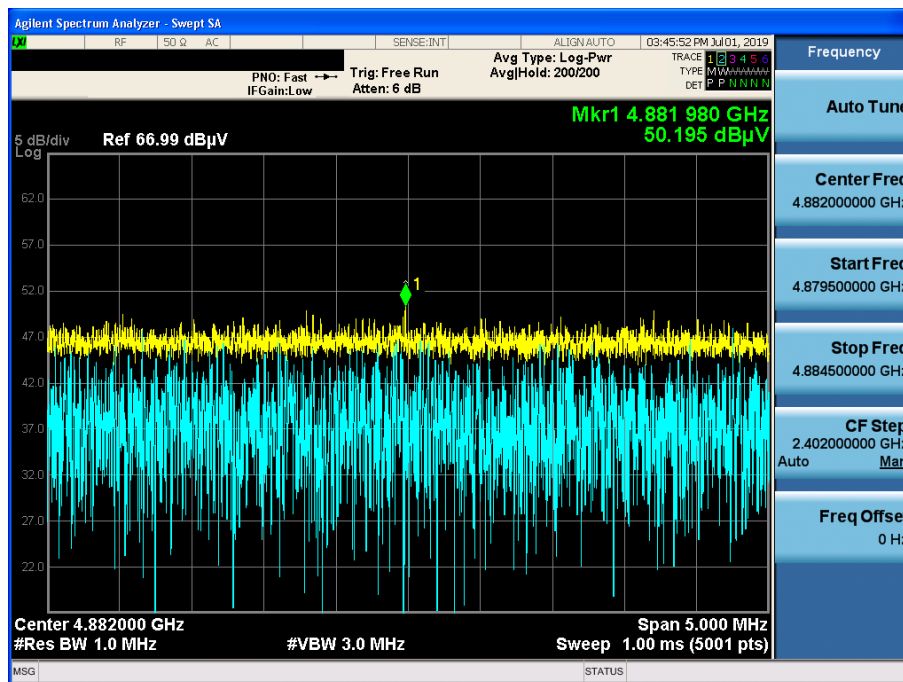

8DPSK & Middle & X & Hor

Detector Mode : PK

