



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEC/IEEE 62209-1528:2020**

For
Wireless Charger

**FCC ID: 2ADNG-VN1820
Model Name: VN-1820**

**Report Number: 14272097-S1V1
Issue Date: 5/27/2022**

Prepared for
**Energous Corporation
3590 NORTH FIRST STREET
SAN JOSE, CA 95134**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888**



Revision History

Rev.	Date	Revisions	Revised By
V1	5/27/2022	Initial Issue	--

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation	7
4.	SAR Measurement System & Test Equipment	8
4.1.	<i>SAR Measurement System.....</i>	8
4.2.	<i>SAR Scan Procedures</i>	9
4.3.	<i>Test Equipment.....</i>	11
5.	Measurement Uncertainty.....	12
6.	Device Under Test (DUT) Information	12
6.1.	<i>DUT Description</i>	12
6.2.	<i>Wireless Technologies.....</i>	12
7.	Dielectric Property Measurements & System Check	13
7.1.	<i>Dielectric Property Measurements</i>	13
7.2.	<i>System Check.....</i>	14
7.3.	<i>Operational Description</i>	15
8.	Test Rationale.....	15
9.	RF Exposure Conditions (Test Configurations)	15
10.	Keep-Out Zone.....	16
10.1.	<i>Description</i>	16
10.2.	<i>Verification of the Keep-Out Zone Range</i>	17
10.3.	<i>Verification of Keep-Out Zone detection speed.</i>	17
11.	Conducted Output Power Measurements.....	18
11.1.	<i>Charging Signal.....</i>	18
11.2.	<i>Bluetooth Maximum Output Power for Bluetooth</i>	18
12.	Measured and Reported (Scaled) SAR Results.....	18
12.1.	<i>CW 917.5MHz.....</i>	18
13.	FCC Standalone SAR Test Exclusion Considerations.....	19
14.	SAR Measurement Variability	20
15.	Simultaneous Transmission Conditions	21
15.1.	<i>Simultaneous transmission SAR test exclusion considerations</i>	21
15.1.1.	<i>Bluetooth contribution.....</i>	22

15.1.2.	WPT contribution.....	22
15.1.3.	Sum of the ratios	22
Appendixes	23
<i>Appendix A: SAR Setup Photos</i>	23
<i>Appendix B: SAR System Check Plots</i>	23
<i>Appendix C: SAR Highest Test Plots</i>	23
<i>Appendix D: SAR Tissue Ingredients</i>	23
<i>Appendix E: SAR Probe Certificates</i>	23
<i>Appendix F: SAR Dipole Certificates</i>	23

1. Attestation of Test Results

Applicant Name	Energous Corporation	
FCC ID	2ADNG-VN1820	
Model Name	VN1820	
Applicable Standards	Published RF exposure KDB procedures IEC/IEEE 62209-1528:2020	
Exposure Category	SAR Limits (W/Kg)	
	Peak spatial-average (1g of tissue)	Extremities (hands, wrists, ankles, etc.) (10g of tissue)
General population / Uncontrolled exposure	1.6	4
RF Exposure Conditions	Equipment Class - Highest Reported SAR (W/kg)	
	8CC	DSS
Body	0.709	N/A
Simultaneous Transmission	Total Exposure Ratio	
	0.64	
Date Tested	5/3/2022 to 5/6/2022	
Test Results	Pass	

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

This report contains data provided by the customer which can impact the validity of results. UL Verification Services Inc. is only responsible for the validity of results after the integration of the data provided by the customer.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the U.S. Government, or any agency of the U.S. government.

Approved & Released By:



Dave Weaver
Operations Leader
UL Verification Services Inc.

Prepared By:



Lance Fleischer
Laboratory Engineer
UL Verification Services Inc.

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEC/IEEE 62209-1528:2020, the following FCC Published RF exposure [KDB](#) procedures:

- 447498 D01 General RF Exposure Guidance v06
- 447498 D03 Supplement C Cross-Reference v01
- 680106 D01 RF Exposure Wireless Charging Apps v03r01
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02

In addition to the above, the following information was used:

- TCB Workshop October 2016; RF Exposure Procedures (Bluetooth Duty Factor)
- TCB Workshop April 2019; RF Exposure Procedures (Tissue Simulating Liquids (TSL))

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	SAR Lab 6
SAR Lab G	SAR Lab 7
SAR Lab H	SAR Lab 8
	SAR Lab 9
	SAR Lab 10
	SAR Lab 11
	SAR Lab 12
	SAR Lab 13

UL Verification Services Inc. is accredited by A2LA, Certificate Number 0751.05

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY system used for performing compliance tests consists of the following items:

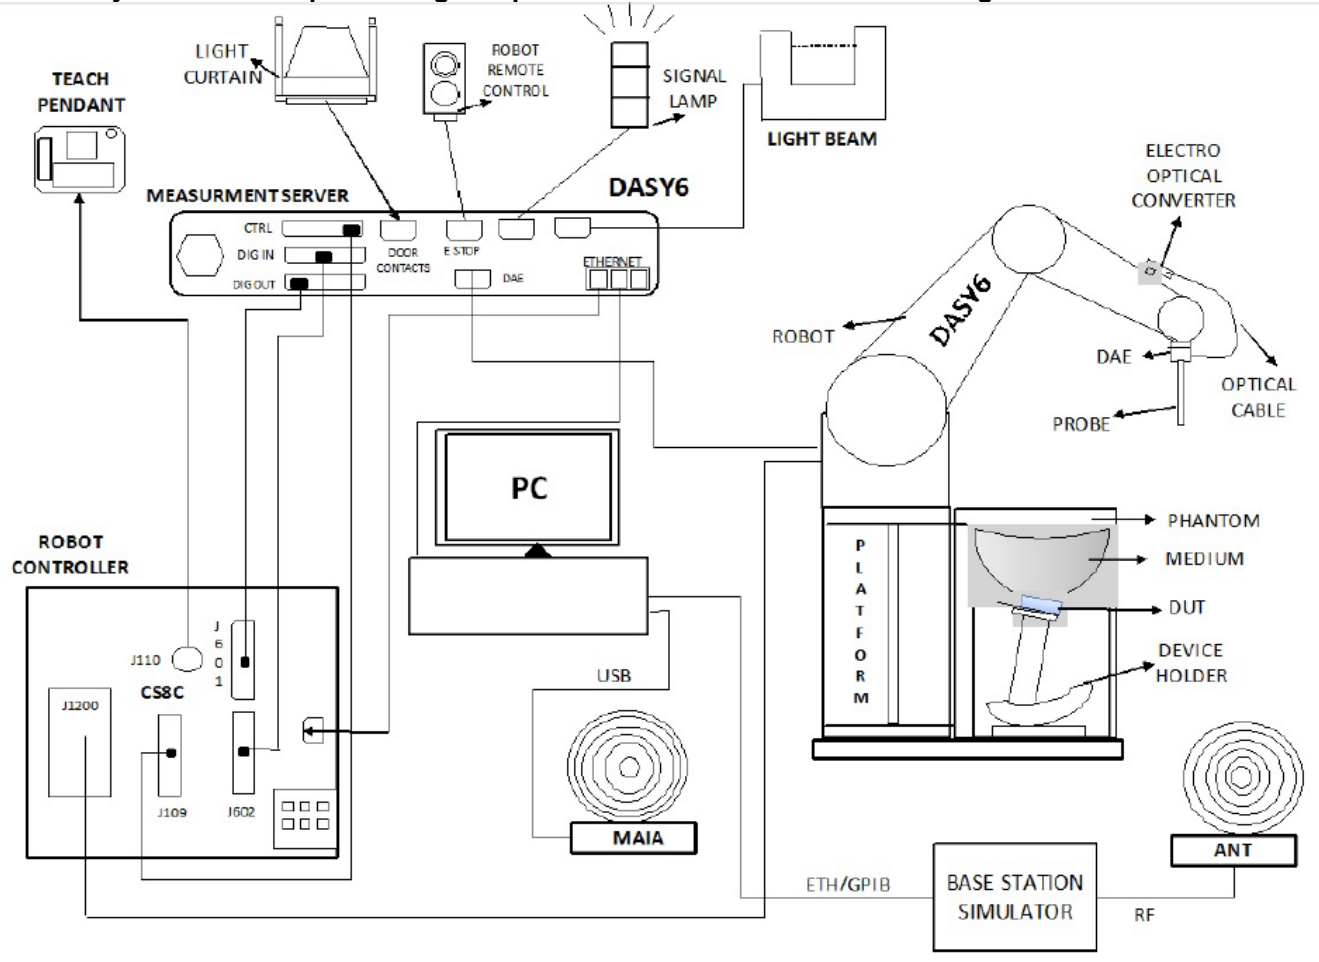

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7, Win10 and the DASY52¹ and DASY6² software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

¹ DASY52 software used: DASY52.10.4 & S 14.6.14 and older generations.

² DASY6 software used: DASY6.14 & S 14.6.14 and older generations.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEC/IEEE 62209-1528, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
S-Parameter Network Analyzer	R & S	ZNLE6	101274-mn	2/15/2023
Dielectric Probe kit	SPEAG	DAK-3.5	1059	9/19/2022
Shorting Block	SPEAG	DAK-3.5 Short	SMDAK 200 DA	9/19/2022
Thermometer	Fisher Scientific	Traceable	170064398	9/1/2022
S-Parameter Network Analyzer	R & S	ZNLE6	101273-VA	2/18/2023

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Signal Generator	Agilent	N5181A	MY50140610	1/26/2023
Power Meter	Agilent	N1912A	MY50001018	2/4/2023
Power Sensor	Agilent	N1921A	MY53260010	2/3/2023
Power Sensor	Agilent	N1921A	MY52200012	1/25/2023
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795092	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2141	N/A
DC Power Supply	Sorensen	XT 15-4	2680	N/A

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR Lab 8)	SPEAG	EX3DV4	3773	2/25/2022
Data Acquisition Electronics (SAR Lab 8)	SPEAG	DAE4	1352	11/9/2022
System Validation Dipole	SPEAG	D750V3	1d143	9/24/2022
Thermometer (SAR Lab 8)	Traceable	6530CC	9096	3/30/2023

Other

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Agilent	N1912A	MY50001018	2/4/2023
Power Sensor	Agilent	N1921A	MY53260010	2/3/2023

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEC/IEEE 62209-1528 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Overall (Length x Width x Depth): 21 cm x 21 cm x 3 cm	
Test sample information	S/N	Notes
	3013	(WPT) Radiated Unit
	3007	(WPT) Radiated Unit
	PER 300F	Receiver
Hardware Version	Dlg68x.sabertooth.0	
Software Version	5.0.1.41	

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
CW	917.5	WPT	100%
BLE	2.4 GHz	N/A	N/A ¹

Notes:

1. Measured Duty Cycle is not required due to SAR test exemption.

7. Dielectric Property Measurements & System Check

7.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEC/IEEE 62209-1528, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
8	5/3/2022	900	Head	900	41.51	41.50	0.02%	0.99	1.01	-1.61%
				880	41.60	41.50	0.24%	0.98	0.95	4.10%
				920	41.43	41.49	-0.15%	1.00	0.98	1.39%

7.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 \pm 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be \geq 15.0 cm for SAR measurements \leq 3 GHz and \geq 10.0 cm for measurements $>$ 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within $\pm 10\%$ of the manufacturer calibrated dipole SAR target. Refer to Appendix B for the SAR System Check Plots.

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
8	5/3/2022	HEAD	D900V2 SN:1d143	9/29/2022	1.070	10.70	10.71	-0.09%	0.689	6.89	6.97	-1.15%	1

7.3. Operational Description

The DUT is a wireless power charger that delivers RF energy to an authorized Client Device seeking to be charged. The DUT monitors the presence of the user and will switch off the charging signal if a user is detected within 35 cm of the front of the DUT.

8. Test Rationale

The DUT is designed to disable charging of a Client Device when the user is closer than 35 cm from the middle of the DUT center section (See Figure 1). As such testing closer than 35 cm from the front of the DUT is not needed.

Unless otherwise specified, the reference point for distances relative to the DUT are measured from the middle of the DUT center section as denoted by the yellow dot shown in figure 1.

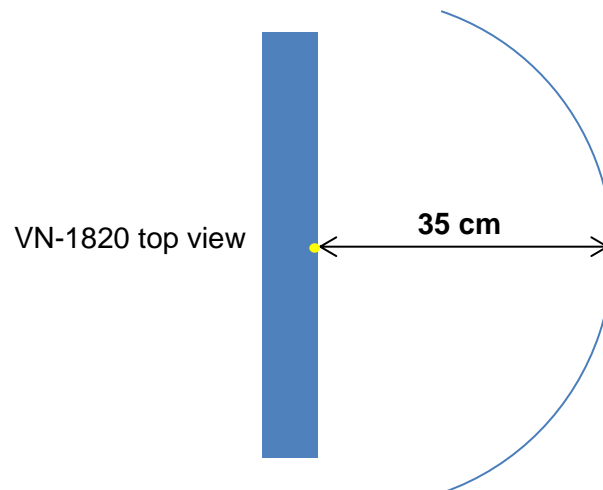


Figure 1: Location of reference point and Keep-Out Zone

The DUT features a Keep-Out Zone that will disable charging if the user is detected within a predefined zone in front of the DUT. SAR testing is not required within the Keep-Out Zone. The extent of the Keep-Out Zone was verified, and the results are reported in Section 11.

9. RF Exposure Conditions (Test Configurations)

The DUT is a desktop Wireless Power transfer device and is not intended for handheld or body worn use.

The DUT was assessed at 35 cm and 44 cm from the front, 5 cm from the back, and 10 cm from the sides in accordance with FCC guidance.

When testing the front of the DUT a client device was placed directly against the center of the flat phantom. The DUT was then placed directly below the client and facing the phantom.

The tests in sections 9, 10 and 11 were performed to verify the charging and keep out zones. Presence or absence of charging signal was monitored using the Wattup app on a mobile phone.

10. Keep-Out Zone.

10.1. Description

To mitigate RF exposure the DUT uses a sensor to detect the presence of a user. The sensor is positioned on the front of the DUT.

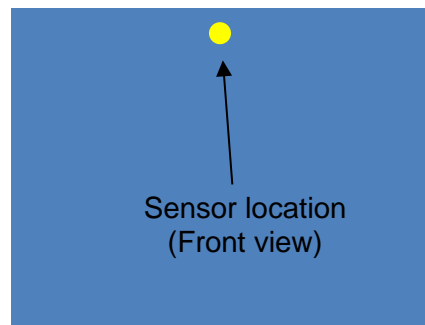


Figure 3: Keep-Out-Zone Sensor Location

The keep-out-zone is defined as a 35 cm arc centered upon the sensor in front of the DUT.

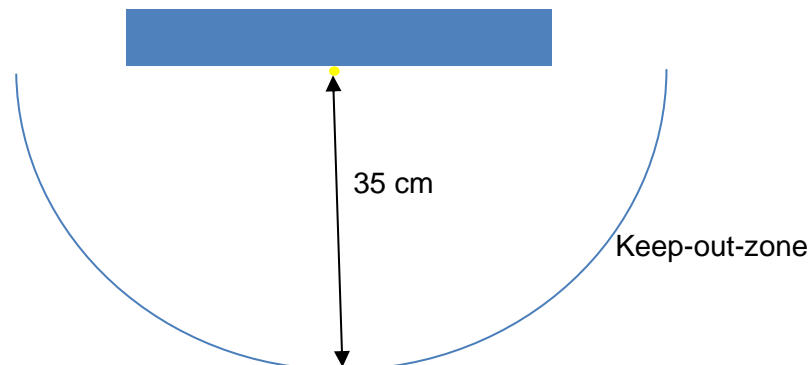


Figure 4: Keep-Out-Zone Location (Top view)

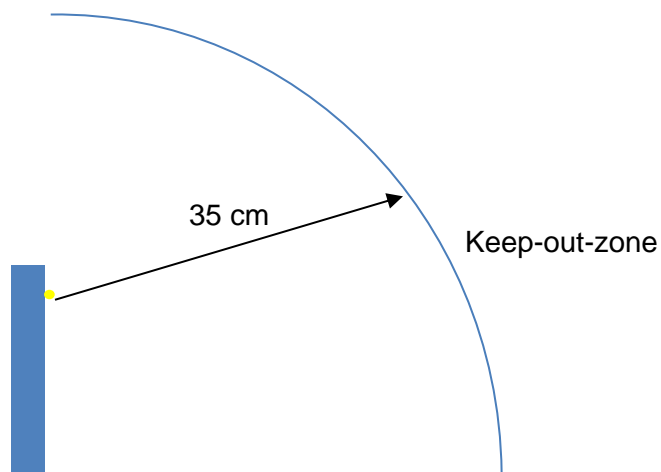


Figure 5: Keep-Out-Zone Location (side view)

10.2. Verification of the Keep-Out Zone Range

The keep-out-zone was verified by moving a wooden hand toward the DUT along the centerline until charging was disabled. The hand was attached to a linear actuator to allow precise positioning. It was verified that charging was disabled at 35 cm. The hand was moved along the 35 cm arc and the charging remained disabled along the extent of the keep-out-zone.

Additional testing was performed over a curved plane at a distance of 35 cm in front of the reference point. The hand was placed at various locations on the curved plane and charging was not enabled at any time. Figure 5 shows the side view

As SAR testing was performed at 10 cm from the top and sides, and 5 cm from the rear further investigation of the keep-out zone was deemed unnecessary.

10.3. Verification of Keep-Out Zone detection speed.

Testing was performed to measure how quickly the charging was disabled once the Keep-Out-Zone was breeched. The hand attached to the linear actuator was translated toward the DUT at a speed of 0.75 m/s. The charging status of the DUT was observed using the Wattup app. The status of the charging signal was observed to go from on to off almost instantaneously.

11. Conducted Output Power Measurements

Tune-Up Power Limits provided by the manufacturer are used to scale measured SAR values.

11.1. Charging Signal

Mode	Antenna	Freq. (MHz)	Average Power (dBm)	
			Meas Pwr	Tune-up
CW	1	917.5	41.76	41.76

11.2. Bluetooth Maximum Output Power for Bluetooth

Maximum declared conducted power is 0.6 mW. The antenna gain is 2 dBi. This power level qualifies for exclusion of SAR testing. Please refer to section 13. FCC Standalone SAR Test Exclusion Considerations.

12. Measured and Reported (Scaled) SAR Results

12.1. CW 917.5MHz

RF Exposure Conditions	Mode	Dist. (cm)	Test Position	Receiver Serial #	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up Limit	Meas.	Meas.	Scaled	
Body	CW	44	Front	Per300F	917.5	41.76	41.76	0.427	0.427	1
		35	Front	Per300F	917.5	41.76	41.76	0.709	0.709	
		5	Rear	N/A	917.5	41.76	41.76	0.164	0.164	
		10	Edge 1	N/A	917.5	41.76	41.76	0.065	0.065	
		10	Edge 2	N/A	917.5	41.76	41.76	0.124	0.124	
		10	Edge 3	N/A	917.5	41.76	41.76	0.089	0.089	
		10	Edge 4	N/A	917.5	41.76	41.76	0.087	0.087	

13. FCC Standalone SAR Test Exclusion Considerations

Per 447498 D01 General RF Exposure Guidance DR04-44449 Appendix B.4:

SAR-based thresholds are derived based on frequency, power, and separation distance of the RF source. The formula defines the thresholds in general for either available maximum time-averaged power or maximum time-averaged ERP, whichever is greater.

The SAR-based exemption formula of §1.1307(b)(3)(i)(B), repeated here as Formula (B.2), applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power or effective radiated power (ERP), whichever is greater, of less than or equal to the threshold P_{th} (mW).

This method shall only be used at separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by Formula (B.2).

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases} \quad (\text{B.1})$$

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases} \quad (\text{B.2})$$

where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$$

and f is in GHz, d is the separation distance (cm), and $ERP_{20 \text{ cm}}$ is per Formula (B.1).

Table B.2—Example Power Thresholds (mW)

Frequency (MHz)	Distance (mm)									
	5	10	15	20	25	30	35	40	45	50
300	39	65	88	110	129	148	166	184	201	217
450	22	44	67	89	112	135	158	180	203	226
835	9	25	44	66	90	116	145	175	207	240
1900	3	12	26	44	66	92	122	157	195	236
2450	3	10	22	38	59	83	111	143	179	219
3600	2	8	18	32	49	71	96	125	158	195
5800	1	6	14	25	40	58	80	106	136	169

For 10 g SAR P_{th} is generated by multiplying the calculated value by 2.5.

SAR based exemption for BLE was conservatively calculated at a test distance of 5mm. The higher of maximum conducted power or E.R.P is used in the calculation. The maximum Bluetooth power is 0.6 mW and the E.R.P is 0.6 mW (Refer to §11.1). Therefore, the conducted power was used to determine SAR exclusion.

Bluetooth SAR Exemption Calculations

RF Air Interface	Frequency (GHz)	ERP _{20cm} (mW)	distance (cm)	P_{th} (1 g) (mW)
BLE	2.48	3060.0	0.5	3

Notes:

The calculated Power threshold (P_{th}) for BLE is 3 mW. The conducted power (0.6 mW) is $\leq P_{th}$ therefore SAR testing is not required.

14. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Note(s):

Repeated measurement is not required since the original highest measured SAR is $< 0.8 \text{ W/kg}$ (1-g) or 2 W/kg (10-g) .

15. Simultaneous Transmission Conditions

15.1. Simultaneous transmission SAR test exclusion considerations

KDB 447498 D01 General RF Exposure Guidance provides two procedures for determining simultaneous transmission SAR test exclusion: Determination according to formula (C.1) from KDB 447498 D01 DR04-44449 or SAR to Peak Location Separation Ratio (SPLSR)

In this report determination according to formula (C.1) from KDB 447498 D01 DR04-44449 will be used.

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1 \quad (C.1)$$

<i>a</i>	number of fixed, mobile, or portable RF sources claiming exemption using the Table 1 formula for P_{th} , including existing exempt transmitters and those being added.
<i>b</i>	number of fixed, mobile, or portable RF sources claiming exemption using the applicable Table 1 formula for Threshold ERP, including existing exempt transmitters and those being added.
<i>c</i>	number of existing fixed, mobile, or portable RF sources with known evaluation for the specified minimum distance.
P_i	the available maximum time-averaged power or the ERP, whichever is greater, for fixed, mobile, or portable RF source <i>i</i> at a distance between 0.5 cm and 40 cm (inclusive).
$P_{th,i}$	the exemption threshold power (P_{th}) according to the Table 1 formula for fixed, mobile, or portable RF source <i>i</i> .
ERP_j	the available maximum time-averaged power or the ERP, whichever is greater, of fixed, mobile, or portable RF source <i>j</i> .
$ERP_{th,j}$	exemption threshold ERP for fixed, mobile, or portable RF source <i>j</i> , at a distance of at least $\lambda/2\pi$, according to the applicable Table 2 formula at the location in question.
$Evaluated_k$	the maximum reported SAR or MPE of fixed, mobile, or portable RF source <i>k</i> either in the device or at the transmitter site from an existing evaluation.
$Exposure Limit_k$	either the general population/uncontrolled maximum permissible exposure (MPE) or specific absorption rate (SAR) limit for each fixed, mobile, or portable sources, as applicable

The sum of the ratios of the applicable terms for SAR-based, MPE-based and measured SAR or MPE should be less than 1, to determine simultaneous transmission exposure compliance.

15.1.1. Bluetooth contribution

Calculated contribution from Bluetooth is the maximum declared conducted power divided by P_{th}

$$0.6/3 = \underline{0.20}$$

15.1.2. WPT contribution

The highest reported SAR is 0.709 W/kg.

Calculated contribution from the WPT SAR measurement is reported SAR divided by the SAR limit (1.6 W/kg)

$$0.709/1.6 = \underline{0.44}$$

15.1.3. Sum of the ratios

The sum of the ratios ($0.20 + 0.44 = 0.64$) is less than 1.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the ratios of the contributing factors is less than 1.

Appendixes

Refer to separated files for the following appendixes.

Appendix A: SAR Setup Photos

Appendix B: SAR System Check Plots

Appendix C: SAR Highest Test Plots

Appendix D: SAR Tissue Ingredients

Appendix E: SAR Probe Certificates

Appendix F: SAR Dipole Certificates

END OF REPORT