

# TEST REPORT

**Report No.:** 8328EU011219W4

**Applicant:** SHENZHEN ELECTRON TECHNOLOGY CO., LTD.

**Address:** Bld.2, Yingfeng Industrial Zone, Tantou Community,  
Songgang Street, Bao'an, Shenzhen, China

**Product Name:** Android Tablet

**Model No.:** Cozyla CD-8S543F3 (refer to clause 2.4)

**Trademark:** N/A

**FCC ID:** 2ABC5-E0088

**Test Standard(s):** 47 CFR Part 15 Subpart E

**Date of Receipt:** Mar. 12, 2025

**Test Date:** Mar. 12, 2025 – Mar. 19, 2025

**Date of Issue:** Mar. 25, 2025

**ISSUED BY:**

SHENZHEN EU TESTING LABORATORY LIMITED



**Prepared by:**



Mikey Zhu/ Engineer

**Reviewed and Approved by:**



Sally Zhang/ Manager

### Revision Record

| Report Version | Issued Date   | Description | Status |
|----------------|---------------|-------------|--------|
| V0             | Mar. 25, 2025 | Original    | Valid  |
|                |               |             |        |
|                |               |             |        |



## Table of Contents

|          |                                                       |           |
|----------|-------------------------------------------------------|-----------|
| <b>1</b> | <b>COVER PAGE.....</b>                                | <b>1</b>  |
| <b>2</b> | <b>GENERAL INFORMATION .....</b>                      | <b>5</b>  |
| 2.1      | APPLICANT INFORMATION.....                            | 5         |
| 2.2      | MANUFACTURER INFORMATION.....                         | 5         |
| 2.3      | FACTORY INFORMATION.....                              | 5         |
| 2.4      | GENERAL DESCRIPTION OF E.U.T.....                     | 5         |
| 2.5      | TECHNICAL INFORMATION OF E.U.T.....                   | 5         |
| <b>3</b> | <b>TEST SUMMARY .....</b>                             | <b>11</b> |
| 3.1      | TEST STANDARD .....                                   | 11        |
| 3.2      | TEST VERDICT.....                                     | 11        |
| 3.3      | TEST LABORATORY .....                                 | 12        |
| <b>4</b> | <b>TEST CONFIGURATION.....</b>                        | <b>13</b> |
| 4.1      | TEST ENVIRONMENT .....                                | 13        |
| 4.2      | TEST EQUIPMENT .....                                  | 13        |
| 4.3      | DESCRIPTION OF SUPPORT UNIT .....                     | 14        |
| 4.4      | TEST MODE .....                                       | 14        |
| 4.5      | DESCRIPTION OF CALCULATION .....                      | 14        |
| 4.6      | MEASUREMENT UNCERTAINTY .....                         | 15        |
| 4.7      | DEVIATION FROM STANDARDS .....                        | 15        |
| 4.8      | ABNORMALITIES FROM STANDARD CONDITION .....           | 15        |
| <b>5</b> | <b>TEST ITEMS .....</b>                               | <b>16</b> |
| 5.1      | ANTENNA REQUIREMENT.....                              | 16        |
| 5.1.1    | Test Requirement .....                                | 16        |
| 5.1.2    | Antenna Anti-Replacement Construction.....            | 16        |
| 5.1.3    | Antenna Gain .....                                    | 16        |
| 5.2      | CONDUCTED EMISSION AT AC POWER LINE .....             | 17        |
| 5.2.1    | Test Requirement .....                                | 17        |
| 5.2.2    | Test Setup Diagram .....                              | 17        |
| 5.2.3    | Test Procedure .....                                  | 17        |
| 5.2.4    | Test Data.....                                        | 17        |
| 5.3      | EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....        | 20        |
| 5.3.1    | Test Requirement .....                                | 20        |
| 5.3.2    | Test Setup Diagram .....                              | 20        |
| 5.3.3    | Test Procedure .....                                  | 21        |
| 5.3.4    | Test Data.....                                        | 21        |
| 5.4      | MAXIMUM CONDUCTED OUTPUT POWER .....                  | 22        |
| 5.4.1    | Test Requirement .....                                | 22        |
| 5.4.2    | Test Setup Diagram .....                              | 23        |
| 5.4.3    | Test Procedure .....                                  | 23        |
| 5.4.4    | Test Data.....                                        | 23        |
| 5.5      | POWER SPECTRAL DENSITY .....                          | 24        |
| 5.5.1    | Test Requirement .....                                | 24        |
| 5.5.2    | Test Setup Diagram .....                              | 25        |
| 5.5.3    | Test Procedure .....                                  | 25        |
| 5.5.4    | Test Data.....                                        | 25        |
| 5.6      | BAND EDGE EMISSIONS (RESTRICTED FREQUENCY BANDS)..... | 26        |
| 5.6.1    | Test Requirement .....                                | 26        |
| 5.6.2    | Test Setup Diagram .....                              | 27        |
| 5.6.3    | Test Procedure .....                                  | 28        |
| 5.6.4    | Test Data.....                                        | 28        |

|                |                                   |           |
|----------------|-----------------------------------|-----------|
| <b>5.7</b>     | <b>UNDESIRABLE EMISSIONS.....</b> | <b>56</b> |
| 5.7.1          | Test Requirement .....            | 56        |
| 5.7.2          | Test Setup Diagram .....          | 57        |
| 5.7.3          | Test Procedure .....              | 58        |
| 5.7.4          | Test Data.....                    | 59        |
| <b>5.8</b>     | <b>FREQUENCY STABILITY.....</b>   | <b>68</b> |
| 5.8.1          | Test Requirement .....            | 68        |
| 5.8.2          | Test Setup Diagram .....          | 68        |
| 5.8.3          | Test Procedure .....              | 68        |
| 5.8.4          | Test Data.....                    | 69        |
| <b>ANNEX A</b> | <b>TEST SETUP PHOTOS .....</b>    | <b>70</b> |
| <b>ANNEX B</b> | <b>EXTERNAL PHOTOS.....</b>       | <b>70</b> |
| <b>ANNEX C</b> | <b>INTERNAL PHOTOS .....</b>      | <b>70</b> |
| <b>ANNEX F</b> | <b>TEST DATA.....</b>             | <b>70</b> |



## 2 General Information

### 2.1 Applicant Information

|           |                                                                                             |
|-----------|---------------------------------------------------------------------------------------------|
| Applicant | SHENZHEN ELECTRON TECHNOLOGY CO., LTD.                                                      |
| Address   | Bld.2, Yingfeng Industrial Zone, Tantou Community, Songgang Street, Bao'an, Shenzhen, China |

### 2.2 Manufacturer Information

|              |                                                                                             |
|--------------|---------------------------------------------------------------------------------------------|
| Manufacturer | SHENZHEN ELECTRON TECHNOLOGY CO., LTD.                                                      |
| Address      | Bld.2, Yingfeng Industrial Zone, Tantou Community, Songgang Street, Bao'an, Shenzhen, China |

### 2.3 Factory Information

|         |                                                                                             |
|---------|---------------------------------------------------------------------------------------------|
| Factory | SHENZHEN ELECTRON TECHNOLOGY CO., LTD.                                                      |
| Address | Bld.2, Yingfeng Industrial Zone, Tantou Community, Songgang Street, Bao'an, Shenzhen, China |

### 2.4 General Description of E.U.T.

|                                      |                                                                                                                                                                                   |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name                         | Android Tablet                                                                                                                                                                    |
| Model No. Under Test                 | Cozyta CD-8S543F3                                                                                                                                                                 |
| List Model No.                       | WF1589T, FA1589T, CD-8S543F3, CD-8S543F2                                                                                                                                          |
| Description of Model differentiation | All models are same with electrical parameters and internal circuit structure, but only differ in appearance color and model name.<br>(this information provided by the customer) |
| Rating(s)                            | Adapter power supply: 12V $\overline{\text{---}}$ 2A (Adapter Input: 100-240V~, 50/60Hz, 0.6A Max; Output: 12V $\overline{\text{---}}$ 2A)                                        |
| Adapter                              | Model No.: FJ-SW126G1202000U<br>Input: 100-240V~, 50/60Hz, 0.6A Max<br>Output: 12V $\overline{\text{---}}$ 2A<br>Manufacturer: SHENZHEN FUJIA APPLIANCE CO., LTD.                 |
| Product Type                         | <input checked="" type="checkbox"/> Mobile<br><input type="checkbox"/> Portable<br><input type="checkbox"/> Fix Location                                                          |
| Test Sample No.                      | -1/2(Normal Sample), -2/2(Engineering Sample)                                                                                                                                     |
| Hardware Version                     | R141-V1.1D                                                                                                                                                                        |
| Software Version                     | N/A                                                                                                                                                                               |
| Remark                               | For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.                                                                 |

## 2.5 Technical Information of E.U.T.

|                                   |                                                                                                                                                                                                  |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Network and Wireless Connectivity | Bluetooth (BDR+EDR+BLE)<br>WiFi 2.4G: 802.11b, 802.11g, 802.11n(HT20/40), 802.11ax(HEW20/40)<br>WiFi 5G: 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80) and 802.11ax(HEW20/40/80)<br>U-NII-1/3 |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

The requirement for the following technical information of the EUT was tested in this report:

|                                                         |                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Technology                                              | <b>WiFi 5G</b>                                                                                                                                                                                                                                                                                                                                                    |
| Operation Mode                                          | <input checked="" type="checkbox"/> a <input checked="" type="checkbox"/> n(HT20) <input checked="" type="checkbox"/> n(HT40) <input checked="" type="checkbox"/> ac(VHT20)                                                                                                                                                                                       |
|                                                         | <input checked="" type="checkbox"/> ac(VHT40) <input checked="" type="checkbox"/> ac(VHT80) <input type="checkbox"/> ac(VHT160) <input checked="" type="checkbox"/> ax(HEW20)                                                                                                                                                                                     |
|                                                         | <input checked="" type="checkbox"/> ax(HEW40) <input checked="" type="checkbox"/> ax(HEW80) <input type="checkbox"/> ax(HEW160)                                                                                                                                                                                                                                   |
| Operating Frequency                                     | U-NII-1: 5150 MHz to 5250 MHz<br>U-NII-3: 5725 MHz to 5850 MHz                                                                                                                                                                                                                                                                                                    |
| Modulation Technology                                   | OFDM, OFDMA                                                                                                                                                                                                                                                                                                                                                       |
| Function                                                | <input checked="" type="checkbox"/> Client device <input type="checkbox"/> Master device                                                                                                                                                                                                                                                                          |
| Modulation Type                                         | <input checked="" type="checkbox"/> 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK)<br><input checked="" type="checkbox"/> 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)<br><input checked="" type="checkbox"/> 802.11ac: OFDM (64QAM, 16QAM, QPSK, BPSK, 256QAM)<br><input checked="" type="checkbox"/> 802.11ax: OFDMA (4096QAM, 1024QAM, 256QAM, 64QAM, 16QAM, BPSK, QPSK) |
| Transfer Rate (Mbps)<br>(Single RF path)                | <input checked="" type="checkbox"/> 802.11a: 54/ 48/ 36/ 24/ 18/ 12/ 9/ 6 Mbps<br><input checked="" type="checkbox"/> 802.11n: up to 150 Mbps<br><input checked="" type="checkbox"/> 802.11ac: up to VHT-MCS9<br><input checked="" type="checkbox"/> 802.11ax up to 1201 Mbps                                                                                     |
| Antenna System (eg., MIMO, Smart Antenna)               | N/A                                                                                                                                                                                                                                                                                                                                                               |
| Categorization as Correlated or Completely Uncorrelated | N/A                                                                                                                                                                                                                                                                                                                                                               |
| Antenna Type                                            | PIFA Antenna                                                                                                                                                                                                                                                                                                                                                      |
| Antenna Gain(Peak)                                      | U-NII-1: 5150 MHz to 5250 MHz: 2.30 dBi<br>U-NII-3: 5725 MHz to 5850 MHz: 2.05 dBi                                                                                                                                                                                                                                                                                |
| Remark                                                  | The above information are declared by the applicant, EU-LAB is not responsible for the information accuracy provided by the applicant.                                                                                                                                                                                                                            |

All channels were listed on the following table:

| 20 MHz Bandwidth |                 | 40 MHz Bandwidth |                 | 80 MHz Bandwidth |                 |
|------------------|-----------------|------------------|-----------------|------------------|-----------------|
| Channel Number   | Frequency (MHz) | Channel Number   | Frequency (MHz) | Channel Number   | Frequency (MHz) |
| <b>36</b>        | <b>5180</b>     | <b>38</b>        | <b>5190</b>     | <b>42</b>        | <b>5210</b>     |
| <b>40</b>        | <b>5200</b>     | <b>46</b>        | <b>5230</b>     | <b>155</b>       | <b>5775</b>     |
| 44               | 5220            | <b>151</b>       | <b>5755</b>     | /                | /               |
| <b>48</b>        | <b>5240</b>     | <b>159</b>       | <b>5795</b>     | /                | /               |
| <b>149</b>       | <b>5745</b>     | /                | /               | /                | /               |
| 153              | 5765            | /                | /               | /                | /               |
| <b>157</b>       | <b>5785</b>     | /                | /               | /                | /               |
| 161              | 5805            | /                | /               | /                | /               |
| <b>165</b>       | <b>5825</b>     | /                | /               | /                | /               |

| 802.11ax RU configuration table |              |       |       |        |        |        |        |
|---------------------------------|--------------|-------|-------|--------|--------|--------|--------|
| Mode                            | Full RU (SU) | RU_26 | RU_52 | RU_106 | RU_242 | RU_484 | RU_996 |
| 802.11ax (HEW20)                | √            | --    | --    | --     | --     | --     | --     |
| 802.11ax (HEW40)                | √            | --    | --    | --     | --     | --     | --     |
| 802.11ax (HEW80)                | √            | --    | --    | --     | --     | --     | --     |

The Lowest frequency, the middle frequency and the highest frequency of channel were selected to perform the test, and the selected channels see below:

✧ **For 802.11a/n(HT20)/ac(VHT20)/ax(HEW20)**

| U-NII-1 (5150 - 5250 MHz) |         |                 | U-NII-3 (5725 - 5850 MHz) |         |                 |
|---------------------------|---------|-----------------|---------------------------|---------|-----------------|
| Channel Number            | Channel | Frequency (MHz) | Channel Number            | Channel | Frequency (MHz) |
| 36                        | Low     | 5180            | 149                       | Low     | 5745            |
| 40                        | Mid     | 5200            | 157                       | Mid     | 5785            |
| 48                        | High    | 5240            | 165                       | High    | 5825            |

✧ **For 802.11n(HT40)/ac(VHT40)/ax(HEW40)**

| U-NII-1 (5150 - 5250 MHz) |         |                 | U-NII-3 (5725 - 5850 MHz) |         |                 |
|---------------------------|---------|-----------------|---------------------------|---------|-----------------|
| Channel Number            | Channel | Frequency (MHz) | Channel Number            | Channel | Frequency (MHz) |
| 38                        | Low     | 5190            | 151                       | Low     | 5755            |
| 46                        | High    | 5230            | 159                       | High    | 5795            |

✧ **For 802.11 ac(VHT80)/ax(HEW80)**

| U-NII-1 (5150 - 5250 MHz) |         |                 | U-NII-3 (5725 - 5850 MHz) |         |                 |
|---------------------------|---------|-----------------|---------------------------|---------|-----------------|
| Channel Number            | Channel | Frequency (MHz) | Channel Number            | Channel | Frequency (MHz) |
| 42                        | Mid     | 5210            | 155                       | Mid     | 5775            |

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

| Test Items                                  | Mode         | Data Rate | Modulation | U-NII-1  | U-NII-3     |
|---------------------------------------------|--------------|-----------|------------|----------|-------------|
|                                             |              |           |            | Channel  | Channel     |
| RF Output Power                             | 11a          | 6         | OFDM       | 48/44/36 | 165/157/149 |
|                                             | 11n(20 MHz)  | 6.5       |            | 48/44/36 | 165/157/149 |
|                                             | 11n(40 MHz)  | 13.5      |            | 46/38    | 159/151     |
|                                             | 11ac(20 MHz) | 6.5       |            | 48/44/36 | 165/157/149 |
|                                             | 11ac(40 MHz) | 13.5      |            | 46/38    | 159/151     |
|                                             | 11ac(80 MHz) | 29.3      |            | 42       | 155         |
|                                             | 11ax(20 MHz) | 4         | OFDMA      | 48/44/36 | 165/157/149 |
|                                             | 11ax(40 MHz) | 8         |            | 46/38    | 159/151     |
|                                             | 11ax(80 MHz) | 17        |            | 42       | 155         |
| Emission Bandwidth & 99% Occupied Bandwidth | 11a          | 6         | OFDM       | 48/44/36 | 165/157/149 |
|                                             | 11n(20 MHz)  | 6.5       |            | 48/44/36 | 165/157/149 |
|                                             | 11n(40 MHz)  | 13.5      |            | 46/38    | 159/151     |
|                                             | 11ac(20 MHz) | 6.5       |            | 48/44/36 | 165/157/149 |
|                                             | 11ac(40 MHz) | 13.5      |            | 46/38    | 159/151     |
|                                             | 11ac(80 MHz) | 29.3      |            | 42       | 155         |
|                                             | 11ax(20 MHz) | 4         | OFDMA      | 48/44/36 | 165/157/149 |
|                                             | 11ax(40 MHz) | 8         |            | 46/38    | 159/151     |
|                                             | 11ax(80 MHz) | 17        |            | 42       | 155         |
| 6 dB bandwidth                              | 11a          | 6         | OFDM       | 48/44/36 | 165/157/149 |
|                                             | 11n(20 MHz)  | 6.5       |            | 48/44/36 | 165/157/149 |
|                                             | 11n(40 MHz)  | 13.5      |            | 46/38    | 159/151     |
|                                             | 11ac(20 MHz) | 6.5       |            | 48/44/36 | 165/157/149 |
|                                             | 11ac(40 MHz) | 13.5      |            | 46/38    | 159/151     |
|                                             | 11ac(80 MHz) | 29.3      |            | 42       | 155         |
|                                             | 11ax(20 MHz) | 4         | OFDMA      | 48/44/36 | 165/157/149 |
|                                             | 11ax(40 MHz) | 8         |            | 46/38    | 159/151     |
|                                             | 11ax(80 MHz) | 17        |            | 42       | 155         |
| Power Spectral Density                      | 11a          | 6         | OFDM       | 48/44/36 | 165/157/149 |
|                                             | 11n(20 MHz)  | 6.5       |            | 48/44/36 | 165/157/149 |
|                                             | 11n(40 MHz)  | 13.5      |            | 46/38    | 159/151     |
|                                             | 11ac(20 MHz) | 6.5       |            | 48/44/36 | 165/157/149 |
|                                             | 11ac(40 MHz) | 13.5      |            | 46/38    | 159/151     |
|                                             | 11ac(80 MHz) | 29.3      |            | 42       | 155         |
|                                             | 11ax(20 MHz) | 4         | OFDMA      | 48/44/36 | 165/157/149 |
|                                             | 11ax(40 MHz) | 8         |            | 46/38    | 159/151     |
|                                             | 11ax(80 MHz) | 17        |            | 42       | 155         |

| Test Items                     | Mode         | Data Rate | Modulation | U-NII-1  | U-NII-3     |
|--------------------------------|--------------|-----------|------------|----------|-------------|
|                                |              |           |            | Channel  | Channel     |
| Band Edge<br>(Restricted-band) | 11a          | 6         | OFDM       | 48/44/36 | 165/157/149 |
|                                | 11n(20 MHz)  | 6.5       |            | 48/44/36 | 165/157/149 |
|                                | 11n(40 MHz)  | 13.5      |            | 46/38    | 159/151     |
|                                | 11ac(20 MHz) | 6.5       |            | 48/44/36 | 165/157/149 |
|                                | 11ac(40 MHz) | 13.5      |            | 46/38    | 159/151     |
|                                | 11ac(80 MHz) | 29.3      |            | 42       | 155         |
|                                | 11ax(20 MHz) | 4         | OFDMA      | 48/44/36 | 165/157/149 |
|                                | 11ax(40 MHz) | 8         |            | 46/38    | 159/151     |
|                                | 11ax(80 MHz) | 17        |            | 42       | 155         |
| Undesirable<br>Emissions       | 11a          | 6         | OFDM       | 48/44/36 | 165/157/149 |
|                                | 11n(20 MHz)  | 6.5       |            | 48/44/36 | 165/157/149 |
|                                | 11n(40 MHz)  | 13.5      |            | 46/38    | 159/151     |
|                                | 11ac(20 MHz) | 6.5       |            | 48/44/36 | 165/157/149 |
|                                | 11ac(40 MHz) | 13.5      |            | 46/38    | 159/151     |
|                                | 11ac(80 MHz) | 29.3      |            | 42       | 155         |
|                                | 11ax(20 MHz) | 4         | OFDMA      | 48/44/36 | 165/157/149 |
|                                | 11ax(40 MHz) | 8         |            | 46/38    | 159/151     |
|                                | 11ax(80 MHz) | 17        |            | 42       | 155         |

### 3 Test Summary

#### 3.1 Test Standard

The tests were performed according to following standards:

| No. | Identity                         | Document Title                                                                                                         |
|-----|----------------------------------|------------------------------------------------------------------------------------------------------------------------|
| 1   | 47 CFR Part 15 Subpart E         | Unlicensed National Information Infrastructure Devices                                                                 |
| 2   | ANSI C63.10-2020                 | American National Standard for Testing Unlicensed Wireless Devices                                                     |
| 3   | KDB Publication 789033 D02v02r01 | Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E |

Remark:

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product maybe which result in lowering the emission/immunity should be checked to ensure compliance has been maintained.

#### 3.2 Test Verdict

| No. | Description                               | FCC Part No.                                                                                    | Verdict | Remark            |
|-----|-------------------------------------------|-------------------------------------------------------------------------------------------------|---------|-------------------|
| 1   | Antenna Requirement                       | 15.203                                                                                          | Pass    | Note <sup>1</sup> |
| 2   | Conducted Emission at AC Power Line       | 15.207<br>15.407(b)(9)                                                                          | Pass    | --                |
| 3   | Emission Bandwidth and Occupied Bandwidth | U-NII 1:<br>No limits, only for report use.<br>U-NII 3: 15.407(e)                               | Pass    | --                |
| 4   | Maximum Conducted Output Power            | 15.407(a)(1)(i)<br>15.407(a)(1)(ii)<br>15.407(a)(1)(iii)<br>15.407(a)(1)(iv)<br>15.407(a)(3)(i) | Pass    | --                |
| 5   | Power Spectral Density                    | 15.407(a)(1)(i)<br>15.407(a)(1)(ii)<br>15.407(a)(1)(iii)<br>15.407(a)(1)(iv)<br>15.407(a)(3)(i) | Pass    | --                |
| 6   | Band Edge emissions (Radiated)            | 15.407(b)(1)<br>15.407(b)(4)<br>15.407(b)(10)                                                   | Pass    | --                |
| 7   | Undesirable Emissions                     | 15.407(b)(1)<br>15.407(b)(4)<br>15.407(b)(9)<br>15.407(b)(10)                                   | Pass    | --                |
| 8   | Frequency Stability                       | 15.407(g)                                                                                       | Pass    | --                |

Note <sup>1</sup>: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note <sup>2</sup>: N/A" denotes test is not applicable in this test report.

### 3.3 Test Laboratory

|                               |                                                                                                                        |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Test Laboratory               | Shenzhen EU Testing Laboratory Limited                                                                                 |
| Address                       | 101, Building B1, Fuqiao Fourth Area, Qiaotou Community, Fuhai Subdistrict, Baoan District, Shenzhen, Guangdong, China |
| Designation Number            | CN1368                                                                                                                 |
| Test Firm Registration Number | 952583                                                                                                                 |



## 4 Test Configuration

### 4.1 Test Environment

During the measurement, the normal environmental conditions were within the listed ranges:

|                            |                         |                           |
|----------------------------|-------------------------|---------------------------|
| Relative Humidity          | 30% to 60%              |                           |
| Atmospheric Pressure       | 86 kPa to 106 kPa       |                           |
| Temperature                | NT (Normal Temperature) | +15°C to +35°C            |
| Working Voltage of the EUT | NV (Normal Voltage)     | AC 120V, 60Hz for adapter |

### 4.2 Test Equipment

| Conducted Emission at AC power line  |                    |          |           |            |               |
|--------------------------------------|--------------------|----------|-----------|------------|---------------|
| Equipment                            | Manufacturer       | Model No | Serial No | Cal. Date  | Cal. Due Date |
| L.I.S.N.<br>Artificial Mains Network | Rohde & Schwarz    | ENV216   | EE-004    | 2024/01/09 | 2025/01/08    |
| EMI Test Receiver                    | Rohde & Schwarz    | ESCI     | EE-005    | 2024/01/09 | 2025/01/08    |
| Test Software                        | Ferrari Technology | EZ-EMC   | EE-014    | N.C.R      | N.C.R         |

| Radiated Emission and RF Test         |                 |              |           |            |              |
|---------------------------------------|-----------------|--------------|-----------|------------|--------------|
| Equipment                             | Manufacturer    | Model No     | Serial No | Cal Date   | Cal Due Date |
| EMI Test Receiver                     | ROHDE & SCHWARZ | ESPI         | EE-006    | 2025/01/08 | 2026/01/07   |
| Bilog Broadband Antenna               | SCHWARZBECK     | VULB 9163    | EE-007    | 2023/01/14 | 2026/01/13   |
| Double Ridged Horn Antenna            | A-INFOMW        | LB-10180-NF  | EE-008    | 2023/01/12 | 2026/01/11   |
| Pre-amplifier                         | Agilent         | 8447D        | EE-009    | 2025/01/08 | 2026/01/07   |
| Pre-amplifier                         | Agilent         | 8449B        | EE-010    | 2025/01/08 | 2026/01/07   |
| MXA Signal Analyzer                   | Agilent         | N9020A       | EE-011    | 2025/01/08 | 2026/01/07   |
| MXG RF Vector Signal Generator        | Agilent         | N5182A       | EE-012    | 2025/01/08 | 2026/01/07   |
| Test Software                         | Farad           | EZ-EMC       | EE-015    | N.C.R      | N.C.R        |
| MIMO Power Measurement Module         | TSTPASS         | TSPS 2023R   | EE-016    | 2025/01/08 | 2026/01/07   |
| RF Test Software                      | TSTPASS         | TS32893 V2.0 | EE-017    | N.C.R      | N.C.R        |
| Wideband Radio Communication Tester   | ROHDE & SCHWARZ | CMW500       | EE-402    | 2025/02/14 | 2026/02/13   |
| Loop Antenna                          | TESEQ           | HLA6121      | EE-403    | 2025/02/14 | 2026/02/13   |
| Spectrum Analyzer                     | ROHDE & SCHWARZ | FSP40        | EE-404    | 2025/02/14 | 2026/02/13   |
| MXG RF Analog Signal Generator        | Agilent         | N5181A       | EE-406    | 2025/02/14 | 2026/02/13   |
| DRG Horn Antenna (up to 40GHz)        | SCHWARZBECK     | BBHA 9170    | EE-410    | 2025/02/14 | 2026/02/13   |
| Pre-amplifier                         | SKET            | LNPA-1840-50 | EE-411    | 2025/02/14 | 2026/02/13   |
| Constant Temperature Humidity Chamber | Guangxin        | GXP-401      | ES-002    | 2024/07/30 | 2025/07/29   |
| Power Sensor                          | ROHDE&SCHWARZN  | NRP18S       | ES-420    | 2025/02/14 | 2026/02/13   |

### 4.3 Description of Support Unit

| No. | Title   | Manufacturer        | Model No.           | Serial No. |
|-----|---------|---------------------|---------------------|------------|
| 1   | Adapter | refer to clause 2.4 | refer to clause 2.4 | --         |

### 4.4 Test Mode

| No. | Test Modes           | Description                                        |
|-----|----------------------|----------------------------------------------------|
| TM1 | 802.11a mode         | Keep the EUT in 802.11a transmitting mode.         |
| TM2 | 802.11n(HT20) mode   | Keep the EUT in 802.11n(HT20) transmitting mode.   |
| TM3 | 802.11n(HT40) mode   | Keep the EUT in 802.11n(HT40) transmitting mode.   |
| TM4 | 802.11ac(VHT20) mode | Keep the EUT in 802.11ac(VHT20) transmitting mode. |
| TM5 | 802.11ac(VHT40) mode | Keep the EUT in 802.11ac(VHT40) transmitting mode. |
| TM6 | 802.11ac(VHT80) mode | Keep the EUT in 802.11ac(VHT80) transmitting mode. |
| TM7 | 802.11ax(HEW20) mode | Keep the EUT in 802.11ax(HEW20) transmitting mode. |
| TM8 | 802.11ax(HEW40) mode | Keep the EUT in 802.11ax(HEW40) transmitting mode. |
| TM9 | 802.11ax(HEW80) mode | Keep the EUT in 802.11ax(HEW80) transmitting mode. |

### 4.5 Description of Calculation

#### 4.5.1. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS \text{ (dBuV/m)} = RA \text{ (dBuV)} + AF \text{ (dB/m)} + CL \text{ (dB)} - AG \text{ (dB)}$$

|                           |                                            |
|---------------------------|--------------------------------------------|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude    | AG = Amplifier Gain                        |
| AF = Antenna Factor       |                                            |

#### 4.5.2. Disturbance Calculation

The AC mains conducted disturbance is calculated by adding the 10dB Pulse Limiter and Cable Factor and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$CD \text{ (dBuV)} = RA \text{ (dBuV)} + PL \text{ (dB)} + CL \text{ (dB)}$$

|                                  |                                            |
|----------------------------------|--------------------------------------------|
| Where CD = Conducted Disturbance | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude           | PL = 10 dB Pulse Limiter Factor            |

#### 4.6 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

| Test Item                         | Measurement Uncertainty   |
|-----------------------------------|---------------------------|
| Conducted Emission                | 2.64 dB                   |
| Occupied Channel Bandwidth        | 2.8 %                     |
| RF output power, conducted        | 0.68 dB                   |
| Power Spectral Density, conducted | 1.37 dB                   |
| Unwanted Emissions, conducted     | 1.84 dB                   |
| Radiated Emission (9kHz- 30MHz)   | Ur = 2.50 dB              |
| Radiated Emission (30MHz- 1GHz)   | Ur = 2.70 dB (Horizontal) |
|                                   | Ur = 2.70 dB (Vertical)   |
| Radiated Emission (1GHz- 18GHz)   | Ur = 3.50 dB (Horizontal) |
|                                   | Ur = 3.50 dB (Vertical)   |
| Radiated Emission (18GHz- 40GHz)  | Ur = 5.15 dB (Horizontal) |
|                                   | Ur = 5.24 dB (Vertical)   |
| Temperature                       | 0.8°C                     |
| Humidity                          | 4%                        |

#### 4.7 Deviation from Standards

None.

#### 4.8 Abnormalities from Standard Condition

None.

## 5 Test Items

### 5.1 Antenna requirement

#### 5.1.1 Test Requirement

|                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement | <p>According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.</p> <p>If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.</p> |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

#### 5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

| Protected Method                        | Description                            |
|-----------------------------------------|----------------------------------------|
| The antenna is embedded in the product. | An embedded-in antenna design is used. |

| Reference Documents | Item                                     |
|---------------------|------------------------------------------|
| Photo               | Please refer to the EUT Photo documents. |

#### 5.1.3 Antenna Gain


The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 5.2 Conducted Emission at AC Power Line

### 5.2.1 Test Requirement

|                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                              |           |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-----------|
| Test Requirement | Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). |                              |           |
| Test Limit       | Frequency of emission (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                          | Conducted limit (dB $\mu$ V) |           |
|                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Quasi-peak                   | Average   |
|                  | 0.15-0.5                                                                                                                                                                                                                                                                                                                                                                                                                                             | 66 to 56*                    | 56 to 46* |
|                  | 0.5-5                                                                                                                                                                                                                                                                                                                                                                                                                                                | 56                           | 46        |
|                  | 5-30                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 60                           | 50        |
|                  | *Decreases with the logarithm of the frequency.                                                                                                                                                                                                                                                                                                                                                                                                      |                              |           |
| Test Method      | ANSI C63.10-2020 section 6.2                                                                                                                                                                                                                                                                                                                                                                                                                         |                              |           |

### 5.2.2 Test Setup Diagram

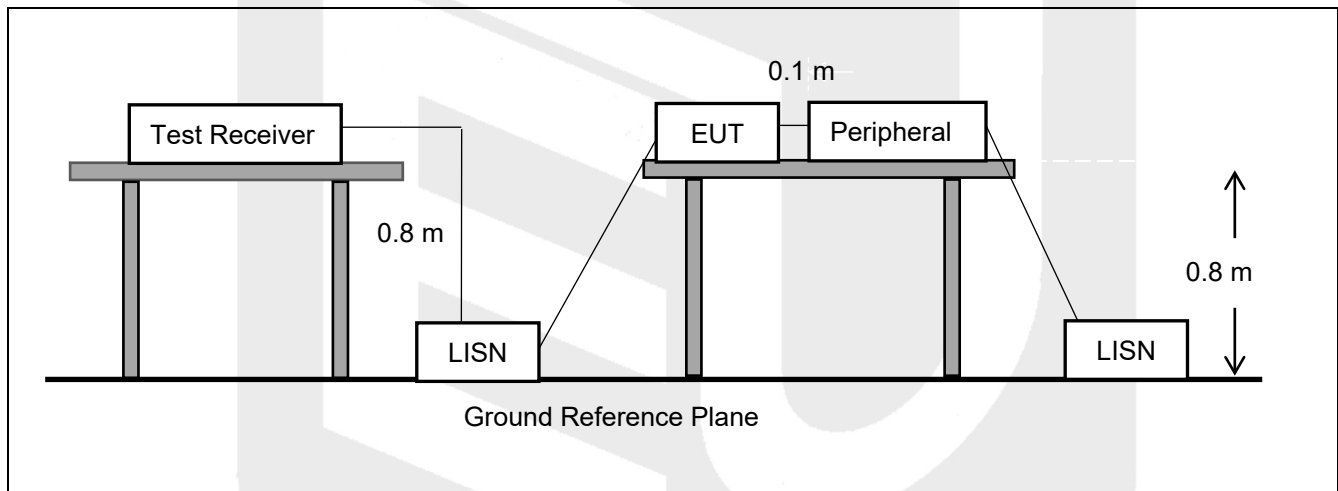

### 5.2.3 Test Procedure

The EUT is put on the plane 0.8 m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network (L.I.S.N). This provided a 50ohm coupling impedance for the tested equipment. Both sides of AC line are investigated to find out the maximum conducted emission according to the test standard regulations during conducted emission measurement.

The bandwidth of the field strength meter (R&S Test Receiver ESCI) is set at 9kHz in 150kHz~30MHz.

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.


### 5.2.4 Test Data

PASS.

All modes have been tested and pass. Only the worst case data was showed in the report, please to see the following pages.

**Conducted Emission Test Data**

Test Site: Shielded Room #1  
Test Mode: TM1/ CH Middle(U-NII-1)  
Comments: Live Line

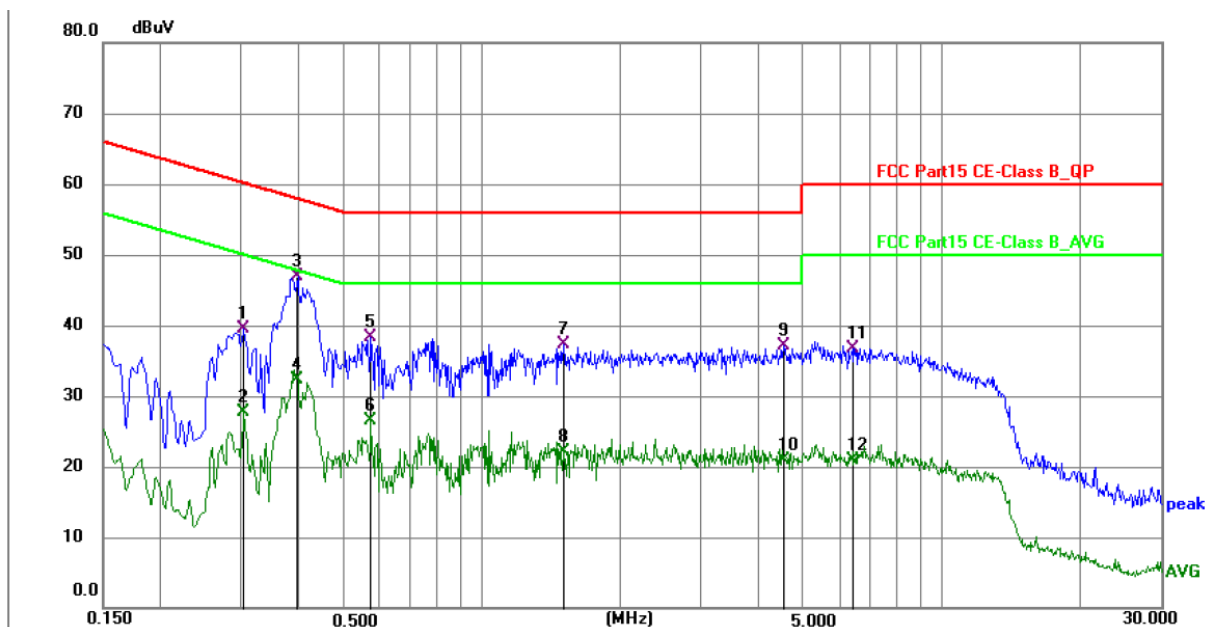


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1   | 0.3035          | 29.44          | 9.99        | 39.43        | 60.15        | -20.72      | QP       | P   |        |
| 2   | 0.3035          | 17.76          | 9.99        | 27.75        | 50.15        | -22.40      | AVG      | P   |        |
| 3 * | 0.3975          | 36.84          | 10.02       | 46.86        | 57.91        | -11.05      | QP       | P   |        |
| 4   | 0.3975          | 22.35          | 10.02       | 32.37        | 47.91        | -15.54      | AVG      | P   |        |
| 5   | 0.5731          | 28.26          | 10.04       | 38.30        | 56.00        | -17.70      | QP       | P   |        |
| 6   | 0.5731          | 16.39          | 10.04       | 26.43        | 46.00        | -19.57      | AVG      | P   |        |
| 7   | 1.5033          | 27.37          | 10.03       | 37.40        | 56.00        | -18.60      | QP       | P   |        |
| 8   | 1.5033          | 12.08          | 10.03       | 22.11        | 46.00        | -23.89      | AVG      | P   |        |
| 9   | 4.5254          | 27.05          | 10.04       | 37.09        | 56.00        | -18.91      | QP       | P   |        |
| 10  | 4.5254          | 10.96          | 10.04       | 21.00        | 46.00        | -25.00      | AVG      | P   |        |
| 11  | 6.4539          | 26.74          | 10.01       | 36.75        | 60.00        | -23.25      | QP       | P   |        |
| 12  | 6.4539          | 10.87          | 10.01       | 20.88        | 50.00        | -29.12      | AVG      | P   |        |

Note: Level = Reading + Factor

Margin = Level - Limit

**Conducted Emission Test Data**

Test Site: Shielded Room #1  
Test Mode: TM1/ CH Middle(U-NII-1)  
Comments: Neutral Line

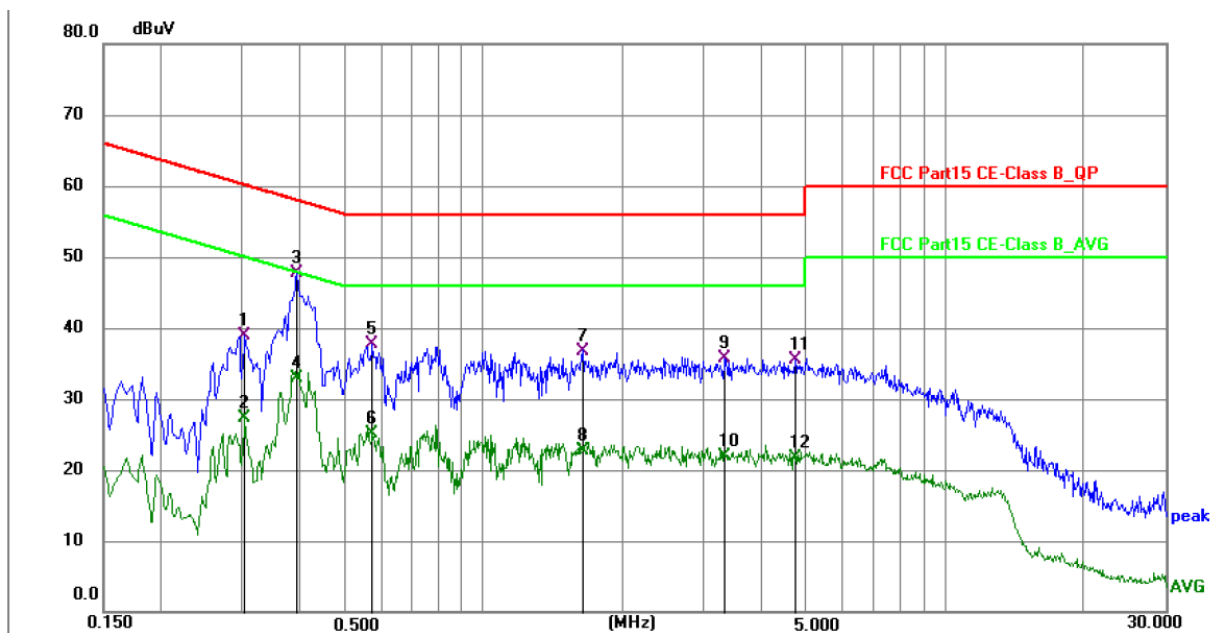

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1   | 0.3030          | 28.96          | 10.02       | 38.98        | 60.16        | -21.18      | QP       | P   |        |
| 2   | 0.3030          | 17.28          | 10.02       | 27.30        | 50.16        | -22.86      | AVG      | P   |        |
| 3 * | 0.3930          | 37.63          | 10.04       | 47.67        | 58.00        | -10.33      | QP       | P   |        |
| 4   | 0.3930          | 22.84          | 10.04       | 32.88        | 48.00        | -15.12      | AVG      | P   |        |
| 5   | 0.5730          | 27.61          | 10.07       | 37.68        | 56.00        | -18.32      | QP       | P   |        |
| 6   | 0.5730          | 14.98          | 10.07       | 25.05        | 46.00        | -20.95      | AVG      | P   |        |
| 7   | 1.6440          | 26.73          | 10.07       | 36.80        | 56.00        | -19.20      | QP       | P   |        |
| 8   | 1.6440          | 12.59          | 10.07       | 22.66        | 46.00        | -23.34      | AVG      | P   |        |
| 9   | 3.3315          | 25.72          | 10.04       | 35.76        | 56.00        | -20.24      | QP       | P   |        |
| 10  | 3.3315          | 11.84          | 10.04       | 21.88        | 46.00        | -24.12      | AVG      | P   |        |
| 11  | 4.7220          | 25.36          | 10.05       | 35.41        | 56.00        | -20.59      | QP       | P   |        |
| 12  | 4.7220          | 11.70          | 10.05       | 21.75        | 46.00        | -24.25      | AVG      | P   |        |


Note: Level = Reading + Factor    Margin = Level - Limit

### 5.3 Emission Bandwidth and Occupied Bandwidth

#### 5.3.1 Test Requirement

|                  |                                                                                                                                                                                                                |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement | U-NII 1, U-NII 2A, U-NII 2C: No limits, only for report use.<br>U-NII 3, U-NII 4: Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz. |
| Test Method      | ANSI C63.10-2020 section 12.5                                                                                                                                                                                  |

#### 5.3.2 Test Setup Diagram

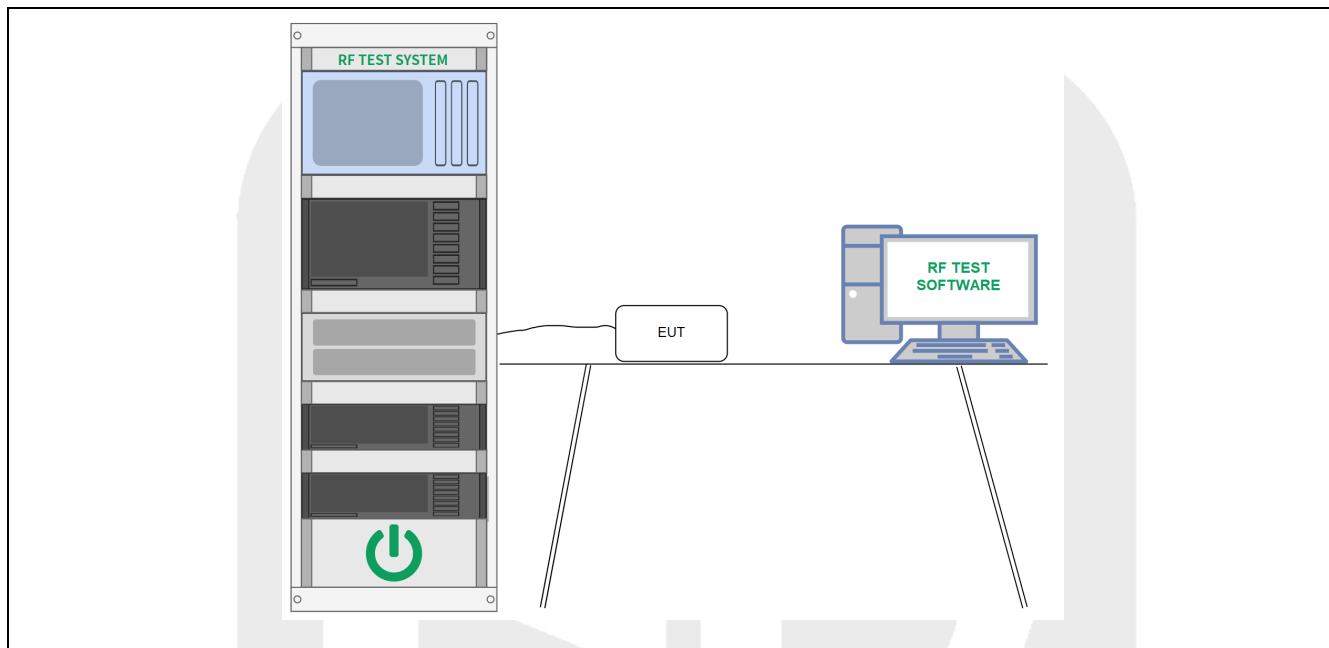

### 5.3.3 Test Procedure

Emission bandwidth:

- a) Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

Occupied bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (OBW/RBW)]$  below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

6 dB emission bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 5.3.4 Test Data

**PASS.**


Please refer to Annex G for details.

## 5.4 Maximum Conducted Output Power

### 5.4.1 Test Requirement

|                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement | <p>For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.</p> <p>If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).</p> <p>For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.</p> <p>If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.</p> <p>Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power.</p> <p>For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi.</p> <p>Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p> <p>For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.</p> <p>If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.</p> <p>If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p> |
| Test Method      | ANSI C63.10-2020, section 12.4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

### 5.4.2 Test Setup Diagram

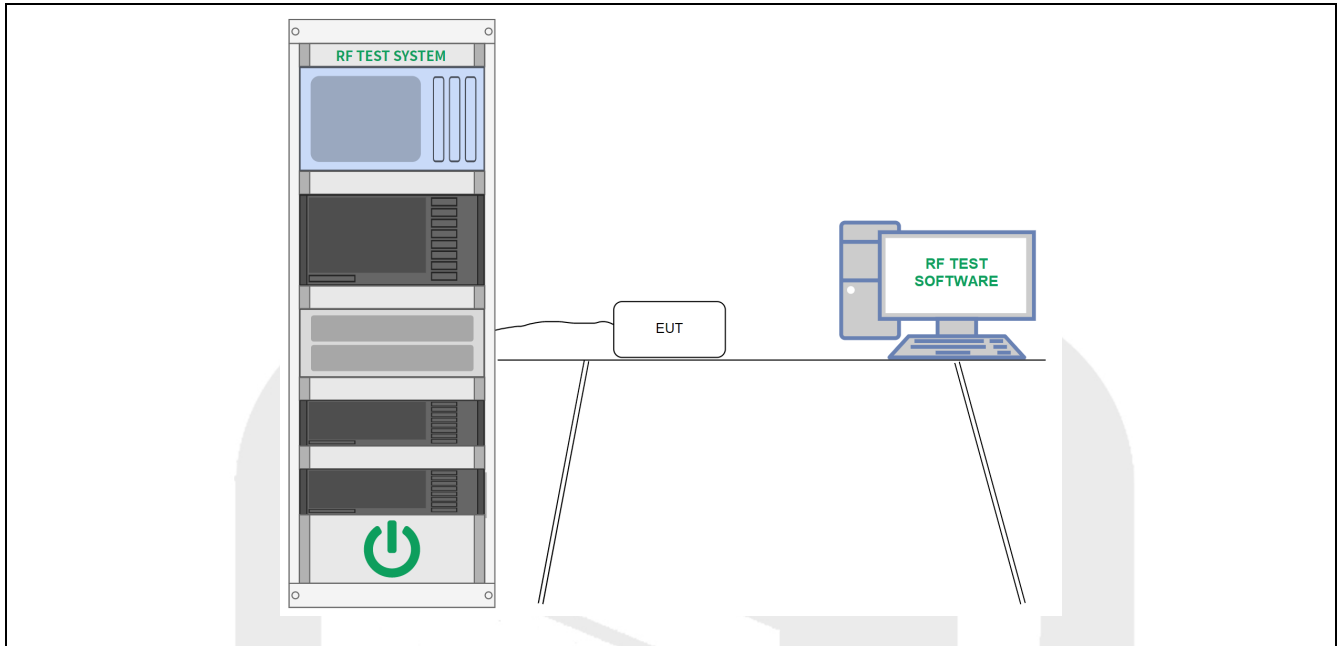

### 5.4.3 Test Procedure

Method SA-2 uses trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction. The procedure for this method is as follows:

- a) Measure the duty cycle  $D$  of the transmitter output signal as described in 12.2.
- b) Set span to encompass the entire 99% OBW of the signal.
- c) Set RBW = 1 MHz.
- d) Set VBW  $\geq$  3 MHz.
- e) Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ . (This gives bin-to-bin spacing  $\leq \text{RBW} / 2$ , so that narrowband signals are not lost between frequency bins.)
- f) Sweep time = auto.
- g) Detector = Power averaging (rms), if available. Otherwise, use sample detector mode.
- h) Do not use sweep triggering. Allow the sweep to “free run.”
- i) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
- j) Compute power by integrating the spectrum across the 99% OBW of the signal using the instrument's band-power measurement function with band limits set equal to the EBW or OBW band-edges. If the instrument does not have a band-power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 99% OBW of the spectrum.
- k) Add  $[10 \log (1 / D)]$ , where  $D$  is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add  $[10 \log (1 / 0.25)] = 6 \text{ dB}$  if the duty cycle is 25%.

### 5.4.4 Test Data

**PASS.**


Please refer to Annex G for details.

## 5.5 Power Spectral Density

### 5.5.1 Test Requirement

|                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement | <p>For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.</p> <p>If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.</p> <p>If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.</p> <p>Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.</p> <p>Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p> <p>For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.</p> <p>If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For the band 5.725-5.850 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.</p> <p>If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.</p> <p>Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p> |
| Test Method      | ANSI C63.10-2020, section 12.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

### 5.5.2 Test Setup Diagram

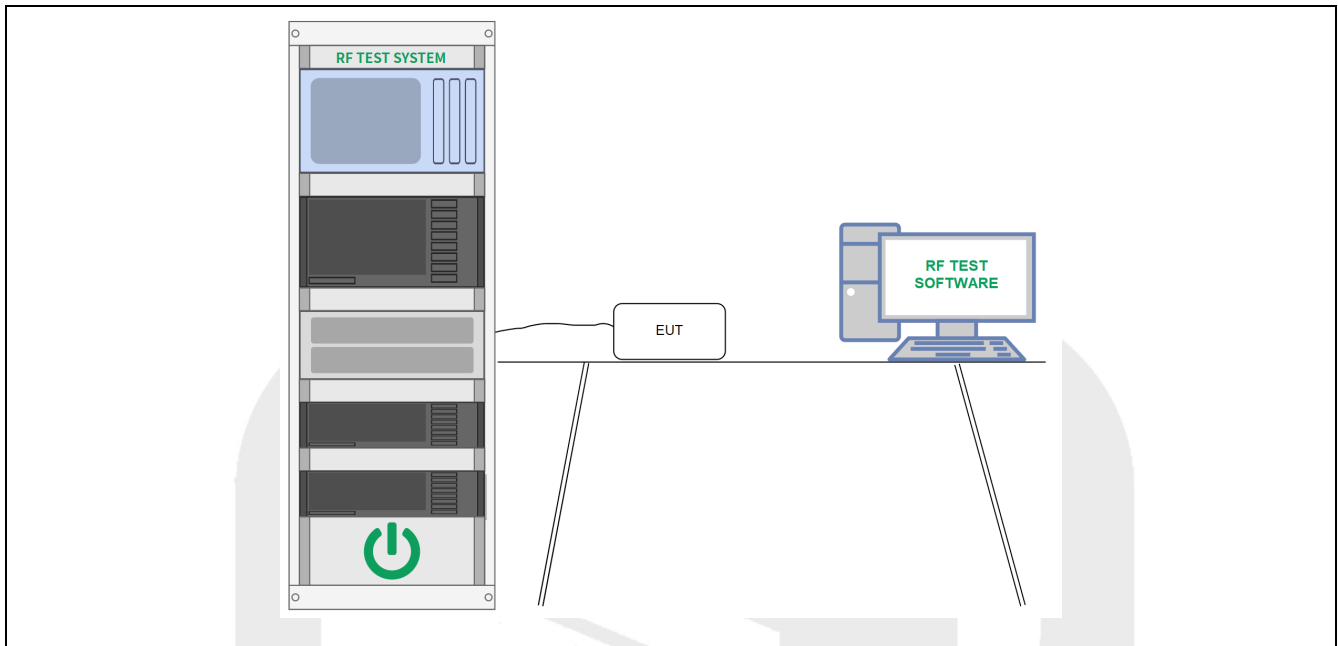

### 5.5.3 Test Procedure

- a) Create an average power spectrum for the EUT operating mode being tested by following the instructions in 12.3.2 for measuring maximum conducted output power using a spectrum analyzer or EMI receiver; that is, select the appropriate test method (SA-1, SA-2, SA-3, or their respective alternatives) and apply it up to, but not including, the step labeled, "Compute power...." (This procedure is required even if the maximum conducted output power measurement was performed using the power meter method PM.)
  - b) Use the peak search function on the instrument to find the peak of the spectrum.
  - c) Make the following adjustments to the peak value of the spectrum, if applicable:
    - 1) If method SA-2 or SA-2A was used, then add  $[10 \log (1 / D)]$ , where D is the duty cycle, to the peak of the spectrum.
    - 2) If method SA-3A was used and the linear mode was used in step h) of 12.3.2.7, add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
  - d) The result is the PPSD.
  - e) The procedure in item a) through item c) requires the use of 1 MHz resolution bandwidth to satisfy the 1 MHz measurement bandwidth specified by some regulatory authorities. This requirement also permits use of resolution bandwidths less than 1 MHz "provided that the measured power is integrated to show the total power over the measurement bandwidth" (i.e., 1 MHz). If measurements are performed using a reduced resolution bandwidth and integrated over 1 MHz bandwidth, the following adjustments to the procedures apply:
    - 1) Set RBW  $\geq 1 / T$ , where T is defined in 12.2 a).
    - 2) Set VBW  $\geq [3 \times \text{RBW}]$ .
- Care shall be taken such that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

### 5.5.4 Test Data

**PASS.**

Please refer to Annex G for details.


## 5.6 Band edge Emissions (Restricted frequency bands)


### 5.6.1 Test Requirement

|                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                  |                                                           |       |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|-----------------------------------------------------------|-------|
| Test Requirement | <p>Frequency band 5150-5350 MHz:<br/>For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.</p> <p>Frequency band 5725-5850 MHz:<br/>Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:<br/>a) 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;<br/>b) 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;<br/>c) 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and<br/>d) -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.</p> <p>If radiated measurements are performed, field strength is then converted to EIRP as follows, Where:<br/>E is the field strength in V/m;<br/>d is the measurement distance in meters.<br/>EIRP is the equivalent isotopically radiated power in watts.ii) Working in dB units, the above equation is equivalent to. <math>EIRP [dBm] = E [dBuV/m] + 20 \log (d [meters]) - 104.77</math><br/>Or, if d is 3 meters:<br/><math>EIRP [dBm] = E [dBuV/m] - 95.23</math></p> |                  |                                                           |       |
|                  | Operating Band                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Frequency        | EIRP Limit                                                | Value |
|                  | 5150-5250MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Above 1GHz       | -27dBm/MHz(68.23dBuV/m)@3m                                | Peak  |
|                  | 5250-5350MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Above 1GHz       | -27dBm/MHz(68.23dBuV/m)@3m                                | Peak  |
|                  | 5470-5725MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Above 1GHz       | -27dBm/MHz(68.23dBuV/m)@3m                                | Peak  |
|                  | 5725-5850 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 1GHz-5.65GHz     | -27 dBm/MHz(68.23dBuV/m)@3m                               | Peak  |
|                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 5.65GHz-5.7GHz   | -27dBm/MHz to 10dBm/MHz* (68.23dBuV/m to 105.23dBuV/m) *  | Peak  |
|                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 5.7GHz-5.72GHz   | 10dBm/MHz to 15.6dBm/MHz* (105.6dBuV/m to 110.83dBuV/m) * | Peak  |
|                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 5.72GHz-5.725GHz | 15.6dBm/MHz to 27dBm/MHz* (110.8dBuV/m to 122.23dBuV/m) * | Peak  |
|                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 5.85GHz-         | 27dBm/MHz to 15.6dBm/MHz*                                 | Peak  |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 5.855GHz                                                          | (122.2dBuV/m to 110.83dBuV/m)*                             |                  |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|------------------------------------------------------------|------------------|-----|-----|-----|-----|-------------|--------------|-----------|----------|-------------|-------------------|---------|-----------|---------------|-------------------|----------|-----------|-------------|------------|-----------|-----------|-----------------|------------|-------------|---------|-----------------|---------|---------------|---------|-------------|-----------|-----------|-----------|-----------------|------------|---------------|------------|-----------------|---------|-----------|------------|-------------|--------------|-----------|------------|-------------|---------------------|-------------|-----------|-----------------|-------------|-----------|-------------|-----------------|-----------------|-----------|-----------|--------------|--------------|-----------|-----------|-------------------|---------|-------------|------------|-------------------|-----------|-----------|------------------|-------------|--|--|--|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 5.855GHz-5.875GHz                                                 | 15.6dBm/MHz to 10dBm/MHz*<br>(110.8dBuV/m to 105.63dBuV/m* | Peak             |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 5.875GHz-5.925GHz                                                 | 10dBm/MHz to -27dBm/MHz*<br>(105.6dBuV/m to 68.23dBuV/m) * | Peak             |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Above 5.925GHz                                                    | -27 dBm/MHz(68.2dBuV/m)@3m                                 | Peak             |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
| <p>Restricted frequency bands:</p> <table> <thead> <tr> <th>MHz</th><th>MHz</th><th>MHz</th><th>GHz</th></tr> </thead> <tbody> <tr><td>0.090-0.110</td><td>16.42-16.423</td><td>399.9-410</td><td>4.5-5.15</td></tr> <tr><td>0.495-0.505</td><td>16.69475-16.69525</td><td>608-614</td><td>5.35-5.46</td></tr> <tr><td>2.1735-2.1905</td><td>16.80425-16.80475</td><td>960-1240</td><td>7.25-7.75</td></tr> <tr><td>4.125-4.128</td><td>25.5-25.67</td><td>1300-1427</td><td>8.025-8.5</td></tr> <tr><td>4.17725-4.17775</td><td>37.5-38.25</td><td>1435-1626.5</td><td>9.0-9.2</td></tr> <tr><td>4.20725-4.20775</td><td>73-74.6</td><td>1645.5-1646.5</td><td>9.3-9.5</td></tr> <tr><td>6.215-6.218</td><td>74.8-75.2</td><td>1660-1710</td><td>10.6-12.7</td></tr> <tr><td>6.26775-6.26825</td><td>108-121.94</td><td>1718.8-1722.2</td><td>13.25-13.4</td></tr> <tr><td>6.31175-6.31225</td><td>123-138</td><td>2200-2300</td><td>14.47-14.5</td></tr> <tr><td>8.291-8.294</td><td>149.9-150.05</td><td>2310-2390</td><td>15.35-16.2</td></tr> <tr><td>8.362-8.366</td><td>156.52475-156.52525</td><td>2483.5-2500</td><td>17.7-21.4</td></tr> <tr><td>8.37625-8.38675</td><td>156.7-156.9</td><td>2690-2900</td><td>22.01-23.12</td></tr> <tr><td>8.41425-8.41475</td><td>162.0125-167.17</td><td>3260-3267</td><td>23.6-24.0</td></tr> <tr><td>12.29-12.293</td><td>167.72-173.2</td><td>3332-3339</td><td>31.2-31.8</td></tr> <tr><td>12.51975-12.52025</td><td>240-285</td><td>3345.8-3358</td><td>36.43-36.5</td></tr> <tr><td>12.57675-12.57725</td><td>322-335.4</td><td>3600-4400</td><td>(<sup>2</sup>)</td></tr> <tr><td>13.36-13.41</td><td></td><td></td><td></td></tr> </tbody> </table> |                                                                   |                                                            |                  | MHz | MHz | MHz | GHz | 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 | 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 | 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 | 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 | 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 | 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 | 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 | 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 | 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 | 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 | 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 | 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 | 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 | 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 | 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 | 12.57675-12.57725 | 322-335.4 | 3600-4400 | ( <sup>2</sup> ) | 13.36-13.41 |  |  |  |
| MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | MHz                                                               | MHz                                                        | GHz              |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
| 0.090-0.110                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 16.42-16.423                                                      | 399.9-410                                                  | 4.5-5.15         |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
| 0.495-0.505                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 16.69475-16.69525                                                 | 608-614                                                    | 5.35-5.46        |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
| 2.1735-2.1905                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 16.80425-16.80475                                                 | 960-1240                                                   | 7.25-7.75        |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
| 4.125-4.128                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 25.5-25.67                                                        | 1300-1427                                                  | 8.025-8.5        |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
| 4.17725-4.17775                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 37.5-38.25                                                        | 1435-1626.5                                                | 9.0-9.2          |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
| 4.20725-4.20775                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 73-74.6                                                           | 1645.5-1646.5                                              | 9.3-9.5          |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
| 6.215-6.218                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 74.8-75.2                                                         | 1660-1710                                                  | 10.6-12.7        |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
| 6.26775-6.26825                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 108-121.94                                                        | 1718.8-1722.2                                              | 13.25-13.4       |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
| 6.31175-6.31225                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 123-138                                                           | 2200-2300                                                  | 14.47-14.5       |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
| 8.291-8.294                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 149.9-150.05                                                      | 2310-2390                                                  | 15.35-16.2       |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
| 8.362-8.366                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 156.52475-156.52525                                               | 2483.5-2500                                                | 17.7-21.4        |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
| 8.37625-8.38675                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 156.7-156.9                                                       | 2690-2900                                                  | 22.01-23.12      |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
| 8.41425-8.41475                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 162.0125-167.17                                                   | 3260-3267                                                  | 23.6-24.0        |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
| 12.29-12.293                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 167.72-173.2                                                      | 3332-3339                                                  | 31.2-31.8        |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
| 12.51975-12.52025                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 240-285                                                           | 3345.8-3358                                                | 36.43-36.5       |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
| 12.57675-12.57725                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 322-335.4                                                         | 3600-4400                                                  | ( <sup>2</sup> ) |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
| 13.36-13.41                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                   |                                                            |                  |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |
| Test Method                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ANSI C63.10-2020, section 12.7.4, section 12.7.5, section 12.7.6; |                                                            |                  |     |     |     |     |             |              |           |          |             |                   |         |           |               |                   |          |           |             |            |           |           |                 |            |             |         |                 |         |               |         |             |           |           |           |                 |            |               |            |                 |         |           |            |             |              |           |            |             |                     |             |           |                 |             |           |             |                 |                 |           |           |              |              |           |           |                   |         |             |            |                   |           |           |                  |             |  |  |  |

### 5.6.2 Test Setup Diagram

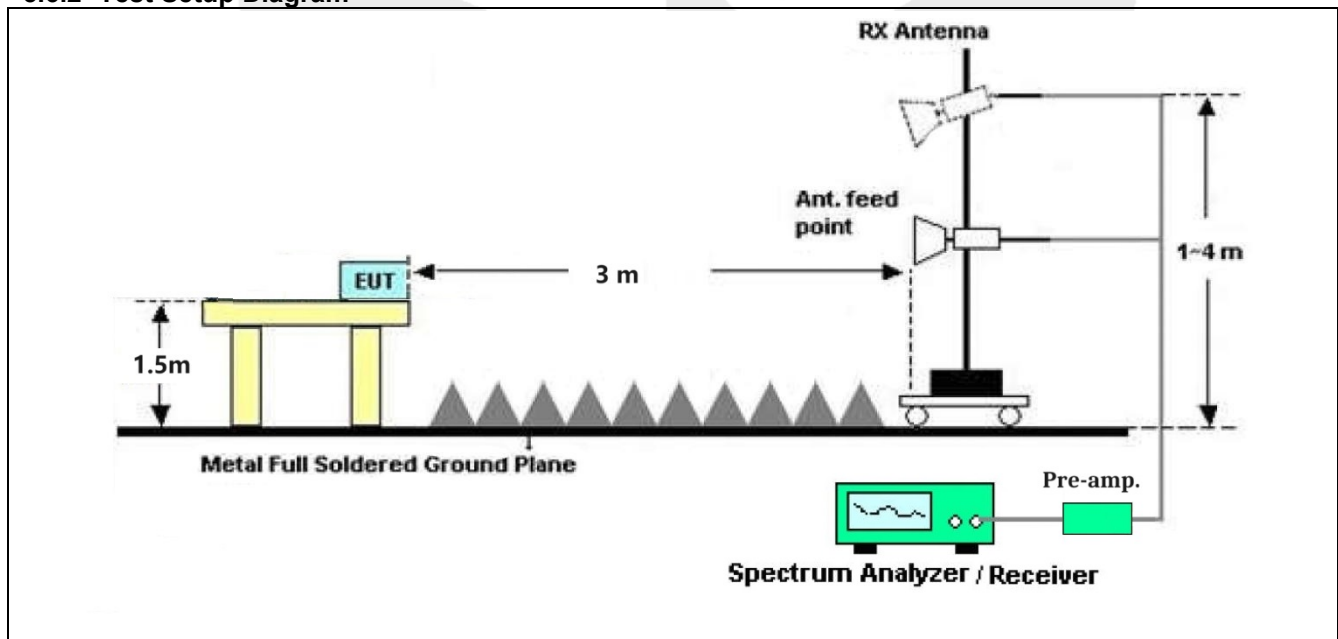

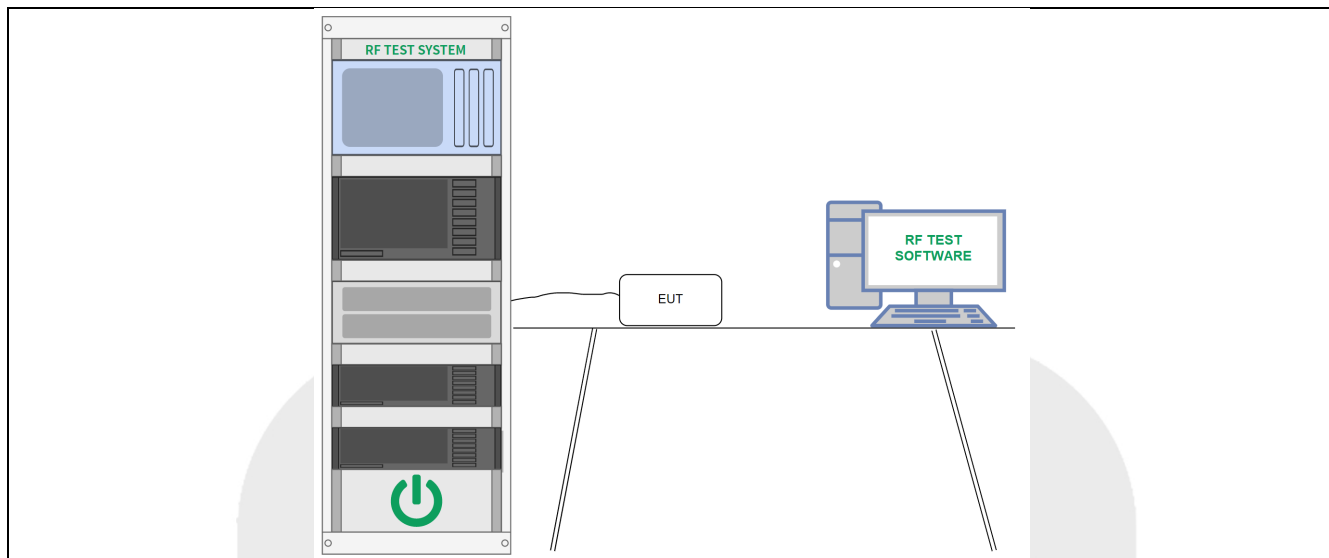

### 5.6.3 Test Procedure

Above 1GHz:

- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:

- Level= Read Level+ Cable Loss+ Antenna Factor- Preamplifier Factor
- Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
- The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

### 5.6.4 Test Data

**PASS.**

Please refer to the following pages.

**Band Edge Emissions Test Data:**
**U-NII-1:**

| Test Mode: 802.11a |                 |                |               |                         | CH Low: 5180 MHz |             |               |        |
|--------------------|-----------------|----------------|---------------|-------------------------|------------------|-------------|---------------|--------|
| Pol.               | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)   | Margin (dB) | Detector Type | Result |
| H                  | 5150.00         | 47.37          | 5.79          | 53.16                   | 68.23            | -15.08      | PK            | PASS   |
| H                  | 5350.00         | 45.51          | 6.45          | 51.96                   | 68.23            | -16.28      | PK            | PASS   |
| V                  | 5150.00         | 47.67          | 5.79          | 53.46                   | 68.23            | -14.77      | PK            | PASS   |
| V                  | 5350.00         | 45.45          | 6.45          | 51.90                   | 68.23            | -16.34      | PK            | PASS   |
| H                  | 5150.00         | 34.13          | 5.79          | 39.92                   | 54.00            | -14.09      | AV            | PASS   |
| H                  | 5350.00         | 33.00          | 6.45          | 39.45                   | 54.00            | -14.55      | AV            | PASS   |
| V                  | 5150.00         | 36.88          | 5.79          | 42.67                   | 54.00            | -11.34      | AV            | PASS   |
| V                  | 5350.00         | 33.93          | 6.45          | 40.38                   | 54.00            | -13.62      | AV            | PASS   |

| Test Mode: 802.11a |                 |                |               |                         | CH High: 5240 MHz |             |               |        |
|--------------------|-----------------|----------------|---------------|-------------------------|-------------------|-------------|---------------|--------|
| Pol.               | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)    | Margin (dB) | Detector Type | Result |
| H                  | 5150.00         | 47.22          | 5.79          | 53.01                   | 68.23             | -15.23      | PK            | PASS   |
| H                  | 5350.00         | 46.51          | 6.45          | 52.96                   | 68.23             | -15.28      | PK            | PASS   |
| V                  | 5150.00         | 49.14          | 5.79          | 54.93                   | 68.23             | -13.30      | PK            | PASS   |
| V                  | 5350.00         | 46.30          | 6.45          | 52.75                   | 68.23             | -15.49      | PK            | PASS   |
| H                  | 5150.00         | 36.81          | 5.79          | 42.60                   | 54.00             | -11.40      | AV            | PASS   |
| H                  | 5350.00         | 32.78          | 6.45          | 39.23                   | 54.00             | -14.78      | AV            | PASS   |
| V                  | 5150.00         | 34.11          | 5.79          | 39.90                   | 54.00             | -14.10      | AV            | PASS   |
| V                  | 5350.00         | 32.30          | 6.45          | 38.75                   | 54.00             | -15.25      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-1:**

| Test Mode: 802.11n(HT20) |                 |                |               |                         | CH Low: 5180 MHz |             |               |        |
|--------------------------|-----------------|----------------|---------------|-------------------------|------------------|-------------|---------------|--------|
| Pol.                     | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)   | Margin (dB) | Detector Type | Result |
| H                        | 5150.00         | 48.32          | 5.79          | 54.11                   | 68.23            | -14.12      | PK            | PASS   |
| H                        | 5350.00         | 45.28          | 6.45          | 51.73                   | 68.23            | -16.50      | PK            | PASS   |
| V                        | 5150.00         | 48.52          | 5.79          | 54.31                   | 68.23            | -13.92      | PK            | PASS   |
| V                        | 5350.00         | 45.61          | 6.45          | 52.06                   | 68.23            | -16.17      | PK            | PASS   |
| H                        | 5150.00         | 34.08          | 5.79          | 39.87                   | 54.00            | -14.14      | AV            | PASS   |
| H                        | 5350.00         | 32.47          | 6.45          | 38.92                   | 54.00            | -15.09      | AV            | PASS   |
| V                        | 5150.00         | 36.11          | 5.79          | 41.90                   | 54.00            | -12.10      | AV            | PASS   |
| V                        | 5350.00         | 32.43          | 6.45          | 38.88                   | 54.00            | -15.13      | AV            | PASS   |

| Test Mode: 802.11n(HT20) |                 |                |               |                         | CH High: 5240 MHz |             |               |        |
|--------------------------|-----------------|----------------|---------------|-------------------------|-------------------|-------------|---------------|--------|
| Pol.                     | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)    | Margin (dB) | Detector Type | Result |
| H                        | 5150.00         | 47.59          | 5.79          | 53.38                   | 68.23             | -14.85      | PK            | PASS   |
| H                        | 5350.00         | 46.51          | 6.45          | 52.96                   | 68.23             | -15.27      | PK            | PASS   |
| V                        | 5150.00         | 47.68          | 5.79          | 53.47                   | 68.23             | -14.77      | PK            | PASS   |
| V                        | 5350.00         | 45.05          | 6.45          | 51.50                   | 68.23             | -16.74      | PK            | PASS   |
| H                        | 5150.00         | 36.00          | 5.79          | 41.79                   | 54.00             | -12.22      | AV            | PASS   |
| H                        | 5350.00         | 33.52          | 6.45          | 39.97                   | 54.00             | -14.03      | AV            | PASS   |
| V                        | 5150.00         | 35.07          | 5.79          | 40.86                   | 54.00             | -13.15      | AV            | PASS   |
| V                        | 5350.00         | 32.53          | 6.45          | 38.98                   | 54.00             | -15.02      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-1:**

| Test Mode: 802.11n(HT40) |                 |                |               |                         | CH Low: 5190 MHz |             |               |        |
|--------------------------|-----------------|----------------|---------------|-------------------------|------------------|-------------|---------------|--------|
| Pol.                     | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)   | Margin (dB) | Detector Type | Result |
| H                        | 5150.00         | 48.44          | 5.79          | 54.23                   | 68.23            | -14.00      | PK            | PASS   |
| H                        | 5350.00         | 45.69          | 6.45          | 52.14                   | 68.23            | -16.10      | PK            | PASS   |
| V                        | 5150.00         | 49.26          | 5.79          | 55.05                   | 68.23            | -13.18      | PK            | PASS   |
| V                        | 5350.00         | 46.99          | 6.45          | 53.44                   | 68.23            | -14.79      | PK            | PASS   |
| H                        | 5150.00         | 36.79          | 5.79          | 42.58                   | 54.00            | -11.43      | AV            | PASS   |
| H                        | 5350.00         | 33.99          | 6.45          | 40.44                   | 54.00            | -13.57      | AV            | PASS   |
| V                        | 5150.00         | 36.84          | 5.79          | 42.63                   | 54.00            | -11.38      | AV            | PASS   |
| V                        | 5350.00         | 33.43          | 6.45          | 39.88                   | 54.00            | -14.13      | AV            | PASS   |

| Test Mode: 802.11n(HT40) |                 |                |               |                         | CH High: 5190 MHz |             |               |        |
|--------------------------|-----------------|----------------|---------------|-------------------------|-------------------|-------------|---------------|--------|
| Pol.                     | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)    | Margin (dB) | Detector Type | Result |
| H                        | 5150.00         | 49.74          | 5.79          | 55.53                   | 68.23             | -12.71      | PK            | PASS   |
| H                        | 5350.00         | 45.58          | 6.45          | 52.03                   | 68.23             | -16.21      | PK            | PASS   |
| V                        | 5150.00         | 48.61          | 5.79          | 54.40                   | 68.23             | -13.83      | PK            | PASS   |
| V                        | 5350.00         | 46.08          | 6.45          | 52.53                   | 68.23             | -15.70      | PK            | PASS   |
| H                        | 5150.00         | 34.35          | 5.79          | 40.14                   | 54.00             | -13.86      | AV            | PASS   |
| H                        | 5350.00         | 31.67          | 6.45          | 38.12                   | 54.00             | -15.88      | AV            | PASS   |
| V                        | 5150.00         | 36.05          | 5.79          | 41.84                   | 54.00             | -12.17      | AV            | PASS   |
| V                        | 5350.00         | 33.56          | 6.45          | 40.01                   | 54.00             | -14.00      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-1:**

| Test Mode: 802.11ac(VHT20) |                 |                |               |                         | CH Low: 5180 MHz |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|------------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)   | Margin (dB) | Detector Type | Result |
| H                          | 5150.00         | 48.84          | 5.79          | 54.63                   | 68.23            | -13.61      | PK            | PASS   |
| H                          | 5350.00         | 46.74          | 6.45          | 53.19                   | 68.23            | -15.05      | PK            | PASS   |
| V                          | 5150.00         | 49.78          | 5.79          | 55.57                   | 68.23            | -12.66      | PK            | PASS   |
| V                          | 5350.00         | 45.35          | 6.45          | 51.80                   | 68.23            | -16.44      | PK            | PASS   |
| H                          | 5150.00         | 37.00          | 5.79          | 42.79                   | 54.00            | -11.22      | AV            | PASS   |
| H                          | 5350.00         | 32.17          | 6.45          | 38.62                   | 54.00            | -15.39      | AV            | PASS   |
| V                          | 5150.00         | 36.65          | 5.79          | 42.44                   | 54.00            | -11.56      | AV            | PASS   |
| V                          | 5350.00         | 33.51          | 6.45          | 39.96                   | 54.00            | -14.05      | AV            | PASS   |

| Test Mode: 802.11ac(VHT20) |                 |                |               |                         | CH High: 5240 MHz |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|-------------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)    | Margin (dB) | Detector Type | Result |
| H                          | 5150.00         | 47.89          | 5.79          | 53.68                   | 68.23             | -14.56      | PK            | PASS   |
| H                          | 5350.00         | 45.15          | 6.45          | 51.60                   | 68.23             | -16.63      | PK            | PASS   |
| V                          | 5150.00         | 47.68          | 5.79          | 53.47                   | 68.23             | -14.76      | PK            | PASS   |
| V                          | 5350.00         | 46.15          | 6.45          | 52.60                   | 68.23             | -15.64      | PK            | PASS   |
| H                          | 5150.00         | 34.34          | 5.79          | 40.13                   | 54.00             | -13.88      | AV            | PASS   |
| H                          | 5350.00         | 31.15          | 6.45          | 37.60                   | 54.00             | -16.40      | AV            | PASS   |
| V                          | 5150.00         | 34.99          | 5.79          | 40.78                   | 54.00             | -13.23      | AV            | PASS   |
| V                          | 5350.00         | 31.65          | 6.45          | 38.10                   | 54.00             | -15.90      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-1:**

| Test Mode: 802.11 ac(VHT40) |                 |                |               |                         | CH Low: 5190 MHz |             |               |        |
|-----------------------------|-----------------|----------------|---------------|-------------------------|------------------|-------------|---------------|--------|
| Pol.                        | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)   | Margin (dB) | Detector Type | Result |
| H                           | 5150.00         | 47.93          | 5.79          | 53.72                   | 68.23            | -14.52      | PK            | PASS   |
| H                           | 5350.00         | 44.72          | 6.45          | 51.17                   | 68.23            | -17.07      | PK            | PASS   |
| V                           | 5150.00         | 48.59          | 5.79          | 54.38                   | 68.23            | -13.85      | PK            | PASS   |
| V                           | 5350.00         | 44.59          | 6.45          | 51.04                   | 68.23            | -17.19      | PK            | PASS   |
| H                           | 5150.00         | 35.35          | 5.79          | 41.14                   | 54.00            | -12.86      | AV            | PASS   |
| H                           | 5350.00         | 31.00          | 6.45          | 37.45                   | 54.00            | -16.55      | AV            | PASS   |
| V                           | 5150.00         | 35.70          | 5.79          | 41.49                   | 54.00            | -12.51      | AV            | PASS   |
| V                           | 5350.00         | 33.56          | 6.45          | 40.01                   | 54.00            | -13.99      | AV            | PASS   |

| Test Mode: 802.11 ac(VHT40) |                 |                |               |                         | CH High: 5190 MHz |             |               |        |
|-----------------------------|-----------------|----------------|---------------|-------------------------|-------------------|-------------|---------------|--------|
| Pol.                        | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)    | Margin (dB) | Detector Type | Result |
| H                           | 5150.00         | 49.89          | 5.79          | 55.68                   | 68.23             | -12.55      | PK            | PASS   |
| H                           | 5350.00         | 44.88          | 6.45          | 51.33                   | 68.23             | -16.91      | PK            | PASS   |
| V                           | 5150.00         | 48.15          | 5.79          | 53.94                   | 68.23             | -14.30      | PK            | PASS   |
| V                           | 5350.00         | 46.12          | 6.45          | 52.57                   | 68.23             | -15.66      | PK            | PASS   |
| H                           | 5150.00         | 34.25          | 5.79          | 40.04                   | 54.00             | -13.96      | AV            | PASS   |
| H                           | 5350.00         | 32.92          | 6.45          | 39.37                   | 54.00             | -14.64      | AV            | PASS   |
| V                           | 5150.00         | 34.00          | 5.79          | 39.79                   | 54.00             | -14.21      | AV            | PASS   |
| V                           | 5350.00         | 33.22          | 6.45          | 39.67                   | 54.00             | -14.34      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-1:**

| Test Mode: 802.11ac(VHT80) |                 |                |               |                         | CH: 5210 MHz   |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|----------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type | Result |
| H                          | 5150.00         | 47.92          | 5.79          | 53.71                   | 68.23          | -14.53      | PK            | PASS   |
| H                          | 5350.00         | 45.60          | 6.45          | 52.05                   | 68.23          | -16.19      | PK            | PASS   |
| V                          | 5150.00         | 48.48          | 5.79          | 54.27                   | 68.23          | -13.97      | PK            | PASS   |
| V                          | 5350.00         | 44.75          | 6.45          | 51.20                   | 68.23          | -17.04      | PK            | PASS   |
| H                          | 5150.00         | 34.17          | 5.79          | 39.96                   | 54.00          | -14.04      | AV            | PASS   |
| H                          | 5350.00         | 31.77          | 6.45          | 38.22                   | 54.00          | -15.78      | AV            | PASS   |
| V                          | 5150.00         | 34.23          | 5.79          | 40.02                   | 54.00          | -13.98      | AV            | PASS   |
| V                          | 5350.00         | 33.17          | 6.45          | 39.62                   | 54.00          | -14.38      | AV            | PASS   |

| Test Mode: 802.11 ac(VHT80) |                 |                |               |                         | CH: 5210 MHz   |             |               |        |
|-----------------------------|-----------------|----------------|---------------|-------------------------|----------------|-------------|---------------|--------|
| Pol.                        | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type | Result |
| H                           | 5150.00         | 49.24          | 5.79          | 55.03                   | 68.23          | -13.21      | PK            | PASS   |
| H                           | 5350.00         | 44.46          | 6.45          | 50.91                   | 68.23          | -17.32      | PK            | PASS   |
| V                           | 5150.00         | 48.34          | 5.79          | 54.13                   | 68.23          | -14.10      | PK            | PASS   |
| V                           | 5350.00         | 44.46          | 6.45          | 50.91                   | 68.23          | -17.32      | PK            | PASS   |
| H                           | 5150.00         | 34.59          | 5.79          | 40.38                   | 54.00          | -13.62      | AV            | PASS   |
| H                           | 5350.00         | 32.82          | 6.45          | 39.27                   | 54.00          | -14.74      | AV            | PASS   |
| V                           | 5150.00         | 36.69          | 5.79          | 42.48                   | 54.00          | -11.53      | AV            | PASS   |
| V                           | 5350.00         | 33.66          | 6.45          | 40.11                   | 54.00          | -13.89      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-1:**

| Test Mode: 802.11ax(HEW20) |                 |                |               |                         | CH Low: 5180 MHz |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|------------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)   | Margin (dB) | Detector Type | Result |
| H                          | 5150.00         | 49.21          | 5.79          | 55.00                   | 68.23            | -13.24      | PK            | PASS   |
| H                          | 5350.00         | 45.74          | 6.45          | 52.19                   | 68.23            | -16.05      | PK            | PASS   |
| V                          | 5150.00         | 48.72          | 5.79          | 54.51                   | 68.23            | -13.73      | PK            | PASS   |
| V                          | 5350.00         | 45.67          | 6.45          | 52.12                   | 68.23            | -16.11      | PK            | PASS   |
| H                          | 5150.00         | 35.20          | 5.79          | 40.99                   | 54.00            | -13.02      | AV            | PASS   |
| H                          | 5350.00         | 32.40          | 6.45          | 38.85                   | 54.00            | -15.15      | AV            | PASS   |
| V                          | 5150.00         | 37.00          | 5.79          | 42.79                   | 54.00            | -11.21      | AV            | PASS   |
| V                          | 5350.00         | 31.19          | 6.45          | 37.64                   | 54.00            | -16.36      | AV            | PASS   |

| Test Mode: 802.11ax(HEW20) |                 |                |               |                         | CH High: 5240 MHz |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|-------------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)    | Margin (dB) | Detector Type | Result |
| H                          | 5150.00         | 47.76          | 5.79          | 53.55                   | 68.23             | -14.68      | PK            | PASS   |
| H                          | 5350.00         | 45.95          | 6.45          | 52.40                   | 68.23             | -15.84      | PK            | PASS   |
| V                          | 5150.00         | 49.06          | 5.79          | 54.85                   | 68.23             | -13.39      | PK            | PASS   |
| V                          | 5350.00         | 47.00          | 6.45          | 53.45                   | 68.23             | -14.79      | PK            | PASS   |
| H                          | 5150.00         | 36.89          | 5.79          | 42.68                   | 54.00             | -11.32      | AV            | PASS   |
| H                          | 5350.00         | 31.62          | 6.45          | 38.07                   | 54.00             | -15.94      | AV            | PASS   |
| V                          | 5150.00         | 34.80          | 5.79          | 40.59                   | 54.00             | -13.41      | AV            | PASS   |
| V                          | 5350.00         | 32.55          | 6.45          | 39.00                   | 54.00             | -15.00      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-1:**

| Test Mode: 802.11ax(HEW40) |                 |                |               |                         | CH Low: 5190 MHz |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|------------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)   | Margin (dB) | Detector Type | Result |
| H                          | 5150.00         | 49.46          | 5.79          | 55.25                   | 68.23            | -12.99      | PK            | PASS   |
| H                          | 5350.00         | 45.77          | 6.45          | 52.22                   | 68.23            | -16.01      | PK            | PASS   |
| V                          | 5150.00         | 48.43          | 5.79          | 54.22                   | 68.23            | -14.01      | PK            | PASS   |
| V                          | 5350.00         | 45.95          | 6.45          | 52.40                   | 68.23            | -15.84      | PK            | PASS   |
| H                          | 5150.00         | 35.82          | 5.79          | 41.61                   | 54.00            | -12.40      | AV            | PASS   |
| H                          | 5350.00         | 31.66          | 6.45          | 38.11                   | 54.00            | -15.89      | AV            | PASS   |
| V                          | 5150.00         | 35.39          | 5.79          | 41.18                   | 54.00            | -12.83      | AV            | PASS   |
| V                          | 5350.00         | 32.61          | 6.45          | 39.06                   | 54.00            | -14.94      | AV            | PASS   |

| Test Mode: 802.11ax(HEW40) |                 |                |               |                         | CH High: 5190 MHz |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|-------------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)    | Margin (dB) | Detector Type | Result |
| H                          | 5150.00         | 47.67          | 5.79          | 53.46                   | 68.23             | -14.78      | PK            | PASS   |
| H                          | 5350.00         | 44.21          | 6.45          | 50.66                   | 68.23             | -17.58      | PK            | PASS   |
| V                          | 5150.00         | 48.98          | 5.79          | 54.77                   | 68.23             | -13.47      | PK            | PASS   |
| V                          | 5350.00         | 46.26          | 6.45          | 52.71                   | 68.23             | -15.53      | PK            | PASS   |
| H                          | 5150.00         | 34.53          | 5.79          | 40.32                   | 54.00             | -13.69      | AV            | PASS   |
| H                          | 5350.00         | 33.79          | 6.45          | 40.24                   | 54.00             | -13.77      | AV            | PASS   |
| V                          | 5150.00         | 34.17          | 5.79          | 39.96                   | 54.00             | -14.04      | AV            | PASS   |
| V                          | 5350.00         | 33.58          | 6.45          | 40.03                   | 54.00             | -13.98      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-1:**

| Test Mode: 802.11ax(HEW80) |                 |                |               |                         | CH: 5210 MHz   |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|----------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type | Result |
| H                          | 5150.00         | 48.11          | 5.79          | 53.90                   | 68.23          | -14.34      | PK            | PASS   |
| H                          | 5350.00         | 46.67          | 6.45          | 53.12                   | 68.23          | -15.11      | PK            | PASS   |
| V                          | 5150.00         | 47.18          | 5.79          | 52.97                   | 68.23          | -15.26      | PK            | PASS   |
| V                          | 5350.00         | 44.14          | 6.45          | 50.59                   | 68.23          | -17.64      | PK            | PASS   |
| H                          | 5150.00         | 35.79          | 5.79          | 41.58                   | 54.00          | -12.42      | AV            | PASS   |
| H                          | 5350.00         | 31.27          | 6.45          | 37.72                   | 54.00          | -16.28      | AV            | PASS   |
| V                          | 5150.00         | 36.89          | 5.79          | 42.68                   | 54.00          | -11.33      | AV            | PASS   |
| V                          | 5350.00         | 33.57          | 6.45          | 40.02                   | 54.00          | -13.99      | AV            | PASS   |

| Test Mode: 802.11ax(HEW80) |                 |                |               |                         | CH: 5210 MHz   |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|----------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type | Result |
| H                          | 5150.00         | 48.07          | 5.79          | 53.86                   | 68.23          | -14.38      | PK            | PASS   |
| H                          | 5350.00         | 45.45          | 6.45          | 51.90                   | 68.23          | -16.34      | PK            | PASS   |
| V                          | 5150.00         | 47.42          | 5.79          | 53.21                   | 68.23          | -15.02      | PK            | PASS   |
| V                          | 5350.00         | 46.28          | 6.45          | 52.73                   | 68.23          | -15.51      | PK            | PASS   |
| H                          | 5150.00         | 36.75          | 5.79          | 42.54                   | 54.00          | -11.47      | AV            | PASS   |
| H                          | 5350.00         | 31.62          | 6.45          | 38.07                   | 54.00          | -15.94      | AV            | PASS   |
| V                          | 5150.00         | 34.31          | 5.79          | 40.10                   | 54.00          | -13.90      | AV            | PASS   |
| V                          | 5350.00         | 31.86          | 6.45          | 38.31                   | 54.00          | -15.69      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-3:**

| Test Mode: 802.11a |                 |                |               |                         | CH Low: 5745 MHz |             |               |        |
|--------------------|-----------------|----------------|---------------|-------------------------|------------------|-------------|---------------|--------|
| Pol.               | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)   | Margin (dB) | Detector Type | Result |
| H                  | 5650.00         | 45.58          | 7.55          | 53.13                   | 68.23            | -15.11      | PK            | PASS   |
| H                  | 5700.00         | 46.86          | 7.56          | 54.42                   | 105.23           | -50.81      | PK            | PASS   |
| H                  | 5720.00         | 50.34          | 7.59          | 57.93                   | 110.83           | -52.91      | PK            | PASS   |
| H                  | 5725.00         | 52.93          | 7.68          | 60.61                   | 122.23           | -61.63      | PK            | PASS   |
| V                  | 5650.00         | 44.71          | 7.55          | 52.26                   | 68.23            | -15.97      | PK            | PASS   |
| V                  | 5700.00         | 48.28          | 7.56          | 55.84                   | 105.23           | -49.40      | PK            | PASS   |
| V                  | 5720.00         | 47.40          | 7.59          | 54.99                   | 110.83           | -55.85      | PK            | PASS   |
| V                  | 5725.00         | 50.79          | 7.68          | 58.47                   | 122.23           | -63.76      | PK            | PASS   |
| H                  | 5650.00         | 29.55          | 7.55          | 37.10                   | 54.00            | -16.91      | AV            | PASS   |
| H                  | 5700.00         | 32.85          | 7.56          | 40.41                   | 54.00            | -13.59      | AV            | PASS   |
| H                  | 5720.00         | 34.82          | 7.59          | 42.41                   | 54.00            | -11.60      | AV            | PASS   |
| H                  | 5725.00         | 36.27          | 7.68          | 43.95                   | 54.00            | -10.06      | AV            | PASS   |
| V                  | 5650.00         | 31.94          | 7.55          | 39.49                   | 54.00            | -14.52      | AV            | PASS   |
| V                  | 5700.00         | 30.89          | 7.56          | 38.45                   | 54.00            | -15.56      | AV            | PASS   |
| V                  | 5720.00         | 34.22          | 7.59          | 41.81                   | 54.00            | -12.19      | AV            | PASS   |
| V                  | 5725.00         | 37.56          | 7.68          | 45.24                   | 54.00            | -8.76       | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-3:**

| Test Mode: 802.11a |                 |                |               |                         | CH High: 5825 MHz |             |               |        |
|--------------------|-----------------|----------------|---------------|-------------------------|-------------------|-------------|---------------|--------|
| Pol.               | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)    | Margin (dB) | Detector Type | Result |
| H                  | 5850.00         | 49.25          | 7.55          | 56.80                   | 122.23            | -65.43      | PK            | PASS   |
| H                  | 5855.00         | 47.31          | 7.56          | 54.87                   | 110.83            | -55.97      | PK            | PASS   |
| H                  | 5875.00         | 48.04          | 7.59          | 55.63                   | 105.23            | -49.61      | PK            | PASS   |
| H                  | 5925.00         | 46.09          | 7.68          | 53.77                   | 68.23             | -14.47      | PK            | PASS   |
| V                  | 5850.00         | 50.77          | 7.55          | 58.32                   | 122.23            | -63.92      | PK            | PASS   |
| V                  | 5855.00         | 50.93          | 7.56          | 58.49                   | 110.83            | -52.35      | PK            | PASS   |
| V                  | 5875.00         | 46.62          | 7.59          | 54.21                   | 105.23            | -51.03      | PK            | PASS   |
| V                  | 5925.00         | 45.48          | 7.68          | 53.16                   | 68.23             | -15.08      | PK            | PASS   |
| H                  | 5850.00         | 34.57          | 7.55          | 42.12                   | 54.00             | -11.88      | AV            | PASS   |
| H                  | 5855.00         | 34.91          | 7.56          | 42.47                   | 54.00             | -11.53      | AV            | PASS   |
| H                  | 5875.00         | 32.46          | 7.59          | 40.05                   | 54.00             | -13.95      | AV            | PASS   |
| H                  | 5925.00         | 29.02          | 7.68          | 36.70                   | 54.00             | -17.30      | AV            | PASS   |
| V                  | 5850.00         | 35.17          | 7.55          | 42.72                   | 54.00             | -11.28      | AV            | PASS   |
| V                  | 5855.00         | 34.79          | 7.56          | 42.35                   | 54.00             | -11.66      | AV            | PASS   |
| V                  | 5875.00         | 33.44          | 7.59          | 41.03                   | 54.00             | -12.97      | AV            | PASS   |
| V                  | 5925.00         | 28.44          | 7.68          | 36.12                   | 54.00             | -17.89      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-3:**

| Test Mode: 802.11n(HT20) |                 |                |               |                         | CH Low: 5745 MHz |             |               |        |
|--------------------------|-----------------|----------------|---------------|-------------------------|------------------|-------------|---------------|--------|
| Pol.                     | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)   | Margin (dB) | Detector Type | Result |
| H                        | 5650.00         | 43.27          | 7.55          | 50.82                   | 68.23            | -17.41      | PK            | PASS   |
| H                        | 5700.00         | 46.68          | 7.56          | 54.24                   | 105.23           | -50.99      | PK            | PASS   |
| H                        | 5720.00         | 47.17          | 7.59          | 54.76                   | 110.83           | -56.08      | PK            | PASS   |
| H                        | 5725.00         | 50.53          | 7.68          | 58.21                   | 122.23           | -64.02      | PK            | PASS   |
| V                        | 5650.00         | 45.95          | 7.55          | 53.50                   | 68.23            | -14.73      | PK            | PASS   |
| V                        | 5700.00         | 47.77          | 7.56          | 55.33                   | 105.23           | -49.90      | PK            | PASS   |
| V                        | 5720.00         | 50.05          | 7.59          | 57.64                   | 110.83           | -53.20      | PK            | PASS   |
| V                        | 5725.00         | 50.38          | 7.68          | 58.06                   | 122.23           | -64.17      | PK            | PASS   |
| H                        | 5650.00         | 29.42          | 7.55          | 36.97                   | 54.00            | -17.03      | AV            | PASS   |
| H                        | 5700.00         | 30.18          | 7.56          | 37.74                   | 54.00            | -16.27      | AV            | PASS   |
| H                        | 5720.00         | 35.77          | 7.59          | 43.36                   | 54.00            | -10.65      | AV            | PASS   |
| H                        | 5725.00         | 37.50          | 7.68          | 45.18                   | 54.00            | -8.83       | AV            | PASS   |
| V                        | 5650.00         | 31.50          | 7.55          | 39.05                   | 54.00            | -14.95      | AV            | PASS   |
| V                        | 5700.00         | 31.96          | 7.56          | 39.52                   | 54.00            | -14.48      | AV            | PASS   |
| V                        | 5720.00         | 34.33          | 7.59          | 41.92                   | 54.00            | -12.08      | AV            | PASS   |
| V                        | 5725.00         | 37.90          | 7.68          | 45.58                   | 54.00            | -8.42       | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-3:**

| Test Mode: 802.11n(HT20) |                 |                |               |                         | CH High: 5825 MHz |             |               |        |
|--------------------------|-----------------|----------------|---------------|-------------------------|-------------------|-------------|---------------|--------|
| Pol.                     | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)    | Margin (dB) | Detector Type | Result |
| H                        | 5850.00         | 52.23          | 7.55          | 59.78                   | 122.23            | -62.46      | PK            | PASS   |
| H                        | 5855.00         | 50.94          | 7.56          | 58.50                   | 110.83            | -52.33      | PK            | PASS   |
| H                        | 5875.00         | 45.44          | 7.59          | 53.03                   | 105.23            | -52.20      | PK            | PASS   |
| H                        | 5925.00         | 43.67          | 7.68          | 51.35                   | 68.23             | -16.89      | PK            | PASS   |
| V                        | 5850.00         | 51.84          | 7.55          | 59.39                   | 122.23            | -62.84      | PK            | PASS   |
| V                        | 5855.00         | 48.25          | 7.56          | 55.81                   | 110.83            | -55.02      | PK            | PASS   |
| V                        | 5875.00         | 45.13          | 7.59          | 52.72                   | 105.23            | -52.51      | PK            | PASS   |
| V                        | 5925.00         | 46.30          | 7.68          | 53.98                   | 68.23             | -14.25      | PK            | PASS   |
| H                        | 5850.00         | 34.71          | 7.55          | 42.26                   | 54.00             | -11.75      | AV            | PASS   |
| H                        | 5855.00         | 35.17          | 7.56          | 42.73                   | 54.00             | -11.27      | AV            | PASS   |
| H                        | 5875.00         | 32.63          | 7.59          | 40.22                   | 54.00             | -13.78      | AV            | PASS   |
| H                        | 5925.00         | 28.12          | 7.68          | 35.80                   | 54.00             | -18.21      | AV            | PASS   |
| V                        | 5850.00         | 35.77          | 7.55          | 43.32                   | 54.00             | -10.69      | AV            | PASS   |
| V                        | 5855.00         | 33.73          | 7.56          | 41.29                   | 54.00             | -12.71      | AV            | PASS   |
| V                        | 5875.00         | 32.15          | 7.59          | 39.74                   | 54.00             | -14.27      | AV            | PASS   |
| V                        | 5925.00         | 30.96          | 7.68          | 38.64                   | 54.00             | -15.36      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-3:**

| Test Mode: 802.11n(HT40) |                 |                |               |                         | CH Low: 5755 MHz |             |               |        |
|--------------------------|-----------------|----------------|---------------|-------------------------|------------------|-------------|---------------|--------|
| Pol.                     | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)   | Margin (dB) | Detector Type | Result |
| H                        | 5650.00         | 43.05          | 7.55          | 50.60                   | 68.23            | -17.64      | PK            | PASS   |
| H                        | 5700.00         | 47.32          | 7.56          | 54.88                   | 105.23           | -50.35      | PK            | PASS   |
| H                        | 5720.00         | 47.65          | 7.59          | 55.24                   | 110.83           | -55.59      | PK            | PASS   |
| H                        | 5725.00         | 49.01          | 7.68          | 56.69                   | 122.23           | -65.54      | PK            | PASS   |
| V                        | 5650.00         | 46.91          | 7.55          | 54.46                   | 68.23            | -13.78      | PK            | PASS   |
| V                        | 5700.00         | 45.56          | 7.56          | 53.12                   | 105.23           | -52.11      | PK            | PASS   |
| V                        | 5720.00         | 47.33          | 7.59          | 54.92                   | 110.83           | -55.92      | PK            | PASS   |
| V                        | 5725.00         | 52.66          | 7.68          | 60.34                   | 122.23           | -61.90      | PK            | PASS   |
| H                        | 5650.00         | 30.03          | 7.55          | 37.58                   | 54.00            | -16.42      | AV            | PASS   |
| H                        | 5700.00         | 32.07          | 7.56          | 39.63                   | 54.00            | -14.37      | AV            | PASS   |
| H                        | 5720.00         | 32.08          | 7.59          | 39.67                   | 54.00            | -14.33      | AV            | PASS   |
| H                        | 5725.00         | 34.96          | 7.68          | 42.64                   | 54.00            | -11.36      | AV            | PASS   |
| V                        | 5650.00         | 29.92          | 7.55          | 37.47                   | 54.00            | -16.53      | AV            | PASS   |
| V                        | 5700.00         | 31.71          | 7.56          | 39.27                   | 54.00            | -14.74      | AV            | PASS   |
| V                        | 5720.00         | 32.59          | 7.59          | 40.18                   | 54.00            | -13.83      | AV            | PASS   |
| V                        | 5725.00         | 36.27          | 7.68          | 43.95                   | 54.00            | -10.05      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-3:**

| Test Mode: 802.11n(HT40) |                 |                |               |                         | CH High: 5795 MHz |             |               |        |
|--------------------------|-----------------|----------------|---------------|-------------------------|-------------------|-------------|---------------|--------|
| Pol.                     | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)    | Margin (dB) | Detector Type | Result |
| H                        | 5850.00         | 50.06          | 7.55          | 57.61                   | 122.23            | -64.63      | PK            | PASS   |
| H                        | 5855.00         | 49.93          | 7.56          | 57.49                   | 110.83            | -53.35      | PK            | PASS   |
| H                        | 5875.00         | 47.52          | 7.59          | 55.11                   | 105.23            | -50.12      | PK            | PASS   |
| H                        | 5925.00         | 44.62          | 7.68          | 52.30                   | 68.23             | -15.94      | PK            | PASS   |
| V                        | 5850.00         | 51.23          | 7.55          | 58.78                   | 122.23            | -63.45      | PK            | PASS   |
| V                        | 5855.00         | 48.65          | 7.56          | 56.21                   | 110.83            | -54.63      | PK            | PASS   |
| V                        | 5875.00         | 45.43          | 7.59          | 53.02                   | 105.23            | -52.22      | PK            | PASS   |
| V                        | 5925.00         | 45.35          | 7.68          | 53.03                   | 68.23             | -15.20      | PK            | PASS   |
| H                        | 5850.00         | 34.45          | 7.55          | 42.00                   | 54.00             | -12.00      | AV            | PASS   |
| H                        | 5855.00         | 34.49          | 7.56          | 42.05                   | 54.00             | -11.96      | AV            | PASS   |
| H                        | 5875.00         | 32.56          | 7.59          | 40.15                   | 54.00             | -13.86      | AV            | PASS   |
| H                        | 5925.00         | 29.04          | 7.68          | 36.72                   | 54.00             | -17.29      | AV            | PASS   |
| V                        | 5850.00         | 37.23          | 7.55          | 44.78                   | 54.00             | -9.23       | AV            | PASS   |
| V                        | 5855.00         | 35.41          | 7.56          | 42.97                   | 54.00             | -11.04      | AV            | PASS   |
| V                        | 5875.00         | 31.43          | 7.59          | 39.02                   | 54.00             | -14.98      | AV            | PASS   |
| V                        | 5925.00         | 30.93          | 7.68          | 38.61                   | 54.00             | -15.40      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-3:**

| Test Mode: 802.11ac(VHT20) |                 |                |               |                         | CH Low: 5745 MHz |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|------------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)   | Margin (dB) | Detector Type | Result |
| H                          | 5650.00         | 45.58          | 7.55          | 53.13                   | 68.23            | -15.11      | PK            | PASS   |
| H                          | 5700.00         | 45.80          | 7.56          | 53.36                   | 105.23           | -51.87      | PK            | PASS   |
| H                          | 5720.00         | 48.96          | 7.59          | 56.55                   | 110.83           | -54.28      | PK            | PASS   |
| H                          | 5725.00         | 51.52          | 7.68          | 59.20                   | 122.23           | -63.04      | PK            | PASS   |
| V                          | 5650.00         | 43.61          | 7.55          | 51.16                   | 68.23            | -17.08      | PK            | PASS   |
| V                          | 5700.00         | 48.62          | 7.56          | 56.18                   | 105.23           | -49.06      | PK            | PASS   |
| V                          | 5720.00         | 50.03          | 7.59          | 57.62                   | 110.83           | -53.22      | PK            | PASS   |
| V                          | 5725.00         | 51.57          | 7.68          | 59.25                   | 122.23           | -62.99      | PK            | PASS   |
| H                          | 5650.00         | 31.37          | 7.55          | 38.92                   | 54.00            | -15.08      | AV            | PASS   |
| H                          | 5700.00         | 30.05          | 7.56          | 37.61                   | 54.00            | -16.39      | AV            | PASS   |
| H                          | 5720.00         | 33.87          | 7.59          | 41.46                   | 54.00            | -12.54      | AV            | PASS   |
| H                          | 5725.00         | 36.66          | 7.68          | 44.34                   | 54.00            | -9.66       | AV            | PASS   |
| V                          | 5650.00         | 28.58          | 7.55          | 36.13                   | 54.00            | -17.87      | AV            | PASS   |
| V                          | 5700.00         | 32.85          | 7.56          | 40.41                   | 54.00            | -13.60      | AV            | PASS   |
| V                          | 5720.00         | 33.30          | 7.59          | 40.89                   | 54.00            | -13.12      | AV            | PASS   |
| V                          | 5725.00         | 37.81          | 7.68          | 45.49                   | 54.00            | -8.52       | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-3:**

| Test Mode: 802.11ac(VHT20) |                 |                |               |                         | CH High: 5825 MHz |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|-------------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)    | Margin (dB) | Detector Type | Result |
| H                          | 5850.00         | 52.81          | 7.55          | 60.36                   | 122.23            | -61.88      | PK            | PASS   |
| H                          | 5855.00         | 49.01          | 7.56          | 56.57                   | 110.83            | -54.26      | PK            | PASS   |
| H                          | 5875.00         | 45.24          | 7.59          | 52.83                   | 105.23            | -52.41      | PK            | PASS   |
| H                          | 5925.00         | 45.07          | 7.68          | 52.75                   | 68.23             | -15.49      | PK            | PASS   |
| V                          | 5850.00         | 50.20          | 7.55          | 57.75                   | 122.23            | -64.49      | PK            | PASS   |
| V                          | 5855.00         | 50.18          | 7.56          | 57.74                   | 110.83            | -53.10      | PK            | PASS   |
| V                          | 5875.00         | 45.54          | 7.59          | 53.13                   | 105.23            | -52.11      | PK            | PASS   |
| V                          | 5925.00         | 44.13          | 7.68          | 51.81                   | 68.23             | -16.43      | PK            | PASS   |
| H                          | 5850.00         | 36.46          | 7.55          | 44.01                   | 54.00             | -9.99       | AV            | PASS   |
| H                          | 5855.00         | 33.84          | 7.56          | 41.40                   | 54.00             | -12.61      | AV            | PASS   |
| H                          | 5875.00         | 33.54          | 7.59          | 41.13                   | 54.00             | -12.87      | AV            | PASS   |
| H                          | 5925.00         | 31.12          | 7.68          | 38.80                   | 54.00             | -15.20      | AV            | PASS   |
| V                          | 5850.00         | 34.92          | 7.55          | 42.47                   | 54.00             | -11.54      | AV            | PASS   |
| V                          | 5855.00         | 32.39          | 7.56          | 39.95                   | 54.00             | -14.06      | AV            | PASS   |
| V                          | 5875.00         | 30.15          | 7.59          | 37.74                   | 54.00             | -16.27      | AV            | PASS   |
| V                          | 5925.00         | 30.57          | 7.68          | 38.25                   | 54.00             | -15.75      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-3:**

| Test Mode: 802.11ac(VHT40) |                 |                |               |                         | CH Low: 5755 MHz |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|------------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)   | Margin (dB) | Detector Type | Result |
| H                          | 5650.00         | 44.14          | 7.55          | 51.69                   | 68.23            | -16.55      | PK            | PASS   |
| H                          | 5700.00         | 48.06          | 7.56          | 55.62                   | 105.23           | -49.62      | PK            | PASS   |
| H                          | 5720.00         | 47.74          | 7.59          | 55.33                   | 110.83           | -55.50      | PK            | PASS   |
| H                          | 5725.00         | 49.30          | 7.68          | 56.98                   | 122.23           | -65.25      | PK            | PASS   |
| V                          | 5650.00         | 45.76          | 7.55          | 53.31                   | 68.23            | -14.92      | PK            | PASS   |
| V                          | 5700.00         | 48.44          | 7.56          | 56.00                   | 105.23           | -49.23      | PK            | PASS   |
| V                          | 5720.00         | 50.36          | 7.59          | 57.95                   | 110.83           | -52.88      | PK            | PASS   |
| V                          | 5725.00         | 52.48          | 7.68          | 60.16                   | 122.23           | -62.07      | PK            | PASS   |
| H                          | 5650.00         | 31.67          | 7.55          | 39.22                   | 54.00            | -14.79      | AV            | PASS   |
| H                          | 5700.00         | 33.31          | 7.56          | 40.87                   | 54.00            | -13.14      | AV            | PASS   |
| H                          | 5720.00         | 35.81          | 7.59          | 43.40                   | 54.00            | -10.60      | AV            | PASS   |
| H                          | 5725.00         | 37.16          | 7.68          | 44.84                   | 54.00            | -9.17       | AV            | PASS   |
| V                          | 5650.00         | 29.87          | 7.55          | 37.42                   | 54.00            | -16.58      | AV            | PASS   |
| V                          | 5700.00         | 30.14          | 7.56          | 37.70                   | 54.00            | -16.31      | AV            | PASS   |
| V                          | 5720.00         | 35.39          | 7.59          | 42.98                   | 54.00            | -11.03      | AV            | PASS   |
| V                          | 5725.00         | 36.52          | 7.68          | 44.20                   | 54.00            | -9.80       | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-3:**

| Test Mode: 802.11ac(VHT40) |                 |                |               |                         | CH High: 5795 MHz |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|-------------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)    | Margin (dB) | Detector Type | Result |
| H                          | 5850.00         | 50.78          | 7.55          | 58.33                   | 122.23            | -63.90      | PK            | PASS   |
| H                          | 5855.00         | 47.92          | 7.56          | 55.48                   | 110.83            | -55.35      | PK            | PASS   |
| H                          | 5875.00         | 46.33          | 7.59          | 53.92                   | 105.23            | -51.31      | PK            | PASS   |
| H                          | 5925.00         | 44.97          | 7.68          | 52.65                   | 68.23             | -15.59      | PK            | PASS   |
| V                          | 5850.00         | 50.04          | 7.55          | 57.59                   | 122.23            | -64.65      | PK            | PASS   |
| V                          | 5855.00         | 48.43          | 7.56          | 55.99                   | 110.83            | -54.85      | PK            | PASS   |
| V                          | 5875.00         | 46.78          | 7.59          | 54.37                   | 105.23            | -50.87      | PK            | PASS   |
| V                          | 5925.00         | 44.38          | 7.68          | 52.06                   | 68.23             | -16.17      | PK            | PASS   |
| H                          | 5850.00         | 35.70          | 7.55          | 43.25                   | 54.00             | -10.75      | AV            | PASS   |
| H                          | 5855.00         | 32.33          | 7.56          | 39.89                   | 54.00             | -14.12      | AV            | PASS   |
| H                          | 5875.00         | 31.74          | 7.59          | 39.33                   | 54.00             | -14.68      | AV            | PASS   |
| H                          | 5925.00         | 31.49          | 7.68          | 39.17                   | 54.00             | -14.84      | AV            | PASS   |
| V                          | 5850.00         | 37.53          | 7.55          | 45.08                   | 54.00             | -8.92       | AV            | PASS   |
| V                          | 5855.00         | 34.72          | 7.56          | 42.28                   | 54.00             | -11.73      | AV            | PASS   |
| V                          | 5875.00         | 33.92          | 7.59          | 41.51                   | 54.00             | -12.49      | AV            | PASS   |
| V                          | 5925.00         | 29.51          | 7.68          | 37.19                   | 54.00             | -16.81      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-3:**

| Test Mode: 802.11ac(VHT80) |                 |                |               |                         | CH: 5775 MHz   |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|----------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type | Result |
| H                          | 5650.00         | 45.09          | 7.55          | 52.64                   | 68.23          | -15.59      | PK            | PASS   |
| H                          | 5700.00         | 46.23          | 7.56          | 53.79                   | 105.23         | -51.44      | PK            | PASS   |
| H                          | 5720.00         | 49.47          | 7.59          | 57.06                   | 110.83         | -53.78      | PK            | PASS   |
| H                          | 5725.00         | 52.11          | 7.68          | 59.79                   | 122.23         | -62.44      | PK            | PASS   |
| V                          | 5650.00         | 45.28          | 7.55          | 52.83                   | 68.23          | -15.41      | PK            | PASS   |
| V                          | 5700.00         | 48.04          | 7.56          | 55.60                   | 105.23         | -49.64      | PK            | PASS   |
| V                          | 5720.00         | 50.66          | 7.59          | 58.25                   | 110.83         | -52.59      | PK            | PASS   |
| V                          | 5725.00         | 49.84          | 7.68          | 57.52                   | 122.23         | -64.72      | PK            | PASS   |
| H                          | 5650.00         | 29.57          | 7.55          | 37.12                   | 54.00          | -16.88      | AV            | PASS   |
| H                          | 5700.00         | 31.42          | 7.56          | 38.98                   | 54.00          | -15.03      | AV            | PASS   |
| H                          | 5720.00         | 35.28          | 7.59          | 42.87                   | 54.00          | -11.13      | AV            | PASS   |
| H                          | 5725.00         | 35.33          | 7.68          | 43.01                   | 54.00          | -11.00      | AV            | PASS   |
| V                          | 5650.00         | 31.91          | 7.55          | 39.46                   | 54.00          | -14.54      | AV            | PASS   |
| V                          | 5700.00         | 31.12          | 7.56          | 38.68                   | 54.00          | -15.32      | AV            | PASS   |
| V                          | 5720.00         | 33.33          | 7.59          | 40.92                   | 54.00          | -13.08      | AV            | PASS   |
| V                          | 5725.00         | 36.96          | 7.68          | 44.64                   | 54.00          | -9.37       | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-3:**

| Test Mode: 802.11ac(VHT80) |                 |                |               |                         | CH: 5775 MHz   |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|----------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type | Result |
| H                          | 5850.00         | 52.06          | 7.55          | 59.61                   | 122.23         | -62.63      | PK            | PASS   |
| H                          | 5855.00         | 48.33          | 7.56          | 55.89                   | 110.83         | -54.94      | PK            | PASS   |
| H                          | 5875.00         | 48.94          | 7.59          | 56.53                   | 105.23         | -48.70      | PK            | PASS   |
| H                          | 5925.00         | 45.49          | 7.68          | 53.17                   | 68.23          | -15.06      | PK            | PASS   |
| V                          | 5850.00         | 49.53          | 7.55          | 57.08                   | 122.23         | -65.15      | PK            | PASS   |
| V                          | 5855.00         | 50.65          | 7.56          | 58.21                   | 110.83         | -52.62      | PK            | PASS   |
| V                          | 5875.00         | 46.79          | 7.59          | 54.38                   | 105.23         | -50.85      | PK            | PASS   |
| V                          | 5925.00         | 45.18          | 7.68          | 52.86                   | 68.23          | -15.38      | PK            | PASS   |
| H                          | 5850.00         | 36.99          | 7.55          | 44.54                   | 54.00          | -9.46       | AV            | PASS   |
| H                          | 5855.00         | 35.32          | 7.56          | 42.88                   | 54.00          | -11.13      | AV            | PASS   |
| H                          | 5875.00         | 32.35          | 7.59          | 39.94                   | 54.00          | -14.07      | AV            | PASS   |
| H                          | 5925.00         | 29.23          | 7.68          | 36.91                   | 54.00          | -17.10      | AV            | PASS   |
| V                          | 5850.00         | 34.24          | 7.55          | 41.79                   | 54.00          | -12.22      | AV            | PASS   |
| V                          | 5855.00         | 33.18          | 7.56          | 40.74                   | 54.00          | -13.27      | AV            | PASS   |
| V                          | 5875.00         | 33.79          | 7.59          | 41.38                   | 54.00          | -12.62      | AV            | PASS   |
| V                          | 5925.00         | 28.88          | 7.68          | 36.56                   | 54.00          | -17.44      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-3:**

| Test Mode: 802.11ax(HEW20) |                 |                |               |                         | CH Low: 5745 MHz |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|------------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)   | Margin (dB) | Detector Type | Result |
| H                          | 5650.00         | 44.04          | 7.55          | 51.59                   | 68.23            | -16.65      | PK            | PASS   |
| H                          | 5700.00         | 47.83          | 7.56          | 55.39                   | 105.23           | -49.85      | PK            | PASS   |
| H                          | 5720.00         | 47.33          | 7.59          | 54.92                   | 110.83           | -55.92      | PK            | PASS   |
| H                          | 5725.00         | 50.27          | 7.68          | 57.95                   | 122.23           | -64.28      | PK            | PASS   |
| V                          | 5650.00         | 44.42          | 7.55          | 51.97                   | 68.23            | -16.26      | PK            | PASS   |
| V                          | 5700.00         | 48.89          | 7.56          | 56.45                   | 105.23           | -48.79      | PK            | PASS   |
| V                          | 5720.00         | 50.71          | 7.59          | 58.30                   | 110.83           | -52.53      | PK            | PASS   |
| V                          | 5725.00         | 51.33          | 7.68          | 59.01                   | 122.23           | -63.23      | PK            | PASS   |
| H                          | 5650.00         | 29.93          | 7.55          | 37.48                   | 54.00            | -16.52      | AV            | PASS   |
| H                          | 5700.00         | 33.32          | 7.56          | 40.88                   | 54.00            | -13.12      | AV            | PASS   |
| H                          | 5720.00         | 32.45          | 7.59          | 40.04                   | 54.00            | -13.97      | AV            | PASS   |
| H                          | 5725.00         | 34.19          | 7.68          | 41.87                   | 54.00            | -12.13      | AV            | PASS   |
| V                          | 5650.00         | 29.03          | 7.55          | 36.58                   | 54.00            | -17.42      | AV            | PASS   |
| V                          | 5700.00         | 32.41          | 7.56          | 39.97                   | 54.00            | -14.03      | AV            | PASS   |
| V                          | 5720.00         | 34.72          | 7.59          | 42.31                   | 54.00            | -11.70      | AV            | PASS   |
| V                          | 5725.00         | 34.78          | 7.68          | 42.46                   | 54.00            | -11.54      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-3:**

| Test Mode: 802.11ax(HEW20) |                 |                |               |                         | CH High: 5825 MHz |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|-------------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)    | Margin (dB) | Detector Type | Result |
| H                          | 5850.00         | 50.11          | 7.55          | 57.66                   | 122.23            | -64.57      | PK            | PASS   |
| H                          | 5855.00         | 49.80          | 7.56          | 57.36                   | 110.83            | -53.48      | PK            | PASS   |
| H                          | 5875.00         | 46.10          | 7.59          | 53.69                   | 105.23            | -51.55      | PK            | PASS   |
| H                          | 5925.00         | 43.52          | 7.68          | 51.20                   | 68.23             | -17.04      | PK            | PASS   |
| V                          | 5850.00         | 52.23          | 7.55          | 59.78                   | 122.23            | -62.46      | PK            | PASS   |
| V                          | 5855.00         | 50.74          | 7.56          | 58.30                   | 110.83            | -52.53      | PK            | PASS   |
| V                          | 5875.00         | 46.83          | 7.59          | 54.42                   | 105.23            | -50.81      | PK            | PASS   |
| V                          | 5925.00         | 46.79          | 7.68          | 54.47                   | 68.23             | -13.77      | PK            | PASS   |
| H                          | 5850.00         | 37.78          | 7.55          | 45.33                   | 54.00             | -8.67       | AV            | PASS   |
| H                          | 5855.00         | 32.69          | 7.56          | 40.25                   | 54.00             | -13.75      | AV            | PASS   |
| H                          | 5875.00         | 30.80          | 7.59          | 38.39                   | 54.00             | -15.61      | AV            | PASS   |
| H                          | 5925.00         | 28.50          | 7.68          | 36.18                   | 54.00             | -17.83      | AV            | PASS   |
| V                          | 5850.00         | 37.05          | 7.55          | 44.60                   | 54.00             | -9.41       | AV            | PASS   |
| V                          | 5855.00         | 34.43          | 7.56          | 41.99                   | 54.00             | -12.01      | AV            | PASS   |
| V                          | 5875.00         | 33.30          | 7.59          | 40.89                   | 54.00             | -13.11      | AV            | PASS   |
| V                          | 5925.00         | 28.16          | 7.68          | 35.84                   | 54.00             | -18.17      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-3:**

| Test Mode: 802.11ax(HEW40) |                 |                |               |                         | CH Low: 5755 MHz |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|------------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)   | Margin (dB) | Detector Type | Result |
| H                          | 5650.00         | 45.35          | 7.55          | 52.90                   | 68.23            | -15.34      | PK            | PASS   |
| H                          | 5700.00         | 45.54          | 7.56          | 53.10                   | 105.23           | -52.13      | PK            | PASS   |
| H                          | 5720.00         | 47.23          | 7.59          | 54.82                   | 110.83           | -56.01      | PK            | PASS   |
| H                          | 5725.00         | 50.72          | 7.68          | 58.40                   | 122.23           | -63.84      | PK            | PASS   |
| V                          | 5650.00         | 43.98          | 7.55          | 51.53                   | 68.23            | -16.71      | PK            | PASS   |
| V                          | 5700.00         | 48.67          | 7.56          | 56.23                   | 105.23           | -49.01      | PK            | PASS   |
| V                          | 5720.00         | 49.59          | 7.59          | 57.18                   | 110.83           | -53.66      | PK            | PASS   |
| V                          | 5725.00         | 49.51          | 7.68          | 57.19                   | 122.23           | -65.05      | PK            | PASS   |
| H                          | 5650.00         | 28.29          | 7.55          | 35.84                   | 54.00            | -18.17      | AV            | PASS   |
| H                          | 5700.00         | 31.59          | 7.56          | 39.15                   | 54.00            | -14.86      | AV            | PASS   |
| H                          | 5720.00         | 34.79          | 7.59          | 42.38                   | 54.00            | -11.62      | AV            | PASS   |
| H                          | 5725.00         | 37.77          | 7.68          | 45.45                   | 54.00            | -8.55       | AV            | PASS   |
| V                          | 5650.00         | 31.38          | 7.55          | 38.93                   | 54.00            | -15.07      | AV            | PASS   |
| V                          | 5700.00         | 33.34          | 7.56          | 40.90                   | 54.00            | -13.11      | AV            | PASS   |
| V                          | 5720.00         | 34.40          | 7.59          | 41.99                   | 54.00            | -12.02      | AV            | PASS   |
| V                          | 5725.00         | 37.92          | 7.68          | 45.60                   | 54.00            | -8.40       | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-3:**

| Test Mode: 802.11ax(HEW40) |                 |                |               |                         | CH High: 5795 MHz |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|-------------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)    | Margin (dB) | Detector Type | Result |
| H                          | 5850.00         | 50.83          | 7.55          | 58.38                   | 122.23            | -63.85      | PK            | PASS   |
| H                          | 5855.00         | 49.16          | 7.56          | 56.72                   | 110.83            | -54.12      | PK            | PASS   |
| H                          | 5875.00         | 48.08          | 7.59          | 55.67                   | 105.23            | -49.56      | PK            | PASS   |
| H                          | 5925.00         | 44.35          | 7.68          | 52.03                   | 68.23             | -16.21      | PK            | PASS   |
| V                          | 5850.00         | 50.33          | 7.55          | 57.88                   | 122.23            | -64.36      | PK            | PASS   |
| V                          | 5855.00         | 48.24          | 7.56          | 55.80                   | 110.83            | -55.04      | PK            | PASS   |
| V                          | 5875.00         | 46.66          | 7.59          | 54.25                   | 105.23            | -50.98      | PK            | PASS   |
| V                          | 5925.00         | 46.33          | 7.68          | 54.01                   | 68.23             | -14.23      | PK            | PASS   |
| H                          | 5850.00         | 36.11          | 7.55          | 43.66                   | 54.00             | -10.35      | AV            | PASS   |
| H                          | 5855.00         | 35.97          | 7.56          | 43.53                   | 54.00             | -10.47      | AV            | PASS   |
| H                          | 5875.00         | 33.78          | 7.59          | 41.37                   | 54.00             | -12.64      | AV            | PASS   |
| H                          | 5925.00         | 29.84          | 7.68          | 37.52                   | 54.00             | -16.48      | AV            | PASS   |
| V                          | 5850.00         | 36.53          | 7.55          | 44.08                   | 54.00             | -9.92       | AV            | PASS   |
| V                          | 5855.00         | 33.21          | 7.56          | 40.77                   | 54.00             | -13.23      | AV            | PASS   |
| V                          | 5875.00         | 33.97          | 7.59          | 41.56                   | 54.00             | -12.45      | AV            | PASS   |
| V                          | 5925.00         | 31.84          | 7.68          | 39.52                   | 54.00             | -14.48      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-3:**

| Test Mode: 802.11ax(HEW80) |                 |                |               |                         | CH: 5775 MHz   |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|----------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type | Result |
| H                          | 5650.00         | 44.29          | 7.55          | 51.84                   | 68.23          | -16.39      | PK            | PASS   |
| H                          | 5700.00         | 48.90          | 7.56          | 56.46                   | 105.23         | -48.78      | PK            | PASS   |
| H                          | 5720.00         | 47.90          | 7.59          | 55.49                   | 110.83         | -55.34      | PK            | PASS   |
| H                          | 5725.00         | 50.13          | 7.68          | 57.81                   | 122.23         | -64.42      | PK            | PASS   |
| V                          | 5650.00         | 45.56          | 7.55          | 53.11                   | 68.23          | -15.13      | PK            | PASS   |
| V                          | 5700.00         | 47.18          | 7.56          | 54.74                   | 105.23         | -50.49      | PK            | PASS   |
| V                          | 5720.00         | 49.09          | 7.59          | 56.68                   | 110.83         | -54.15      | PK            | PASS   |
| V                          | 5725.00         | 49.76          | 7.68          | 57.44                   | 122.23         | -64.80      | PK            | PASS   |
| H                          | 5650.00         | 31.88          | 7.55          | 39.43                   | 54.00          | -14.57      | AV            | PASS   |
| H                          | 5700.00         | 31.26          | 7.56          | 38.82                   | 54.00          | -15.18      | AV            | PASS   |
| H                          | 5720.00         | 33.68          | 7.59          | 41.27                   | 54.00          | -12.74      | AV            | PASS   |
| H                          | 5725.00         | 37.26          | 7.68          | 44.94                   | 54.00          | -9.06       | AV            | PASS   |
| V                          | 5650.00         | 31.42          | 7.55          | 38.97                   | 54.00          | -15.03      | AV            | PASS   |
| V                          | 5700.00         | 32.19          | 7.56          | 39.75                   | 54.00          | -14.25      | AV            | PASS   |
| V                          | 5720.00         | 32.97          | 7.59          | 40.56                   | 54.00          | -13.45      | AV            | PASS   |
| V                          | 5725.00         | 35.03          | 7.68          | 42.71                   | 54.00          | -11.30      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

**Band Edge Emissions Test Data:**
**U-NII-3:**

| Test Mode: 802.11ax(HEW80) |                 |                |               |                         | CH: 5775 MHz   |             |               |        |
|----------------------------|-----------------|----------------|---------------|-------------------------|----------------|-------------|---------------|--------|
| Pol.                       | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type | Result |
| H                          | 5850.00         | 49.35          | 7.55          | 56.90                   | 122.23         | -65.34      | PK            | PASS   |
| H                          | 5855.00         | 48.33          | 7.56          | 55.89                   | 110.83         | -54.95      | PK            | PASS   |
| H                          | 5875.00         | 45.76          | 7.59          | 53.35                   | 105.23         | -51.88      | PK            | PASS   |
| H                          | 5925.00         | 43.96          | 7.68          | 51.64                   | 68.23          | -16.59      | PK            | PASS   |
| V                          | 5850.00         | 52.64          | 7.55          | 60.19                   | 122.23         | -62.05      | PK            | PASS   |
| V                          | 5855.00         | 49.18          | 7.56          | 56.74                   | 110.83         | -54.09      | PK            | PASS   |
| V                          | 5875.00         | 45.49          | 7.59          | 53.08                   | 105.23         | -52.15      | PK            | PASS   |
| V                          | 5925.00         | 43.65          | 7.68          | 51.33                   | 68.23          | -16.90      | PK            | PASS   |
| H                          | 5850.00         | 36.69          | 7.55          | 44.24                   | 54.00          | -9.77       | AV            | PASS   |
| H                          | 5855.00         | 32.84          | 7.56          | 40.40                   | 54.00          | -13.61      | AV            | PASS   |
| H                          | 5875.00         | 31.47          | 7.59          | 39.06                   | 54.00          | -14.95      | AV            | PASS   |
| H                          | 5925.00         | 29.03          | 7.68          | 36.71                   | 54.00          | -17.30      | AV            | PASS   |
| V                          | 5850.00         | 37.07          | 7.55          | 44.62                   | 54.00          | -9.38       | AV            | PASS   |
| V                          | 5855.00         | 33.49          | 7.56          | 41.05                   | 54.00          | -12.95      | AV            | PASS   |
| V                          | 5875.00         | 30.16          | 7.59          | 37.75                   | 54.00          | -16.26      | AV            | PASS   |
| V                          | 5925.00         | 31.41          | 7.68          | 39.09                   | 54.00          | -14.92      | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.

## 5.7 Undesirable Emissions

### 5.7.1 Test Requirement

Test Requirement

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating solely in the 5.725-5.850 GHz band:

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

| MHz               | MHz                 | MHz           | GHz              |
|-------------------|---------------------|---------------|------------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15         |
| 0.495-0.505       | 16.69475-16.69525   | 608-614       | 5.35-5.46        |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75        |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5        |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2          |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5          |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7        |
| 6.26775-6.26825   | 108-121.94          | 1718.8-1722.2 | 13.25-13.4       |
| 6.31175-6.31225   | 123-138             | 2200-2300     | 14.47-14.5       |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2       |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4        |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12      |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0        |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8        |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5       |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | ( <sup>2</sup> ) |
| 13.36-13.41       |                     |               |                  |

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35 apply to these measurements.

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490     | 2400/F(kHz)                       | 300                           |
| 0.490-1.705     | 24000/F(kHz)                      | 30                            |
| 1.705-30.0      | 30                                | 30                            |
| 30-88           | 100 **                            | 3                             |
| 88-216          | 150 **                            | 3                             |
| 216-960         | 200 **                            | 3                             |
| Above 960       | 500                               | 3                             |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             | <p>radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p> <p>Note:</p> <ol style="list-style-type: none"> <li>1) Field Strength (dBμV/m) = 20*log[Field Strength (μV/m)].</li> <li>2) In the emission tables above, the tighter limit applies at the band edges.</li> <li>3) For above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.</li> <li>4) For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).</li> <li>5) <math>EIRP = (E \cdot d)^2 / 30</math></li> </ol> <p>Where:</p> <p>E is the field strength in V/m;<br/> d is the measurement distance in meters;<br/> EIRP is the equivalent isotropically radiated power in watts.</p> <ol style="list-style-type: none"> <li>6) Working in dB units, the above equation is equivalent to:<br/> <math>EIRP[dBm] = E[dBμV/m] + 20 \log(d[meters]) - 104.77</math></li> <li>7) Or, if d is 3 meters:<br/> <math>EIRP[dBm] = E[dBμV/m] - 95.2</math></li> </ol> |
| Test Method | ANSI C63.10-2020, section 12.7.4, section 12.7.5, section 12.7.6.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

## 5.7.2 Test Setup Diagram



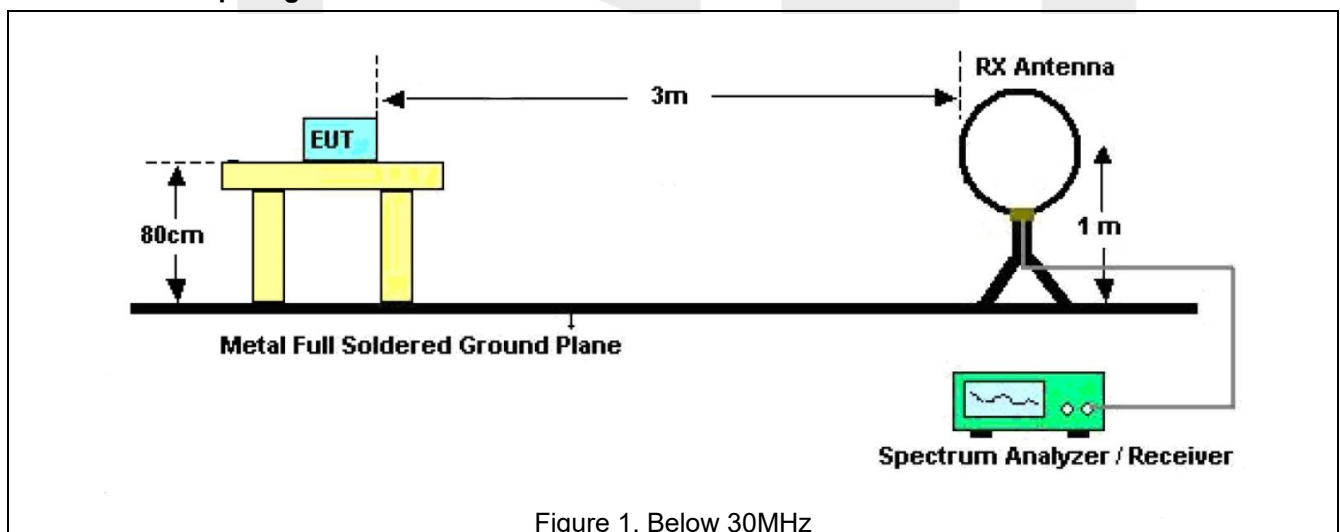


Figure 1. Below 30MHz

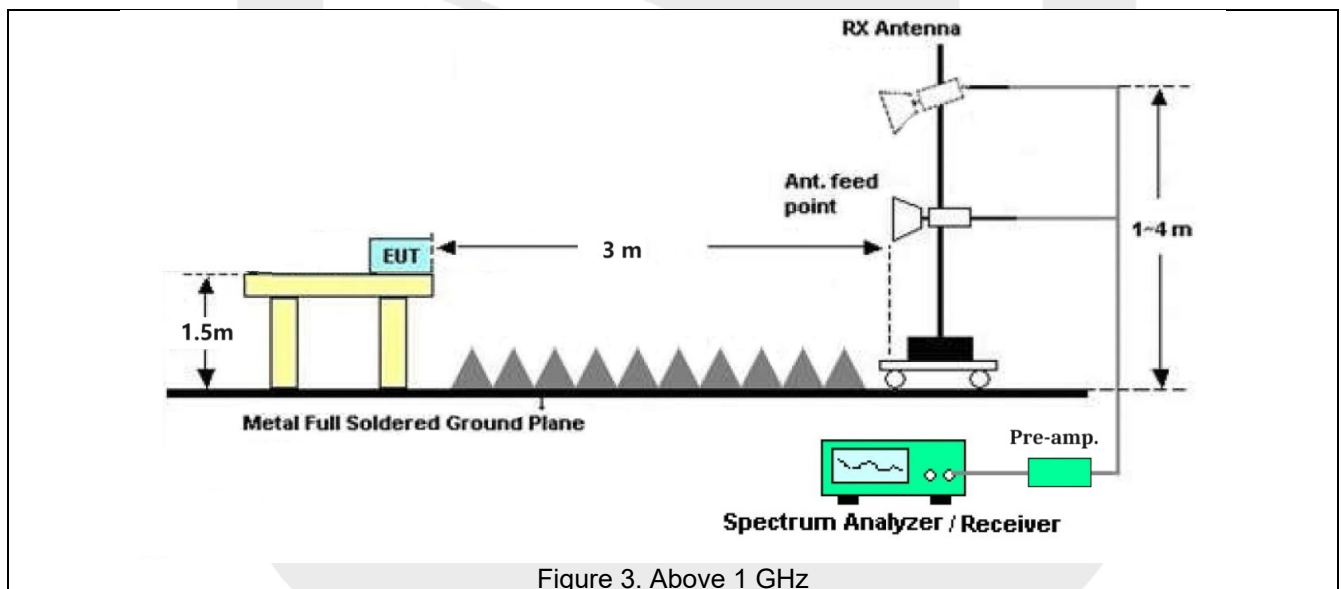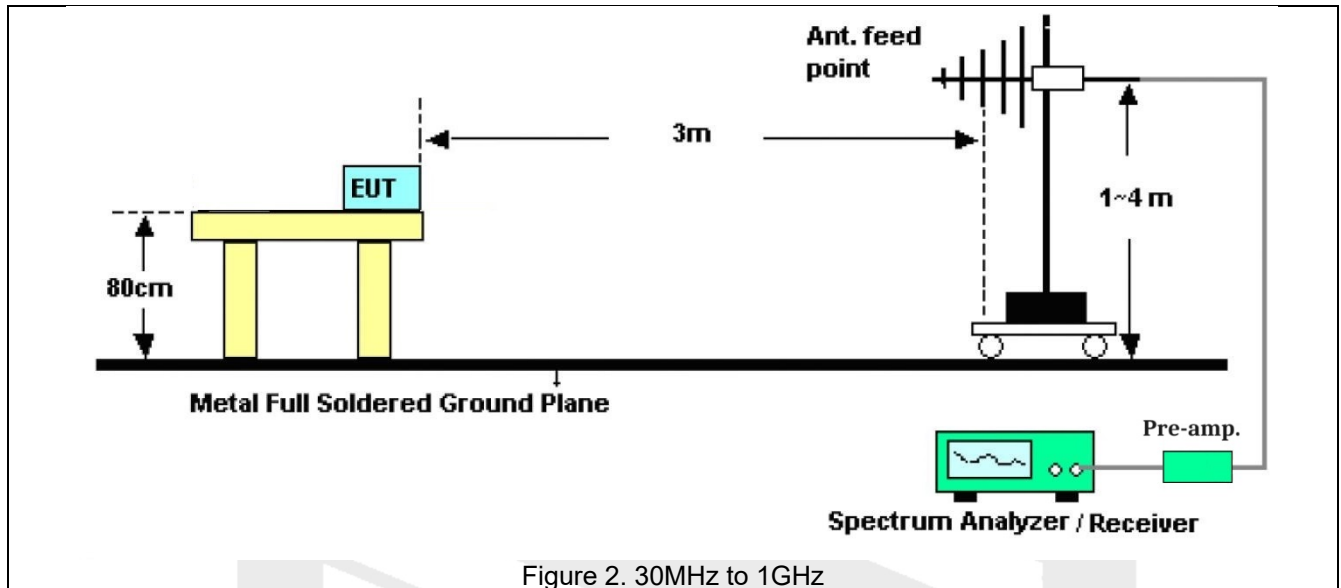

### 5.7.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power.

Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector = Peak, Trace mode = Max hold, Sweep = auto couple.

RBW = 1MHz, VBW = 10Hz, Detector = Average, Trace mode = Max hold, Sweep = auto couple.

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

#### 5.7.4 Test Data

PASS.

Please to see the following pages.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.


For test of 30MHz-1GHz, during the test, pre-scan all modes, only the worst case is recorded in the report.

For test of 1GHz-40GHz, during the test, pre-scan all modes, and found the U-NII-1 / 802.11n(HT20) & U-NII-3 / 802.11n(HT20) is worse case, the report only record this mode.

The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

**Radiated Emission Test Data (30-1000MHz)**

|                   |                |                      |                        |
|-------------------|----------------|----------------------|------------------------|
| <b>Test Site:</b> | 966 Chamber #1 | <b>Polarization:</b> | Horizontal             |
| <b>Distance:</b>  | 3m             | <b>Test Mode:</b>    | U-NII-1/TM2/ CH Middle |

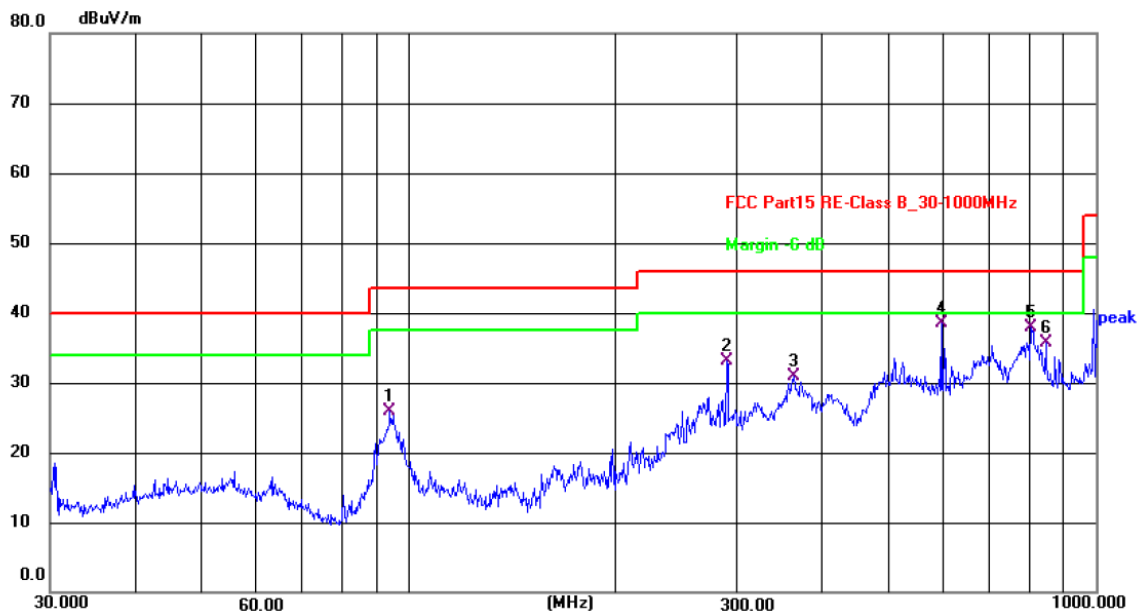


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1   | 93.7685         | 42.84          | -16.89        | 25.95          | 43.50          | -17.55      | QP       | P   |        |
| 2   | 290.0172        | 45.34          | -12.26        | 33.08          | 46.00          | -12.92      | QP       | P   |        |
| 3   | 362.9844        | 41.63          | -10.64        | 30.99          | 46.00          | -15.01      | QP       | P   |        |
| 4 * | 595.1329        | 44.86          | -6.32         | 38.54          | 46.00          | -7.46       | QP       | P   |        |
| 5   | 804.6028        | 41.84          | -3.87         | 37.97          | 46.00          | -8.03       | QP       | P   |        |
| 6   | 845.0878        | 38.72          | -3.09         | 35.63          | 46.00          | -10.37      | QP       | P   |        |

**Note: Level = Reading + Factor**
**Margin = Level - Limit**

### Radiated Emission Test Data (30-1000MHz)

|                   |                       |                      |                               |
|-------------------|-----------------------|----------------------|-------------------------------|
| <b>Test Site:</b> | <b>966 Chamber #1</b> | <b>Polarization:</b> | <b>Vertical</b>               |
| <b>Distance:</b>  | <b>3m</b>             | <b>Test Mode:</b>    | <b>U-NII-1/TM2/ CH Middle</b> |

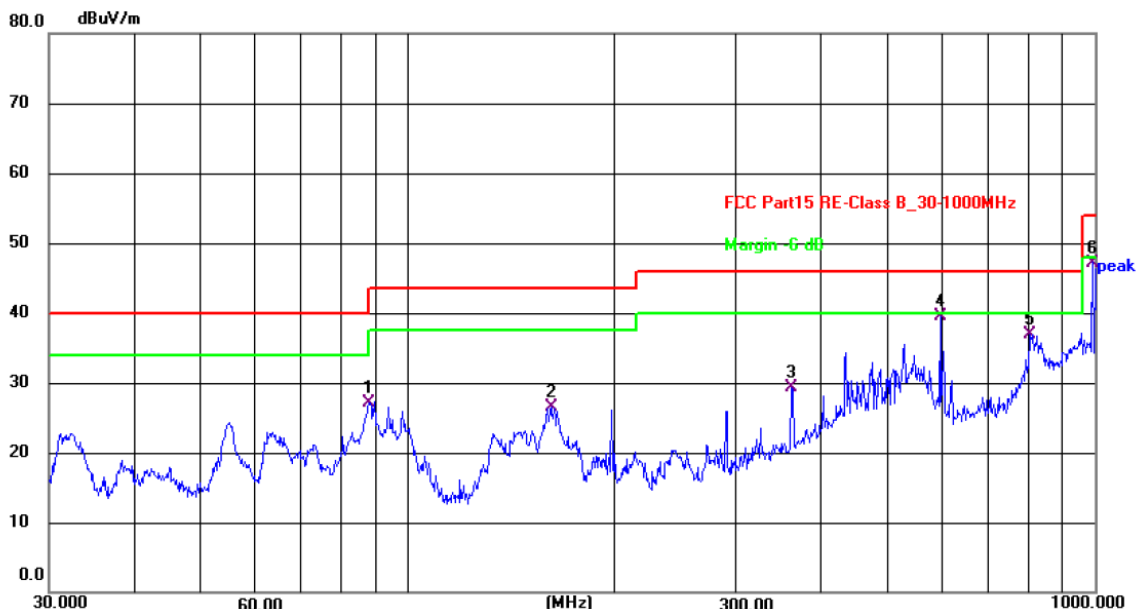

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1   | 87.7248         | 45.12          | -18.02        | 27.10          | 40.00          | -12.90      | QP       | P   |        |
| 2   | 161.4742        | 44.38          | -17.86        | 26.52          | 43.50          | -16.98      | QP       | P   |        |
| 3   | 361.7139        | 39.94          | -10.69        | 29.25          | 46.00          | -16.75      | QP       | P   |        |
| 4 * | 595.1329        | 45.72          | -6.31         | 39.41          | 46.00          | -6.59       | QP       | P   |        |
| 5   | 804.6028        | 40.85          | -3.89         | 36.96          | 46.00          | -9.04       | QP       | P   |        |
| 6   | 993.0114        | 47.96          | -0.76         | 47.20          | 54.00          | -6.80       | QP       | P   |        |

**Note: Level = Reading + Factor      Margin = Level - Limit**

**Radiated Spurious Emission (1GHz-40GHz)**

| Test Mode: 802.11n(HT20) |                 |                |               |                         | CH Low: 5180 MHz |             |               |        |
|--------------------------|-----------------|----------------|---------------|-------------------------|------------------|-------------|---------------|--------|
| Pol.                     | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)   | Margin (dB) | Detector Type | Result |
| V                        | 3206.93         | 45.15          | -0.84         | 44.31                   | 68.23            | -23.92      | PK            | PASS   |
| V                        | 7510.01         | 40.13          | 9.84          | 49.97                   | 68.23            | -18.26      | PK            | PASS   |
| V                        | 9501.53         | 37.96          | 13.15         | 51.10                   | 68.23            | -17.13      | PK            | PASS   |
| V                        | 10361.50        | 44.26          | 13.79         | 58.05                   | 68.23            | -10.18      | PK            | PASS   |
| V                        | 14019.45        | 37.65          | 17.35         | 55.01                   | 68.23            | -13.22      | PK            | PASS   |
| V                        | 15541.25        | *              | *             | *                       | 68.23            | *           | PK            | PASS   |
| H                        | 3201.50         | 46.44          | -0.86         | 45.57                   | 68.23            | -22.66      | PK            | PASS   |
| H                        | 7500.50         | 42.11          | 9.83          | 51.94                   | 68.23            | -16.29      | PK            | PASS   |
| H                        | 9500.50         | 36.96          | 13.14         | 50.10                   | 68.23            | -18.13      | PK            | PASS   |
| H                        | 10360.00        | 43.24          | 13.79         | 57.03                   | 68.23            | -11.20      | PK            | PASS   |
| H                        | 14016.49        | 36.98          | 17.35         | 54.33                   | 68.23            | -13.90      | PK            | PASS   |
| H                        | 15540.00        | *              | *             | *                       | 68.23            | *           | PK            | PASS   |
| V                        | 3206.93         | 33.09          | -0.84         | 32.24                   | 54.00            | -21.76      | AV            | PASS   |
| V                        | 7510.01         | 28.74          | 9.84          | 38.58                   | 54.00            | -15.42      | AV            | PASS   |
| V                        | 9501.53         | 22.48          | 13.15         | 35.63                   | 54.00            | -18.37      | AV            | PASS   |
| V                        | 10361.50        | 30.11          | 13.79         | 43.90                   | 54.00            | -10.10      | AV            | PASS   |
| V                        | 14019.45        | 24.42          | 17.35         | 41.77                   | 54.00            | -12.23      | AV            | PASS   |
| V                        | 15541.25        | *              | *             | *                       | 54.00            | *           | AV            | PASS   |
| H                        | 3201.50         | 32.21          | -0.86         | 31.34                   | 54.00            | -22.66      | AV            | PASS   |
| H                        | 7500.50         | 28.40          | 9.83          | 38.23                   | 54.00            | -15.77      | AV            | PASS   |
| H                        | 9500.50         | 24.52          | 13.14         | 37.66                   | 54.00            | -16.34      | AV            | PASS   |
| H                        | 10360.00        | 31.98          | 13.79         | 45.77                   | 54.00            | -8.23       | AV            | PASS   |
| H                        | 14016.49        | 23.12          | 17.35         | 40.47                   | 54.00            | -13.53      | AV            | PASS   |
| H                        | 15540.00        | *              | *             | *                       | 54.00            | *           | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.
2. “\*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

**Radiated Spurious Emission (1GHz-40GHz)**

| Test Mode: 802.11n(HT20) |                 |                |               |                         | CH Middle: 5200 MHz |             |               |        |
|--------------------------|-----------------|----------------|---------------|-------------------------|---------------------|-------------|---------------|--------|
| Pol.                     | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)      | Margin (dB) | Detector Type | Result |
| V                        | 3416.77         | 45.14          | -0.07         | 45.07                   | 68.23               | -23.16      | PK            | PASS   |
| V                        | 8014.51         | 40.40          | 10.36         | 50.76                   | 68.23               | -17.47      | PK            | PASS   |
| V                        | 9719.93         | 37.89          | 13.21         | 51.09                   | 68.23               | -17.14      | PK            | PASS   |
| V                        | 10400.00        | 44.20          | 13.91         | 58.11                   | 68.23               | -10.12      | PK            | PASS   |
| V                        | 14301.27        | 37.56          | 17.43         | 54.99                   | 68.23               | -13.24      | PK            | PASS   |
| V                        | 15602.50        | *              | *             | *                       | 68.23               | *           | PK            | PASS   |
| H                        | 3402.21         | 47.94          | -0.13         | 47.81                   | 68.23               | -20.42      | PK            | PASS   |
| H                        | 8014.08         | 40.88          | 10.36         | 51.23                   | 68.23               | -17.00      | PK            | PASS   |
| H                        | 9707.13         | 37.46          | 13.20         | 50.66                   | 68.23               | -17.57      | PK            | PASS   |
| H                        | 10401.25        | 44.31          | 13.91         | 58.22                   | 68.23               | -10.01      | PK            | PASS   |
| H                        | 14313.01        | 35.67          | 17.45         | 53.12                   | 68.23               | -15.11      | PK            | PASS   |
| H                        | 15600.25        | *              | *             | *                       | 68.23               | *           | PK            | PASS   |
| V                        | 3416.77         | 34.20          | -0.07         | 34.13                   | 54.00               | -19.87      | AV            | PASS   |
| V                        | 8014.51         | 30.96          | 10.36         | 41.32                   | 54.00               | -12.68      | AV            | PASS   |
| V                        | 9719.93         | 23.29          | 13.21         | 36.49                   | 54.00               | -17.51      | AV            | PASS   |
| V                        | 10400.00        | 30.53          | 13.91         | 44.44                   | 54.00               | -9.56       | AV            | PASS   |
| V                        | 14301.27        | 23.11          | 17.43         | 40.55                   | 54.00               | -13.45      | AV            | PASS   |
| V                        | 15602.50        | *              | *             | *                       | 54.00               | *           | AV            | PASS   |
| H                        | 3402.21         | 32.65          | -0.13         | 32.52                   | 54.00               | -21.48      | AV            | PASS   |
| H                        | 8014.08         | 28.81          | 10.36         | 39.17                   | 54.00               | -14.83      | AV            | PASS   |
| H                        | 9707.13         | 23.13          | 13.20         | 36.34                   | 54.00               | -17.66      | AV            | PASS   |
| H                        | 10401.25        | 30.02          | 13.91         | 43.93                   | 54.00               | -10.07      | AV            | PASS   |
| H                        | 14313.01        | 22.73          | 17.45         | 40.18                   | 54.00               | -13.82      | AV            | PASS   |
| H                        | 15600.25        | *              | *             | *                       | 54.00               | *           | AV            | PASS   |

Remark:

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.
2. “\*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

**Radiated Spurious Emission (1GHz-40GHz)**

| Test Mode: 802.11n(HT20) |                 |                |               |                         | CH High: 5240 MHz |             |               |        |
|--------------------------|-----------------|----------------|---------------|-------------------------|-------------------|-------------|---------------|--------|
| Pol.                     | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)    | Margin (dB) | Detector Type | Result |
| V                        | 3707.24         | 46.79          | 1.10          | 47.88                   | 68.23             | -20.35      | PK            | PASS   |
| V                        | 8210.84         | 42.53          | 10.88         | 53.41                   | 68.23             | -14.82      | PK            | PASS   |
| V                        | 9812.28         | 36.73          | 13.23         | 49.97                   | 68.23             | -18.26      | PK            | PASS   |
| V                        | 10482.25        | 42.30          | 13.96         | 56.26                   | 68.23             | -11.97      | PK            | PASS   |
| V                        | 14716.29        | 35.29          | 17.60         | 52.89                   | 68.23             | -15.34      | PK            | PASS   |
| V                        | 15722.50        | *              | *             | *                       | 68.23             | *           | PK            | PASS   |
| H                        | 3714.12         | 47.58          | 1.10          | 48.69                   | 68.23             | -19.54      | PK            | PASS   |
| H                        | 8204.09         | 41.37          | 10.86         | 52.23                   | 68.23             | -16.00      | PK            | PASS   |
| H                        | 9814.11         | 35.54          | 13.23         | 48.77                   | 68.23             | -19.46      | PK            | PASS   |
| H                        | 10480.25        | 42.95          | 13.96         | 56.91                   | 68.23             | -11.32      | PK            | PASS   |
| H                        | 14713.99        | 36.57          | 17.59         | 54.16                   | 68.23             | -14.07      | PK            | PASS   |
| H                        | 15722.00        | *              | *             | *                       | 68.23             | *           | PK            | PASS   |
| V                        | 3707.24         | 33.68          | 1.10          | 34.78                   | 54.00             | -19.22      | AV            | PASS   |
| V                        | 8210.84         | 30.64          | 10.88         | 41.51                   | 54.00             | -12.49      | AV            | PASS   |
| V                        | 9812.28         | 24.66          | 13.23         | 37.90                   | 54.00             | -16.10      | AV            | PASS   |
| V                        | 10482.25        | 30.74          | 13.96         | 44.70                   | 54.00             | -9.30       | AV            | PASS   |
| V                        | 14716.29        | 23.13          | 17.60         | 40.72                   | 54.00             | -13.28      | AV            | PASS   |
| V                        | 15722.50        | *              | *             | *                       | 54.00             | *           | AV            | PASS   |
| H                        | 3714.12         | 34.84          | 1.10          | 35.95                   | 54.00             | -18.05      | AV            | PASS   |
| H                        | 8204.09         | 28.31          | 10.86         | 39.17                   | 54.00             | -14.83      | AV            | PASS   |
| H                        | 9814.11         | 23.75          | 13.23         | 36.99                   | 54.00             | -17.01      | AV            | PASS   |
| H                        | 10480.25        | 30.44          | 13.96         | 44.40                   | 54.00             | -9.60       | AV            | PASS   |
| H                        | 14713.99        | 22.91          | 17.59         | 40.50                   | 54.00             | -13.50      | AV            | PASS   |
| H                        | 15722.00        | *              | *             | *                       | 54.00             | *           | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.
2. “\*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

**Radiated Spurious Emission (1GHz-40GHz)**

| Test Mode: 802.11n(HT20) |                 |                |               |                         | CH Low: 5745 MHz |             |               |        |
|--------------------------|-----------------|----------------|---------------|-------------------------|------------------|-------------|---------------|--------|
| Pol.                     | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)   | Margin (dB) | Detector Type | Result |
| V                        | 3219.94         | 47.75          | -0.80         | 46.96                   | 68.23            | -21.27      | PK            | PASS   |
| V                        | 7514.41         | 42.54          | 9.84          | 52.38                   | 68.23            | -15.85      | PK            | PASS   |
| V                        | 9510.15         | 36.36          | 13.18         | 49.54                   | 68.23            | -18.69      | PK            | PASS   |
| V                        | 11490.25        | 44.23          | 15.22         | 59.45                   | 68.23            | -8.79       | PK            | PASS   |
| V                        | 14004.89        | 37.59          | 17.34         | 54.93                   | 68.23            | -13.30      | PK            | PASS   |
| V                        | 17237.00        | *              | *             | *                       | 68.23            | *           | PK            | PASS   |
| H                        | 3200.00         | 46.38          | -0.87         | 45.51                   | 68.23            | -22.72      | PK            | PASS   |
| H                        | 7501.00         | 41.40          | 9.83          | 51.23                   | 68.23            | -17.00      | PK            | PASS   |
| H                        | 9500.75         | 36.61          | 13.14         | 49.75                   | 68.23            | -18.48      | PK            | PASS   |
| H                        | 11490.75        | 44.63          | 15.22         | 59.85                   | 68.23            | -8.38       | PK            | PASS   |
| H                        | 14002.54        | 36.77          | 17.33         | 54.10                   | 68.23            | -14.13      | PK            | PASS   |
| H                        | 17236.25        | *              | *             | *                       | 68.23            | *           | PK            | PASS   |
| V                        | 3219.94         | 34.86          | -0.80         | 34.07                   | 54.00            | -19.93      | AV            | PASS   |
| V                        | 7514.41         | 30.96          | 9.84          | 40.80                   | 54.00            | -13.20      | AV            | PASS   |
| V                        | 9510.15         | 23.30          | 13.18         | 36.48                   | 54.00            | -17.52      | AV            | PASS   |
| V                        | 11490.25        | 32.66          | 15.22         | 47.88                   | 54.00            | -6.12       | AV            | PASS   |
| V                        | 14004.89        | 23.04          | 17.34         | 40.38                   | 54.00            | -13.62      | AV            | PASS   |
| V                        | 17237.00        | *              | *             | *                       | 54.00            | *           | AV            | PASS   |
| H                        | 3200.00         | 32.83          | -0.87         | 31.96                   | 54.00            | -22.04      | AV            | PASS   |
| H                        | 7501.00         | 30.02          | 9.83          | 39.85                   | 54.00            | -14.15      | AV            | PASS   |
| H                        | 9500.75         | 24.21          | 13.14         | 37.35                   | 54.00            | -16.65      | AV            | PASS   |
| H                        | 11490.75        | 32.07          | 15.22         | 47.29                   | 54.00            | -6.72       | AV            | PASS   |
| H                        | 14002.54        | 22.63          | 17.33         | 39.96                   | 54.00            | -14.04      | AV            | PASS   |
| H                        | 17236.25        | *              | *             | *                       | 54.00            | *           | AV            | PASS   |

**Remark:**

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.
2. “\*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

**Radiated Spurious Emission (1GHz-40GHz)**

| Test Mode: 802.11n(HT20) |                 |                |               |                         | CH Middle: 5785 MHz |             |               |        |
|--------------------------|-----------------|----------------|---------------|-------------------------|---------------------|-------------|---------------|--------|
| Pol.                     | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)      | Margin (dB) | Detector Type | Result |
| V                        | 3409.44         | 46.89          | -0.10         | 46.79                   | 68.23               | -21.44      | PK            | PASS   |
| V                        | 8019.79         | 41.29          | 10.37         | 51.66                   | 68.23               | -16.57      | PK            | PASS   |
| V                        | 9716.64         | 37.94          | 13.20         | 51.14                   | 68.23               | -17.09      | PK            | PASS   |
| V                        | 11570.75        | 43.92          | 15.31         | 59.23                   | 68.23               | -9.00       | PK            | PASS   |
| V                        | 14319.95        | 35.13          | 17.46         | 52.59                   | 68.23               | -15.64      | PK            | PASS   |
| V                        | 17356.75        | *              | *             | *                       | 68.23               | *           | PK            | PASS   |
| H                        | 3404.54         | 47.66          | -0.12         | 47.54                   | 68.23               | -20.69      | PK            | PASS   |
| H                        | 8015.42         | 40.57          | 10.36         | 50.93                   | 68.23               | -17.30      | PK            | PASS   |
| H                        | 9712.94         | 37.00          | 13.20         | 50.21                   | 68.23               | -18.02      | PK            | PASS   |
| H                        | 11572.00        | 44.78          | 15.31         | 60.09                   | 68.23               | -8.14       | PK            | PASS   |
| H                        | 14304.06        | 37.44          | 17.44         | 54.87                   | 68.23               | -13.36      | PK            | PASS   |
| H                        | 17355.25        | *              | *             | *                       | 68.23               | *           | PK            | PASS   |
| V                        | 3409.44         | 32.83          | -0.10         | 32.73                   | 54.00               | -21.27      | AV            | PASS   |
| V                        | 8019.79         | 28.49          | 10.37         | 38.86                   | 54.00               | -15.14      | AV            | PASS   |
| V                        | 9716.64         | 23.10          | 13.20         | 36.30                   | 54.00               | -17.70      | AV            | PASS   |
| V                        | 11570.75        | 32.71          | 15.31         | 48.02                   | 54.00               | -5.98       | AV            | PASS   |
| V                        | 14319.95        | 23.36          | 17.46         | 40.82                   | 54.00               | -13.18      | AV            | PASS   |
| V                        | 17356.75        | *              | *             | *                       | 54.00               | *           | AV            | PASS   |
| H                        | 3404.54         | 32.40          | -0.12         | 32.28                   | 54.00               | -21.72      | AV            | PASS   |
| H                        | 8015.42         | 28.86          | 10.36         | 39.22                   | 54.00               | -14.78      | AV            | PASS   |
| H                        | 9712.94         | 22.06          | 13.20         | 35.26                   | 54.00               | -18.74      | AV            | PASS   |
| H                        | 11572.00        | 32.27          | 15.31         | 47.58                   | 54.00               | -6.42       | AV            | PASS   |
| H                        | 14304.06        | 24.83          | 17.44         | 42.26                   | 54.00               | -11.74      | AV            | PASS   |
| H                        | 17355.25        | *              | *             | *                       | 54.00               | *           | AV            | PASS   |

Remark:

1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.
2. “\*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

**Radiated Spurious Emission (1GHz-40GHz)**

| Test Mode: 802.11n(HT20) |                 |                |               |                         | CH High: 5825MHz |             |               |        |
|--------------------------|-----------------|----------------|---------------|-------------------------|------------------|-------------|---------------|--------|
| Pol.                     | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Emission level (dBuV/m) | Limit (dBuV/m)   | Margin (dB) | Detector Type | Result |
| V                        | 3715.97         | 46.64          | 1.10          | 47.74                   | 68.23            | -20.49      | PK            | PASS   |
| V                        | 8210.15         | 42.38          | 10.88         | 53.26                   | 68.23            | -14.97      | PK            | PASS   |
| V                        | 9810.01         | 37.40          | 13.23         | 50.63                   | 68.23            | -17.60      | PK            | PASS   |
| V                        | 11652.00        | 44.37          | 15.39         | 59.76                   | 68.23            | -8.47       | PK            | PASS   |
| V                        | 14713.72        | 36.60          | 17.58         | 54.18                   | 68.23            | -14.05      | PK            | PASS   |
| V                        | 17475.50        | *              | *             | *                       | 68.23            | *           | PK            | PASS   |
| H                        | 3715.15         | 46.36          | 1.10          | 47.47                   | 68.23            | -20.76      | PK            | PASS   |
| H                        | 8216.08         | 42.34          | 10.89         | 53.23                   | 68.23            | -15.00      | PK            | PASS   |
| H                        | 9810.32         | 37.06          | 13.23         | 50.29                   | 68.23            | -17.94      | PK            | PASS   |
| H                        | 11651.25        | 44.91          | 15.39         | 60.30                   | 68.23            | -7.93       | PK            | PASS   |
| H                        | 14719.53        | 35.90          | 17.59         | 53.50                   | 68.23            | -14.73      | PK            | PASS   |
| H                        | 17477.25        | *              | *             | *                       | 68.23            | *           | PK            | PASS   |
| V                        | 3715.97         | 32.27          | 1.10          | 33.38                   | 54.00            | -20.62      | AV            | PASS   |
| V                        | 8210.15         | 28.21          | 10.88         | 39.09                   | 54.00            | -14.91      | AV            | PASS   |
| V                        | 9810.01         | 24.82          | 13.23         | 38.06                   | 54.00            | -15.94      | AV            | PASS   |
| V                        | 11652.00        | 32.42          | 15.39         | 47.81                   | 54.00            | -6.19       | AV            | PASS   |
| V                        | 14713.72        | 23.28          | 17.58         | 40.87                   | 54.00            | -13.13      | AV            | PASS   |
| V                        | 17475.50        | *              | *             | *                       | 54.00            | *           | AV            | PASS   |
| H                        | 3715.15         | 33.12          | 1.10          | 34.22                   | 54.00            | -19.78      | AV            | PASS   |
| H                        | 8216.08         | 28.40          | 10.89         | 39.29                   | 54.00            | -14.71      | AV            | PASS   |
| H                        | 9810.32         | 23.84          | 13.23         | 37.07                   | 54.00            | -16.93      | AV            | PASS   |
| H                        | 11651.25        | 31.96          | 15.39         | 47.35                   | 54.00            | -6.65       | AV            | PASS   |
| H                        | 14719.53        | 24.16          | 17.59         | 41.75                   | 54.00            | -12.25      | AV            | PASS   |
| H                        | 17477.25        | *              | *             | *                       | 54.00            | *           | AV            | PASS   |

Remark:


1. Emission Level = Reading + Factor, Margin= Emission Level – Limit.
2. “\*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

## 5.8 Frequency Stability

### 5.8.1 Test Requirement

|                  |                                                                                                                                                                                                                              |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement | Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual. |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### 5.8.2 Test Setup Diagram

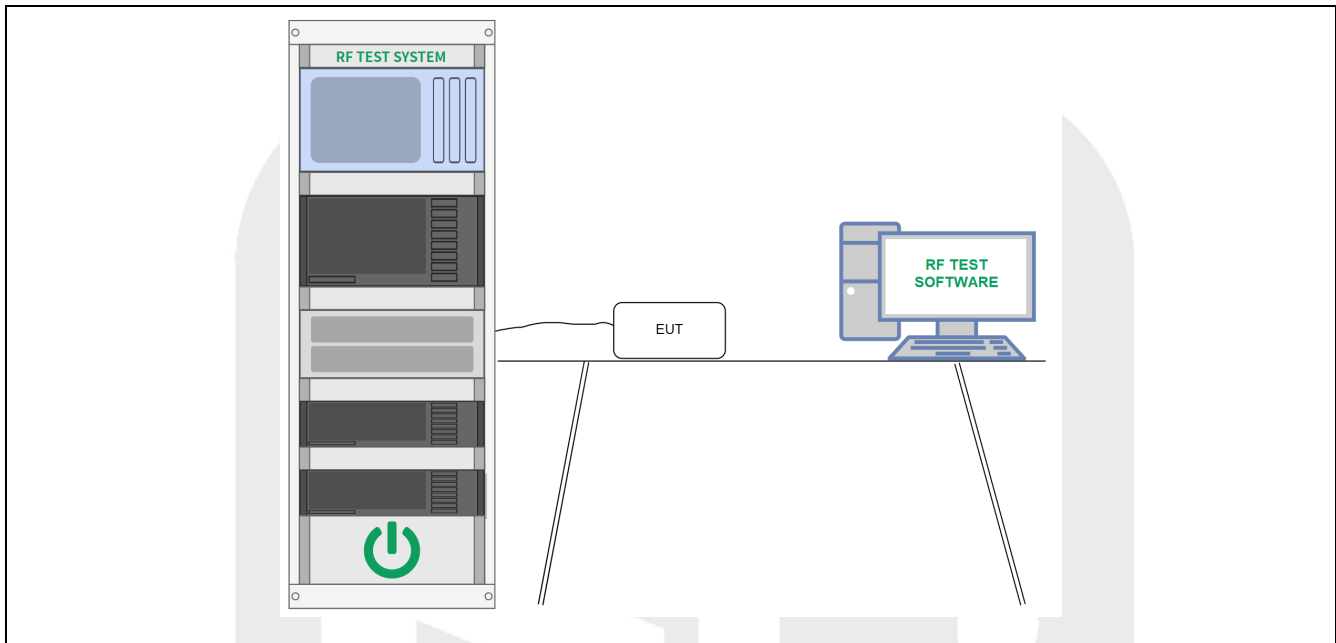

### 5.8.3 Test Procedure

#### ✧ Frequency stability with respect to ambient temperature

a) Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn ON the EUT and tune it to one of the number of frequencies.

b) Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away), or by connecting a dummy load to the measuring instrument through an attenuator if necessary.

NOTE-An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.

c) Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).

d) Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters energize only the heater circuit.

e) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.

f) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 min, 5 min, and 10 min after the EUT is energized. Four measurements in total are made.

g) Measure the frequency at each of frequencies.

h) Switch OFF the EUT but do not switch OFF the oscillator heater.

- i) Lower the chamber temperature by not more than 10 °C, and allow the temperature inside the chamber to stabilize.
- j) Repeat step f through step i) down to the lowest specified temperature.

✧ **Frequency stability when varying supply voltage**

Unless otherwise specified, these tests shall be made at ambient room temperature (+15 °C to +25 °C). a) An antenna shall be connected to the antenna output terminals of the EUT if possible. If the EUT is equipped with or uses an adjustable-length antenna, then it shall be fully extended.

Supply the EUT with nominal voltage or install a new or fully charged battery in the EUT. Turn ON the EUT and couple its output to a frequency counter or other frequency measuring instrument.

NOTE An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.

b) Tune the EUT to one of the number of frequencies. Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).

c) Measure the frequency at each of the frequencies.

d) Repeat the above procedure at 85% and 115% of the nominal supply voltage.

#### 5.8.4 Test Data

**PASS.**

Please refer to Annex F for details.

## **ANNEX A TEST SETUP PHOTOS**

Please refer to the document "8328EU011219W-AA.PDF"

## **ANNEX B EXTERNAL PHOTOS**


Please refer to the document "8328EU011219W-AB.PDF"

## **ANNEX C INTERNAL PHOTOS**

Please refer to the document "8328EU011219W-AC.PDF"

## **ANNEX F TEST DATA**

Please refer to the document "8328EU011219W-AG.PDF"

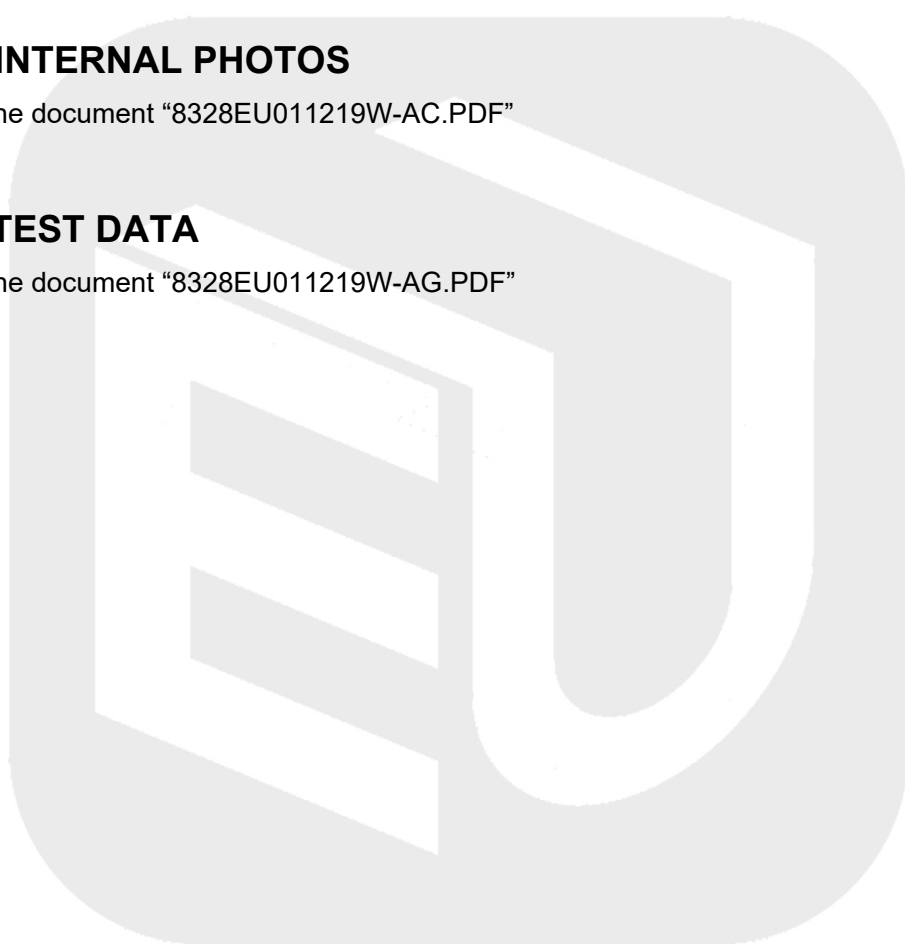

## STATEMENT

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--- End of Report ---