

## TEST REPORT

**Applicant:** Shenzhen Xinguodu Technology Co.,Ltd.

**Address:** 17B JinSong Mansion, Terra Industrial & Trade Park  
Chegongmiao, Futian District, Shenzhen, Guangdong, China.

**Product Name:** POS terminal


**FCC ID:** XDQN86PRO-01

**Standard(s):** 47 CFR Part 15, Subpart C(15.247)  
ANSI C63.10-2020  
KDB 558074 D01 15.247 Meas Guidance v05r02

**Report Number:** 2502Q44141E-RF-00A


**Report Date:** 2025/4/10

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).



**Reviewed By:** Pedro Yun

**Title:** Project Engineer



**Approved By:** Gavin Xu

**Title:** RF Supervisor

---

**Bay Area Compliance Laboratories Corp. (Dongguan)**  
No.12, Pulong East 1<sup>st</sup> Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

[www.baclcorp.com.cn](http://www.baclcorp.com.cn)

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

# CONTENTS

<b>DOCUMENT REVISION HISTORY</b>	<b>4</b>
<b>1. GENERAL INFORMATION</b>	<b>5</b>
1.1 GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST	5
1.2 ACCESSORY INFORMATION	5
1.3 ANTENNA INFORMATION DETAIL▲	6
1.4 EQUIPMENT MODIFICATIONS	6
<b>2. SUMMARY OF TEST RESULTS</b>	<b>7</b>
<b>3. DESCRIPTION OF TEST CONFIGURATION</b>	<b>8</b>
3.1 OPERATION FREQUENCY DETAIL	8
3.2 EUT OPERATION CONDITION	8
3.3 EUT EXERCISE SOFTWARE	8
3.4 SUPPORT EQUIPMENT LIST AND DETAILS	8
3.5 SUPPORT CABLE LIST AND DETAILS	8
3.6 BLOCK DIAGRAM OF TEST SETUP	9
3.7 TEST FACILITY	11
3.7 MEASUREMENT UNCERTAINTY	11
<b>4. REQUIREMENTS AND TEST PROCEDURES</b>	<b>12</b>
4.1 AC LINE CONDUCTED EMISSIONS	12
4.1.1 Applicable Standard	12
4.1.2 EUT Setup	13
4.1.3 EMI Test Receiver Setup	13
4.1.4 Test Procedure	14
4.1.5 Corrected Result& Margin Calculation	14
4.1.6 Test Result	14
4.2 RADIATION SPURIOUS EMISSIONS	15
4.2.1 Applicable Standard	15
4.2.2 EUT Setup	15
4.2.3 EMI Test Receiver & Spectrum Analyzer Setup	17
4.2.4 Test Procedure	17
4.2.5 Corrected Result & Margin Calculation	18
4.2.6 Test Result	18
4.3 MINIMUM 6 DB BANDWIDTH	19
4.3.1 Applicable Standard	19
4.3.2 EUT Setup	19
4.3.3 Test Procedure	19
4.3.4 Test Result	19
4.4 MAXIMUM CONDUCTED OUTPUT POWER	20
4.4.1 Applicable Standard	20
4.4.2 EUT Setup	20
4.4.3 Test Procedure	20
4.4.4 Test Result	20

<b>4.5 MAXIMUM POWER SPECTRAL DENSITY</b>	<b>21</b>
4.5.1 Applicable Standard	21
4.5.2 EUT Setup	21
4.5.3 Test Procedure	21
4.5.4 Test Result	21
<b>4.6 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE</b>	<b>22</b>
4.6.1 Applicable Standard	22
4.6.2 EUT Setup	22
4.6.3 Test Procedure	22
4.6.4 Test Result	22
<b>4.7 DUTY CYCLE</b>	<b>23</b>
4.7.1 EUT Setup	23
4.7.2 Test Procedure	23
4.7.3 Judgment	23
<b>4.8 ANTENNA REQUIREMENT</b>	<b>24</b>
4.8.1 Applicable Standard	24
4.8.2 Judgment	24
<b>5. TEST DATA AND RESULTS</b>	<b>25</b>
<b>5.1 AC LINE CONDUCTED EMISSIONS</b>	<b>25</b>
<b>5.2 RADIATION SPURIOUS EMISSIONS</b>	<b>32</b>
<b>5.3 6dB EMISSION BANDWIDTH</b>	<b>51</b>
<b>5.4 MAXIMUM CONDUCTED OUTPUT POWER</b>	<b>53</b>
<b>5.5 POWER SPECTRAL DENSITY</b>	<b>55</b>
<b>5.6 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE</b>	<b>57</b>
<b>5.7 DUTY CYCLE</b>	<b>58</b>
<b>EXHIBIT A - EUT PHOTOGRAPHS</b>	<b>59</b>
<b>EXHIBIT B - TEST SETUP PHOTOGRAPHS</b>	<b>60</b>
<b>EXHIBIT C - RF EXPOSURE EVALUATION</b>	<b>61</b>
<b>SAR EVALUATION</b>	<b>61</b>

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2502Q44141E-RF-00A	Original Report	2025/4/10

## 1. GENERAL INFORMATION

### 1.1 General Description Of Equipment under Test

<b>EUT Name:</b>	POS terminal
<b>EUT Model:</b>	N86 Pro
<b>Operation Frequency:</b>	2402-2480 MHz
<b>Maximum Peak Output Power (Conducted):</b>	0.06dBm
<b>Modulation Type:</b>	GFSK
<b>Rated Input Voltage:</b>	DC 7.2V from battery or DC 5.0V from Adapter
<b>Serial Number:</b>	For RF Conducted: 2YIJ-1(Sample 1#) For AC Line Conducted Emissions and Radiated Spurious Emission Below 1G: 2YIJ-13(Sample 1#) 2YIJ-17(Sample 2#) For Radiated Spurious Emission Above 1G: 2YIJ-17(Sample 2#)
<b>EUT Received Date:</b>	2025/2/18
<b>EUT Received Status:</b>	Good

#### EUT Information:

Sample	Parameters
Sample 1#	(1GB RAM+8GB ROM) +Front camera 2MP+Back camera 2MP+Double SIM+ Screen 1# (Tianshan)
Sample 2#	(2GB RAM+32GB ROM)+Front camera 2MP+Back camera 5MP+Single ESIM+Single SIM + Screen 2#( Hongzhan) + Flash lamp

### 1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
Adapter 1#	SHENZHEN RUIJING INDUSTRIAL CO LTD	STC-A520A-Z	Input: 100-240Vac 50/60Hz 400mA Output: 5.0Vdc 2000mA
Adapter 2#	Jiangxi Jian Aohai Technology Co.,Ltd.	A319-050200U-US2	Input: 100-240Vac 50/60Hz 0.3A Output: 5.0Vdc 2000mA
Battery 1#	Zhengzhou BAK Battery Co.,Ltd.	GX11	Nominal Voltage: 7.2V Typical Capacity: 2600mAh Rated Capacity: 2500mAh Typical Energy: 18.72Wh Nominal Energy: 18Wh
Battery 2#	Zhengzhou BAK Battery Co.,Ltd.	GX12	Nominal Voltage: 7.2V Typical Capacity: 3300mAh Rated Capacity: 3200mAh Typical Energy: 23.76Wh Nominal Energy: 23.04Wh

Note: Per 15B report, Powered by Battery 1# was the worst, so only performed it.

### 1.3 Antenna Information Detail▲

Antenna Manufacturer	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Shenzhen Xinguodu Technology Co.,Ltd.	FPC	50	2.4-2.5GHz	2.8dBi
<b>The design of compliance with §15.203:</b>				
<input checked="" type="checkbox"/> Unit uses a permanently attached antenna.				
<input type="checkbox"/> Unit uses a unique coupling to the intentional radiator.				
<input type="checkbox"/> Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.				

### 1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

## 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207(a)	AC Line Conducted Emissions	Compliant
FCC §15.205,§15.209,§15.247(d)	Radiated Spurious Emission	Compliant
FCC §15.247(a)(2)	6dB Emission Bandwidth	Compliant
FCC §15.247(b)(1)	Maximum Conducted Output Power	Compliant
FCC §15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(e)	Power Spectral Density	Compliant
FCC §15.203	Antenna Requirement	Compliant
§15.247 (i) & §1.1310 & §2.1093	RF Exposure Evaluation	Compliant
Note 1: For AC line conducted emissions, the maximum output power mode and channel was tested.		
Note 2: For Radiated Spurious Emissions 9kHz~1GHz and 18~25GHz, the maximum output power mode and channel was tested.		

### 3. DESCRIPTION OF TEST CONFIGURATION

#### 3.1 Operation Frequency Detail

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	<b>2402</b>	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
...	...	38	2478
19	<b>2440</b>	39	<b>2480</b>

Note: The above frequencies in bold were performed the test.

#### 3.2 EUT Operation Condition

The system was configured for testing in Engineering Mode, which was provided by the manufacturer. The following summary table is showing all test modes to demonstrate in compliance with the standard:

Test Items	Test Modes
<b>AC Line Conducted Emission:</b>	M1: Transmitting& Adapter 1#& Sample 1#
	M2: Transmitting& Adapter 2#& Sample 1#
	M3: Transmitting& Worst Adapter(1#~2#)& Sample 2#
<b>Radiated Spurious Emission Below 1G:</b>	M1: Transmitting& Adapter 1#& Sample 1#
	M2: Transmitting& Adapter 2#& Sample 1#
	M3: Transmitting& Worst Adapter(1#~2#)& Sample 2#
<b>Radiated Spurious Emission Above 1G:</b>	M1: Transmitting& Adapter 1#& Sample 2#

#### 3.3 EUT Exercise Software

EUT Exercise Software:	Engineering mode		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲:			
Test Modes	Power Level Setting		
	Lowest Channel	Middle Channel	Highest Channel
BLE 1Mbps	6	6	6

#### 3.4 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/


#### 3.5 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	no	no	1.5	Adapter	EUT




3.6 Block Diagram of Test Setup


AC line conducted emissions:  
M1~M3:

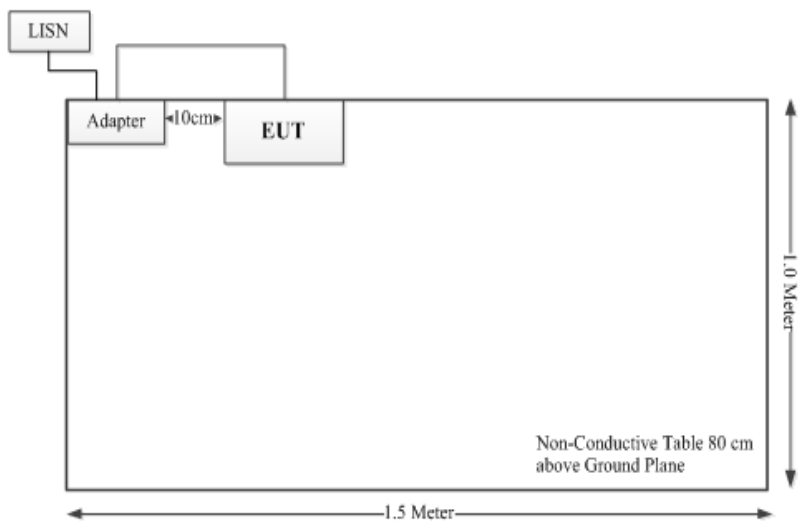

Spurious Emissions:  
Below 1GHz:  
M1~M3:

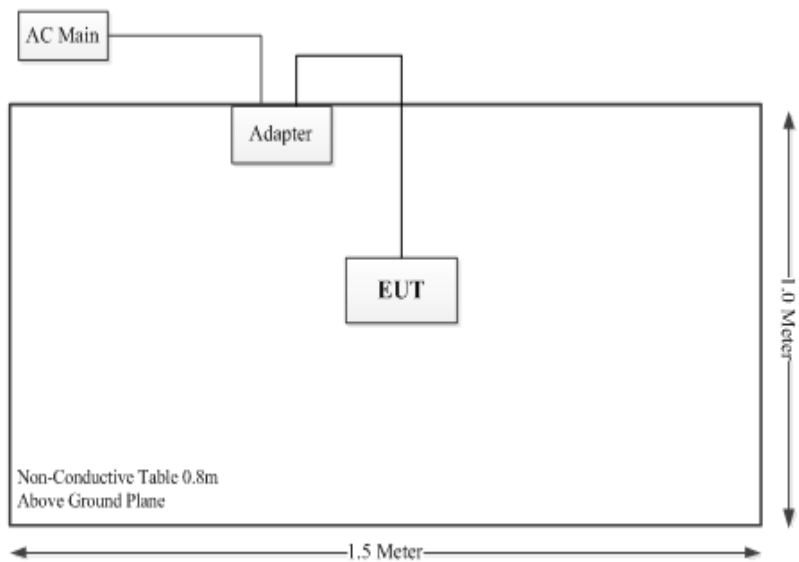

Above 1GHz:

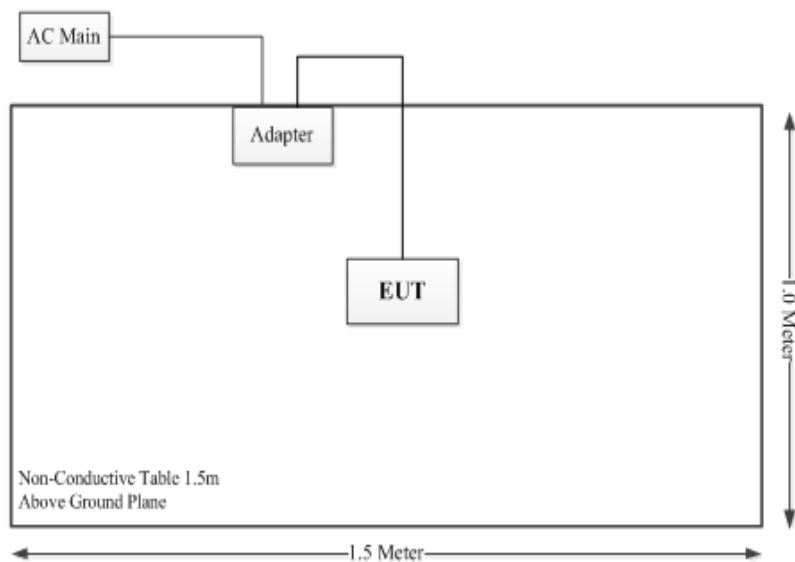

### 3.7 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

### 3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB,200MHz~1GHz: 5.92 dB,1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz:5.47 dB, 26.5GHz~40GHz:5.63 dB
Unwanted Emissions, conducted	±2.47 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)

## 4. REQUIREMENTS AND TEST PROCEDURES

### 4.1 AC Line Conducted Emissions

#### 4.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz, as measured using a 50  $\mu$ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

#### 4.1.2 EUT Setup

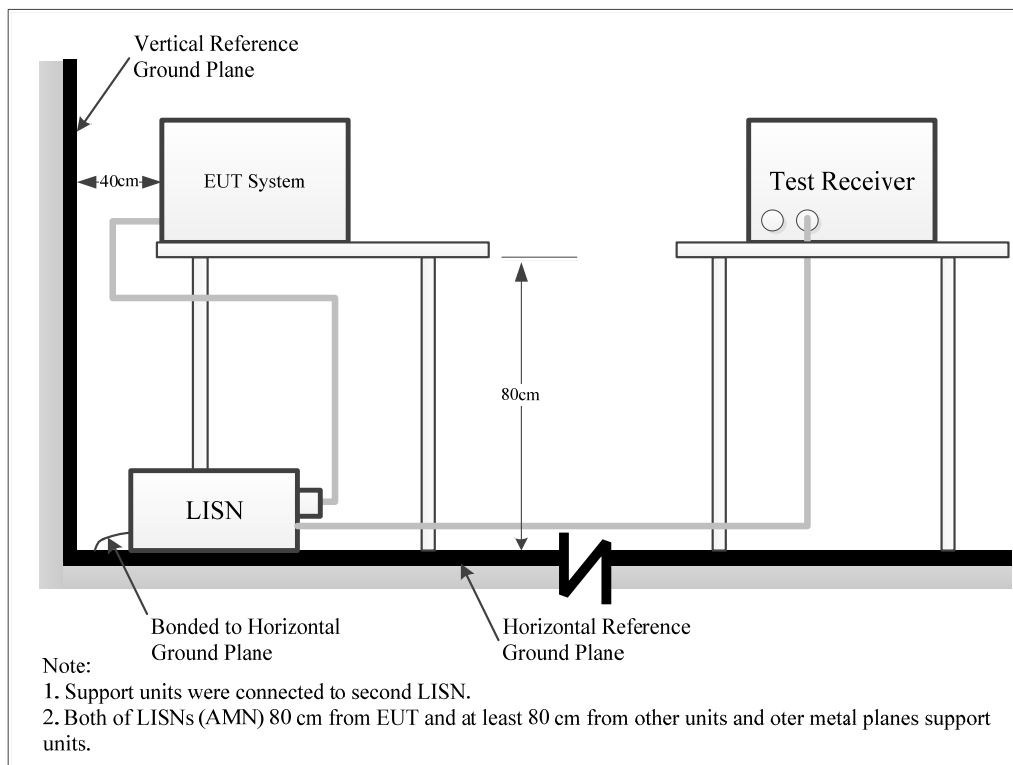

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

#### 4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

#### 4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground[protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

#### 4.1.5 Corrected Result& Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor=attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

#### 4.1.6 Test Result

Please refer to section 5.1.

## 4.2 Radiation Spurious Emissions


### 4.2.1 Applicable Standard

FCC §15.247 (d);


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 4.2.2 EUT Setup


9kHz-30MHz:

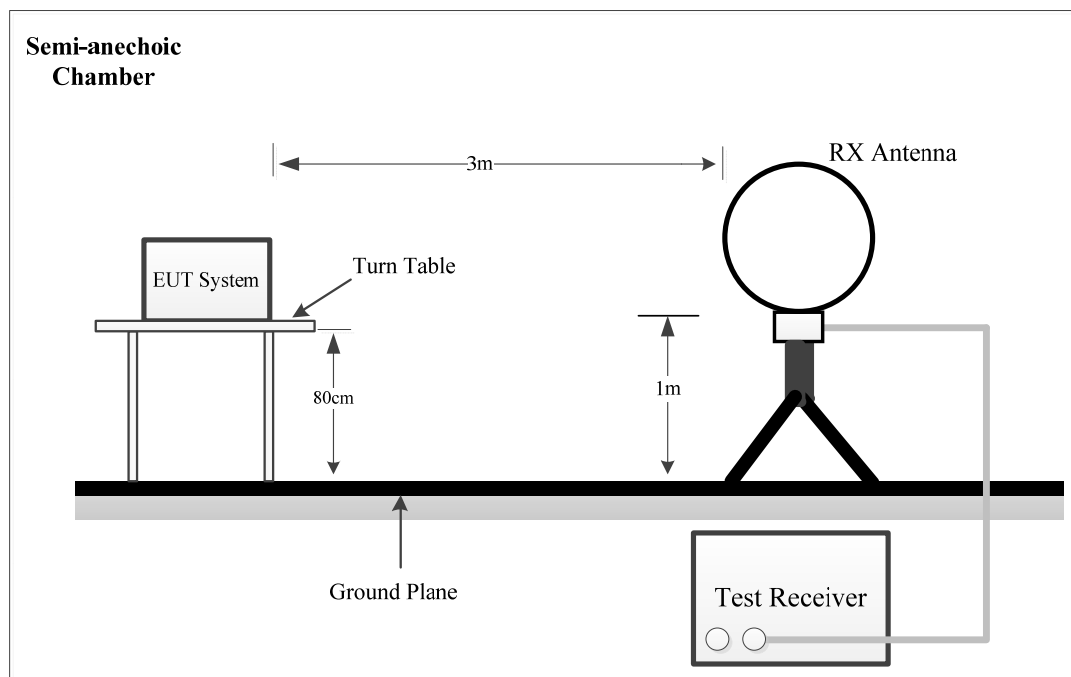

### 30MHz~1GHz:

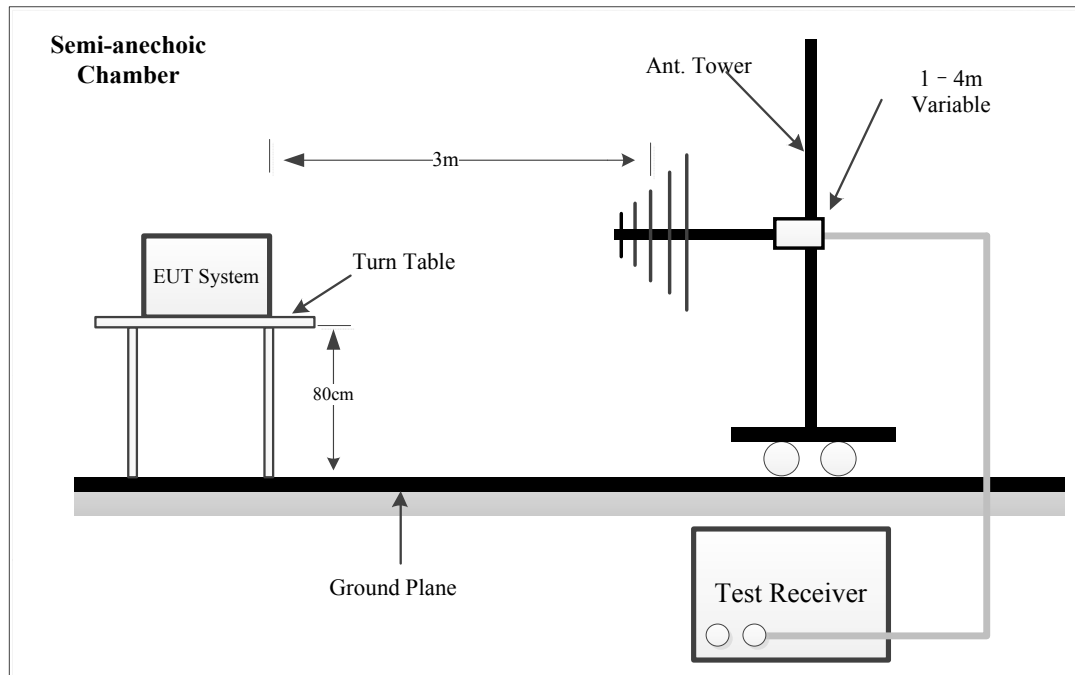

### Above 1GHz:

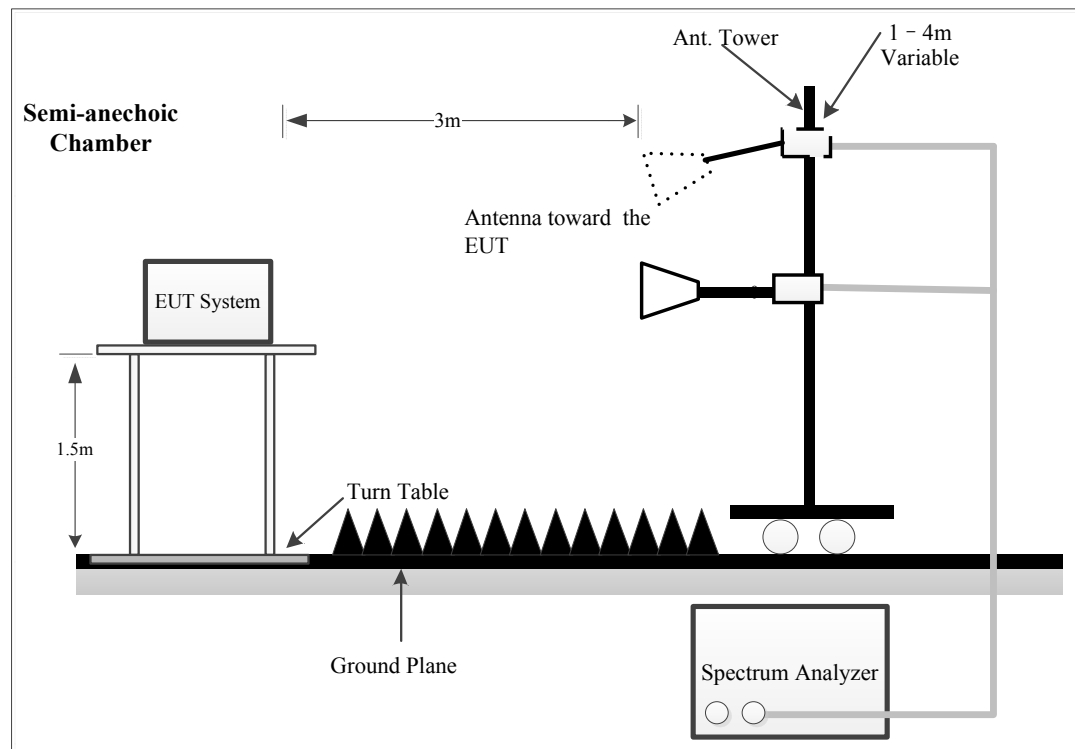

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.



The spacing between the peripherals was 10cm.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

#### 4.2.3 EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
9 kHz-150 kHz	QP/AV	300 Hz	1 kHz	200 Hz	QP/AV
150 kHz-30 MHz	QP/AV	10 kHz	30 kHz	9 kHz	QP/AV
30 MHz-1000 MHz	Peak	100 kHz	300 kHz	/	PK
	QP	/	/	120 kHz	QP

Above 1GHz:

Pre-scan:

Frequency Range	Measurement	RBW	Video B/W	Detector
Above 1 GHz	Peak	1MHz	3 MHz	PK
	AV	1MHz	5kHz	PK

Final measurement for emission identified during the pre-scan:

Frequency Range	Measurement	RBW	Video B/W	Detector
Above 1 GHz	Peak	1MHz	3 MHz	PK
	AV	1MHz	$\geq 1/T$	PK

Note: T is minimum transmission duration

#### 4.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was required in Quasi-peak measurement for frequency range of 9 kHz-1 GHz except 9-90 kHz, 110-490 kHz, employing an average measurement, peak and Average measurement for frequencies above 1 GHz.

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

#### 4.2.5 Corrected Result & Margin Calculation

$$E_{Log} = 20 \times \log_{10}(E_{Linear})$$

$E_{Linear}$  is the field strength of the emission, in  $\mu\text{V/m}$

$E_{Log}$  is the field strength of the emission, in  $\text{dB}\mu\text{V/m}$

For 9kHz-30MHz test, test distance is 3m, extrapolation limit shall be calculated using Equation:

$$E_{\text{limit-measure}} = E_{\text{limit-Standard}} + 40 \times \log_{10} (d_{\text{standard}}/d_{\text{measure}})$$

The basic equation is as follows:

$$\text{Result} = \text{Reading} + \text{Factor}$$

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Result}$$

#### 4.2.6 Test Result

Please refer to section 5.2.


### 4.3 Minimum 6 dB Bandwidth

#### 4.3.1 Applicable Standard

FCC §15.247 (a)(2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### 4.3.2 EUT Setup

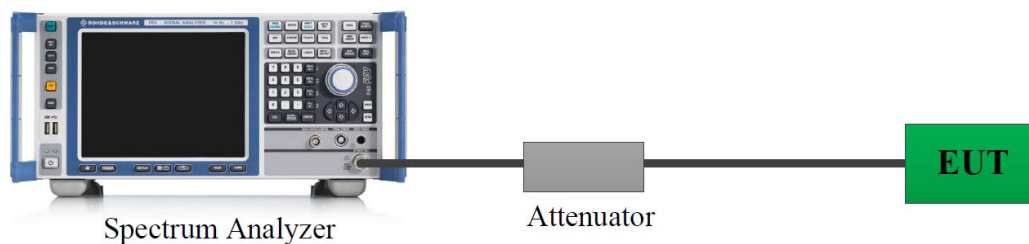

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

#### 4.3.3 Test Procedure

According to ANSI C63.10-2020 Section 11.8

- Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- Set the VBW  $\geq [3 \times \text{RBW}]$ .
- Detector = peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.
- Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.

#### 4.3.4 Test Result

Please refer to section 5.3.


## 4.4 Maximum Conducted Output Power

### 4.4.1 Applicable Standard

FCC §15.247 (b)(3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### 4.4.2 EUT Setup

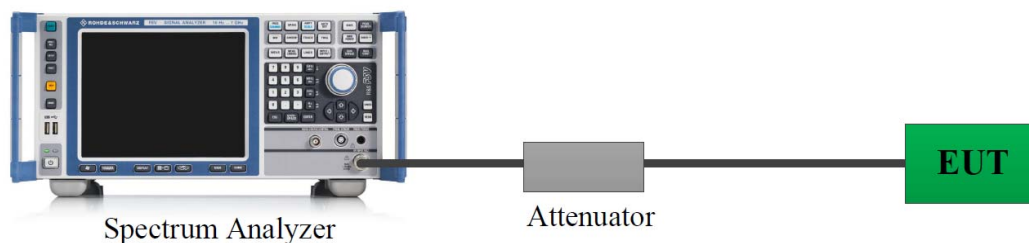

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

### 4.4.3 Test Procedure

According to ANSI C63.10-2020 Section 11.9.1.1

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the  $RBW \geq DTS$  bandwidth.
- Set  $VBW \geq [3 \times RBW]$ .
- Set  $span \geq [3 \times RBW]$ .
- Sweep time = No faster than coupled (auto) time.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

### 4.4.4 Test Result

Please refer to section 5.4.


## 4.5 Maximum power spectral density

### 4.5.1 Applicable Standard

FCC §15.247 (e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 4.5.2 EUT Setup

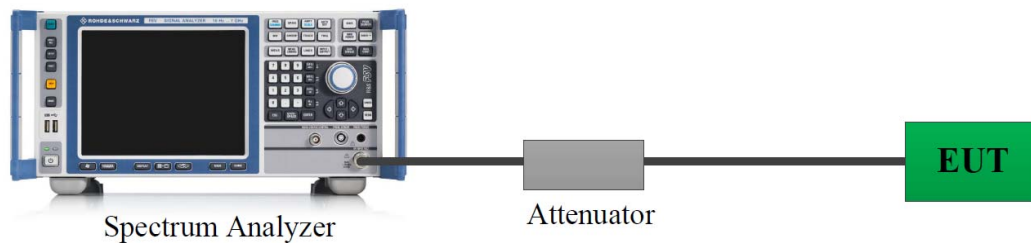

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

### 4.5.3 Test Procedure

According to ANSI C63.10-2020 Section 11.10.2

- Set analyzer center frequency to DTS channel center frequency.
- Set the span  $>1.5$  times the DTS bandwidth.
- Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set the VBW  $\geq [3 \times \text{RBW}]$ .
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

### 4.5.4 Test Result

Please refer to section 5.5.


## 4.6 100 kHz Bandwidth of Frequency Band Edge

### 4.6.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 4.6.2 EUT Setup

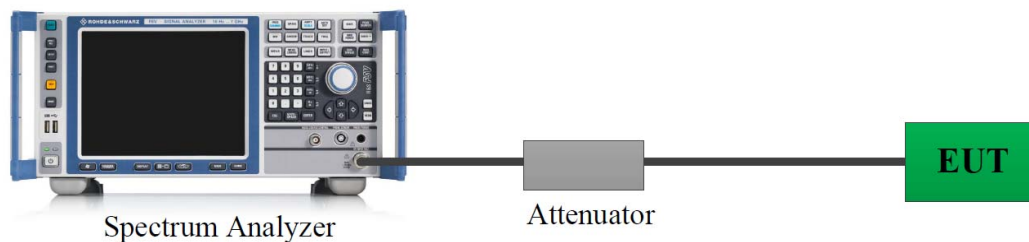

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

### 4.6.3 Test Procedure

According to ANSI C63.10-2020 Section 11.11

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW  $\geq [3 \times \text{RBW}]$ .
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

### 4.6.4 Test Result

Please refer to section 5.6.

## 4.7 Duty Cycle

### 4.7.1 EUT Setup

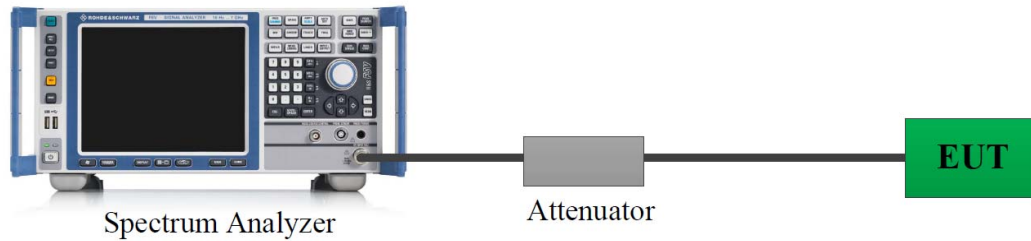

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

### 4.7.2 Test Procedure

According to ANSI C63.10-2020 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value.
- 3) Set  $VBW \geq RBW$ . Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)

### 4.7.3 Judgment

Report only, please refer to section 5.7.

## **4.8 Antenna Requirement**

### **4.8.1 Applicable Standard**

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### **4.8.2 Judgment**

**Compliant.** Please refer to the Antenna Information detail in Section 1.3.



5. TEST DATA AND RESULTS

5.1 AC Line Conducted Emissions

Serial Number:	2YIJ-13, 2YIJ-17	Test Date:	2025/3/1
Test Site:	CE	Test Mode:	Transmitting
Tester:	Yukin Qiu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.4	Relative Humidity: (%)	64	ATM Pressure: (kPa)	101.7
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101614	2024/9/5	2025/9/4
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2024/9/5	2025/9/4
R&S	EMI Test Receiver	ESCI	101121	2024/9/5	2025/9/4
Audix	Test Software	E3	191218 V9	N/A	N/A

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Note: BLE 1M High channel was tested.

M1: Transmitting&amp; Adapter 1#&amp; Sample 1#

Project No.: 2502Q44141E-RF  
Port: Line  
Test Mode: Transmitting (M1)  
IF B/W 9kHz PK/AV

Serial No.: 2YIJ-13  
Tester: Yukin Qiu

Date: 2025-03-01

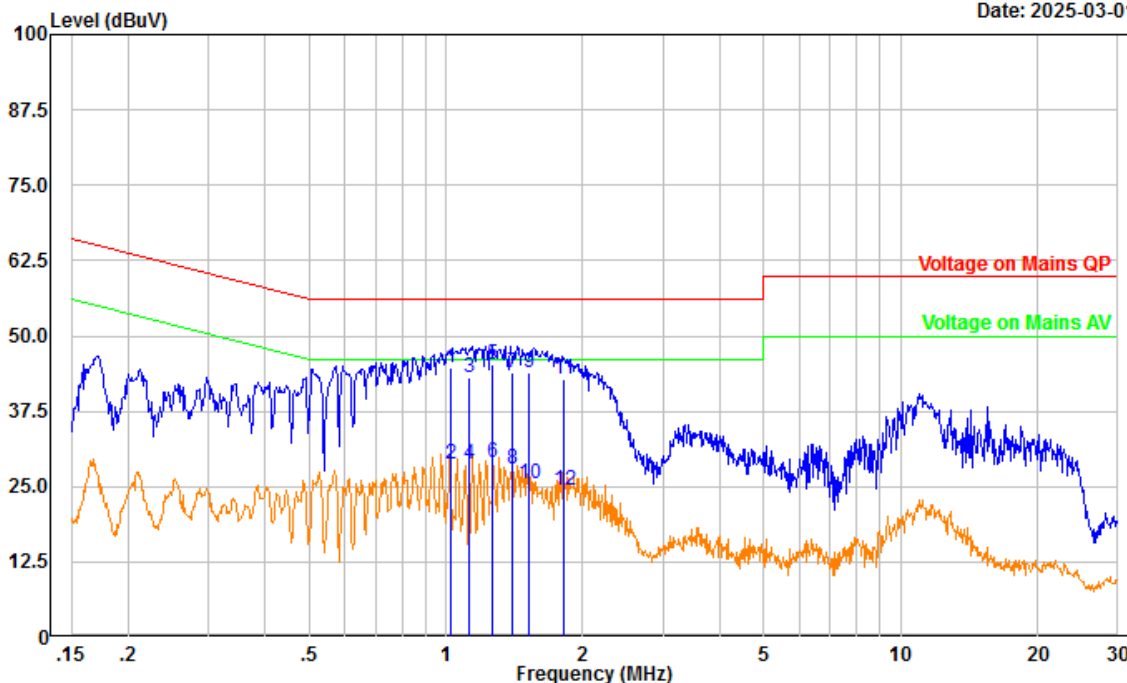


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	1.023	33.94	10.85	44.79	56.00	11.21	QP
2	1.023	17.93	10.85	28.78	46.00	17.22	Average
3	1.128	32.25	10.85	43.10	56.00	12.90	QP
4	1.128	17.93	10.85	28.78	46.00	17.22	Average
5	1.268	34.34	10.84	45.18	56.00	10.82	QP
6	1.268	18.14	10.84	28.98	46.00	17.02	Average
7	1.395	32.95	10.84	43.79	56.00	12.21	QP
8	1.395	17.00	10.84	27.84	46.00	18.16	Average
9	1.520	33.04	10.83	43.87	56.00	12.13	QP
10	1.520	14.51	10.83	25.34	46.00	20.66	Average
11	1.816	31.95	10.83	42.78	56.00	13.22	QP
12	1.816	13.65	10.83	24.48	46.00	21.52	Average

Project No.: 2502Q44141E-RF  
 Port: neutral  
 Test Mode: Transmitting (M1)  
 IF B/W 9kHz PK/AV

Serial No.: 2YIJ-13  
 Tester: Yukin Qiu

Date: 2025-03-01

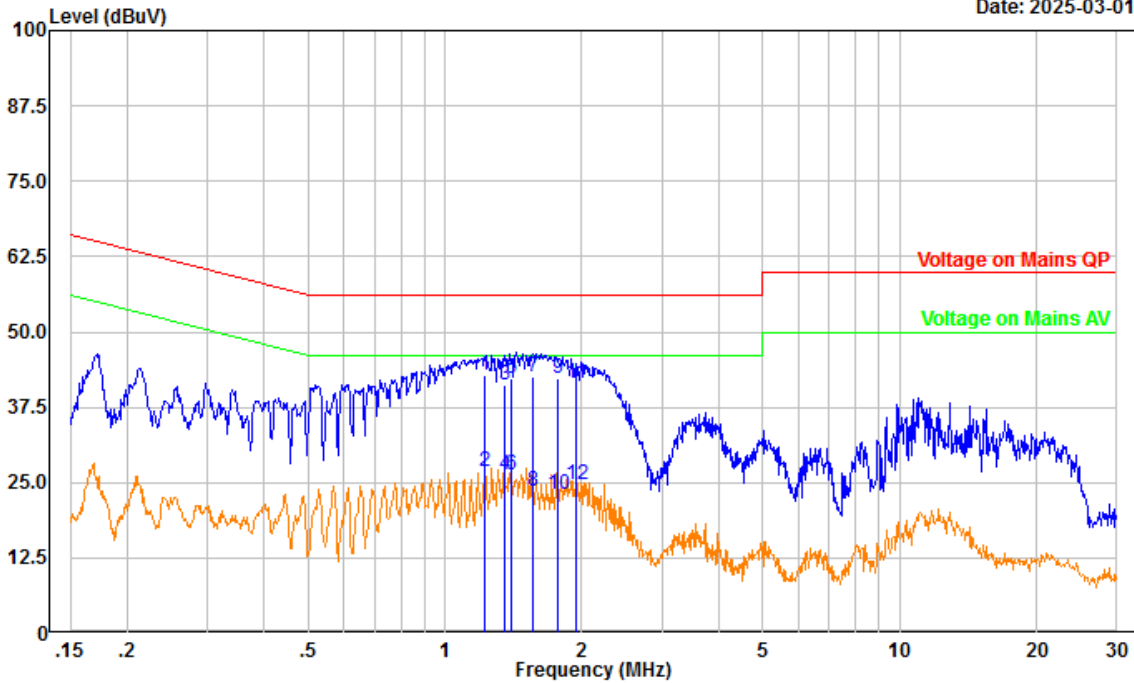


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
<hr/>							
1	1.226	31.99	10.86	42.85	56.00	13.15	QP
2	1.226	15.90	10.86	26.76	46.00	19.24	Average
3	1.348	30.20	10.87	41.07	56.00	14.93	QP
4	1.348	15.49	10.87	26.36	46.00	19.64	Average
5	1.394	31.34	10.88	42.22	56.00	13.78	QP
6	1.394	15.49	10.88	26.37	46.00	19.63	Average
7	1.563	31.60	10.89	42.49	56.00	13.51	QP
8	1.563	12.60	10.89	23.49	46.00	22.51	Average
9	1.774	31.31	10.91	42.22	56.00	13.78	QP
10	1.774	12.04	10.91	22.95	46.00	23.05	Average
11	1.943	30.64	10.91	41.55	56.00	14.45	QP
12	1.943	13.64	10.91	24.55	46.00	21.45	Average

## M2: Transmitting&amp; Adapter 2#&amp; Sample 1#

Project No.: 2502Q44141E-RF  
 Port: Line  
 Test Mode: Transmitting (M2)  
 IF B/W 9kHz PK/AV

Serial No.: 2YIJ-13  
 Tester: Yukin Qiu

Date: 2025-03-01

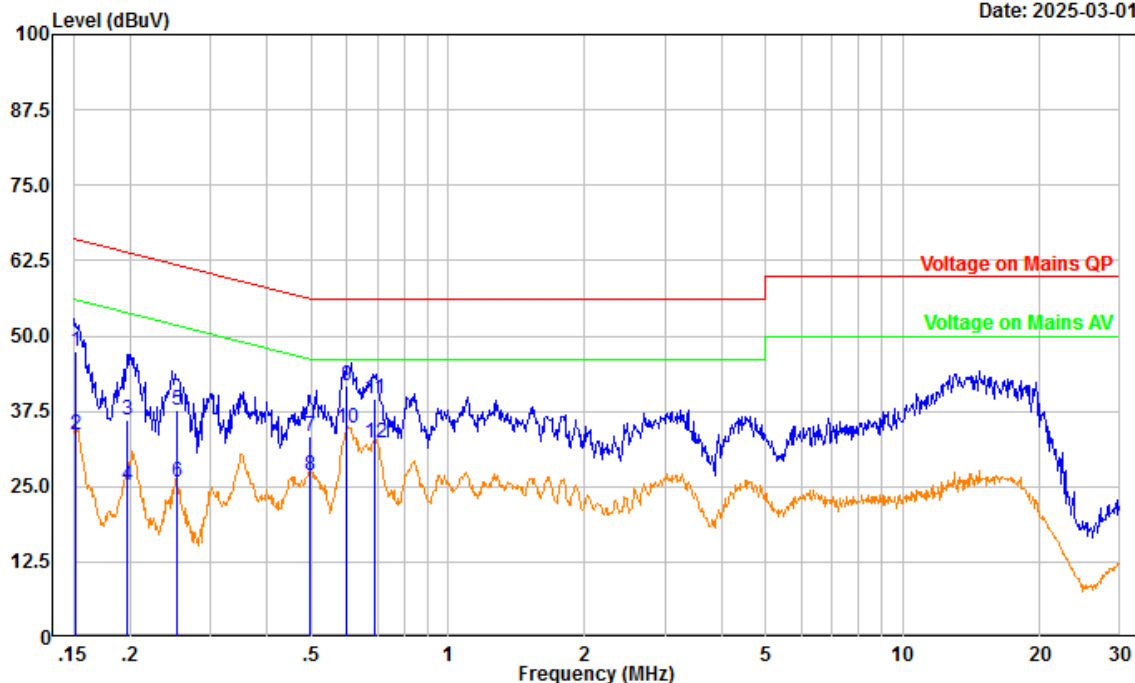


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
<hr/>							
1	0.152	36.64	10.75	47.39	65.91	18.52	QP
2	0.152	22.87	10.75	33.62	55.91	22.29	Average
3	0.197	25.26	10.84	36.10	63.74	27.64	QP
4	0.197	14.43	10.84	25.27	53.74	28.47	Average
5	0.254	26.92	10.83	37.75	61.62	23.87	QP
6	0.254	14.81	10.83	25.64	51.62	25.98	Average
7	0.498	22.45	10.84	33.29	56.03	22.74	QP
8	0.498	16.03	10.84	26.87	46.03	19.16	Average
9	0.600	30.84	10.82	41.66	56.00	14.34	QP
10	0.600	23.83	10.82	34.65	46.00	11.35	Average
11	0.688	28.64	10.86	39.50	56.00	16.50	QP
12	0.688	21.42	10.86	32.28	46.00	13.72	Average

Project No.: 2502Q44141E-RF  
Port: neutral  
Test Mode: Transmitting (M2)  
IF B/W 9kHz PK/AV

Serial No.: 2YIJ-13  
Tester: Yukin Qiu

Date: 2025-03-01

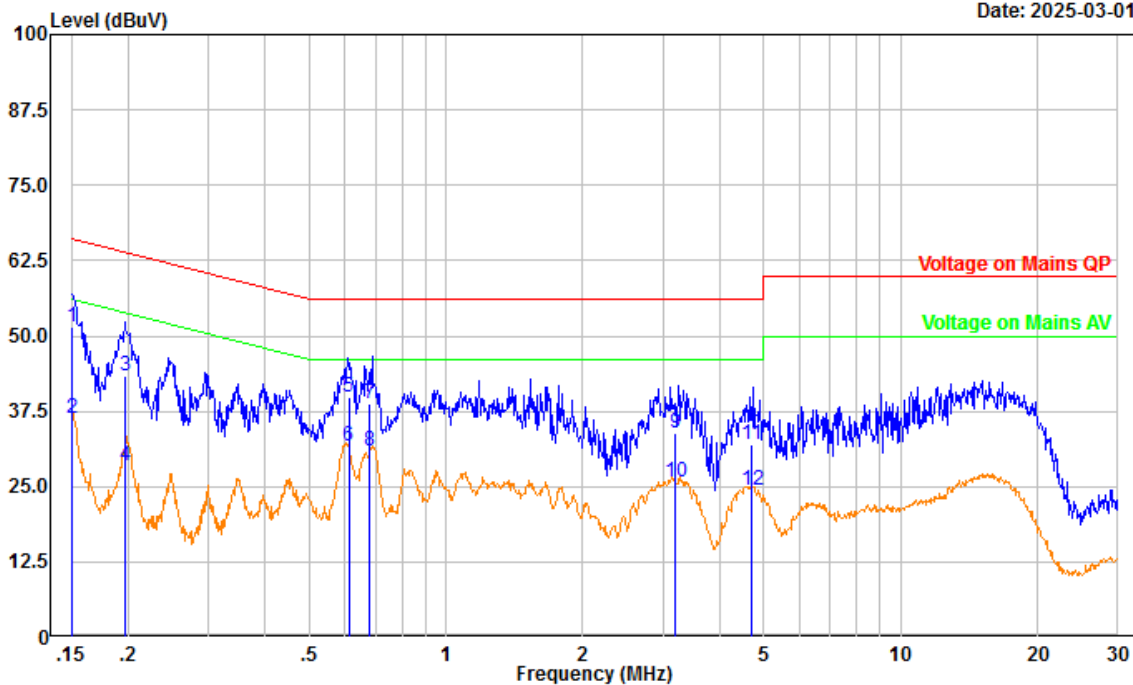


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.150	40.72	10.85	51.57	65.98	14.41	QP
2	0.150	25.39	10.85	36.24	55.98	19.74	Average
3	0.198	32.51	10.85	43.36	63.71	20.35	QP
4	0.198	17.56	10.85	28.41	53.71	25.30	Average
5	0.611	29.11	10.72	39.83	56.00	16.17	QP
6	0.611	21.11	10.72	31.83	46.00	14.17	Average
7	0.678	28.04	10.75	38.79	56.00	17.21	QP
8	0.678	20.05	10.75	30.80	46.00	15.20	Average
9	3.187	23.12	10.88	34.00	56.00	22.00	QP
10	3.187	14.99	10.88	25.87	46.00	20.13	Average
11	4.688	21.23	10.85	32.08	56.00	23.92	QP
12	4.688	13.50	10.85	24.35	46.00	21.65	Average

## M3: Transmitting&amp; Adapter 1#&amp; Sample 2#

Project No.: 2502Q44141E-RF  
Port: Line  
Test Mode: Transmitting (M3)  
IF B/W 9kHz PK/AV

Serial No.: 2YIJ-17  
Tester: Yukin Qiu

Date: 2025-03-01

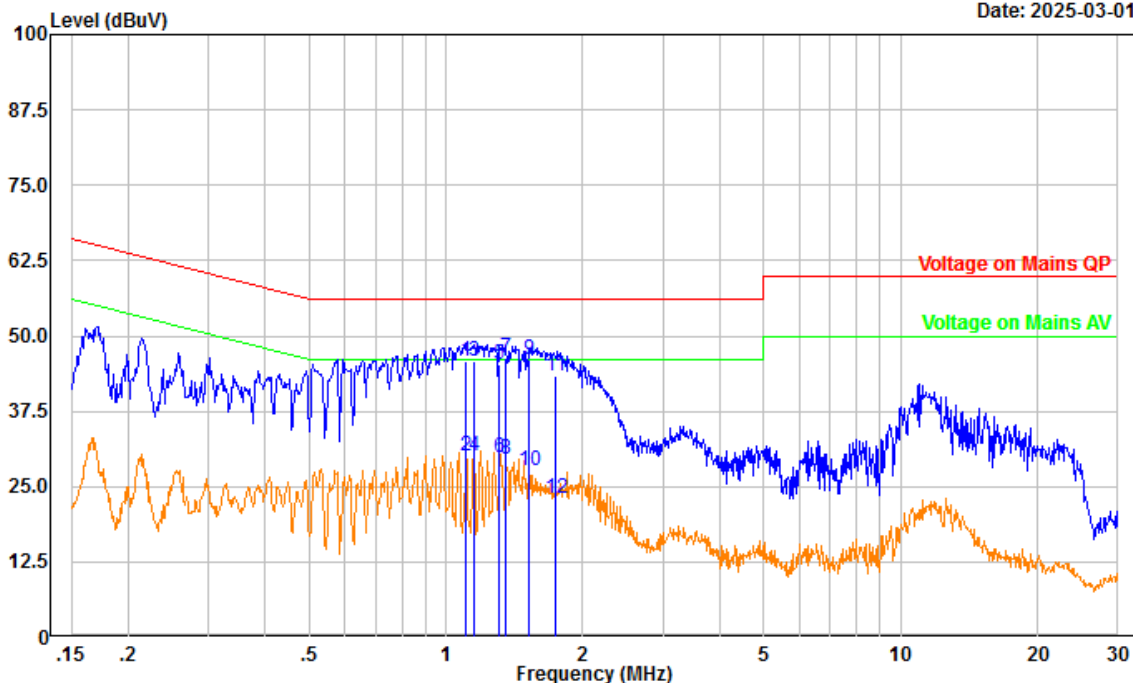


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	1.108	35.04	10.85	45.89	56.00	10.11	QP
2	1.108	19.32	10.85	30.17	46.00	15.83	Average
3	1.149	35.03	10.85	45.88	56.00	10.12	QP
4	1.149	19.32	10.85	30.17	46.00	15.83	Average
5	1.312	34.33	10.84	45.17	56.00	10.83	QP
6	1.312	18.92	10.84	29.76	46.00	16.24	Average
7	1.358	35.53	10.84	46.37	56.00	9.63	QP
8	1.358	18.81	10.84	29.65	46.00	16.35	Average
9	1.522	35.24	10.83	46.07	56.00	9.93	QP
10	1.522	16.88	10.83	27.71	46.00	18.29	Average
11	1.737	32.62	10.83	43.45	56.00	12.55	QP
12	1.737	12.25	10.83	23.08	46.00	22.92	Average

Project No.: 2502Q44141E-RF  
Port: neutral  
Test Mode: Transmitting (M3)  
IF B/W 9kHz PK/AV

Serial No.: 2YIJ-17  
Tester: Yukin Qiu

Date: 2025-03-01

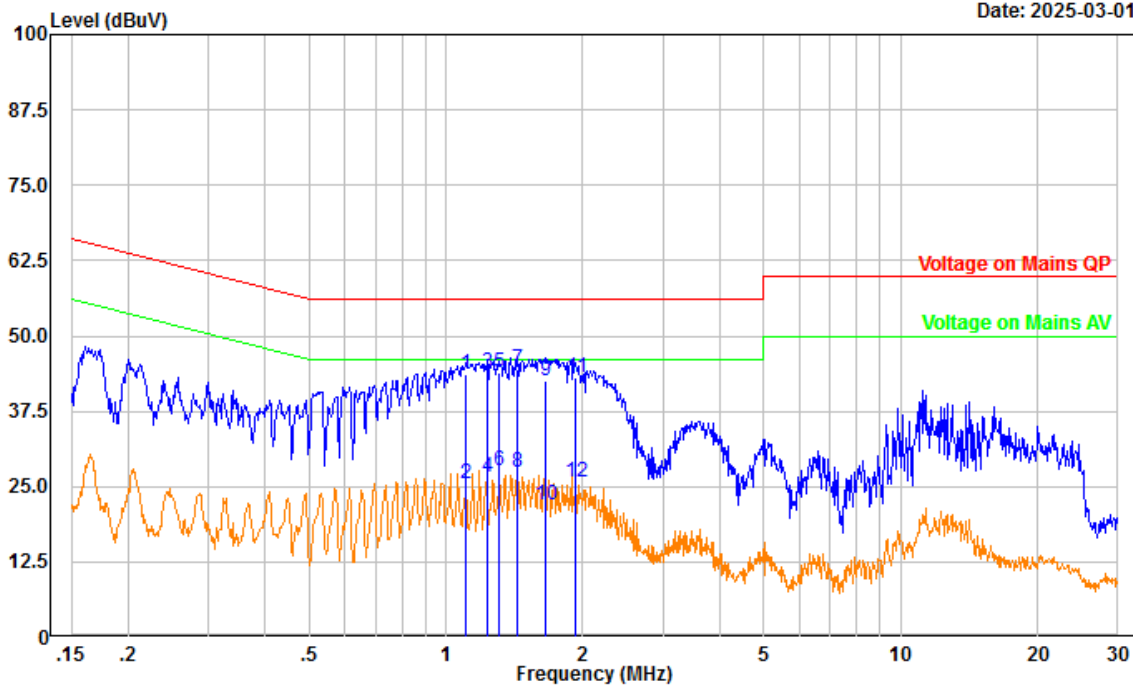

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	1.109	32.82	10.86	43.68	56.00	12.32	QP
2	1.109	14.57	10.86	25.43	46.00	20.57	Average
3	1.233	33.10	10.86	43.96	56.00	12.04	QP
4	1.233	15.59	10.86	26.45	46.00	19.55	Average
5	1.313	33.08	10.87	43.95	56.00	12.05	QP
6	1.313	16.70	10.87	27.57	46.00	18.43	Average
7	1.437	33.59	10.88	44.47	56.00	11.53	QP
8	1.437	16.46	10.88	27.34	46.00	18.66	Average
9	1.651	31.78	10.90	42.68	56.00	13.32	QP
10	1.651	11.06	10.90	21.96	46.00	24.04	Average
11	1.929	32.18	10.91	43.09	56.00	12.91	QP
12	1.929	14.85	10.91	25.76	46.00	20.24	Average

5.2 Radiation Spurious Emissions

1)9kHz - 1GHz

Serial Number:	2YIJ-13, 2YIJ-17	Test Date:	2025/3/4
Test Site:	Chamber A	Test Mode:	Transmitting
Tester:	Jayce Wang	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	24.2	Relative Humidity: (%)	64	ATM Pressure: (kPa)	100.3

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/25	2026/10/24
Sunol Sciences	Hybrid Antenna	JB3	A060611-2	2024/4/16	2027/4/15
Narda	Coaxial Attenuator	757C-6dB	34010	2024/4/16	2027/4/15
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	372193	2024/8/16	2025/8/15
R&S	EMI Test Receiver	ESR3	102453	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table and plots.  
After pre-scan in the X, Y and Z axes of orientation, the worst case is refer to table and plots.

Note: BLE 1M High channel was tested.



**9kHz~30MHz**

Three antenna orientations (parallel, perpendicular, and ground-parallel) was measured, the worst orientations was below:

M1: Transmitting& Adapter 1#& Sample 1#

Project No.: 2502Q44141E-RF

Serial No.: 2YIJ-13


Polarization: Parallel

Tester: Jayce Wang

Test Mode: Transmitting M1

: RBW:300Hz,VBW:1kHz

Date: 2025-03-04

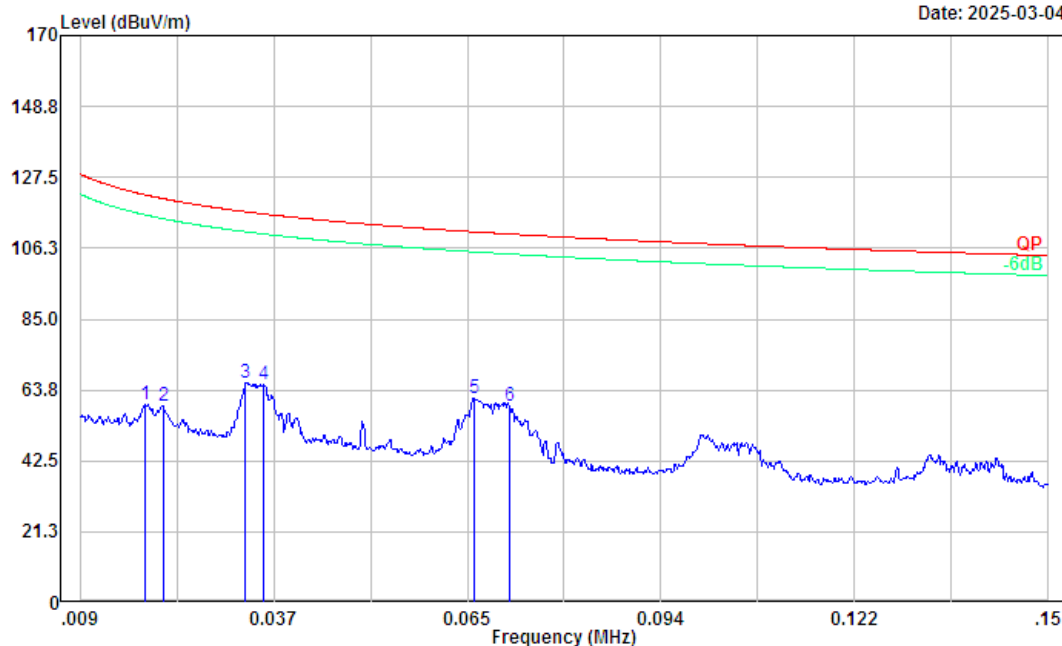


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.019	10.17	49.36	59.53	122.22	62.69	Peak
2	0.021	10.04	48.75	58.79	121.11	62.32	Peak
3	0.033	19.61	46.18	65.79	117.21	51.42	Peak
4	0.036	19.84	45.70	65.54	116.53	50.99	Peak
5	0.066	20.69	40.76	61.45	111.16	49.71	Peak
6	0.072	18.94	39.88	58.82	110.51	51.69	Peak

Project No.: 2502Q44141E-RF  
Polarization: Parallel  
Test Mode: Transmitting M1  
: RBW:10kHz,VBW:30kHz

Serial No.: 2YIJ-13  
Tester: Jayce Wang

Date: 2025-03-04

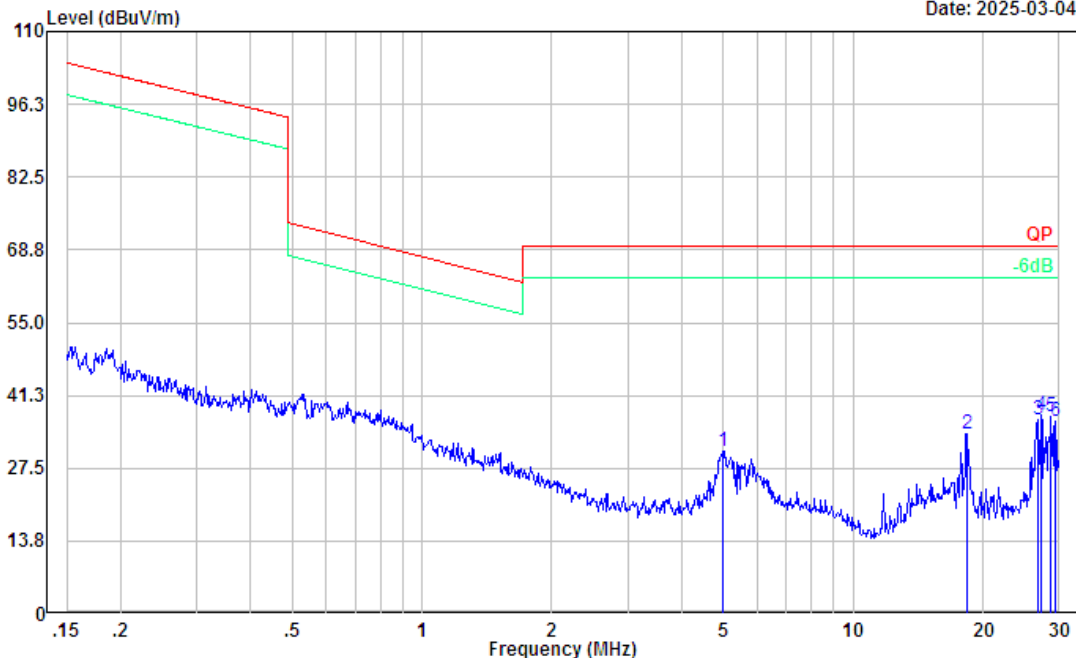


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4.978	25.05	5.73	30.78	69.54	38.76	Peak
2	18.328	30.27	3.66	33.93	69.54	35.61	Peak
3	26.699	33.24	3.40	36.64	69.54	32.90	Peak
4	27.271	34.12	3.49	37.61	69.54	31.93	Peak
5	28.755	33.67	3.47	37.14	69.54	32.40	Peak
6	29.371	33.12	3.39	36.51	69.54	33.03	Peak

## M2: Transmitting&amp; Adapter 2#&amp; Sample 1#

Project No.: 2502Q44141E-RF  
Polarization: Parallel  
Test Mode: Transmitting M2  
: RBW:300Hz,VBW:1kHz

Serial No.: 2YIJ-13  
Tester: Jayce Wang

Date: 2025-03-04

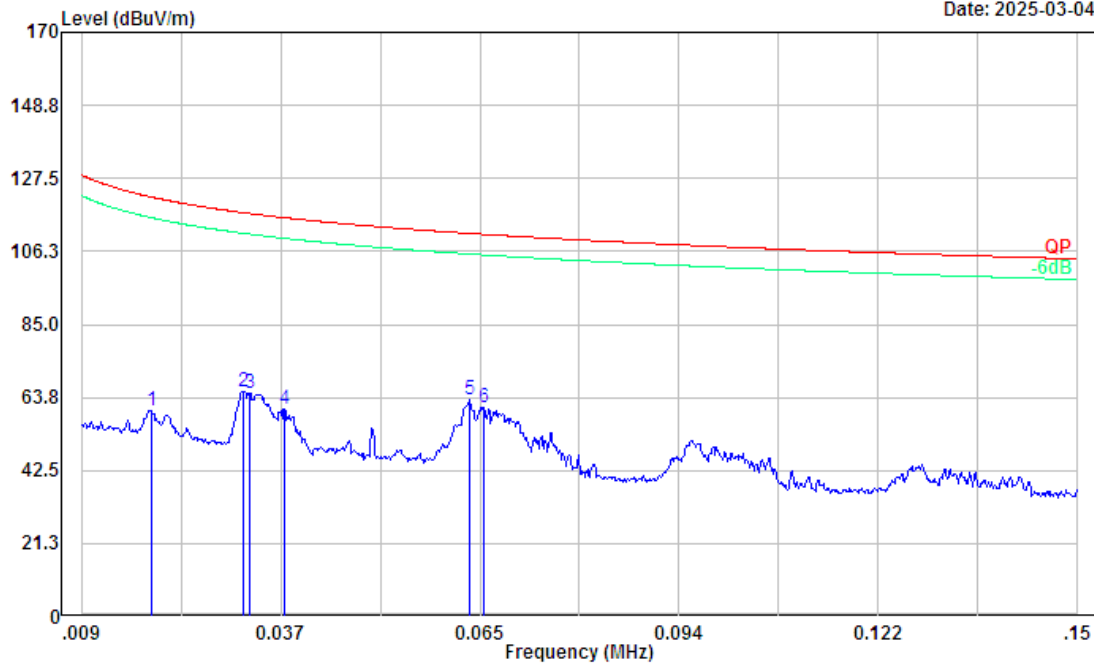


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.019	10.79	49.29	60.08	122.09	62.01	Peak
2	0.032	19.03	46.41	65.44	117.54	52.10	Peak
3	0.033	18.68	46.23	64.91	117.28	52.37	Peak
4	0.038	14.88	45.33	60.21	116.06	55.85	Peak
5	0.064	21.84	41.18	63.02	111.50	48.48	Peak
6	0.066	19.96	40.84	60.80	111.22	50.42	Peak

Project No.: 2502Q44141E-RF  
Polarization: Parallel  
Test Mode: Transmitting M2  
: RBW:10kHz,VBW:30kHz

Serial No.: 2YIJ-13  
Tester: Jayce Wang

Date: 2025-03-04

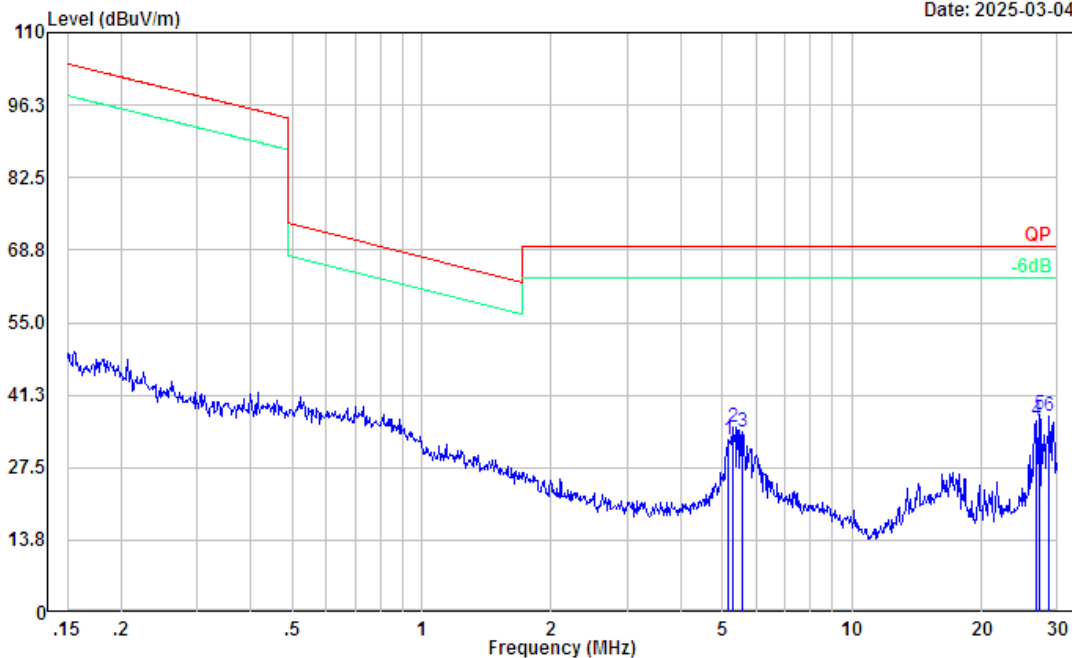


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5.139	27.09	5.61	32.70	69.54	36.84	Peak
2	5.305	29.80	5.50	35.30	69.54	34.24	Peak
3	5.564	28.90	5.33	34.23	69.54	35.31	Peak
4	26.699	33.01	3.40	36.41	69.54	33.13	Peak
5	27.271	33.99	3.49	37.48	69.54	32.06	Peak
6	28.755	33.92	3.47	37.39	69.54	32.15	Peak

## M3: Transmitting&amp; Adapter 1#&amp; Sample 2#

Project No.: 2502Q44141E-RF  
Polarization: Parallel  
Test Mode: Transmitting M3  
: RBW:300Hz,VBW:1kHz

Serial No.: 2YIJ-17  
Tester: Jayce Wang

Date: 2025-03-04

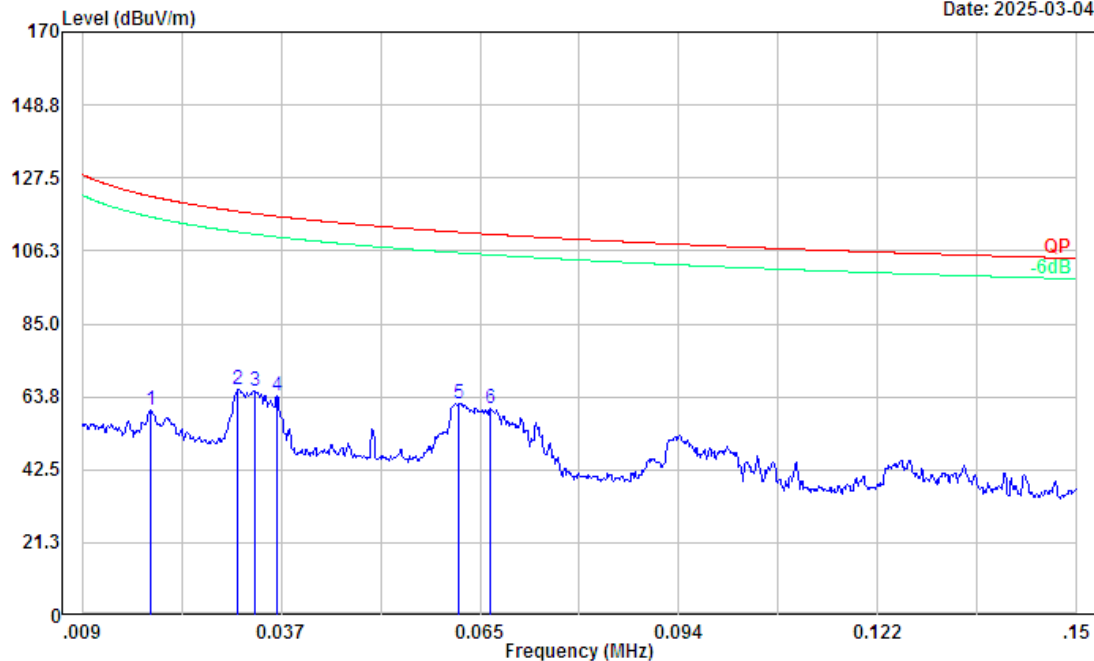


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.019	10.35	49.32	59.67	122.15	62.48	Peak
2	0.031	19.22	46.54	65.76	117.74	51.98	Peak
3	0.033	19.14	46.12	65.26	117.13	51.87	Peak
4	0.037	18.44	45.54	63.98	116.33	52.35	Peak
5	0.062	20.40	41.43	61.83	111.71	49.88	Peak
6	0.067	19.52	40.67	60.19	111.09	50.90	Peak

Project No.: 2502Q44141E-RF  
Polarization: Parallel  
Test Mode: Transmitting M3  
: RBW:10kHz,VBW:30kHz

Serial No.: 2YIJ-17  
Tester: Jayce Wang

Date: 2025-03-04

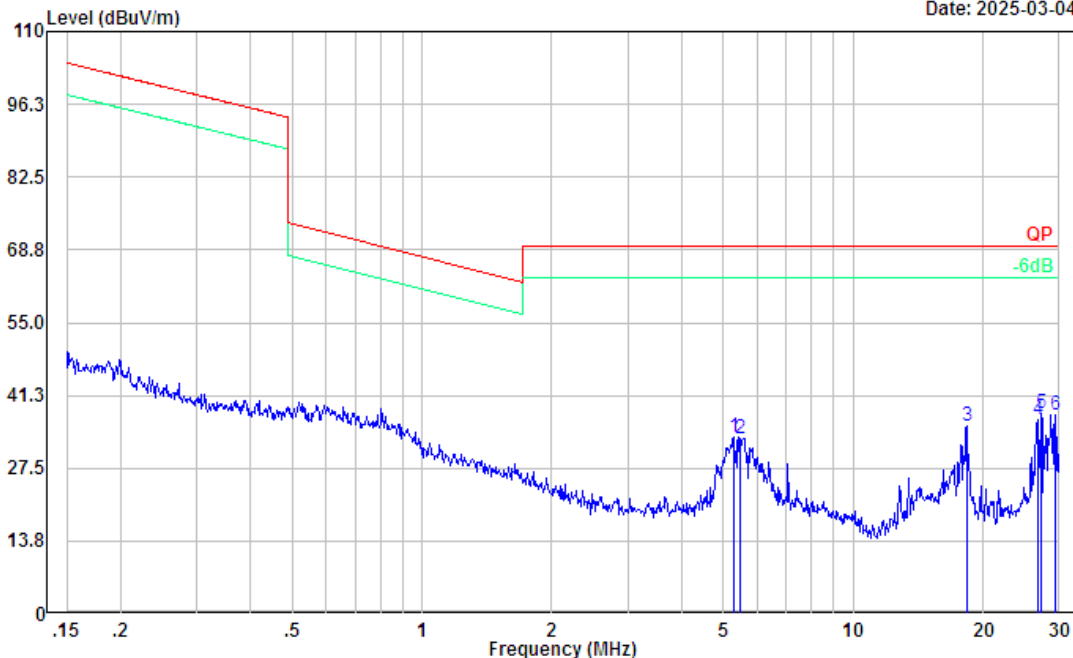


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5.305	27.79	5.50	33.29	69.54	36.25	Peak
2	5.476	27.78	5.39	33.17	69.54	36.37	Peak
3	18.328	31.70	3.66	35.36	69.54	34.18	Peak
4	26.699	33.15	3.40	36.55	69.54	32.99	Peak
5	27.271	34.36	3.49	37.85	69.54	31.69	Peak
6	29.371	34.19	3.39	37.58	69.54	31.96	Peak

30MHz-1GHz

M1: Transmitting& Adapter 1#& Sample 1#

Project No.: 2502Q44141E-RF  
Polarization: Horizontal  
Test Mode: Transmitting M1  
: RBW:100kHz,VBW:300kHz

Serial No.: 2YIJ-13  
Tester: Jayce Wang

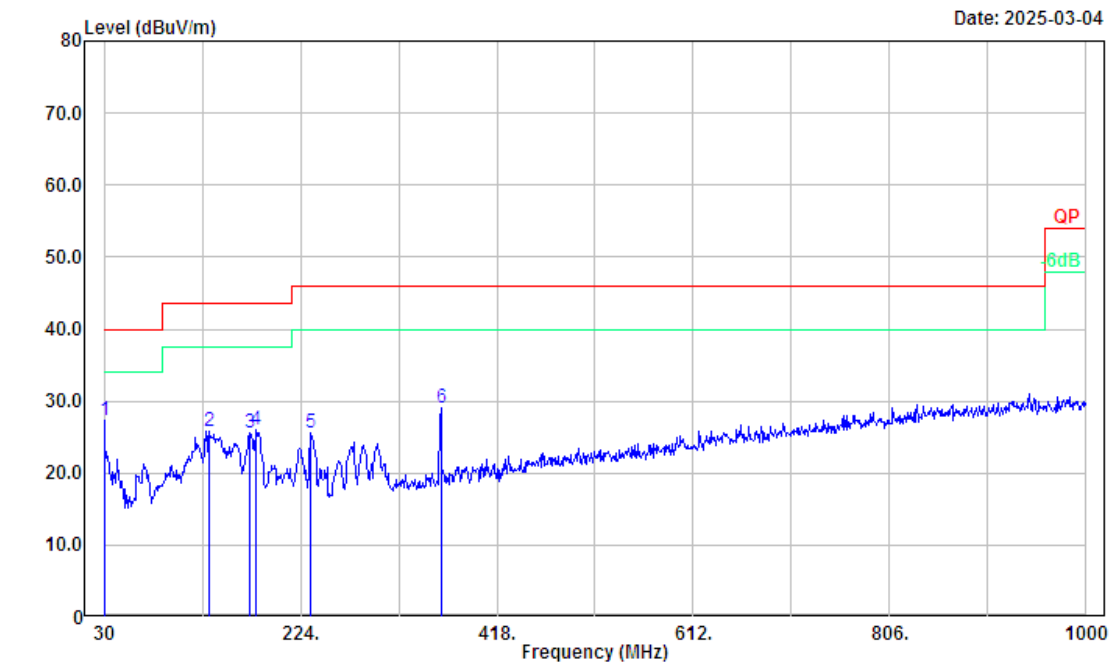

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.00	31.10	-3.71	27.39	40.00	12.61	Peak
2	133.79	36.05	-10.26	25.79	43.50	17.71	Peak
3	173.56	37.43	-11.91	25.52	43.50	17.98	Peak
4	180.35	38.07	-12.15	25.92	43.50	17.58	Peak
5	234.67	36.85	-11.19	25.66	46.00	20.34	Peak
6	362.71	36.74	-7.70	29.04	46.00	16.96	Peak

Project No.: 2502Q44141E-RF


Serial No.: 2YIJ-13

Polarization: Vertical

Tester: Jayce Wang

Test Mode: Transmitting M1

: RBW:100kHz,VBW:300kHz

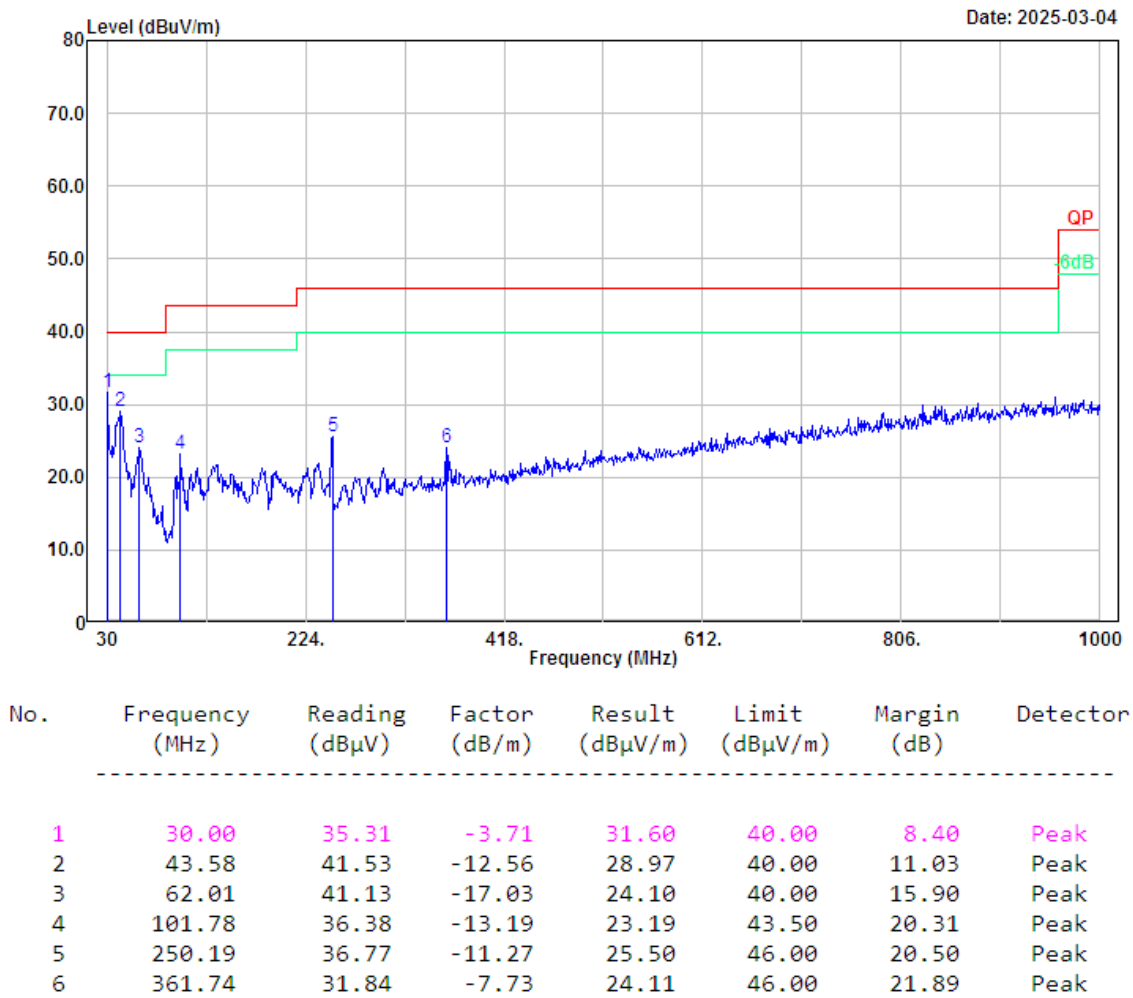




M2: Transmitting& Adapter 2#& Sample 1#


Project No.: 2502Q44141E-RF  
Polarization: Horizontal  
Test Mode: Transmitting M2  
: RBW:100kHz,VBW:300kHz

Serial No.: 2YIJ-13  
Tester: Jayce Wang

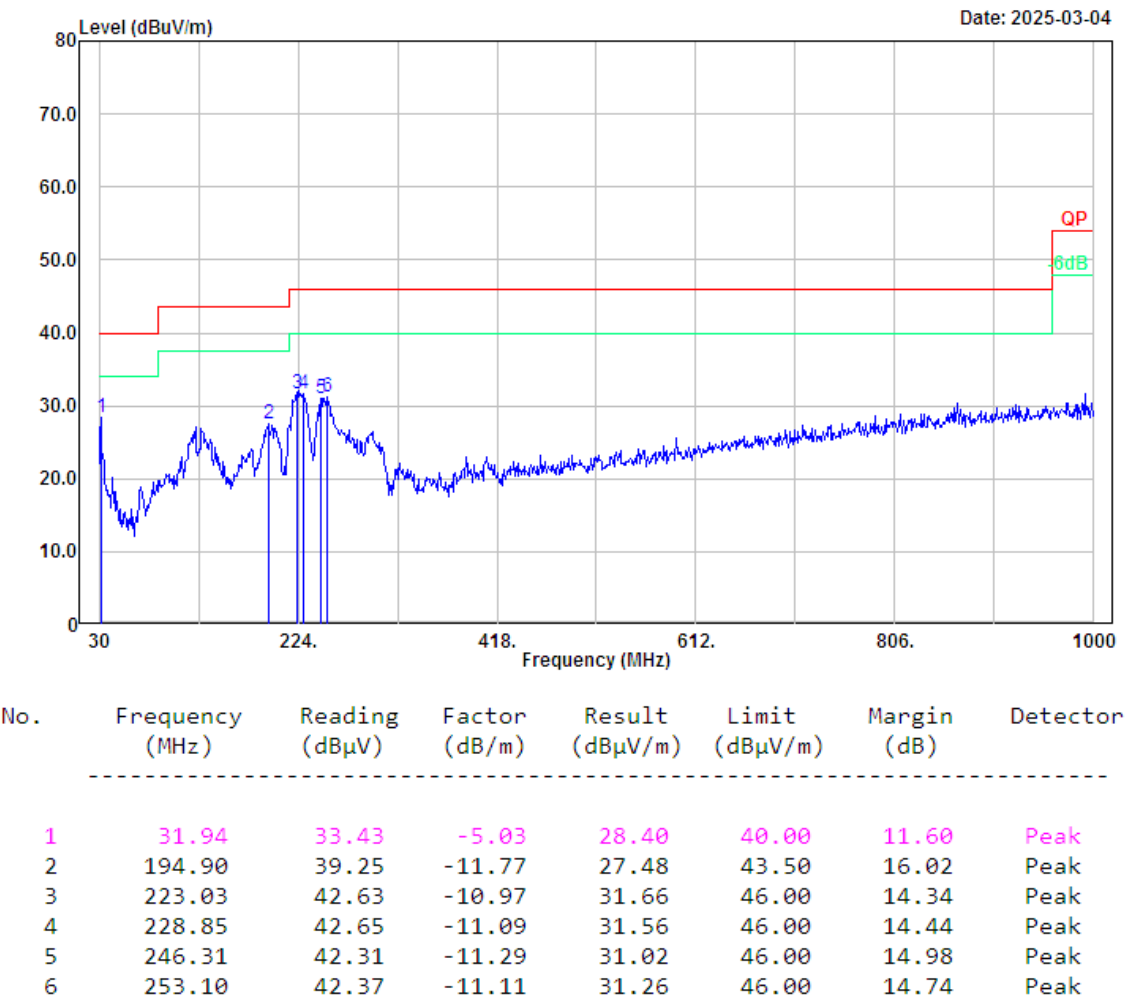

Project No.: 2502Q44141E-RF  
Polarization: Vertical  
Test Mode: Transmitting M2  
: RBW:100kHz,VBW:300kHz

Serial No.: 2YIJ-13  
Tester: Jayce Wang

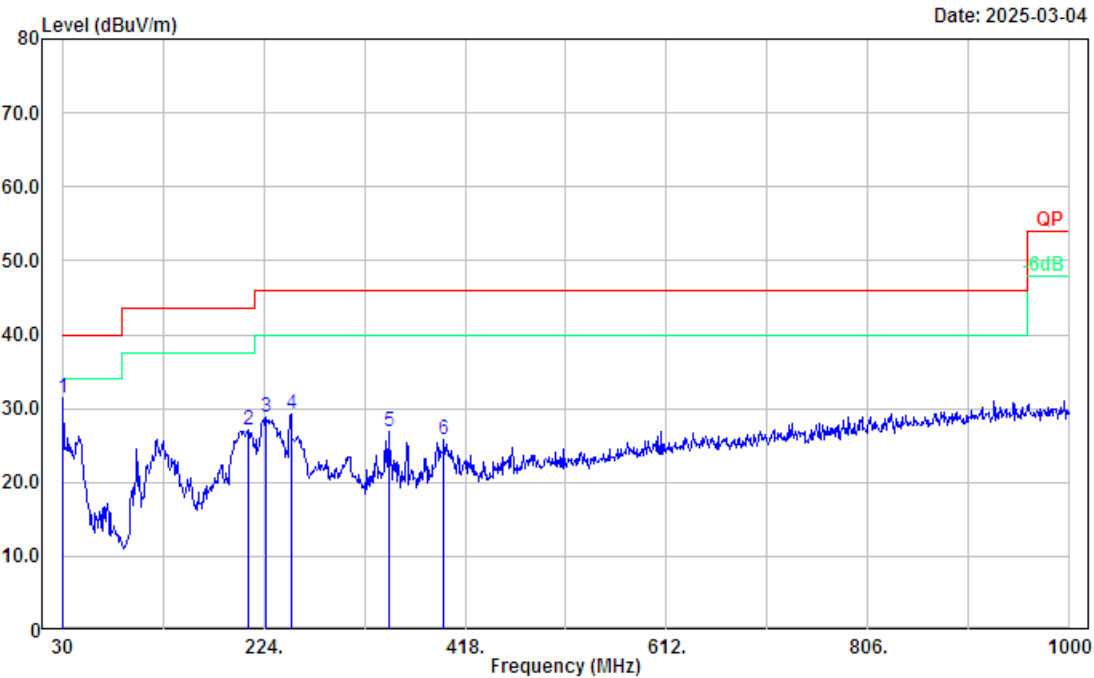


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
<hr/>							
1	30.00	35.08	-3.71	31.37	40.00	8.63	Peak
2	209.45	38.23	-11.06	27.17	43.50	16.33	Peak
3	226.91	39.81	-11.05	28.76	46.00	17.24	Peak
4	250.19	40.43	-11.27	29.16	46.00	16.84	Peak
5	344.28	34.99	-8.06	26.93	46.00	19.07	Peak
6	397.63	32.54	-6.77	25.77	46.00	20.23	Peak

M3: Transmitting& Adapter 1#& Sample 2#

Project No.: 2502Q44141E-RF  
Polarization: Horizontal  
Test Mode: Transmitting M3  
: RBW:100kHz,VBW:300kHz

Serial No.: 2YIJ-17  
Tester: Jayce Wang

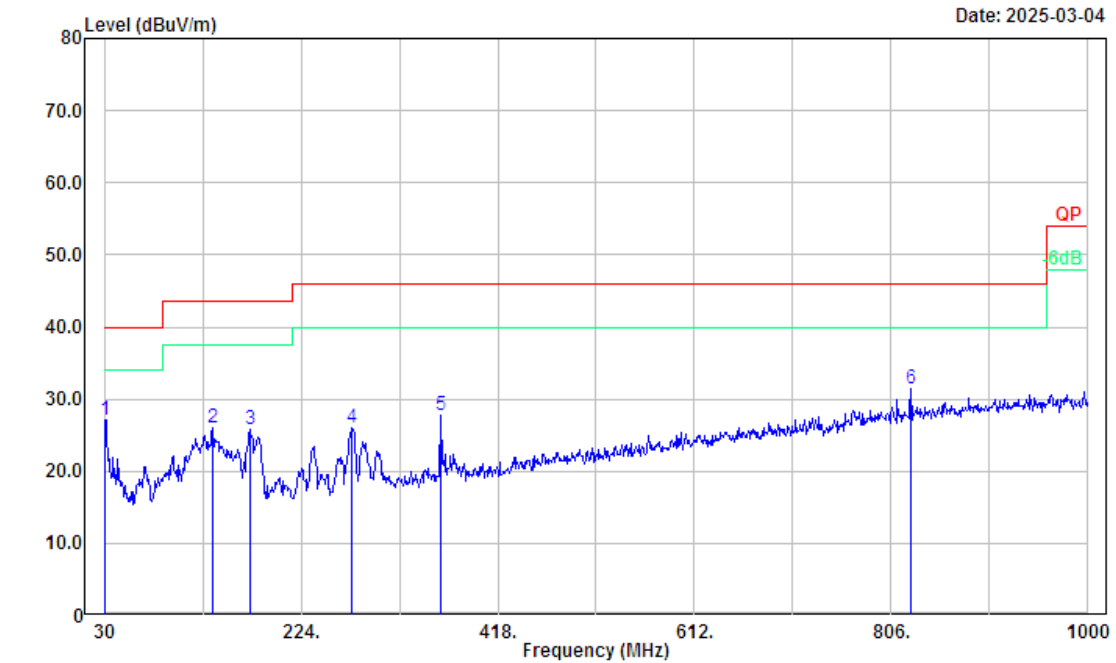


No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	30.00	30.91	-3.71	27.20	40.00	12.80	Peak
2	136.70	36.56	-10.48	26.08	43.50	17.42	Peak
3	173.56	37.71	-11.91	25.80	43.50	17.70	Peak
4	273.47	36.41	-10.42	25.99	46.00	20.01	Peak
5	361.74	35.57	-7.73	27.84	46.00	18.16	Peak
6	825.40	29.44	2.05	31.49	46.00	14.51	Peak

Project No.: 2502Q44141E-RF  
Polarization: Vertical  
Test Mode: Transmitting M3  
: RBW:100kHz,VBW:300kHz

Serial No.: 2YIJ-17  
Tester: Jayce Wang

Date: 2025-03-04

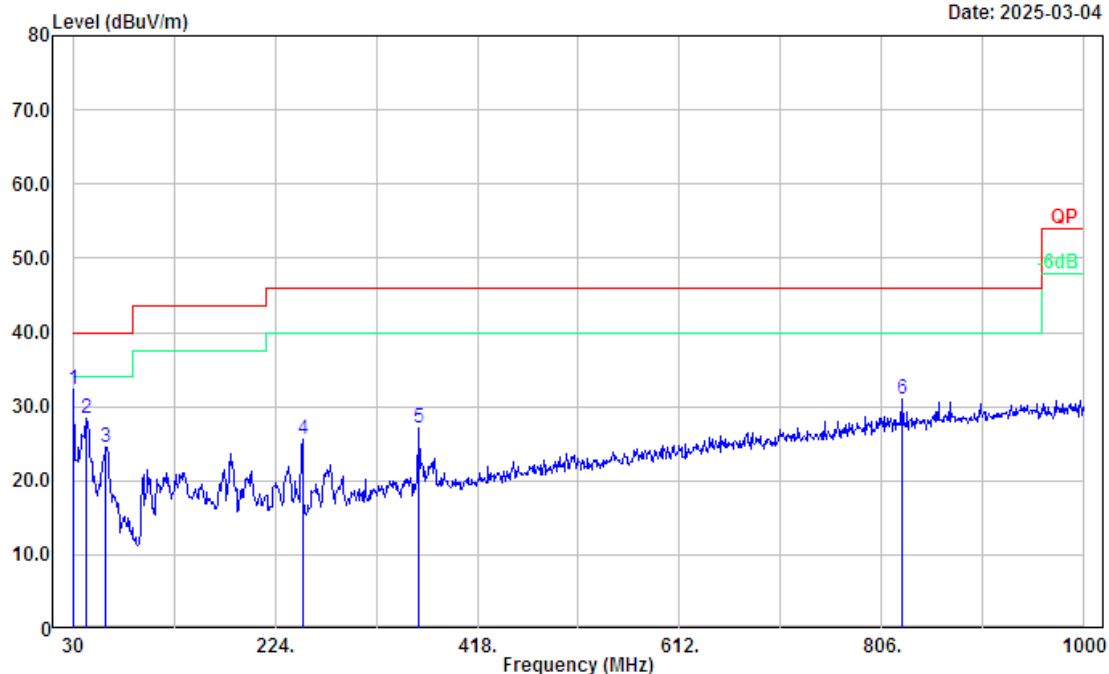

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.00	36.01	-3.71	32.30	40.00	7.70	Peak
2	43.58	40.88	-12.56	28.32	40.00	11.68	Peak
3	62.01	41.63	-17.03	24.60	40.00	15.40	Peak
4	250.19	36.76	-11.27	25.49	46.00	20.51	Peak
5	361.74	34.92	-7.73	27.19	46.00	18.81	Peak
6	825.40	28.94	2.05	30.99	46.00	15.01	Peak

2) 1-25GHz:

Serial Number:	2YIJ-17	Test Date:	2025/3/20
Test Site:	Chamber B	Test Mode:	Transmitting
Tester:	Colin Yang	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	21.5	Relative Humidity: (%)	42	ATM Pressure: (kPa)	101.9

Test Equipment List and Details:



Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2024/11/17	2025/11/16
AH	Preamplifier	PAM-0118P	469	2024/4/15	2025/4/14
Audix	Test Software	E3	191218 V9	N/A	N/A
R&S	Spectrum Analyzer	FSV40	101944	2024/9/6	2025/9/5
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2023/2/22	2026/2/21
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2024/12/9	2025/12/8
AH	Preamplifier	PAM-1840VH	191	2024/9/5	2025/9/4
Decentest	Multiplex Switch Test Control Set & Filter Switch Unit	DT7220SCU & DT7220FCU	DC79902 & DC79905	2024/8/27	2025/8/26

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table and plots.  
After pre-scan in the X, Y and Z axes of orientation, the worst case is refer to table and plots.

1-18GHz:

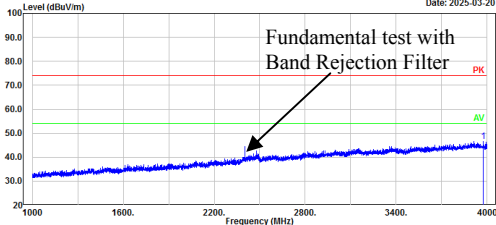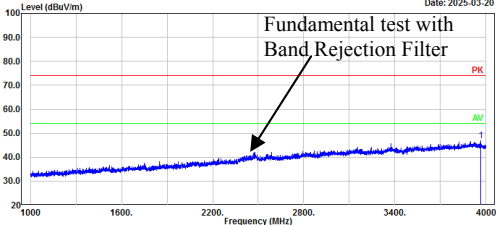
BLE 1M, Low Channel, Horizontal				BLE 1M, Low Channel, Vertical			
<div>Project No.: 2502Q44141E-RF Polarization: Horizontal Test Mode: Transmitting Note: BLE 1M low channel 2402MHz Peak:RBW:1MHz,VBW:30Hz</div>				<div>Project No.: 2502Q44141E-RF Polarization: Vertical Test Mode: Transmitting Note: BLE 1M low channel 2402MHz Peak:RBW:1MHz,VBW:30Hz</div>			
<div><div><div>Level (dBuV/m)</div><div>2025-03-20</div><div><div>Fundamental test with Band Rejection Filter</div></div></div></div>				<div><div><div>Level (dBuV/m)</div><div>2025-03-20</div><div><div>Fundamental test with Band Rejection Filter</div></div></div></div>			
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	3974.20	50.29	-3.75	46.54	74.00	27.46	Peak

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	3965.20	50.57	-3.72	46.85	74.00	27.15	Peak




Project No.: 2502Q44141E-RF Polarization: Horizontal Test Mode: Transmitting Note: BLE 1M low channel 2402MHz Peak:RBW:1MHz,VBW:30Hz Ave:RBW:1MHz,VBW:5kHz				Project No.: 2502Q44141E-RF Polarization: Vertical Test Mode: Transmitting Note: BLE 1M low channel 2402MHz Peak:RBW:1MHz,VBW:30Hz Ave:RBW:1MHz,VBW:5kHz			
Level (dBuV/m)  2025-03-20				Level (dBuV/m)  2025-03-20			
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	4804.00	48.85	-8.62	40.23	74.00	33.77	Peak
2	7206.00	47.53	-3.81	43.72	74.00	30.28	Peak
3	17955.20	48.79	11.12	59.91	74.00	14.09	Peak
4	17955.20	36.30	11.12	47.42	54.00	6.58	Average

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	4804.00	48.64	-8.62	40.02	74.00	33.98	Peak
2	7206.00	47.86	-3.81	44.05	74.00	29.95	Peak
3	17876.80	48.93	10.62	59.55	74.00	14.45	Peak
4	17876.80	36.37	10.62	46.99	54.00	7.01	Average


## BLE 1M, Middle Channel, Horizontal

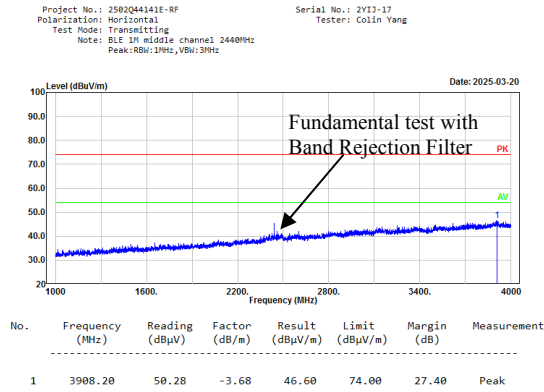




## BLE 1M, Middle Channel, Vertical

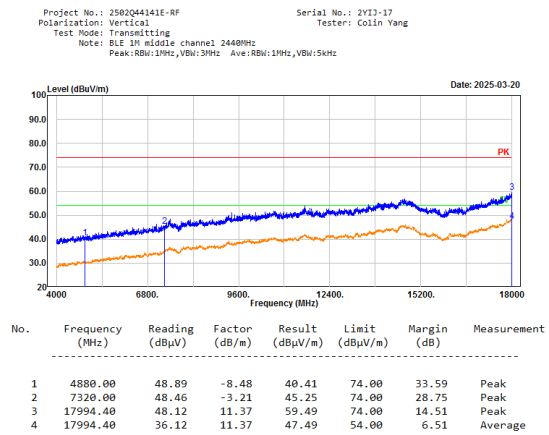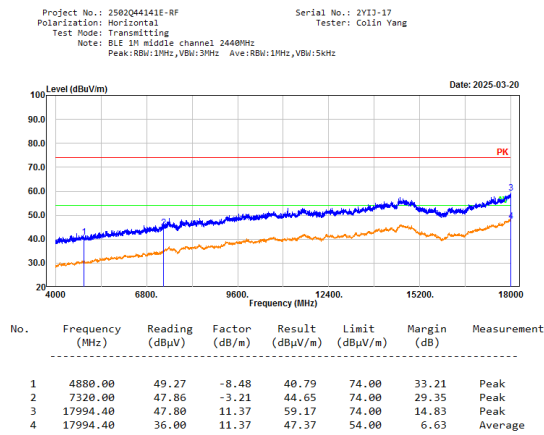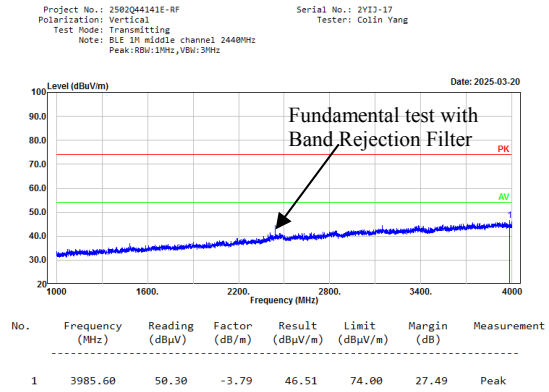

BLE 1M, High Channel, Horizontal

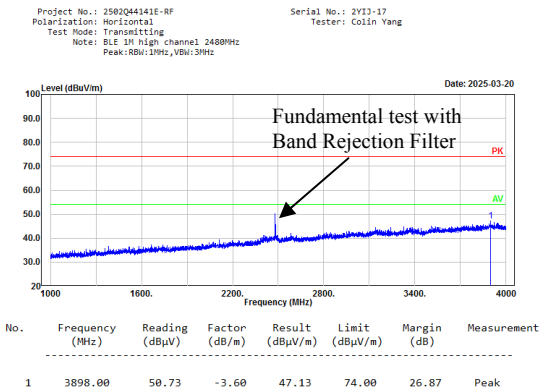

BLE 1M, High Channel, Vertical

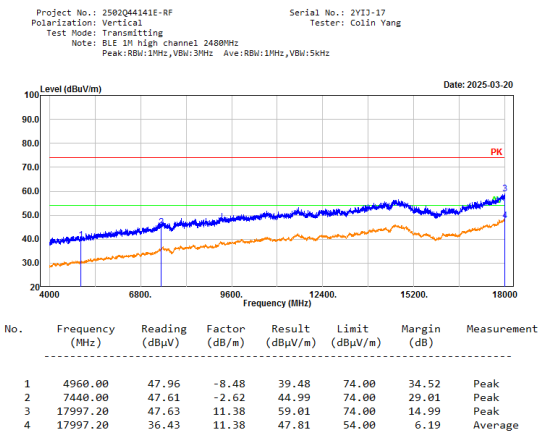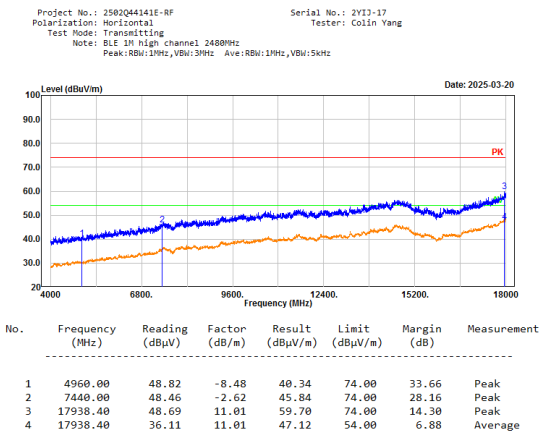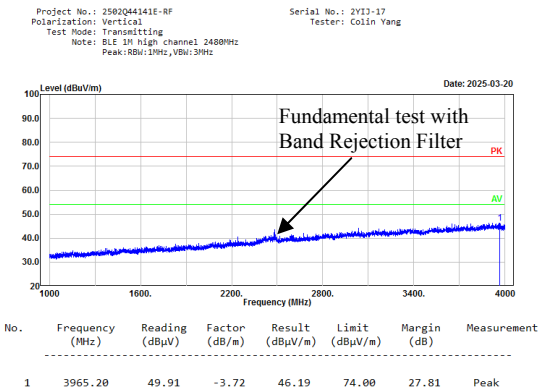





18-25GHz:

No Emission was detected in the range 18-25GHz, test was performed on the mode and channel which with the maximum power.

BLE 1M, High Channel, Horizontal

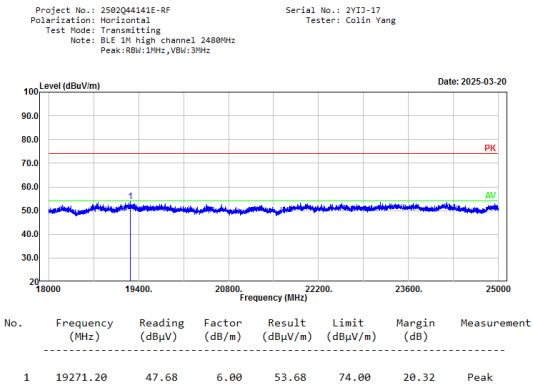


BLE 1M, High Channel, Vertical

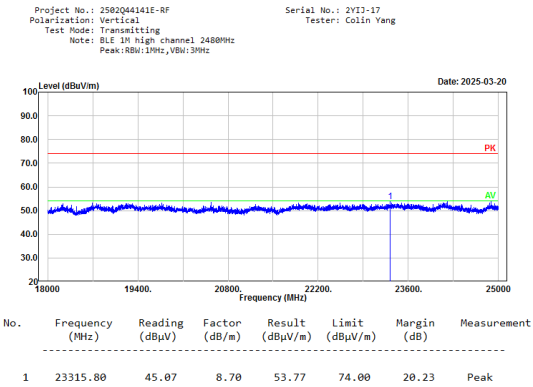


Bandedge:


BLE 1M, Low Channel, Bandedge, Horizontal

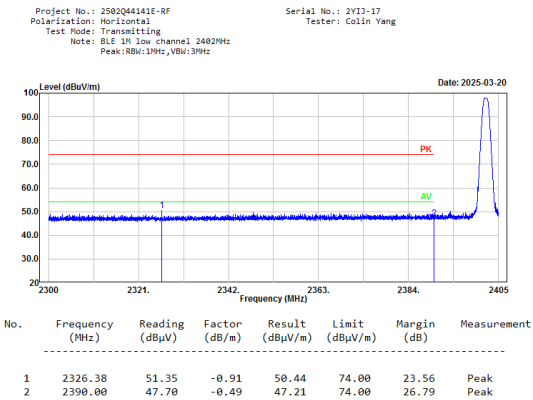


BLE 1M, Low Channel, Bandedge, Vertical

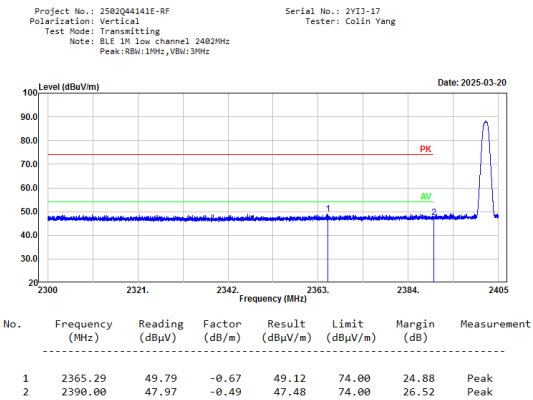

BLE 1M, High Channel, Bandedge, Horizontal

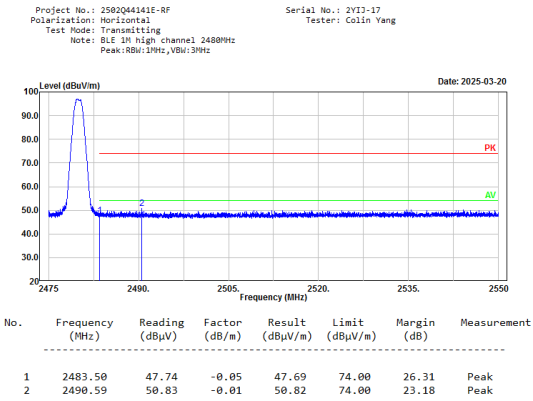

BLE 1M, High Channel, Bandedge, Vertical

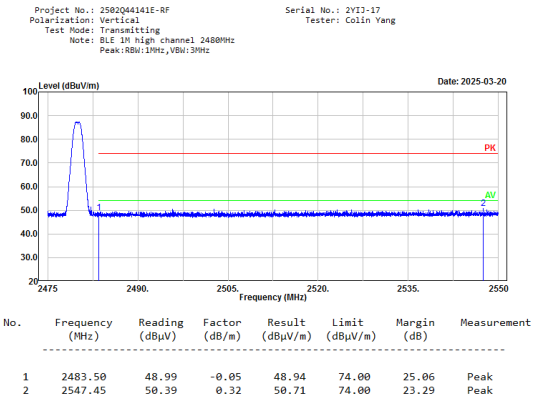

5.3 6dB Emission Bandwidth

Serial No.:	2YIJ-1	Test Date:	2025/02/22
Test Site:	RF	Test Mode:	Transmitting
Tester:	Tower Qing	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.2	Relative Humidity: (%)	49	ATM Pressure: (kPa)	101.7
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Coaxial Attenuator	10dB	F-08-EM512	2024/06/13	2025/06/12
R&S	Spectrum Analyzer	FSV40	101589	2024/09/05	2025/09/04


\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

BLE 1M


Channel	Result (MHz)	Limit (MHz)	Verdict
BLE 1Mbps Low	0.670	≥0.5	Pass
BLE 1Mbps Middle	0.670	≥0.5	Pass
BLE 1Mbps High	0.673	≥0.5	Pass

BLE\_1M\_Low\_Channel

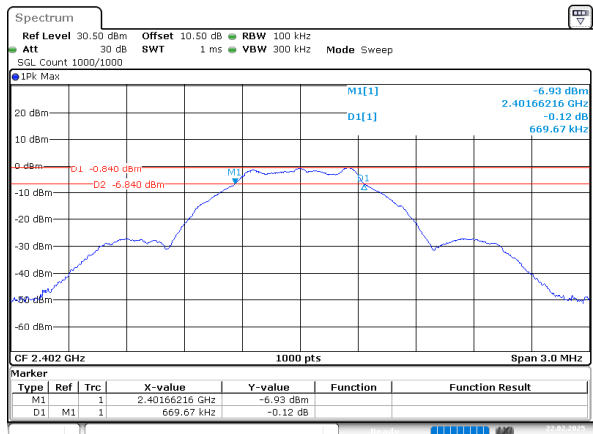


ProjectNo.:2502Q44141E-RF Tester:Tower Qing  
Date: 22.FEB.2025 15:35:02

BLE\_1M\_Middle\_Channel

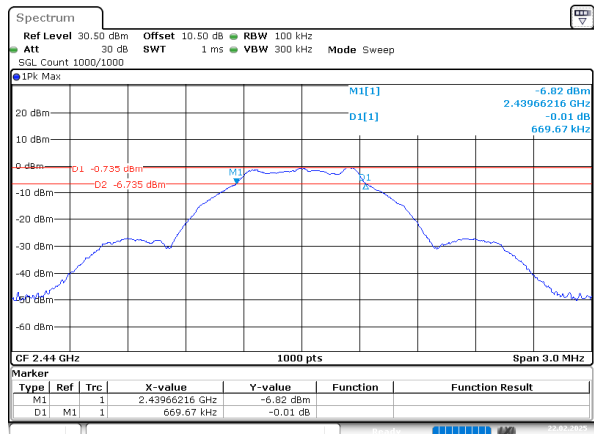

ProjectNo.:2502Q44141E-RF Tester:Tower Qing  
Date: 22.FEB.2025 15:36:10

BLE\_1M\_High\_Channel

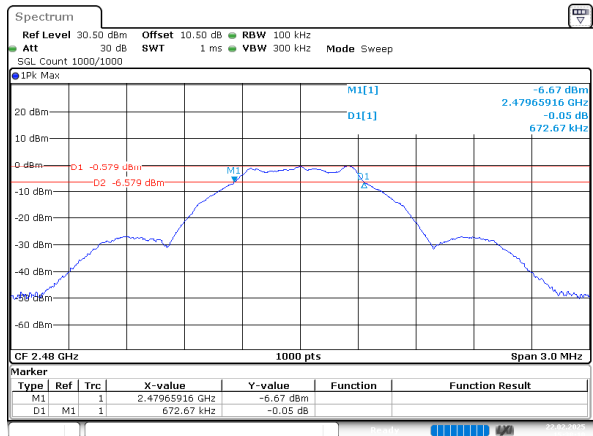

ProjectNo.:2502Q44141E-RF Tester:Tower Qing  
Date: 22.FEB.2025 15:38:10

5.4 Maximum Conducted Output Power

Serial No.:	2YIJ-1	Test Date:	2025/02/22
Test Site:	RF	Test Mode:	Transmitting
Tester:	Tower Qing	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.2	Relative Humidity: (%)	49	ATM Pressure: (kPa)	101.7
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Coaxial Attenuator	10dB	F-08-EM512	2024/06/13	2025/06/12
R&S	Spectrum Analyzer	FSV40	101589	2024/09/05	2025/09/04


\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

BLE 1M


Channel	Peak Output Power (dBm)	Limit (dBm)	Verdict
BLE 1Mbps Low	-0.27	30.00	Pass
BLE 1Mbps Middle	-0.09	30.00	Pass
BLE 1Mbps High	0.06	30.00	Pass

BLE\_1M\_Low\_Channel

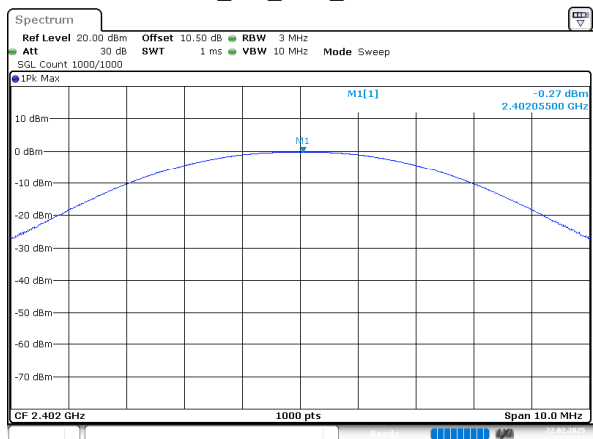


ProjectNo.:2502Q44141E-RF Tester: Tower Qing  
Date: 22.FEB.2025 15:35:26

BLE\_1M\_Middle\_Channel

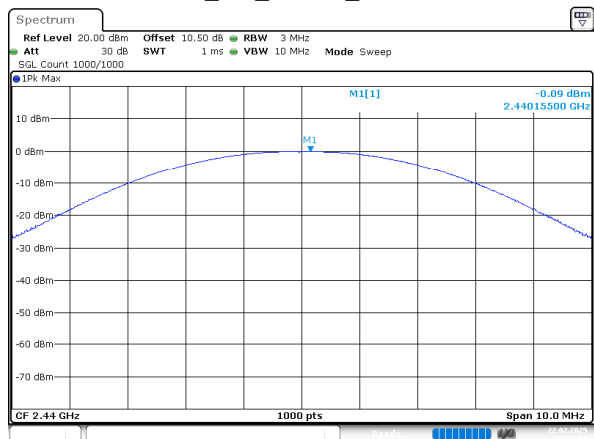

ProjectNo.:2502Q44141E-RF Tester: Tower Qing  
Date: 22.FEB.2025 15:37:07

BLE\_1M\_High\_Channel

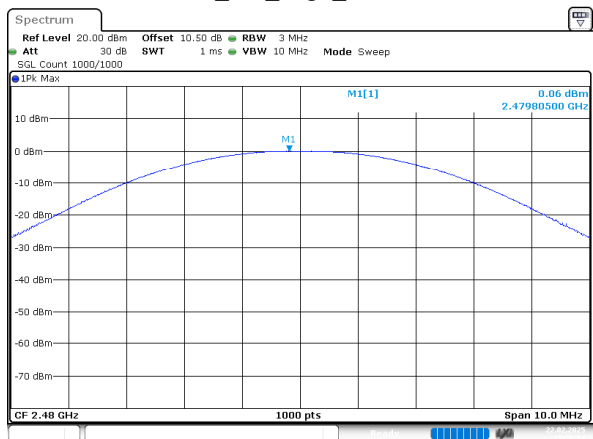

ProjectNo.:2502Q44141E-RF Tester: Tower Qing  
Date: 22.FEB.2025 15:38:54

5.5 Power Spectral Density

Serial No.:	2YIJ-1	Test Date:	2025/4/8
Test Site:	RF	Test Mode:	Transmitting
Tester:	Tower Qing	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.7	Relative Humidity: (%)	54	ATM Pressure: (kPa)	101.0
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Coaxial Attenuator	10dB	F-08-EM512	2024/06/13	2025/06/12
R&S	Spectrum Analyzer	FSV40	101589	2024/09/05	2025/09/04


\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

BLE 1M


Channel	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
BLE 1Mbps Low	-17.35	8	Pass
BLE 1Mbps Middle	-17.03	8	Pass
BLE 1Mbps High	-17.26	8	Pass

BLE\_1M\_Low\_Channel

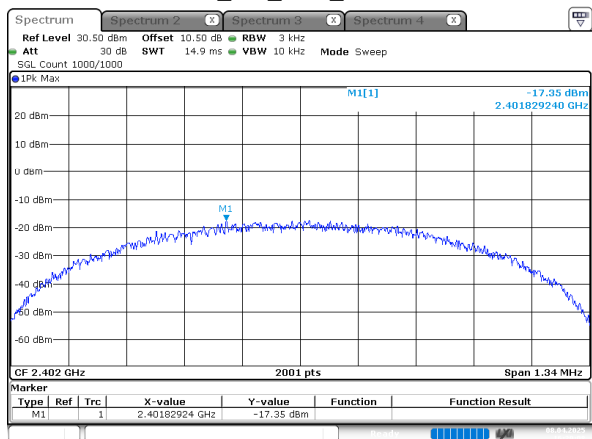


ProjectNo.:2502Q44141E-RF Tester:Tower Qing  
Date: 8.APR.2025 16:29:08

BLE\_1M\_Middle\_Channel

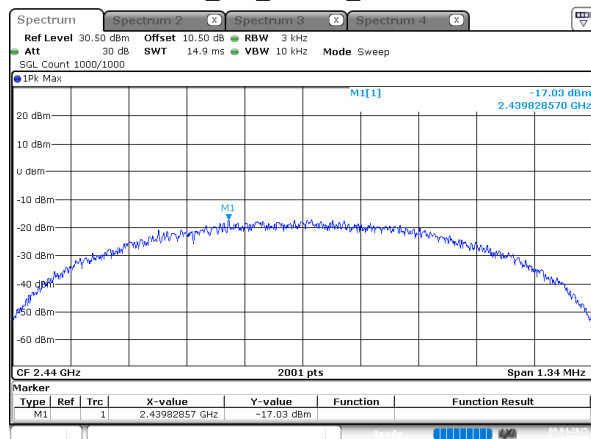

ProjectNo.:2502Q44141E-RF Tester:Tower Qing  
Date: 8.APR.2025 16:29:45

BLE\_1M\_High\_Channel

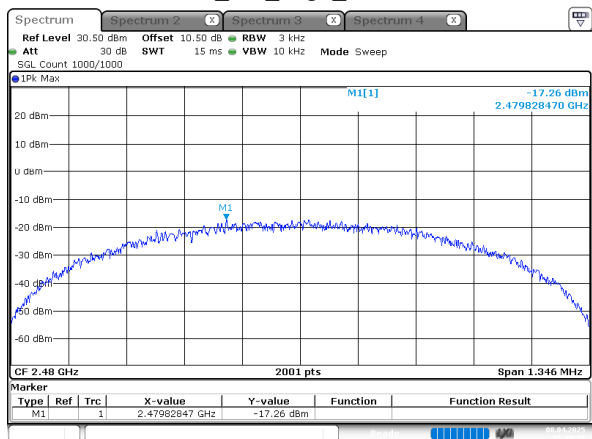

ProjectNo.:2502Q44141E-RF Tester:Tower Qing  
Date: 8.APR.2025 16:30:16



5.6 100 kHz Bandwidth of Frequency Band Edge

Serial No.:	2YIJ-1	Test Date:	2025/02/22
Test Site:	RF	Test Mode:	Transmitting
Tester:	Tower Qing	Test Result:	Pass

Environmental Conditions:


Temperature: (°C)	24.2	Relative Humidity: (%)	49	ATM Pressure: (kPa)	101.7
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Coaxial Attenuator	10dB	F-08-EM512	2024/06/13	2025/06/12
R&S	Spectrum Analyzer	FSV40	101589	2024/09/05	2025/09/04

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

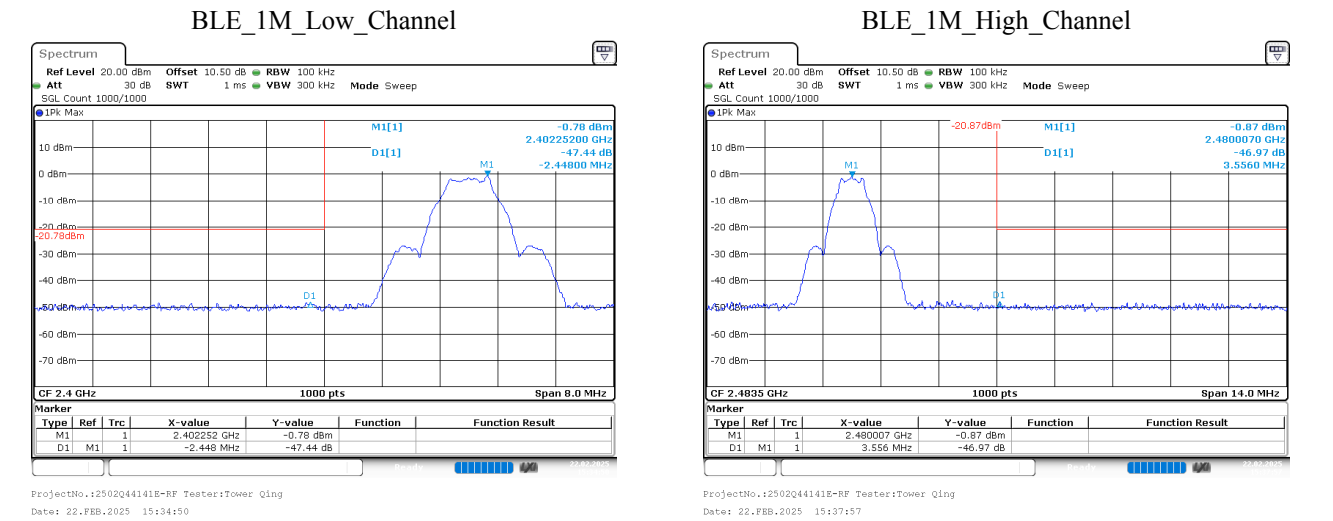

5.7 Duty Cycle

Serial No.:	2YIJ-1	Test Date:	2025/02/22
Test Site:	RF	Test Mode:	Transmitting
Tester:	Tower Qing	Test Result:	/

Environmental Conditions:

Temperature: (°C)	24.2	Relative Humidity: (%)	49	ATM Pressure: (kPa)	101.7
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Coaxial Attenuator	10dB	F-08-EM512	2024/06/13	2025/06/12
R&S	Spectrum Analyzer	FSV40	101589	2024/09/05	2025/09/04

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

BLE 1M

Channel	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	1/Ton (Hz)	VBW Setting (kHz)
BLE 1Mbps Middle	2.125	2.501	84.97	471	0.500

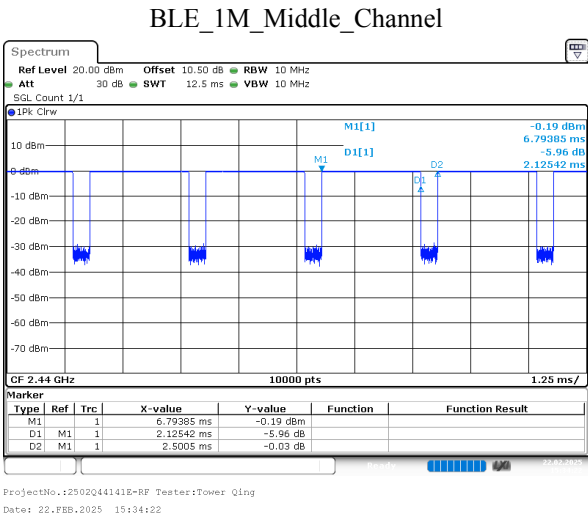

## **EXHIBIT A - EUT PHOTOGRAPHS**

---

Please refer to the attachment 2502Q44141E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2502Q44141E-RF-INP EUT INTERNAL PHOTOGRAPHS.

## **EXHIBIT B - TEST SETUP PHOTOGRAPHS**

---

Please refer to the attachment 2502Q44141E-RF-00A-TSP TEST SETUP PHOTOGRAPHS.

## EXHIBIT C - RF EXPOSURE EVALUATION

---

### SAR Evaluation

#### Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

#### Measurement Result

The max conducted power including tune-up tolerance is 0.5dBm (1.12 mW).

$$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$$
$$= 1.12/5 \cdot (\sqrt{2.480}) = 0.4 < 3.0$$

Note: the max conducted power including tune-up tolerance was declared by manufacturer.

**Result: Compliant. The stand-alone SAR evaluation is not necessary.**

\*\*\*\*\* END OF REPORT \*\*\*\*\*