



FCC Test Report

FCC Part 15.247 for FHSS systems /
CANADA RSS-210

FOR:

Handheld PC with BT

MODEL #: D9500LUPE, D9500BUPE

Hand Held Products, Inc.
700 Vision Drive
Skaneateles Falls, NY 13153
U.S.A

FCC ID: HD59500LUPE, HD59500BUPE
IC-ID : 1693B-95E

Test report no.: EMC_HANDH_014_06002_FCC15.247_BT



Certificate # 2135.01



TTI-P-G
081/94-A0

Accredited according to
ISO/IEC 17025



Bluetooth
Qualification Test
Facility
(BQTF)



FCC listed#
101450

IC recognized #
3925

CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: info@cetecomusa.com ♦ <http://www.cetecom.com>
CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM

Table of Contents

1	General information
1.1	Notes
1.2	Testing laboratory
1.3	Details of applicant
1.4	Application details
1.5	Test item
1.6	Test standards
2	Technical test
2.1	Summary of test results
2.2	Test report

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

TEST REPORT PREPARED BY:

EMC Engineer: Michael Grings

1.2 Testing laboratory

CETECOM Inc.

411 Dixon Landing Road, Milpitas, CA-95035, USA

Phone: +1 408 586 6200 Fax: +1 408 586 6299

E-mail: lothar.schmidt@cetecomusa.com

Internet: www.cetecom.com

1.3 Details of applicant

Name : Hand Held Products, Inc.
Street : 700 Vision Drive
City / Zip Code : Skaneateles Falls, NY 13153
Country : U.S.A
Contact : Naveen Velagapudi
Telephone : +1 315 685 2931
Tele-fax : +1 315 685 1210
e-mail : velagapudin@hhp.com

1.4 Application details

Date of receipt test item : 2004-12-15
Date of test : 2004-12-15/16

1.5 Test item

Manufacturer : Applicant
Marketing Name : Dolphin 9500
Model No. : **D9500LUPE. D9500BUPE**
Description : [Dolphin 9500 is a ruggedized handheld computer which can read barcodes and other auto ID codes. It contains three different transmitters \(BT, WLAN and GSM\) to send and receive data.](#)
FCC-ID : HD59500LUPE, HD59500BUPE

Additional information

Test Sample for BT : s/n 0046785, 0046792 (used only for 30M-1GHz)
Frequency : 2402MHz – 2480MHz for BT
Type of modulation : GFSK
Number of channels : 79
Antenna : Internal
Power supply : Battery or Charger (AC Adaptor)
Output power : -11.4dBm (0.00007W) max. conducted peak power

1.6 Test standards: FCC Part 15 §15.247 (DA00-705) / RSS 210

Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

PROJECT OVERVIEW:

NOTE: This test report covers all radiated measurements as per FCC15.247 for BT module in HHP handheld computer model#D9500LUPE. For all conducted measurements please refer to *test report# BT_cond_Socket*.

2 Technical test**2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests
Performed

Final Verdict:
(only “passed” if all single measurements are “passed”)

Passed

Technical responsibility for area of testing:

2006-06-23 EMC & Radio Lothar Schmidt (Manager)



Date

Section

Name

Signature

Responsible for test report and project leader:

2006-06-23 EMC & Radio Michael Grings (EMC Engineer)



Date

Section

Name

Signature

2.2 Test report

TEST REPORT

Test report no.: EMC_826FCC15.247_2004_BT

TEST REPORT REFERENCE

LIST OF MEASUREMENTS		PAGE
MAXIMUM PEAK OUTPUT POWER	§15.247 (b) (1)	9
BAND EDGE COMPLIANCE	§15.247 (c)	14
CONDUCTED EMISSIONS	§15.107/207	29
TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS		34
BLOCK DIAGRAMS		35

**MAXIMUM PEAK OUTPUT POWER
(CONDUCTED)****§ 15.247 (b) (1)**

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2402	2441	2480
$T_{nom}(23)^{\circ}C$	V_{nom}	-13.6	-12.7	-11.4
Measurement uncertainty		$\pm 0.5dBm$		

RBW/VBW: 3 MHz

LIMIT**SUBCLAUSE § 15.247 (b) (1)**

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt conducted

**MAXIMUM PEAK OUTPUT POWER
(RADIATED)****§ 15.247 (b) (1)****EIRP:**

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom}	-14.33	-15.44	-18.79
Measurement uncertainty		±0.5dBm		

RBW/VBW: 3 MHz

LIMIT**SUBCLAUSE § 15.247 (b) (1)**

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt conducted

PEAK OUTPUT POWER (RADIATED)


§15.247 (b) (1)

Lowest Channel: 2402MHz

SWEEP TABLE: "EIRP BT low channel"

Short Description: EIRP Bluetooth channel-2402MHz

Start	Stop	Detector	Meas.	IF
Frequency	Frequency	Time	BW	
2.397GHz	2.407GHz	MaxPeak	Coupled	3 MHz

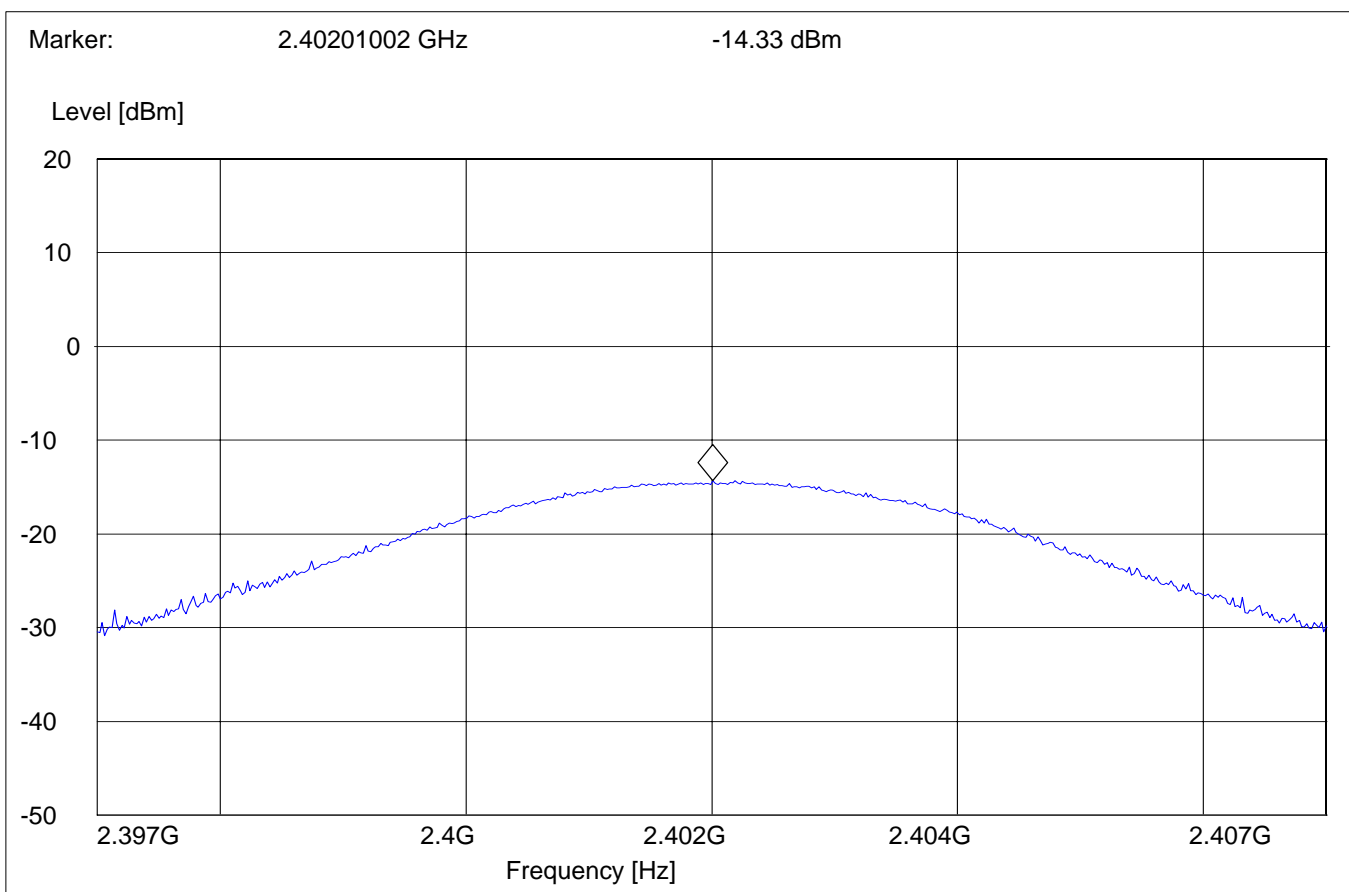

PEAK OUTPUT POWER (RADIATED)


§15.247 (b) (1)

Mid Channel: 2441MHz

SWEEP TABLE: "EIRP BT Mid channel"

Short Description: EIRP Bluetooth channel-2441MHz

Start	Stop	Detector	Meas.	IF
Frequency	Frequency		Time	BW
2.436GHz	2.446GHz	MaxPeak	Coupled	3 MHz

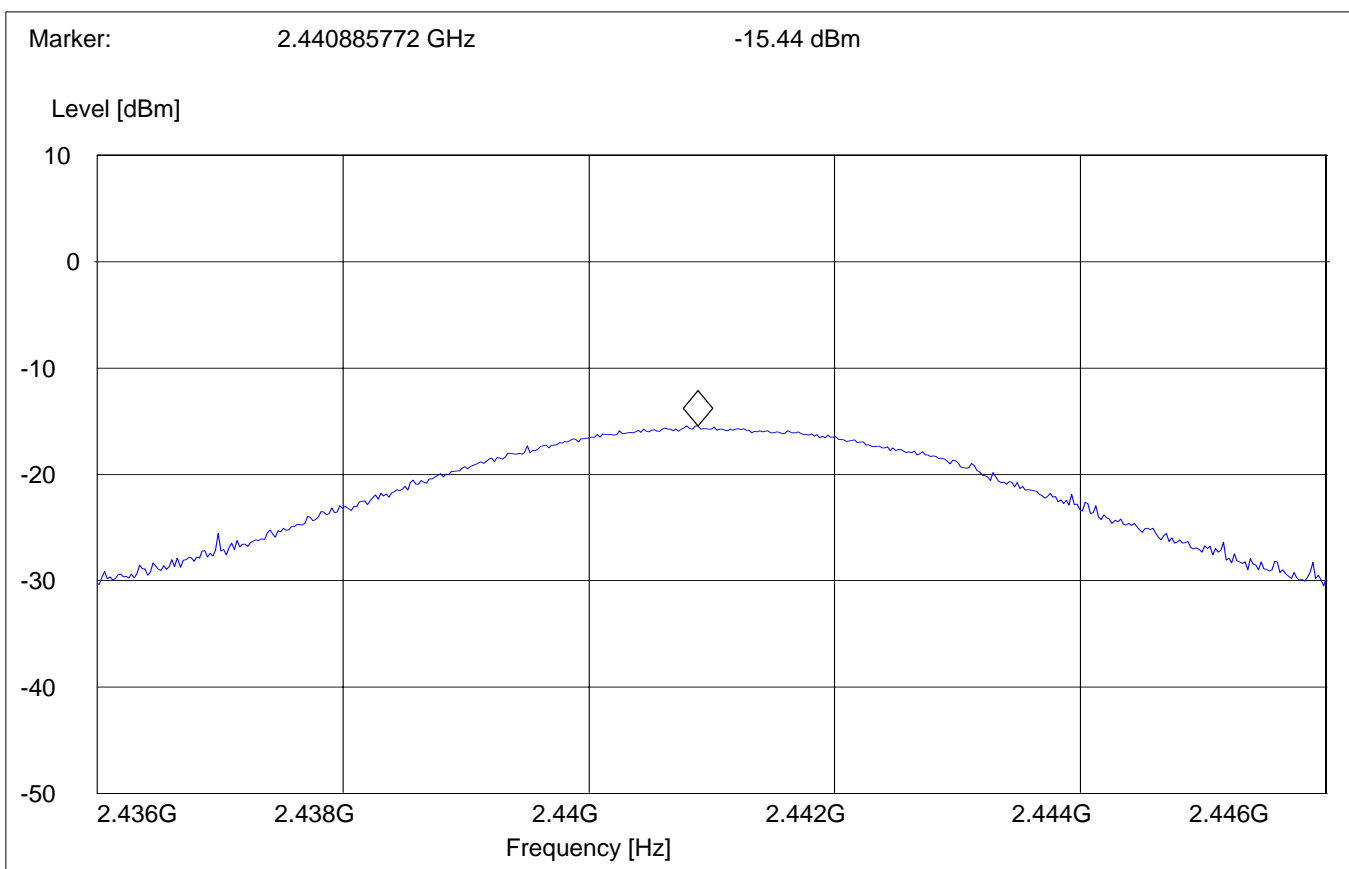

PEAK OUTPUT POWER (RADIATED)


§15.247 (b) (1)

Highest Channel: 2480MHz

SWEEP TABLE: "EIRP BT High channel"

Short Description: EIRP Bluetooth channel-2480MHz

Start	Stop	Detector	Meas.	IF
Frequency	Frequency		Time	BW
2.475GHz	2.485GHz	MaxPeak	Coupled	3 MHz

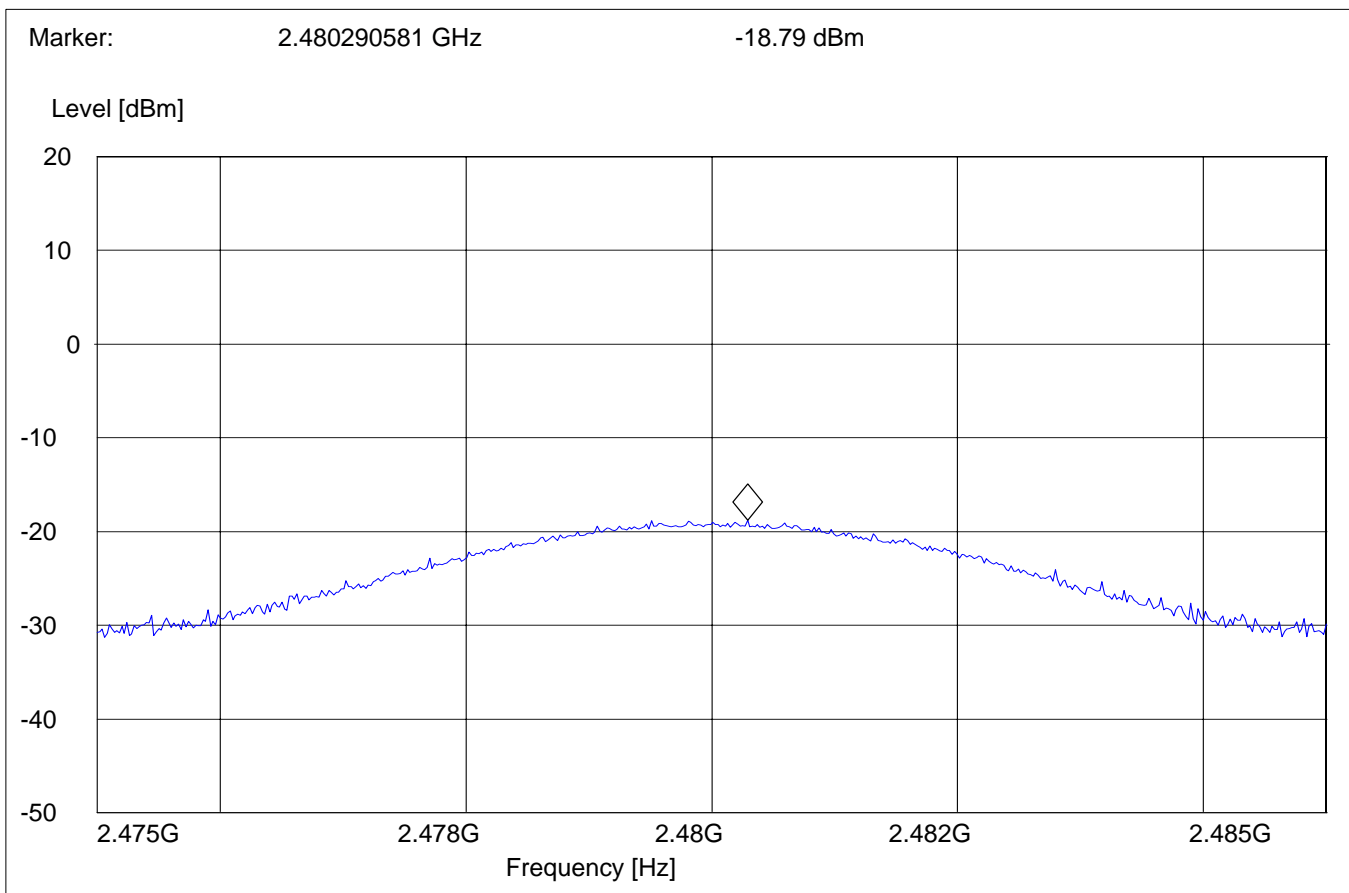

BAND EDGE COMPLIANCE

§15.247 (c)


Low frequency section (spurious in the restricted band 2310 – 2390 MHz)

Average Measurement

(This plot is valid for both Hopping ON & OFF)

Operating condition : Tx at 2402MHz
SWEEP TABLE : "FCC15.247 LBE_AVG"
Short Description : FCC15.247 BT Low-band-edge
Limit Line : 54dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

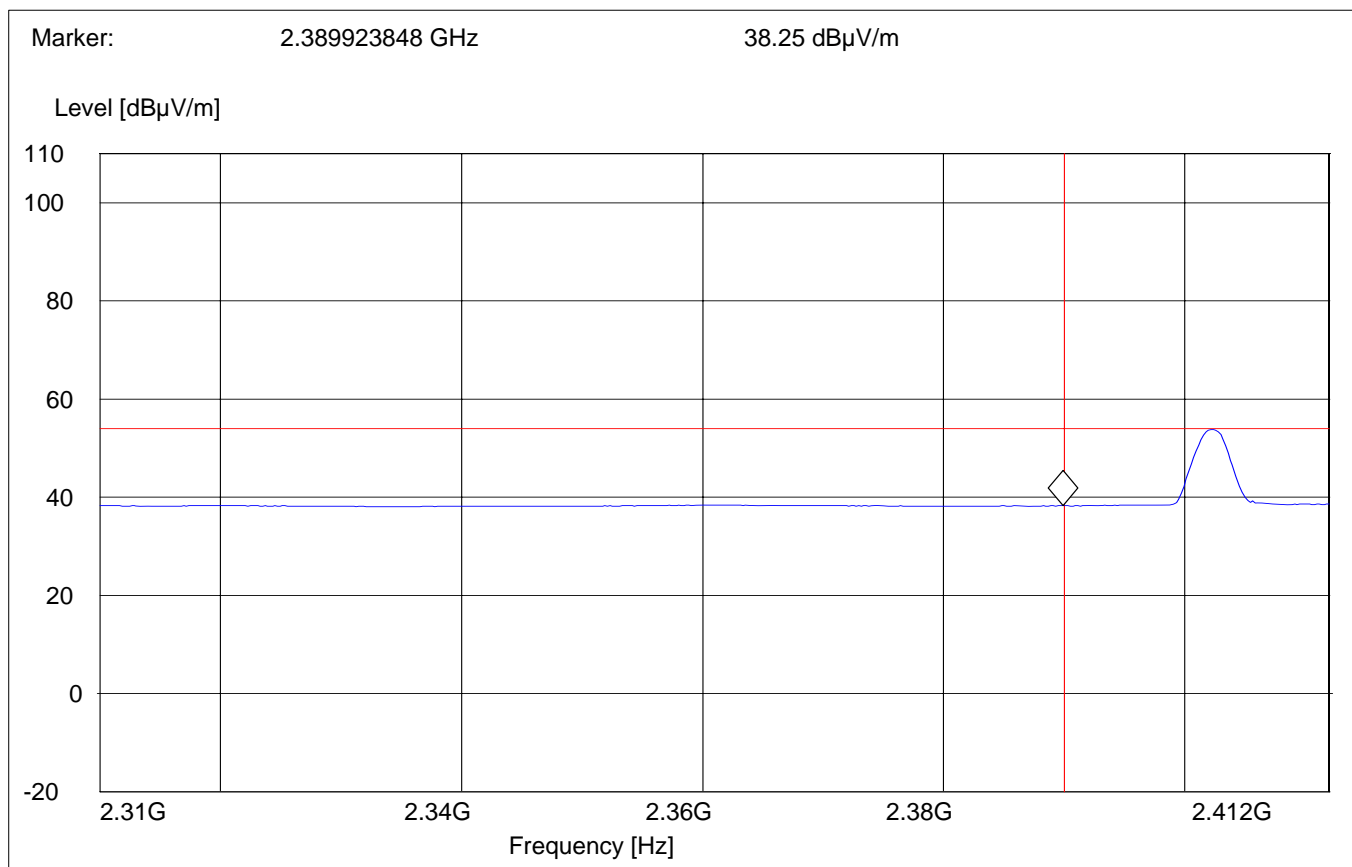

BAND EDGE COMPLIANCE

§15.247 (c)


Low frequency section (spurious in the restricted band 2310 – 2390 MHz)

Peak Measurement

(This plot is valid for both Hopping ON & OFF)

Operating condition : Tx at 2402MHz
 SWEEP TABLE : "FCC15.247 LBE_Pk"
 Short Description : FCC15.247 BT Low-band-edge
 Limit Line : 74dBμV

Start Frequency	Stop Frequency	Detector Time	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

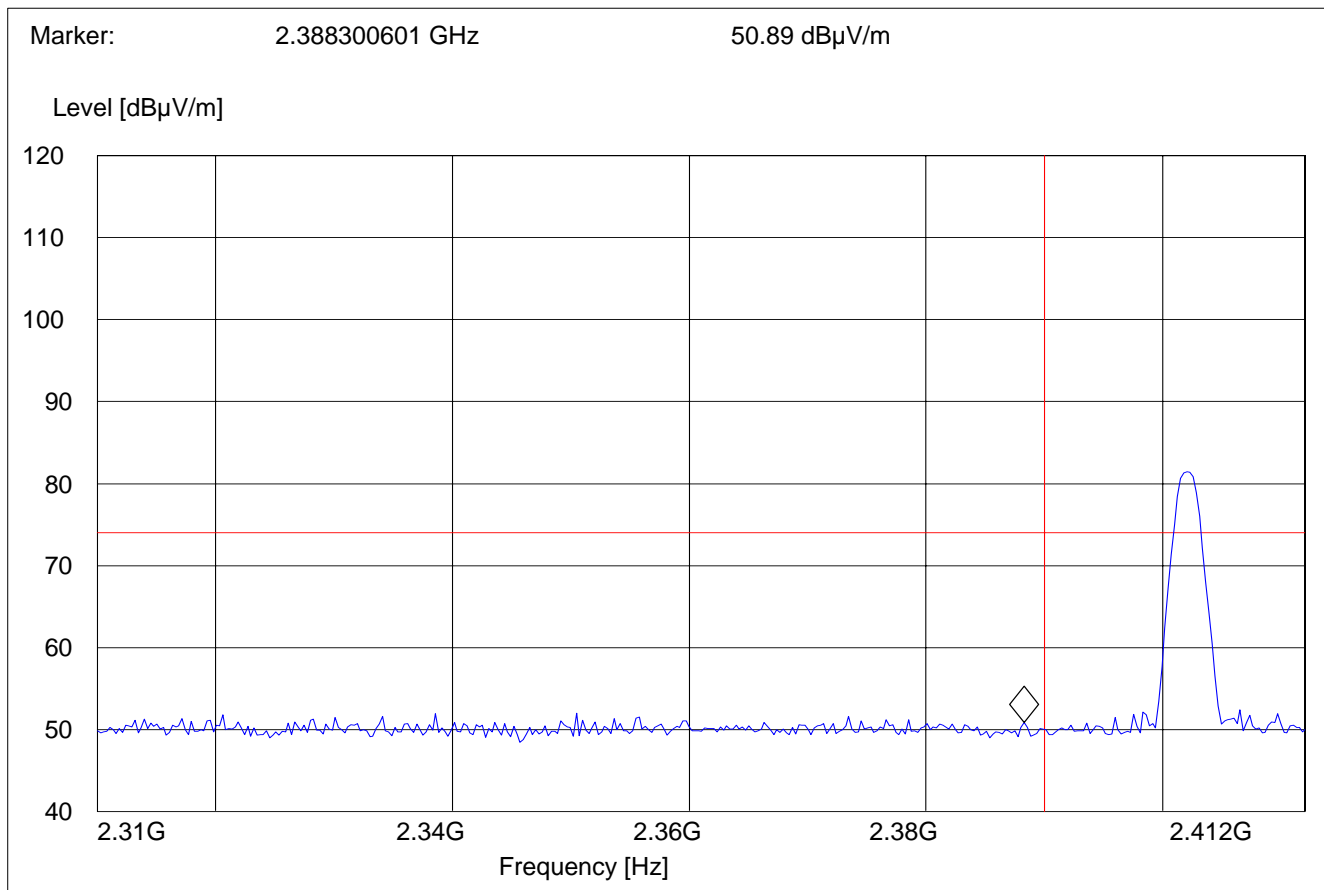

BAND EDGE COMPLIANCE

§15.247 (c)


High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)

Average Measurement

(This plot is valid for both Hopping ON & OFF)

Operating condition : Tx at 2480MHz
 SWEEP TABLE : "FCC15.247 HBE_AVG"
 Short Description : FCC15.247 BT High-band-edge
 Limit Line : 54dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.462 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

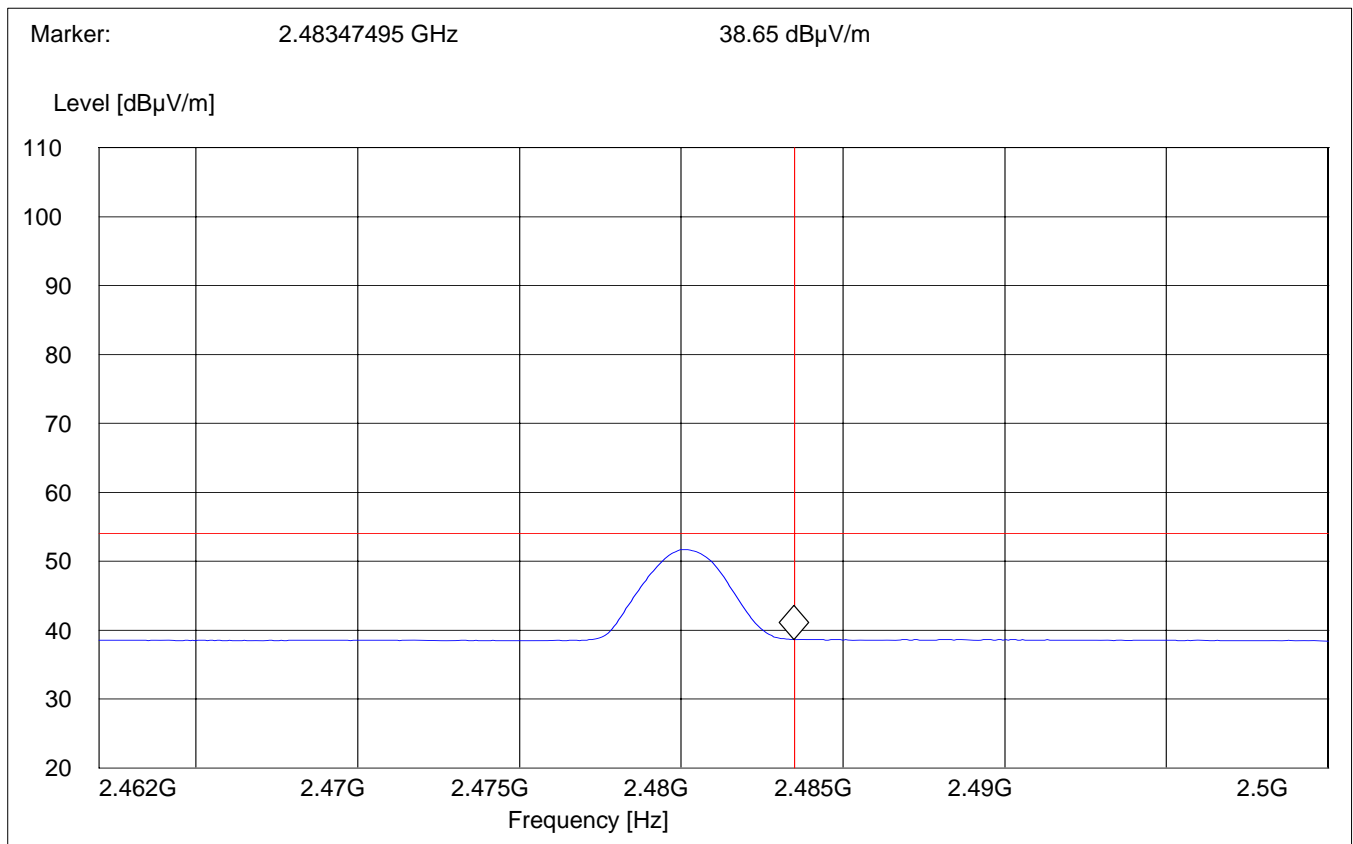

BAND EDGE COMPLIANCE

§15.247 (c)


High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)

Peak Measurement

(This plot is valid for both Hopping ON & OFF)

Operating condition : Tx at 2480MHz
SWEEP TABLE : "FCC15.247 HBE_PK"
Short Description : FCC15.247 BT High-band-edge
Limit Line : 74dBμV

Start Frequency	Stop Frequency	Detector Time	Meas. Bandw.	RBW	VBW	Transducer
2.462 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

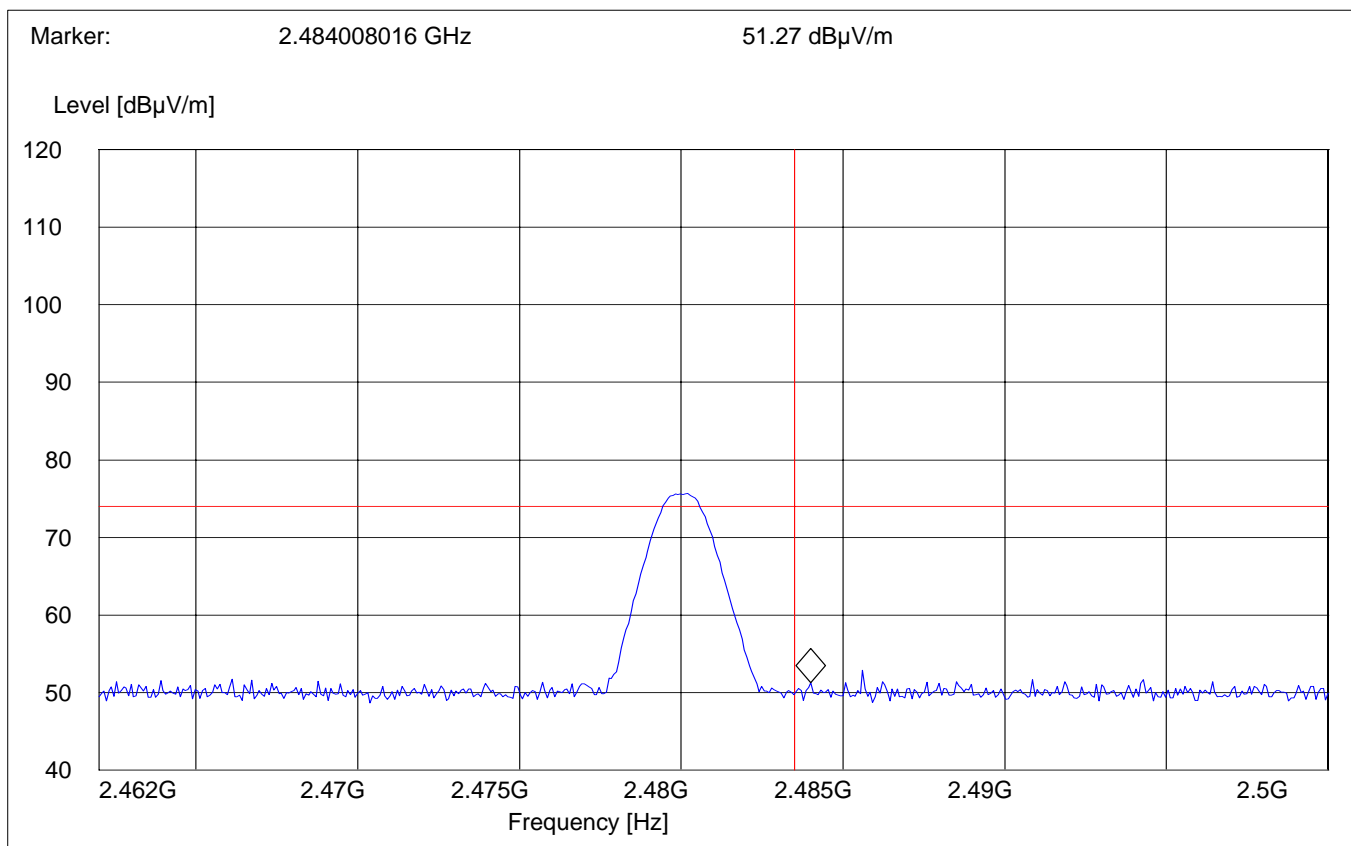

EMISSION LIMITATIONS
Transmitter (Radiated)

§ 15.247 (c) (1)

LIMITS

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions that fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 26.5 GHz very short cable connections to the antenna was used to minimize the noise level.
2. Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.
3. All measurements are done in peak mode unless specified with plots.

Results for the radiated measurements below 30MHz according § 15.33

Frequency	Measured values	Remarks
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels

EMISSION LIMITATIONS - Radiated (Transmitter)**§ 15.247 (c) (1)**

Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

Transmit at Lowest channel Frequency 2402MHz			
Frequency (MHz)	Level (dBµV/m)		
	Peak	Quasi-Peak	Average
SEE PLOTS			
Transmit at Middle channel Frequency 2441MHz			
Frequency (MHz)	Level (dBµV/m)		
	Peak	Quasi-Peak	Average
SEE PLOTS			
Transmit at Highest channel Frequency 2480MHz			
Frequency (MHz)	Level (dBµV/m)		
	Peak	Quasi-Peak	Average
SEE PLOTS			

EMISSION LIMITATIONS - Radiated (Transmitter)


§ 15.247 (c) (1)

30MHz – 1GHz

Antenna: vertical

Note: This plot is valid for low, mid & high channels (worst-case plot)

SWEEP TABLE:		"BT Spuri hi 30-1G"			
Short Description:		Bluetooth 30MHz-1GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

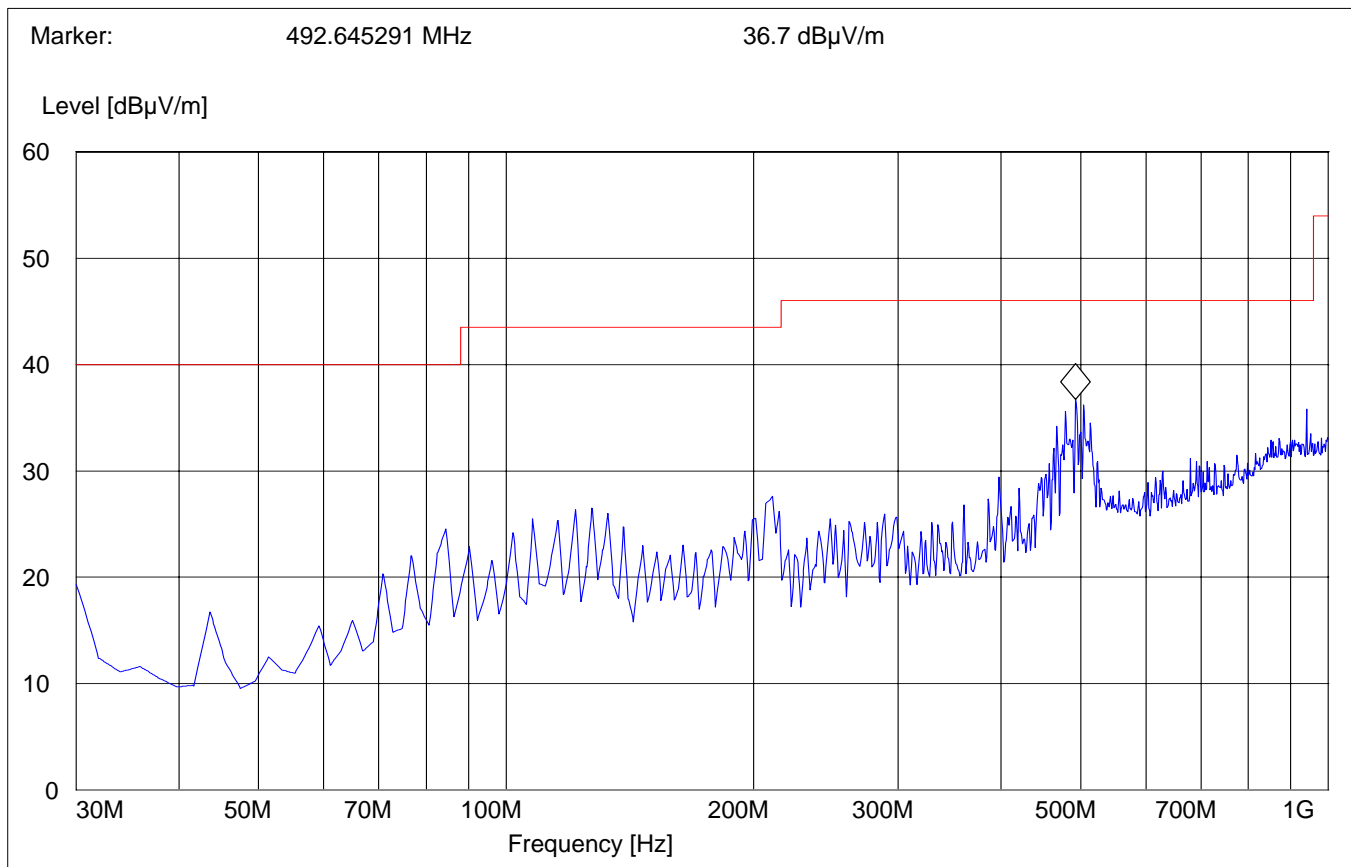

EMISSION LIMITATIONS - Radiated (Transmitter)


§ 15.247 (c) (1)

30MHz – 1GHz

Antenna: horizontal

Note: This plot is valid for low, mid & high channels (worst-case plot)

SWEEP TABLE:		"BT Spuri hi 30-1G"			
Short Description:		Bluetooth 30MHz-1GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

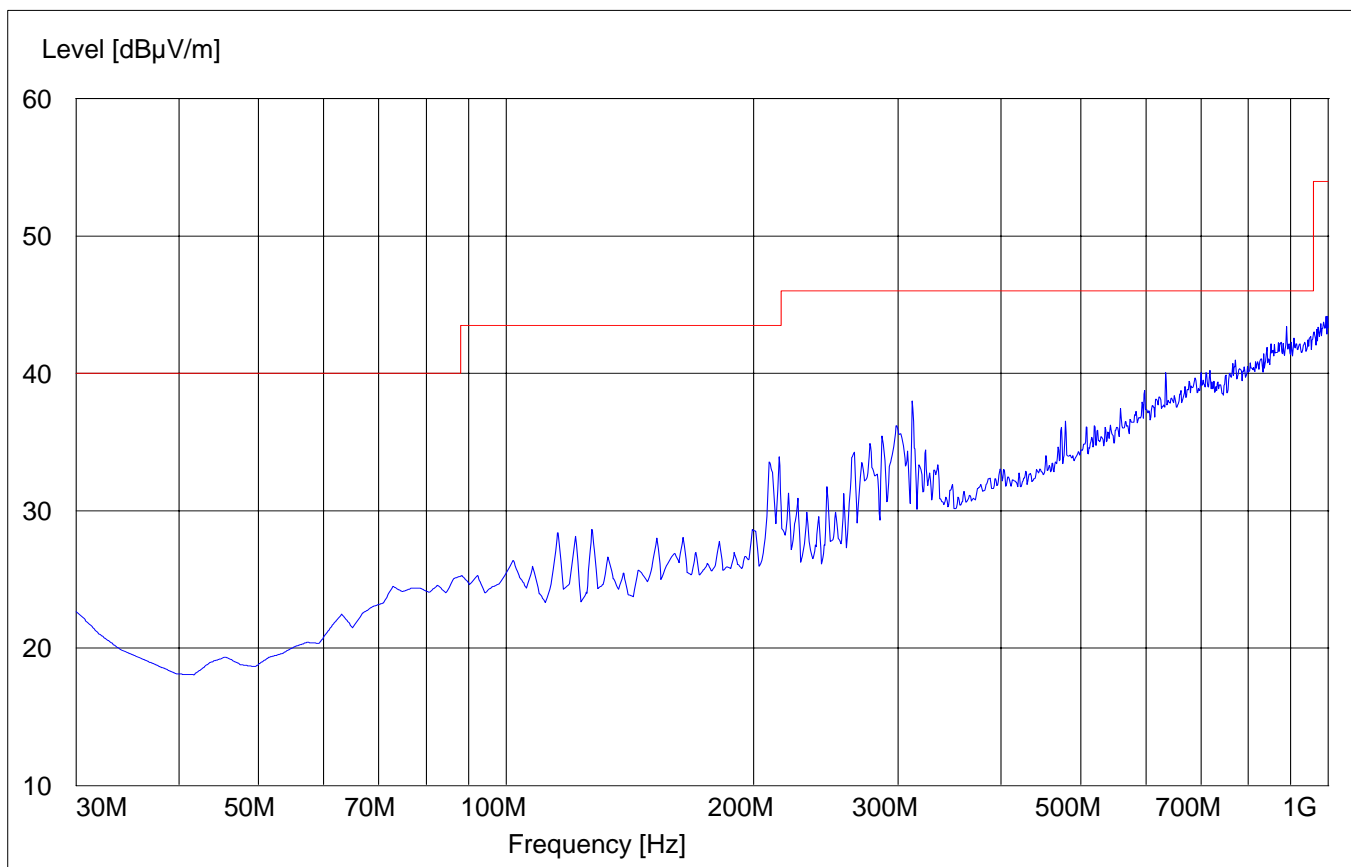


EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Lowest Channel (2402MHz): 1GHz – 3GHz

NOTE: The peak is the carrier frequency.

SWEEP TABLE:		"BT Spuri hi 1-3G"			
Short Description:		Bluetooth Spurious 1-3GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

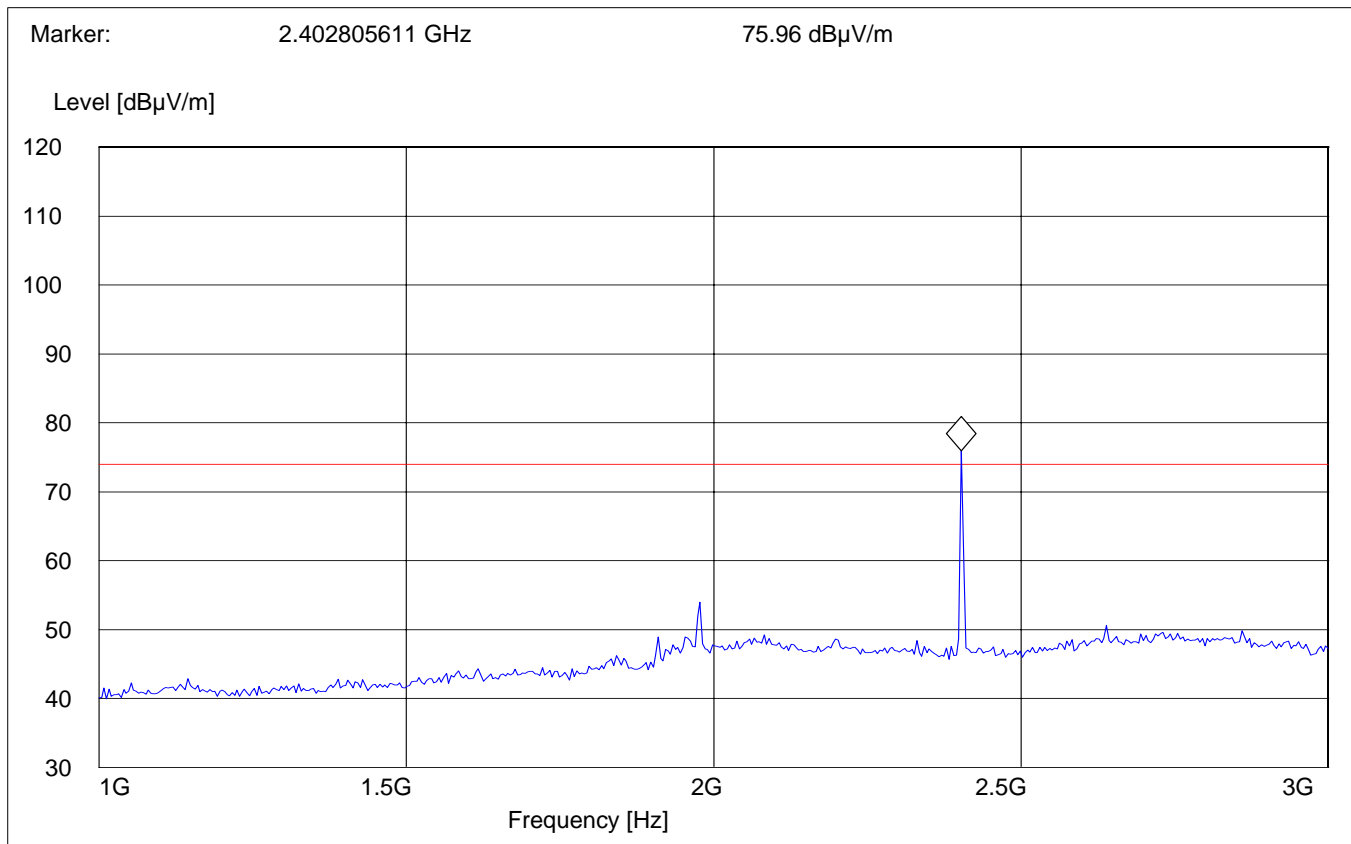

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Lowest Channel (2402MHz): 3GHz – 18GHz

SWEEP TABLE:

"BT Spuri hi 3-18G"

Short Description:

Bluetooth Spurious 3-18 GHz

Start Stop

Detector

Meas.

RBW

Transducer

Frequency Frequency

Time

Bandw.

VBW


3.0 GHz 18.0 GHz

MaxPeak

Coupled


1 MHz

#326 horn (dBi)

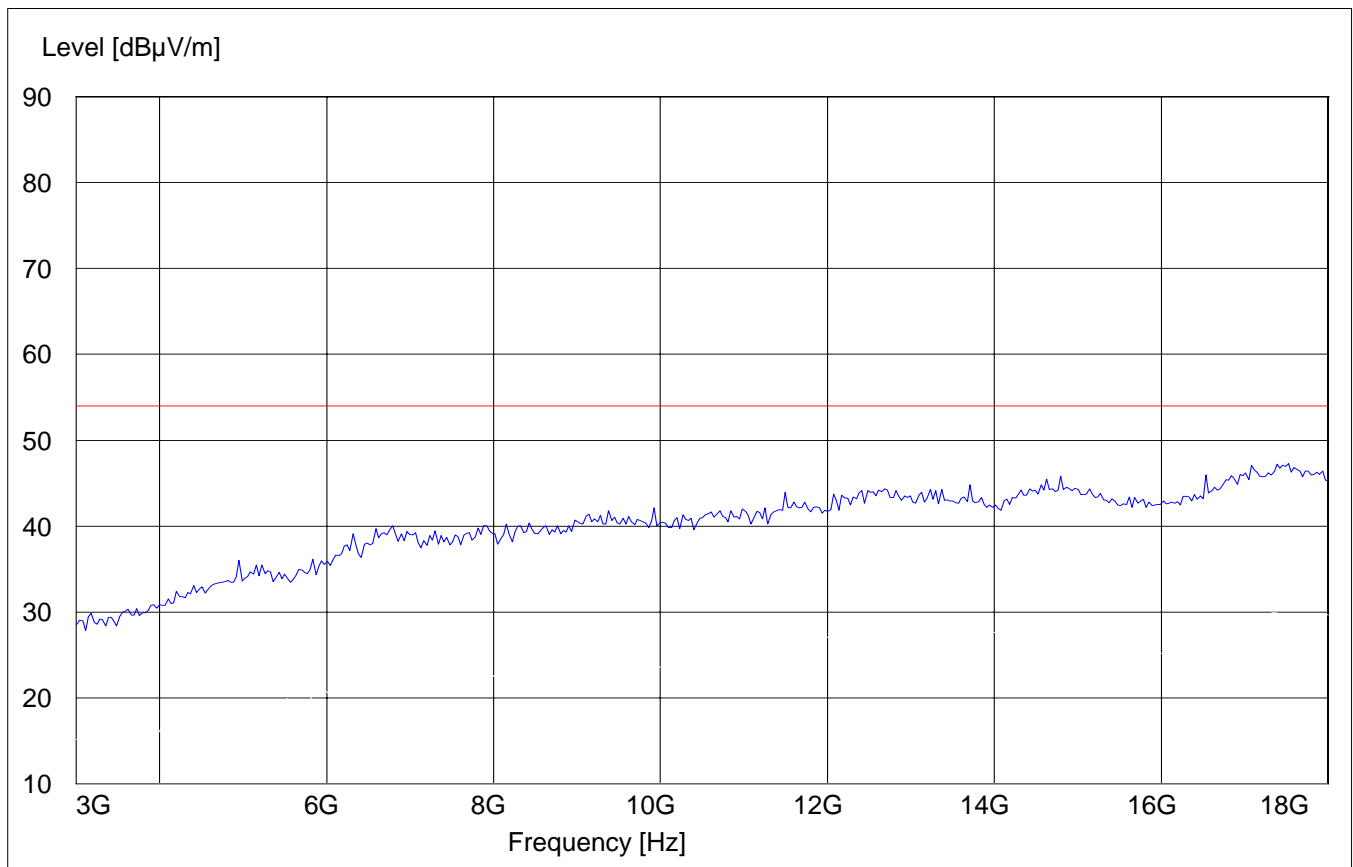

EMISSION LIMITATIONS - Radiated (Transmitter)
§ 15.247 (c) (1)
Middle Channel (2441MHz): 1GHz – 3GHz
NOTE: The peak is the carrier frequency.

SWEEP TABLE:		"BT Spuri hi 1-3G"			
Short Description:		Bluetooth Spurious 1-3GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

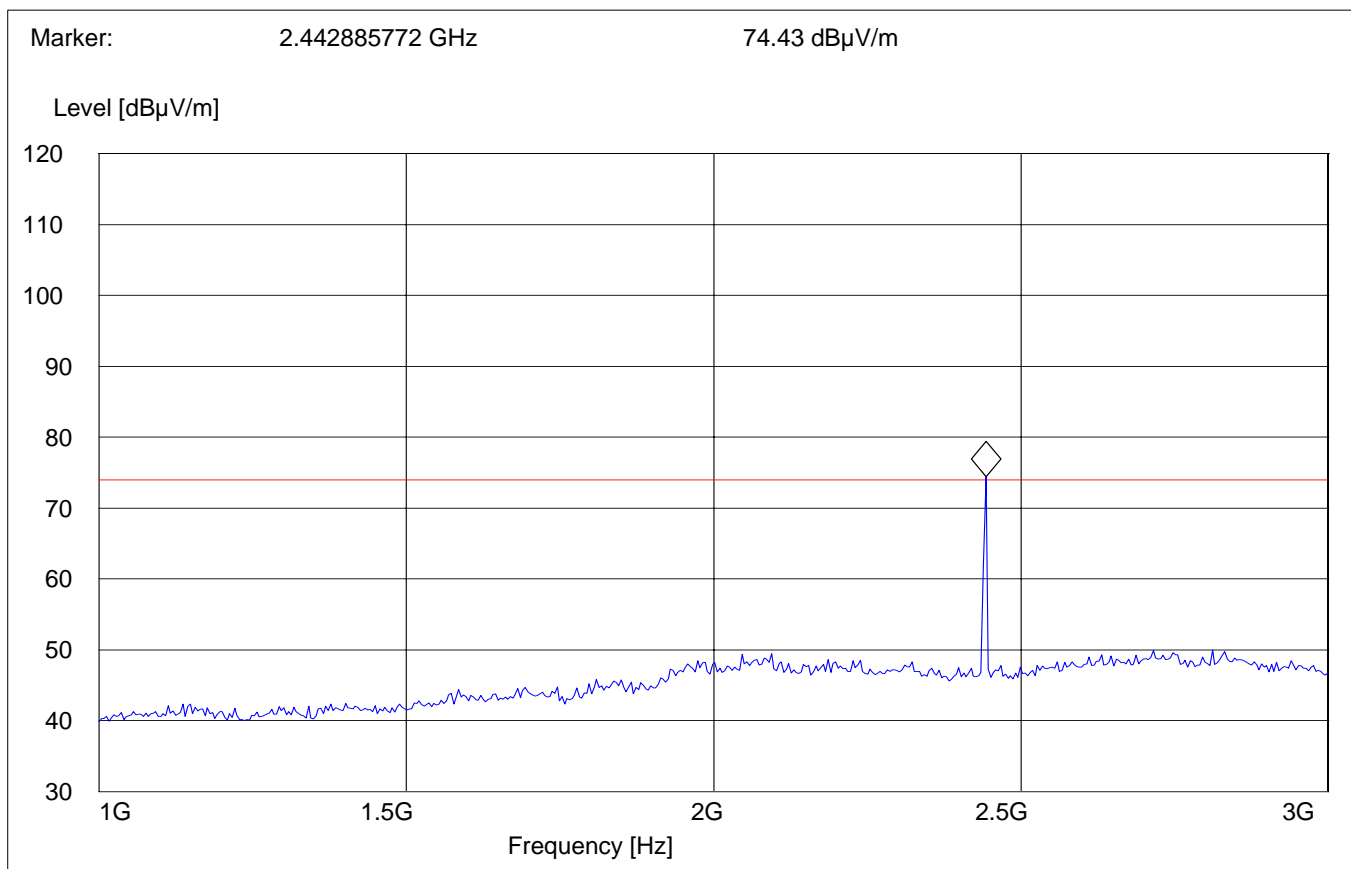


EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


Middle Channel (2441MHz): 3GHz – 18GHz

SWEEP TABLE:		"BT Spuri hi 3-18G"			
Short Description:		Bluetooth Spurious 3-18GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

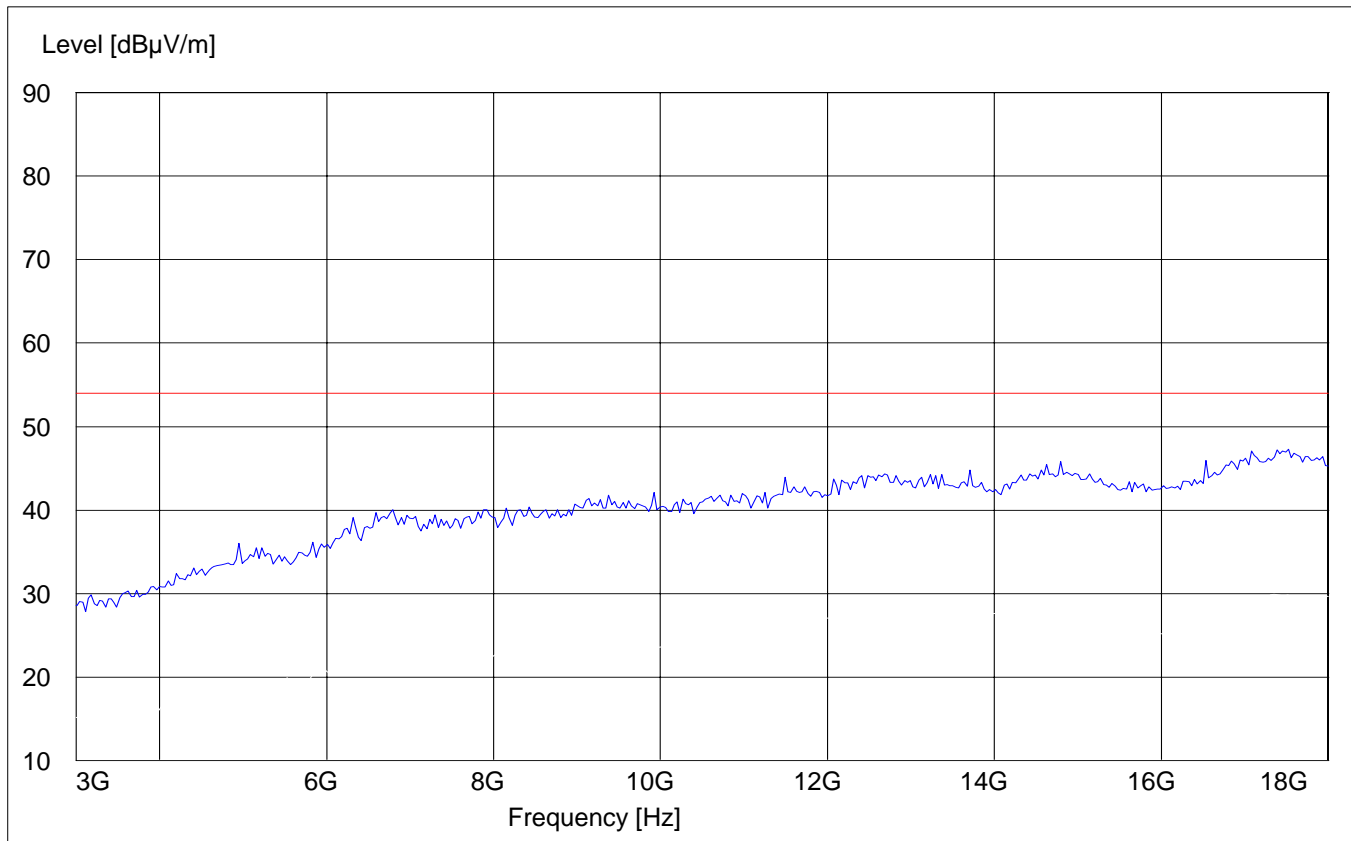

EMISSION LIMITATIONS - Radiated (Transmitter)
§ 15.247 (c) (1)
Highest Channel (2480MHz): 1GHz – 3GHz
NOTE: The peak is the carrier frequency.

SWEEP TABLE:		"BT Spuri hi 1-3G"			
Short Description:		Bluetooth Spurious 1-3GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

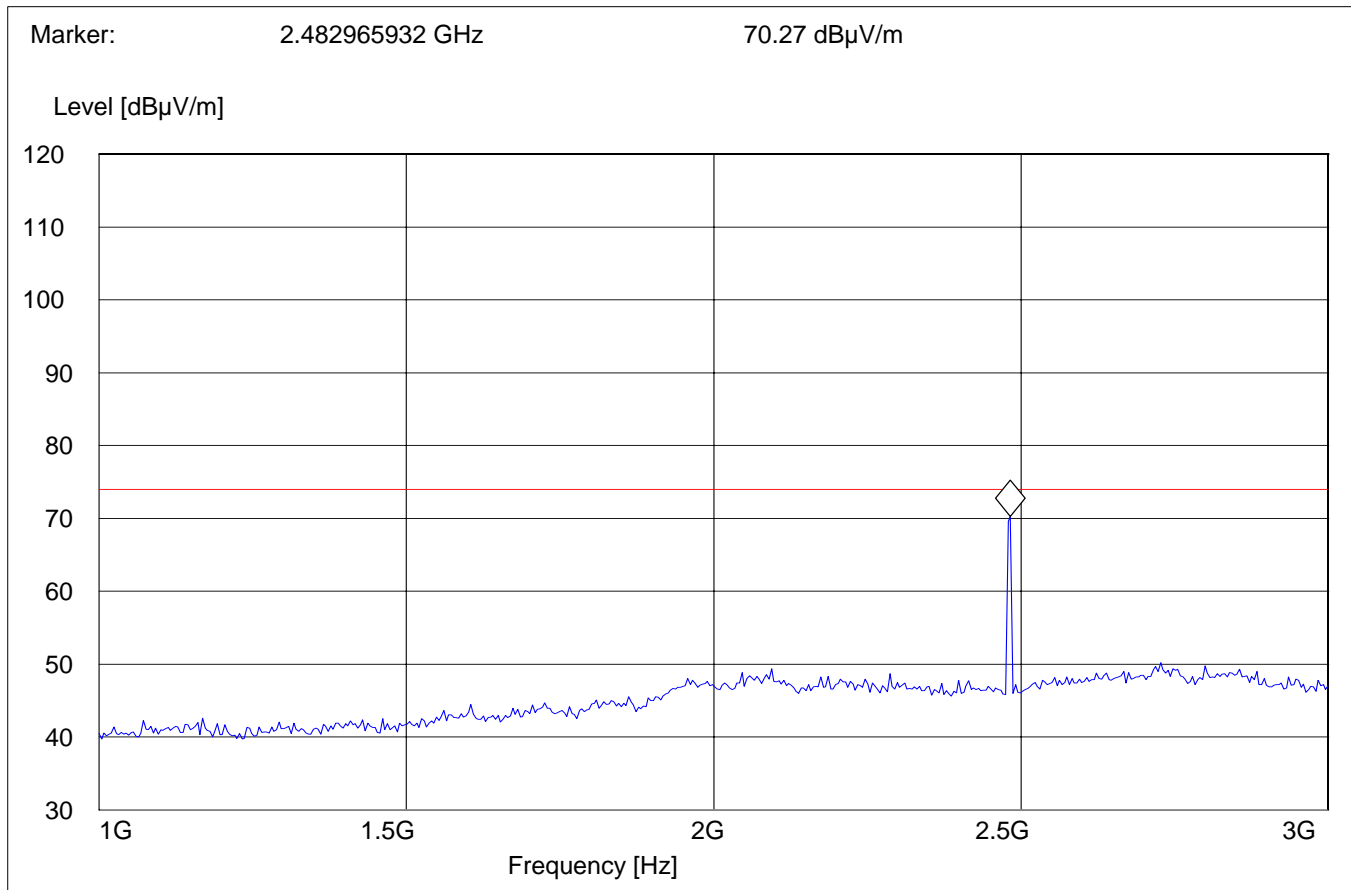


EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Highest Channel (2480MHz): 3GHz – 18GHz

SWEEP TABLE:		"BT Spuri hi 3-18G"			
Short Description:		Bluetooth Spurious 3-18GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

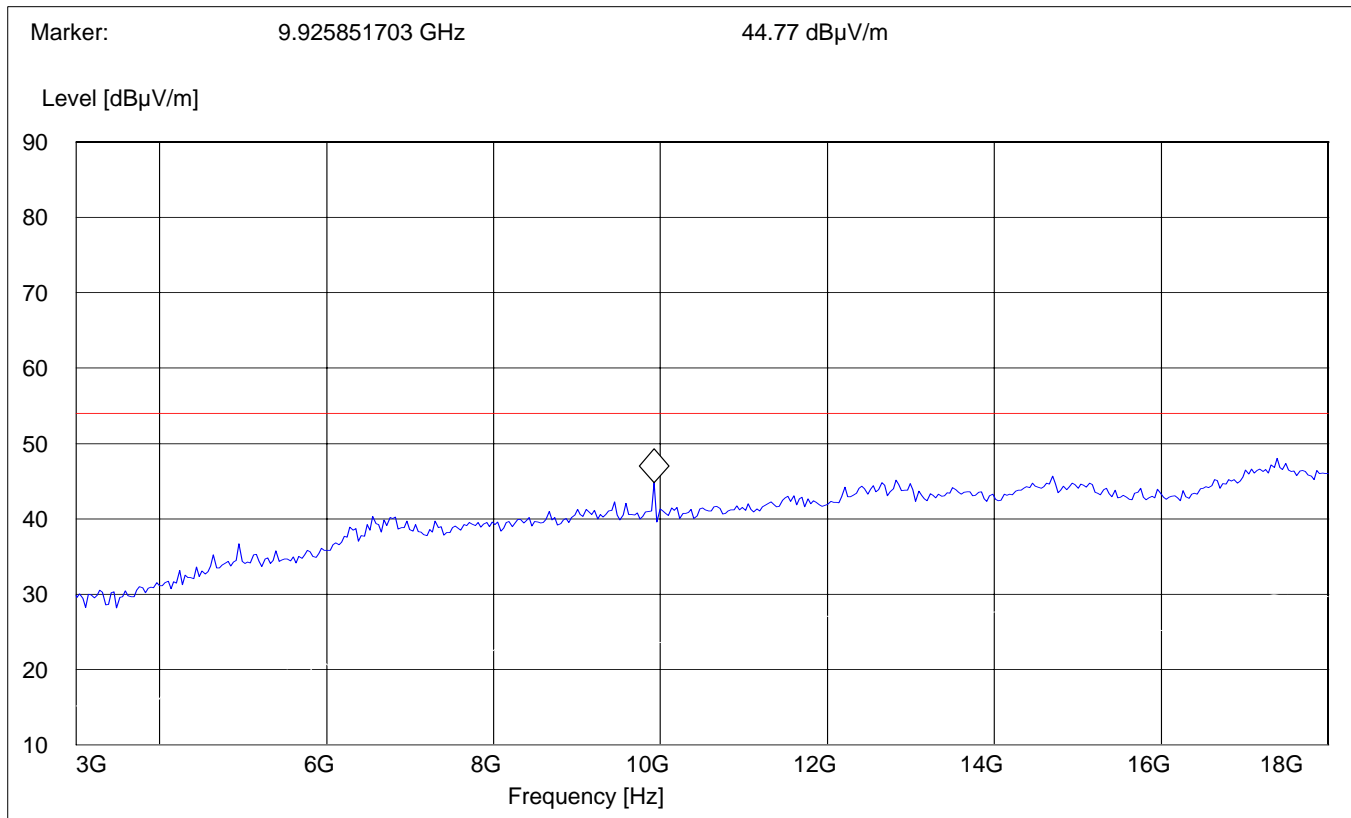


EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

18GHz – 26.5GHz

Note: This plot is valid for low, mid & high channels (worst-case plot)

SWEEP TABLE:		"BT Spuri hi 18-26.5G"			
Short Description:		Bluetooth Spurious 18-26.5GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
18 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	#141 horn (dBi)

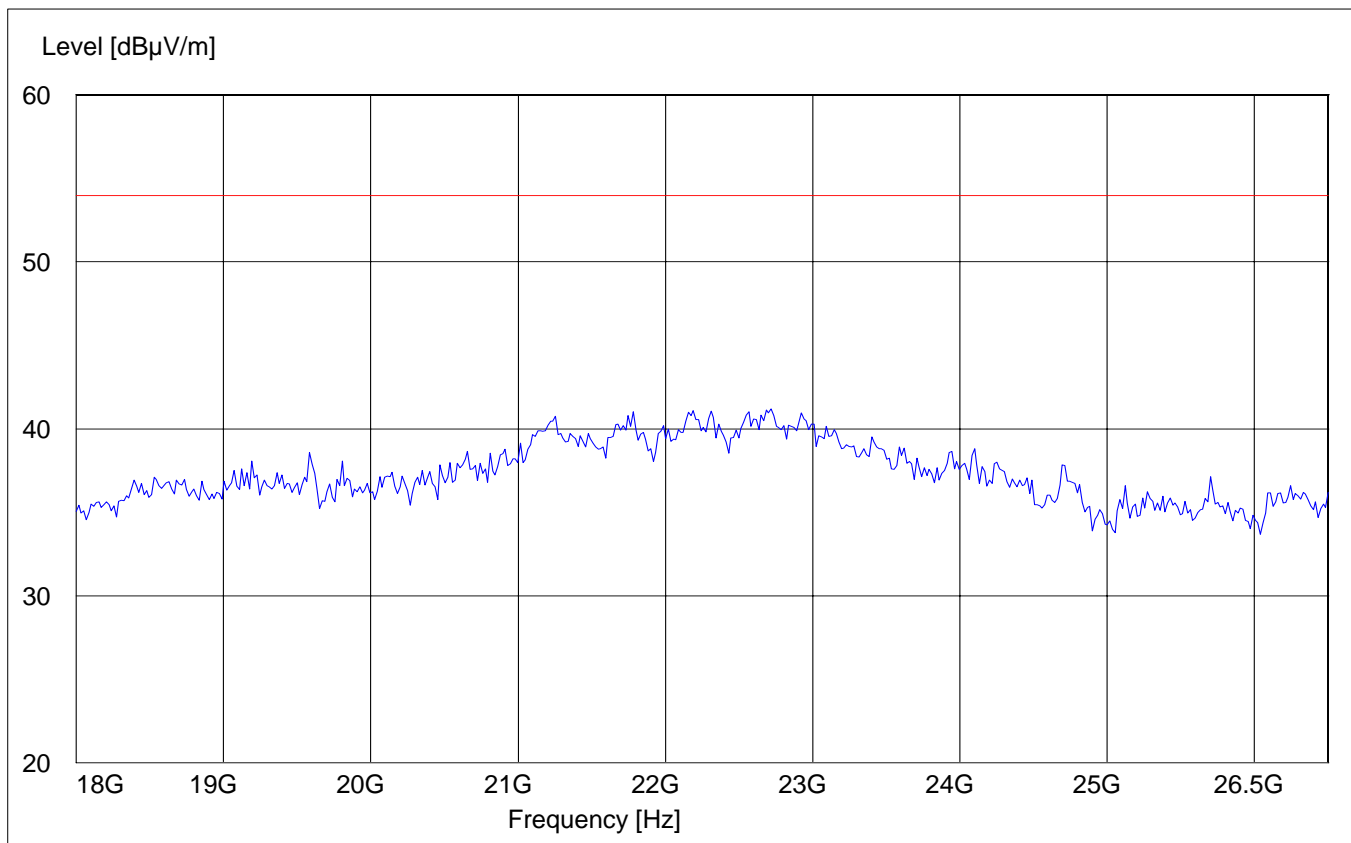

RECEIVER RADIATED EMISSIONS**§ 2.1053 / RSS-GEN****NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 26.5GHz very short cable connections to the antenna was used to minimize the noise level.
2. Receiver emissions were measured to at least 3 time the fundamental emission.
3. Receiver emissions were measured with device receiving on a channel in the 2400 MHz band.

Limits**SUBCLAUSE § RSS-133**

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Receiver Spurious on EUT**RECEIVER RADIATED EMISSIONS****30MHz – 1GHz****Antenna: vertical****Note: Peak Reading Vs. Quasi-Peak Limit.****CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D9500 UNIT 1

Customer: HHP

Operating Mode: RX

Antenna: V

EUT: V

Test Engineer: PETER


Voltage: AC ADAPTOR

Sweep: CANADA RE 30M-1G VER

SWEEP TABLE: "CANADA RE_30M-1G_Ver"Unit: dB μ V/m

Detector: Mode:

Curve 1: MaxPeak MaxHold

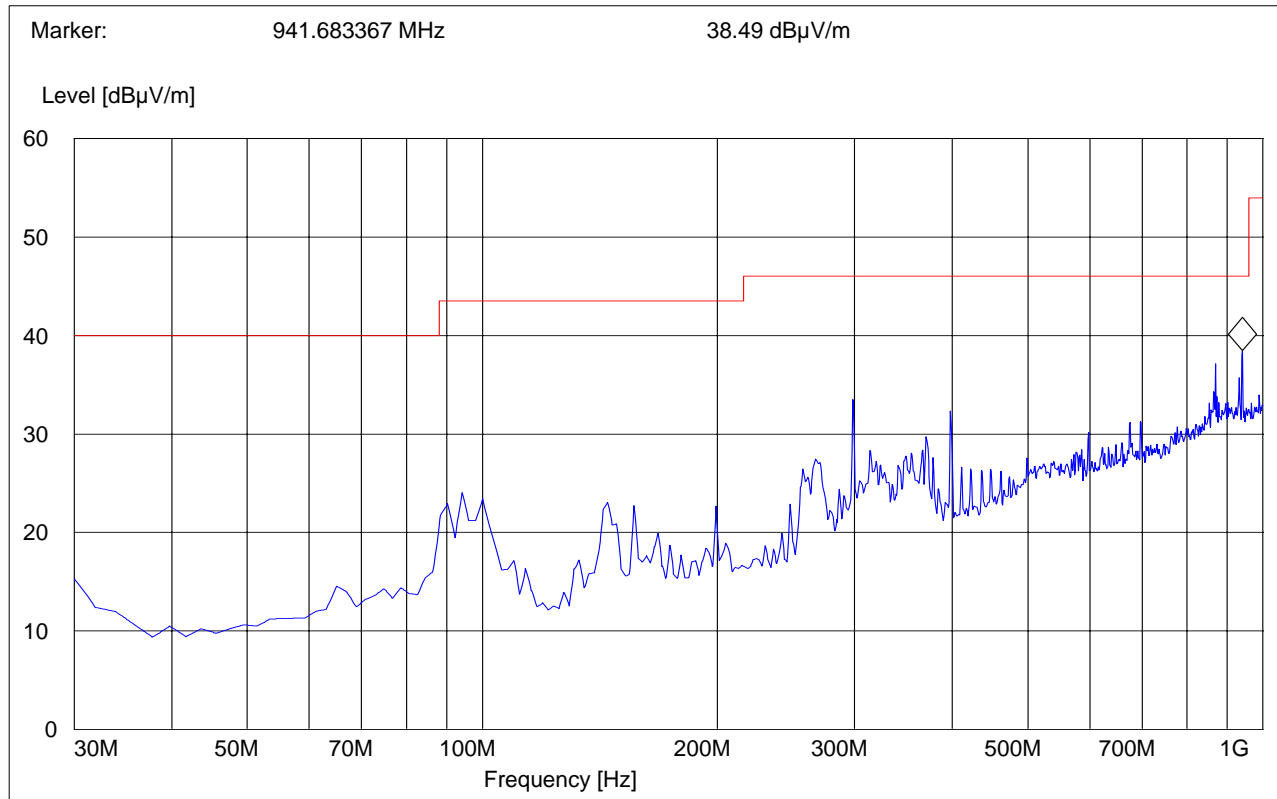

RECEIVER RADIATED EMISSIONS**1GHz – 3GHz****Note: Peak Reading Vs. Average Limit.****CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D9500 UNIT 1

Customer: HHP

Operating Mode: RX

Antenna: V

EUT: V

Test Engineer: PETER


Voltage: AC ADAPTOR

Sweep: CANADA RE 1-3G

SWEEP TABLE: "CANADA RE_1-3G"Unit: dB μ V/m

Detector: Mode:

Curve 1: MaxPeak MaxHold

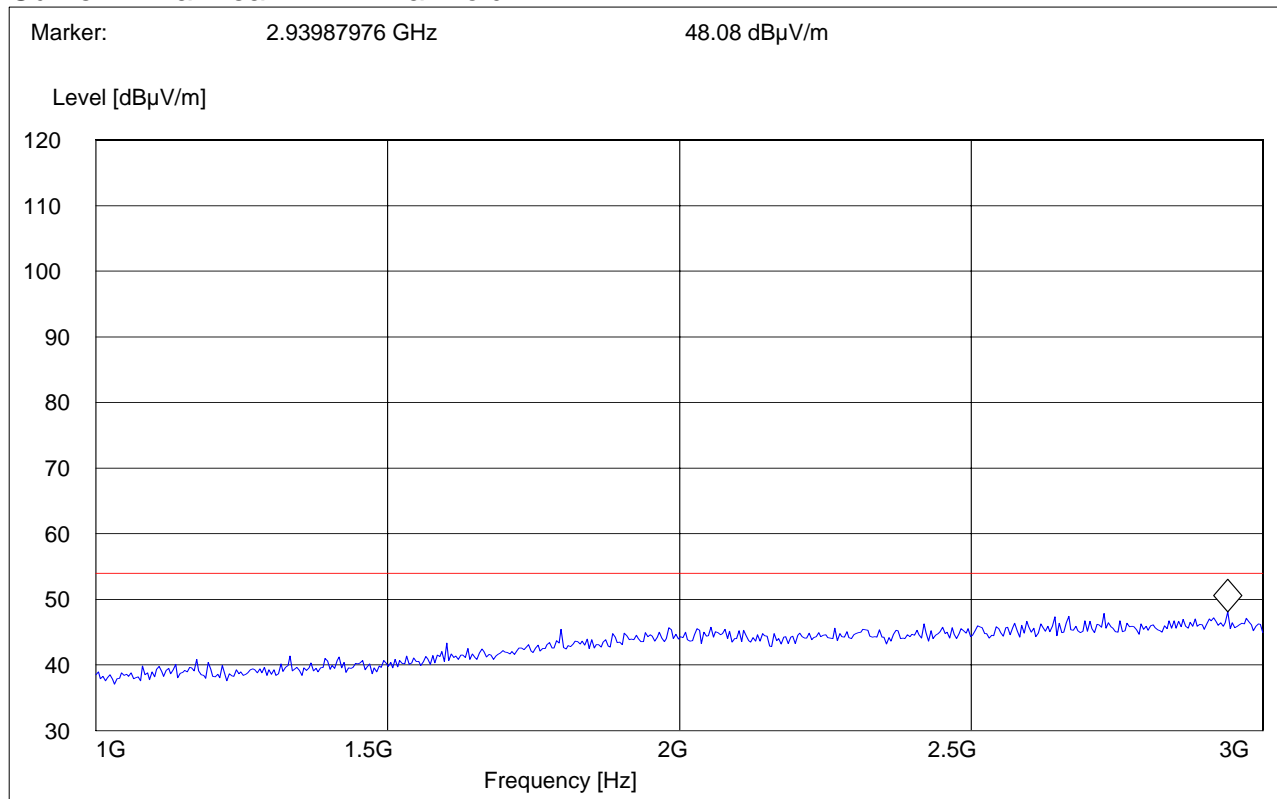

RECEIVER RADIATED EMISSIONS**3GHz – 18GHz****Note: Peak Reading Vs. Average Limit.****CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D9500 UNIT 1

Customer: HHP

Operating Mode: RX

Antenna: V

EUT: V

Test Engineer: PETER


Voltage: AC ADAPTOR

Sweep: CANADA RE 1-18G

SWEEP TABLE: "CANADA RE_3-18G"Unit: dB μ V/m

Detector: Mode:

Curve 1: MaxPeak MaxHold

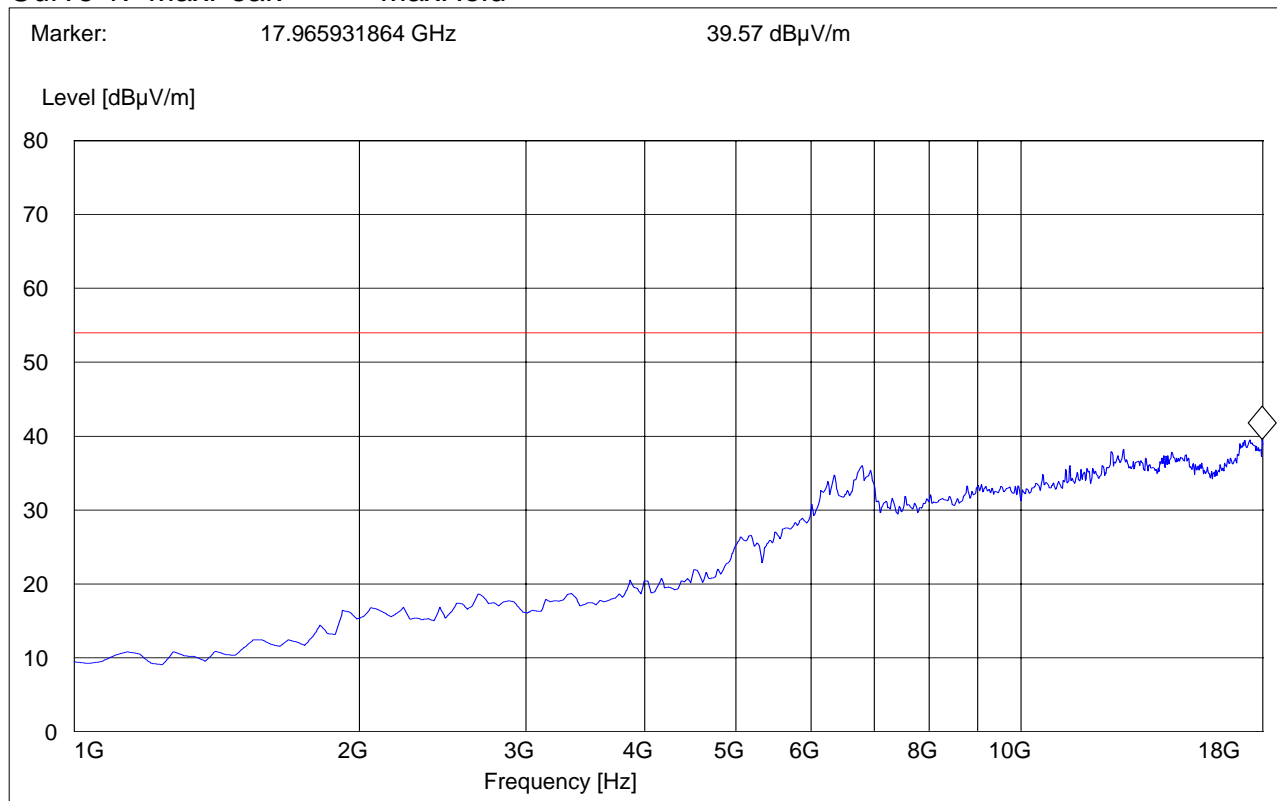

CONDUCTED EMISSIONS

§ 15.107/207

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)

Limit

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50


* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz


MEASUREMENT RESULT: "test_fin AV"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.675000	35.70	0.0	46	10.3	N	GND

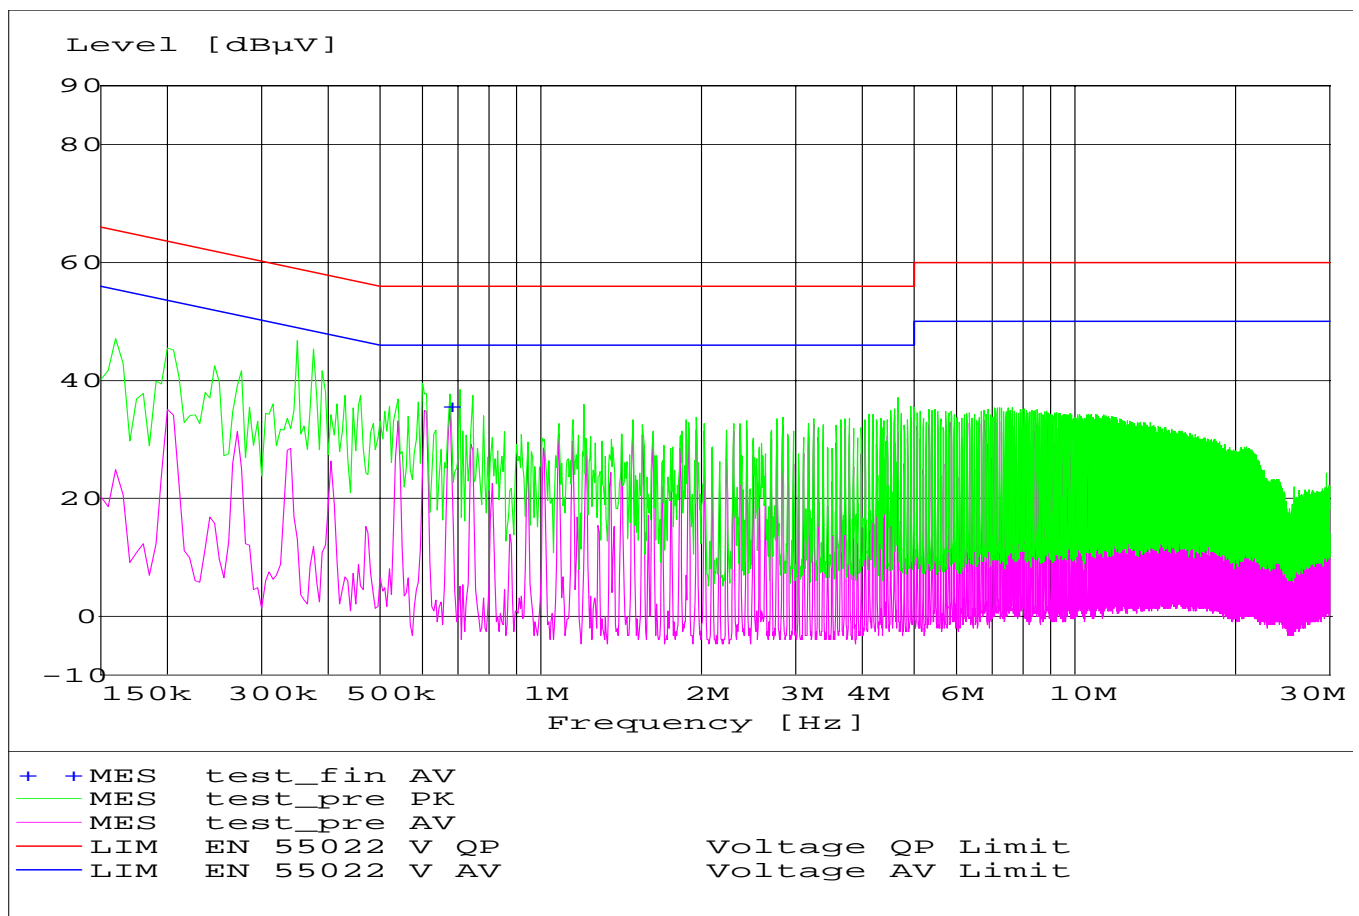

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2007	1 year
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	August 2007	1 year
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2007	1 year
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2007	1 year
05	Biconilog Antenna	3141	EMCO	0005-1186	June 2007	1 year
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2007	1 year
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2007	1 year
08	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
09	Climatic Chamber	VT4004	Voltsch	G1115	May 2007	1 year
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
12	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2007	1 year
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2007	1 year
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2007	1 year
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2007	1 year
16	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2007	1 year
17	Loop Antenna	6512	EMCO	00049838	July 2007	2 years

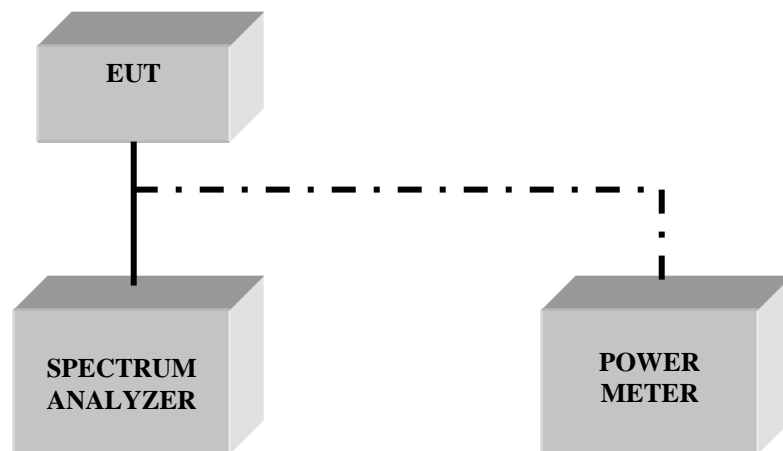BLOCK DIAGRAMS**Conducted Testing**

Radiated Testing

ANECHOIC CHAMBER

