
NOTES:

- 1. MATERIAL: 2 MIL THK 3M 7872 TOPCOATED MATTE PLATINUM POLYESTER ADHESIVE: 1.8 MIL THK 3M 350 PREMIUM PERFORMANCE ACRYLIC
- 2. Q.C. PER PROCEDURE 1580500.doc

3. LABELS ARE FANFOLDED. SPACE EVENLY.

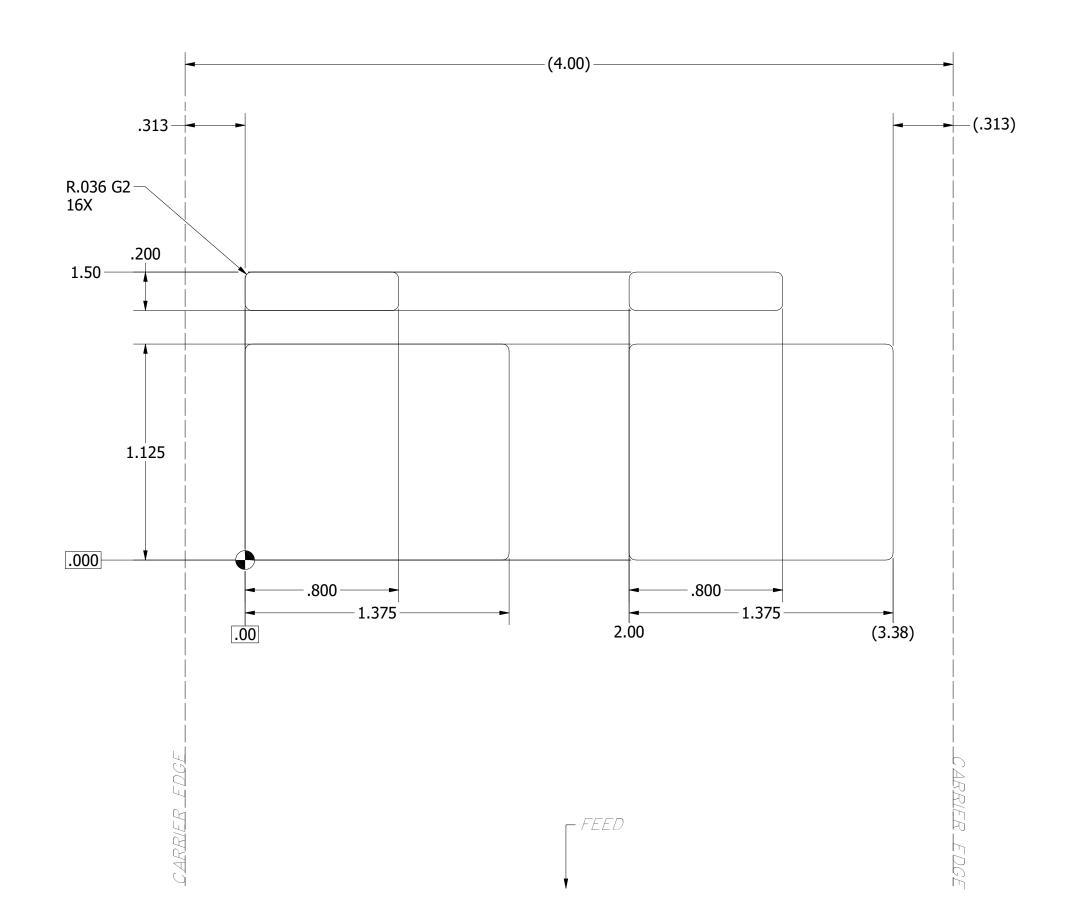

	REVISIONS					
REV	V ECN	DRAWN BY	DATE	CHECKED		
A	9038	AHT	5/12/20	RJP		

UNLESS OTHERWISE SPECIFIED * DIMENSIONS ARE IN INCHES * REMOVE ALL BURRS, SHARP EDGES, FLASH, AND CONTAMINATES * DIMENSIONAL LIMITS APPLY AFTER PLATING (OR COATING). * SURFACE ROUGHNESS 125 MICRO-INCHES OR BETTER. TOLERANCES ARE: FRACTIONS DECIMALS ANGLES + N/A .XX ± .020 + 1*		State St.,	ELECTR Garland, Texas AX 972-494-1881	,	7 U.S.A.			
- N/A .xxx ± .010 RoHS Document of Conformance Required	THESE DRAWINGS AND SPECIFICATIONS, AND THE DATA CONTAINED THEREIN, ARE THE EXCLUSIVE PROPERTY OF GARRETT ELECTRONICS INC., ISSUED IN STRICT CONFIDENCE AND SHALL NOT, WITHOUT THE PRIOR WRITTEN PERMISSION OF GARRETT ELECTRONICS INC., BE REPRODUCED, COPIED OR USED FOR ANY PURPOSE WHATSOEVER, EXCEPT FOR THE MANUFACTURING OF ARTICLES FOR GARRETT ELECTRONICS INC.							
MATERIAL	AHT checked <i>RJP</i>	DATE 5/4/2020 DATE 5/12/2020	LABEL SE	T SERIAL I	M145			
FINISH	engineer AHT approved RJP	DATE 5/12/2020 DATE 5/12/2020	SCALE 2 · 1 DO NO	28800 27. SCALE SHEET	1 OF 1			