



Shenzhen Lejin radio frequency technology Co., LTD

SPECIFICATIONS FOR APPROVAL

Customer Name: Shenzhen Suichen Technology Co.,Ltd

Product Name: WIFI Antenna1

Antenna type: FPC Antenna

Product Model: N/A

Part Number: LJF02-21051908A-R0A

Write By : Limingjin

Issued Date: 2021-05-19

CUSTOMER

ENGINEER R&D DEPT	BUSSINESS DEPT	APPROVAL

LEJIN

R&D DEPT	ENGINEER DEPT	APPROVAL

REV	MODIFIED DESCRIPTION	DATE	REMARK
V1.0	Initial Draft Release	2021/05/19	

Index

1. Cover	1
2. Index	2
3. Product Specification	3
4. Test Equipment & Conditions	3
5. Test Report	4
6. Reliability Test	5
7. Assemble type	6
8. Product Drawing	8

3.Product Specification

A. Electrical Characteristics	
Frequency	2400MHz ~2500 MHz 5150MHz ~5850 MHz
VSWR	<2.0
Efficiency	≥40%
Impedance	50Ohm
Antenna type	PIFA
Polarization	Linear
Gain(2.4G)	≤2.34dBi
Gain(5G)	≤2.69dBi
B. Material & Mechanical Characteristics	
Material of Radiator	FPC,black,,LJWF23F
Cable Type	Φ0.81mm,L110mm,Black
Connector Type	IPX3
Dimension	26.6mm*22.6mm
C. Environmental	
Operation Temperature	- 20 °C ~ + 70 °C
Storage Temperature	- 30 °C ~ + 85 °C
Humidity	40%~95%

4.Test Equipment & Conditions

- 1.Network Analyzers Agilent 8753D/5071C
- 2.HSPA and LTE protocol test set R&S CMW500 -PT
- 3.Communications Test Set Agilent 8960
- 4.3D Chamber Test System

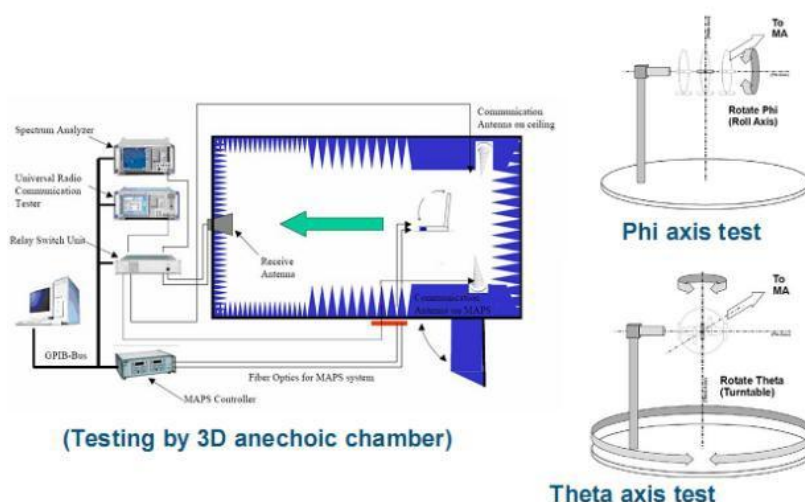


Chart 1 Test topology

5.Test Report

5.1 Voltage Standing Wave Ratio(VSWR).

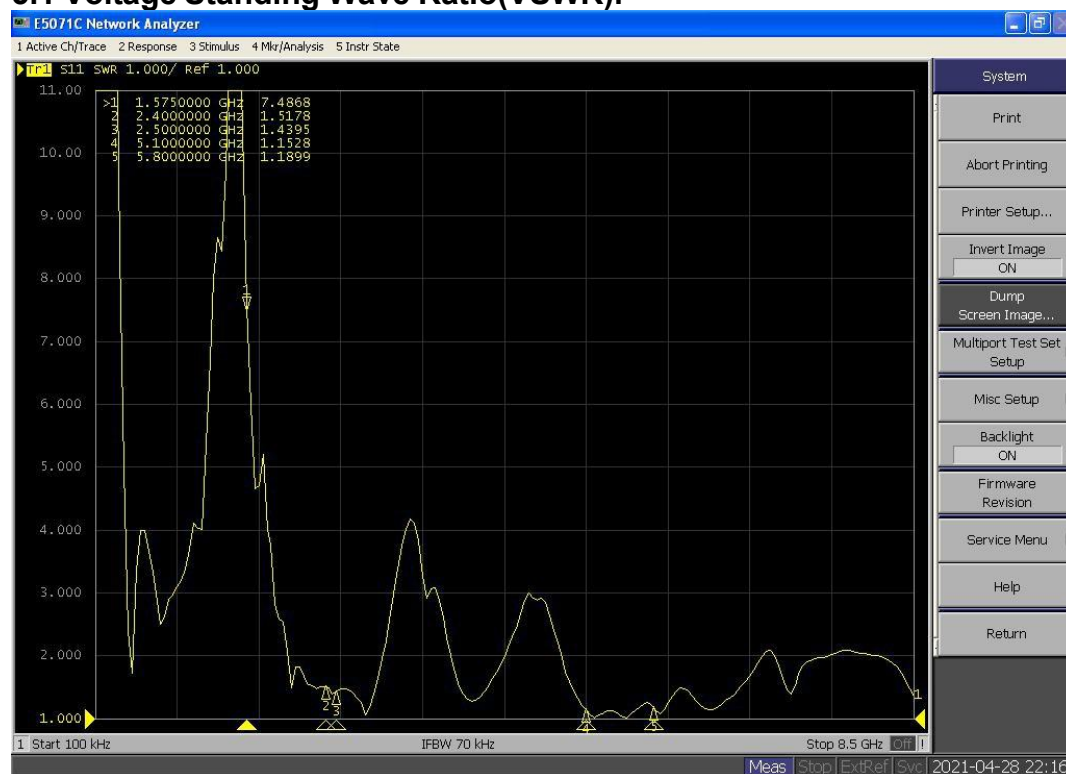



Chart 2 VSWR

5.2 Efficient and gain.

Passive	Freq(MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Test For	Effi(%)	48.94	44.62	52.73	49.23	50.91	46.61	45.54	46.90	47.46	44.97	44.33
WIFI 2.4G	Gain(dBi)	2.06	1.87	2.34	1.96	2.13	1.94	1.92	1.87	1.89	1.81	1.83



Passive	Freq(MHz)	5150	5200	5250	5300	5350	5400	5450	5500	5550	5600	5650	5700	5750	5800	5850
Test For	Effi(%)	52.26	49.16	47.49	52.19	50.06	50.27	51.2	46.44	45.09	41.88	42.99	44.82	41.01	40.99	39.92
WIFI 5G	Gain(dBi)	2.52	2.69	2.14	2.67	2.49	2.37	2.23	2.05	2.57	1.93	1.75	2.18	2.19	1.52	1.88

5.3 Radiation pattern.

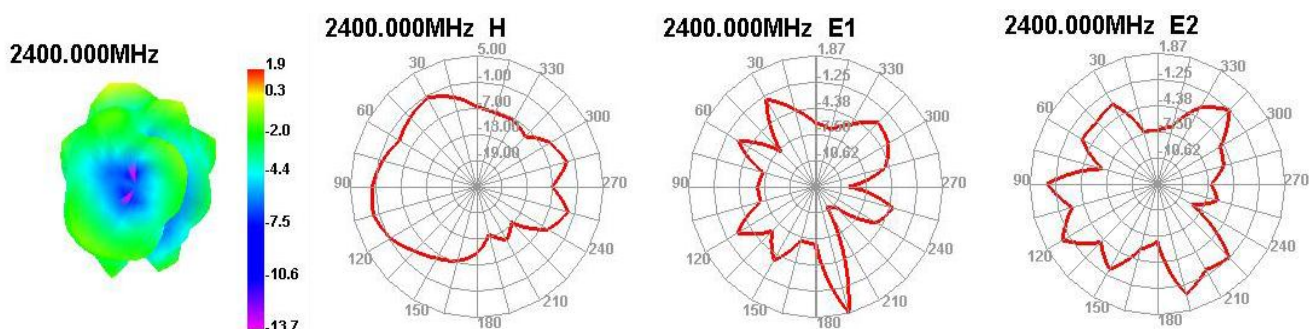





2450.000MHz




2450.000MHz H





2450.000MHz E1




2450.000MHz E2




2500.000MHz




2500.000MHz H





2500.000MHz E1




2500.000MHz E2




5150.000MHz




5150.000MHz H





5150.000MHz E1




5150.000MHz E2




5550.000MHz




5550.000MHz H





5550.000MHz E1




5550.000MHz E2




6000.000MHz




6000.000MHz H



6000.000MHz E1



6000.000MHz E2





6. Reliability Test

Test Item		Test condition	Equipment	Specification	Result
1	Low Temp. Storage Test	Temperature: -30℃, Time: 48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-down the temp. to -30℃ in one hour, store antenna for 44 hours; step-up temp to 25℃, test antenna after 2 hours.	Temp. & Humi. Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
2	High Temp./High Humid Storage Test	Temperature: 85℃ Humidity: 85% RH Time: 48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-up the temp. to 80℃ and the humidity up to 85% in one hour, store antenna for 44 hours; step-down temp to 25℃, test antenna after 2 hours.	Temp. & Humi. Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
3	Salt-Spray 6 pray Test	Placing antenna in the Salt-Spray Tester, set the test condition, Temp: $35 \pm 2^\circ\text{C}$ Humidity: 85% NaCl salt spray: $5 \pm 1\%$. PH value: 6.5~7.2 Testtime: 24 hours	Salt-Spray Tester	No color change No appear rusting	PASS

7. Assemble type

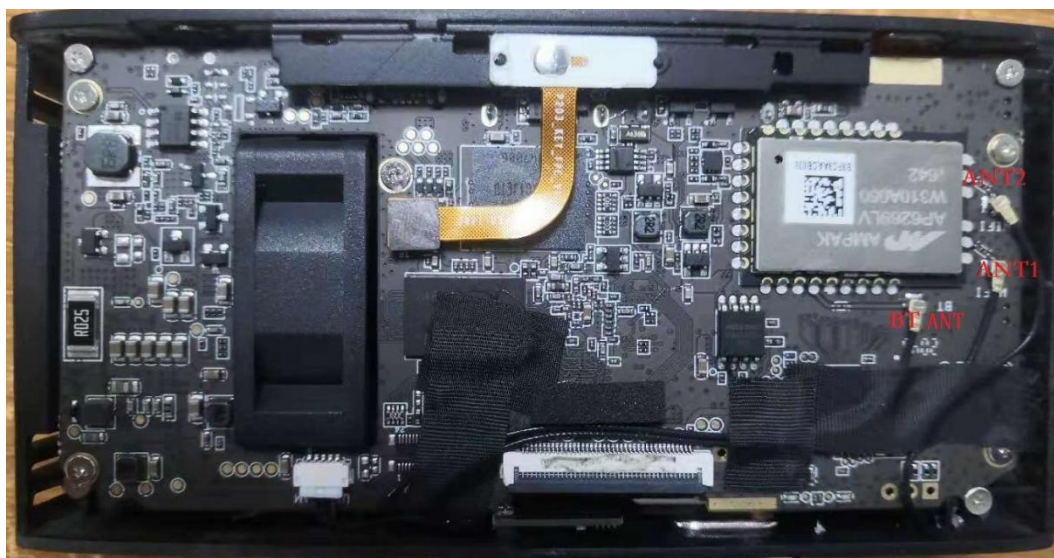


Chart 3 Assemble type(overall)







Chart 4 Assemble type

8.Product Drawing

A

由Autodesk教育版产品制作

D

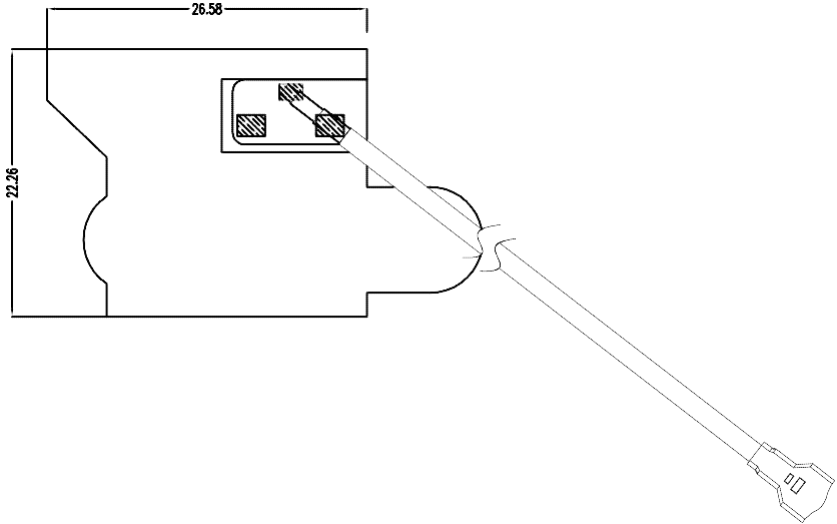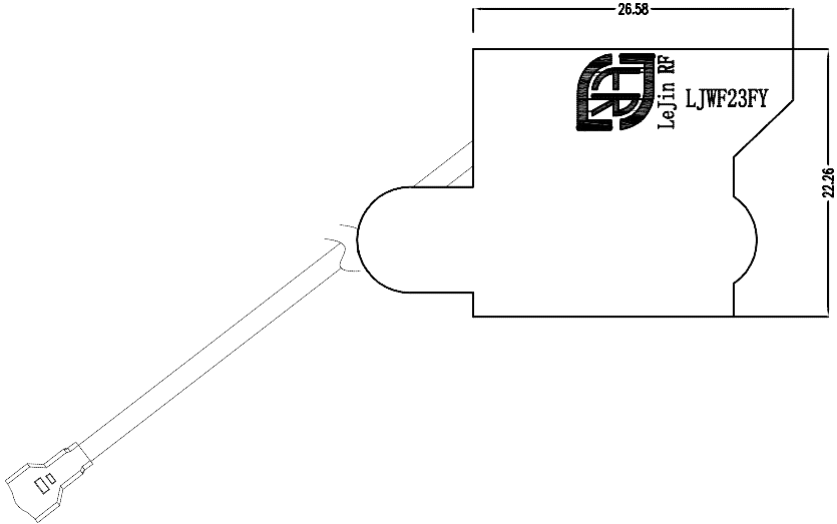

0.81 Black Wire, KCC3 Generation Terminal



深圳乐进射频科技有限公司
SHEN ZHEN LEJIN RADIO FREQUENCY CO., LTD

Third Angle		Project	Date		2021-06-07			
0~10	±0.05	○	0.02	Part Name	WIFI Dual-frequency		Designed by	
10~18	±0.10	◎	0.03	Part No.			MD	
18~30	±0.12	⊥	0.02	Material	LJF01-20053002FY-R0A		Checked by	
30~40	±0.15	▱	0.04	Treatment			RF	
40~	±0.20	Angle	±0.5°				Approved by	
Location		Unit		mm	Scale	FIT	Rev	A

A	New drawing			
Rev	Description	Date	Remark	