## **FCC Test Report**

Application Purpose : Original grant

Applicant Name: : INFINIX MOBILITY LIMITED

FCC ID : 2AIZN-X602

**Equipment Type** : Mobile phone

Model Name : X602

Report Number : FCC16093968A-7

Standard(S) : FCC Part 15 Subpart E

Date Of Receipt : September 05, 2016

Date Of Issue : October 19, 2016

Test By :

(Daisy Qin)

Reviewed By

(Sol Qin)

Authorized by :

(Michal Ling)

Prepared by

QTC Certification & Testing Co., Ltd.

2nd Floor,B1 Buiding,Fengyeyuan Industrial Plant,,Liuxian

2st.Road,Xin'an Street,Bao'an District,,Shenzhen, 518000China. **Registration Number: 588523** 

## REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	October 19, 2016	Valid	Original Report

Table of Contents	Page
<ol> <li>GENERAL INFORMATION         <ul> <li>8. BAND EDGE EMISSIONS</li> </ul> </li> <li>1 Test Equipment</li> <li>2 Test Procedure</li> <li>3 Test Setup</li> <li>4 Configuration of the EUT</li> <li>5 EUT Operating Condition</li> <li>6 Limit</li> <li>7 Test Result</li> </ol>	4 6 6 7 7 7 7 7
9. DYNAMIC FREQUENCY SELECTION (DFS)	25
10. EUT TEST PHOTO	26
11. PHOTOGRAPHS OF EUT	29

#### 1. GENERAL INFORMATION

## GENERAL DESCRIPTION OF EUT

NERAL DESCRIP	11011 01 201
Test Model	X602
Applicant	INFINIX MOBILITY LIMITED
Address	RMS 05-15, 13A/F SOUTH TOWER WORLD FINANCE CTR HARBOUR CITY 17 CANTON RD TST KLN HONG KONG
Manufacturer	SHENZHEN TECNO TECHNOLOGY CO.,LTD.
Address	1-4th Floor,3rd Building,Pacific Industrial Park,No.2088,Shenyan Road,Yantian District,Shenzhen,Guangdong,China
Equipment Type	Mobile phone
Brand Name	Infinix
Hardware version:	V1.1_B1-BOM
Software version:	X602-H972B1-M-160823V7
Extreme Temp. Tolerance	-10℃ to +65℃
Battery information:	Li-Polymer Battery : BL-40FX Voltage: 3.85V Capacity: 4000mAh Limited Charge Voltage: 4.4V
Adapter Information:	Adapter: CQ-18KX Input: 100-240V 50/60Hz 600mA Output: 5V-6V 3A Output: 6V-9V 2A Output: 9V-12V 1.5A
Operating Frequency	see the below table
Channels	see the below table
Channel Spacing	see the below table
Modulation Type	see the below table
Antenna Type:	PIFA Antenna
Antenna gain:	-4dBi
Data of receipt	September 05, 2016
Date of test	September 05, 2016 to October 19, 2016
Deviation	None
Condition of Test Sample	Normal

## **EUT Specification:**

Items	Description		
Modulation	IEEE 802.11a: OFDM IEEE 802.11n: see the below table IEEE 802.11ac: see the below table		
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)		
Data Rate (Mbps)	IEEE 802.11a: OFDM 6,9,12,18,24,36,4 IEEE 802.11n: MCS 0-15 up to 150 Mb IEEE 802.11ac: MCS 0-9 up to 866.7 M	os	
Frequency Range	Band 1: 5150 MHz ~ 5250 MHz Band 2: 5250 MHz ~ 5350 MHz Band 4: 5725 MHz ~ 5850 MHz		
Channel Number	13 for 20MHz bandwidth; 6 for 40MHz	bandwidth ; 3 for 80MHz bandwidth	
Communication Mode	☑IP Based (Load Based)	☐Frame Based	
TPC Function	☐With TPC	Without TPC     ■	
Weather Band	☐With 5600~5650MHz	⊠Without 5600~5650MHz	
Beamforming Function	☐With beamforming		
Operating Mode	Outdoor access point	☐Indoor access point	
	Fixed point-to-point access points		
	☐Master	☐Slave with radar detection	
	⊠Slave without radar detection		

Antenna	One (TX)			
Band width Mode	20 MHz	40 MHz	80 MHz	
IEEE 802.11a	V	X	Х	
IEEE 802.11n	V	V	Х	
IEEE 802.11ac	V	V	V	

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	1	MCS 0-15
802.11n (HT40)	1	MCS 0-15
802.11ac (HT20)	1	MCS 0-9
802.11ac (HT40)	1	MCS 0-9
802.11ac (HT80)	1	MCS 0-9

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 and HT80 (HT: High Throughput). Then EUT supports HT20 and HT40 and HT80.

Note 2: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n

HT20/HT40/HT80: IEEE 802.11ac

We hereby certify that:
All measurement facilities used to collect the measurement data are located at QTC Certification &
Testing Co., Ltd.
Registration Number: 588523
The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.10:2013. The sample tested as described in this report is in compliance with the FCC Rules Part15 Subpart E. All the testing was referenced KDB NO. 789033 D02 v01r03. The test results of this report relate only to the tested sample identified in this report.
8. BAND EDGE EMISSIONS
8. 1 Test Equipment
Please refer to Section 4 this report.

#### 8. 2 Test Procedure

#### **Band Edge Emissions Measurement:**

Test Method:

- a.) The EUT was tested according to ANSI C63.10.
- b)The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 1.5 m. All set up is according to ANSI C63.10.
- c)The frequency spectrum from 9 kHz to 40 GHz was investigated. All readings from 9 kHz to 150 kHz are quasi-peak values with a resolution bandwidth of 200 Hz. All readings from 150 kHz to 30 MHz are quasi-peak values with a resolution bandwidth of 9 KHz. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 KHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- d)The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. The Receiving antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency. Emissions below 30MHz were measured with a loop antenna while emission above 30MHz were measured using a broadband E-field antenna.
- e) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.

f)Each emission was to be maximized by changing the polarization of receiving antenna both

horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter(EUT) was rotated through three orthogonal axes according to the requirements in

Section 8 and 13 of ANSI C63.10.

#### Band Edge Emissions Measurement:

Test Equipment Setting:

a)Attenuation: Auto

b)Span Frequency: 100 MHz c)RBW/VBW (Emission in restricted band):

1MHz / 3MHz for Peak, 1MHz / 1/T for Average d)RBW/VBW(Emission in non-restricted band)

1MHz / 3MHz for peak

### 8. 3 Test Setup

Same as section 2.2 of this report

#### 8. 4 Configuration of the EUT

Same as section 2.2 of this report

#### 8. 5 EUT Operating Condition

Same as section 2.2 of this report.

#### 8. 6 Limit

# Spurious Radiated Emission & Band Edge Emissions Measurement: Limit: For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

Page 8 of 39

For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In any 100 KHz bandwidth outside the operating frequency band, the radio frequency power that is produced by modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 KHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in section 15.209(a), which lesser attenuation.

All other emissions inside restricted bands specified in section 15.205(a) shall not exceed the general radiated emission limits specified in section 15.209(a)

#### Note:

Applies to harmonics/spurious emissions that fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

47 CFR § 15.237(c): The emission limits as specified above are based on measurement instrument employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.

#### 8. 7 Test Result

#### Band Edge and Fundamental Emissions


= = = = = = = = = = = = = = = = = = =			
Product:	Mobile Phone	Test Mode:	IEEE 802.11a/n/ac 5G
Test Item:	Band Edge and Fundamental	Temperature:	25 ℃

Page 9 of 39


	Emissions		
Test Voltage:	DC 5V	Humidity:	56%RH
Test Result:	PASS		

#### IEEE 802.11a

Channel Low (5180MHz)

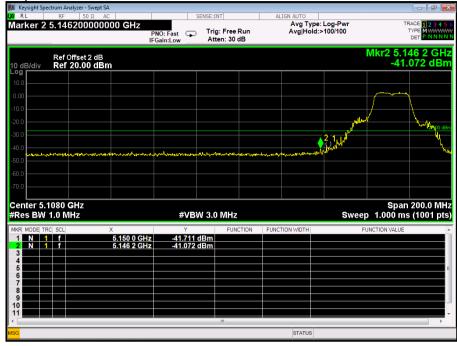



Channel High (5320MHz)

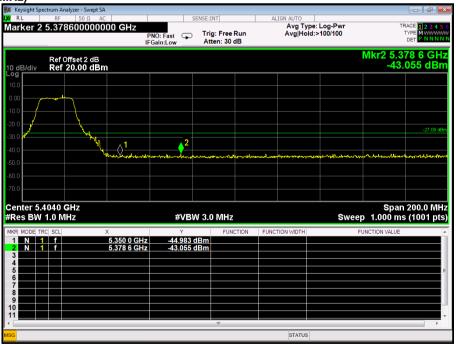


Channel Low (5745MHz)


Page 10 of 39

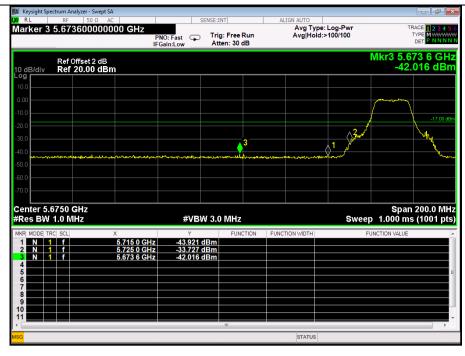


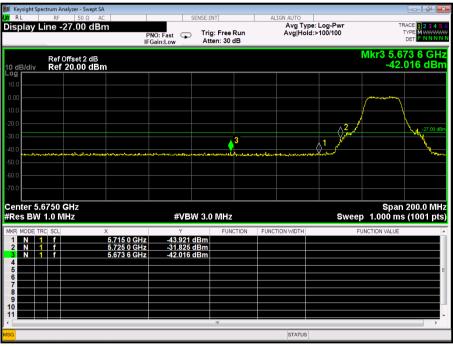


Page 11 of 39

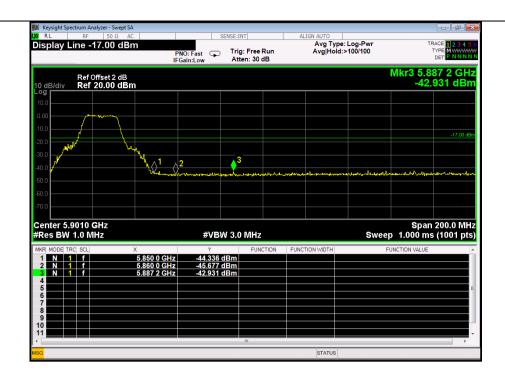

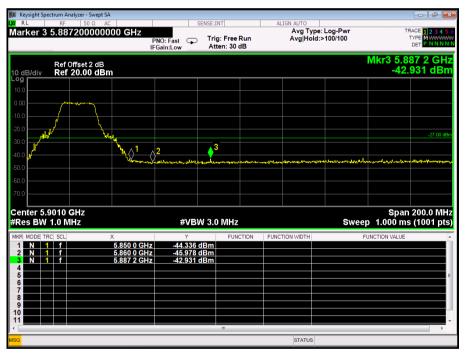


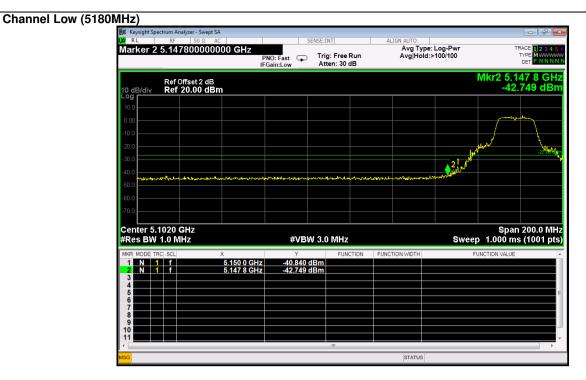




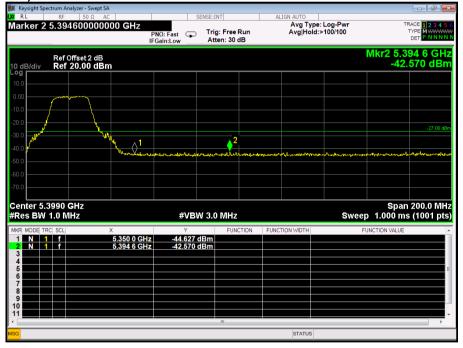



Page 13 of 39

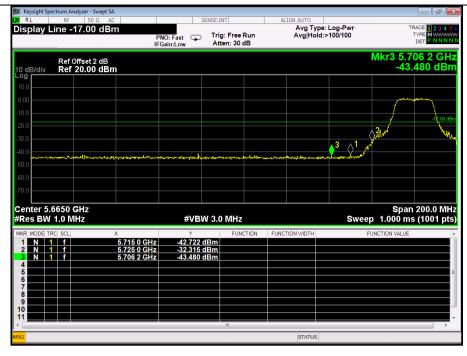


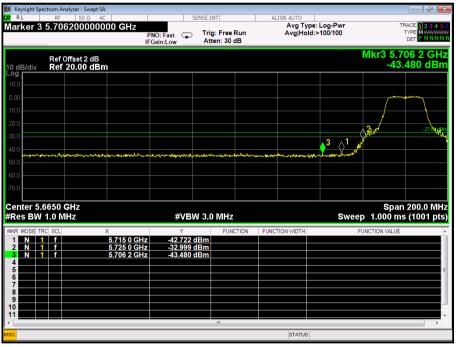


Page 14 of 39

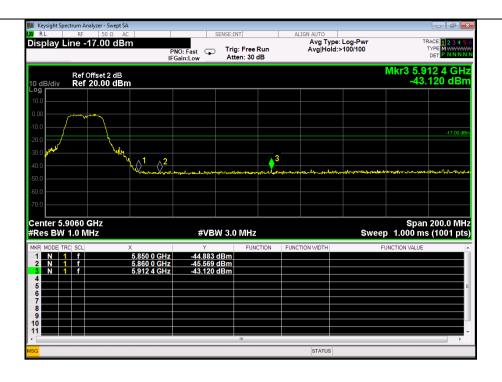

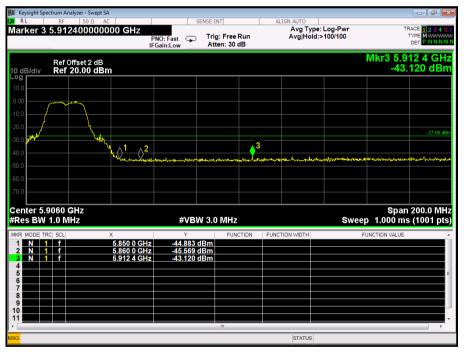


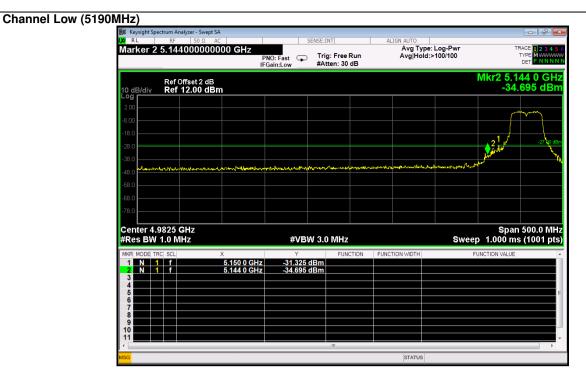




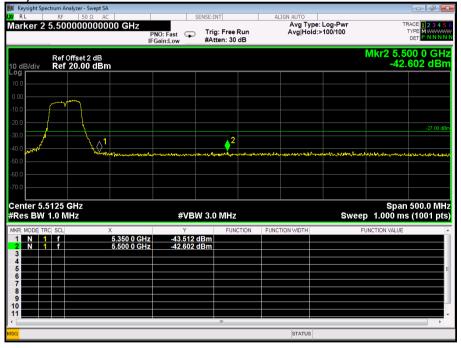


Page 16 of 39

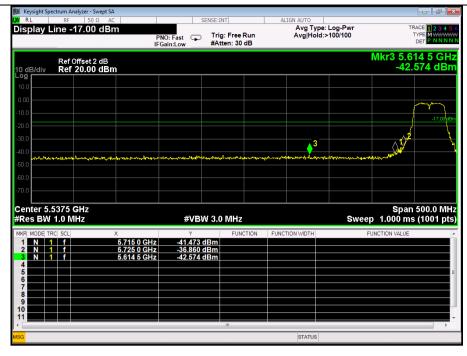


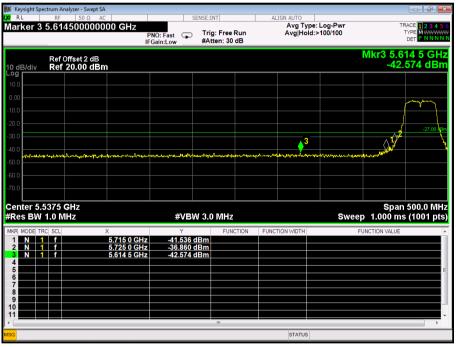



Page 17 of 39

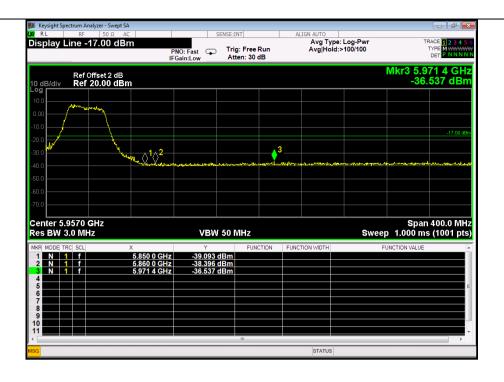





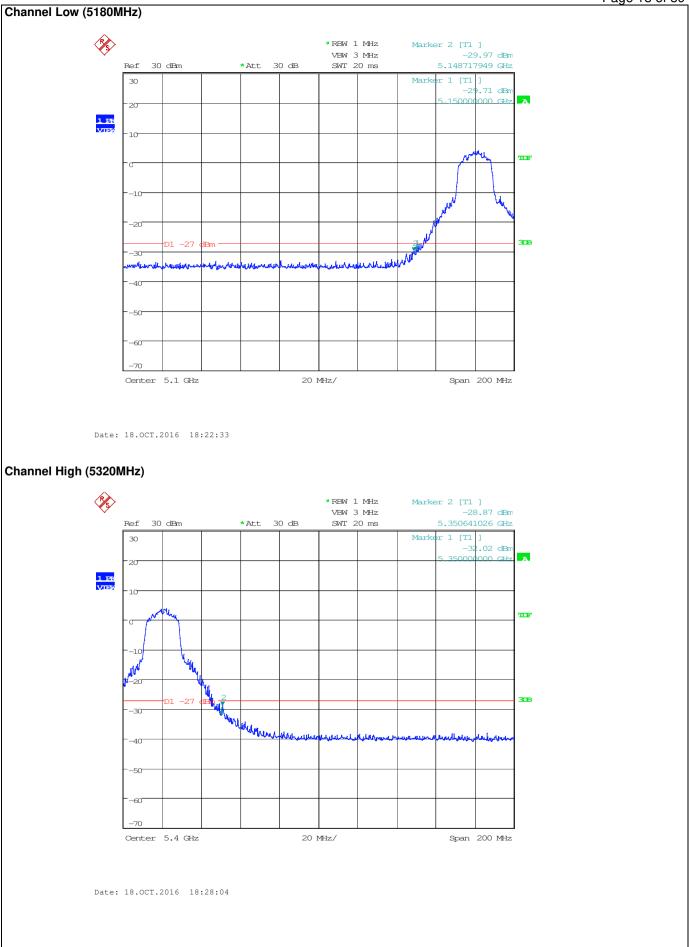


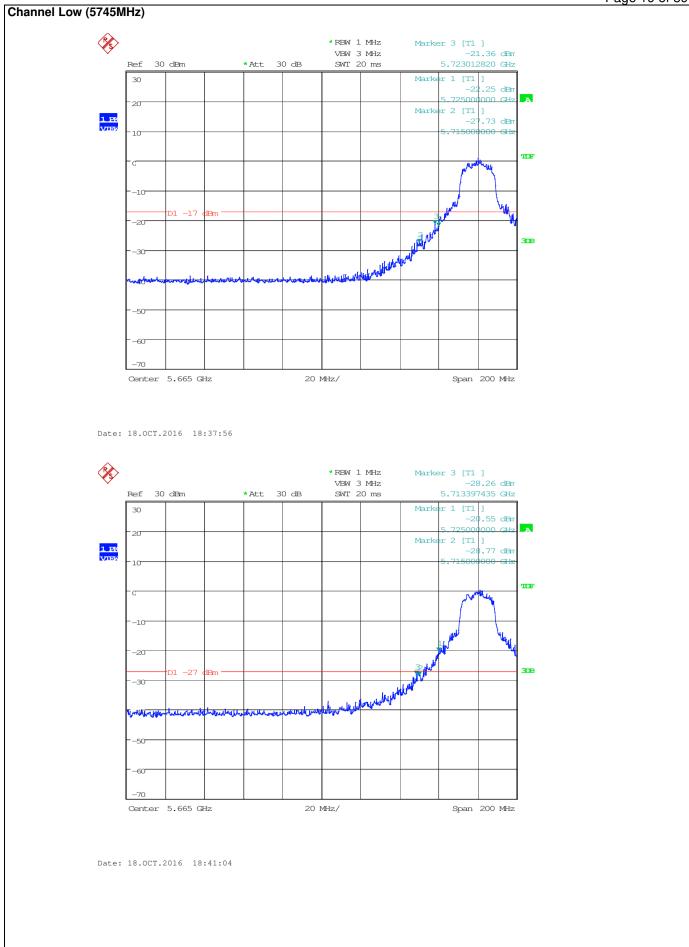


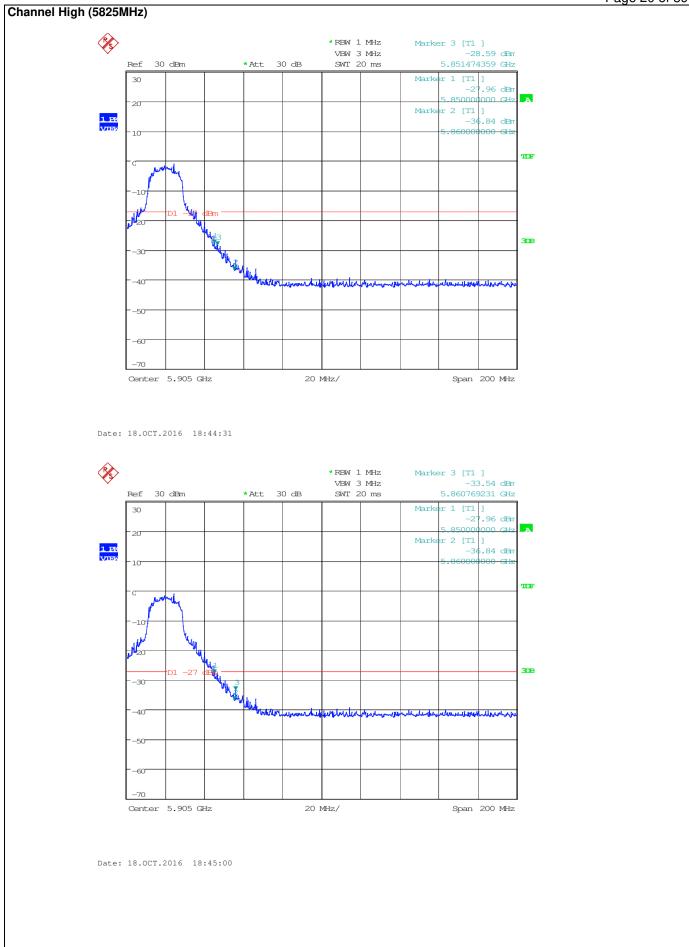


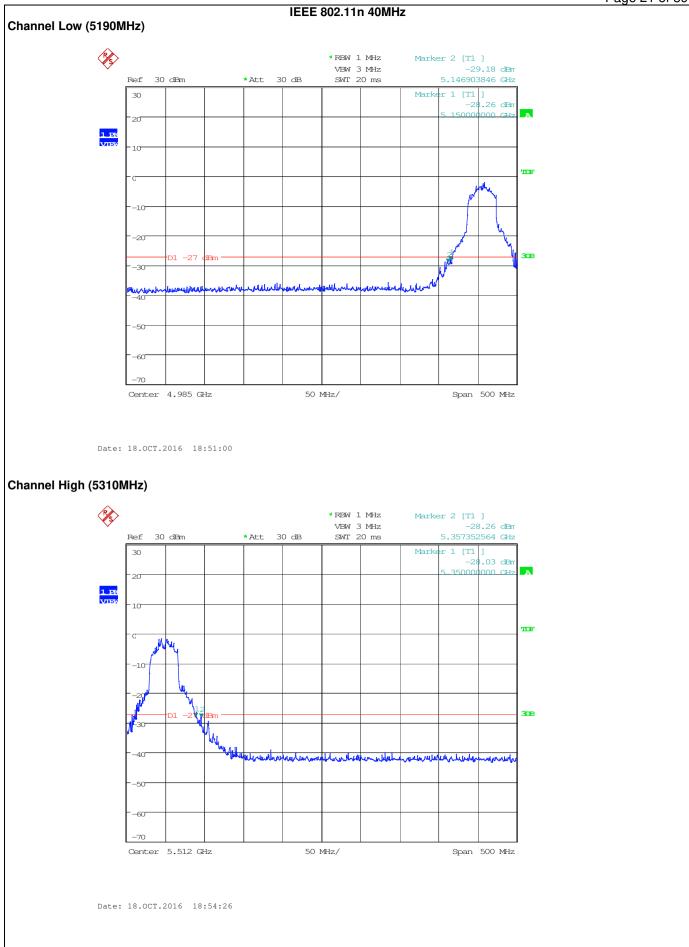

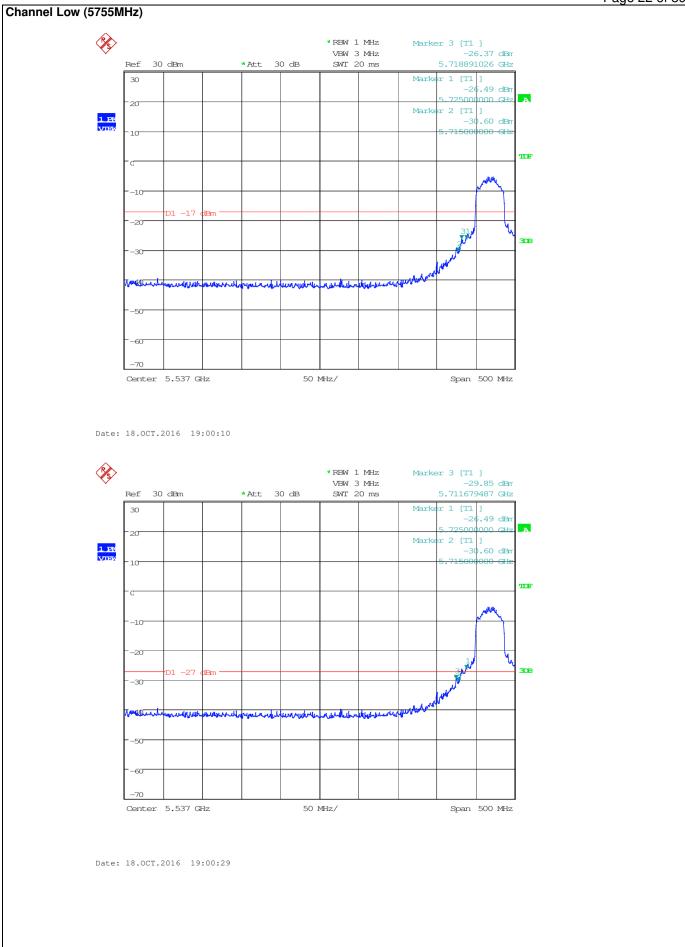

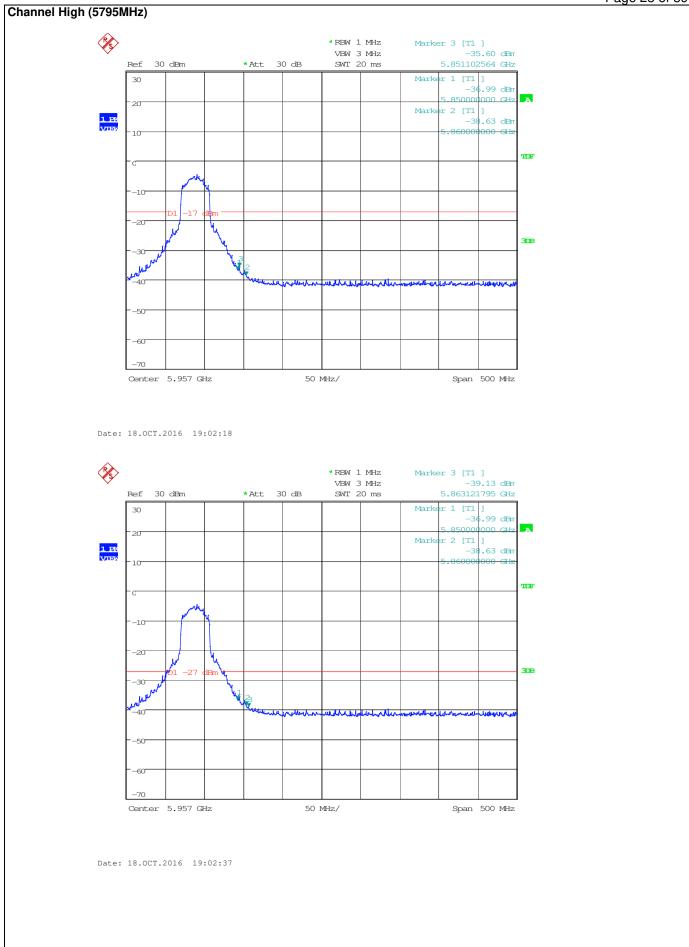

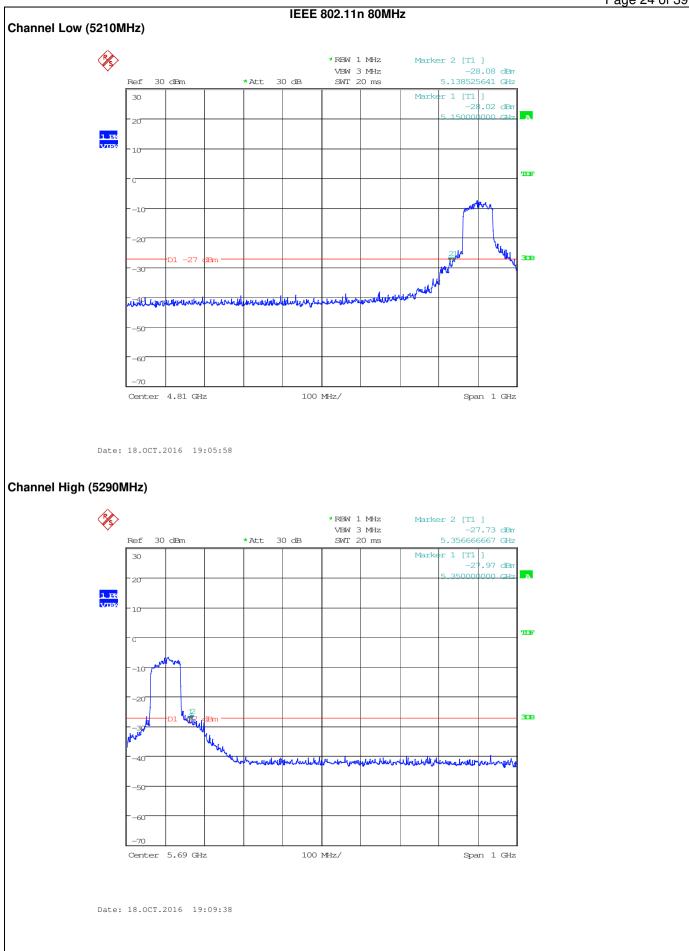


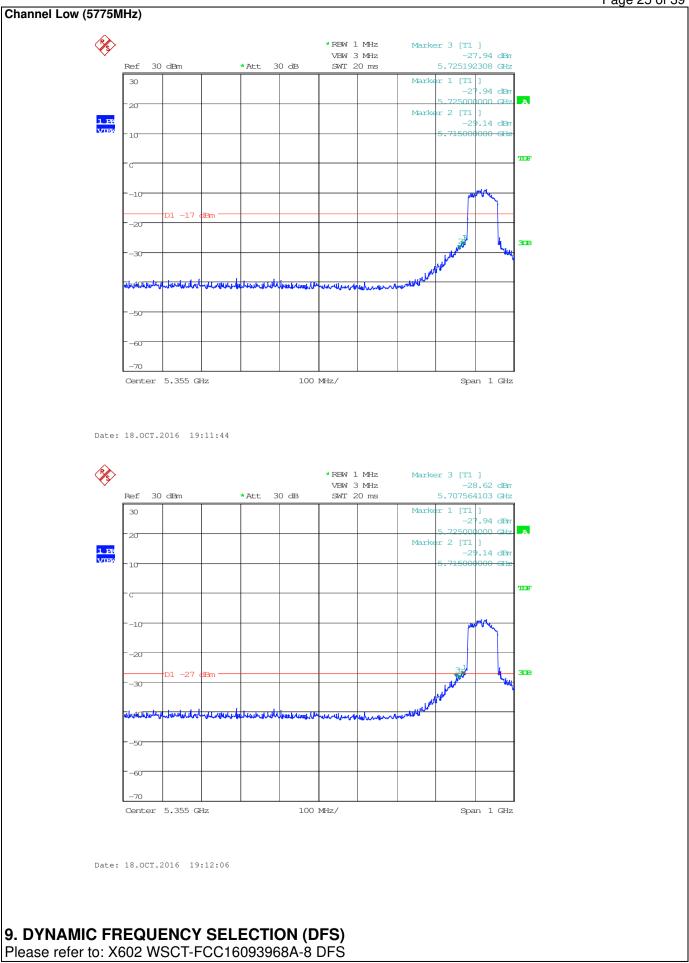


	Page	26 of 39
10. EUT TEST PHOTO		
	CONDUCTED EMISSION TEST	



RADIATED EMISSION TEST (Frequency from 30MHz to 1GHz)

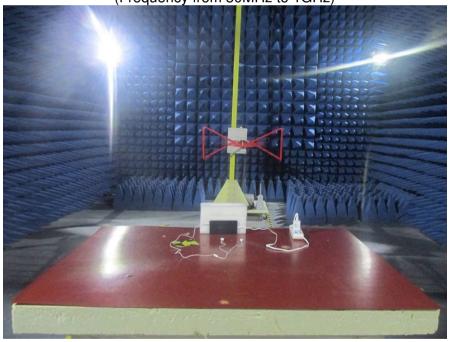

RADIATED EMISSION TEST (Frequency above 1GHz)

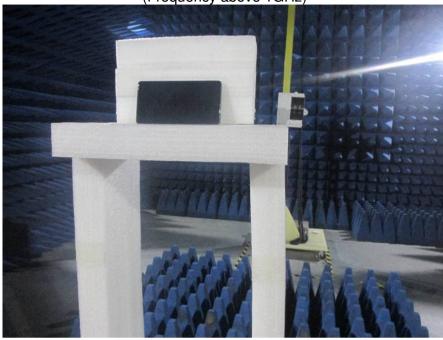

RF TEST



#### 11. PHOTOGRAPHS OF EUT





















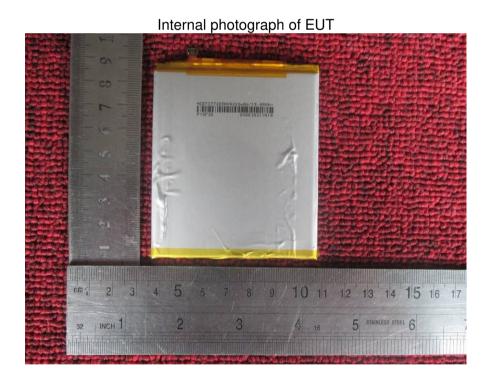









Page 35 of 39

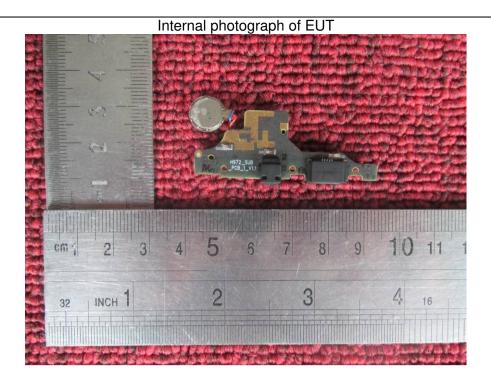

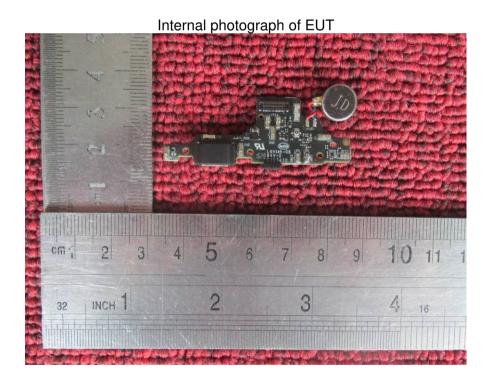


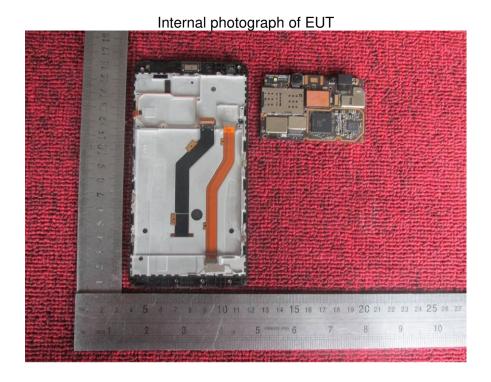


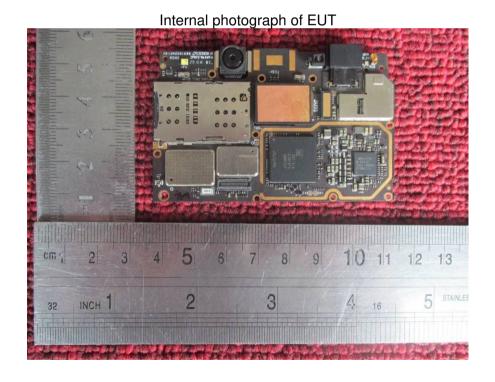

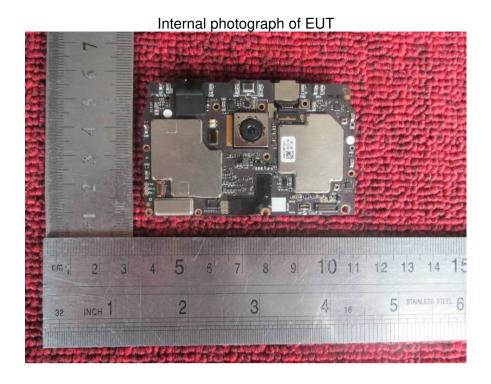





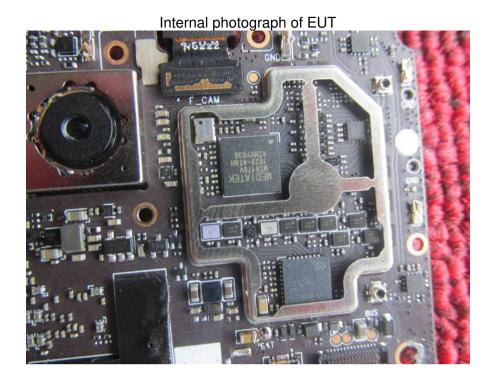

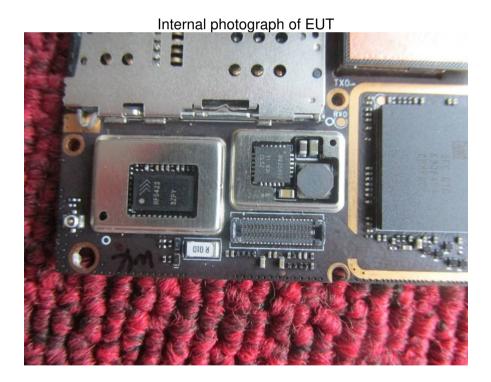

## Internal photograph of EUT

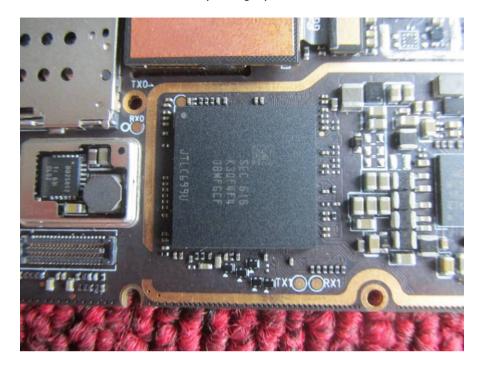

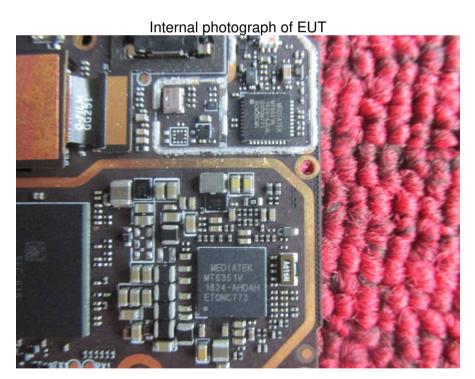

---END OF REPORT---