

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
Report No.: RFBCUG-WTW-P23030303-1
FCC ID: B32M4250
Product: Point of Sale Terminal
Brand: Verifone
Model No.: M425-1
Received Date: 2023/3/9
Test Date: 2023/4/11 ~ 2023/4/25
Issued Date: 2023/5/8
Applicant: Verifone, Inc.
Address: 1400 West Stanford Ranch Road Suite 150 Rocklin CA 95765 USA
Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories
Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
Test Location(1): No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kewi Shan Dist., Taoyuan City 33383, Taiwan
Test Location (2): B2F., No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan
FCC Registration / 788550 / TW0003
Designation Number: 427177 / TW0011

Approved by: _____

Jeremy Lin

Jeremy Lin / Project Engineer

, Date: _____

2023/5/8

This test report consists of 42 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Gina Liu / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate.....	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Supplementary Information	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Antenna Description of EUT	7
3.3 Channel List.....	8
3.4 Test Mode Applicability and Tested Channel Detail.....	9
3.5 Duty Cycle of Test Signal.....	10
3.6 Test Program Used and Operation Descriptions	12
3.7 Connection Diagram of EUT and Peripheral Devices	12
3.8 Configuration of Peripheral Devices and Cable Connections	12
4 Test Instruments	13
4.1 RF Output Power.....	13
4.2 AC Power Conducted Emissions	13
4.3 Unwanted Emissions below 1 GHz	14
4.4 Unwanted Emissions above 1 GHz.....	15
5 Limits of Test Items.....	16
5.1 RF Output Power.....	16
5.2 AC Power Conducted Emissions	16
5.3 Unwanted Emissions below 1 GHz	16
5.4 Unwanted Emissions above 1 GHz.....	17
6 Test Arrangements.....	18
6.1 RF Output Power.....	18
6.1.1 Test Setup	18
6.1.2 Test Procedure.....	18
6.2 AC Power Conducted Emissions	19
6.2.1 Test Setup	19
6.2.2 Test Procedure.....	19
6.3 Unwanted Emissions below 1 GHz	20
6.3.1 Test Setup	20
6.3.2 Test Procedure.....	21
6.4 Unwanted Emissions above 1 GHz.....	22
6.4.1 Test Setup	22
6.4.2 Test Procedure.....	22
7 Test Results of Test Item	23
7.1 RF Output Power.....	23
7.2 AC Power Conducted Emissions	28
7.3 Unwanted Emissions below 1 GHz	30
7.4 Unwanted Emissions above 1 GHz.....	32
8 Pictures of Test Arrangements	41
9 Information of the Testing Laboratories	42

Release Control Record

Issue No.	Description	Date Issued
RFBCUG-WTW-P23030303-1	Original release.	2023/5/8

1 Certificate

Product: Point of Sale Terminal

Brand: Verifone

Test Model: M425-1

Sample Status: Engineering sample

Applicant: Verifone, Inc.

Test Date: 2023/4/11 ~ 2023/4/25

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement ANSI C63.10-2013

procedure: KDB 789033 D02 General UNII Test Procedure New Rules v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(2)	26 dB Bandwidth	NA	Refer to note
15.407(a)(1) 15.407(a)(2) 15.407(a)(3)	RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(1) 15.407(a)(2) 15.407(a)(3)	Power Spectral Density	NA	Refer to note
15.407(e)	6 dB Bandwidth	NA	Refer to note
---	Occupied Bandwidth	-	Reference only.
15.407(g)	Frequency Stability	NA	Refer to note
15.407(b)(9)	AC Power Conducted Emissions	Pass	Minimum passing margin is -16.13 dB at 0.39000 MHz
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -4.7 dB at 31.64 MHz
15.407(b) (1/10) 15.407(b) (2/10) 15.407(b) (3/10) 15.407(b) (4(i)/10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -4.3 dB at 5350.00 MHz
15.203	Antenna Requirement	Pass	Antenna connector is ipex not a standard connector.

Note:

1. This report is a supplementary report. Therefore, only Output Power, AC Power Conducted Emissions and Radiated Emissions were verified and recored in this report. Other testing data please refer to the original BV CPS report no.: RFBCUG-WTW-P23030304-1.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.79 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	2.44 dB
	30 MHz ~ 1 GHz	2.02 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	1.01 dB
	18 GHz ~ 40 GHz	1.15 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Point of Sale Terminal
Brand	Verifone
Test Model	M425-1
Status of EUT	Engineering sample
Power Supply Rating	12 Vdc
Modulation Type	CCK, DQPSK, DBPSK for DSSS 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	OFDM
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6 Mbps 802.11n: up to 150 Mbps 802.11ac: up to 433.3 Mbps
Operating Frequency	5180 ~ 5320 MHz, 5500 ~ 5720 MHz, 5745 ~ 5825 MHz
Number of Channel	5180 ~ 5240 MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 4 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1 5260 ~ 5320 MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 4 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1 5500 ~ 5720 MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 12 802.11n (HT40), 802.11ac (VHT40): 6 802.11ac (VHT80): 3 5745 ~ 5825 MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 5 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1
Output Power	5.18 GHz ~ 5.24 GHz : 35.156 mW (15.46 dBm) 5.26 GHz ~ 5.32 GHz : 35.645 mW (15.52 dBm) 5.5 GHz ~ 5.72 GHz : 34.356 mW (15.36 dBm) 5.745 GHz ~ 5.825 GHz : 30.2 mW (14.80 dBm)
EUT Category	Client device

Note:

1. This report is issued as a supplementary report to BV CPS report no. RFBCUG-WTW-P23030304-1. The difference compared with original report is changing model name (M450-1 change to M425-1 (the model difference refer to note 2)), therefore the EUT is verified on the worst case of the original report.
2. The model difference as below.

Brand	Model	Difference
Verifone	M450-1	A. Model M425-1 and M450-1 are identical, except for enclosure shape, panel size and NFC antenna- Use same main board, WiFi-BT module, antenna of WiFi-BT and NFC chip IC.
	M425-1	B. TX setup power different by software, the NFC power of M450-1 will be larger than that of M425-1 NFC Power.

3. The accessory devices of EUT, please refer to external photo.
4. There are Bluetooth and WLAN (2.4 GHz & 5 GHz) technology used for the EUT. WLAN (2.4 GHz & 5 GHz) and Bluetooth technology cannot transmit at the same time, but use time slot technology to transmit at the same time.
5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna No.	Gain (dBi)				Antenna Type	Connector Type
	5150 MHz	5350	5600 MHz	5850 MHz		
1	3.6	3.3	3.7	2.2	PCB	ipex(MHF)

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a SISO function:

5 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11a	1TX	1RX
802.11n (HT20)	1TX	1RX
802.11n (HT40)	1TX	1RX
802.11ac (VHT20)	1TX	1RX
802.11ac (VHT40)	1TX	1RX
802.11ac (VHT80)	1TX	1RX

Note:

- The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz), 802.11ac mode for 20 MHz (40 MHz), therefore the investigated worst case to representative mode in test report.

3.3 Channel List

FOR 5180 ~ 5320 MHz

8 channels are provided for 802.11a, 802.11n (HT20) and 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	52	5260 MHz
40	5200 MHz	56	5280 MHz
44	5220 MHz	60	5300 MHz
48	5240 MHz	64	5320 MHz

4 channels are provided for 802.11n (HT40) and 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	54	5270 MHz
46	5230 MHz	62	5310 MHz

2 channels are provided for 802.11ac (VHT80):

Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz

FOR 5500 ~ 5720 MHz

12 channels are provided for 802.11a, 802.11n (HT20) and 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

6 channels are provided for 802.11n (HT40) and 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz	142	5710 MHz

3 channels are provided for 802.11ac (VHT80):

Channel	Frequency	Channel	Frequency
106	5530 MHz	138	5690 MHz
122	5610 MHz		

FOR 5745 ~ 5825 MHz:

5 channels are provided for 802.11a, 802.11n (HT20) and 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40) and 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

1 channels are provided for 802.11ac (VHT80):

Channel	Frequency
155	5775 MHz

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. EUT can be used in the following ways: X-axis/ Y-axis/ Z-axis. Pre-scan these ways and find the worst case as a representative test condition.
Worst Case:	1. X-axis/ Y-axis/ Z-axis Worst Condition: Z-axis

Following channel(s) was (were) selected for the final test as listed below:

Test Item	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
RF Output Power	802.11a	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	6Mb/s
	802.11n (HT20)	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	MCS0
	802.11n (HT40)	CDD	38, 46, 54, 62, 102, 110, 134, 142, 151, 159	BPSK	MCS0
	802.11ac (VHT20)	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	MCS0
	802.11ac (VHT40)	CDD	38, 46, 54, 62, 102, 110, 134, 142, 151, 159	BPSK	MCS0
	802.11ac (VHT80)	CDD	42, 58, 106, 122, 138, 155	BPSK	MCS0
AC Power Conducted Emissions	802.11n (HT40)	CDD	62	BPSK	MCS0
Unwanted Emissions below 1 GHz	802.11n (HT40)	CDD	62	BPSK	MCS0
Unwanted Emissions above 1 GHz	802.11n (HT40)	CDD	38, 62, 102, 134, 151, 159	BPSK	MCS0


3.5 Duty Cycle of Test Signal

802.11a: Duty cycle = 5.52 ms / 5.68 ms x 100% = 97.2%, duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.12 \text{ dB}$


802.11n (HT20): Duty cycle = 5.1 ms / 5.26 ms x 100% = 97.0%, duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.13 \text{ dB}$

802.11n (HT40): Duty cycle = 2.48 ms / 2.66 ms x 100% = 93.2%, duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.30 \text{ dB}$


802.11ac (VHT80): Duty cycle = 0.249 ms / 0.447 ms x 100% = 55.7%, duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 2.54 \text{ dB}$

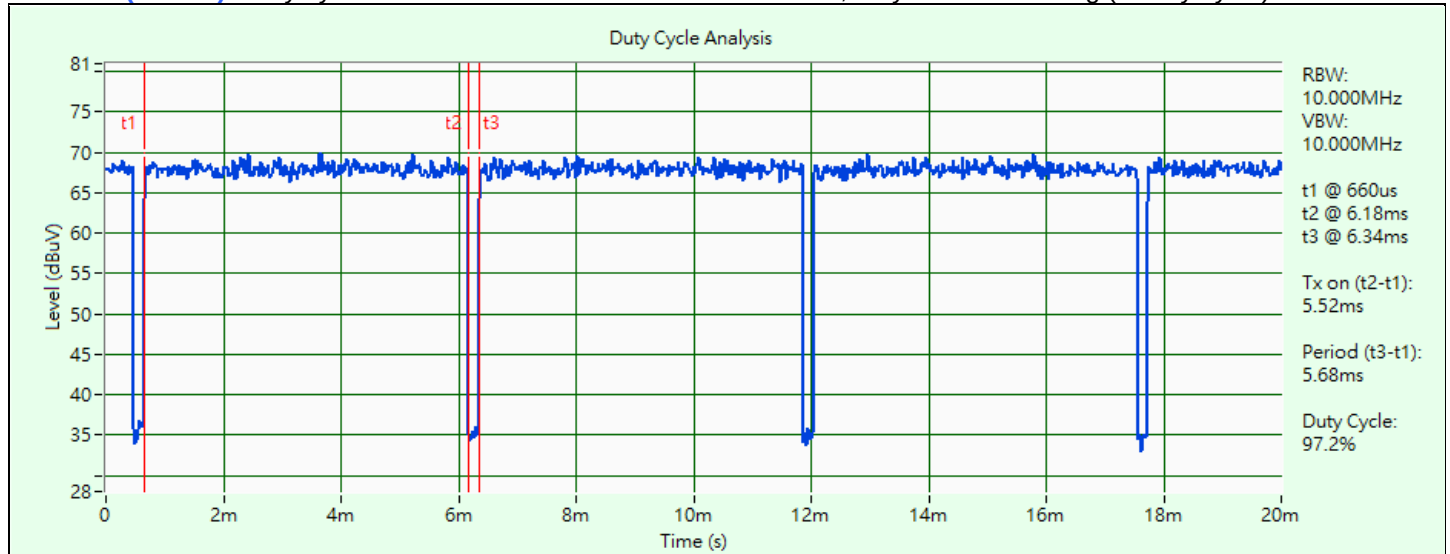


802.11a

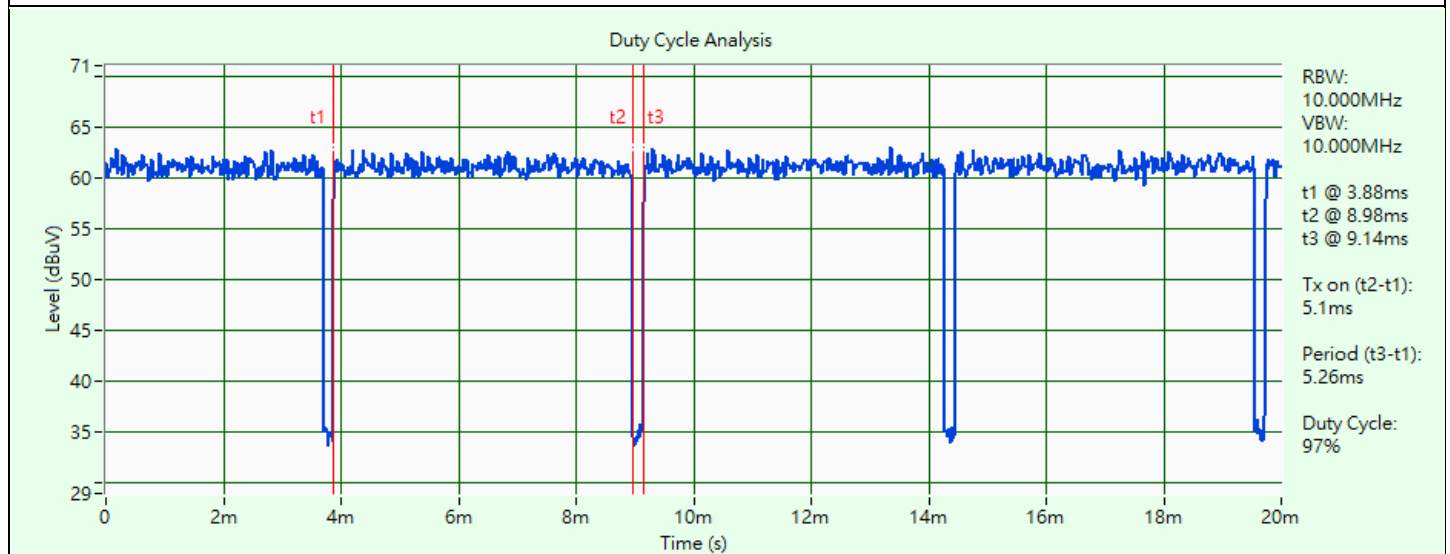

802.11n (HT20)

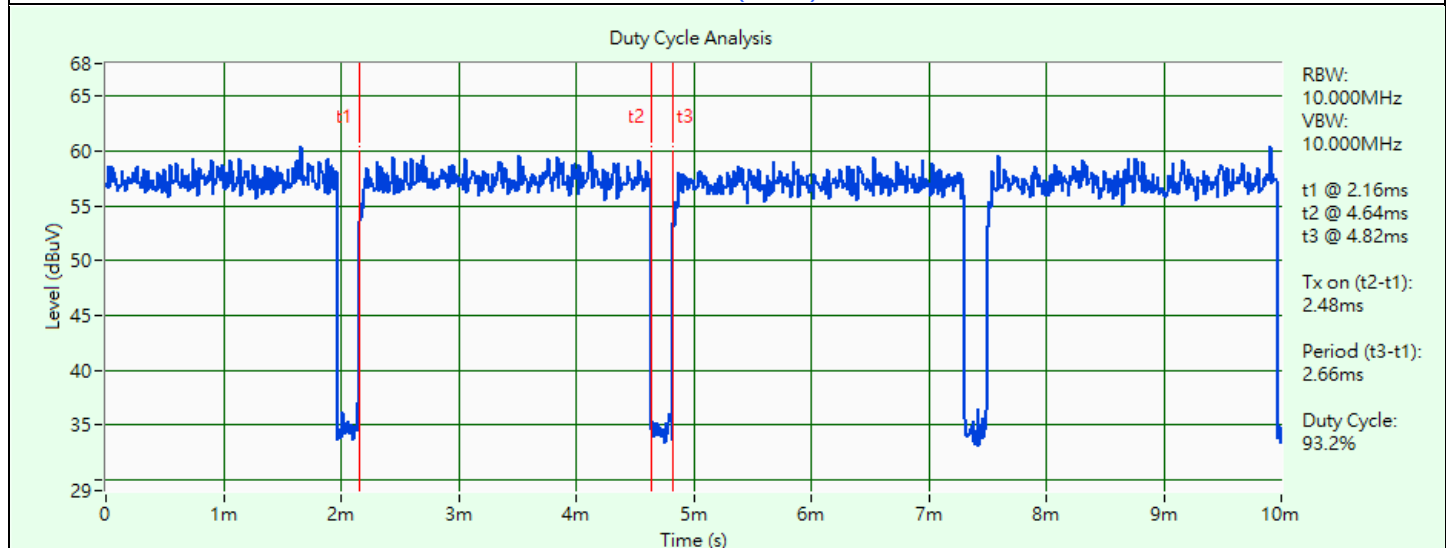


802.11n (HT40)

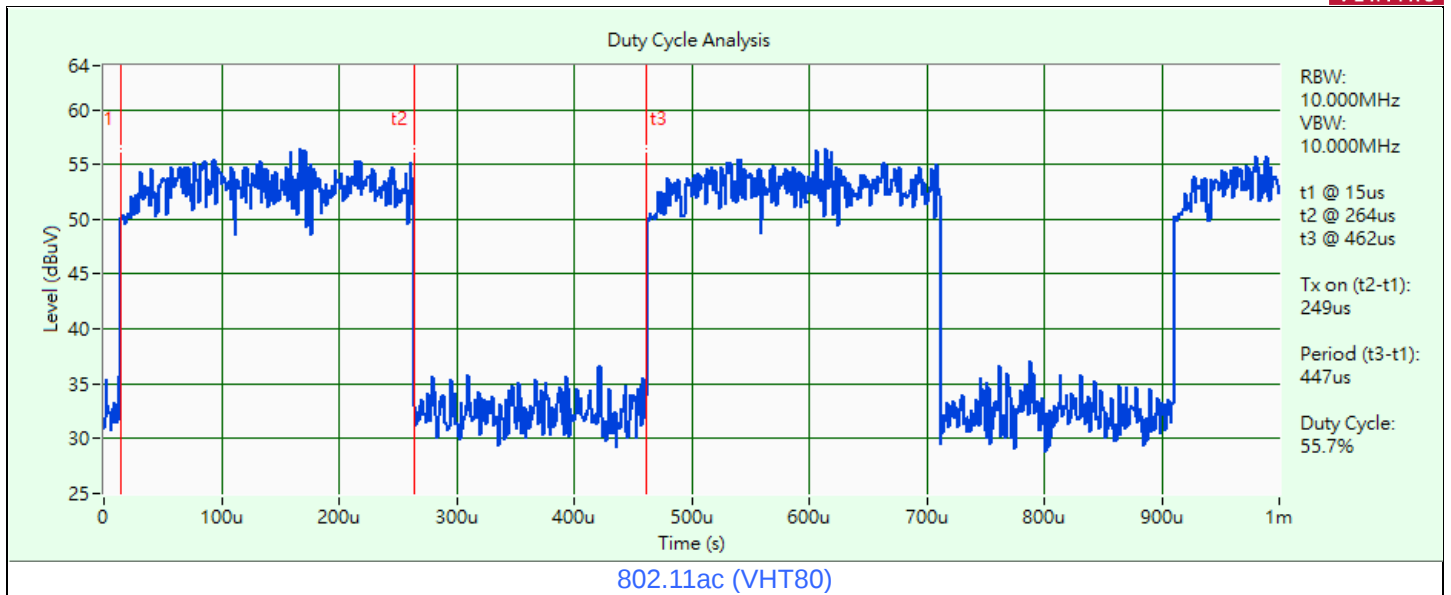

3.6 Test Program Used and Operation Descriptions

Controlling software QRCT3.0_00303 has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

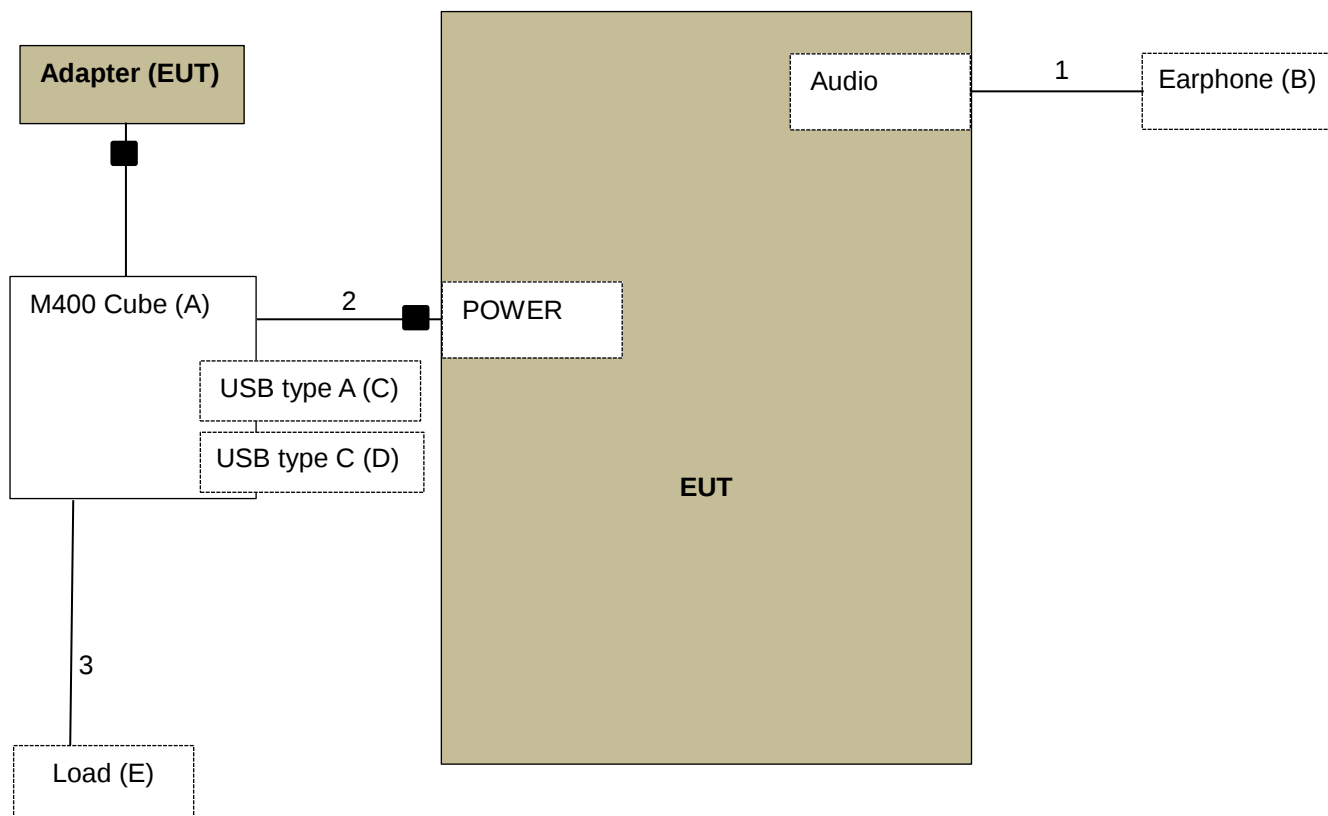

Under Table

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	M400 Cube	VeriFone	N/A	N/A	N/A	Supplied by applicant
B	Earphone	apple	MB77PFEB	N/A	N/A	Provided by Lab
C	USB Dongle	SanDisk	SDDDC3-032G	N/A	N/A	Provided by Lab
D	USB Dongle	SanDisk	SDDDC3-032G	N/A	N/A	Provided by Lab
E	Load	N/A	N/A	N/A	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	Audio Cable	1	1.0	N	0	Provided by Lab
2	USB Cable	1	1.3	Y	1	Supplied by applicant
3	LAN Cable	2	1.5	N	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Signal and spectrum analyzer R&S	FSV3044	101105	2023/2/22	2024/2/21
Software BV	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY55190004/MY55190007/MY55210005	2022/7/13	2023/7/12

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2023/4/25

4.2 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
DC-LISN SCHWARZBECK MESS- ELETRONIK	NNBM 8126G	8126G-069	2022/11/9	2023/11/8
LISN R&S	ESH2-Z5	100100	2023/3/7	2024/3/6
	ESH3-Z5	100116	2023/2/15	2024/2/14
LISN Schwarzbeck	NNLK 8121	8121-731	2022/5/26	2023/5/25
RF Coaxial Cable WORKEN	5D-FB	Cable-cond2-01	2022/9/3	2023/9/2
Software BVADT	BVADT_Cond_ V7.3.7.4	N/A	N/A	N/A
Test Receiver R&S	ESR3	102783	2022/12/21	2023/12/20
V-LISN Schwarzbeck	NNBL 8226-2	8226-142	2022/8/31	2023/8/30

Notes:

1. The test was performed in HY - Conduction 2.
2. Tested Date: 2023/4/20

4.3 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	UNAT_5+	PAD-CH6-01	N/A	N/A
Antenna Tower Controller Max-Full	MF-7802	N/A	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB9168	9168-616	2022/10/26	2023/10/25
Loop Antenna EMCI	EM-6879	269	2022/9/19	2023/9/18
Loop Antenna TESEQ	HLA 6121	45745	2022/7/27	2023/7/26
Pre-amplifier EMCI	EMC001340	980201	2022/9/23	2023/9/22
Preamplifier Agilent	310N	187226	2022/6/14	2023/6/13
RF Coaxial Cable EMCI	5D-NM-BM	140903+140902	2023/1/7	2024/1/6
RF Coaxial Cable ETS-Lindgren	EMC104-SM-SM-10000	Cable-CH1-01(RFC-SMS-100-SMS-120+RFC-SMS-100-SMS-4	2022/6/14	2023/6/13
	RFC-SMS-100-SMS-24-IN	Cable-CH1-02(RFC-SMS-100-SMS-24)	2022/6/14	2023/6/13
Software BV ADT	ADT_Radiated_V7.6.15.9.5	N/A	N/A	N/A
Test Receiver Agilent	N9038A	MY52260177	2022/9/19	2023/9/18
Turn Table Max-Full	TT-1510	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802	N/A	N/A	N/A

Notes:

1. The test was performed in XD - 966 chamber 6.
2. Tested Date: 2023/4/11

4.4 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	UNAT_5+	PAD-CH6-01	N/A	N/A
Antenna Tower Controller Max-Full	MF-7802	N/A	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	8	N/A	N/A
Horn Antenna ETS-Lindgren	3117	00143293	2022/11/13	2023/11/12
Horn Antenna Schwarzbeck	BBHA 9170	BBHA9170241	2022/10/20	2023/10/19
Pre-Amplifier EMCI	EMC 184045	980116	2022/10/1	2023/9/30
Preamplifier Agilent	83017A	MY39501373	2022/6/14	2023/6/13
RF Coaxial Cable ETS-Lindgren	EMC104-SM-SM-10000	Cable-CH1-01(RFC-SMS-100-SMS-120+RFC-SMS-100-SMS-4	2022/6/14	2023/6/13
	RFC-SMS-100-SMS-24-IN	Cable-CH1-02(RFC-SMS-100-SMS-24)	2022/6/14	2023/6/13
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	2023/1/7	2024/1/6
RF Coaxial Cable HUBER+SUHNER&EMCI	SUCOFLEX 104& EMC104-SM-SM8000	CABLE-CH9-02 (248780+171006)	2023/1/7	2024/1/6
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Test Receiver Agilent	N9038A	MY52260177	2022/9/19	2023/9/18
Turn Table Max-Full	TT-1510	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802	N/A	N/A	N/A

Notes:

1. The test was performed in XD - 966 chamber 6.
2. Tested Date: 2023/4/18

5 Limits of Test Items

5.1 RF Output Power

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	Fixed point-to-point Access Point	1 Watt (30 dBm)
	Indoor Access Point	1 Watt (30 dBm)
	Mobile and Portable client device	250mW (24 dBm)

Operation Band	Limit
U-NII-2A	250 mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	250 mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

5.2 AC Power Conducted Emissions

1. Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.3 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.4 Unwanted Emissions above 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To	Limit	
789033 D02 General UNII Test Procedure New Rules v02r01	Field Strength at 3 m	
	PK: 74 (dBμV/m)	AV: 54 (dBμV/m)

For transmitters operating in the 5.15-5.25 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

For transmitters operating in the 5.25-5.35 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(2)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

For transmitters operating in the 5.47-5.725 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(3)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

For transmitters operating in the 5.725-5.850 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1}	PK: 68.2 (dBμV/m) ^{*1}
	PK: 10 (dBm/MHz) ^{*2}	PK: 105.2 (dBμV/m) ^{*2}
	PK: 15.6 (dBm/MHz) ^{*3}	PK: 110.8 (dBμV/m) ^{*3}
	PK: 27 (dBm/MHz) ^{*4}	PK: 122.2 (dBμV/m) ^{*4}

^{*1} beyond 75 MHz or more above of the band edge.

^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$


6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup



For channel straddling:



6.1.2 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

For channel straddling:


Method SA-2A

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Manually set sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$.
- Perform a single sweep.
- Record the max value and add $10 \log (1/\text{duty cycle})$.

Note: When measuring straddle channel power, use compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument's band power measurement function, with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.

6.2 AC Power Conducted Emissions

6.2.1 Test Setup

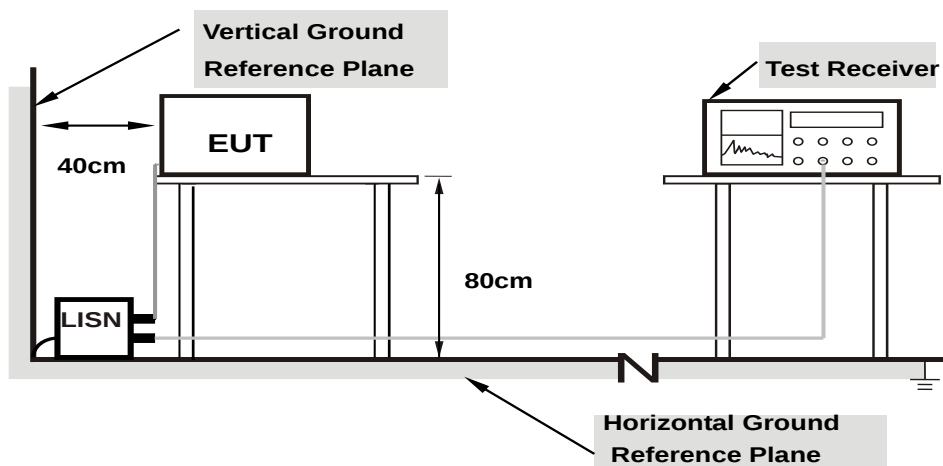

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.2.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.3 Unwanted Emissions below 1 GHz

6.3.1 Test Setup

For Radiated emission below 30 MHz

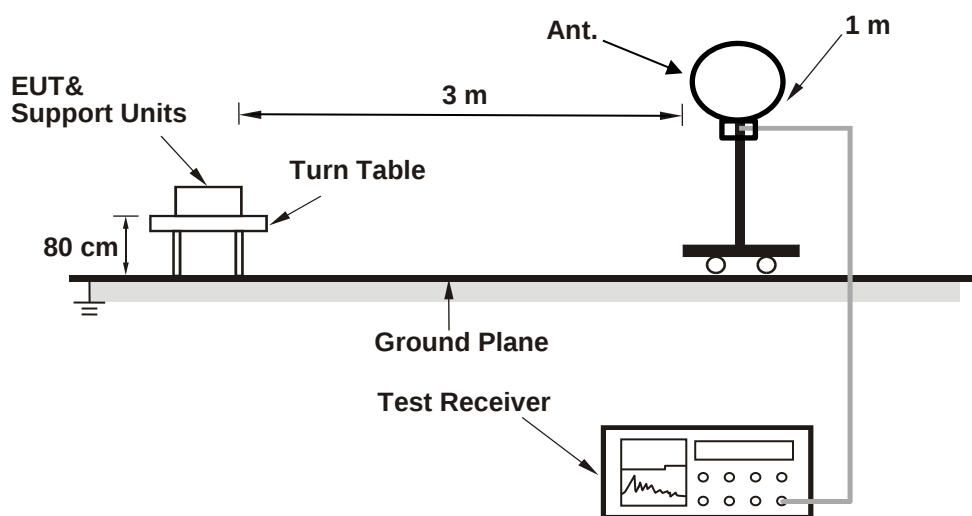

For Radiated emission above 30 MHz

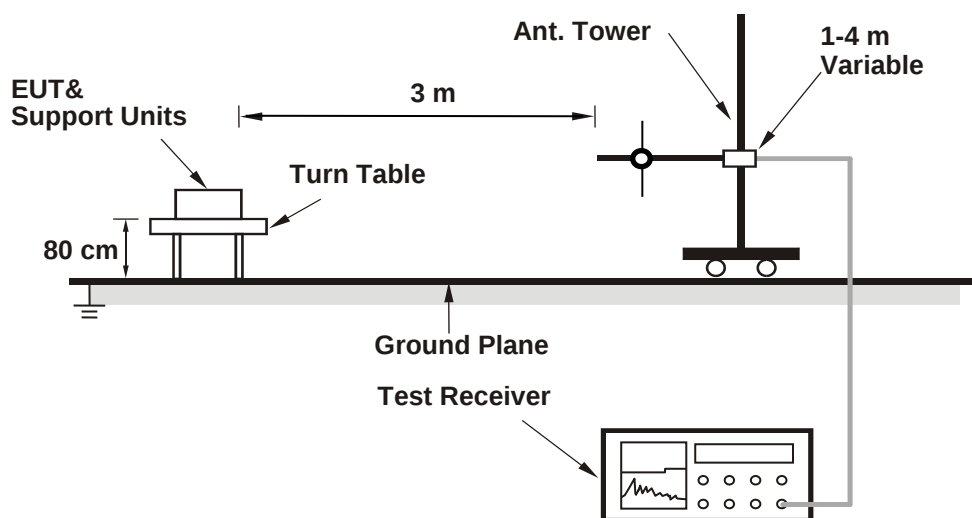

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.3.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.4 Unwanted Emissions above 1 GHz

6.4.1 Test Setup

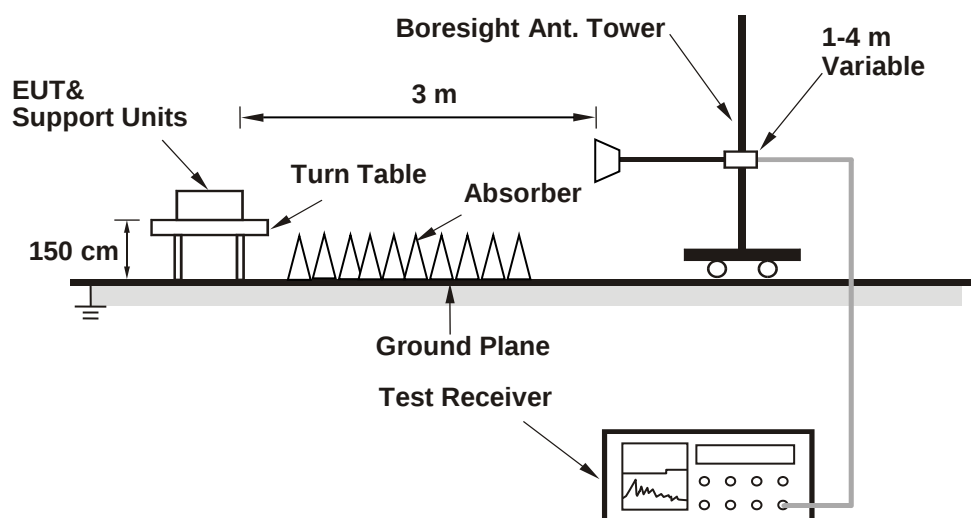

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.4.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Alan Wu, Edison Lee
--------------	----------------	---------------------------	--------------	------------	---------------------

802.11a

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
36	5180	34.041	15.32	24	Pass
40	5200	33.113	15.20	24	Pass
48	5240	35.156	15.46	24	Pass
52	5260	34.435	15.37	24	Pass
60	5300	35.318	15.48	24	Pass
64	5320	35.237	15.47	24	Pass
100	5500	31.769	15.02	24	Pass
116	5580	32.734	15.15	24	Pass
140	5700	30.974	14.91	24	Pass
*144 (U-NII-2C)	5720	25.907	14.13	24	Pass
*144 (U-NII-3)	5720	5.098	7.07	30	Pass
149	5745	30.061	14.78	30	Pass
157	5785	28.249	14.51	30	Pass
165	5825	27.99	14.47	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test , the duty factor was included in the total power.
- For U-NII-1, the antenna gain is 3.6 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the antenna gain is 3.6 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the antenna gain is 3.7 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the antenna gain is 2.2 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
36	5180	33.497	15.25	24	Pass
40	5200	33.806	15.29	24	Pass
48	5240	34.514	15.38	24	Pass
52	5260	35.075	15.45	24	Pass
60	5300	35.156	15.46	24	Pass
64	5320	35.645	15.52	24	Pass
100	5500	32.359	15.10	24	Pass
116	5580	34.356	15.36	24	Pass
140	5700	30.061	14.78	24	Pass
*144 (U-NII-2C)	5720	25.317	14.03	24	Pass
*144 (U-NII-3)	5720	5.616	7.49	30	Pass
149	5745	30.2	14.80	30	Pass
157	5785	28.973	14.62	30	Pass
165	5825	29.854	14.75	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test , the duty factor was included in the total power.
- For U-NII-1, the antenna gain is 3.6 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the antenna gain is 3.6 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the antenna gain is 3.7 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the antenna gain is 2.2 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11n (HT40)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
38	5190	26.485	14.23	24	Pass
46	5230	27.925	14.46	24	Pass
54	5270	27.353	14.37	24	Pass
62	5310	28.184	14.50	24	Pass
102	5510	25.645	14.09	24	Pass
110	5550	24.774	13.94	24	Pass
134	5670	26.853	14.29	24	Pass
*142 (U-NII-2C)	5710	23.412	13.69	24	Pass
*142 (U-NII-3)	5710	1.401	1.46	30	Pass
151	5755	24.044	13.81	30	Pass
159	5795	22.336	13.49	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test , the duty factor was included in the total power.
- For U-NII-1, the antenna gain is 3.6 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the antenna gain is 3.6 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the antenna gain is 3.7 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the antenna gain is 2.2 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
36	5180	30.269	14.81	24	Pass
40	5200	30.339	14.82	24	Pass
48	5240	30.409	14.83	24	Pass
52	5260	30.409	14.83	24	Pass
60	5300	30.69	14.87	24	Pass
64	5320	31.405	14.97	24	Pass
100	5500	30.2	14.80	24	Pass
116	5580	29.58	14.71	24	Pass
140	5700	28.642	14.57	24	Pass
*144 (U-NII-2C)	5720	23.036	13.62	24	Pass
*144 (U-NII-3)	5720	4.994	6.98	30	Pass
149	5745	26.853	14.29	30	Pass
157	5785	26.546	14.24	30	Pass
165	5825	26.002	14.15	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test , the duty factor was included in the total power.
- For U-NII-1, the antenna gain is 3.6 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the antenna gain is 3.6 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the antenna gain is 3.7 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the antenna gain is 2.2 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
38	5190	24.66	13.92	24	Pass
46	5230	24.889	13.96	24	Pass
54	5270	25.003	13.98	24	Pass
62	5310	25.235	14.02	24	Pass
102	5510	23.55	13.72	24	Pass
110	5550	23.605	13.73	24	Pass
134	5670	22.699	13.56	24	Pass
*142 (U-NII-2C)	5710	21.302	13.28	24	Pass
*142 (U-NII-3)	5710	1.275	1.06	30	Pass
151	5755	21.33	13.29	30	Pass
159	5795	21.38	13.30	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test , the duty factor was included in the total power.
- For U-NII-1, the antenna gain is 3.6 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the antenna gain is 3.6 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the antenna gain is 3.7 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the antenna gain is 2.2 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
42	5210	24.717	13.93	24	Pass
58	5290	24.434	13.88	24	Pass
106	5530	24.044	13.81	24	Pass
122	5610	23.823	13.77	24	Pass
*138 (U-NII-2C)	5690	21.883	13.40	24	Pass
*138 (U-NII-3)	5690	0.3751	-4.26	30	Pass
155	5775	21.135	13.25	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test , the duty factor was included in the total power.
- For U-NII-1, the antenna gain is 3.6 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the antenna gain is 3.6 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the antenna gain is 3.7 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the antenna gain is 2.2 dBi < 6 dBi, so the output power limit shall not be reduced.


7.2 AC Power Conducted Emissions

RF Mode	802.11n (HT40)	Channel	CH 62 : 5310 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23.5°C, 72.3% RH
Tested By	Thomas Cheng		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16579	10.12	29.12	15.06	39.24	25.18	65.17	55.17	-25.93	-29.99
2	0.18600	10.12	25.66	12.66	35.78	22.78	64.21	54.21	-28.43	-31.43
3	0.39000	10.14	23.37	21.79	33.51	31.93	58.06	48.06	-24.55	-16.13
4	0.66811	10.15	14.76	8.40	24.91	18.55	56.00	46.00	-31.09	-27.45
5	7.93800	10.26	11.41	7.44	21.67	17.70	60.00	50.00	-38.33	-32.30
6	16.07400	10.38	9.54	5.85	19.92	16.23	60.00	50.00	-40.08	-33.77

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

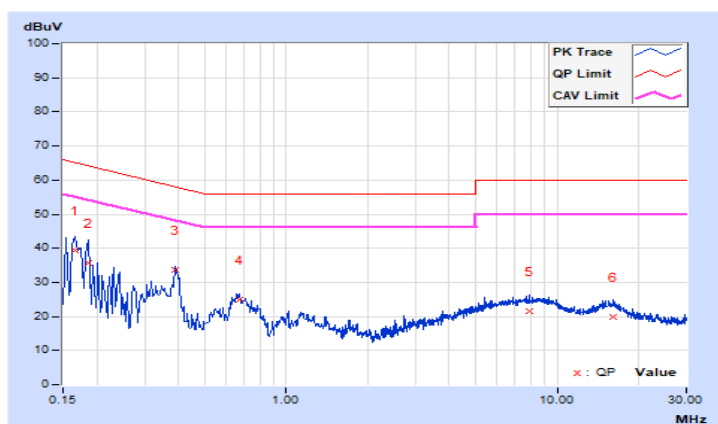


RF Mode	802.11n (HT40)	Channel	CH 62 : 5310 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23.5°C, 72.3% RH
Tested By	Thomas Cheng		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16200	10.13	30.98	14.88	41.11	25.01	65.36	55.36	-24.25	-30.35
2	0.18568	10.14	28.27	11.96	38.41	22.10	64.23	54.23	-25.82	-32.13
3	0.39400	10.16	19.62	16.67	29.78	26.83	57.98	47.98	-28.20	-21.15
4	0.65417	10.17	11.15	5.82	21.32	15.99	56.00	46.00	-34.68	-30.01
5	9.67400	10.36	10.74	4.15	21.10	14.51	60.00	50.00	-38.90	-35.49
6	21.02600	10.57	7.89	1.07	18.46	11.64	60.00	50.00	-41.54	-38.36

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

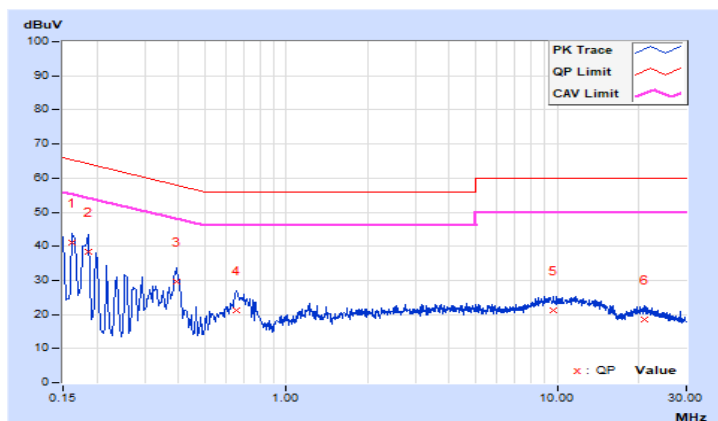


7.3 Unwanted Emissions below 1 GHz

RF Mode	802.11n (HT40)	Channel	CH 62 : 5310 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 60% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	98.35	34.4 QP	43.5	-9.1	1.28 H	201	52.0	-17.6
2	176.35	28.4 QP	43.5	-15.1	1.99 H	245	42.1	-13.7
3	284.62	33.6 QP	46.0	-12.4	1.59 H	304	46.1	-12.5
4	352.69	32.3 QP	46.0	-13.7	1.04 H	19	43.2	-10.9
5	457.54	29.6 QP	46.0	-16.4	2.86 H	80	37.8	-8.2
6	501.52	27.4 QP	46.0	-18.6	1.49 H	142	35.1	-7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

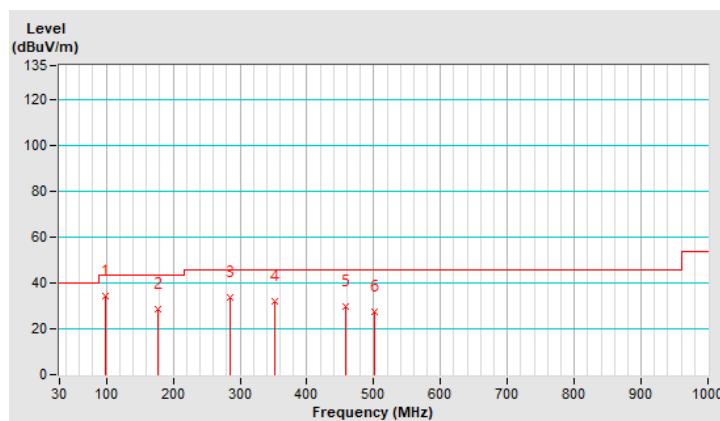


RF Mode	802.11n (HT40)	Channel	CH 62 : 5310 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 60% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.64	35.3 QP	40.0	-4.7	1.92 V	73	49.7	-14.4
2	53.64	34.1 QP	40.0	-5.9	2.53 V	198	47.0	-12.9
3	277.49	32.6 QP	46.0	-13.4	2.40 V	194	45.4	-12.8
4	451.32	31.6 QP	46.0	-14.4	1.91 V	241	39.9	-8.3
5	519.04	29.6 QP	46.0	-16.4	2.74 V	145	36.9	-7.3
6	576.39	29.3 QP	46.0	-16.7	1.74 V	292	35.4	-6.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

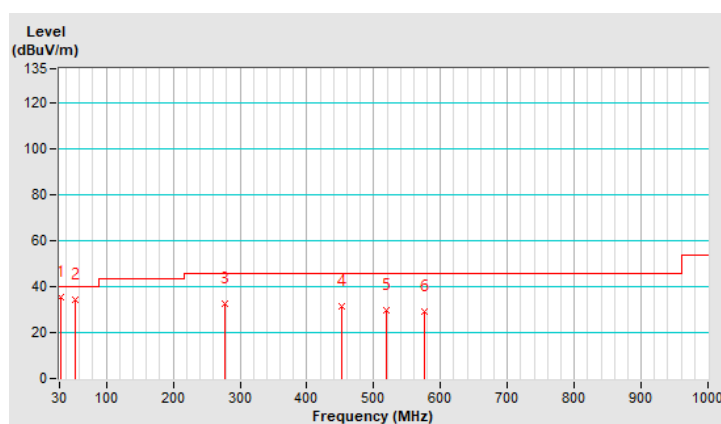

7.4 Unwanted Emissions above 1 GHz

RF Mode	802.11n (HT40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 60% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.1 PK	74.0	-13.9	2.25 H	139	48.0	12.1
2	5150.00	48.3 AV	54.0	-5.7	2.25 H	139	36.2	12.1
3	*5190.00	101.5 PK			2.25 H	139	58.7	42.8
4	*5190.00	93.8 AV			2.25 H	139	51.0	42.8
5	5350.00	54.5 PK	74.0	-19.5	2.25 H	139	42.2	12.3
6	5350.00	45.0 AV	54.0	-9.0	2.25 H	139	32.7	12.3
7	#10380.00	56.2 PK	68.2	-12.0	1.62 H	213	38.6	17.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.0 PK	74.0	-15.0	1.92 V	153	46.9	12.1
2	5150.00	47.2 AV	54.0	-6.8	1.92 V	153	35.1	12.1
3	*5190.00	98.9 PK			1.92 V	153	56.1	42.8
4	*5190.00	90.5 AV			1.92 V	153	47.7	42.8
5	5350.00	54.2 PK	74.0	-19.8	1.92 V	153	41.9	12.3
6	5350.00	44.6 AV	54.0	-9.4	1.92 V	153	32.3	12.3
7	#10380.00	55.8 PK	68.2	-12.4	2.21 V	34	38.2	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11n (HT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 60% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.5 PK	74.0	-20.5	2.19 H	139	41.4	12.1
2	5150.00	43.6 AV	54.0	-10.4	2.19 H	139	31.5	12.1
3	*5310.00	102.8 PK			2.19 H	139	59.8	43.0
4	*5310.00	94.8 AV			2.19 H	139	51.8	43.0
5	5350.00	65.5 PK	74.0	-8.5	2.19 H	139	53.2	12.3
6	5350.00	49.7 AV	54.0	-4.3	2.19 H	139	37.4	12.3
7	10620.00	56.2 PK	74.0	-17.8	1.39 H	151	38.5	17.7
8	10620.00	46.4 AV	54.0	-7.6	1.39 H	151	28.7	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.0 PK	74.0	-20.0	1.94 V	142	41.9	12.1
2	5150.00	43.7 AV	54.0	-10.3	1.94 V	142	31.6	12.1
3	*5310.00	99.8 PK			1.94 V	142	56.8	43.0
4	*5310.00	91.9 AV			1.94 V	142	48.9	43.0
5	5350.00	62.2 PK	74.0	-11.8	1.94 V	142	49.9	12.3
6	5350.00	48.0 AV	54.0	-6.0	1.94 V	142	35.7	12.3
7	10620.00	56.4 PK	74.0	-17.6	2.04 V	284	38.7	17.7
8	10620.00	46.7 AV	54.0	-7.3	2.04 V	284	29.0	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11n (HT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 60% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.5 PK	74.0	-19.5	1.84 H	149	41.8	12.7
2	5460.00	45.2 AV	54.0	-8.8	1.84 H	149	32.5	12.7
3	#5470.00	63.4 PK	68.2	-4.8	1.84 H	149	50.7	12.7
4	*5510.00	103.1 PK			1.84 H	149	59.7	43.4
5	*5510.00	95.3 AV			1.84 H	149	51.9	43.4
6	#5725.00	54.5 PK	68.2	-13.7	1.84 H	149	41.7	12.8
7	11020.00	56.7 PK	74.0	-17.3	1.75 H	72	38.6	18.1
8	11020.00	47.0 AV	54.0	-7.0	1.75 H	72	28.9	18.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.5 PK	74.0	-19.5	1.73 V	156	41.8	12.7
2	5460.00	44.7 AV	54.0	-9.3	1.73 V	156	32.0	12.7
3	#5470.00	61.0 PK	68.2	-7.2	1.73 V	156	48.3	12.7
4	*5510.00	100.3 PK			1.73 V	156	56.9	43.4
5	*5510.00	92.4 AV			1.73 V	156	49.0	43.4
6	#5725.00	53.9 PK	68.2	-14.3	1.73 V	156	41.1	12.8
7	11020.00	56.3 PK	74.0	-17.7	2.12 V	126	38.2	18.1
8	11020.00	46.6 AV	54.0	-7.4	2.12 V	126	28.5	18.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11n (HT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 60% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.2 PK	74.0	-19.8	1.84 H	146	41.5	12.7
2	5460.00	44.4 AV	54.0	-9.6	1.84 H	146	31.7	12.7
3	#5470.00	55.3 PK	68.2	-12.9	1.84 H	146	42.6	12.7
4	*5670.00	103.7 PK			1.84 H	146	60.2	43.5
5	*5670.00	96.0 AV			1.84 H	146	52.5	43.5
6	#5725.00	56.5 PK	68.2	-11.7	1.84 H	146	43.7	12.8
7	11340.00	56.9 PK	74.0	-17.1	1.24 H	322	38.5	18.4
8	11340.00	47.1 AV	54.0	-6.9	1.24 H	322	28.7	18.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.8 PK	74.0	-20.2	1.86 V	161	41.1	12.7
2	5460.00	44.5 AV	54.0	-9.5	1.86 V	161	31.8	12.7
3	#5470.00	54.4 PK	68.2	-13.8	1.86 V	161	41.7	12.7
4	*5670.00	101.5 PK			1.86 V	161	58.0	43.5
5	*5670.00	93.1 AV			1.86 V	161	49.6	43.5
6	#5725.00	55.3 PK	68.2	-12.9	1.86 V	161	42.5	12.8
7	11340.00	56.8 PK	74.0	-17.2	1.50 V	226	38.4	18.4
8	11340.00	47.0 AV	54.0	-7.0	1.50 V	226	28.6	18.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11n (HT40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 60% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5639.24	55.5 PK	68.2	-12.7	1.84 H	146	42.8	12.7
2	*5755.00	102.8 PK			1.84 H	146	59.1	43.7
3	*5755.00	94.9 AV			1.84 H	146	51.2	43.7
4	#5947.55	56.4 PK	68.2	-11.8	1.84 H	146	43.2	13.2
5	11510.00	57.0 PK	74.0	-17.0	1.54 H	49	38.3	18.7
6	11510.00	47.4 AV	54.0	-6.6	1.54 H	49	28.7	18.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5605.61	56.0 PK	68.2	-12.2	1.92 V	134	43.3	12.7
2	*5755.00	99.8 PK			1.92 V	134	56.1	43.7
3	*5755.00	92.2 AV			1.92 V	134	48.5	43.7
4	#5931.13	56.6 PK	68.2	-11.6	1.92 V	134	43.4	13.2
5	11510.00	56.9 PK	74.0	-17.1	2.23 V	128	38.2	18.7
6	11510.00	47.2 AV	54.0	-6.8	2.23 V	128	28.5	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11n (HT40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 60% RH
Tested By	Karl Lee		


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5641.64	55.6 PK	68.2	-12.6	1.81 H	148	42.9	12.7
2	*5795.00	103.2 PK			1.81 H	148	59.4	43.8
3	*5795.00	95.0 AV			1.81 H	148	51.2	43.8
4	#5975.18	56.3 PK	68.2	-11.9	1.81 H	148	43.0	13.3
5	11590.00	57.2 PK	74.0	-16.8	1.27 H	159	38.6	18.6
6	11590.00	47.5 AV	54.0	-6.5	1.27 H	159	28.9	18.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5636.44	55.6 PK	68.2	-12.6	1.93 V	144	42.9	12.7
2	*5795.00	99.9 PK			1.93 V	144	56.1	43.8
3	*5795.00	91.8 AV			1.93 V	144	48.0	43.8
4	#5993.59	55.9 PK	68.2	-12.3	1.93 V	144	42.6	13.3
5	11590.00	57.4 PK	74.0	-16.6	1.95 V	203	38.8	18.6
6	11590.00	47.7 AV	54.0	-6.3	1.95 V	203	29.1	18.6

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Plot of Band Edge


802.11n (HT40) Channel 38

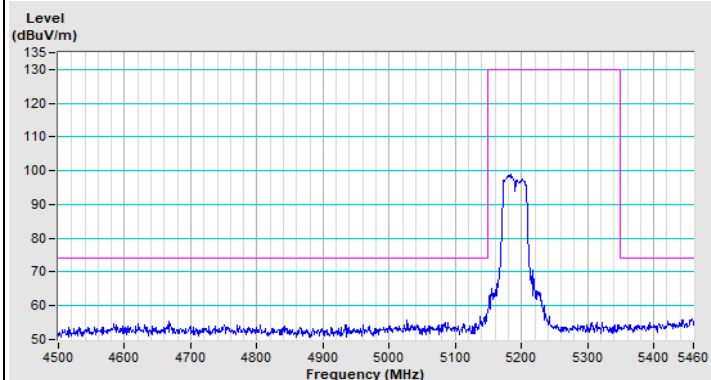


Horizontal (Peak)

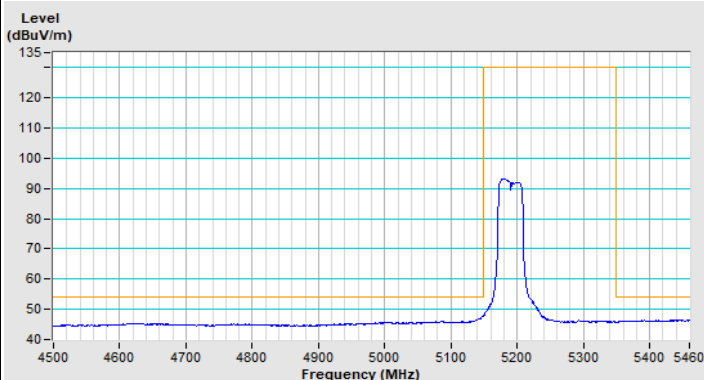

Horizontal (Average)

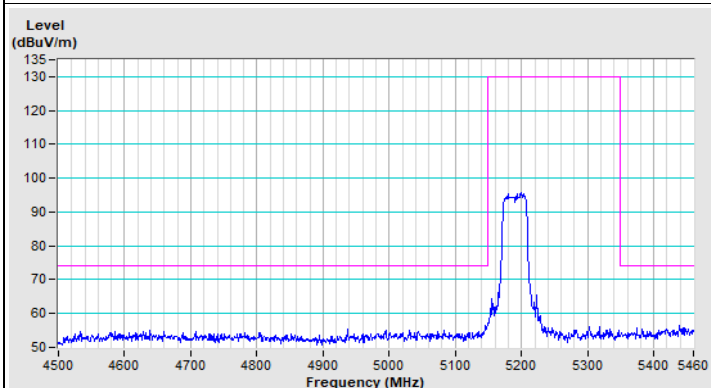


Vertical (Peak)

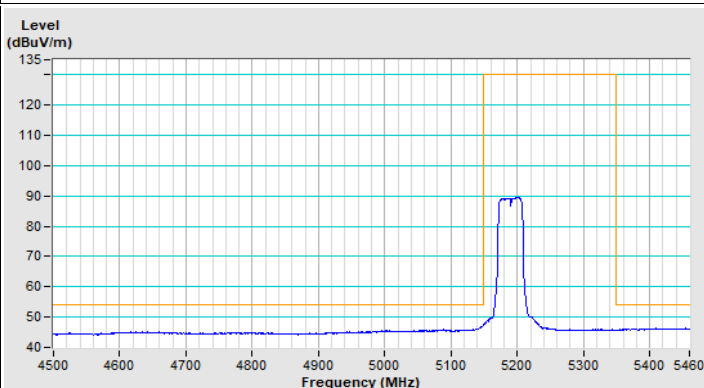


Vertical (Average)


802.11n (HT40) Channel 62

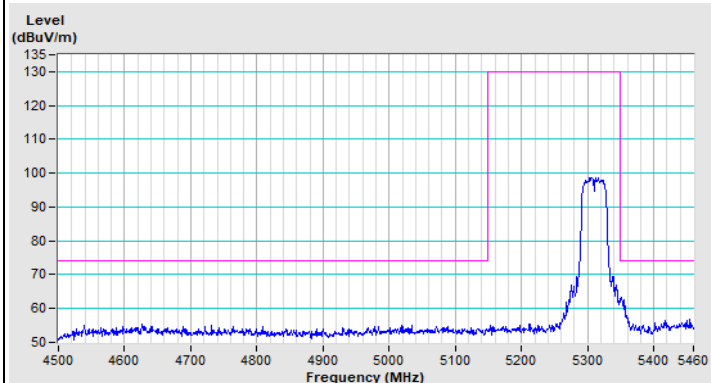


Horizontal (Peak)

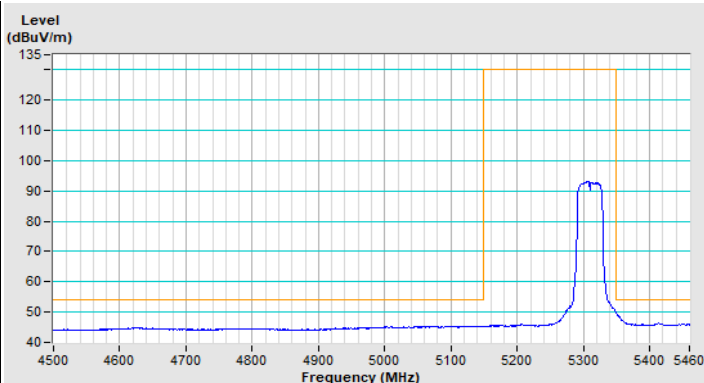

Horizontal (Average)

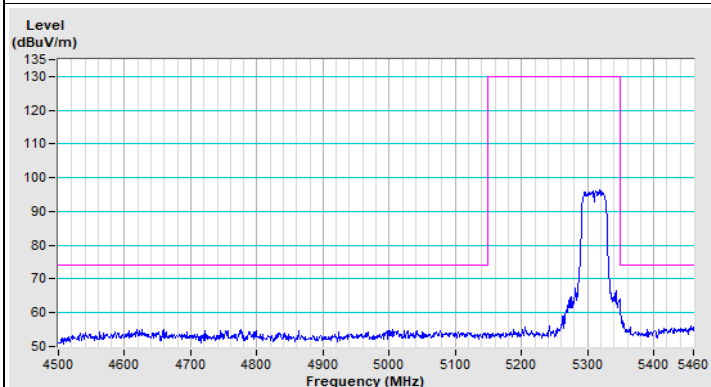


Vertical (Peak)

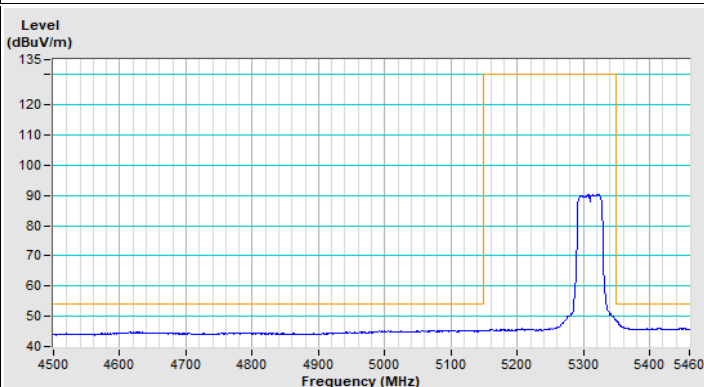


Vertical (Average)


802.11n (HT40) Channel 102

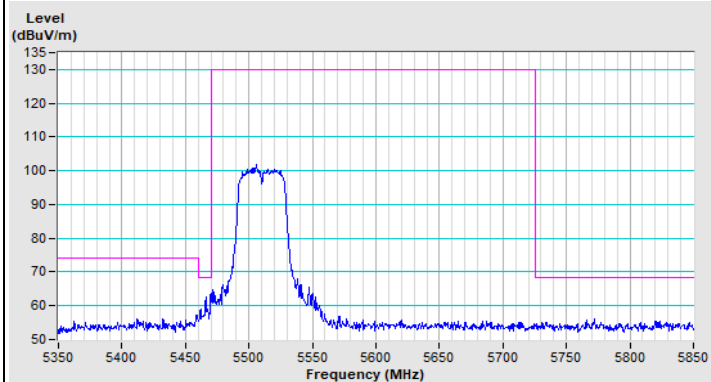


Horizontal (Peak)

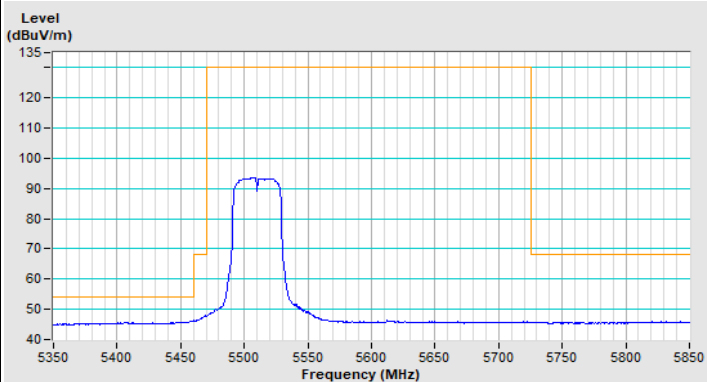

Horizontal (Average)

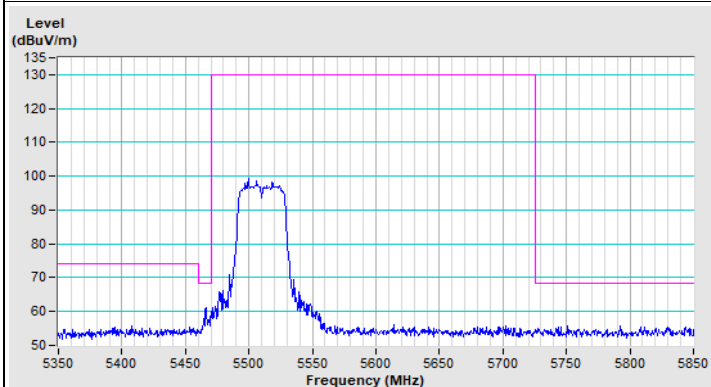


Vertical (Peak)

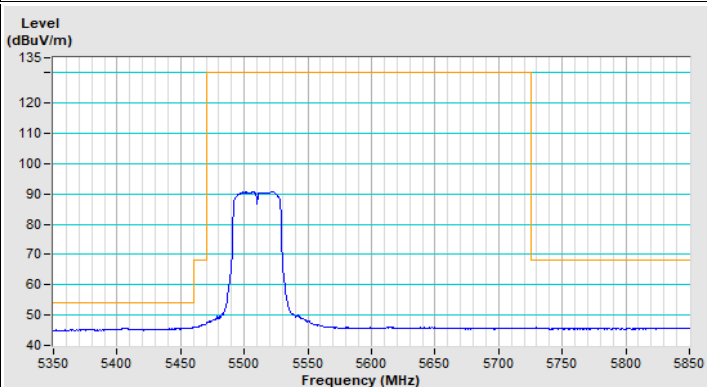


Vertical (Average)

802.11n (HT40) Channel 134


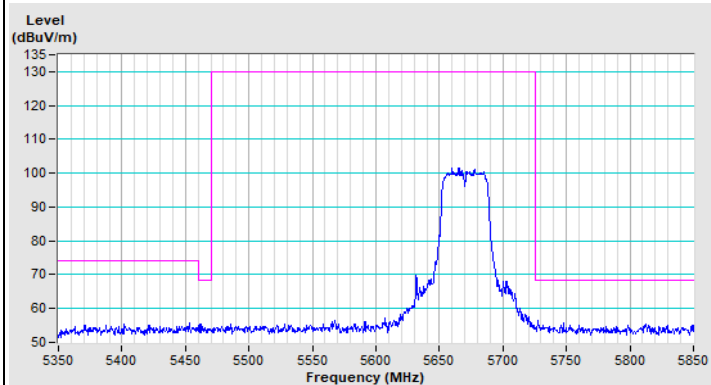


Horizontal (Peak)


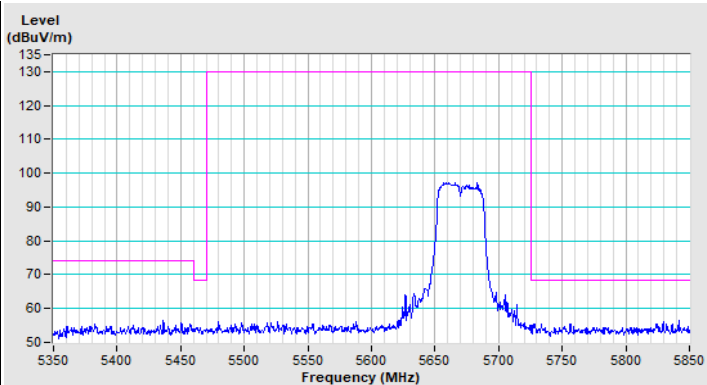


Vertical (Peak)

802.11n (HT40) Channel 151

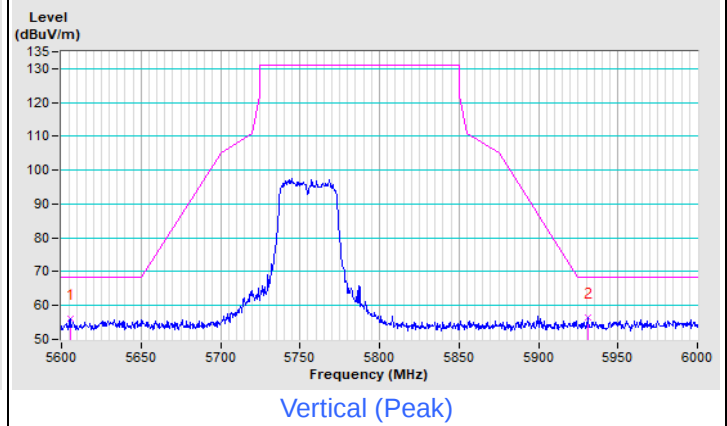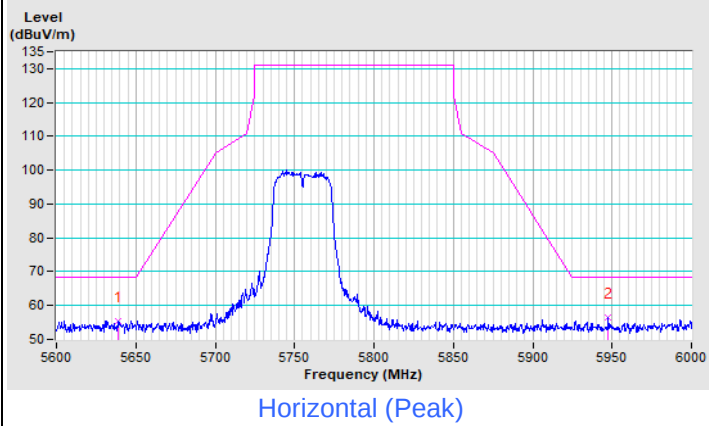

802.11n (HT40) Channel 159

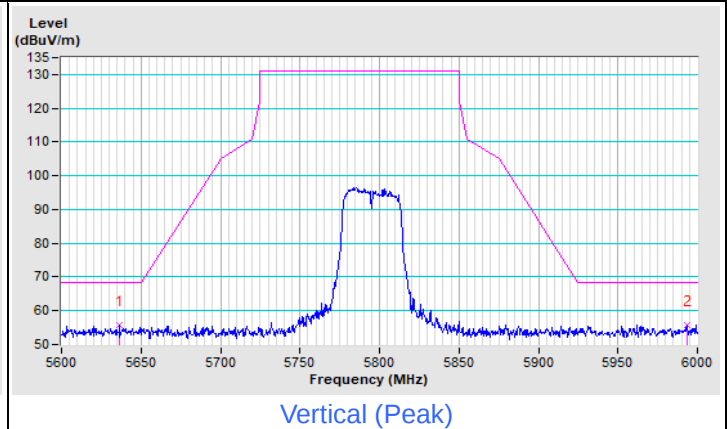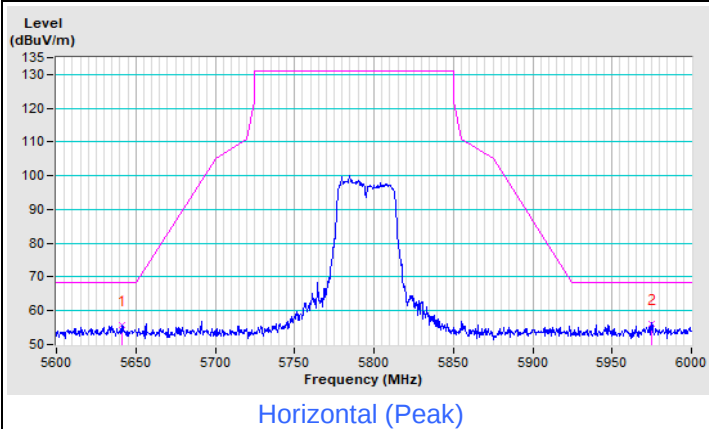

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---