


THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY AND CONFIDENTIAL MATERIAL OF HONEYWELL INTERNATIONAL INC AND SHALL NOT BE REPRODUCED, OR COPIED, OR USED AS A BASIS FOR MANUFACTURE OR SALE OF EQUIPMENT OR DEVICES WITHOUT WRITTEN PERMISSION.©

DRAWING NO.			
REV#	REV DESCRIPTION	CC#	DATE
A	RELEASE	ECN-00054612	Sep.06/24
B	change model	ECN-00056381	Oct.18/24
C	add-003~006	ECN-00057667	Nov.19/24

NOTES

1. MATERIAL: 0.127mm CLEAR POLYESTER
BACKED WITH 3M300LSE ADHESIVE WITH RELEASE LINER.
TOP SURFACE SELECTIVELY TEXTURED PER ARTWORK.
2. COLORS:
BACKGROUND: NCS S 9000-N
Red:NCS S 1580-Y90R
Grey: NCS S 4000-N
3. TOLERANCE FOR THICKNESS ±0.05MM, ALL OTHERS ±.254mm.
4. TOP SURFACE FREE FROM NICKS, SCRATCHES AND
OTHER SURFACE BLEMISHES.
5. LABEL TO MEET UL REQUIREMENTS FOR MARKING AND
LABELING SYSTEMS, AND TO BE UL RECOGNIZED. PLACE UL
RECOGNIZED LABEL INFORMATION ON EACH SMALLEST
PACKAGING CONTAINER. THE PACKAGE LABELING TO INCLUDE:
UL LOGO, COMPANY TRADE MARK, UL DESIGNATION, PER UL
STANDARD REQUIREMENTS.
6. PRIOR TO MASS PRODUCTION, SAMPLE APPROVAL IS NEEDED
ACCORDING TO HONEYWELL PPAP PROCESS. DETAIL DOCUMENT
REQUIREMENT ARE SPECIFIED ON HONEYWELL FORM L4-GLBL-
LOG-1724, (LABELS APPLY TO LEVEL 2). FOR ASSISTANCE WITH THIS
PROCEDURE, CONTACT THE HONEYWELL ISC GROUP FOR
DOCUMENTATION AND FURTHER INSTRUCTIONS.
7. WINDOW TO REMAIN UNPRINTED ON ALL MATERIAL NUMBERS.

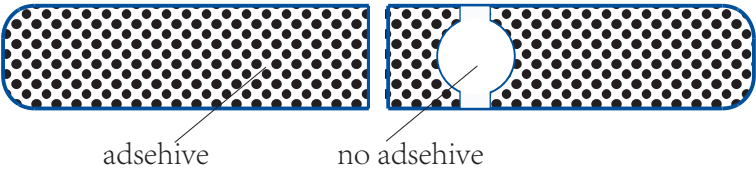

Material#:3016-2496-003
2105i XR



Material#:3016-2496-004
2105i SR

DESIGNED BY Bill		DATE Sep.06/24
Honeywell		
TITLE: AGENCY LABEL,2100i,CORDED		
A	DRAWING NO: 3016-2496	REV C
SCALE ~	DO NOT SCALE	SHEET 1 OF 1