


Appendix B

Peak Output Power




Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl -0.90 dBm VBW 1 MHz
25 dBm 2.40209118 GHz SWT 5 ms Unit dBm

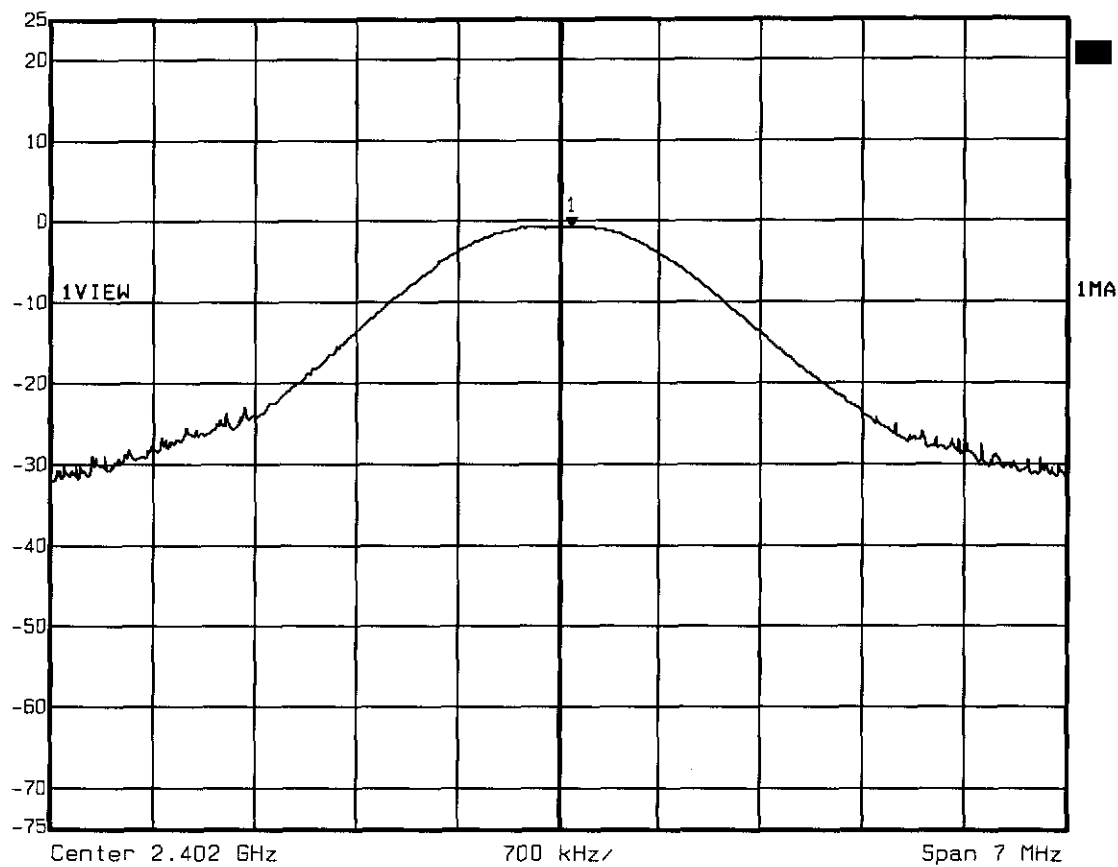

Title: Peak Output Power conducted Ch.: 0
Comment A: Jabra Speakerphone SP100
Date: 22.MAR.2004 08:31:34




Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl -1.56 dBm VBW 1 MHz
25 dBm 2.44100701 GHz SWT 5 ms Unit dBm

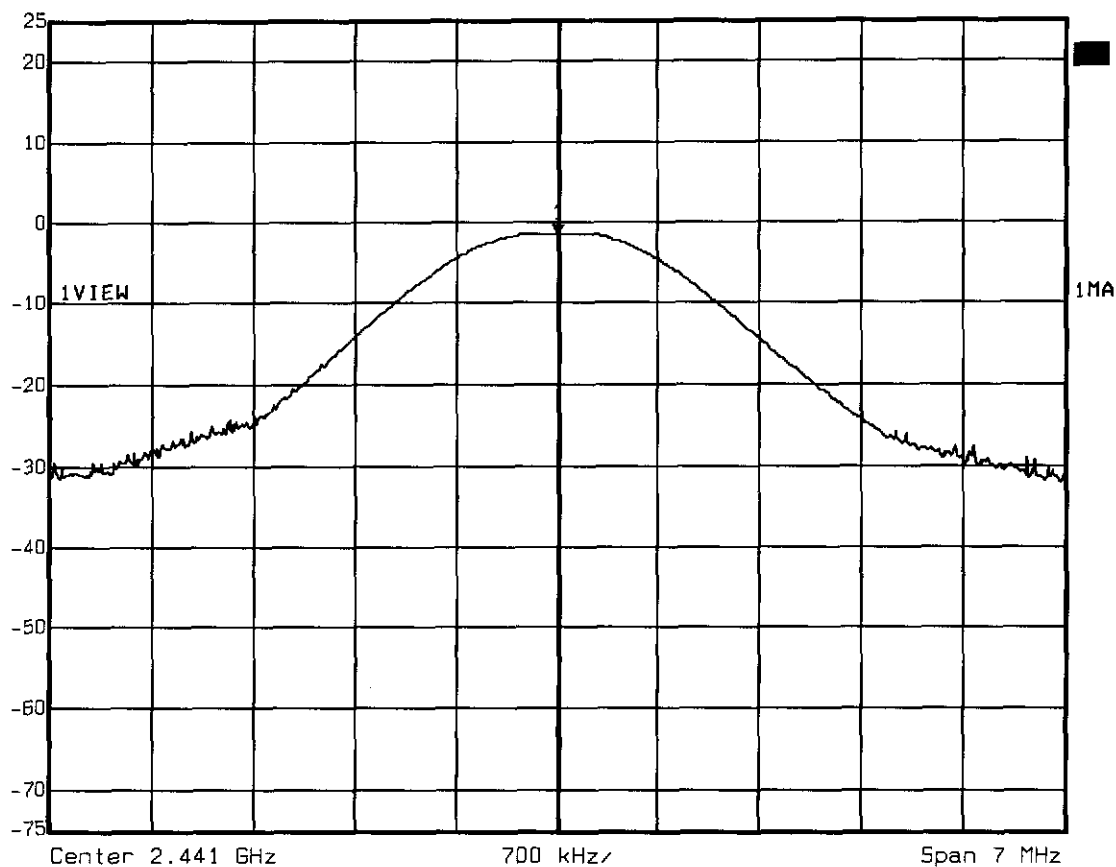

Title: Peak Output Power conducted Ch.: 39
Comment A: Jabra Speakerphone SP100
Date: 22.MAR.2004 08:32:47




Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl -2.63 dBm VBW 1 MHz
25 dBm 2.48014729 GHz SWT 5 ms Unit dBm

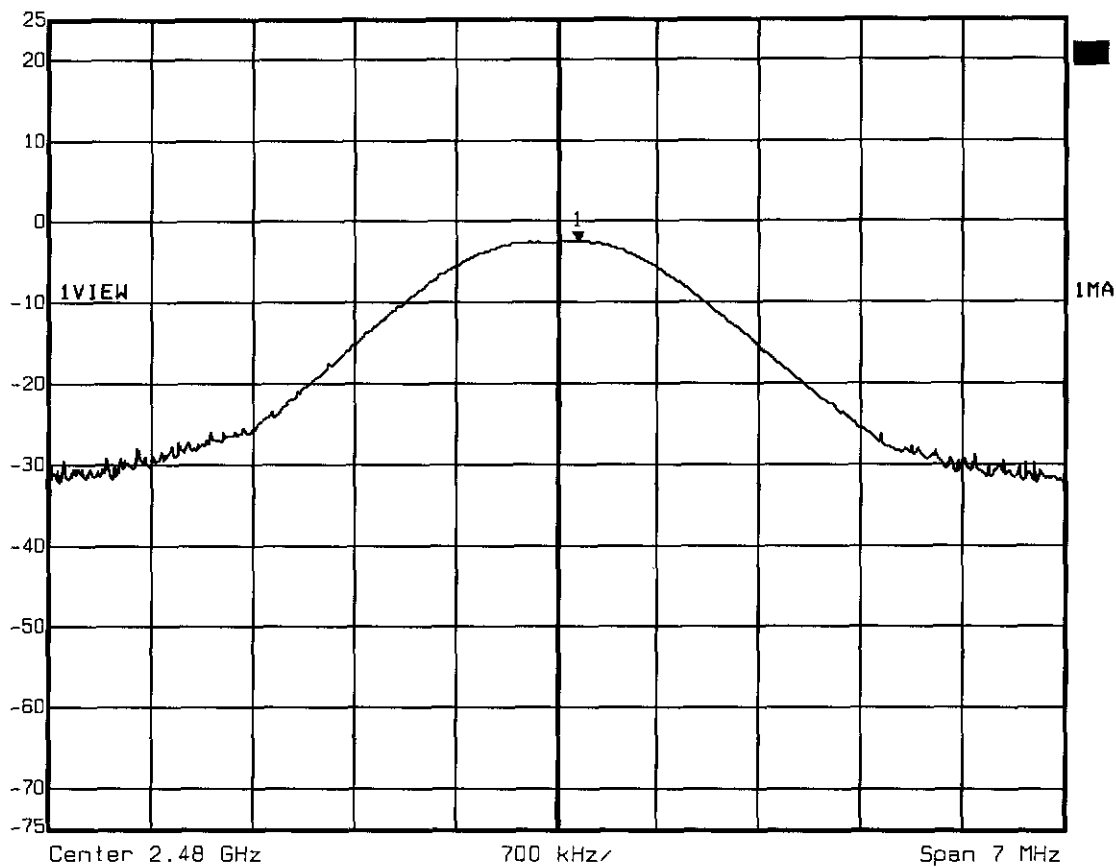

Title: Peak Output Power conducted Ch.: 78
Comment A: Jabra Speakerphone SP100
Date: 22.MAR.2004 08:33:43


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Jabra Speaker Phone 2402 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / Unom: 2,4 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -3.66dBm, RBW: 5MHz

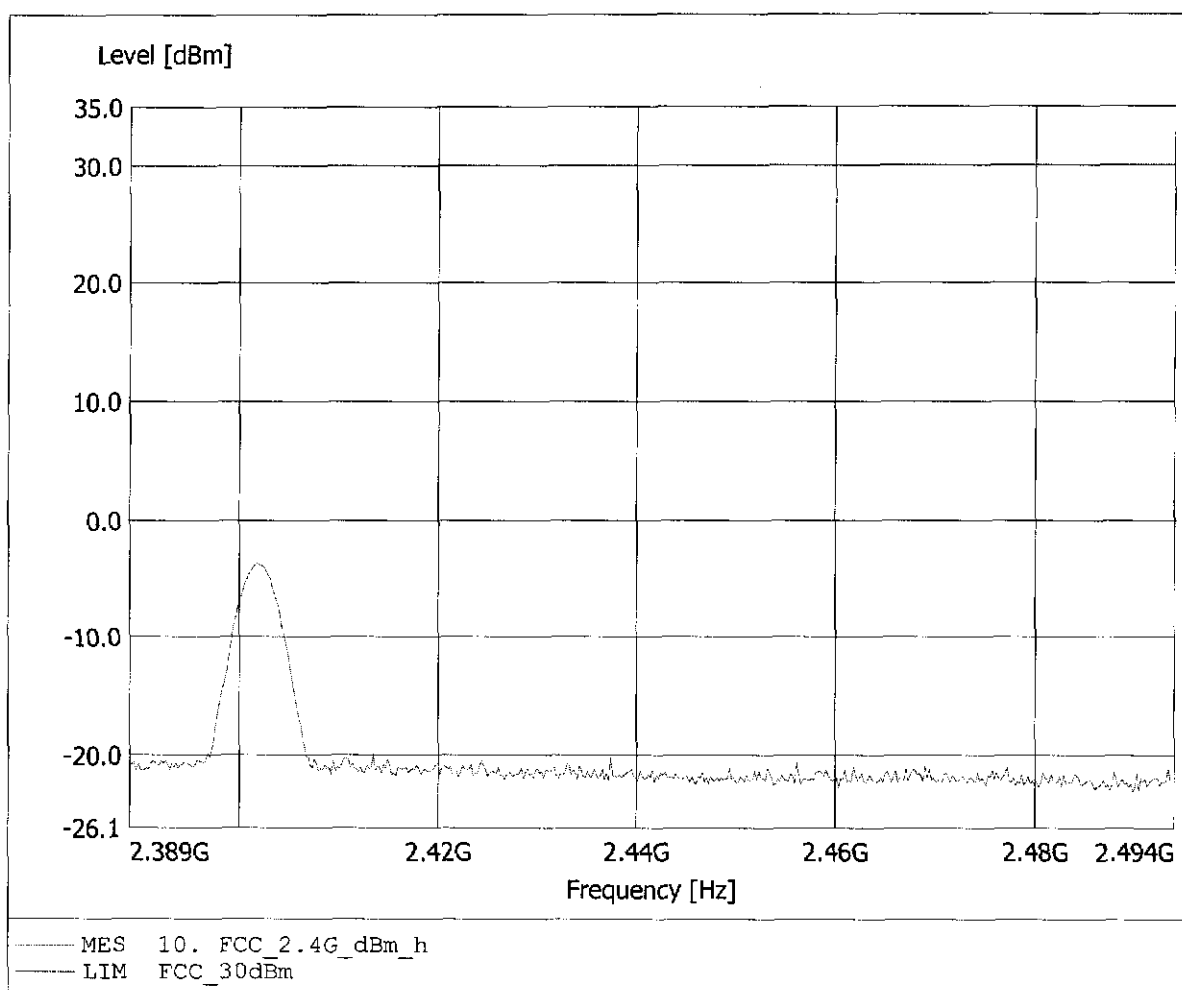


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Jabra Speaker Phone 2402 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / Unom: 2,4 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Cerovsky
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -9.64dBm, RBW: 5MHz

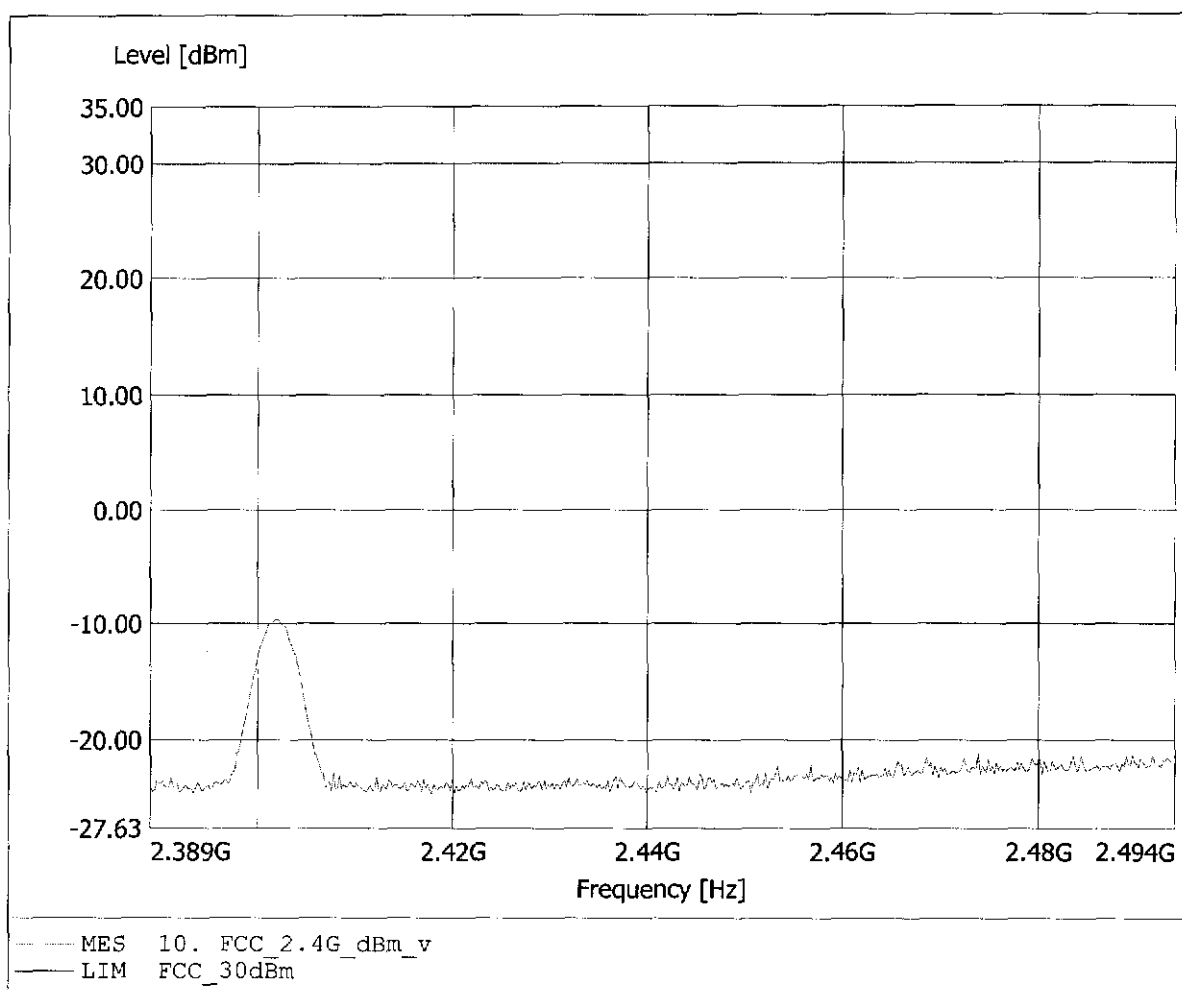


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Jabra Speaker Phone 2441 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / Unom: 2,4 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -3.35dBm, RBW: 5MHz

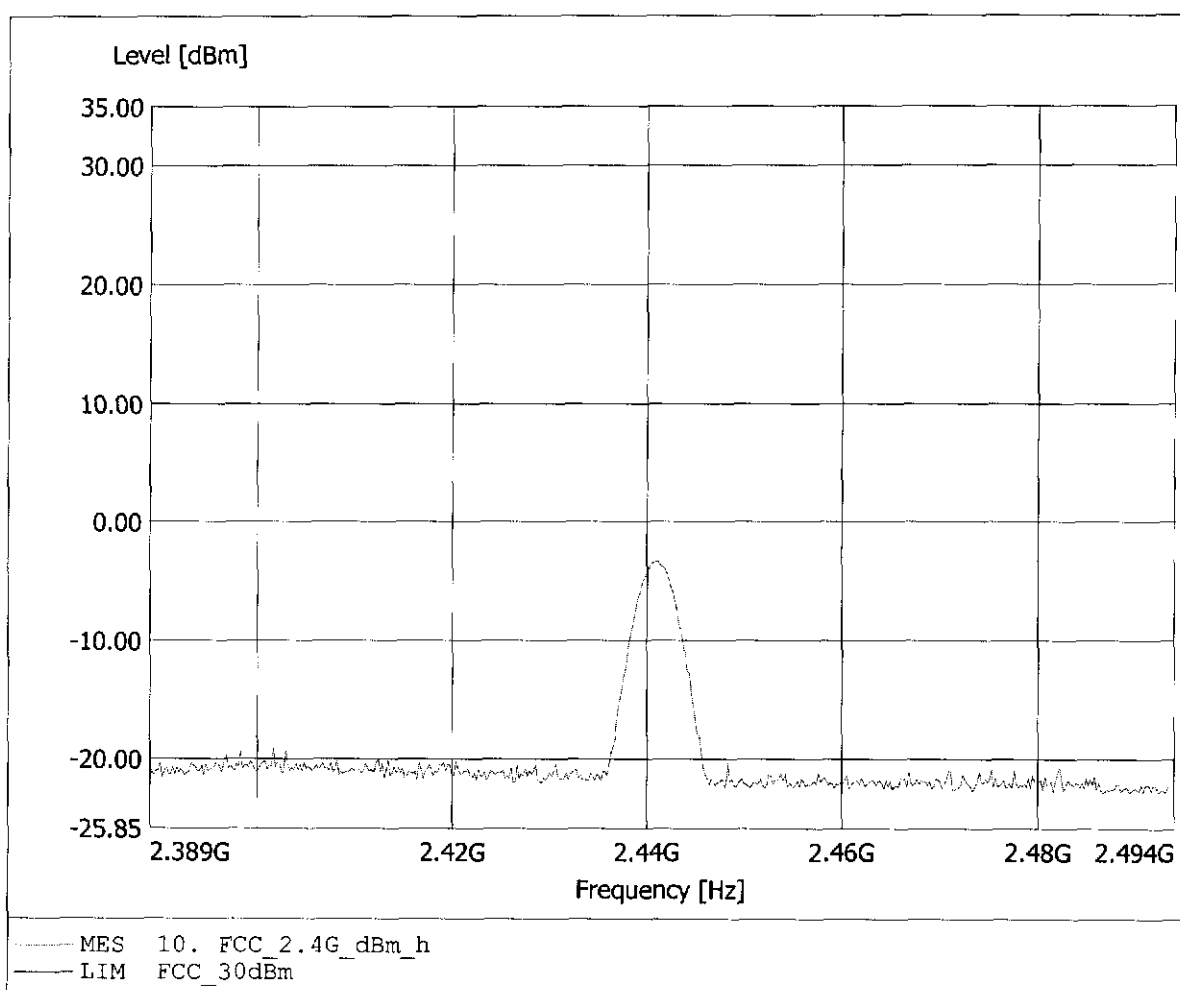


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Jabra Speaker Phone 2441 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / Unom: 2,4 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -7.55dBm, RBW: 5MHz

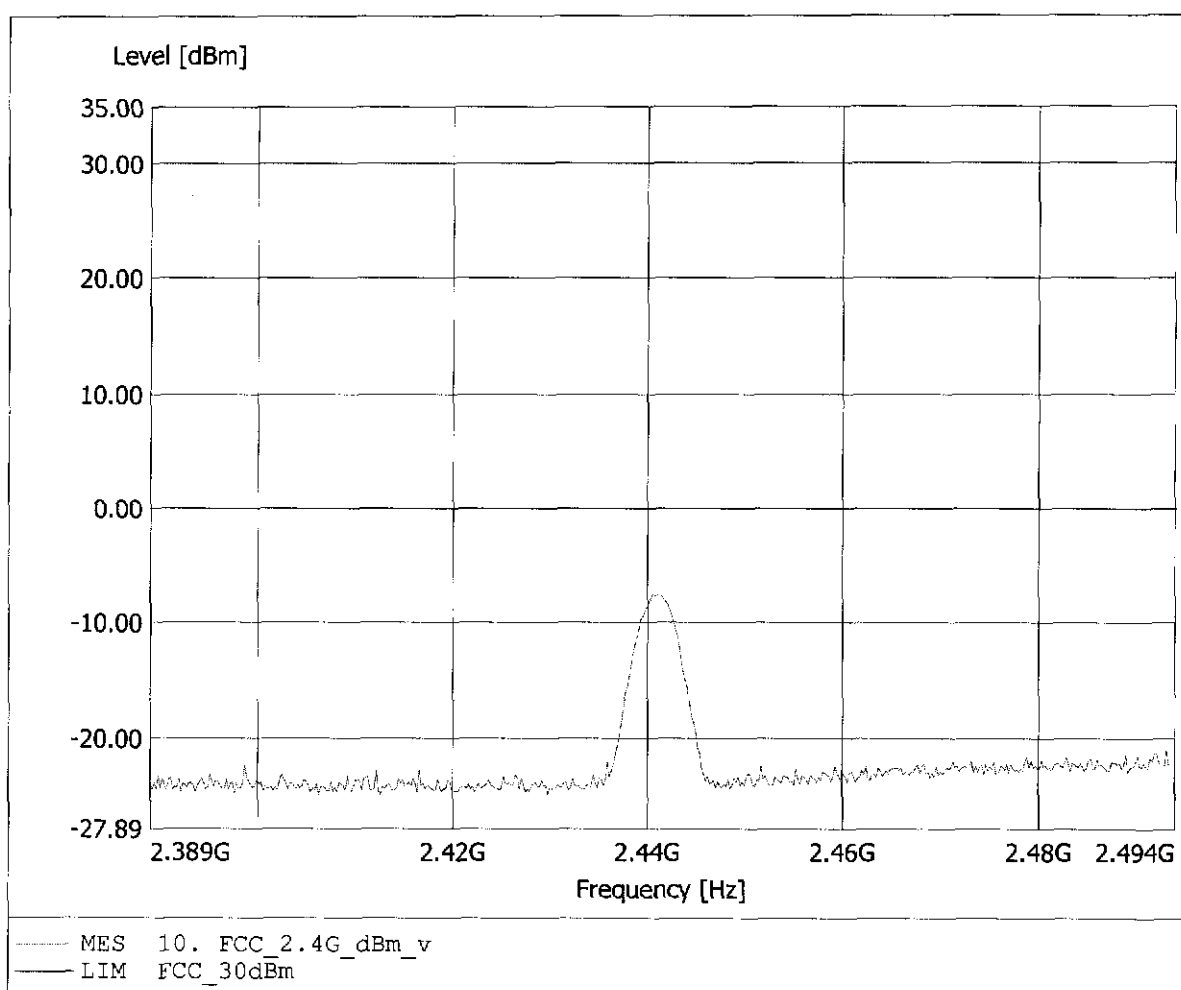


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Jabra Speaker Phone 2480 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / Unom: 2,4 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -5.17dBm, RBW: 5MHz

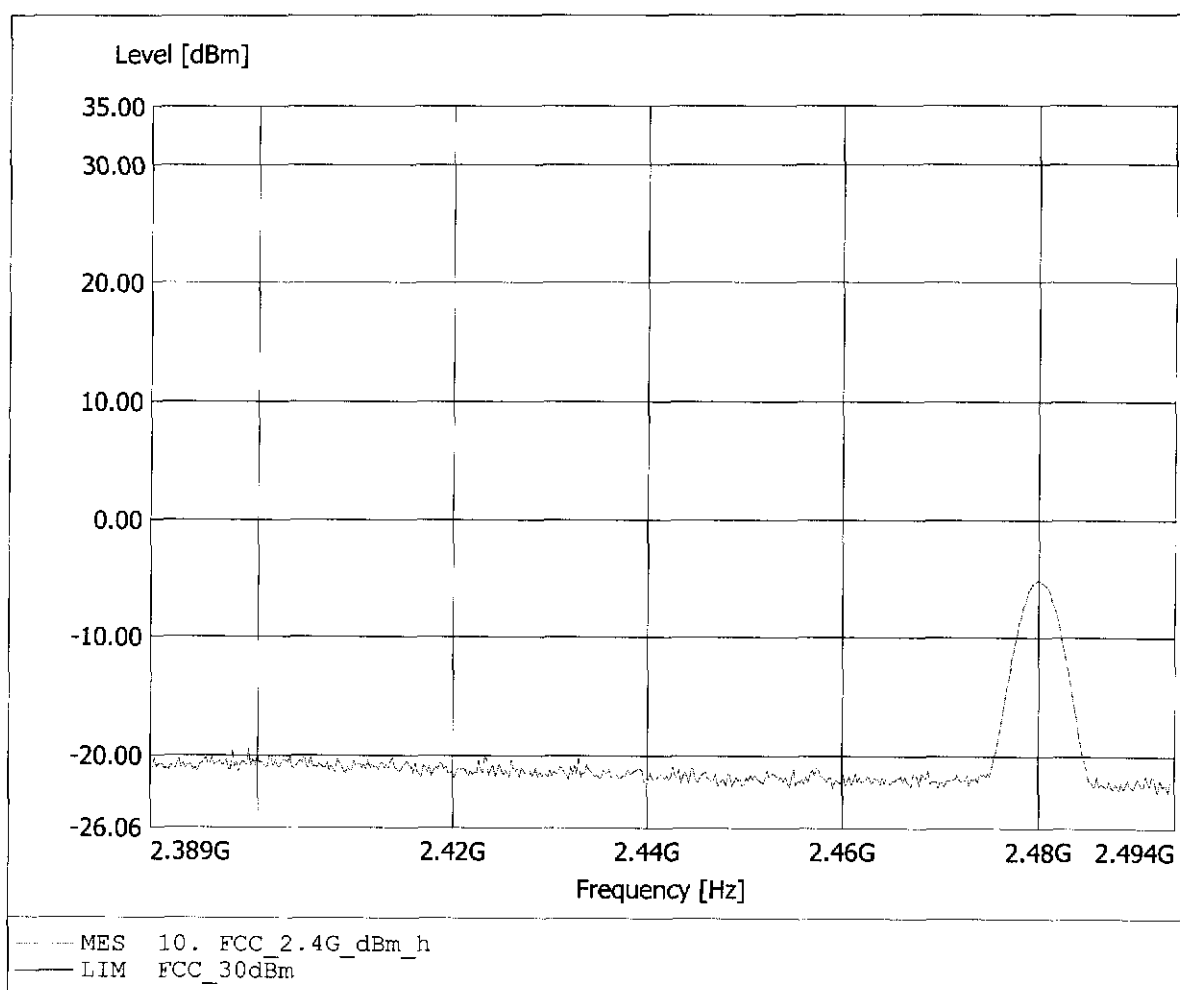

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Jabra Speaker Phone 2480 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / Unom: 2,4 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -6.48dBm, RBW: 5MHz

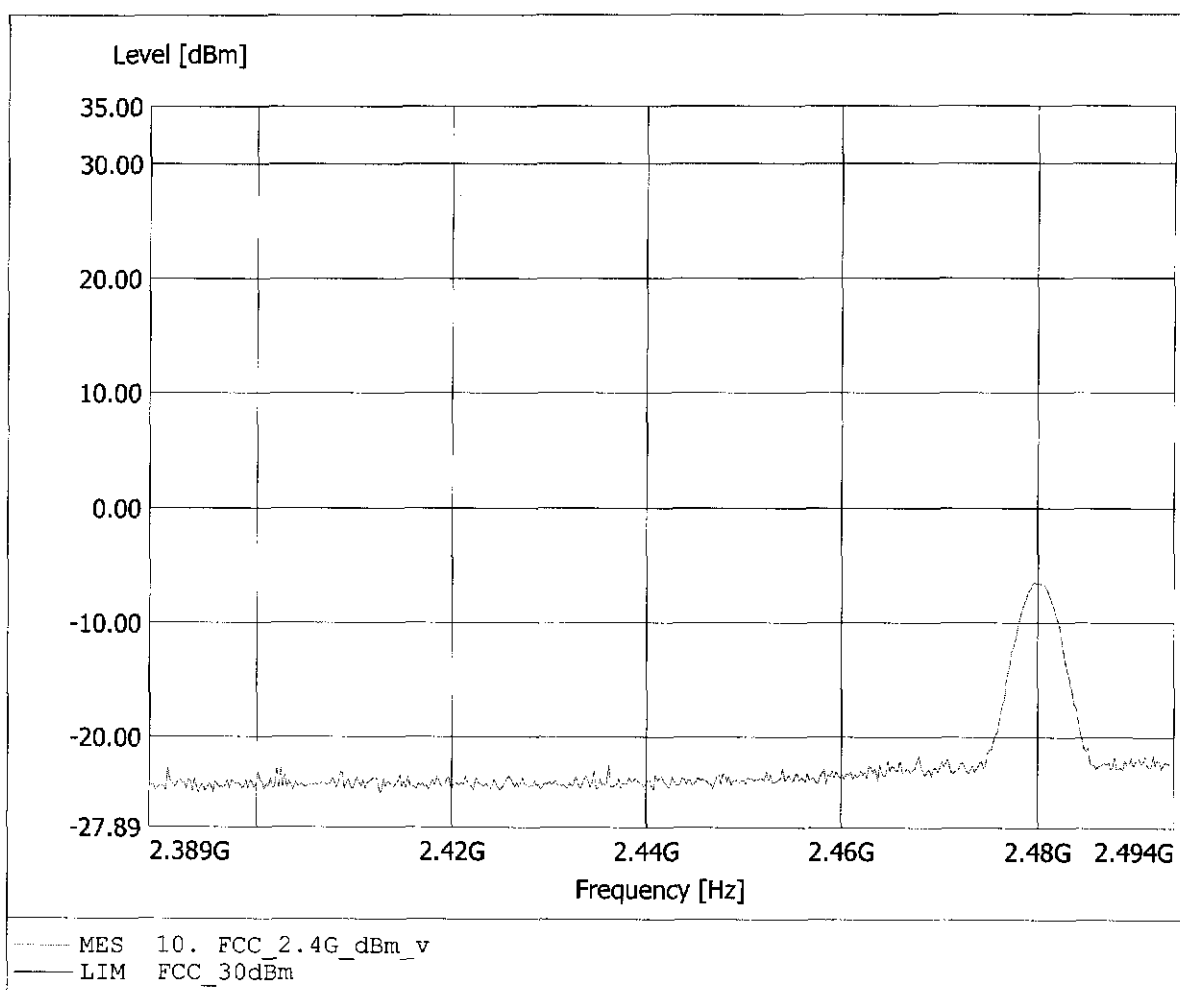


Appendix C

Spurious Emissions radiated - Transmitter operating


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

EUT: Jabra Speaker Phone 2441 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / Unom: 2,4 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Emax: 87.51dBµV/m, RBW: 100kHz

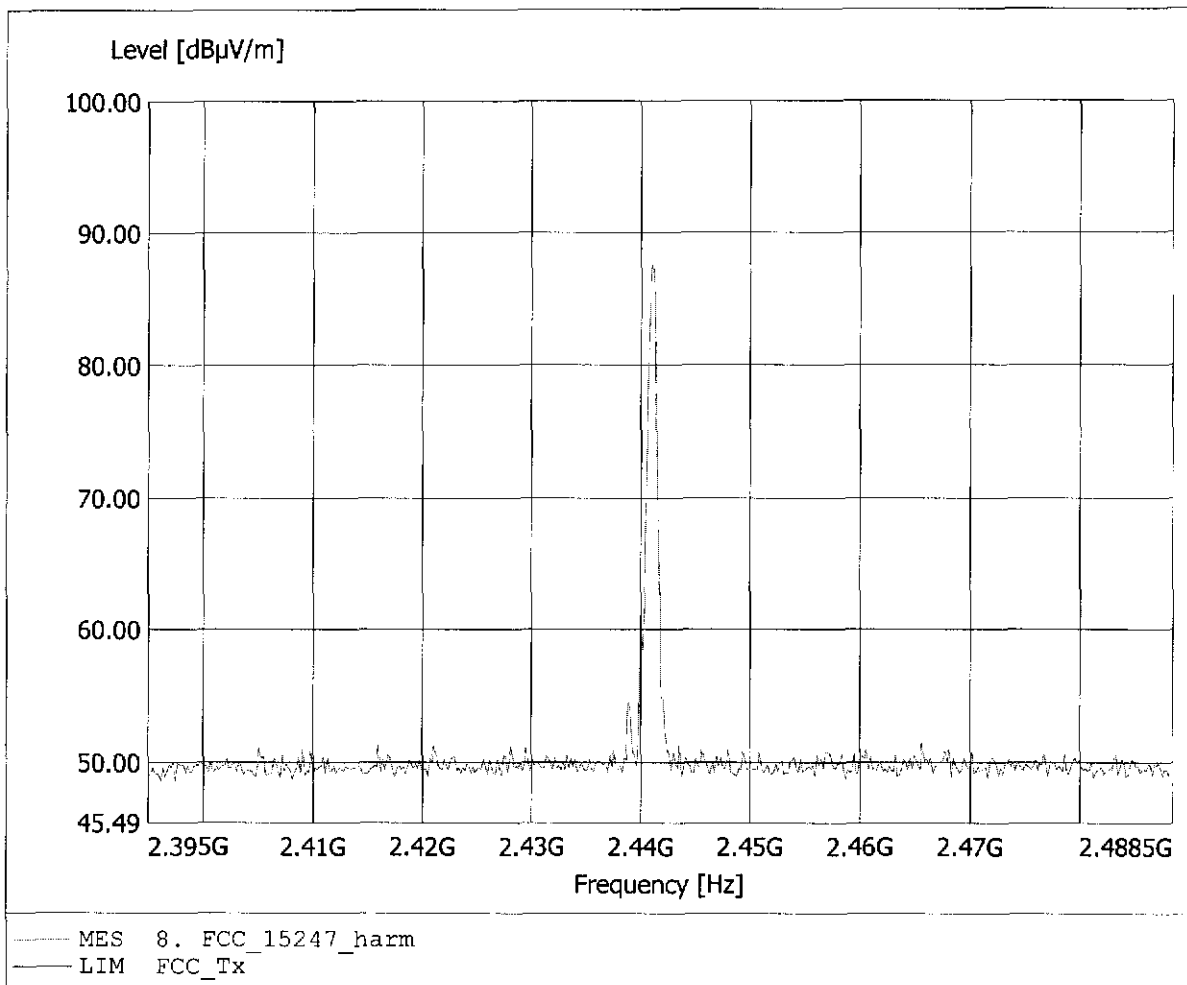


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2402 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / Unom: 2,4 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Cerovsky
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.297MHz, Emax: 32.24dBµV/m, RBW: 100kHz

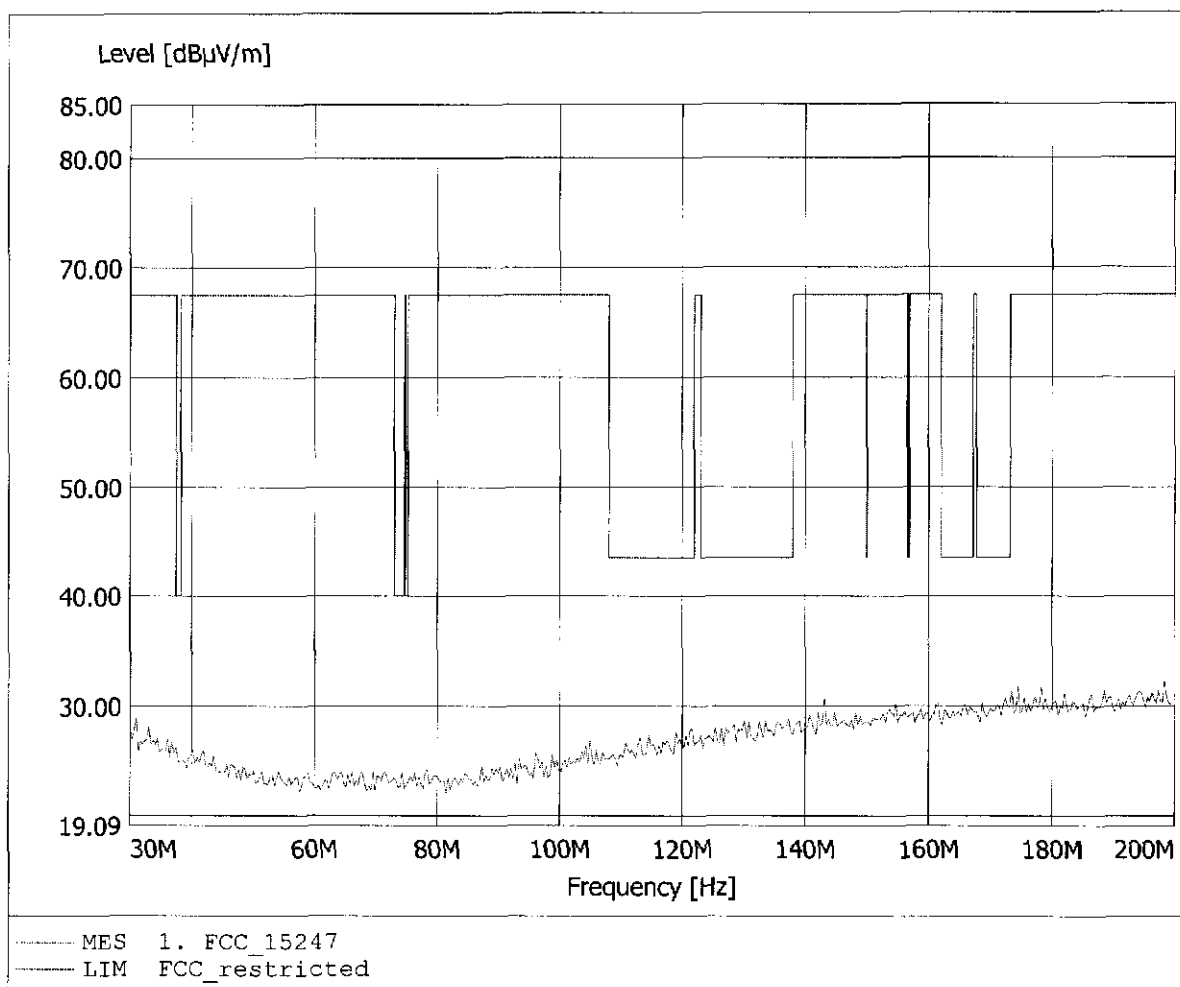


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Jabra Speaker Phone 2402 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / Unom: 2,4 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 181.603MHz, Emax: 31.86dBµV/m, RBW: 100kHz

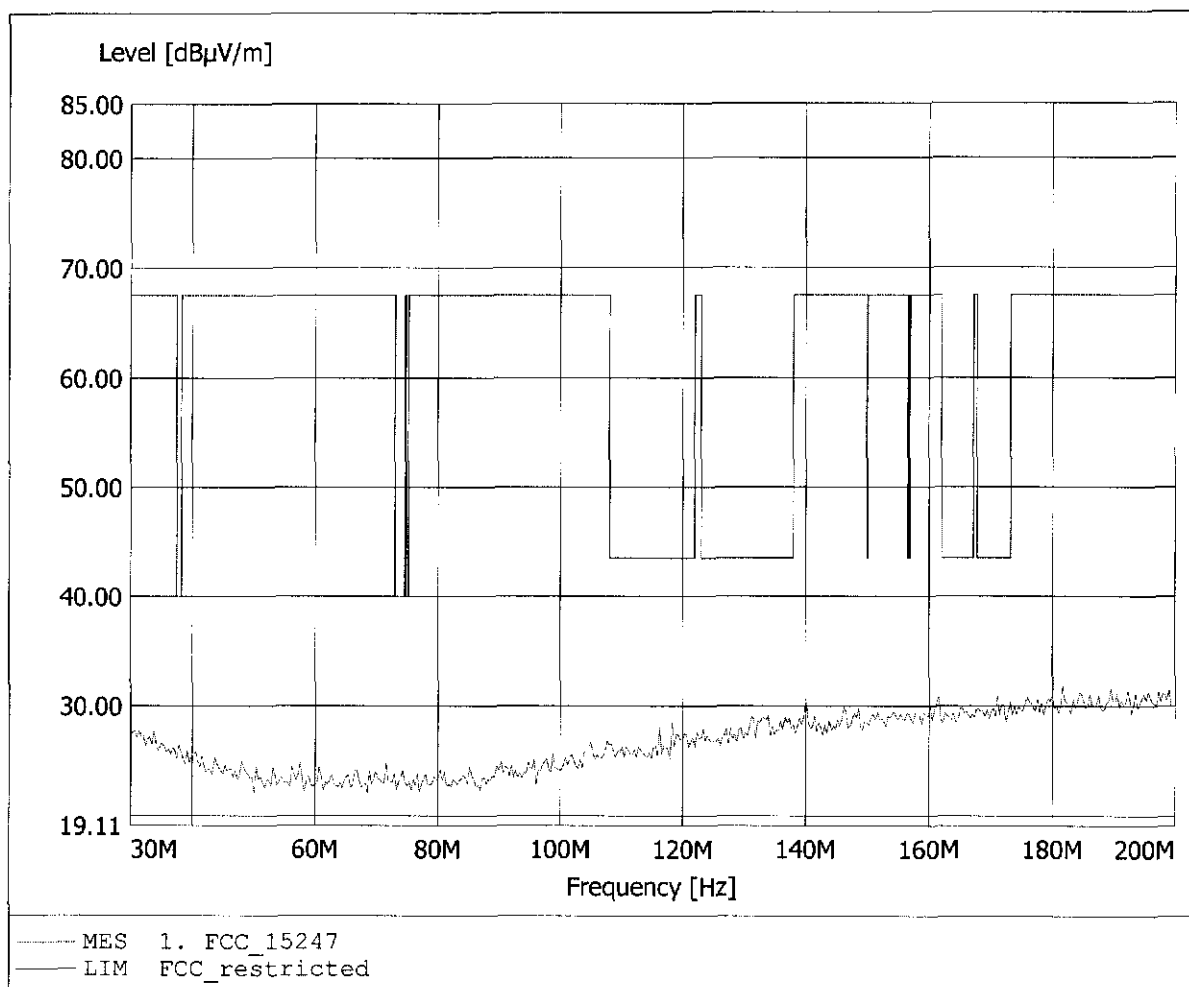


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2402 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / Unom: 2,4 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 919.840MHz, Emax: 22.11dBµV/m, RBW: 100kHz

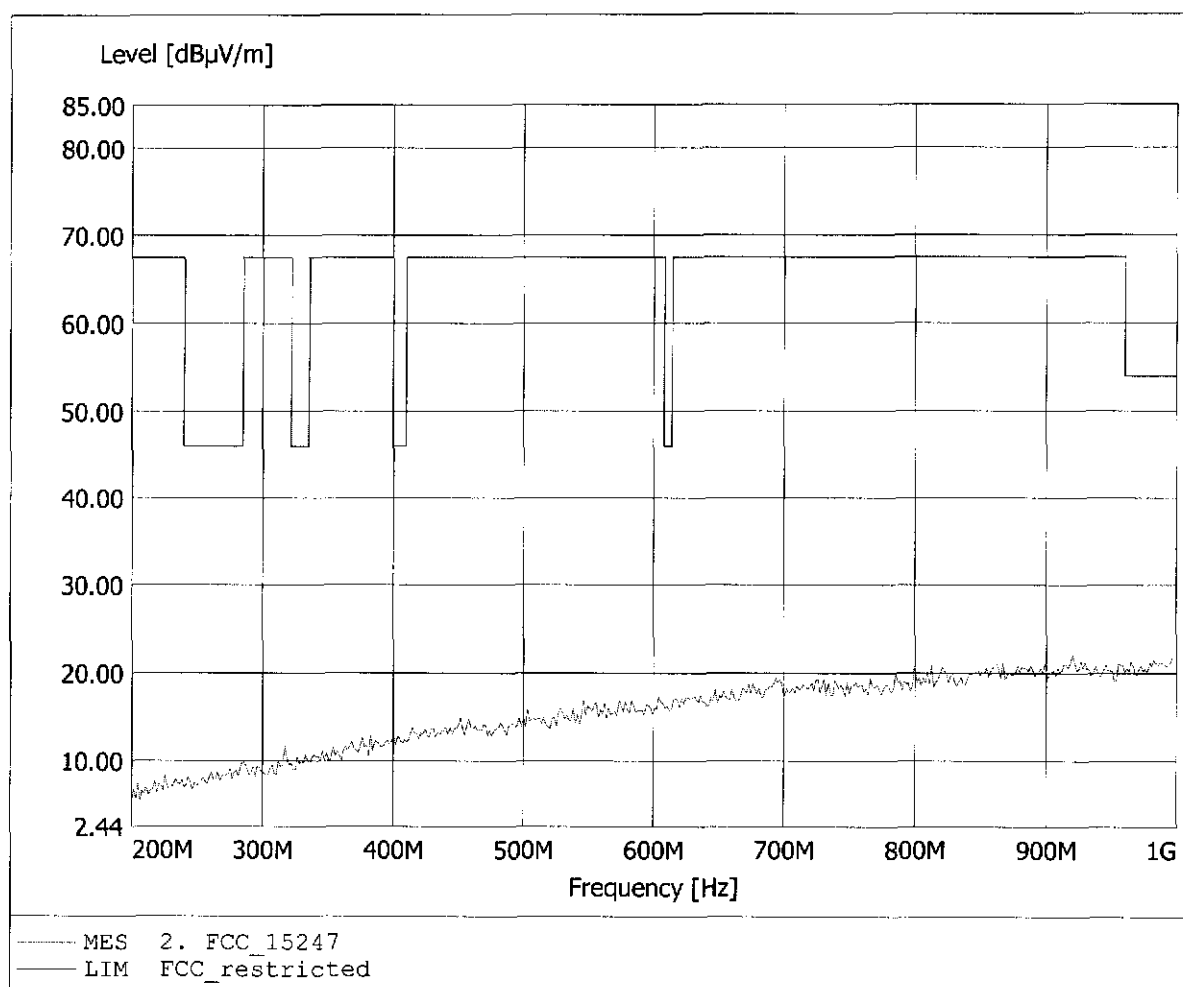


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2402 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / Unom: 2,4 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 918.236MHz, Emax: 23.14dBµV/m, RBW: 100kHz

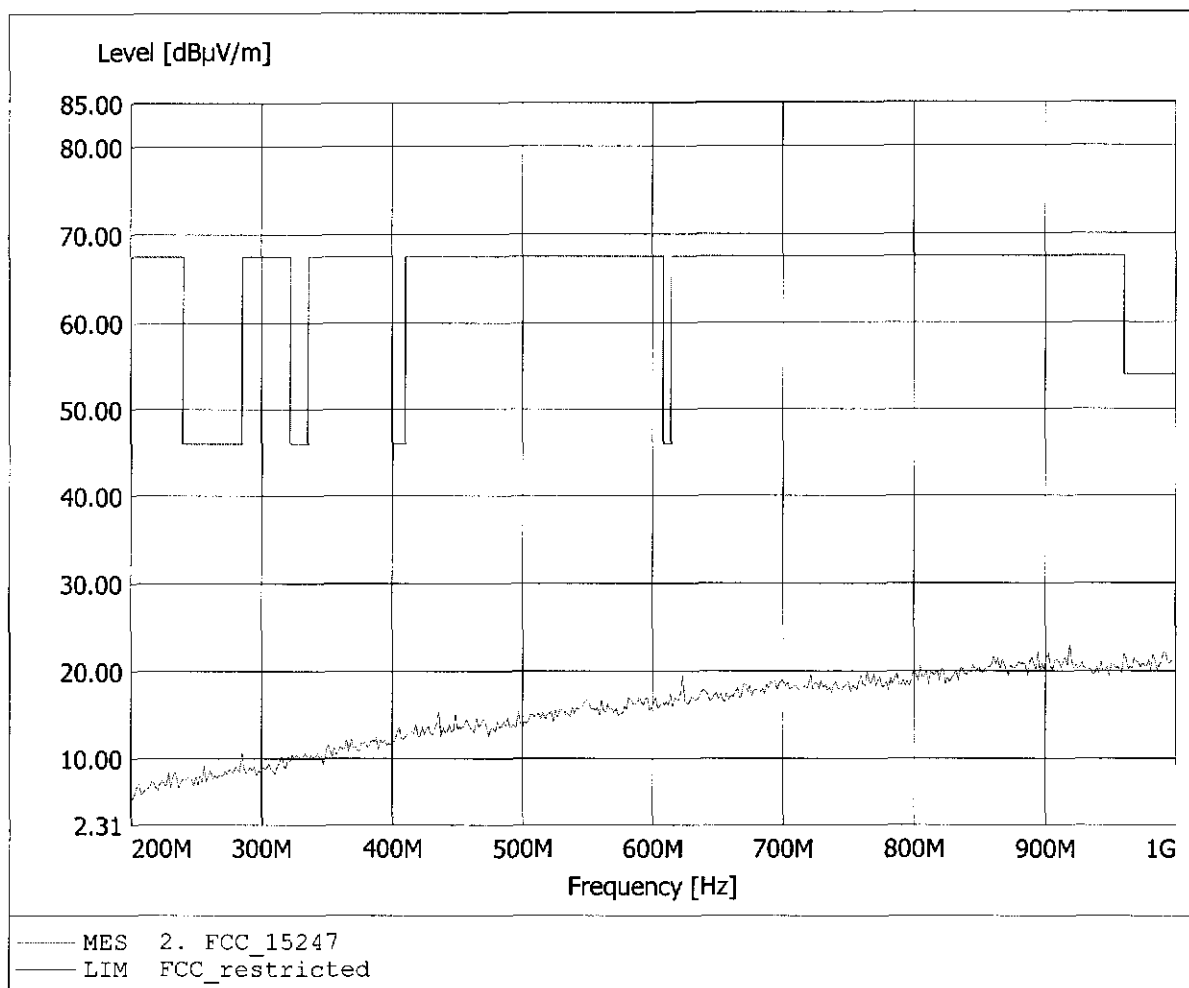


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2402 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 66.80dBµV/m, RBW: 1MHz

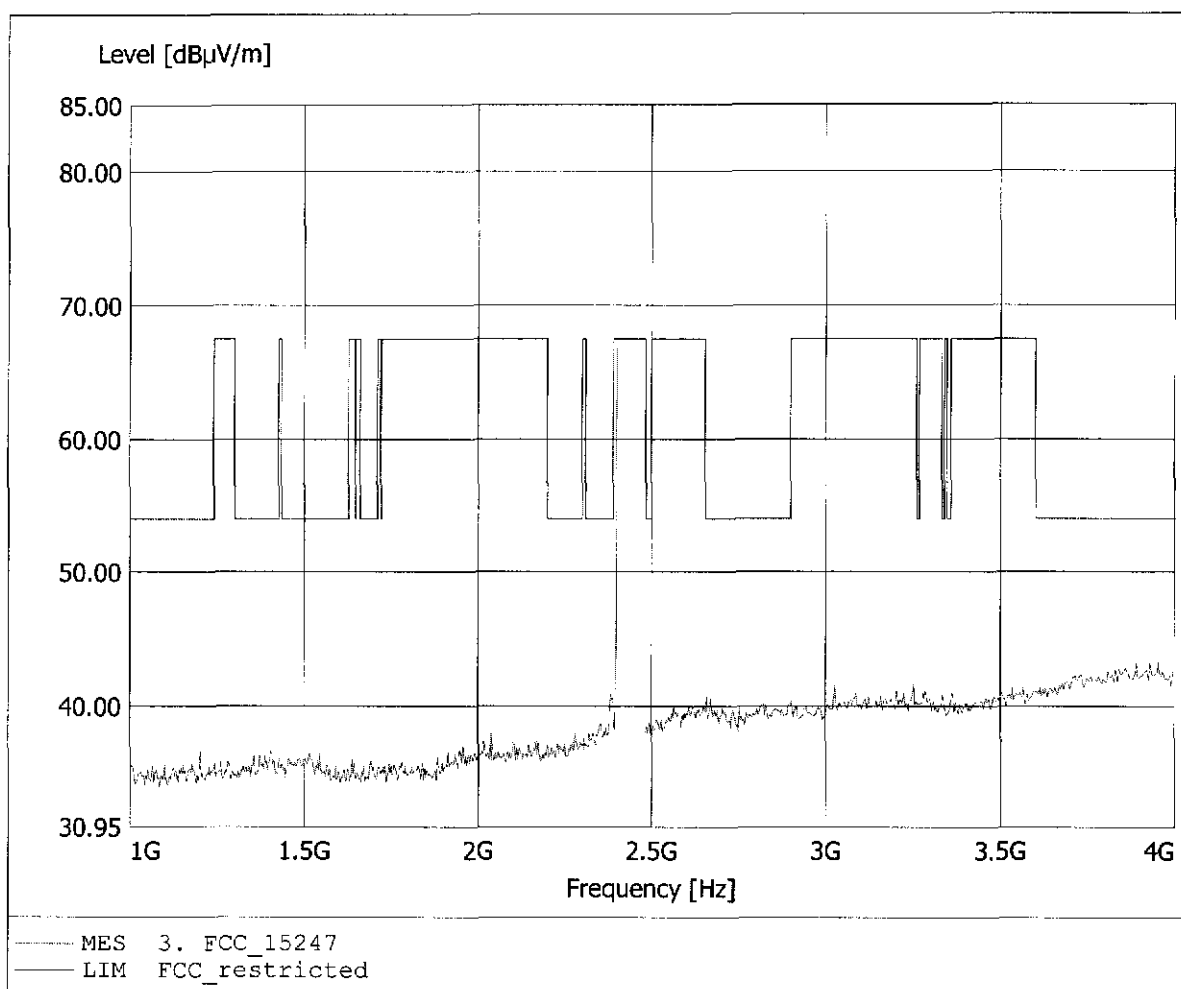


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2402 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 47.35dBµV/m, RBW: 1MHz

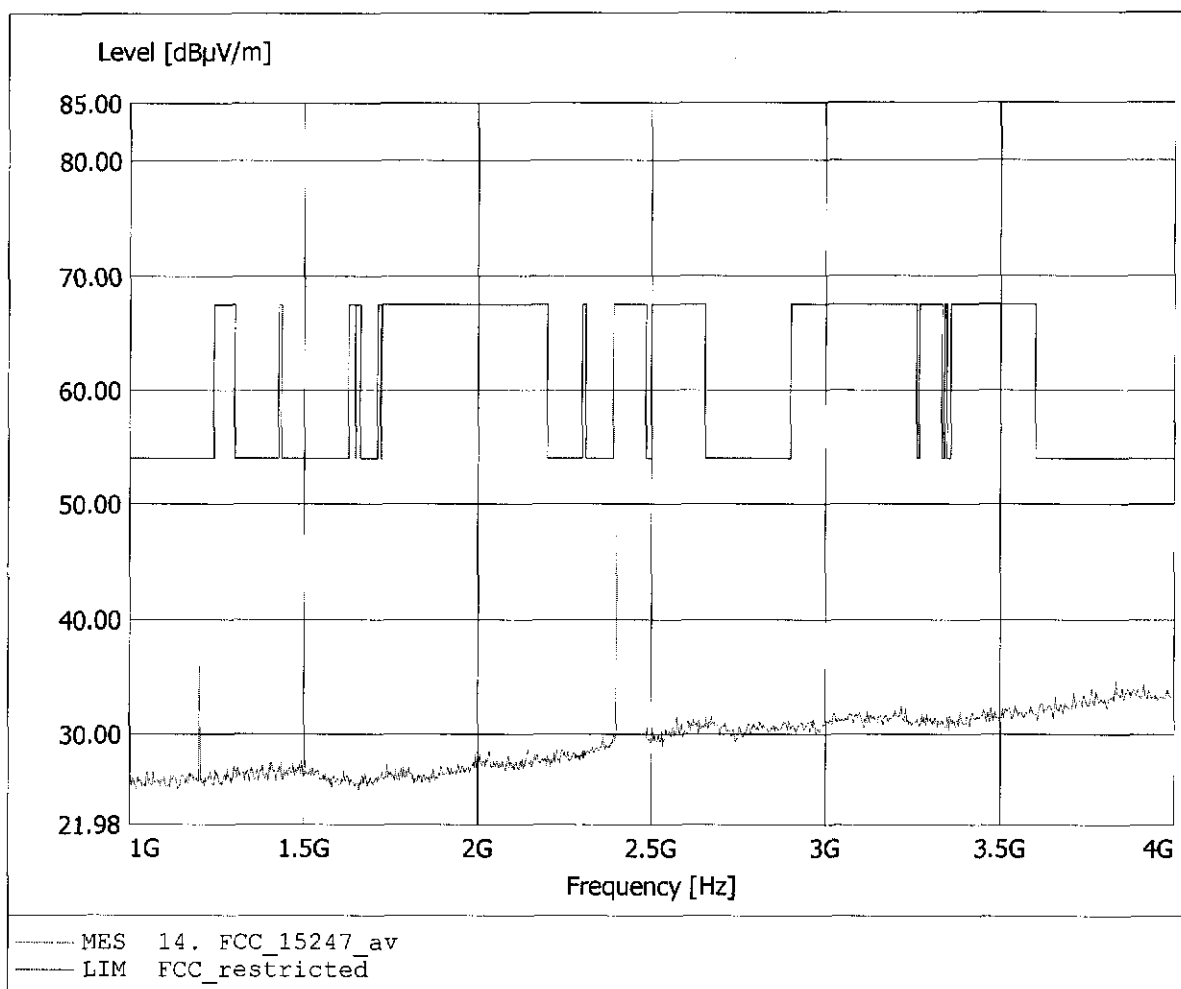


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2402 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 70.83dBμV/m, RBW: 1MHz

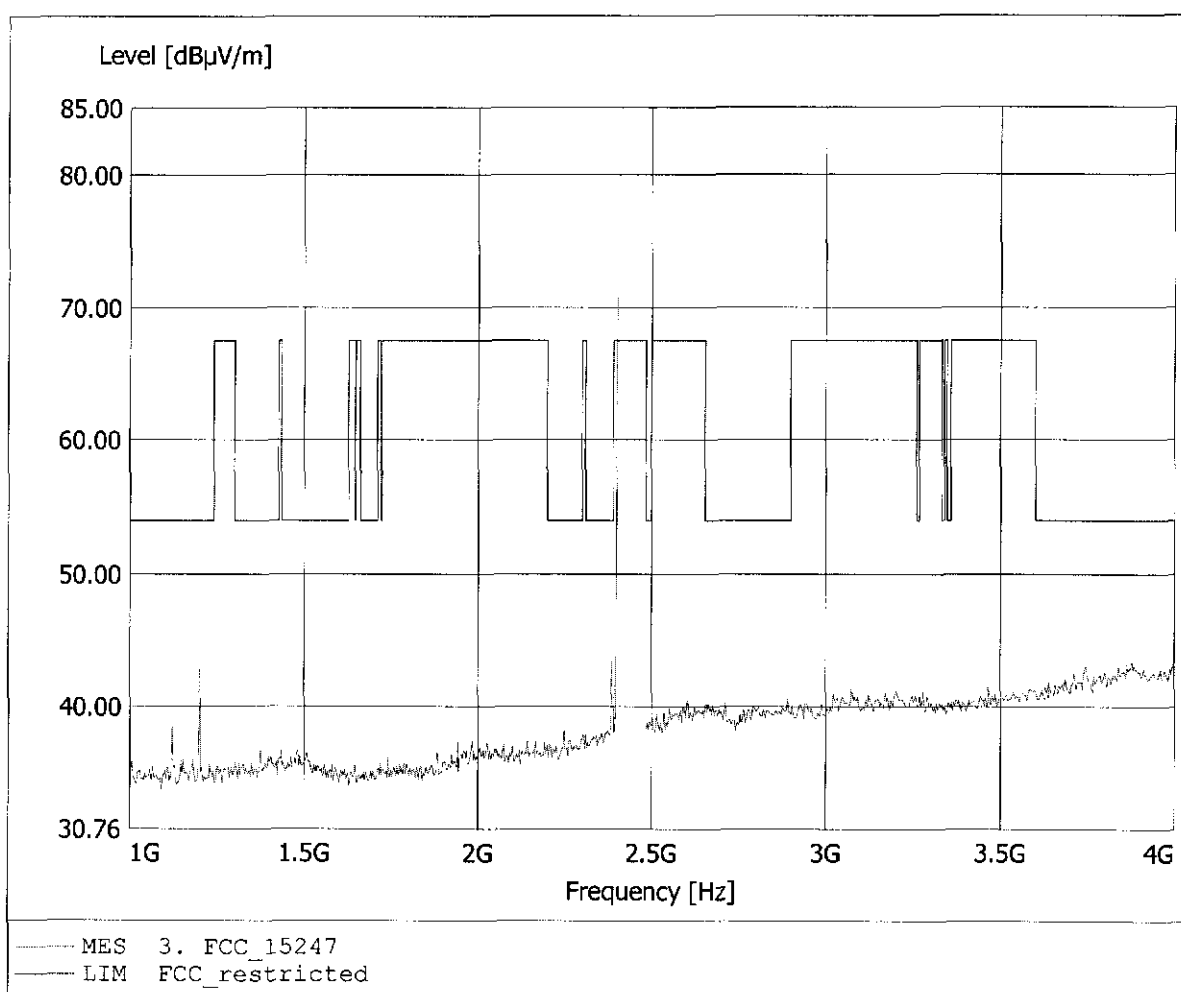


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2402 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cerovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 38.82dBµV/m, RBW: 1MHz

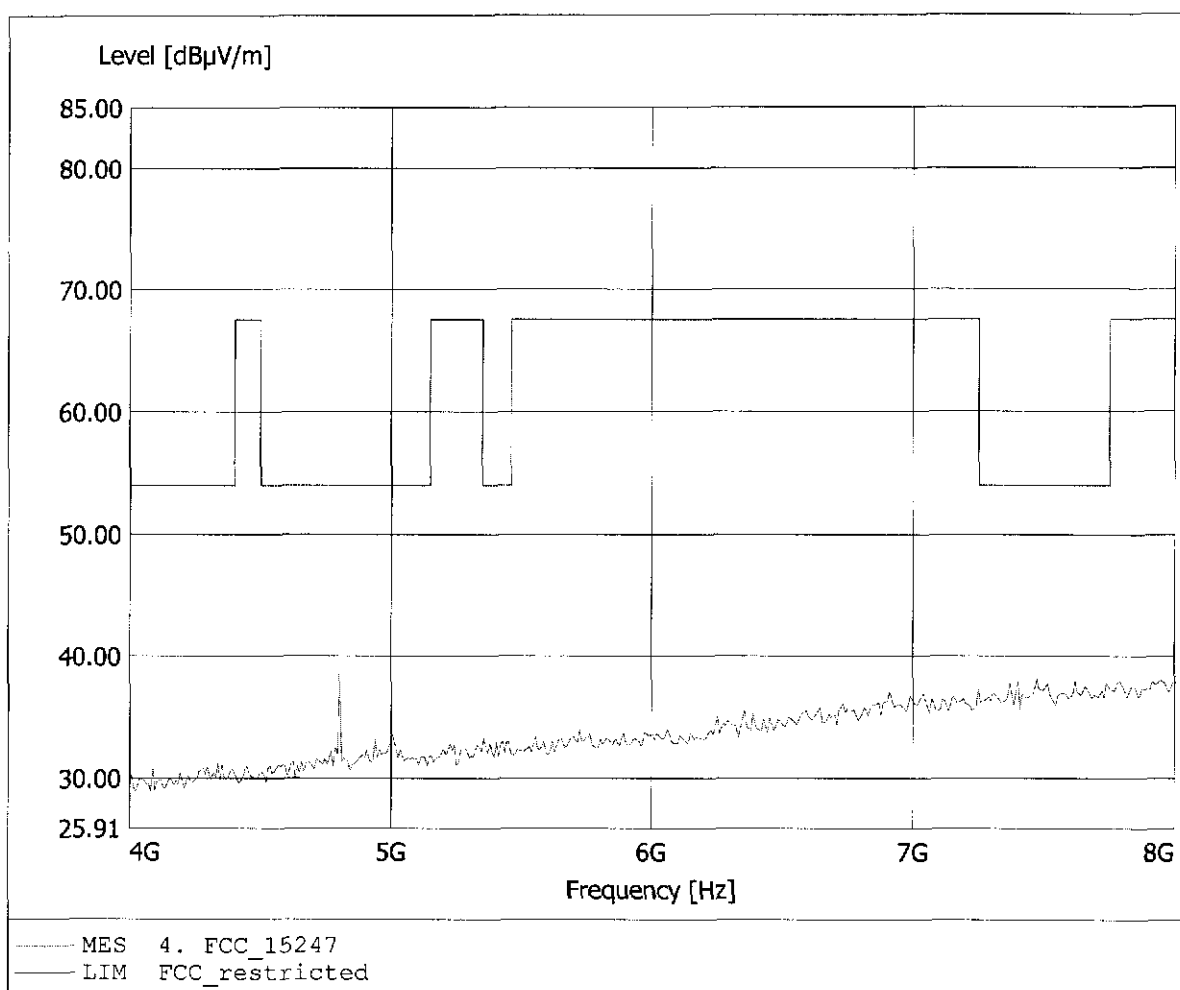


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2402 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 39.58dBµV/m, RBW: 1MHz

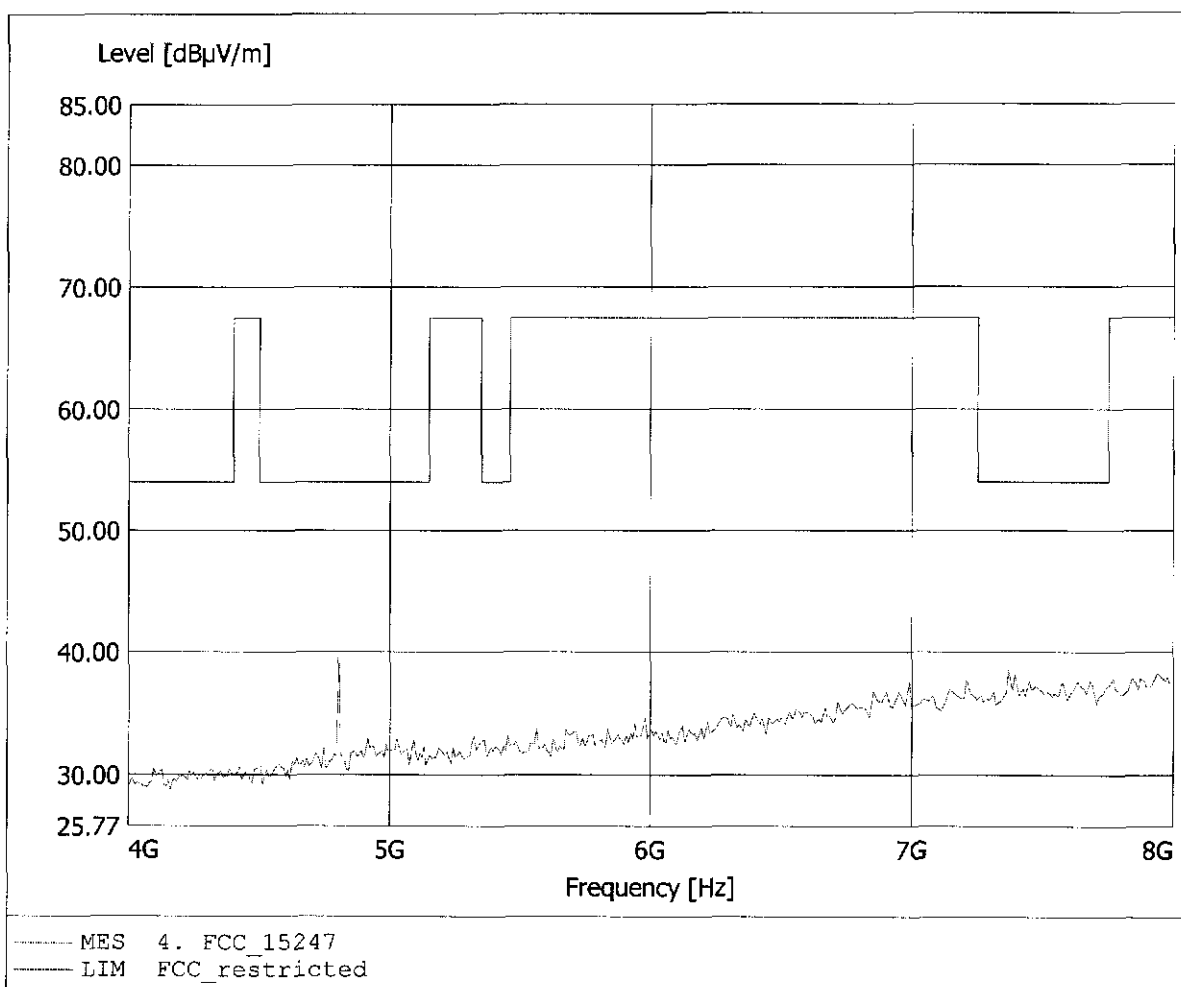


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2402 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.054GHz, Emax: 42.64dBμV/m, RBW: 1MHz

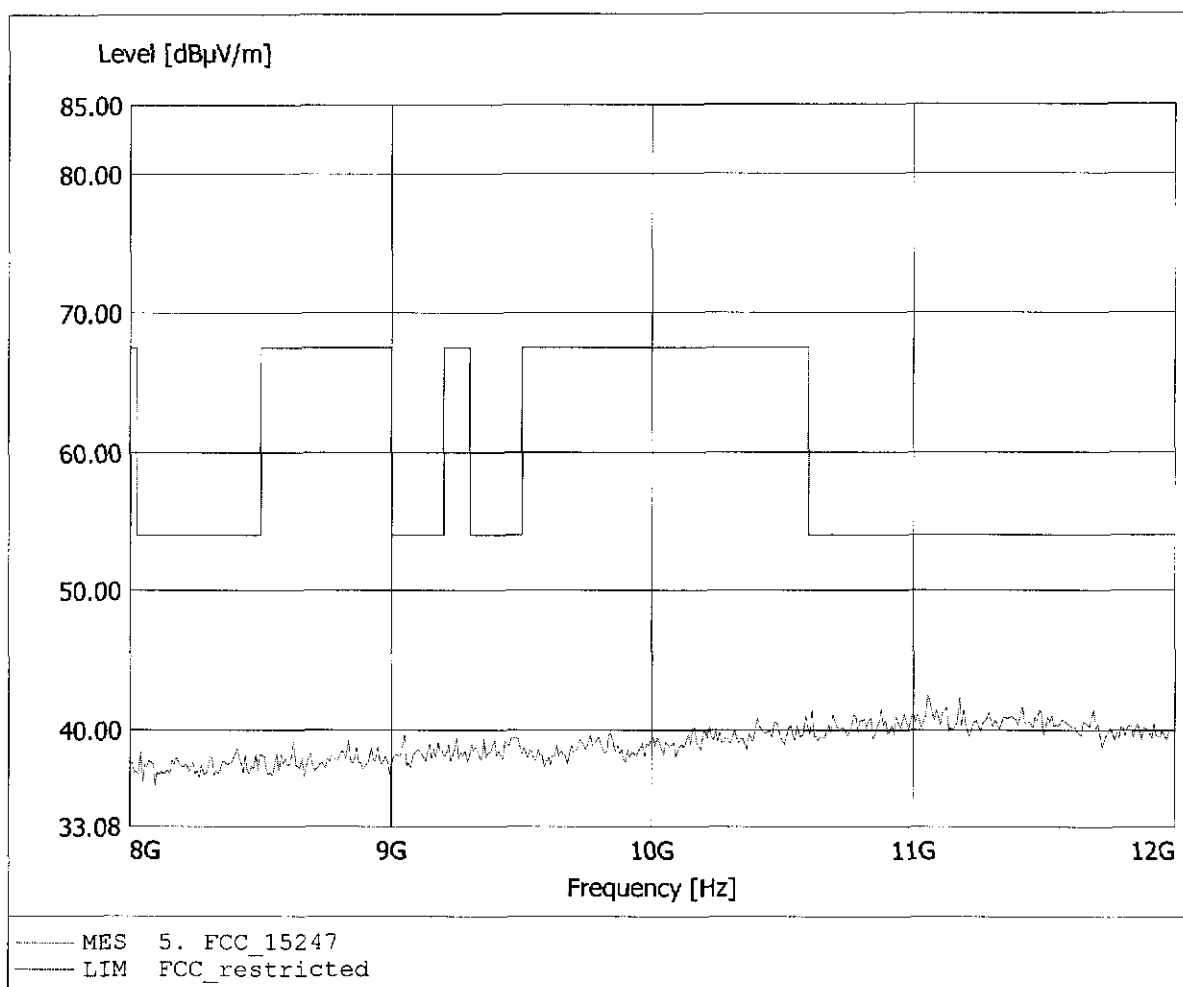


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2402 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 10.886GHz, Emax: 41.98dBμV/m, RBW: 1MHz

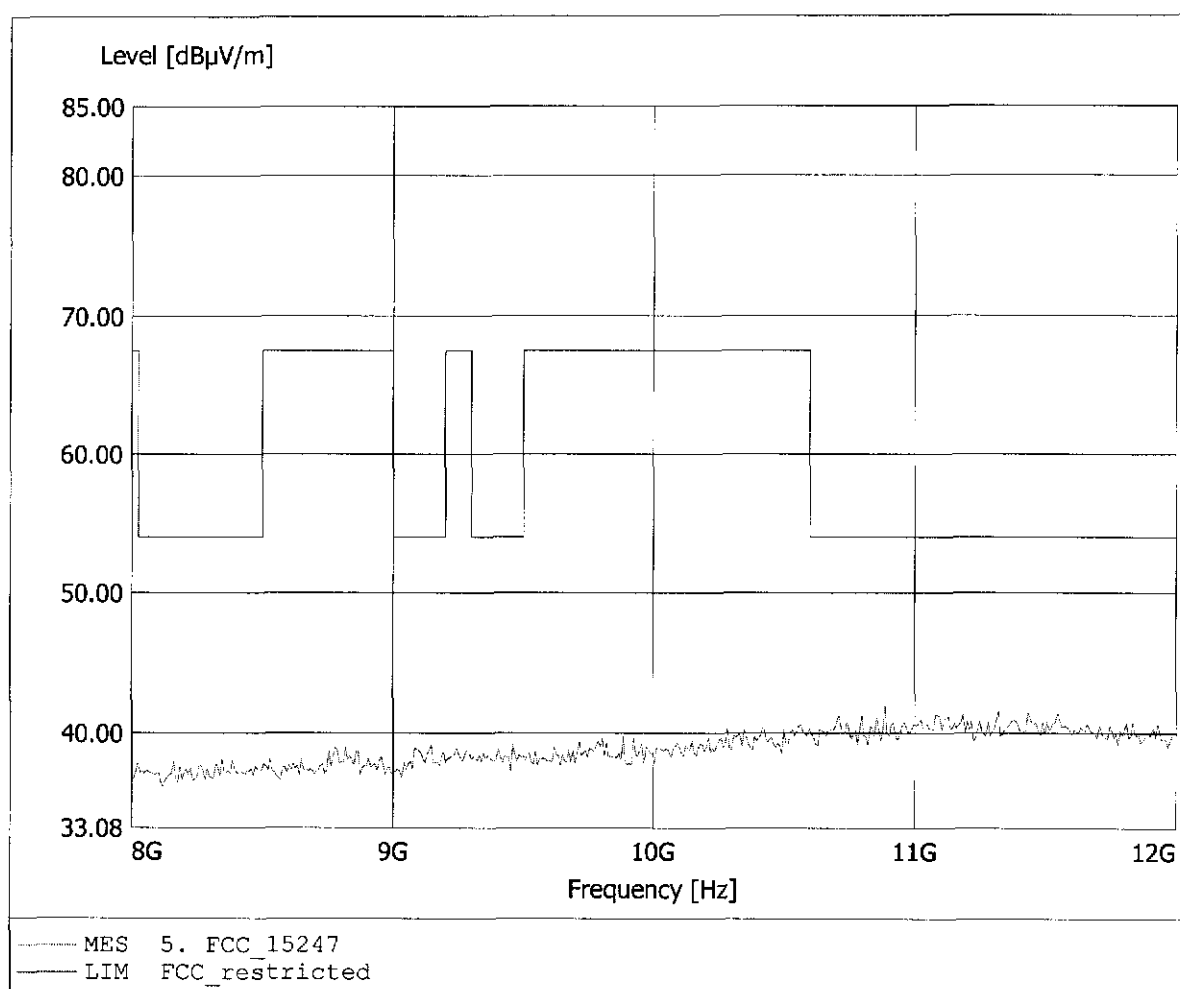


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2402 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cerovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 16.870GHz, Emax: 44.59dBμV/m, RBW: 1MHz

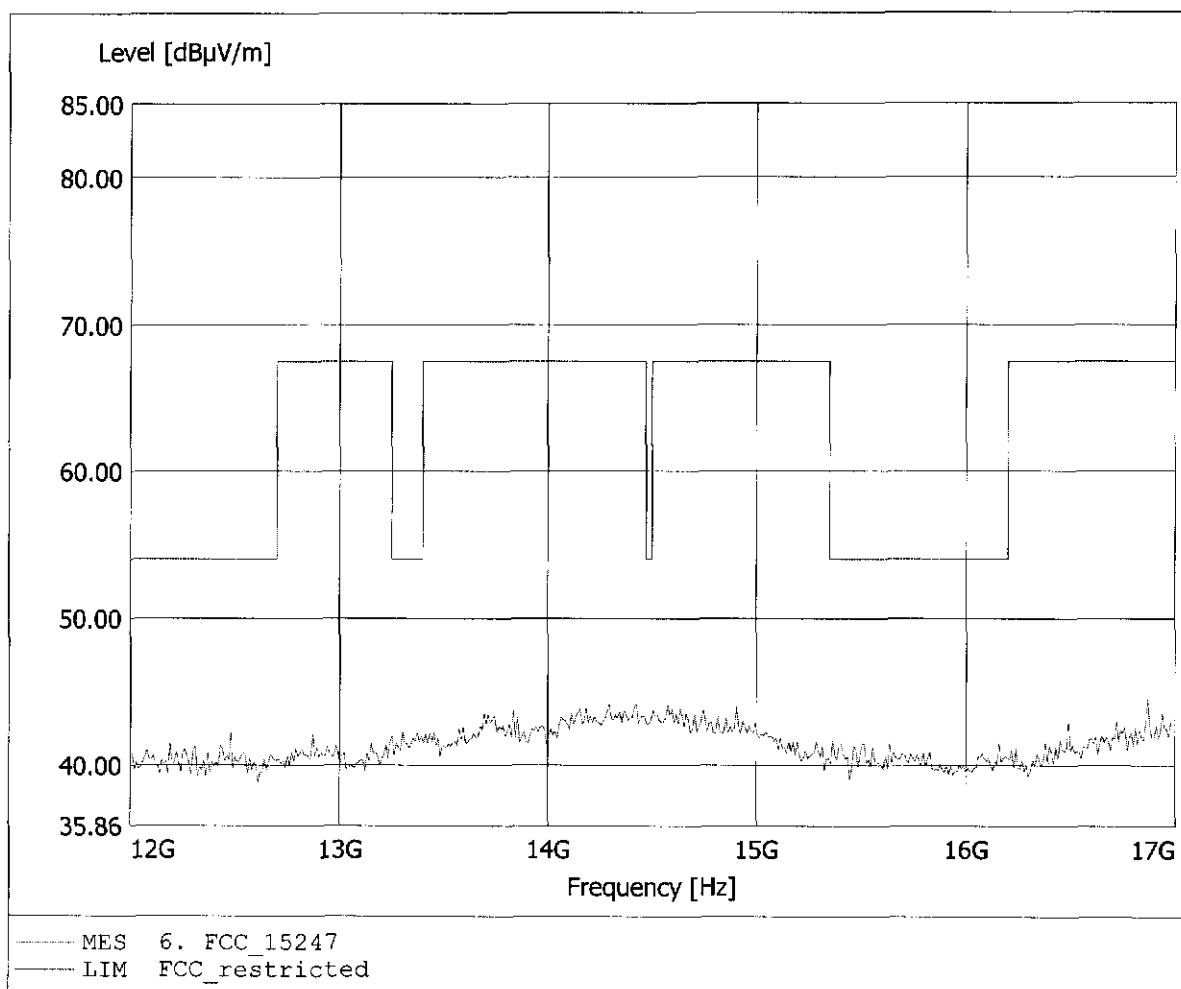


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2402 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.285GHz, Emax: 44.54dBμV/m, RBW: 1MHz

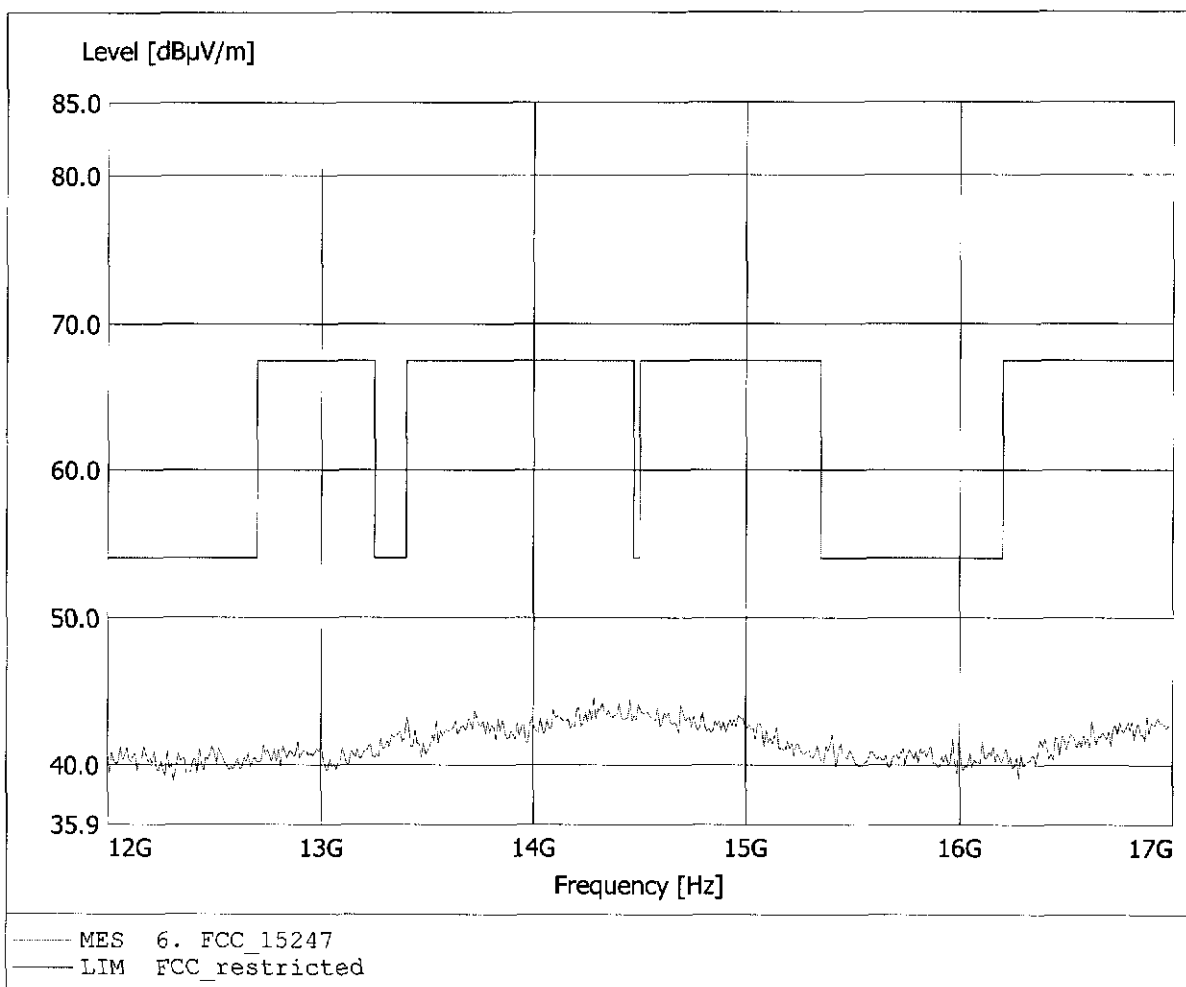


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2402 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.152GHz, Emax: 45.13dBμV/m, RBW: 1MHz

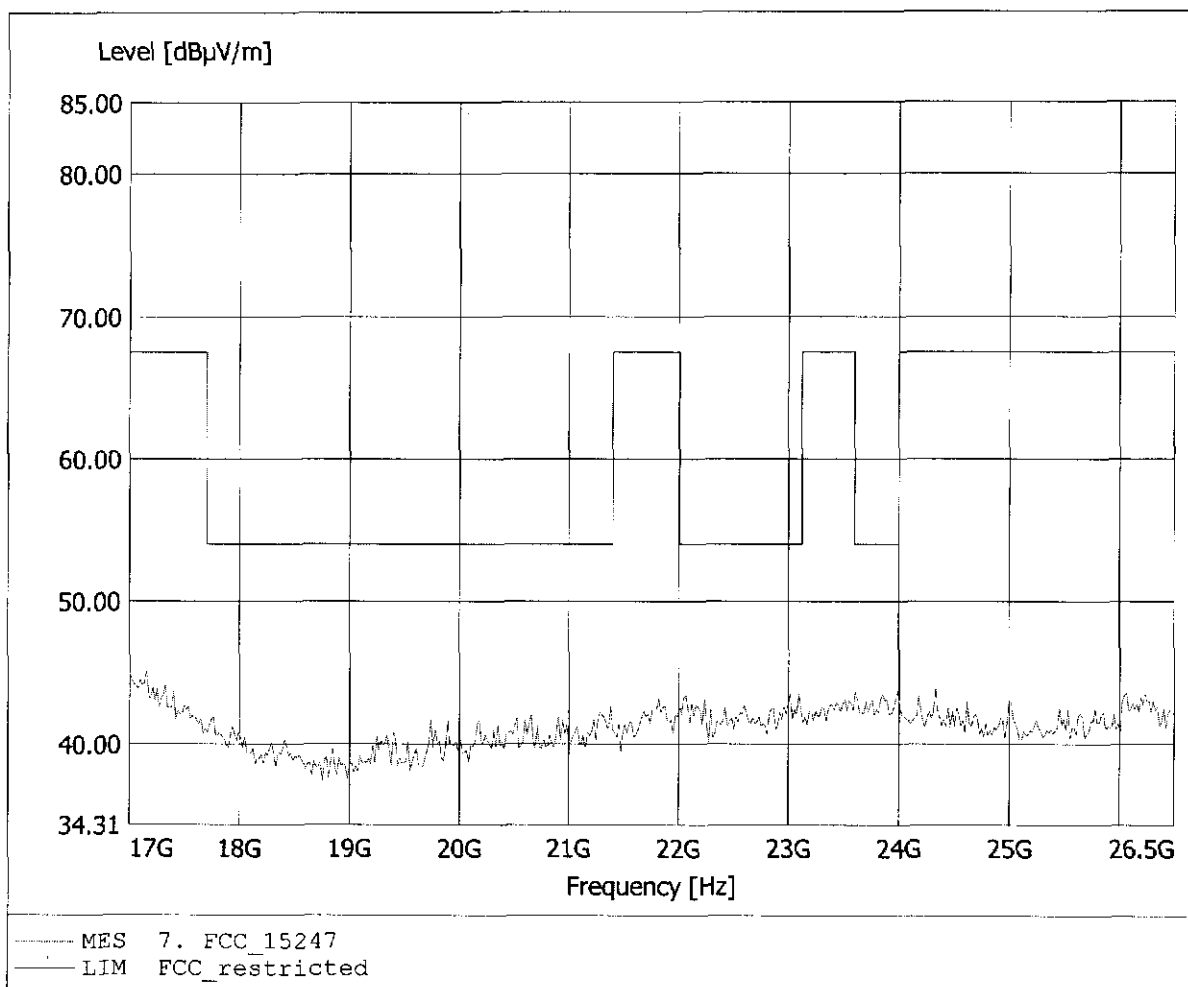


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2402 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 23.854GHz, Emax: 45.63dBμV/m, RBW: 1MHz

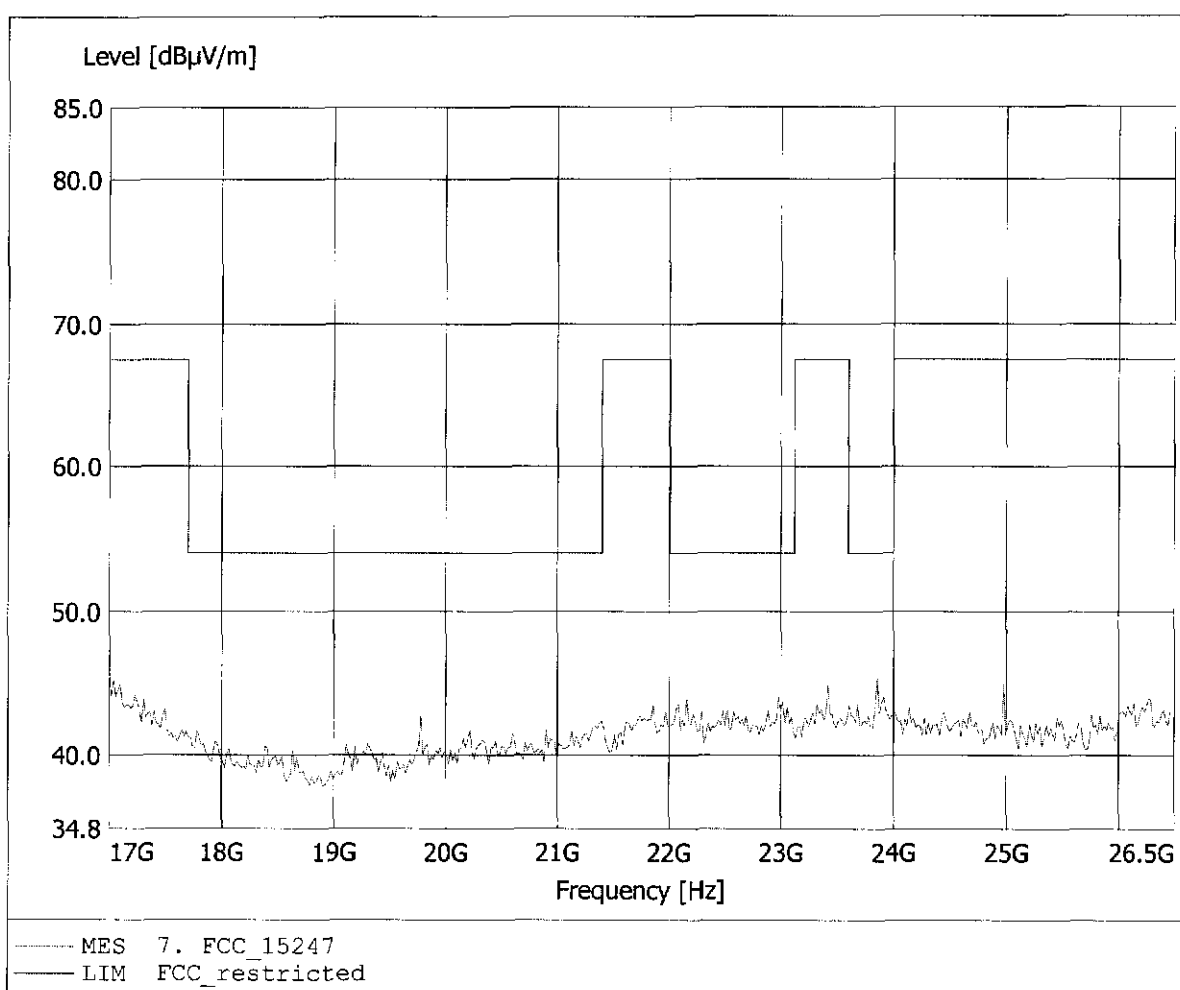


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2441 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / Unom: 2,4 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 195.230MHz, Emax: 31.54dBµV/m, RBW: 100kHz

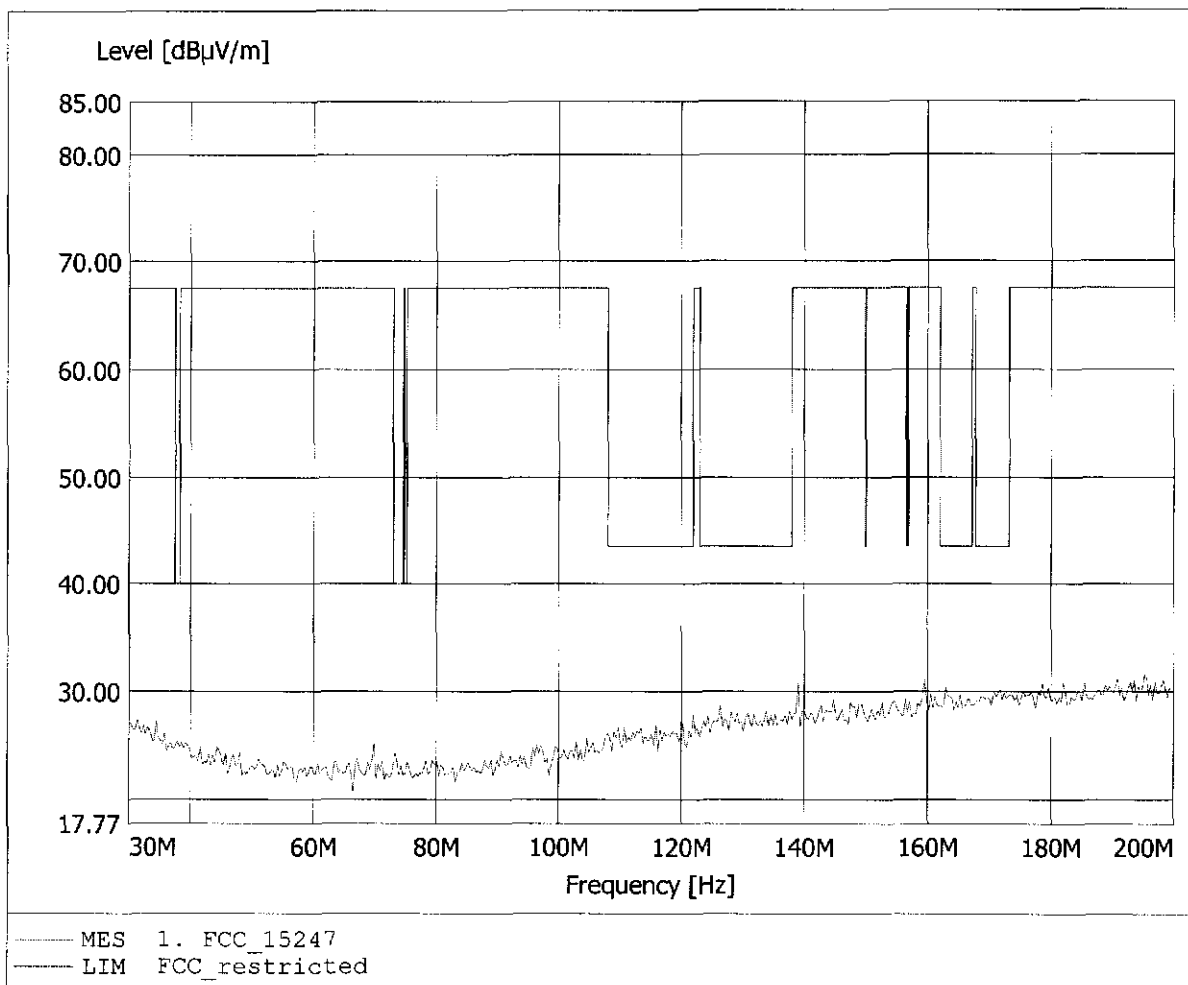


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Jabra Speaker Phone 2441 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / Unom: 2,4 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 195.912MHz, Emax: 32.11dBµV/m, RBW: 100kHz

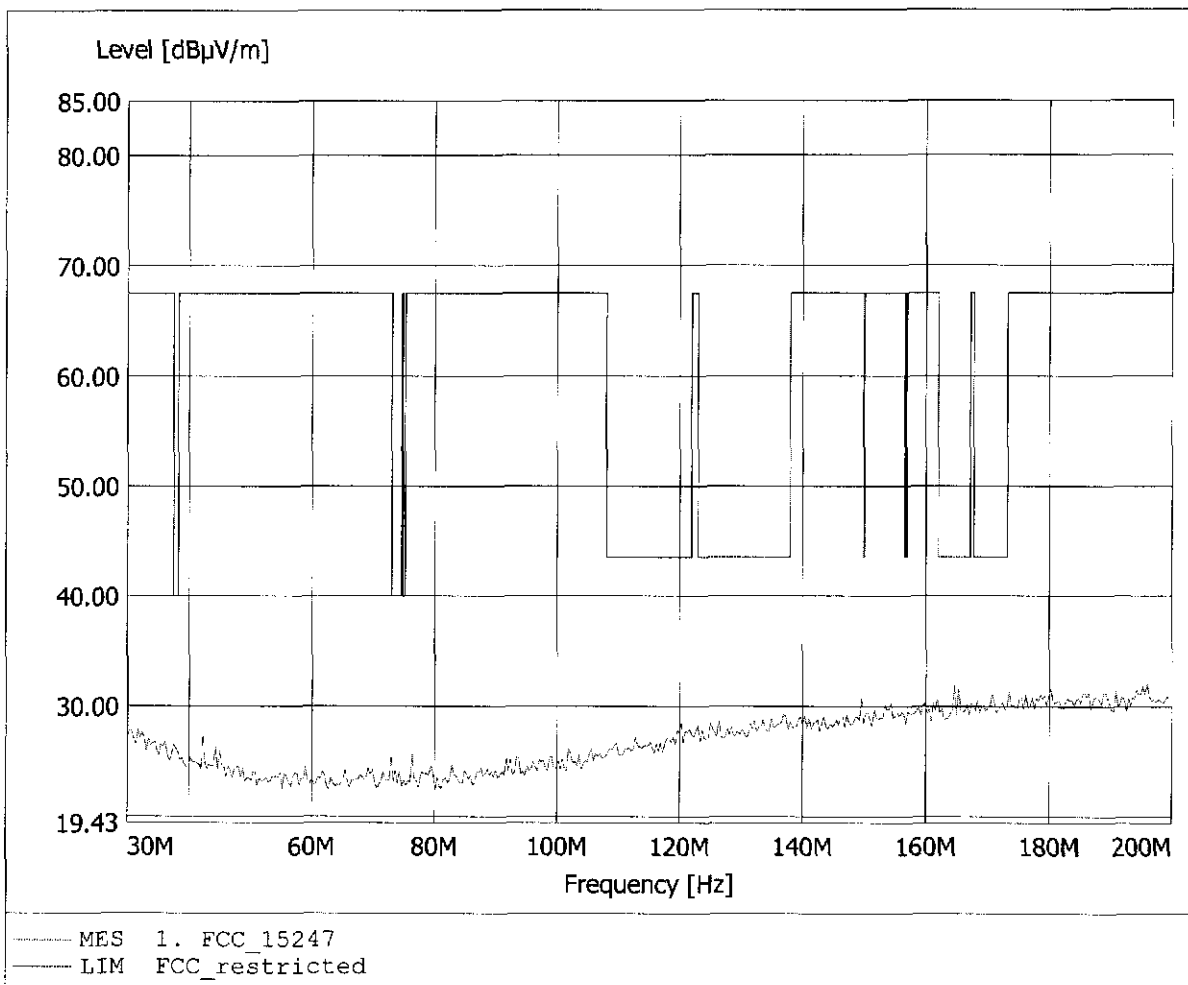


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2441 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / Unom: 2,4 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 985.571MHz, Emax: 22.36dBµV/m, RBW: 100kHz

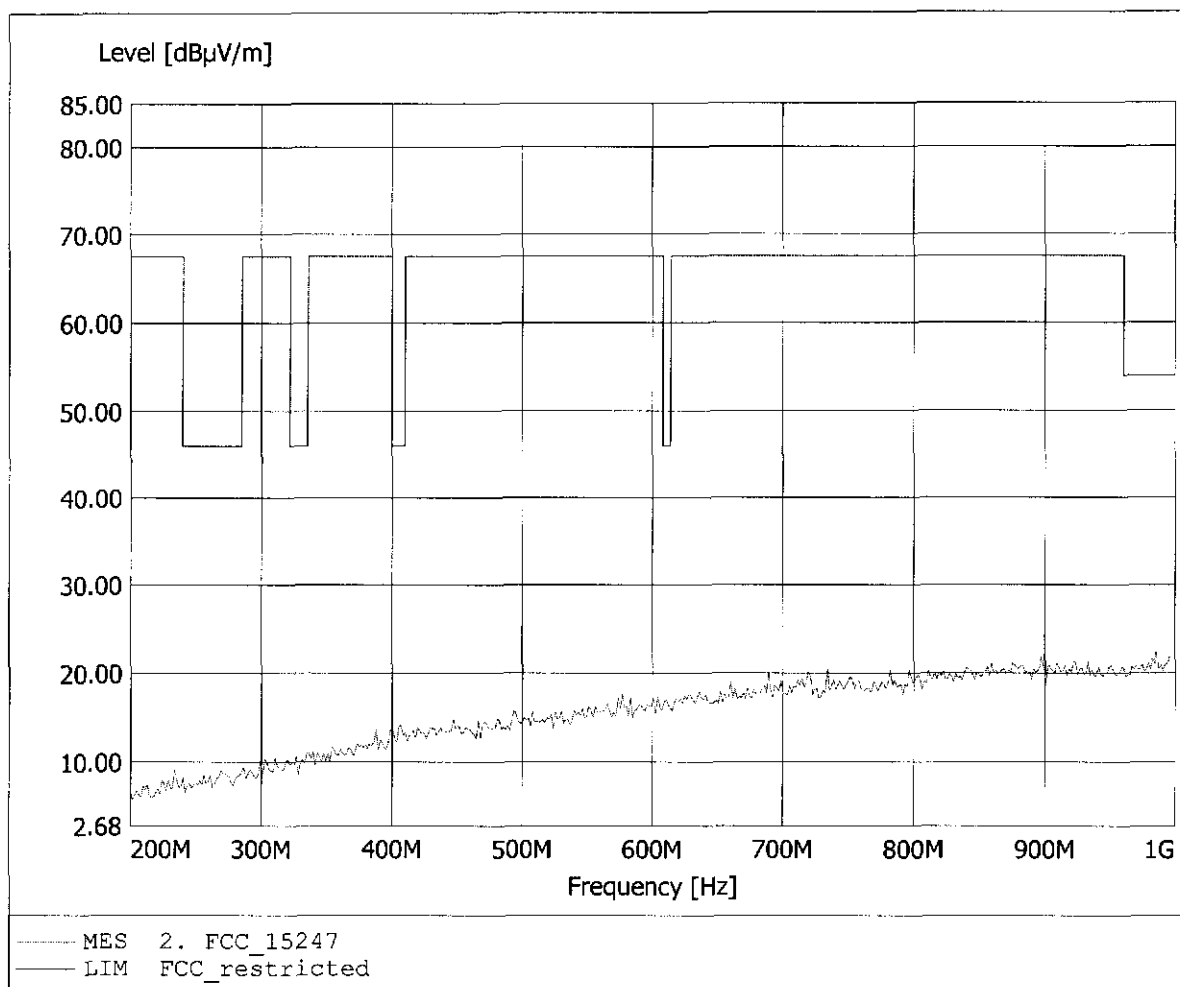


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2441 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / Unom: 2,4 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 983.968MHz, Emax: 22.42dBuV/m, RBW: 100kHz

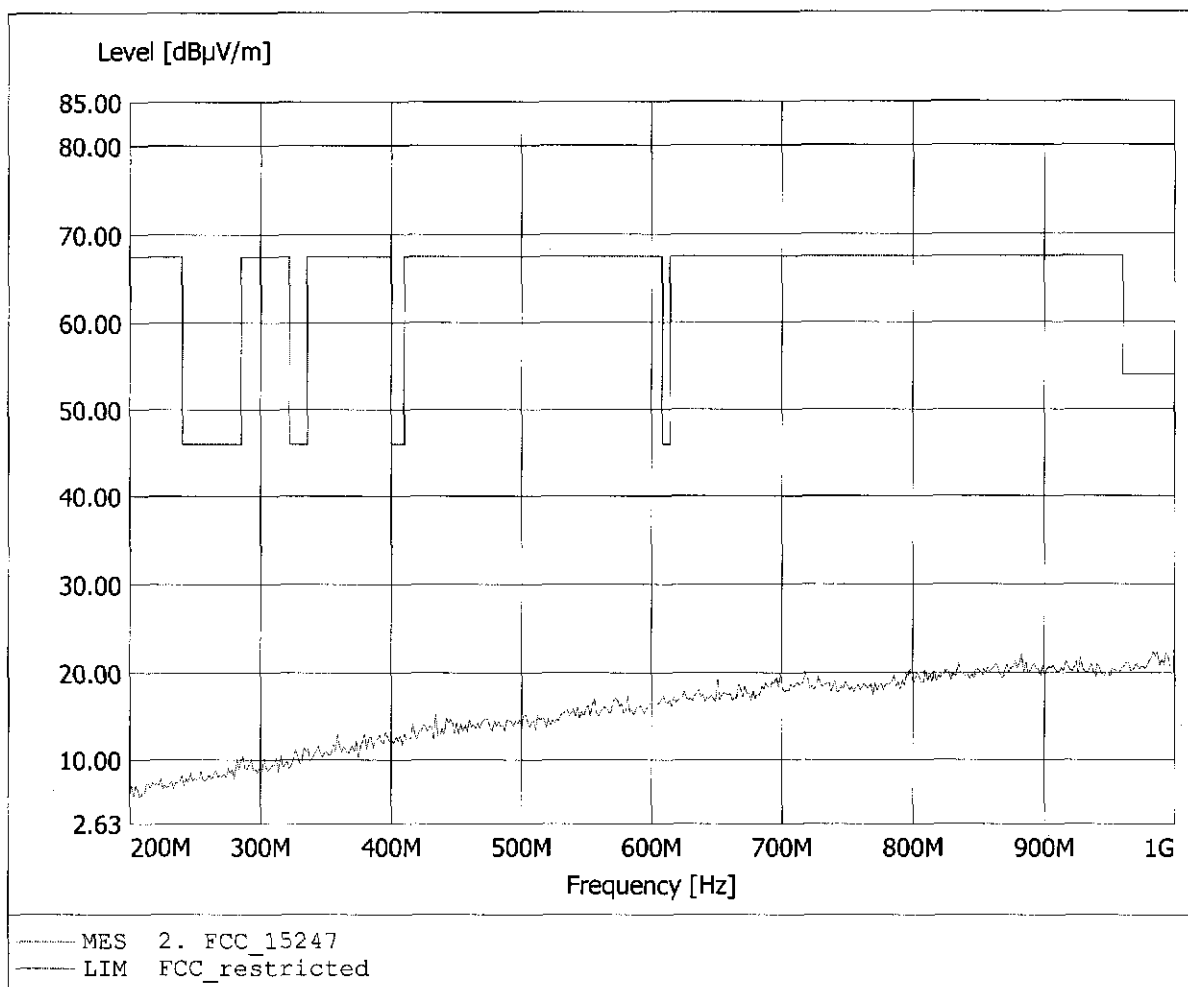


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2441 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.869GHz, Emax: 43.50dBμV/m, RBW: 1MHz

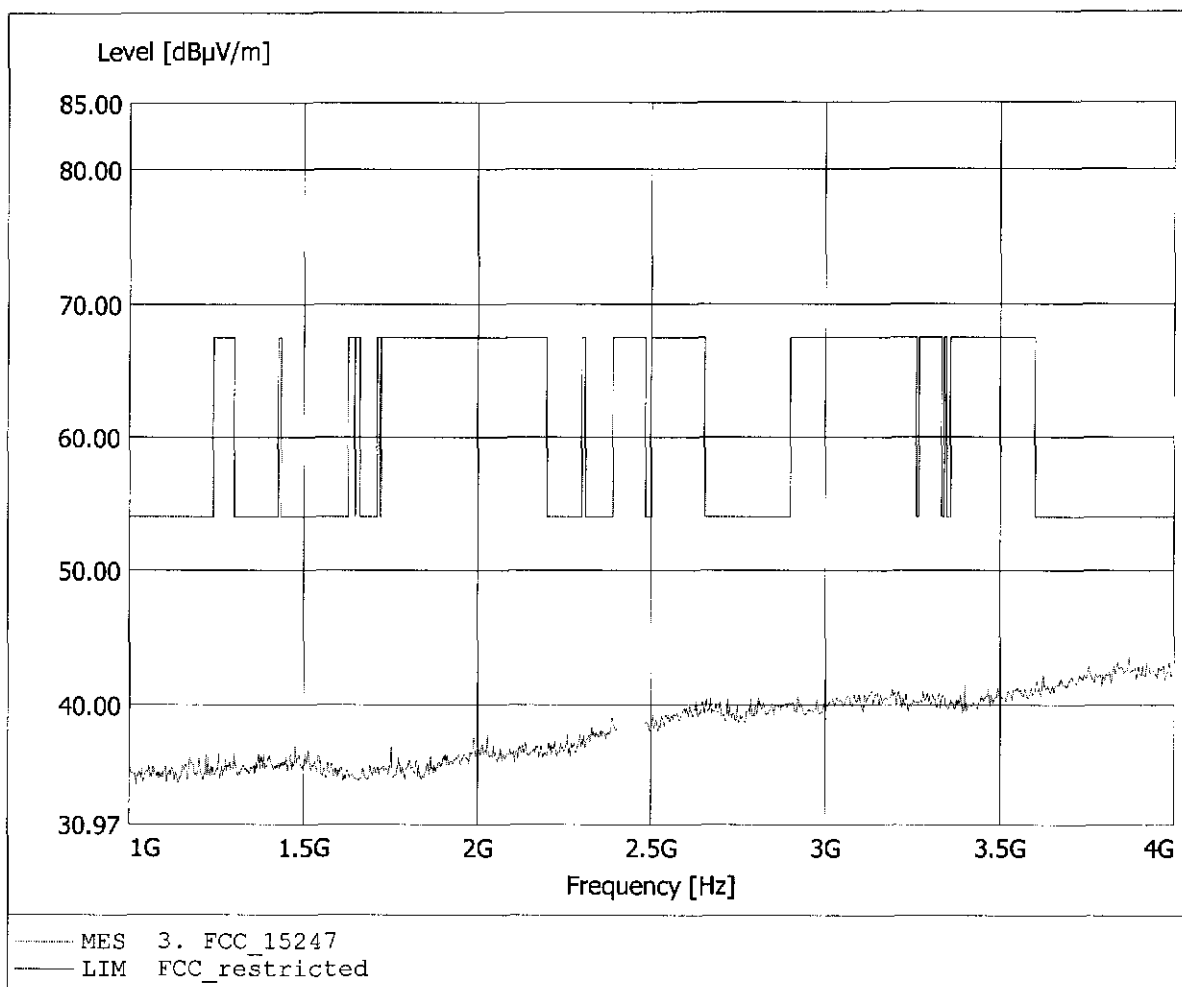


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Jabra Speaker Phone 2441 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.970GHz, Emax: 43.45dBμV/m, RBW: 1MHz

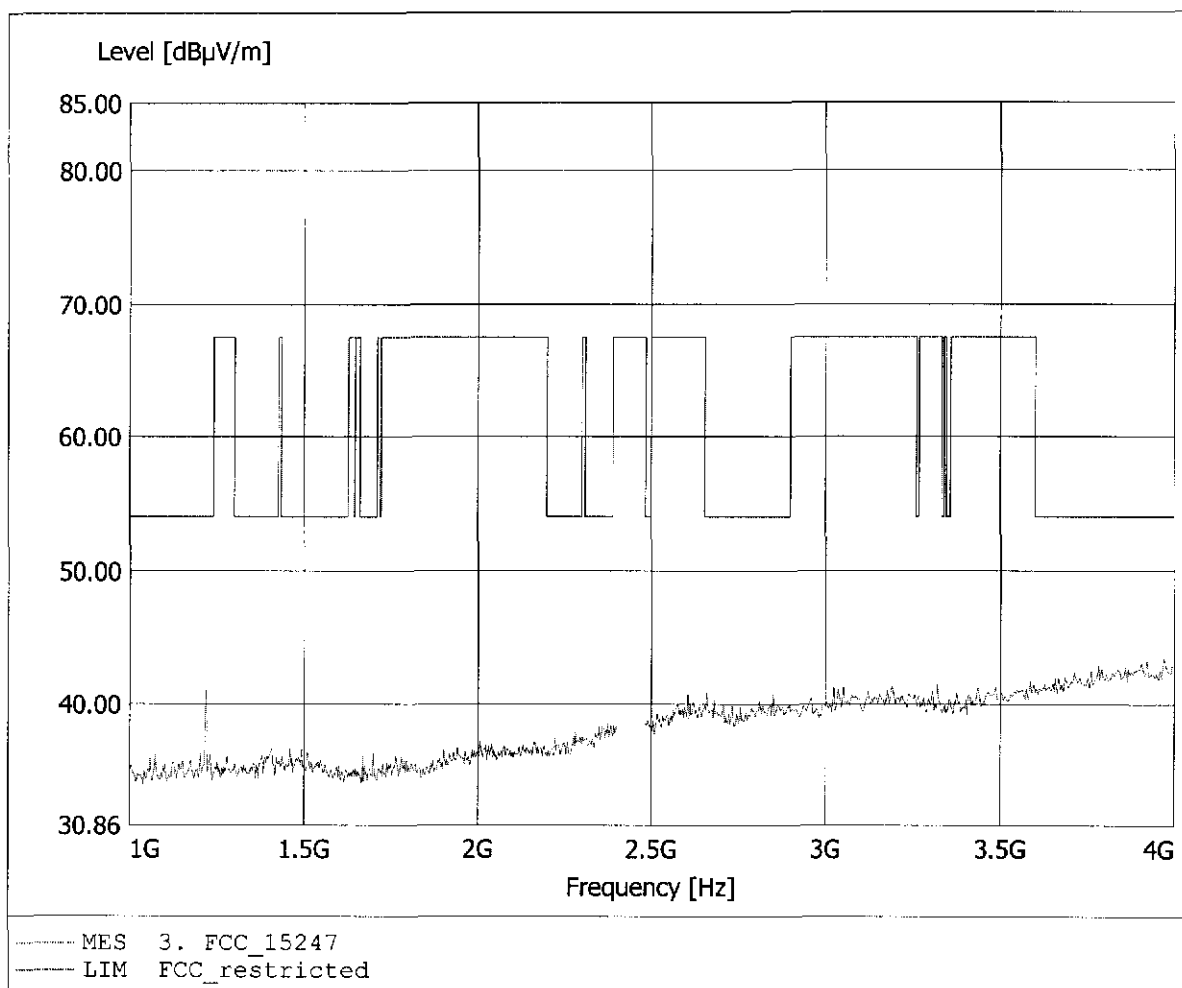


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2441 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cerovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.912GHz, Emax: 37.96dBµV/m, RBW: 1MHz

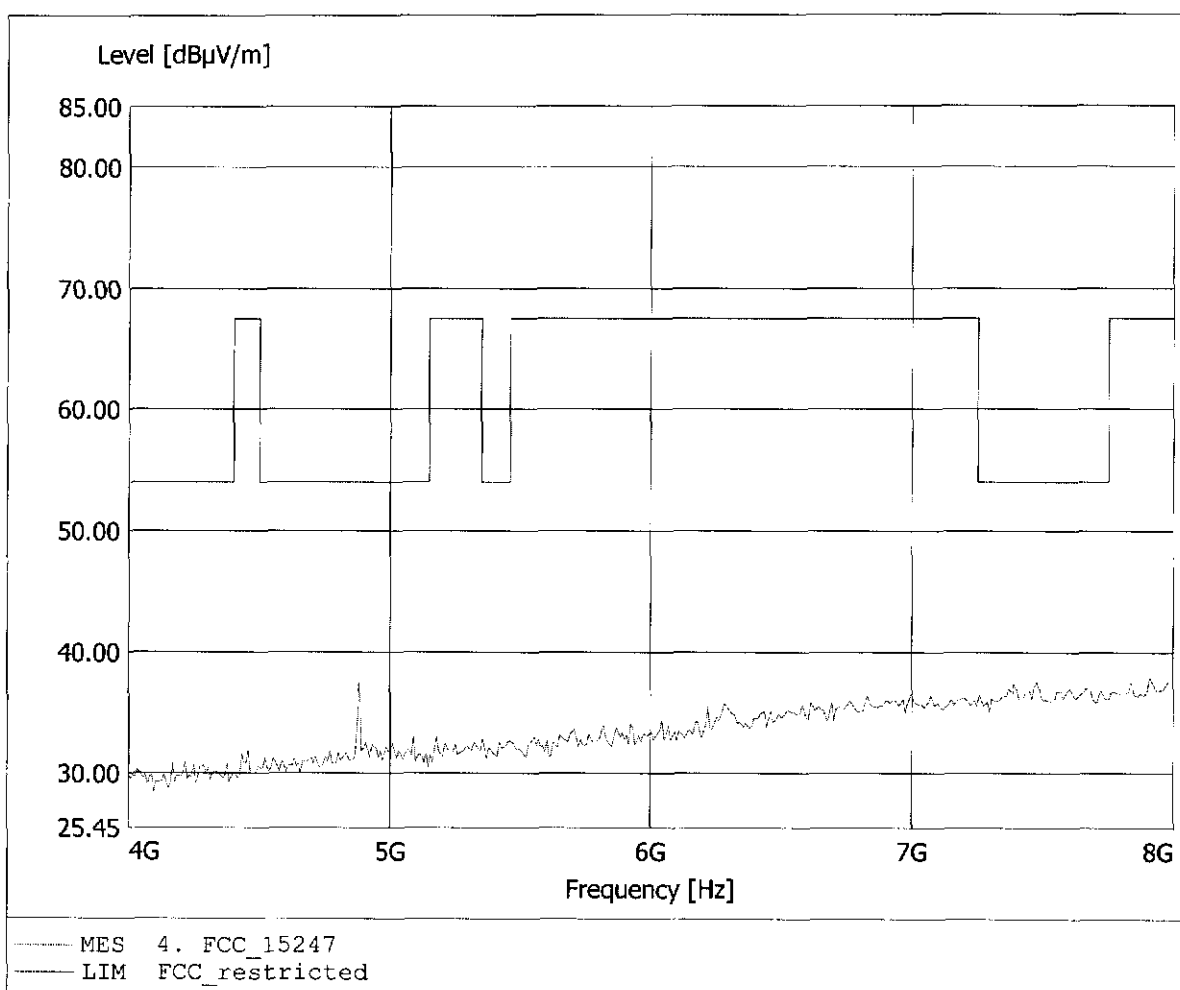


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Jabra Speaker Phone 2441 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.255GHz, Emax: 39.92dBμV/m, RBW: 1MHz

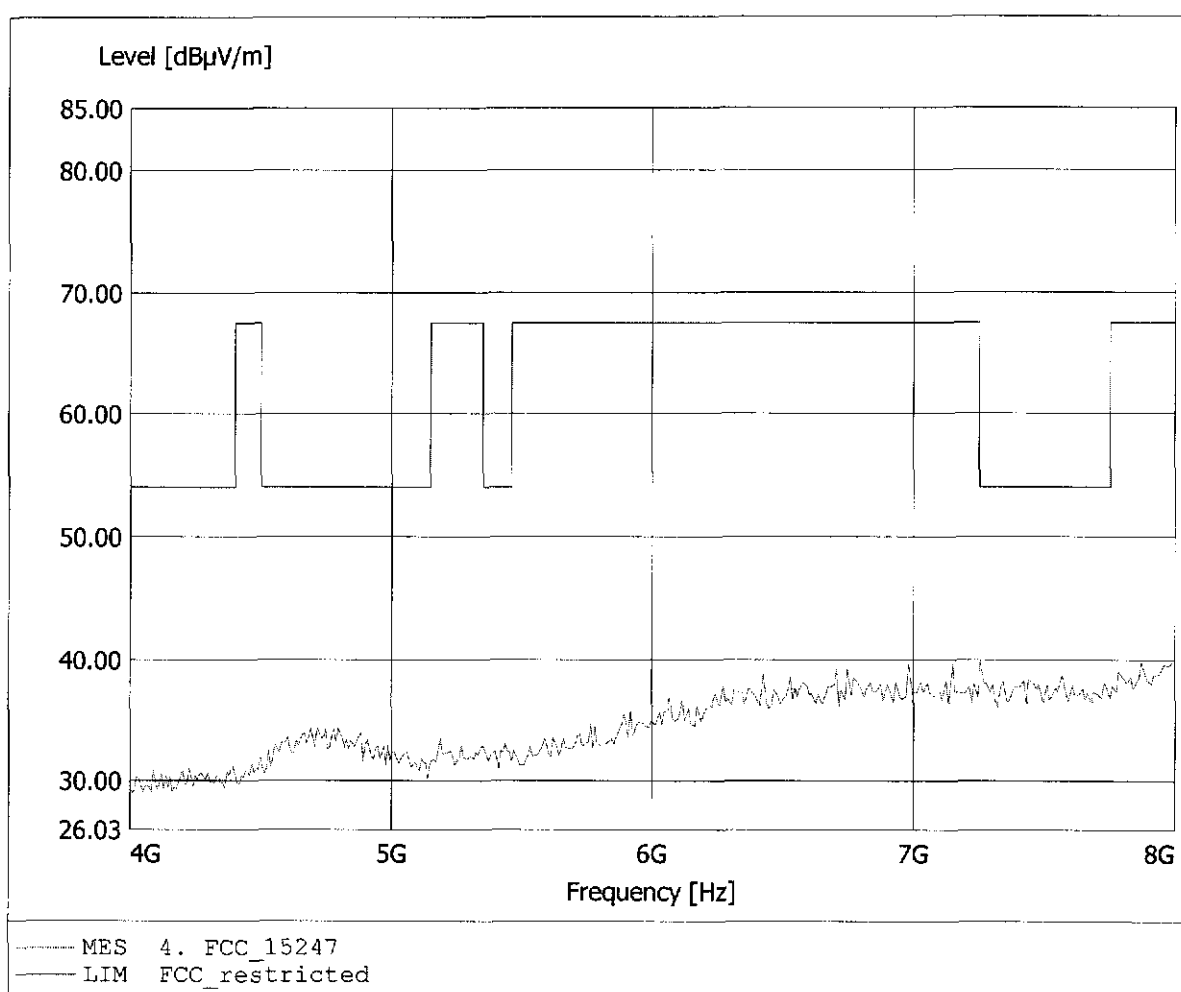


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2441 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.639GHz, Emax: 41.27dBuV/m, RBW: 1MHz

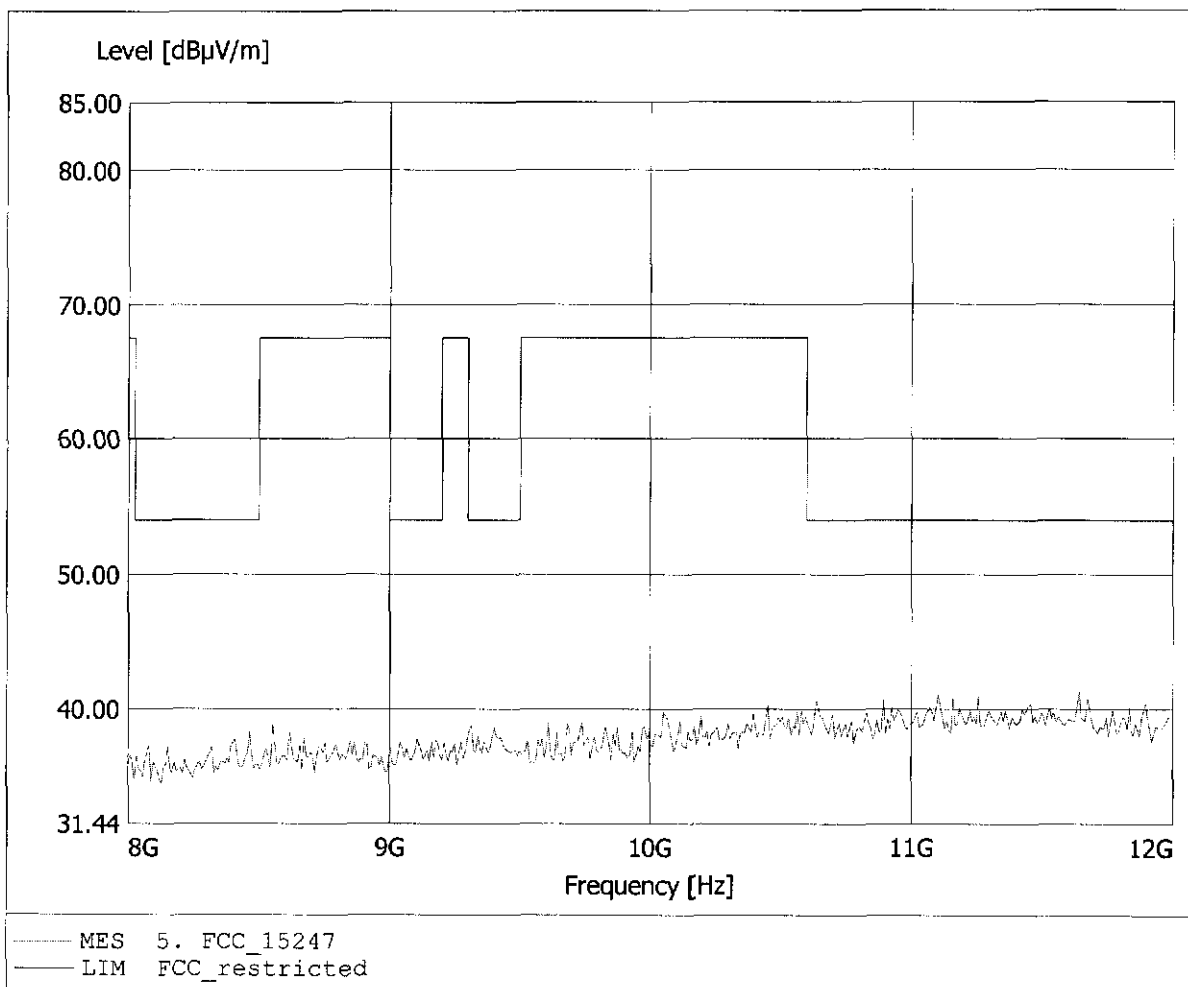


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2441 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.431GHz, Emax: 41.64dBuV/m, RBW: 1MHz

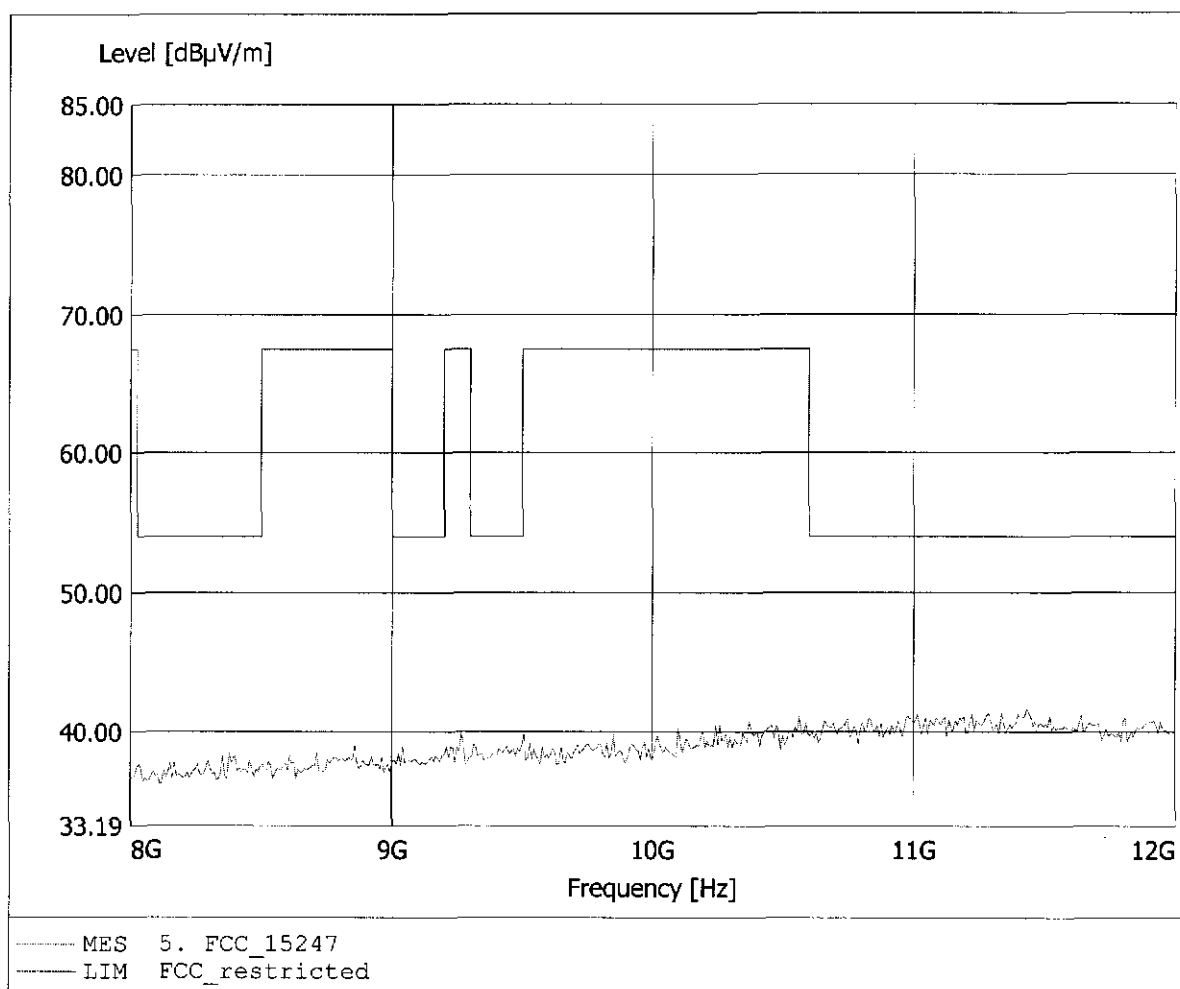


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2441 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 13.713GHz, Emax: 44.50dBµV/m, RBW: 1MHz

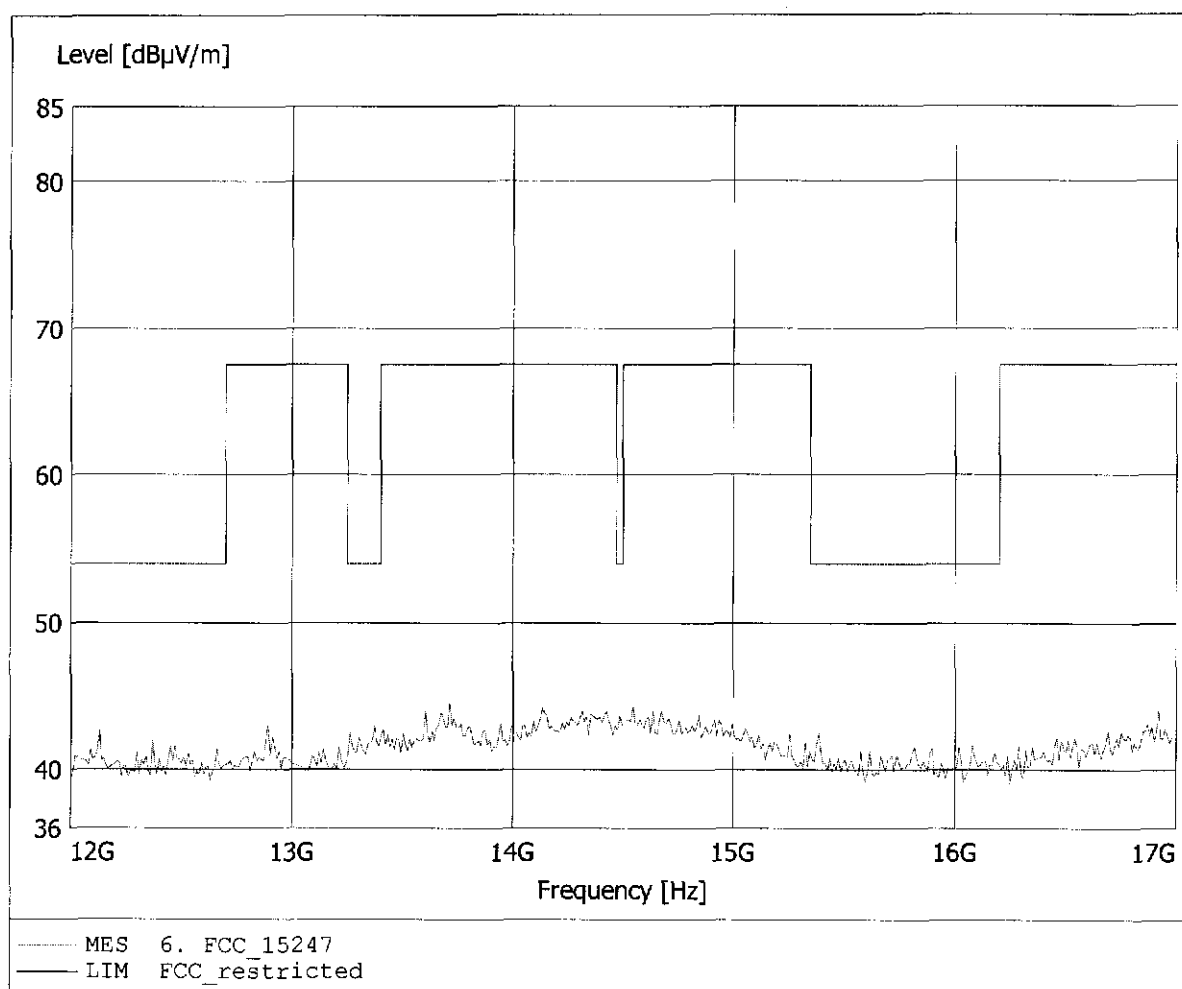


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Jabra Speaker Phone 2441 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.375GHz, Emax: 45.49dBμV/m, RBW: 1MHz

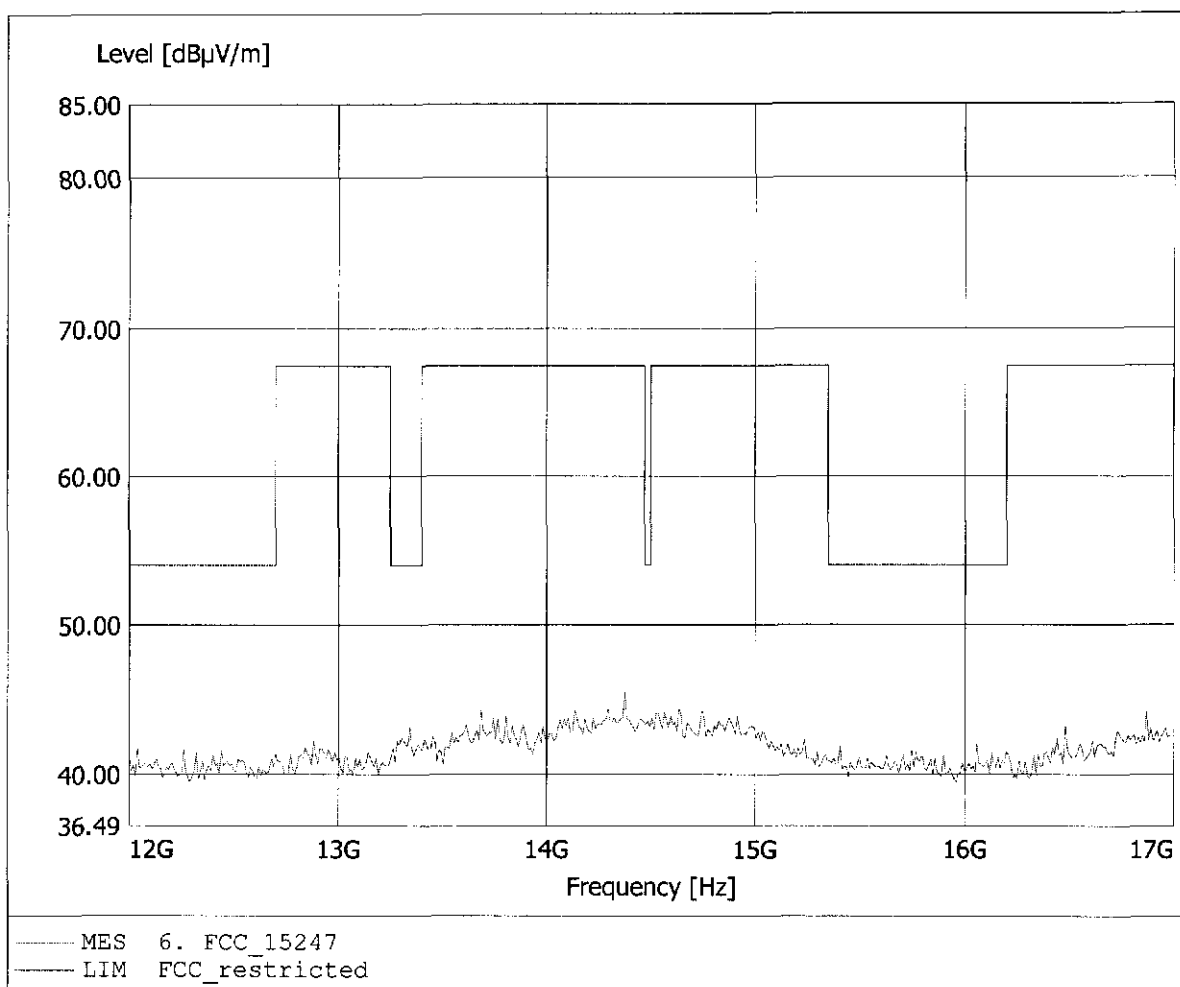


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2441 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.095GHz, Emax: 45.43dBμV/m, RBW: 1MHz

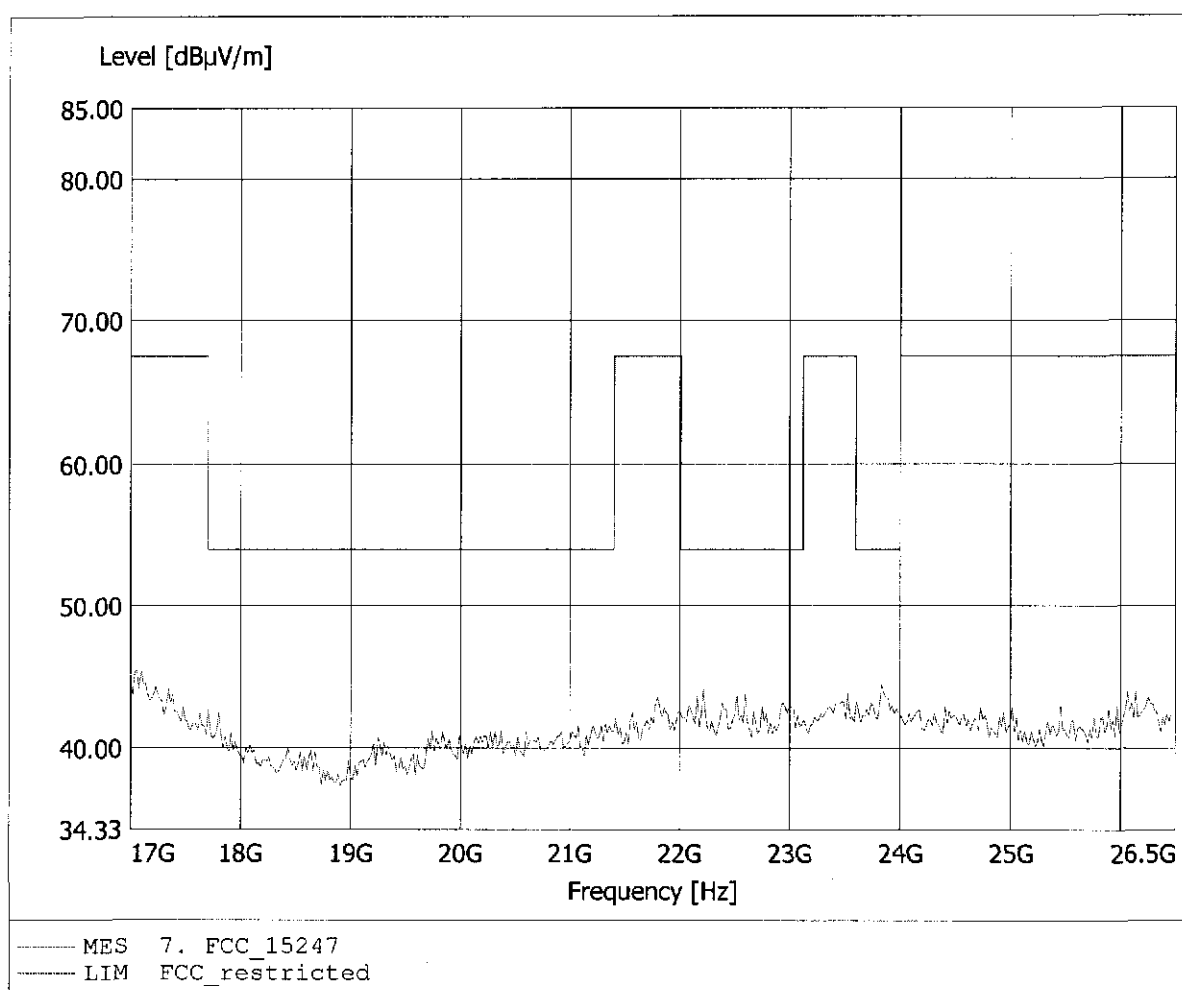


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2441 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 23.968GHz, Emax: 45.70dBμV/m, RBW: 1MHz

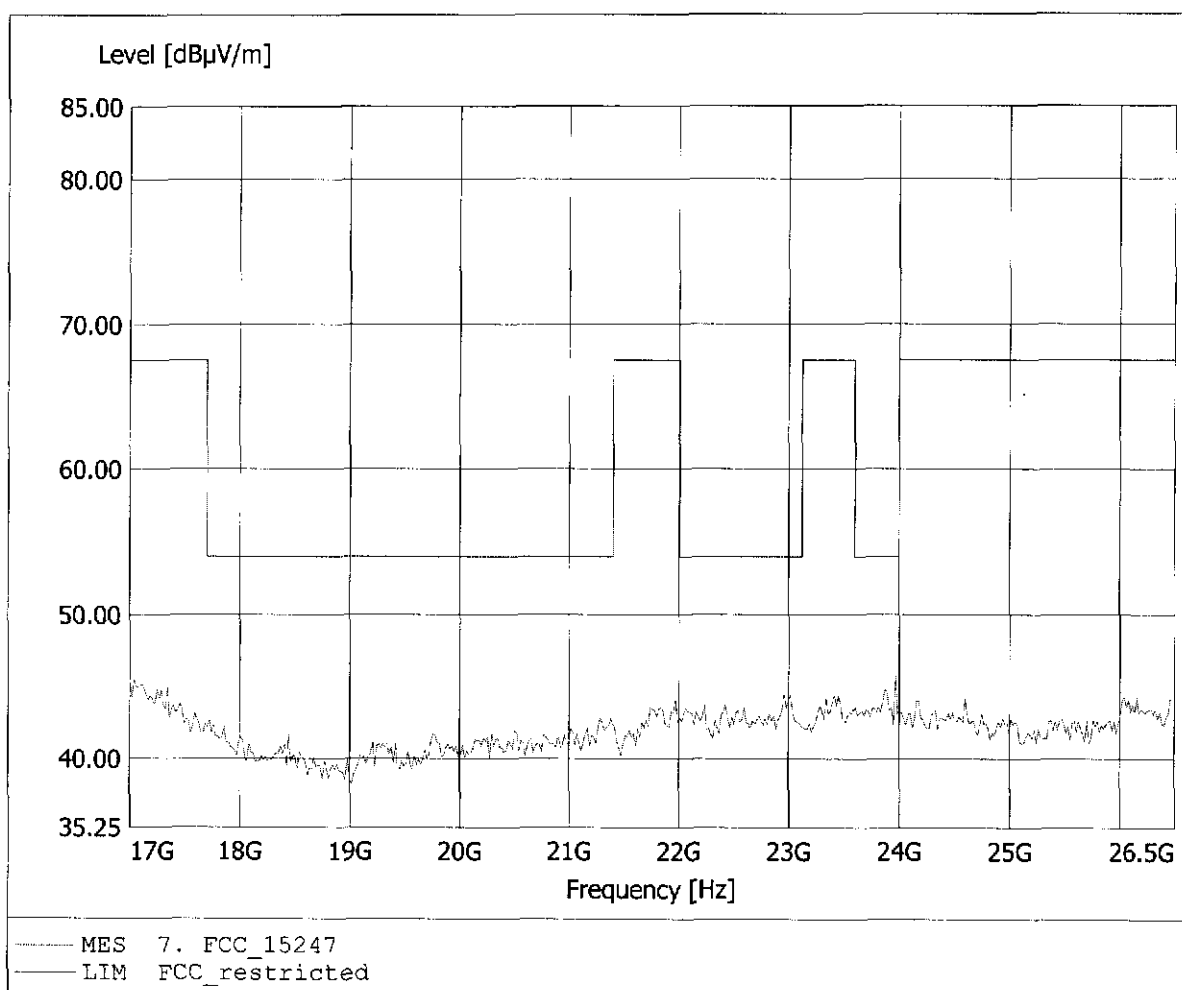


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2480 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / Unom: 2,4 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 194.549MHz, Emax: 32.42dBµV/m, RBW: 100kHz

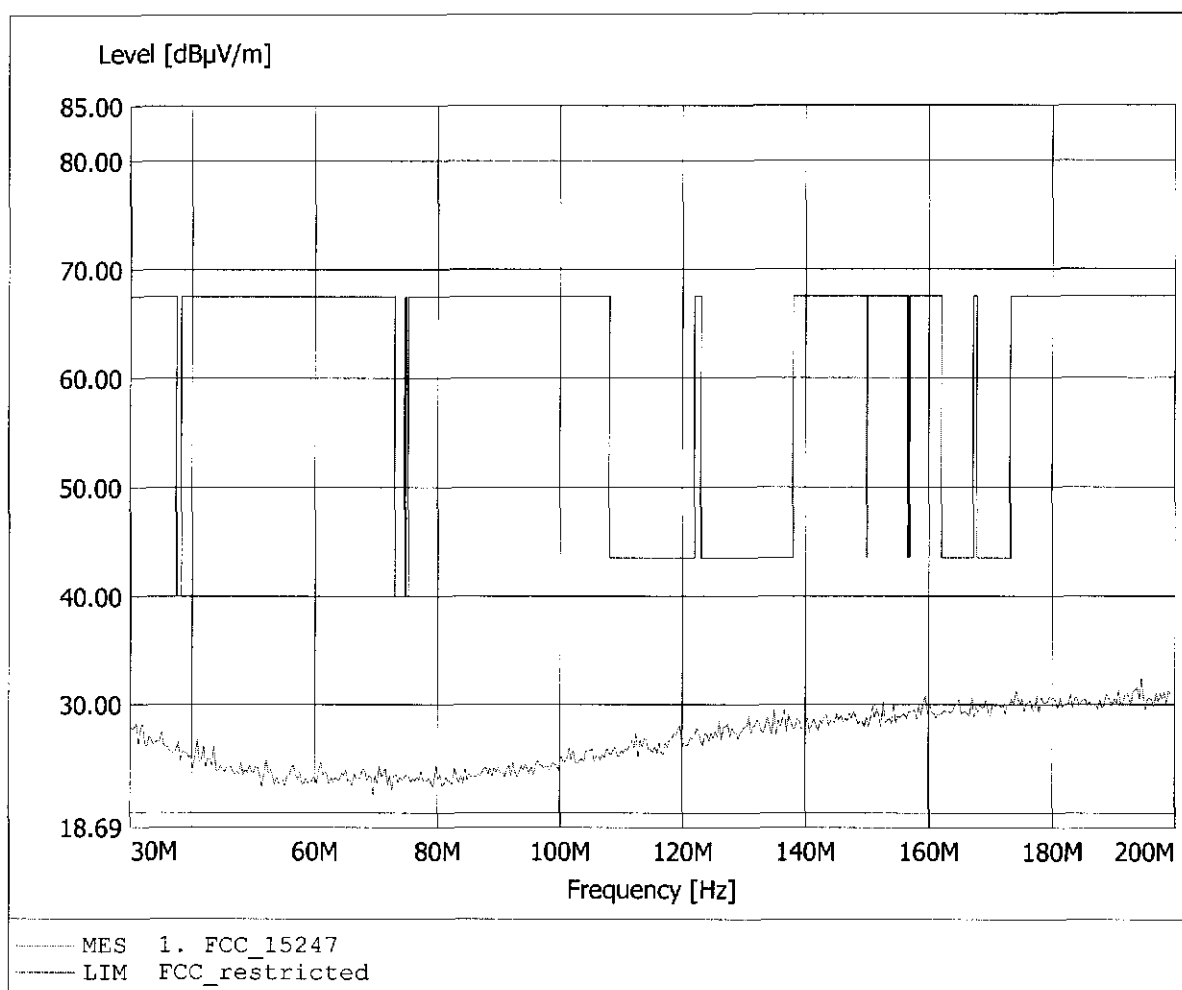


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Jabra Speaker Phone 2480 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / Unom: 2,4 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Cerovsky
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.637MHz, Emax: 32.37dBµV/m, RBW: 100kHz

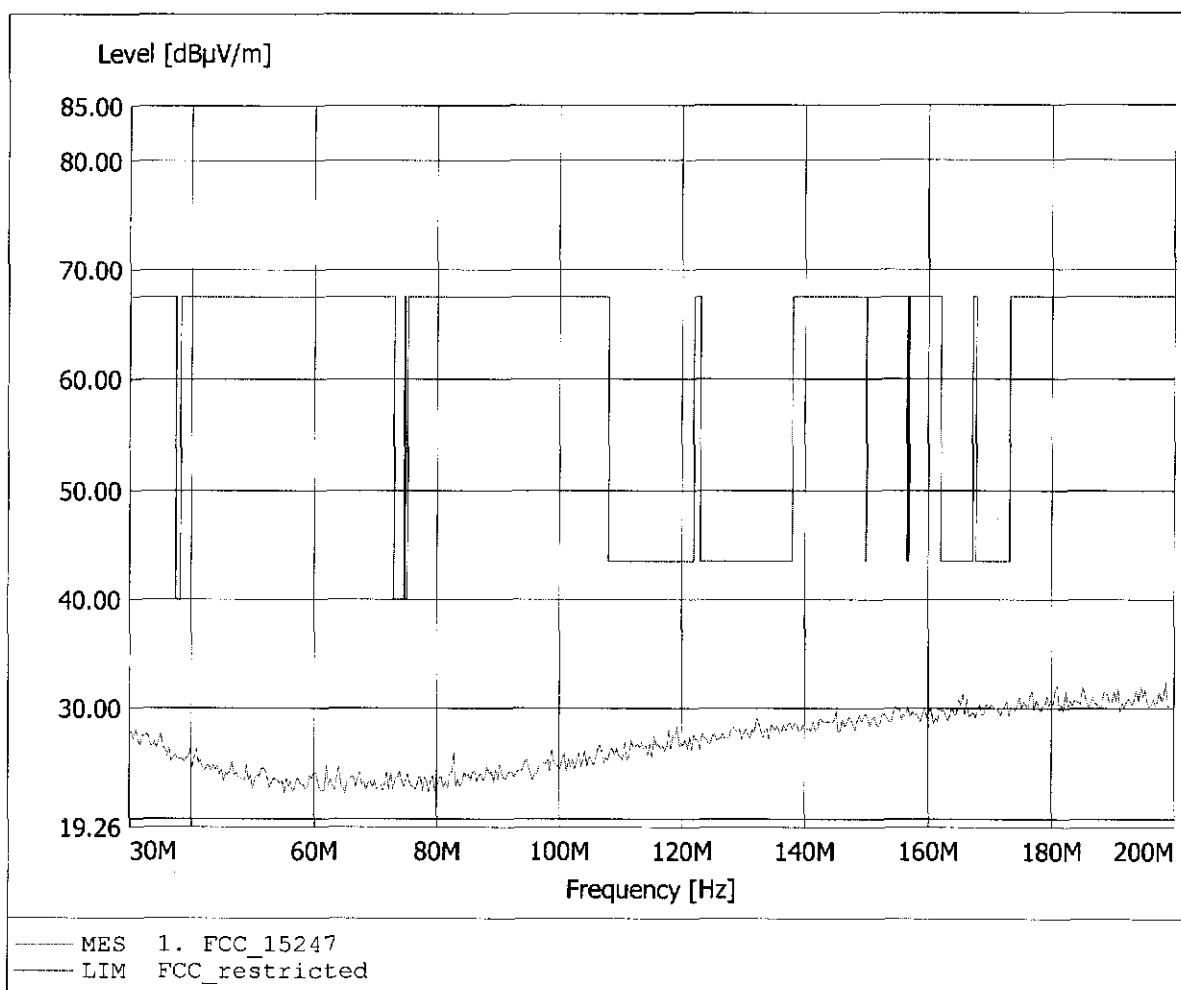


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2480 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / Unom: 2,4 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 980.762MHz, Emax: 22.55dBµV/m, RBW: 100kHz

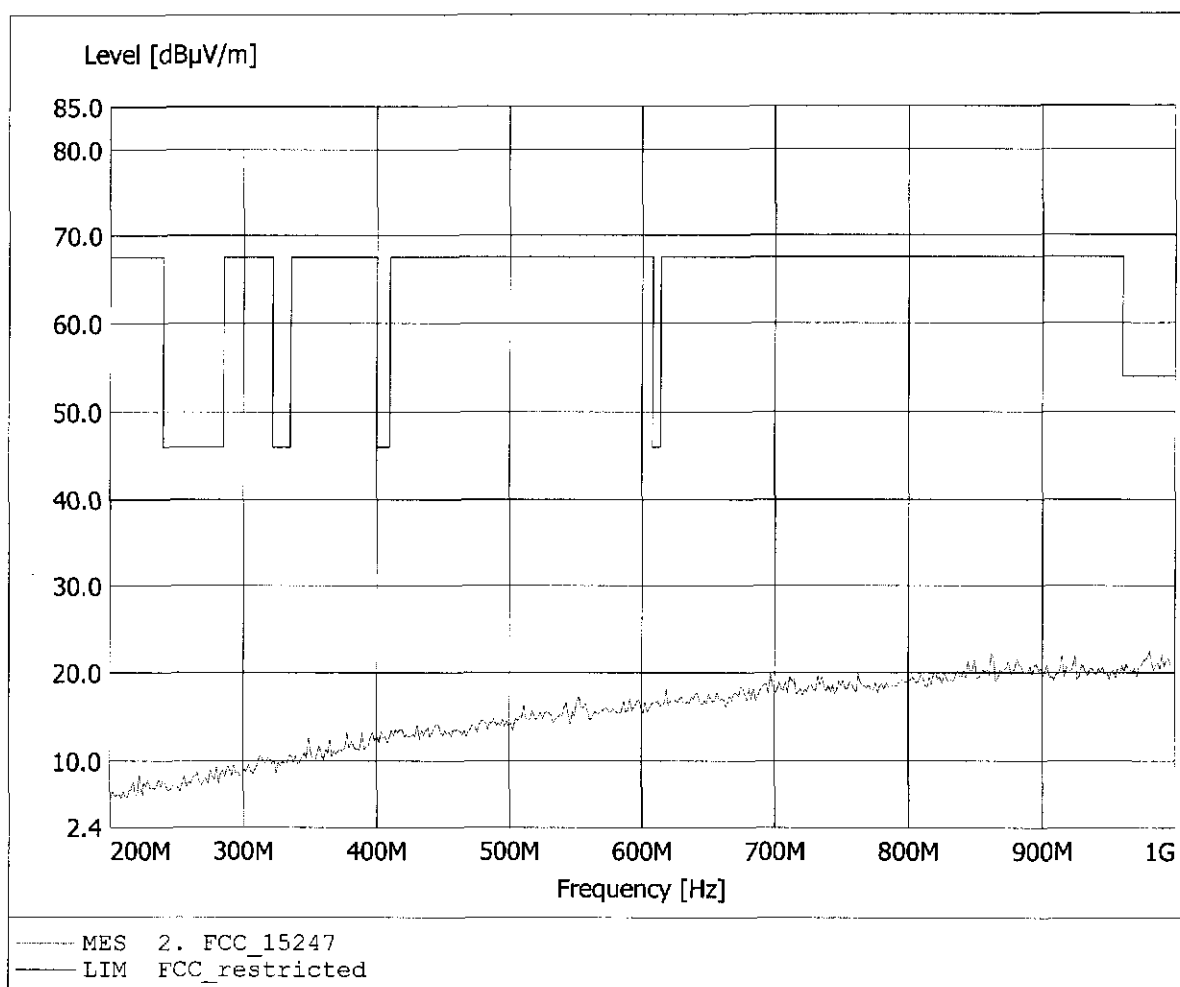


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Jabra Speaker Phone 2480 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / Unom: 2,4 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Cerovsky
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 882.966MHz, Emax: 22.33dBµV/m, RBW: 100kHz

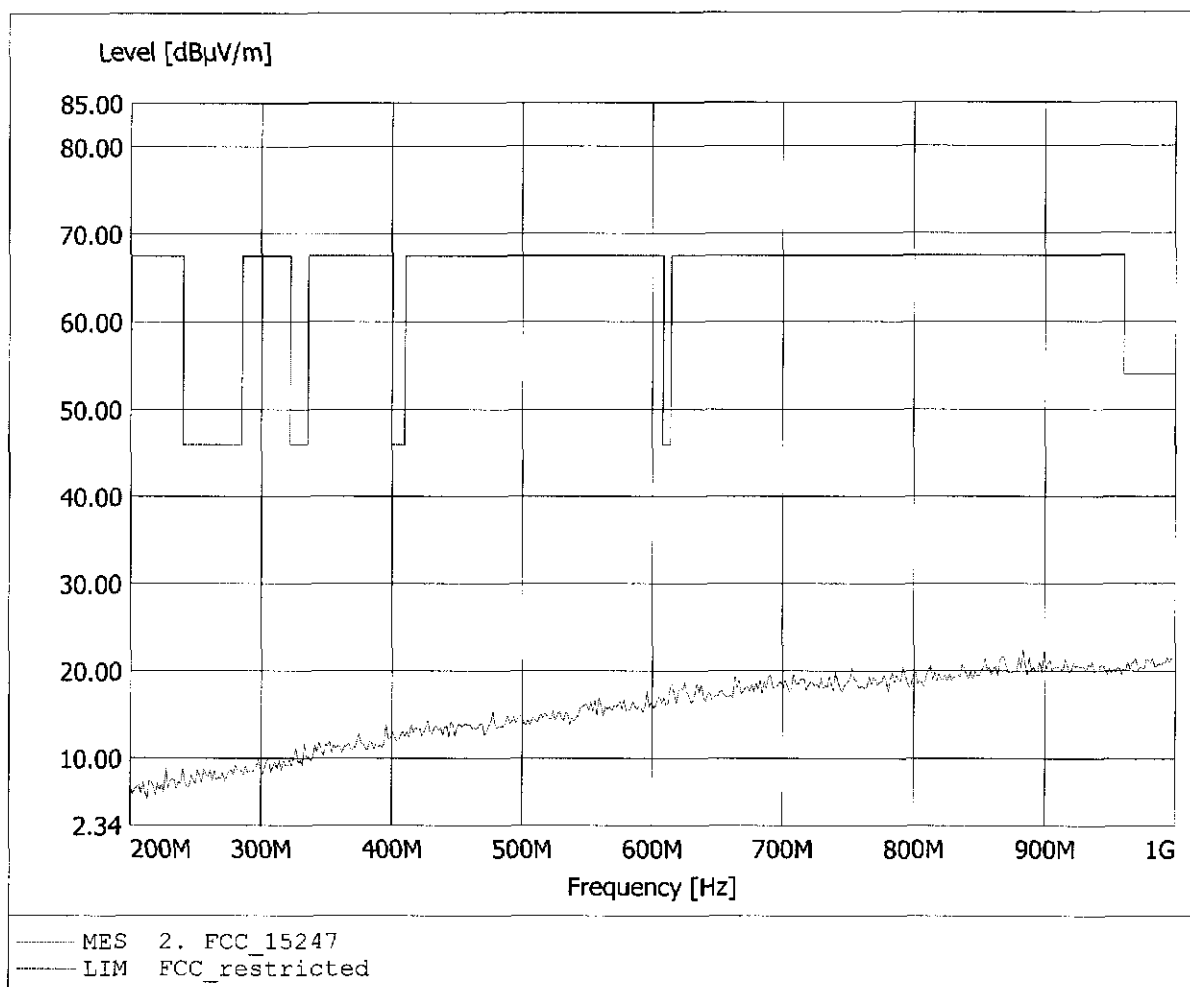


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2480 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cerovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 45.34dBµV/m, RBW: 1MHz

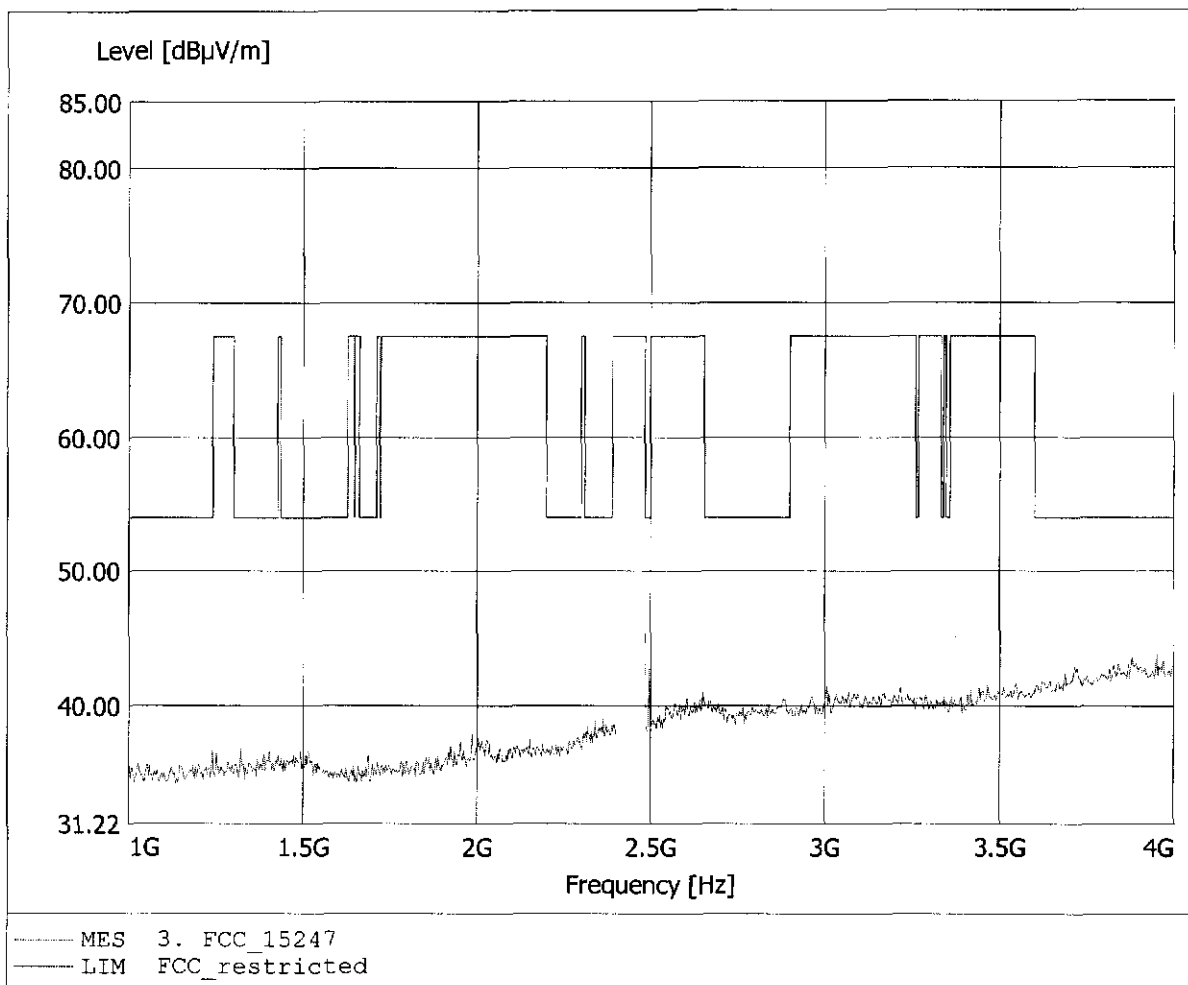


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Jabra Speaker Phone 2480 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cerovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.760GHz, Emax: 43.73dBμV/m, RBW: 1MHz

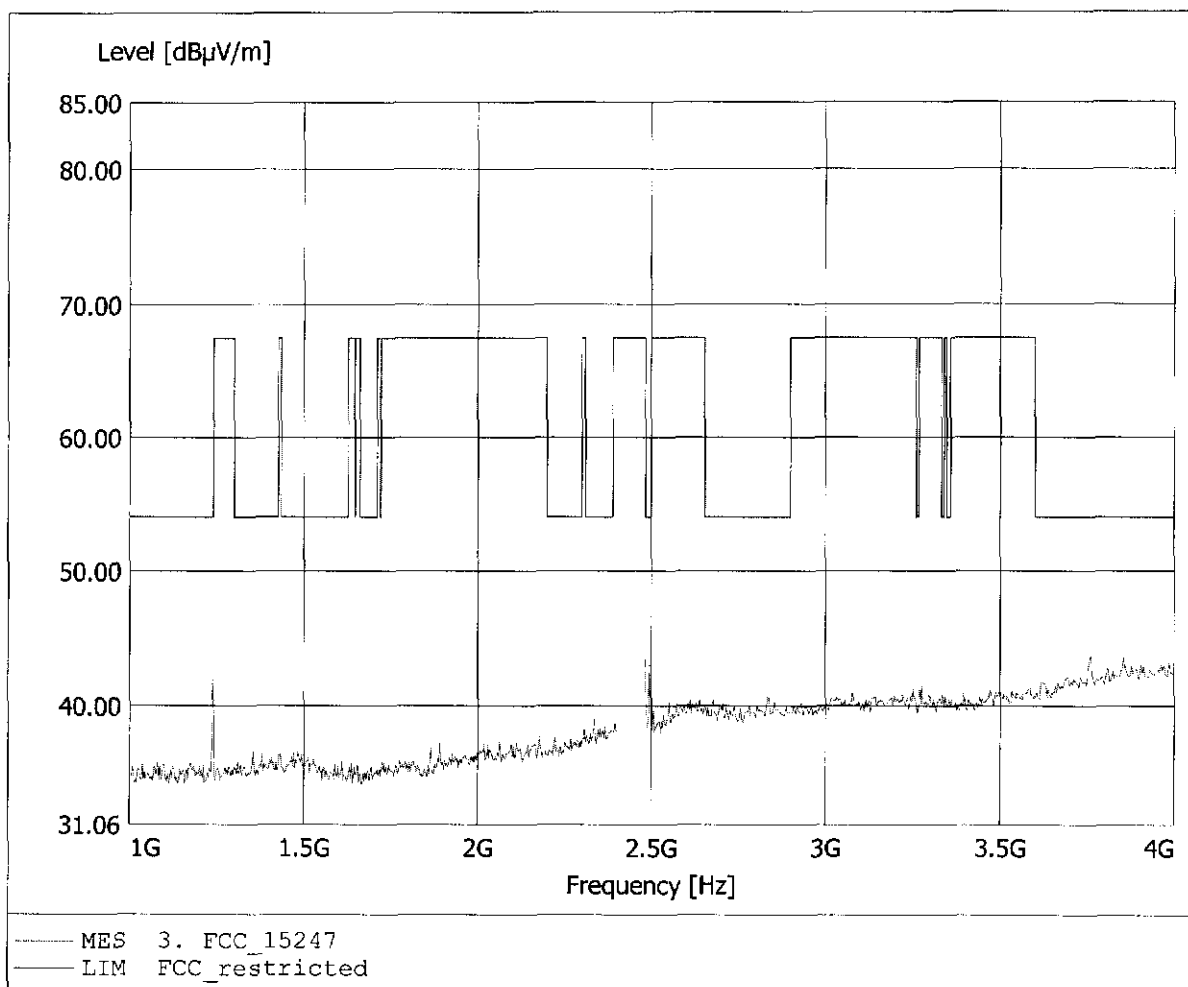


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2480 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 39.48dBμV/m, RBW: 1MHz

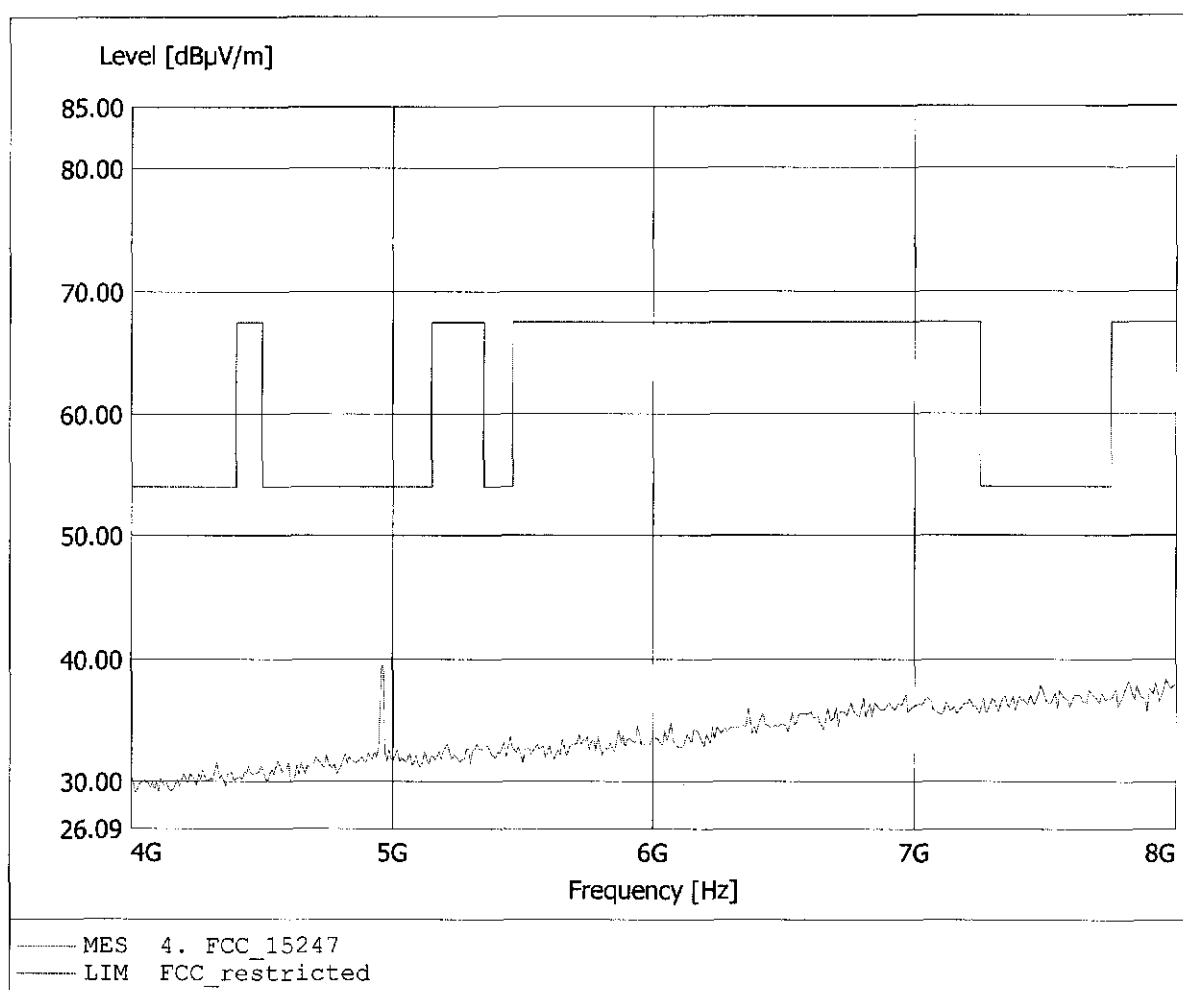


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2480 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.792GHz, Emax: 38.47dBμV/m, RBW: 1MHz

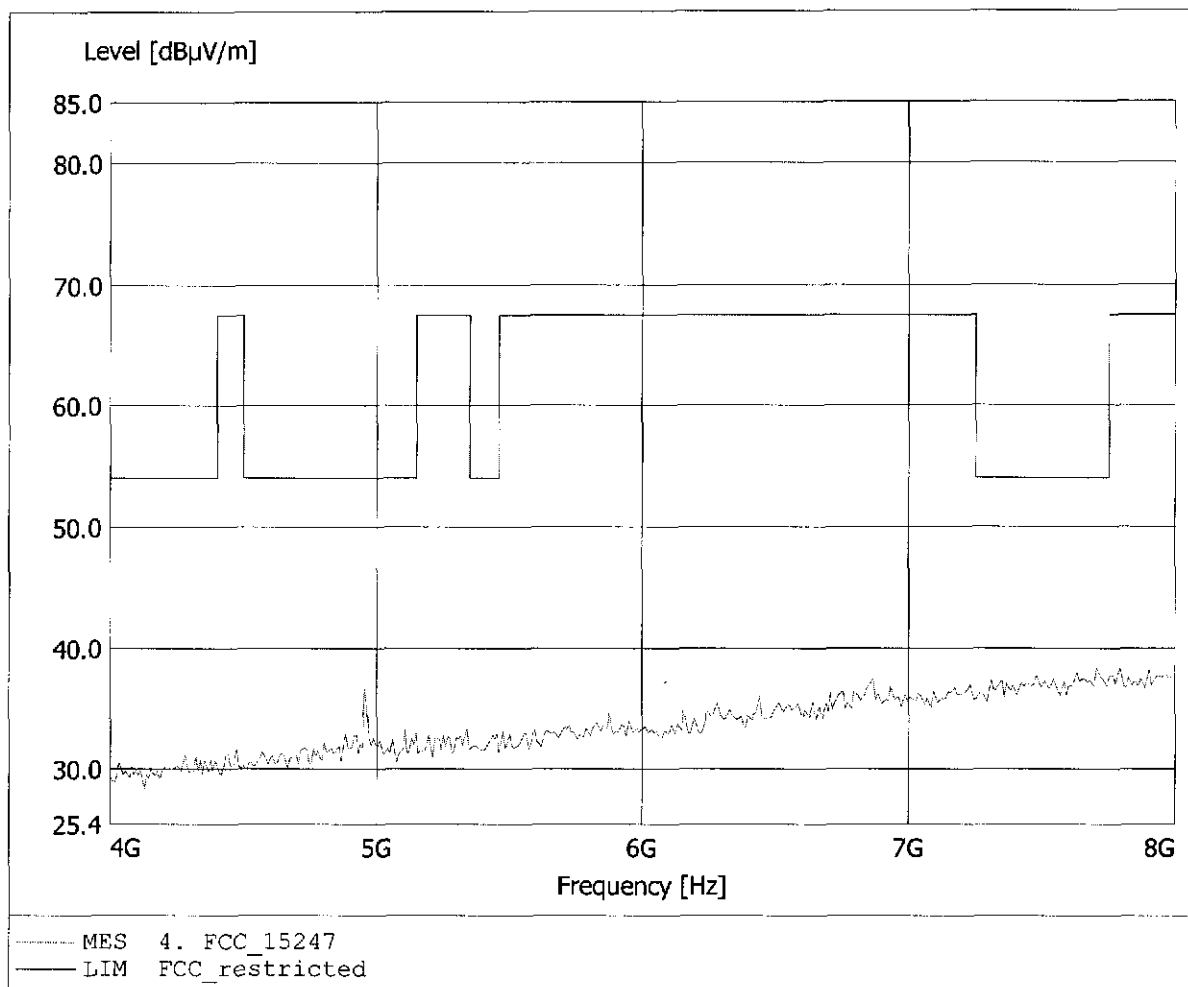


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2480 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.078GHz, Emax: 42.77dBμV/m, RBW: 1MHz

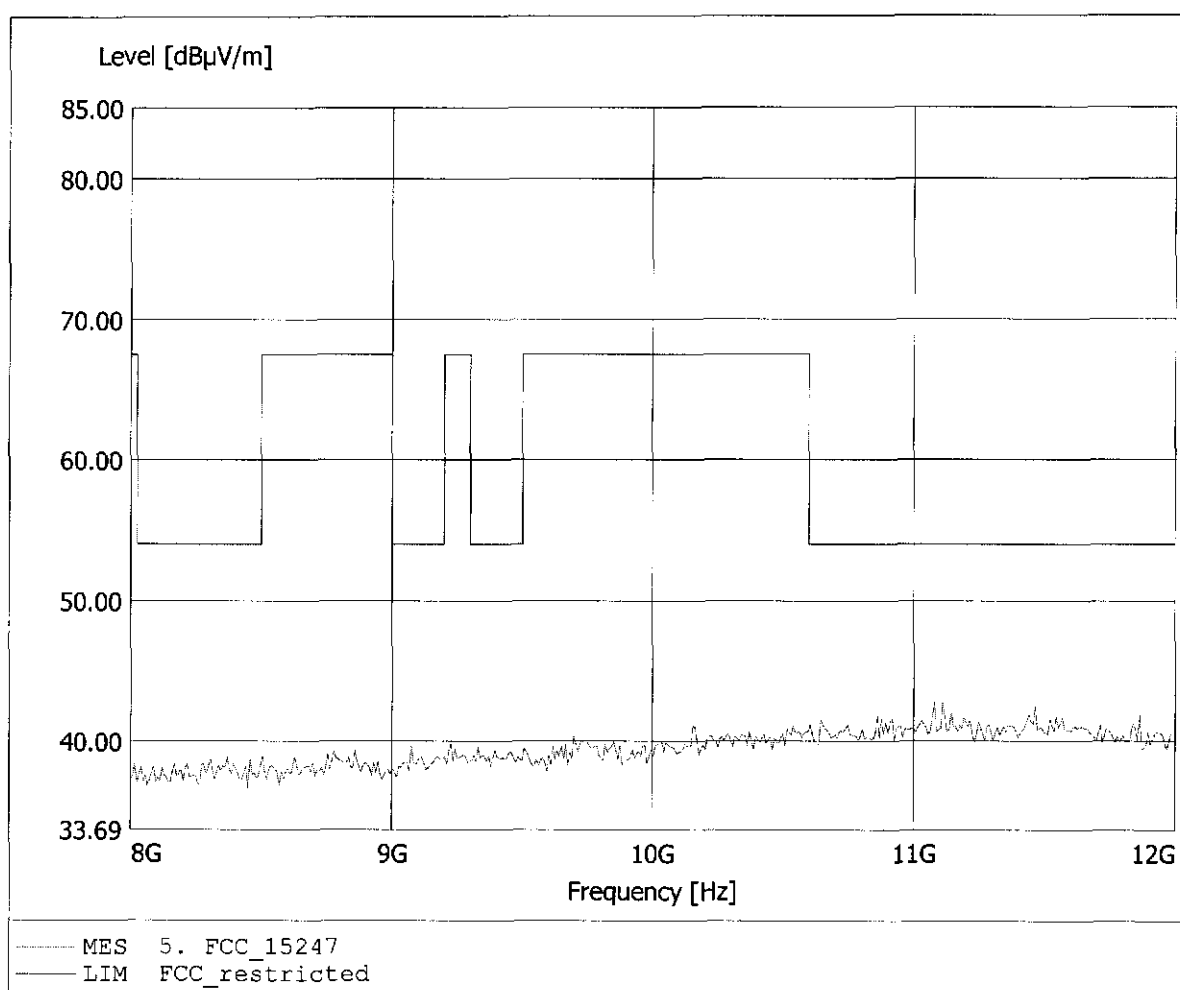


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2480 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.639GHz, Emax: 43.12dBµV/m, RBW: 1MHz

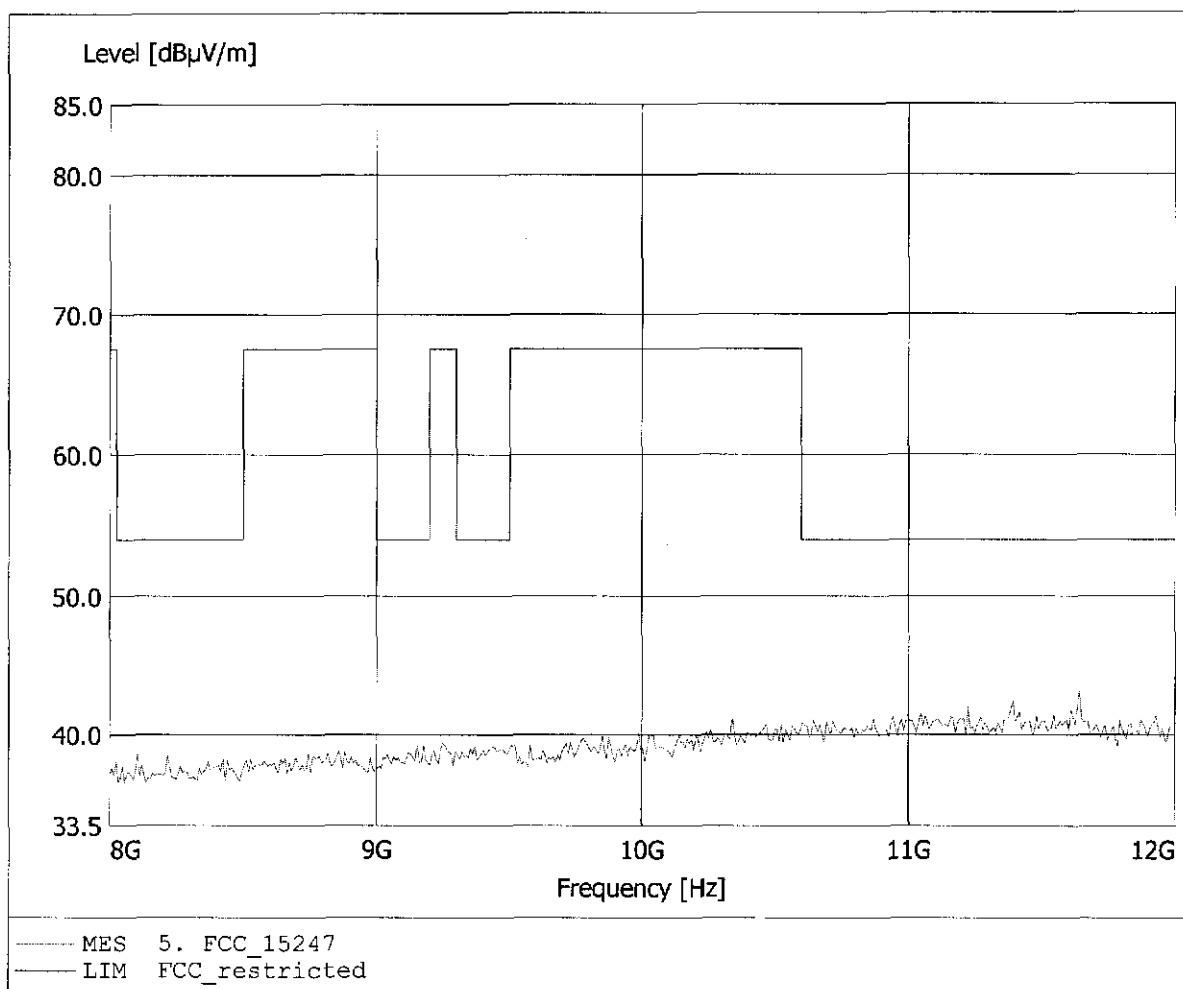


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Jabra Speaker Phone 2480 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.405GHz, Emax: 44.50dBμV/m, RBW: 1MHz

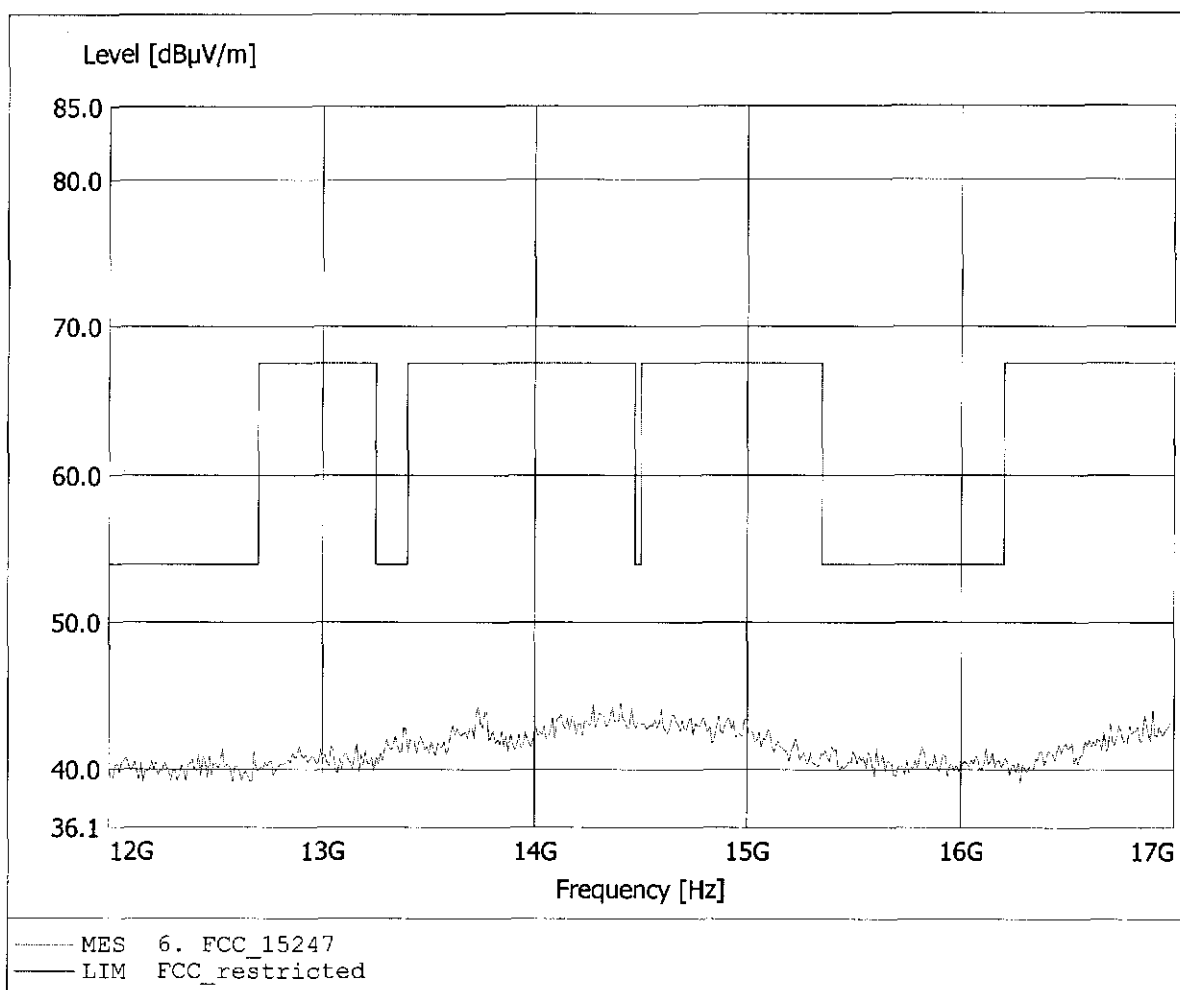


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Jabra Speaker Phone 2480 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cerovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.415GHz, Emax: 45.64dBµV/m, RBW: 1MHz

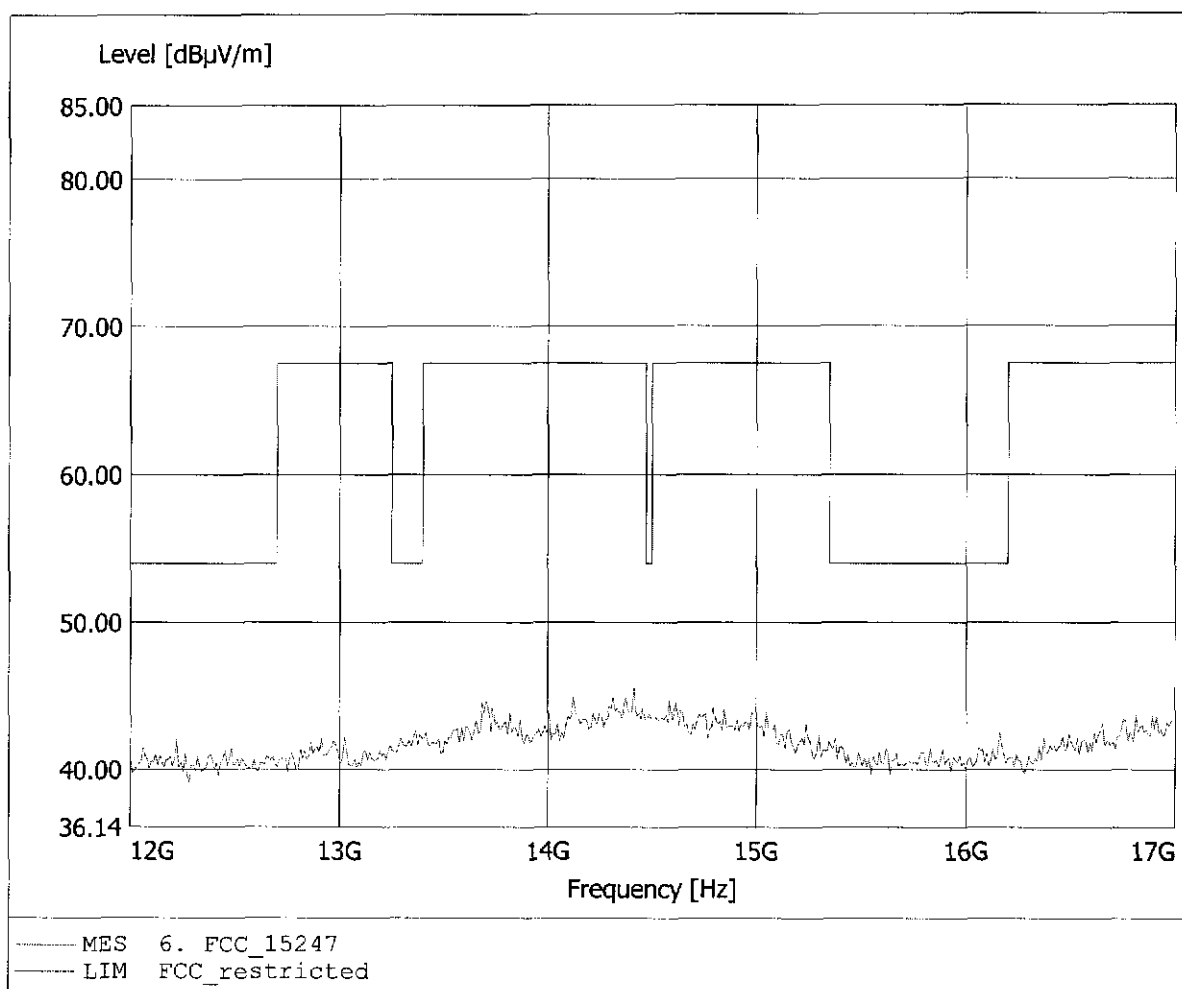


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2480 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.057GHz, Emax: 45.52dBμV/m, RBW: 1MHz

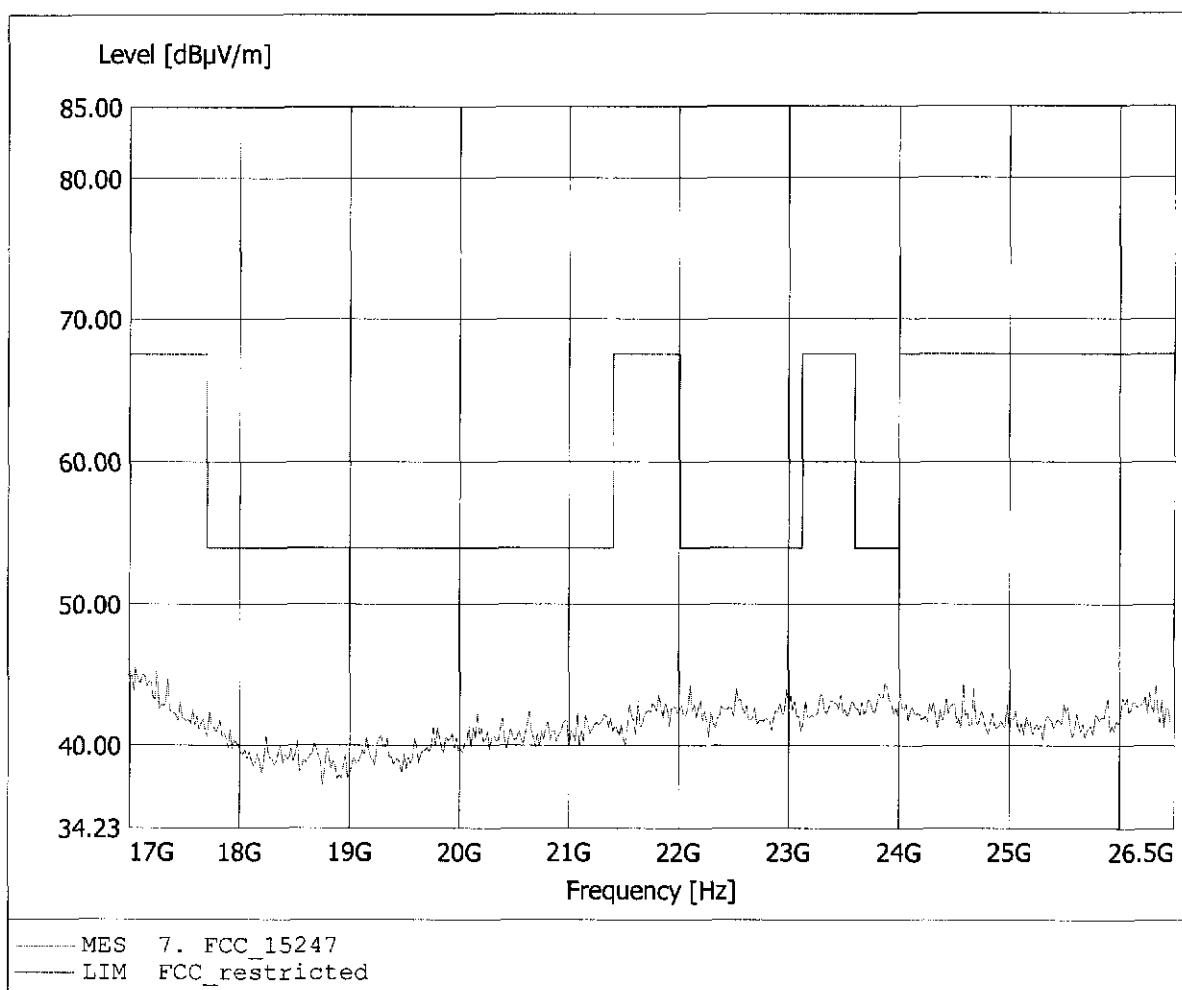

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Jabra Speaker Phone 2480 MHz
Model : SP100
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / 2,4 V DC
Test Site / Operator: ETS / Mr. Cersovsky
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 45.59dBμV/m, RBW: 1MHz

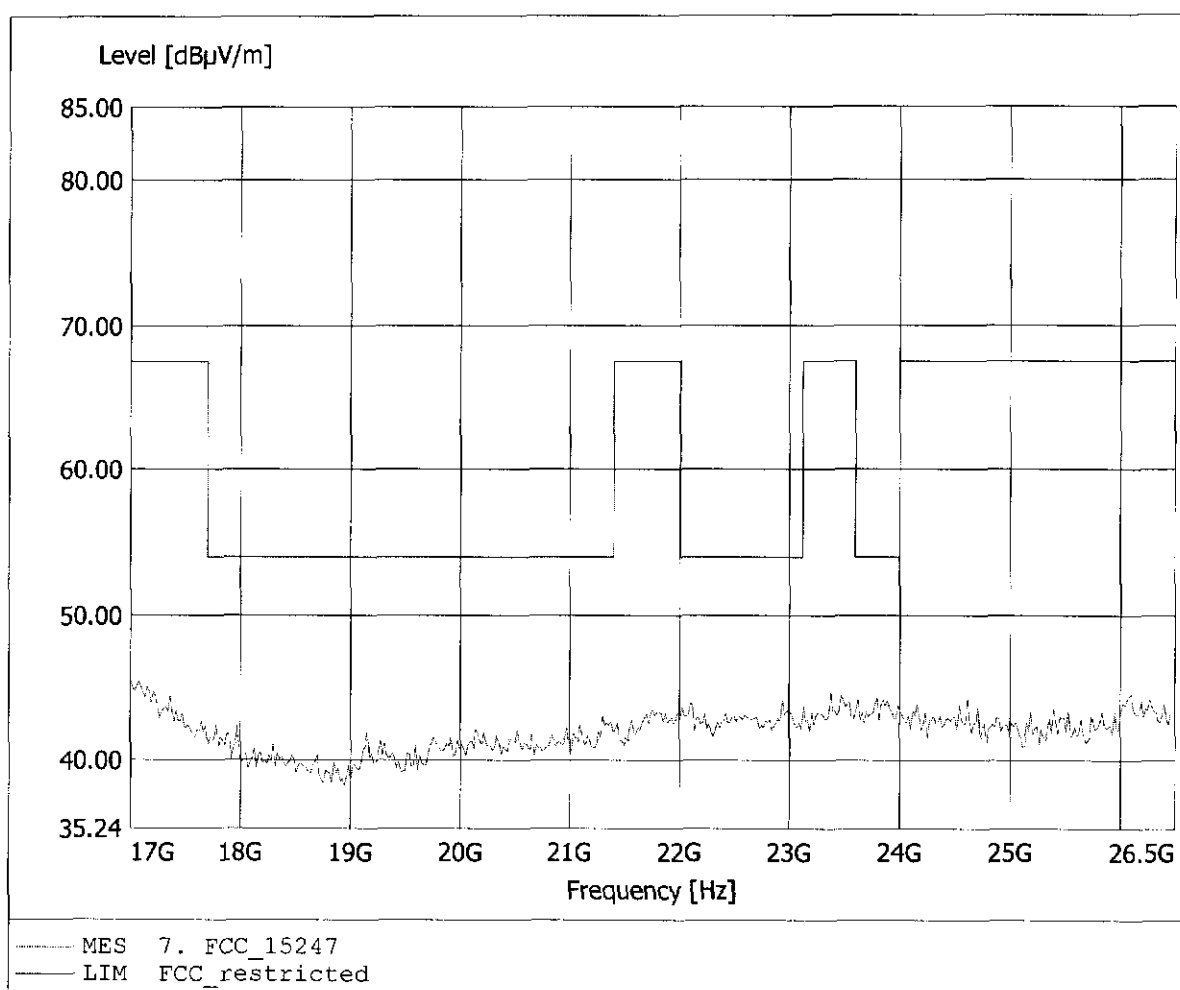

Appendix D


Spurious Emissions conducted - Transmitter operating

Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl -0.25 dB VBW 100 kHz
10 dBm 1.15511022 MHz SWT 5 ms Unit dBm

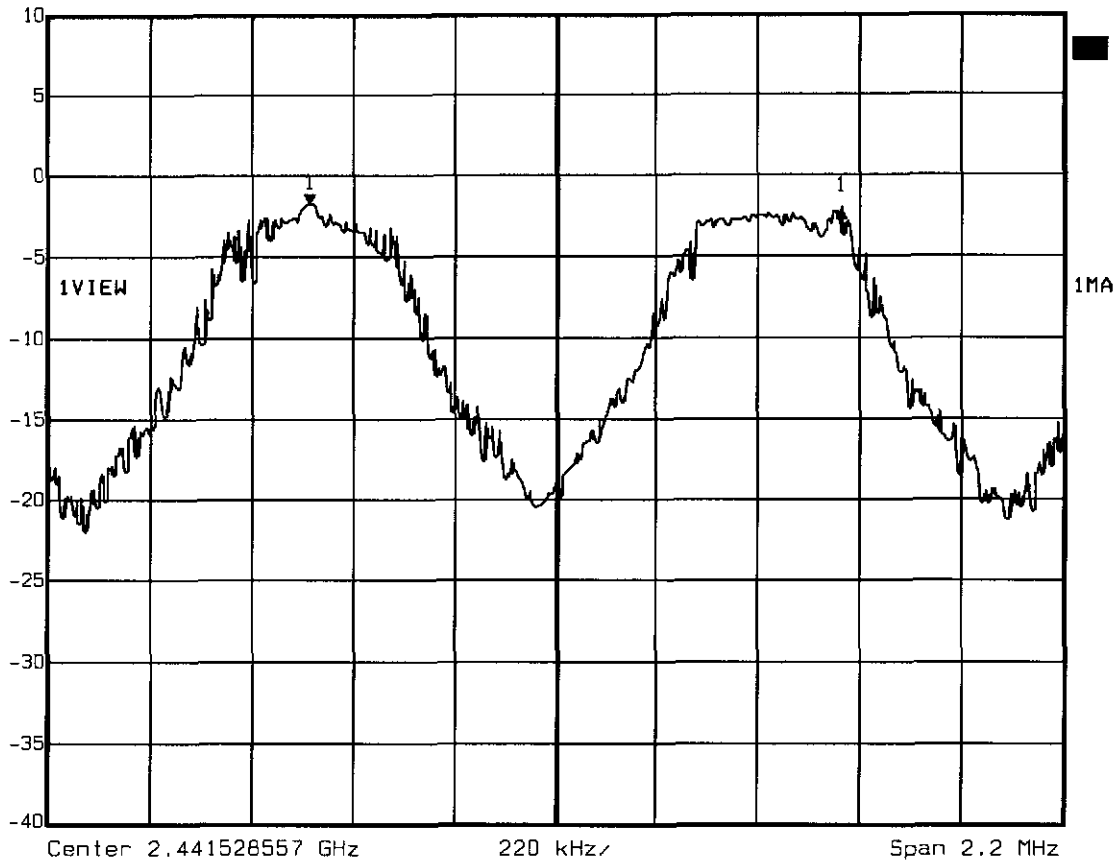

Title: Carrier Frequency Separation
Comment A: Jabra Speakerphone SP100
Date: 22.MAR.2004 09:16:16


Appendix F

Number of Hopping Frequencies



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

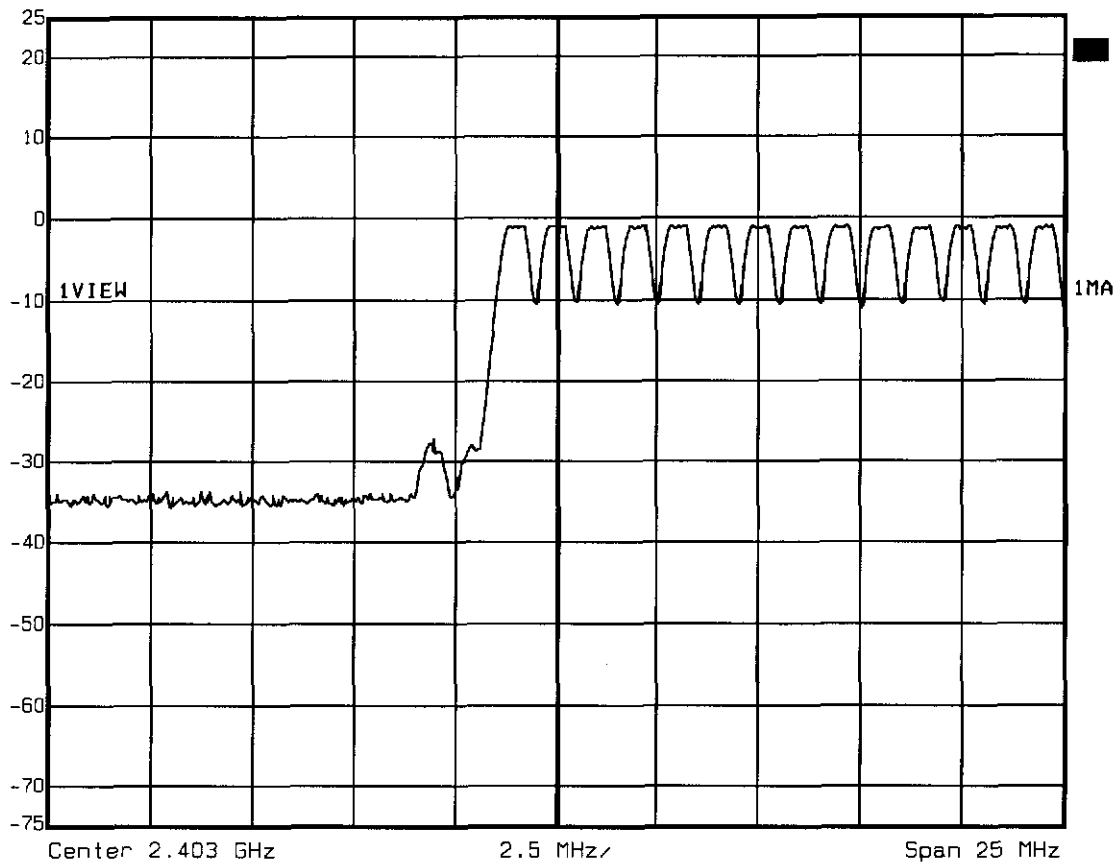


Title: Number of Hopping Frequencies Ch.: 0-13
Comment A: Jabra Speakerphone SP100
Date: 22.MAR.2004 09:23:43



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

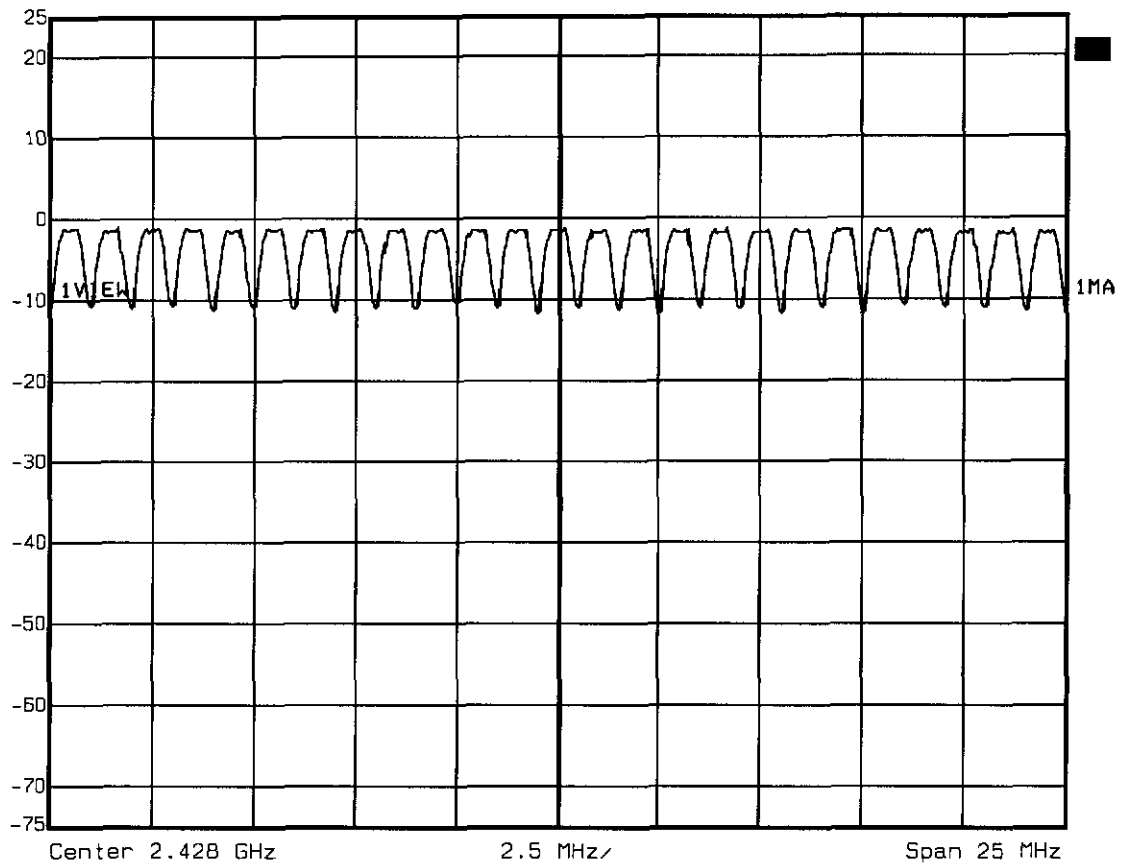


Title: Number of Hopping Frequencies Ch.: 14-38
Comment A: Jabra Speakerphone SP100
Date: 22.MAR.2004 09:27:18



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

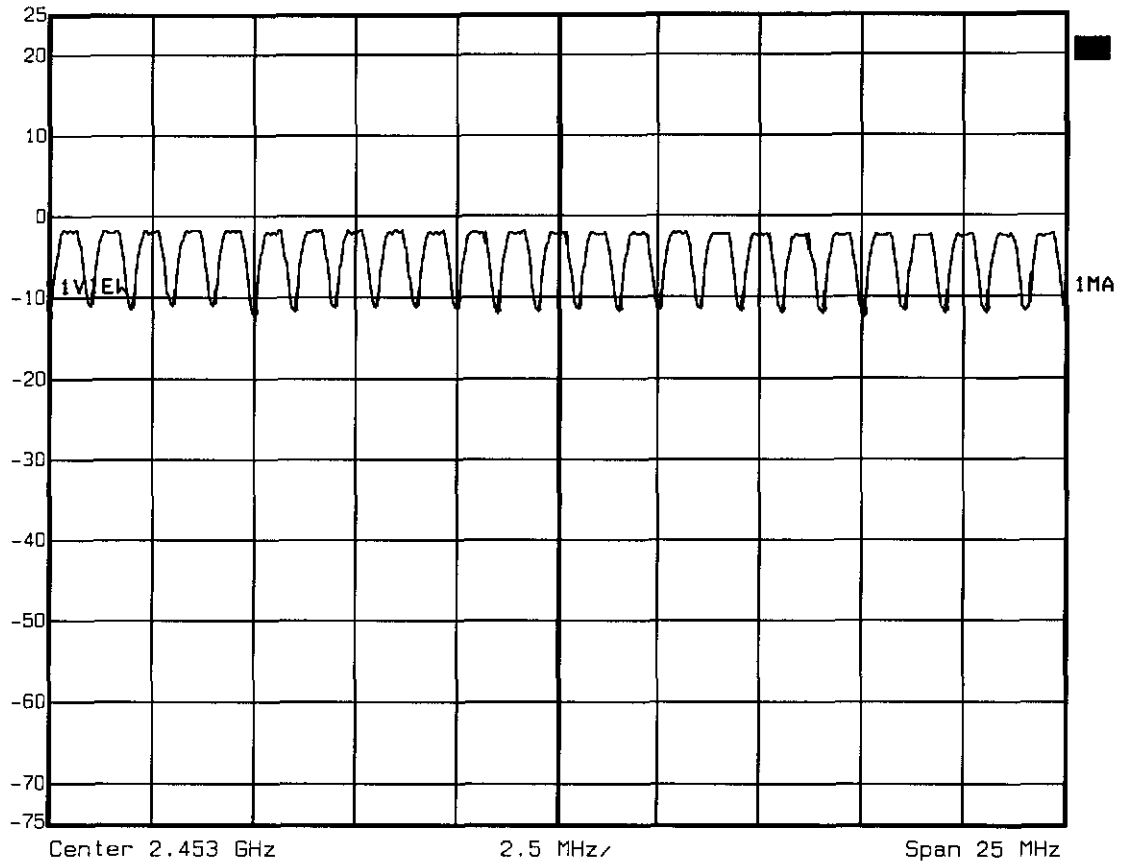


Title: Number of Hopping Frequencies Ch.: 39-63
Comment A: Jabra Speakerphone SP100
Date: 22.MAR.2004 09:29:19



Ref Lvl
25 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

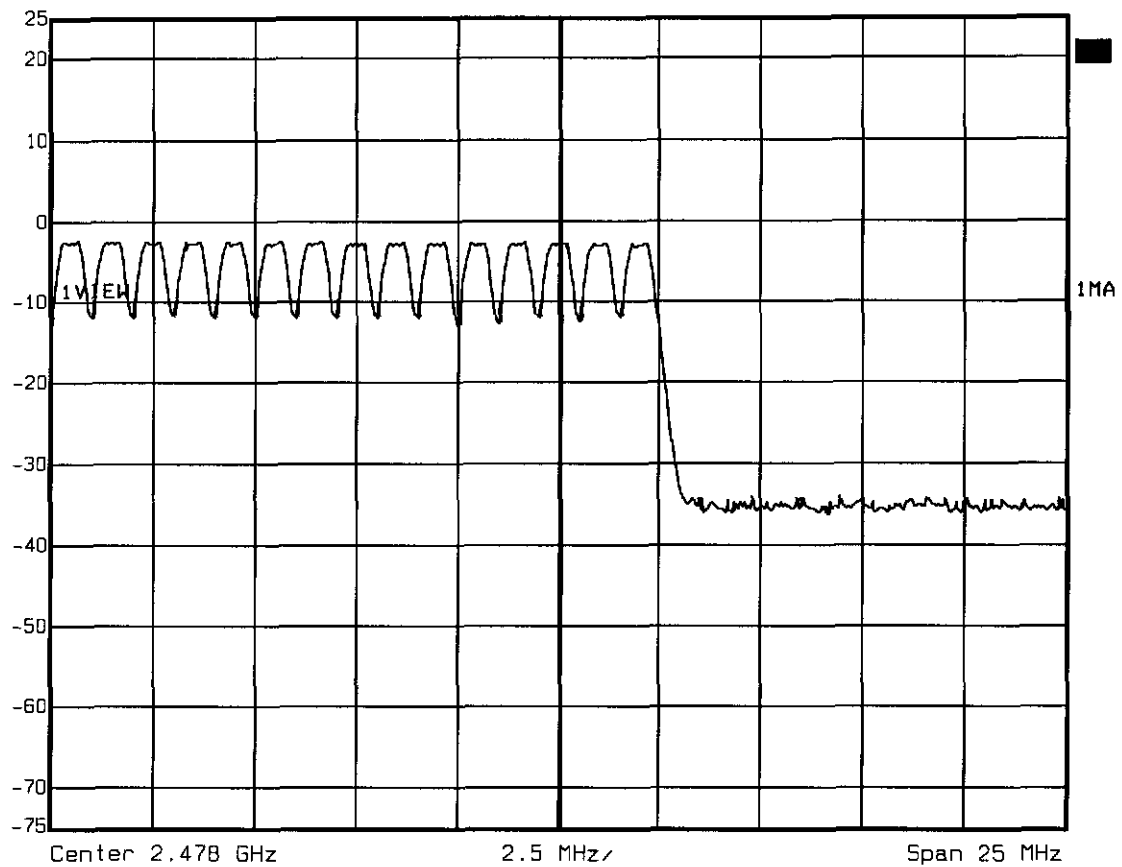


Title: Number of Hopping Frequencies Ch.: 64-78
Comment A: Jabra Speakerphone SP100
Date: 22.MAR.2004 09:32:27

Appendix G

Time of Occupancy (Dwell Time)




Delta 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl -0.25 dB VBW 1 MHz
5 dBm 2.915832 ms SWT 5 ms Unit dBm

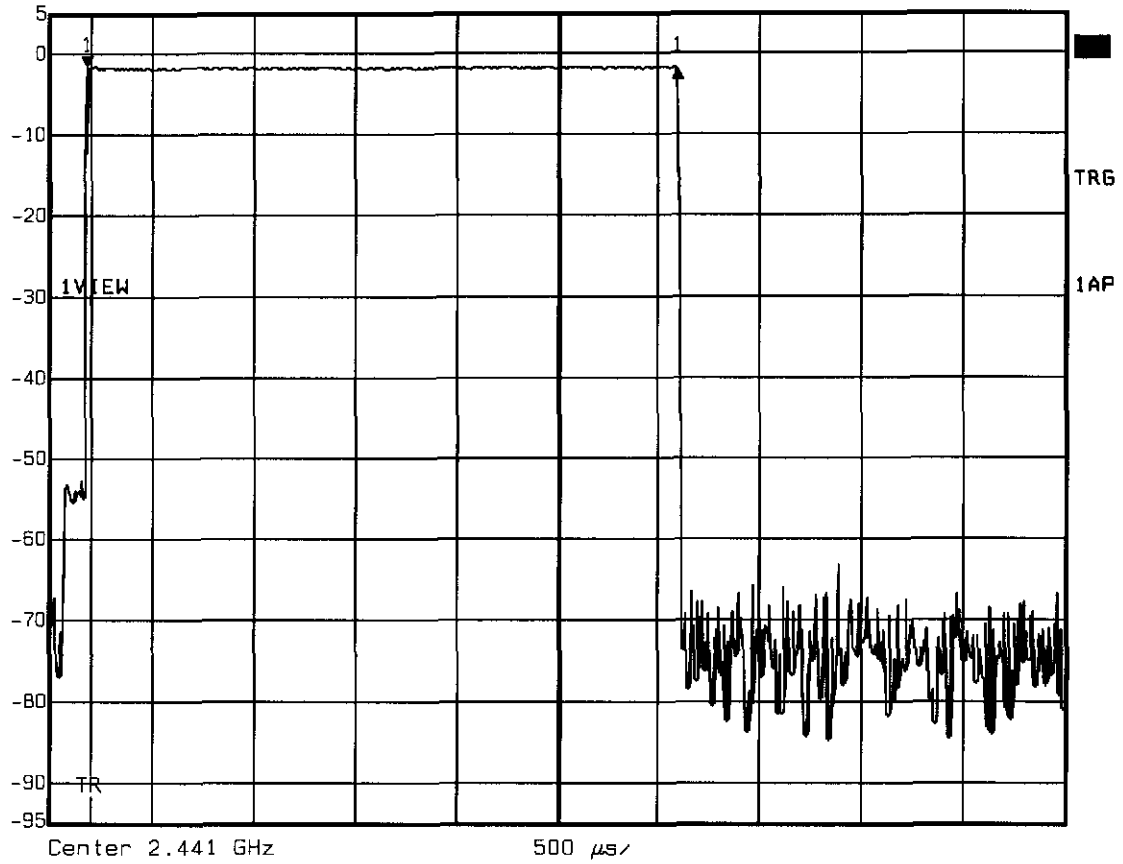

Title: Time of occupancy (Hopping DH5) 64 events*2.916ms=186.62ms
Comment A: Jabra Speakerphone SP100
Date: 22.MAR.2004 09:36:28



Delta 2 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 0.39 dB VBW 1 MHz
25 dBm 6.260521 ms SWT 11 ms Unit dBm

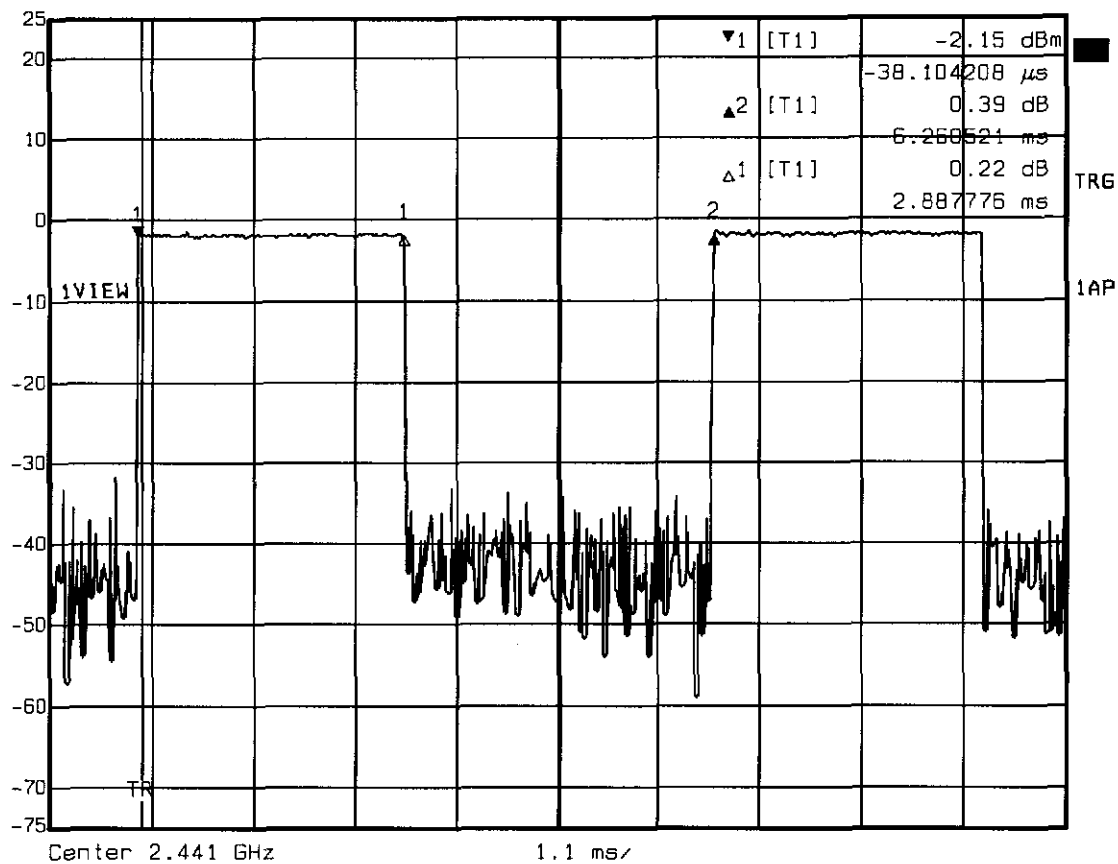


Title: Duty Cycle
Comment A: Jabra Speakerphone SP100
Date: 22.MAR.2004 08:50:59

Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl 0.94 dB VBW 10 kHz
25 dBm 789.17835671 kHz SWT 56 ms Unit dBm

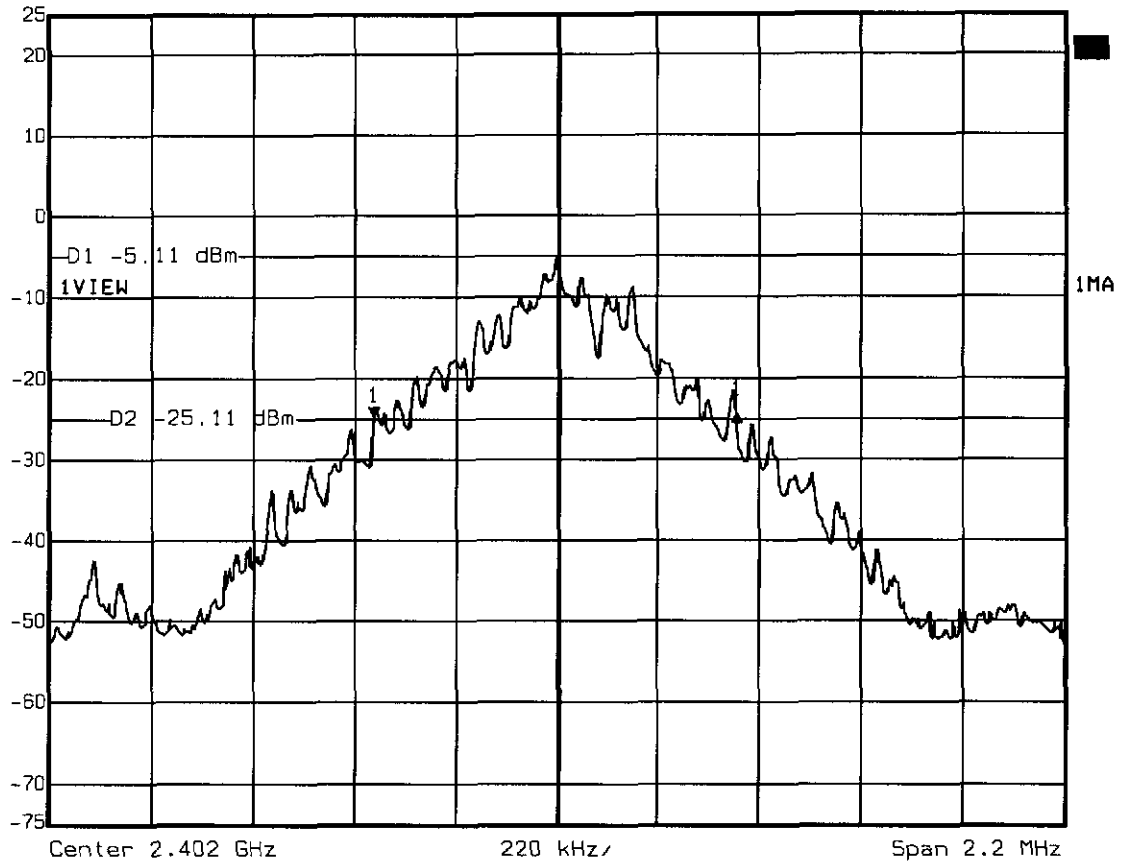

Title: -20 dB Bandwidth Ch.: D
Comment A: Jabra Speakerphone SP100
Date: 22.MAR.2004 08:39:05




Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl 1.01 dB VBW 10 kHz
25 dBm 789.17835671 kHz SWT 56 ms Unit dBm

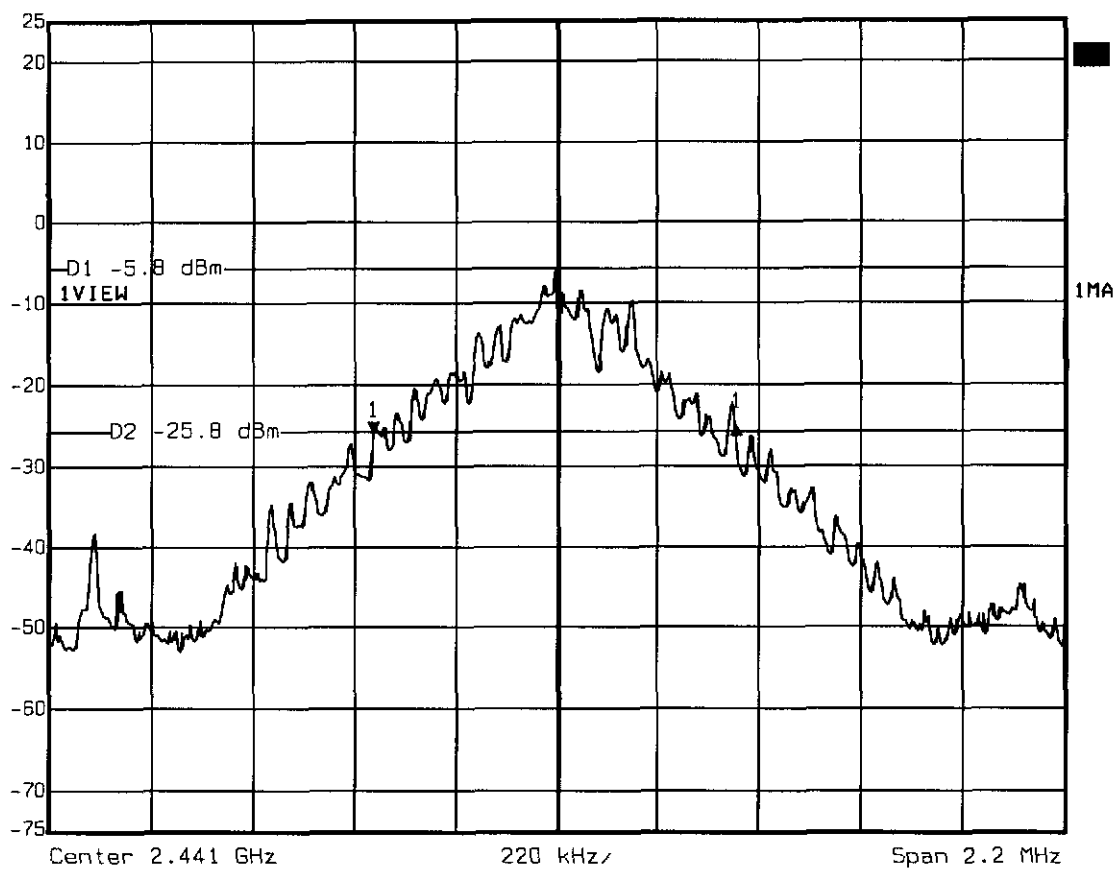

Title: -20 dB Bandwidth Ch.: 39
Comment A: Jabra Speakerphone SP100
Date: 22.MAR.2004 08:37:43




Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl 0.65 dB VBW 10 kHz
25 dBm 789.17835671 kHz SWT 56 ms Unit dBm

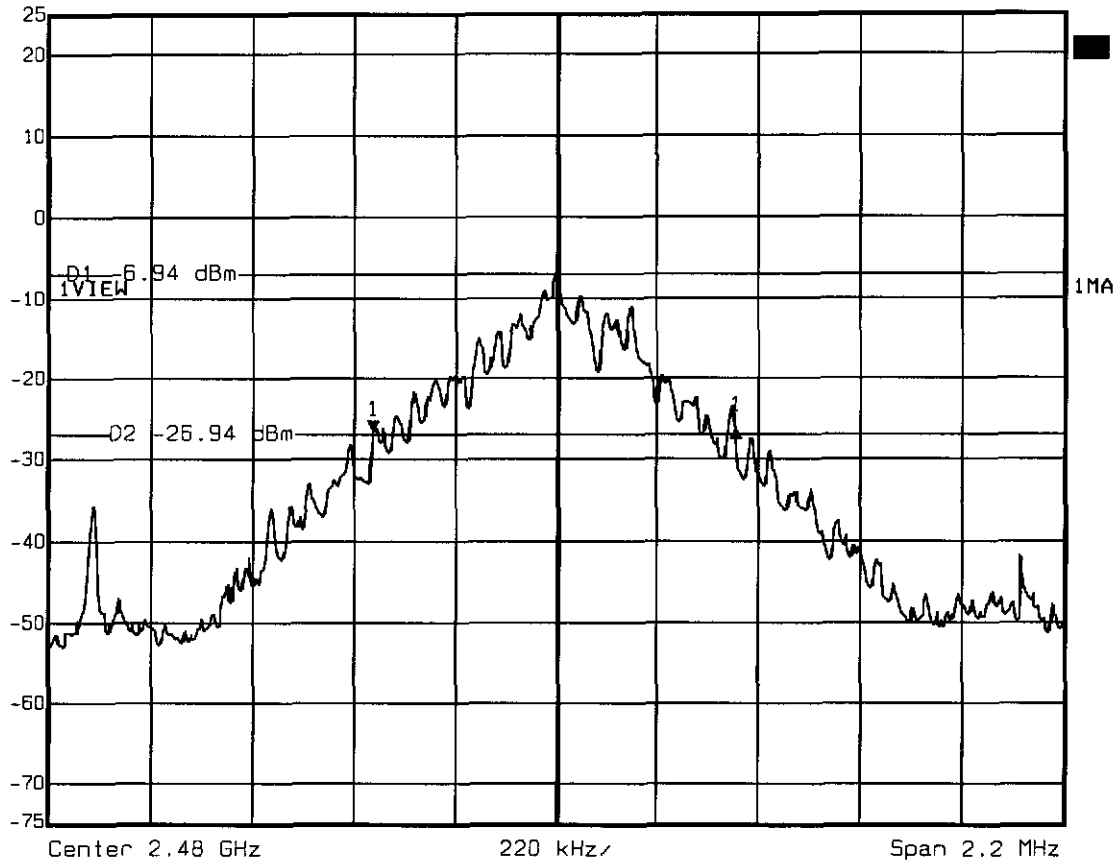

Title: -20 dB Bandwidth Ch.: 78
Comment A: Jabra Speakerphone SP100
Date: 22.MAR.2004 08:36:18

Appendix I


Band-edge Compliance of RF Emissions



Title: Band-edge Compliance (conducted, single frequency)
Comment A: Jabra Speakerphone SP100
Date: 22.MAR.2004 09:09:21




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 34.48 dB VBW 50 kHz
25 dBm -3.50300601 MHz SWT 5 ms Unit dBm

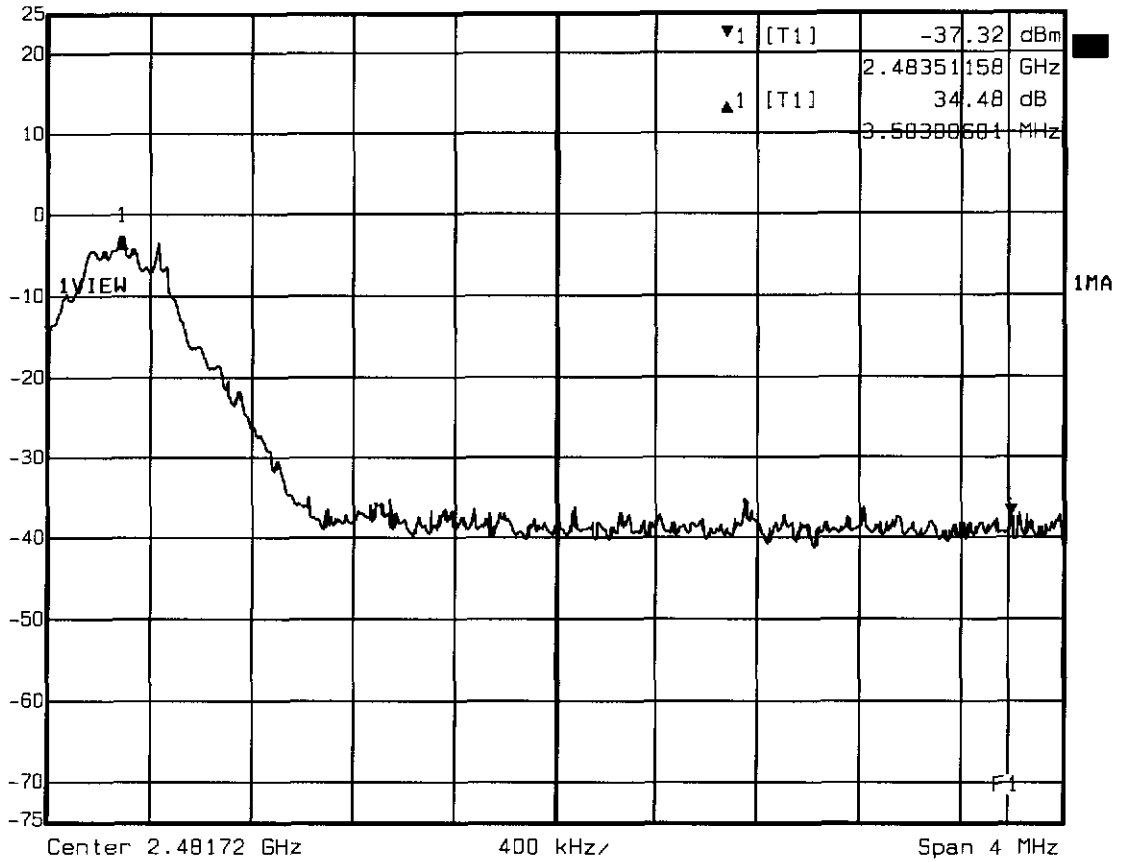

Title: Band-edge Compliance (conducted, single frequency)
Comment A: Jabra Speakerphone SP100
Date: 22.MAR.2004 08:57:21




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 30.37 dB VBW 50 kHz
25 dBm 2.04132265 MHz SWT 5 ms Unit dBm

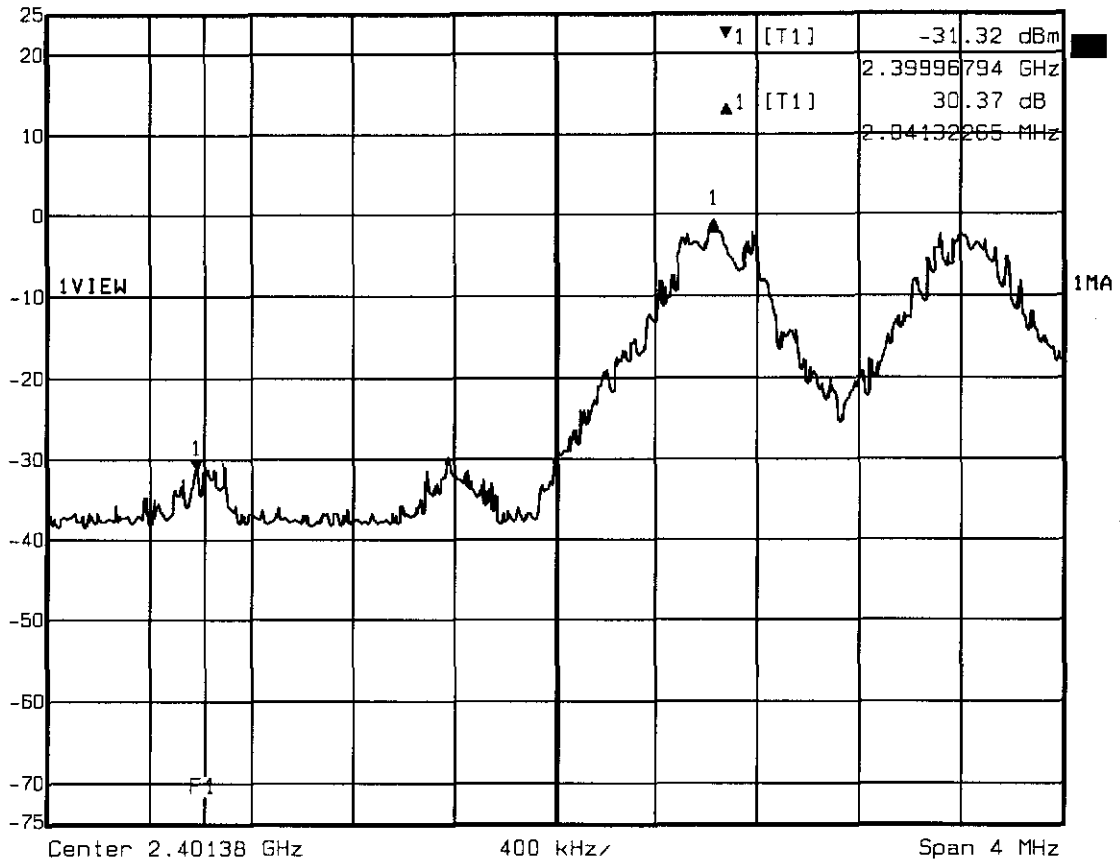

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Jabra Speakerphone SP100
Date: 22.MAR.2004 09:06:02



Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 29.35 dB VBW 50 kHz
25 dBm -3.58316633 MHz SWT 5 ms Unit dBm

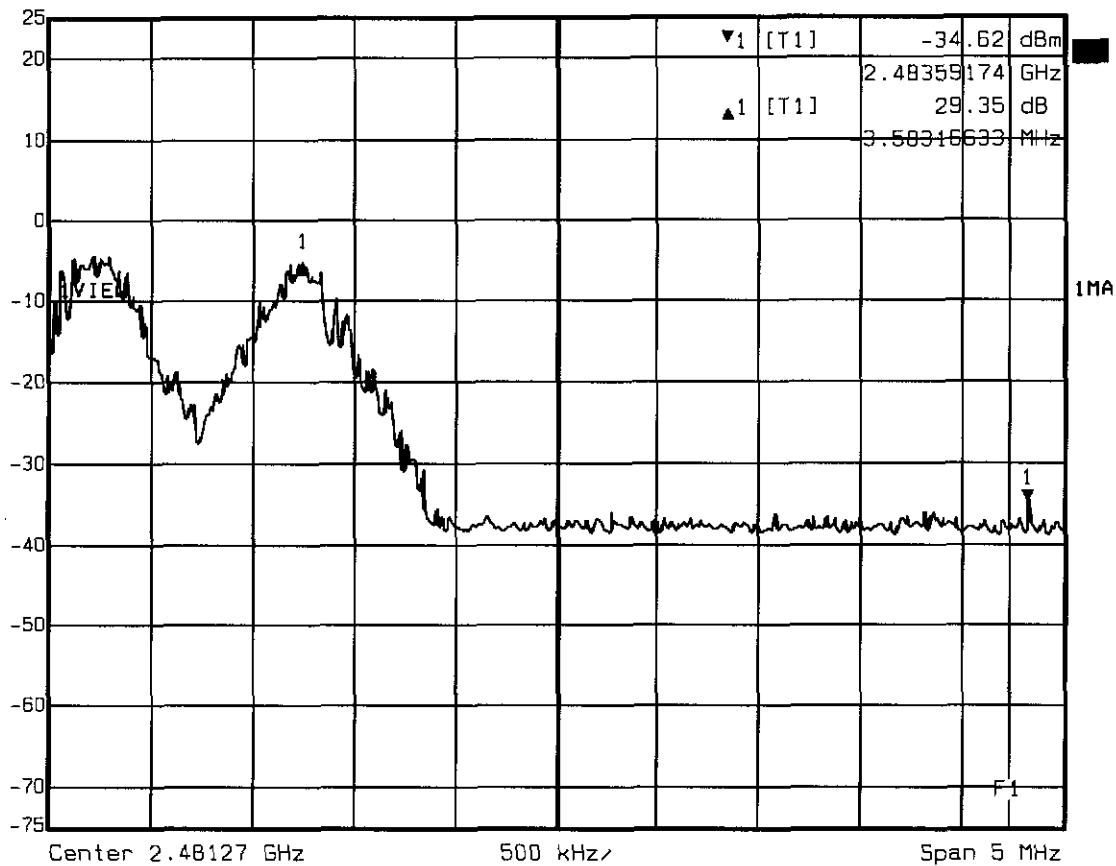


Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Jabra Speakerphone SP100
Date: 22.MAR.2004 09:02:08

Appendix J

Conducted Measurement at (AC) Power Line

EMI voltage test in the ac-mains according to FCC part 15

EUT: Jabra Speaker Phone SP120
 Manufacturer: GN Netcom
 Operating Condition: Unom: 120 V AC (AC / DC - adaptor) , Thom: 23°C
 Test Site: ETS
 Operator: Mr. Jahn
 Test Specification: V-Network: ESH2-Z5 (N)
 Comment: model: SP100

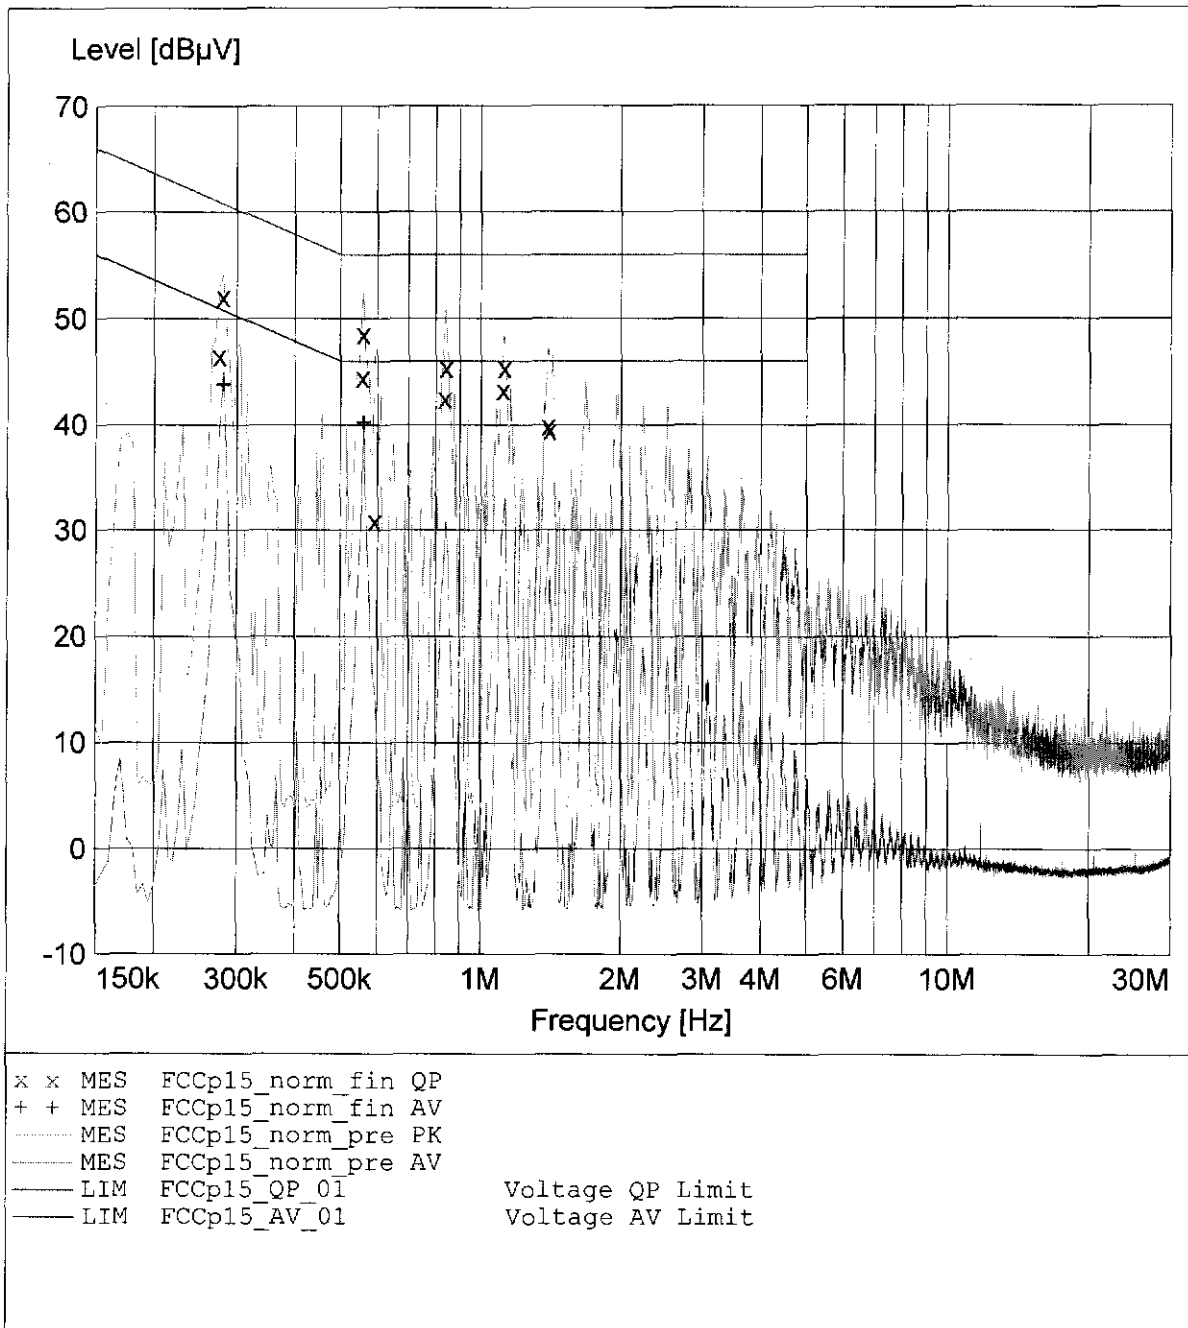

EMI voltage test in the ac-mains according to FCC part 15

EUT: Jabra Speaker Phone SP120
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC / DC - adaptor) , Tnom: 23°C
Test Site: ETS
Operator: Mr. Jahn
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: SP100

