

TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C §15.247 (Hybrid),
RSS-247 Issue 2:2017, RSS-Gen Issue 5:2019

FOR:

ST Engineering Telematics Wireless Ltd
Meter Interface Unit
Model: MIU1USLA
FCC ID: NTAMIU1USLA
IC: 4732A-MIU1USLA

This report is in conformity with ISO/IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Test configuration.....	5
6.3	Changes made in EUT	5
6.4	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C requirements and	7
7.1	20 dB bandwidth	7
7.2	Carrier frequency separation	11
7.3	Number of hopping frequencies	13
7.4	Average time of occupancy	16
7.5	Peak output power	19
7.6	Peak spectral power density	24
7.7	Field strength of spurious emissions	28
7.8	Band edge emissions at RF antenna connector.....	45
7.9	Antenna requirements.....	49
8	APPENDIX A Test equipment and ancillaries used for tests.....	50
9	APPENDIX B Test equipment correction factors.....	51
10	APPENDIX C Measurement uncertainties	54
11	APPENDIX D Test laboratory description	55
12	APPENDIX E Specification references.....	56
13	APPENDIX F Abbreviations and acronyms.....	57

1 Applicant information

Client name: ST Engineering Telematics Wireless Ltd
Address: 26 Hamelacha street, POB 1911, Holon, 5811801, Israel
Telephone: +972 3557 5700
Fax: +972 3557 5703
E-mail: Emzari.Roketlishvili@telematics-wireless.com
Contact name: Mr. Emzari Roketlishvili

2 Equipment under test attributes

Product name: Meter Interface Unit
Product type: Transceiver
Model(s): MIU1USLA
Serial number: 1700042
Hardware version: Rev. B
Software release: Fc01
Receipt date 02-Jan-20

3 Manufacturer information

Manufacturer name: ST Engineering Telematics Wireless Ltd
Address: 26 Hamelacha street, POB 1911, Holon, 5811801, Israel
Telephone: +972 3557 5700
Fax: +972 3557 5703
E-Mail: Emzari.Roketlishvili@telematics-wireless.com
Contact name: Mr. Emzari Roketlishvili

4 Test details




Project ID: 35688
Location: Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel
Test started: 02-Jan-20
Test completed: 17-Mar-20
Test specification(s): FCC 47CFR part 15 subpart C §15.247 (Hybrid),
RSS-247 Issue 2:2017, RSS-Gen Issue 5:2019

5 Tests summary

Test	Status
Transmitter characteristics	
FCC section 15.247(a)1/ RSS-247 section 5.1(c), 20 dB bandwidth	Pass
FCC section 15.247(a)1/ RSS-247 section 5.1(b), Frequency separation	Pass
FCC section 15.247(a)1/ RSS-247 section 5.1(c), Number of hopping frequencies	Pass
FCC section 15.247(a)1/ RSS-247 section 5.1(c), Average time of occupancy	Pass
FCC section 15.247(b)2/ RSS-247 section 5.4(a), Peak output power	Pass
FCC Section 15.247(e)/ RSS-247 section 5.2(b), Peak spectral density	Pass
FCC section 15.247(d)/ RSS-247 section 5.5, Radiated spurious emissions	Pass
FCC section 15.247(d)/ RSS-247 section 5.5, Emissions at band edges	Pass
FCC section 15.247(i)/ RSS-102 section 2.5.2, RF exposure	Pass, the exhibit to the application of certification is provided
FCC section 15.203/ RSS-Gen section 6.8, Antenna requirements	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. A. Morozov, test engineer, EMC & Radio	02-Jan-20 – 17-Mar-20	
Reviewed by:	Mrs. S. Peysahov Sheynin, test engineer, EMC & Radio	08-Jun-20	
Approved by:	Mr. S. Samokha, technical manager, EMC & Radio	23-Jun-20	

6 EUT description


Note: The following data in this clause is provided by the customer and represents his sole responsibility

6.1 General information

The EUT is an interface unit connected to a water meter.

This interface unit is used to control and collect data from the water meter and send the data via RF link to the system control center.

6.2 Test configuration

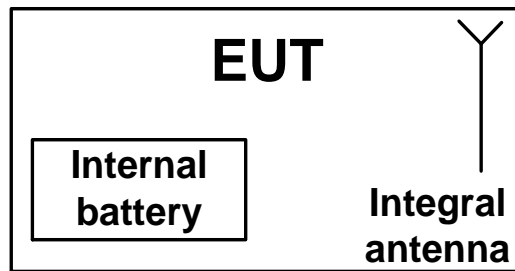

6.3 Changes made in EUT

No changes were implemented in the EUT during the testing.



6.4 Transmitter characteristics

Type of equipment						
X	Stand-alone (Equipment with or without its own control provisions)					
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
Intended use		Condition of use				
	fixed	Always at a distance more than 2 m from all people				
X	mobile	Always at a distance more than 20 cm from all people				
	portable	May operate at a distance closer than 20 cm to human body				
Assigned frequency ranges		902 – 928 MHz				
Operating frequencies		902.3-927.7 MHz				
Maximum rated output power		At transmitter 50 Ω RF output connector			NA	
		Peak output power			19.53 dBm	
Is transmitter output power variable?		X	No			
		Yes		continuous variable		
				stepped variable with stepsize		
				minimum RF power		
				maximum RF power		
Antenna connection						
unique coupling		standard connector		X	integral	
				X	with temporary RF connector without temporary RF connector	
Antenna/s technical characteristics						
Type		Manufacturer		Model number		
Printed		NA		NA		
				Gain		
				+1.5 dBi		
Transmitter aggregate data rate/s		1.2 / 6.8 kbps				
Type of modulation		LoRa				
Modulating test signal (baseband)		PRBS				
Transmitter power source						
X	Battery	Nominal rated voltage	3.6 VDC	Battery type	Lithium size D	
	DC	Nominal rated voltage				
	AC mains	Nominal rated voltage		Frequency		
Common power source for transmitter and receiver				X	yes	
					no	
Spread spectrum technique used		Frequency hopping (FHSS)				
		Digital transmission system (DTS)				
		X	Hybrid			
Spread spectrum parameters for transmitters tested per FCC 15.247 and RSS-247						
FHSS	Total number of hops		4-128			
	Bandwidth per hop		139.1 kHz			
	Min. separation of hops		192.0 kHz			



Test specification: Section 15.247(a)1, RSS-247 section 5.1(c), 20 dB bandwidth			
Test procedure: ANSI C63.10, section 7.8.7			
Test mode: Compliance		Verdict: PASS	
Date(s): 12-Jan-20			
Temperature: 23.9 °C	Relative Humidity: 42 %	Air Pressure: 1024 hPa	Power: 3.6 VDC
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements and RSS-247 requirements

7.1 20 dB bandwidth

7.1.1 General

This test was performed to measure 20 dB bandwidth of the transmitter hopping channel. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 20 dB bandwidth limits

Assigned frequency, MHz	Maximum bandwidth, kHz	Modulation envelope reference points*, dBc
902.0 – 928.0	250	20

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier at maximum data rate.

7.1.2.3 The transmitter bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.

7.1.2.4 The test was repeated for each data rate and each modulation format.

Figure 7.1.1 The 20 dB bandwidth test setup





Test specification: Section 15.247(a)1, RSS-247 section 5.1(c), 20 dB bandwidth			
Test procedure: ANSI C63.10, section 7.8.7			
Test mode: Compliance		Verdict: PASS	
Date(s): 12-Jan-20			
Temperature: 23.9 °C	Relative Humidity: 42 %	Air Pressure: 1024 hPa	Power: 3.6 VDC
Remarks:			

Table 7.1.2 The 20 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 902.0 - 928.0 MHz
 DETECTOR USED: Peak
 SWEEP TIME: Auto
 VIDEO BANDWIDTH: ≥ RBW
 MODULATION ENVELOPE REFERENCE POINTS: 20.0 dBc
 FREQUENCY HOPPING: Disabled



REQUENCY HOPPING.						
Carrier frequency, MHz	Type of modulation	Data rate, kbps	20 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Low frequency						
902.3	LoRa	1.2	139.1	250.0	-110.9	Pass
		6.8	140.9	250.0	-109.1	Pass
Mid frequency						
915.0	LoRa	1.2	138.2	250.0	-111.8	Pass
		6.8	137.4	250.0	-112.6	Pass
High frequency						
927.7	LoRa	1.2	138.6	250.0	-111.4	Pass
		6.8	142.1	250.0	-107.9	Pass

Reference numbers of test equipment used

HL 4071	HL 5410	HL 5376	HL 1809	HL 4136				
---------	---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.

Plot 7.1.1 The 20 dB bandwidth test result at low frequency

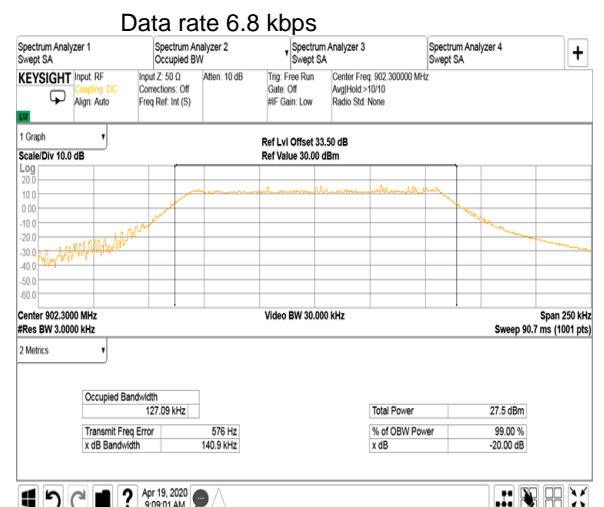
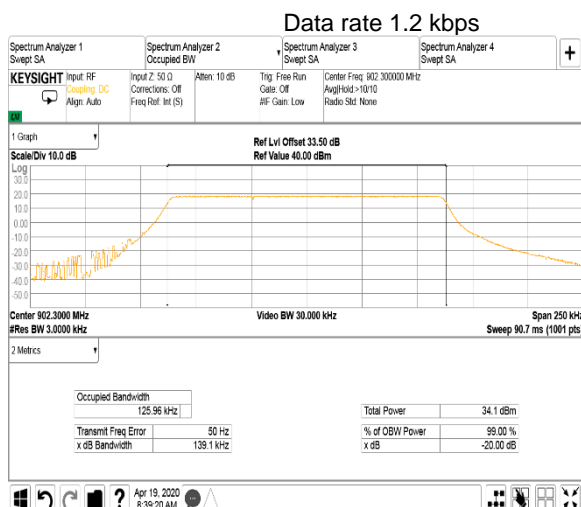




HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-247 section 5.1(c), 20 dB bandwidth			
Test procedure: ANSI C63.10, section 7.8.7			
Test mode: Compliance		Verdict: PASS	
Date(s): 12-Jan-20			
Temperature: 23.9 °C	Relative Humidity: 42 %	Air Pressure: 1024 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.1.2 The 20 dB bandwidth test result at mid frequency

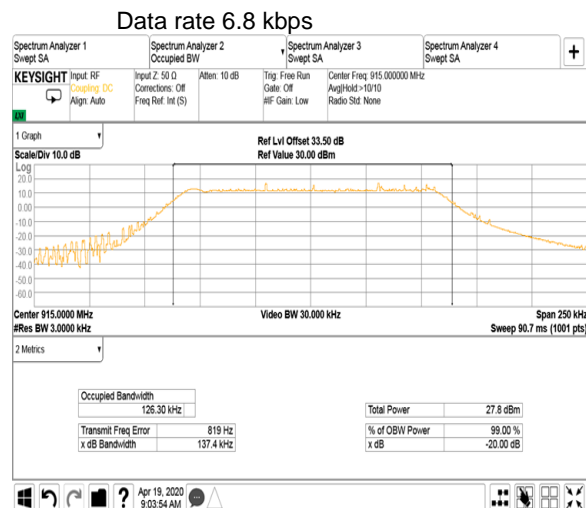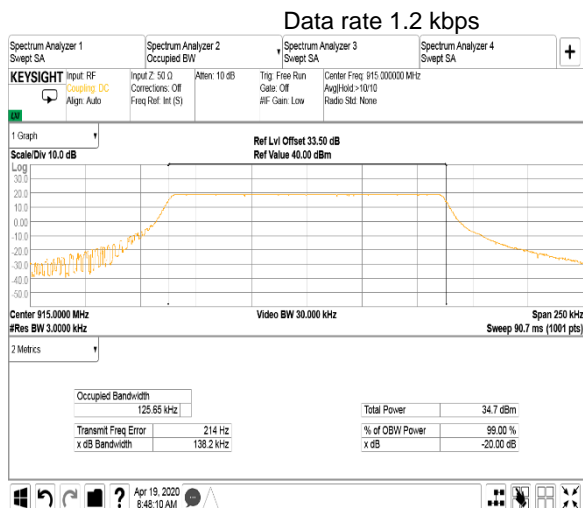





HERMON LABORATORIES

Report ID: TELRAD_FCC.35688_Hybrid

Date of Issue: 23-Jun-20

Test specification: Section 15.247(a)1, RSS-247 section 5.1(c), 20 dB bandwidth			
Test procedure: ANSI C63.10, section 7.8.7			
Test mode: Compliance		Verdict: PASS	
Date(s): 12-Jan-20			
Temperature: 23.9 °C	Relative Humidity: 42 %	Air Pressure: 1024 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.1.3 The 20 dB bandwidth test result at high frequency

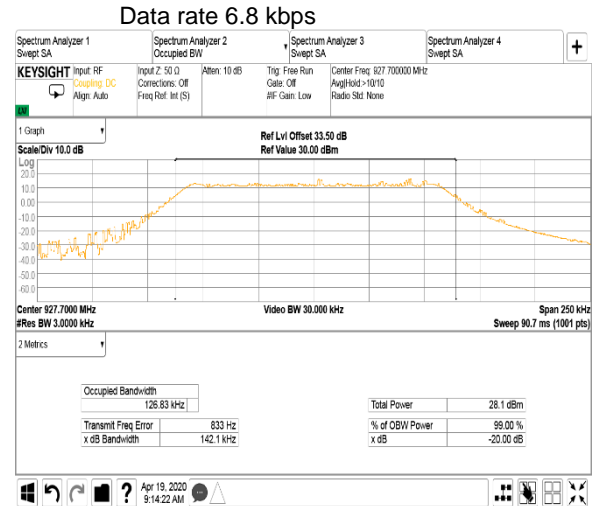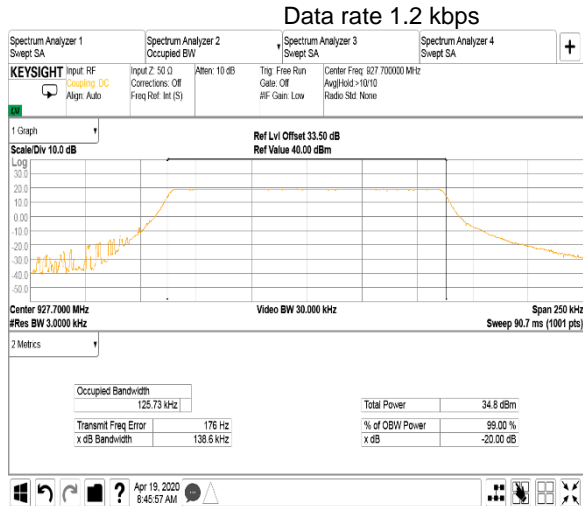



Test specification: Section 15.247(a)1, RSS-247 section 5.1(b), Frequency separation			
Test procedure: ANSI C63.10, section 7.8.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 09-Feb-20			
Temperature: 21.5 °C	Relative Humidity: 37 %	Air Pressure: 1022 hPa	Power: 3.6 VDC
Remarks:			

7.2 Carrier frequency separation

7.2.1 General

This test was performed to measure frequency separation between the peaks of adjacent channels. Specification test limits are given in Table 7.2.1.


Table 7.2.1 Carrier frequency separation limits

Assigned frequency range, MHz	Carrier frequency separation
902.0 – 928.0	25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater

7.2.2 Test procedure

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.2.2.2 The spectrum analyzer span was set to capture the carrier frequency and both of adjacent channels, the lower and the higher. The resolution bandwidth was set to approximately 30% of the channel spacing.
- 7.2.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.2.2.4 The frequency separation between the peaks of adjacent channels was measured as provided in Table 7.2.2 and associated plots.

Figure 7.2.1 Carrier frequency separation test setup





Test specification: Section 15.247(a)1, RSS-247 section 5.1(b), Frequency separation			
Test procedure: ANSI C63.10, section 7.8.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 09-Feb-20			
Temperature: 21.5 °C	Relative Humidity: 37 %	Air Pressure: 1022 hPa	Power: 3.6 VDC
Remarks:			

Table 7.2.2 Carrier frequency separation test results

ASSIGNED FREQUENCY: 902.0 – 928.00 MHz
 MODULATION: LoRa
 MODULATING SIGNAL: PRBS
 BIT RATE: 1.2 kbps
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 30 kHz
 VIDEO BANDWIDTH: ≥ RBW
 FREQUENCY HOPPING: Enabled
 20 dB BANDWIDTH: 139.1 kHz

Carrier frequency separation, kHz	Limit, kHz	Margin* kHz	Verdict
192.0	139.1	52.9	Pass


* - Margin = Carrier frequency separation – specification limit.

Reference numbers of test equipment used

HL 5376	HL 1809	HL 3901	HL 5611	HL 5609	HL 4135		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.

Plot 7.2.1 Carrier frequency separation

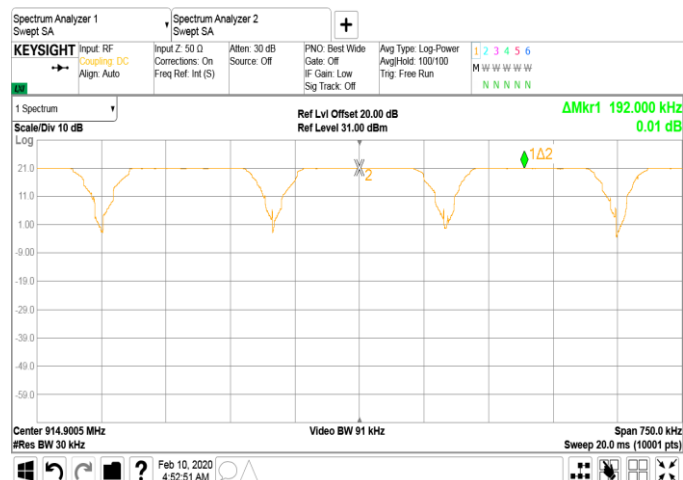



Test specification: Section 15.247(a)1, RSS-247 section 5.1(c), Number of hopping frequencies			
Test procedure: ANSI C63.10, section 7.8.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 01-Mar-20 - 03-Mar-20			
Temperature: 24.1 °C	Relative Humidity: 39 %	Air Pressure: 1023 hPa	Power: 3.6 VDC
Remarks:			

7.3 Number of hopping frequencies

7.3.1 General

This test was performed to calculate the number of hopping frequencies used by the EUT. Specification test limits are given in Table 7.3.1.


Table 7.3.1 Minimum number of hopping frequencies

Assigned frequency range, MHz	Number of hopping frequencies
902.0 – 928.0	50 (if the 20 dB bandwidth is less than 250 kHz) 25 (if the 20 dB bandwidth is 250 kHz or greater)

7.3.2 Test procedure

- 7.3.2.1** The EUT was set up as shown in Figure 7.3.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.3.2.2** Initially the spectrum analyzer span was set equal to frequency band of operation and the resolution bandwidth was set to less than 30% of the channel spacing. If the separate hopping channels were not clearly resolved the frequency band of operation was broken to sections and the resolution bandwidth was set to less than 30% of the channel spacing.
- 7.3.2.3** The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.3.2.4** The number of frequency hopping channels was calculated as provided in Table 7.3.2 and associated plots.

Figure 7.3.1 Hopping frequencies test setup





HERMON LABORATORIES

Report ID: TELRAD_FCC.35688_Hybrid

Date of Issue: 23-Jun-20

Test specification: Section 15.247(a)1, RSS-247 section 5.1(c), Number of hopping frequencies			
Test procedure: ANSI C63.10, section 7.8.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 01-Mar-20 - 03-Mar-20			
Temperature: 24.1 °C	Relative Humidity: 39 %	Air Pressure: 1023 hPa	Power: 3.6 VDC
Remarks:			

Table 7.3.2 Hopping frequencies test results

ASSIGNED FREQUENCY: 902.0- 928.0 MHz
 MODULATION: LoRa
 BIT RATE: 1200 bps
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 30 kHz
 VIDEO BANDWIDTH: \geq RBW
 FREQUENCY HOPPING: Enabled



Maximum Number of hopping frequencies	Minimum number of hopping frequencies	Margin	Verdict
128	NA for Hybrid mode	NA	Pass

Reference numbers of test equipment used

HL 3818	HL 4071	HL 3901					
---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.

Plot 7.3.1 Number of hopping frequencies

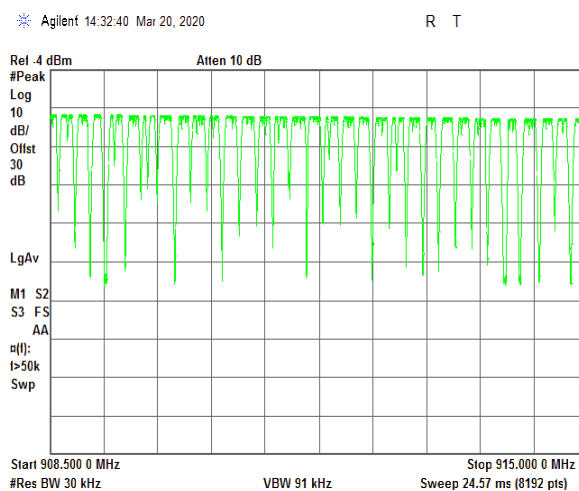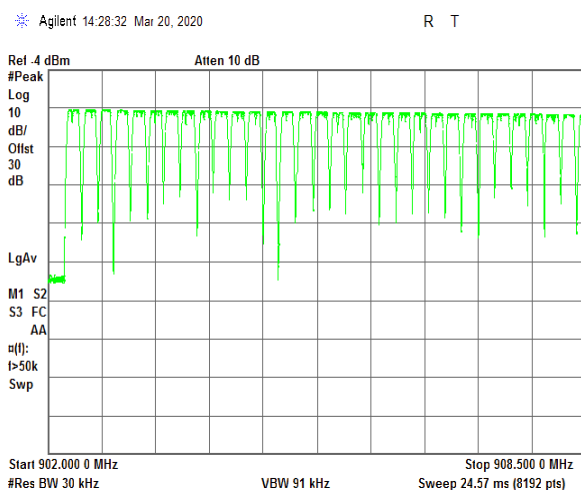




HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-247 section 5.1(c), Number of hopping frequencies			
Test procedure: ANSI C63.10, section 7.8.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 01-Mar-20 - 03-Mar-20			
Temperature: 24.1 °C	Relative Humidity: 39 %	Air Pressure: 1023 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.3.2 Number of hopping frequencies


Agilent 14:45:32 Mar 20, 2020

R T

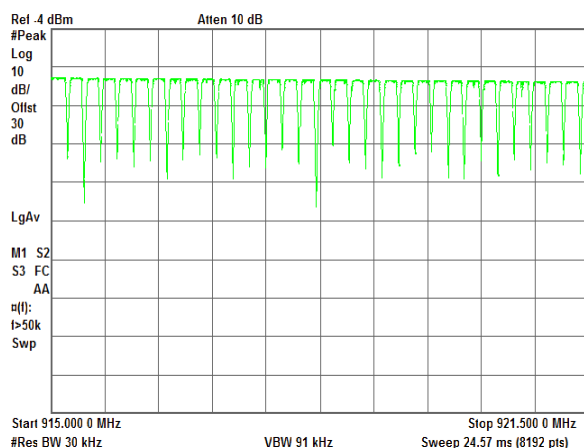

Agilent 14:49:11 Mar 20, 2020

R T

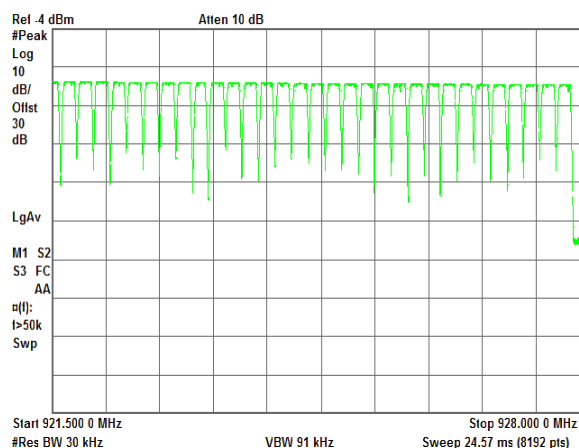



Test specification: Section 15.247(a)1, RSS-247 section 5.1(c), Average time of occupancy			
Test procedure: ANSI C63.10, section 7.8.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 10-Feb-20 - 05-Mar-20			
Temperature: 24.2 °C	Relative Humidity: 48 %	Air Pressure: 1009 hPa	Power: 3.6 VDC
Remarks:			

7.4 Average time of occupancy

7.4.1 General

This test was performed to calculate the average time of occupancy (dwell time) on any frequency channel of the EUT. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Average time of occupancy limits

Assigned frequency range, MHz	Maximum average time of occupancy, s	Investigated period*, s	Number of hopping frequencies
902.0 – 928.0	0.4	0.4 × N	4

*N=Number of hopping frequencies

7.4.2 Test procedure

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized with frequency hopping function enabled and its proper operation was checked.


7.4.2.2 The spectrum analyzer span was set to zero centered on a hopping channel.

7.4.2.3 The single transmission duration and period were measured with oscilloscope.

The average time of occupancy was calculated as the single transmission time multiplied by the investigated period and divided by the (single transmission period x number of hopping frequencies)

7.4.2.4 The test was repeated at each data rate and modulation type as provided in Table 7.4.2 and associated plots.

Figure 7.4.1 Average time of occupancy test setup





Test specification: Section 15.247(a)1, RSS-247 section 5.1(c), Average time of occupancy			
Test procedure: ANSI C63.10, section 7.8.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 10-Feb-20 - 05-Mar-20			
Temperature: 24.2 °C	Relative Humidity: 48 %	Air Pressure: 1009 hPa	Power: 3.6 VDC
Remarks:			

Table 7.4.2 Average time of occupancy test results

ASSIGNED FREQUENCY: 902.0 – 928.0 MHz
 MODULATION: LoRa
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 30 kHz
 VIDEO BANDWIDTH: 100 kHz
 NUMBER OF HOPPING FREQUENCIES: 4
 INVESTIGATED PERIOD: 1.6 s
 FREQUENCY HOPPING: Enabled

Carrier frequency, MHz	Single transmission duration, s	Number of transmission within investigated period	Average time of occupancy*, s	Bit rate, kbps	Limit, s	Margin, s**	Verdict
902.3	0.3725	1	0.3725	1.2	0.4	-0.0275	Pass
902.3	0.0621	3	0.1863	6.8	0.4	-0.2137	Pass

* - Average time of occupancy = Single transmission duration per hop x number of transmissions at given hopping frequency in the Investigated period.

See ANSI C63.10 section 7.8.4 Time of occupancy (dwell time).

** - Margin = Average time of occupancy – specification limit.

Reference numbers of test equipment used

HL 5376	HL 3901	HL 5611	HL 5609	HL 4135			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Report ID: TELRAD_FCC.35688_Hybrid



Date of Issue: 23-Jun-20

Test specification: Section 15.247(a)1, RSS-247 section 5.1(c), Average time of occupancy			
Test procedure: ANSI C63.10, section 7.8.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 10-Feb-20 - 05-Mar-20			
Temperature: 24.2 °C	Relative Humidity: 48 %	Air Pressure: 1009 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.4.1 Single transmission duration

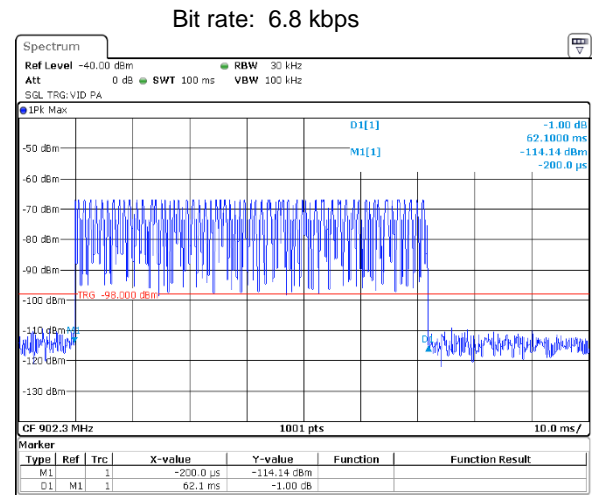

Plot 7.4.2 Number of transmission within investigated period

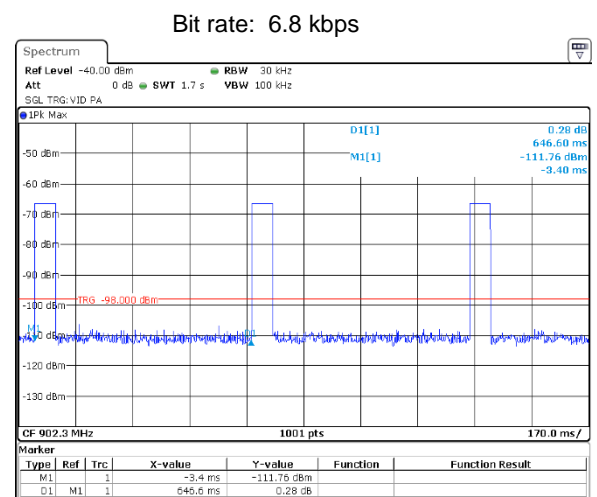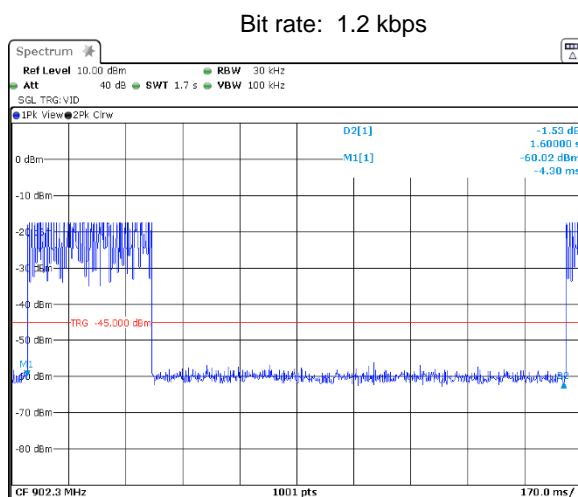



Test specification: Section 15.247(b)2, RSS-247 section 5.4(a), Peak output power			
Test procedure: ANSI C63.10, section 11.9.2.2.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

7.5 Peak output power

7.5.1 General

This test was performed to measure the maximum peak output power at the transmitter RF antenna connector. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak output power limits

Assigned frequency range, MHz	Peak output power*		Maximum antenna gain, dBi
	W	dBm	
902.0 – 928.0	0.25 (<50 hopping channels)	24.0(<50 hopping channels)	6.0*
	1.0 (≥50 hopping channels)	30.0 (≥50 hopping channels)	

*- If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.


7.5.2 Test procedure

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

7.5.2.2 The EUT was adjusted to produce maximum available for end user RF output power.

7.5.2.3 The frequency span of spectrum analyzer was set approximately 1.5 times wider than 20 dB bandwidth of the EUT and the resolution bandwidth was set 1-5 % of the OBW. The spectrum analyzer trace was allowed to stabilize and the maximum peak output power was measured as provided in Table 7.5.2 and associated plots.

Figure 7.5.1 Peak output power test setup





Test specification: Section 15.247(b)2, RSS-247 section 5.4(a), Peak output power			
Test procedure: ANSI C63.10, section 11.9.2.2.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Table 7.5.2 Peak output power test results

ASSIGNED FREQUENCY: 902.0 – 928.0 MHz
 MODULATION: LoRa
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: RMS with trace averaging
 EUT 20 dB BANDWIDTH: 142.1kHz
 RESOLUTION BANDWIDTH: 1 MHz
 VIDEO BANDWIDTH: 3 MHz
 FREQUENCY HOPPING: Disabled

BIT RATE: 1.2kbps

Carrier frequency, MHz	Spectrum analyzer reading, dBm	External attenuation, dB	Average factor, dB	Peak output power, dBm	Limit, dBm	Margin*, dB	Verdict
902.3	15.98	Included	3.03	19.01	24.0	-4.99	Pass
915.0	16.42	Included	3.03	19.45	24.0	-4.55	Pass
927.7	16.50	Included	3.03	19.53	24.0	-4.47	Pass

BIT RATE: 6.8 kbps

Carrier frequency, MHz	Spectrum analyzer reading, dBm	External attenuation, dB	Average factor, dB	Peak output power, dBm	Limit, dBm	Margin*, dB	Verdict
902.3	10.57	Included	8.25	18.82	24.0	-5.18	Pass
915.0	11.22	Included	8.25	19.47	24.0	-4.53	Pass
927.7	10.99	Included	8.25	19.24	24.0	-4.76	Pass

* - Margin = Peak output power – specification limit.

Table 7.5.3 Average factor calculation

Transmission pulse		Duty cycle*	Average factor, dB
Duration, ms	Period, ms		
Bitrate 1.2 kbps			
432	867	0.498	3.03
Bitrate 6.8 kbps			
71	474	0.15	8.25

*- Duty cycle factor = $T_{\text{on}} / (T_{\text{on}} + T_{\text{off}})$

Reference numbers of test equipment used

HL 5376	HL 1809	HL 3901	HL 5611	HL 5609	HL 4135		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.





HERMON LABORATORIES

Report ID: TELRAD_FCC.35688_Hybrid



Date of Issue: 23-Jun-20

Test specification: Section 15.247(b)2, RSS-247 section 5.4(a), Peak output power			
Test procedure: ANSI C63.10, section 11.9.2.2.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.5.1 Peak output power at low frequency

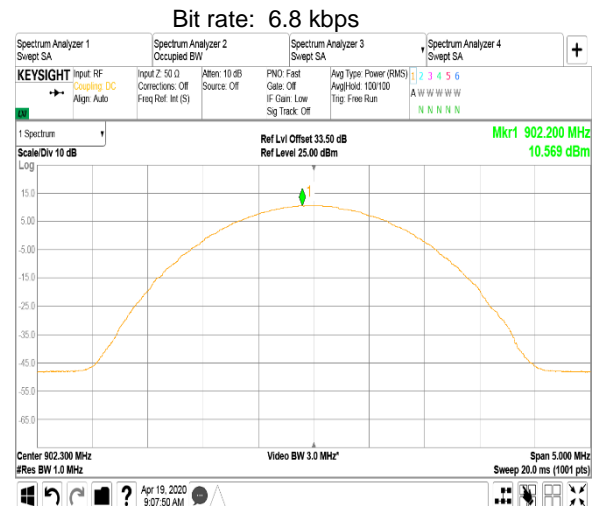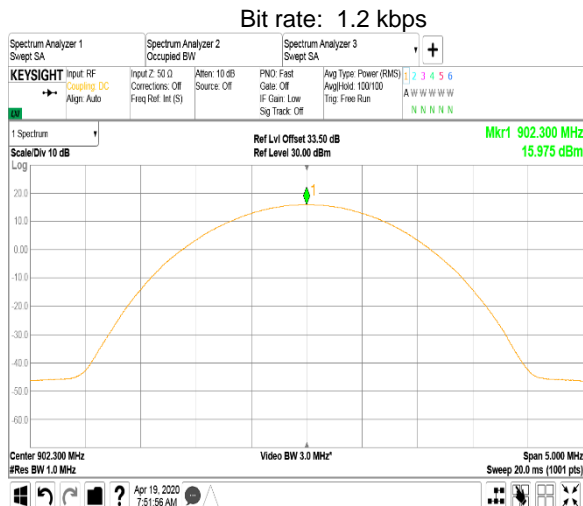

Plot 7.5.2 Peak output power at mid frequency

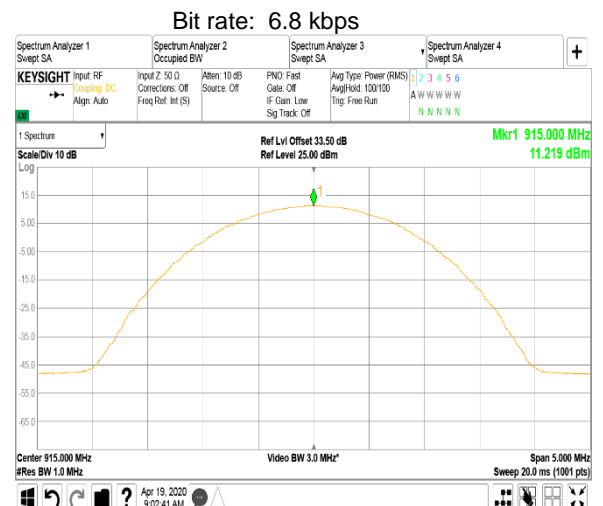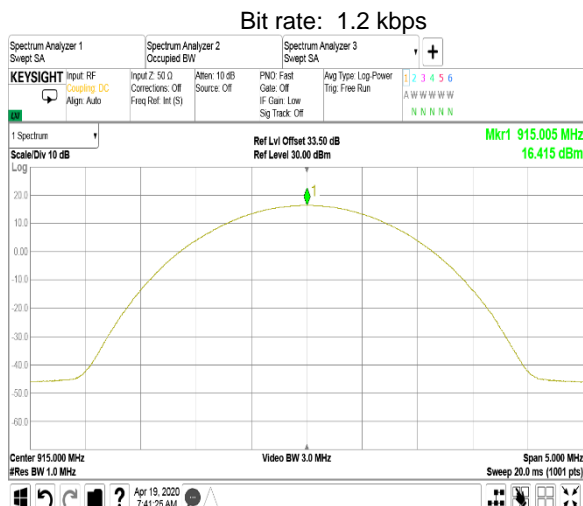





HERMON LABORATORIES

Report ID: TELRAD_FCC.35688_Hybrid
Date of Issue: 23-Jun-20

Test specification:		Section 15.247(b)2, RSS-247 section 5.4(a), Peak output power	
Test procedure:		ANSI C63.10, section 11.9.2.2.4	
Test mode:		Verdict: PASS	
Date(s):			
29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.5.3 Peak output power at high frequency

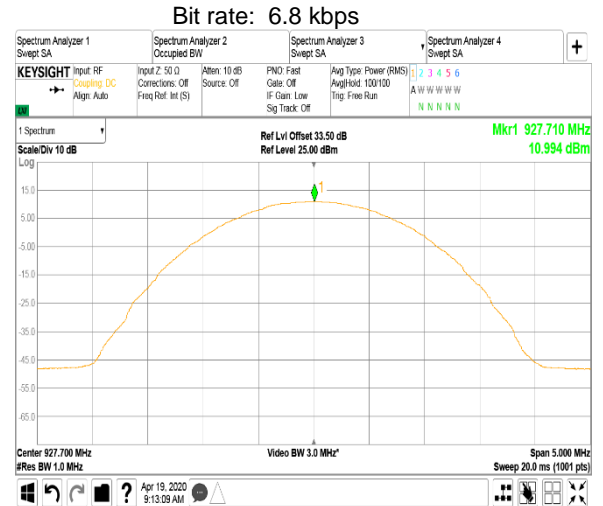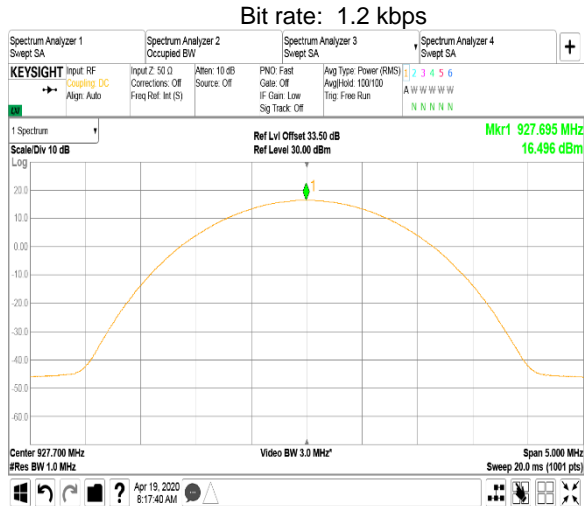



HERMON LABORATORIES


Report ID: TELRAD_FCC.35688_Hybrid

Date of Issue: 23-Jun-20


Test specification: Section 15.247(b)2, RSS-247 section 5.4(a), Peak output power			
Test procedure: ANSI C63.10, section 11.9.2.2.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.5.4 Transmission pulse duration and pulse period

Bit rate: 1.2 kbps

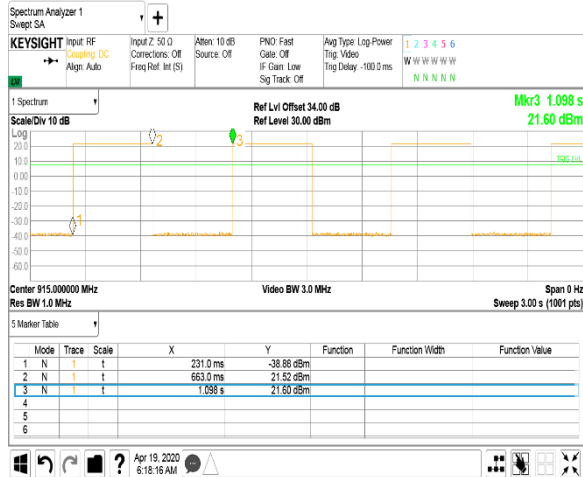

Bit rate: 6.8 kbps

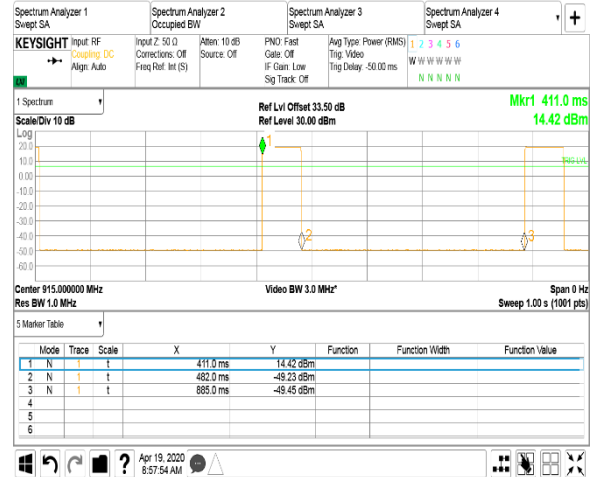



Test specification: Section 15.247(e), RSS-247 section 5.2(b), Peak power density			
Test procedure: ANSI C63.10, section 11.10.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

7.6 Peak spectral power density

7.6.1 General

This test was performed to measure the peak spectral power density at the transmitter RF antenna connector. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm
902.0 – 928.0	3.0	8.0

7.6.2 Test procedure


7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized and its proper operation was checked.

7.6.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.6.2.3 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in peak hold mode with resolution bandwidth set to 3.0 kHz, video bandwidth wider than resolution bandwidth, auto sweep time and sufficient number of sweeps was allowed for trace stabilization.

7.6.2.4 The average detector with power averaging mode was used over a minimum of 100 traces. The peak marker function was used to determine the maximum power spectral density. To compute the average PSD during the actual transmission time the average factor was added to the measured values of PSD and the results provided in Table 7.6.2 and associated plots.

Figure 7.6.1 Peak spectral power density test setup





Test specification: Section 15.247(e), RSS-247 section 5.2(b), Peak power density			
Test procedure: ANSI C63.10, section 11.10.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Table 7.6.2 Peak spectral power density test results

ASSIGNED FREQUENCY: 902.0 – 928.0 MHz
MODULATION: LoRa
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
DETECTOR USED: Average
RESOLUTION BANDWIDTH: 3 kHz
VIDEO BANDWIDTH: 9.1 kHz

BIT RATE: 1.2 kbps

Carrier frequency, MHz	Spectrum analyzer reading, dBm	External attenuation, dB	Average factor, dB	Peak power density, dB(mW/3 kHz)**	Limit, dBm	Margin*, dB	Verdict
902.3	4.32	Included	3.03	7.35	8.0	-0.65	Pass
915.0	4.30	Included	3.03	7.33	8.0	-0.67	Pass
927.7	3.81	Included	3.03	6.84	8.0	-1.16	Pass

BIT RATE: 6.8 kbps

Carrier frequency, MHz	Spectrum analyzer reading, dBm	External attenuation, dB	Average factor, dB	Peak power density, dB(mW/3 kHz)**	Limit, dBm	Margin*, dB	Verdict
902.3	-1.63	Included	8.25	6.62	8.0	-1.38	Pass
915.0	-1.03	Included	8.25	7.22	8.0	-0.78	Pass
927.7	-1.53	Included	8.25	6.72	8.0	-1.28	Pass

* - Margin = Peak power density – specification limit.

** - The peak power density = SA reading + Average factor, where Average factor = $10\log^*(1/DC)$.

Table 7.6.3 Average factor calculation

Transmission pulse		Duty cycle*	Average factor, dB
Duration, ms	Period, ms		
Bitrate 1.2 kbps			
432	867	0.498	3.03
Bitrate 6.8 kbps			
71	474	0.15	8.25

*- Duty cycle factor = $T_{\text{on}} / (T_{\text{on}} + T_{\text{off}})$

Reference numbers of test equipment used

HL 3901	HL 4071	HL 4135	HL 5376				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.





HERMON LABORATORIES

Report ID: TELRAD_FCC.35688_Hybrid



Date of Issue: 23-Jun-20

Test specification: Section 15.247(e), RSS-247 section 5.2(b), Peak power density			
Test procedure: ANSI C63.10, section 11.10.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.6.1 Peak spectral power density at low frequency

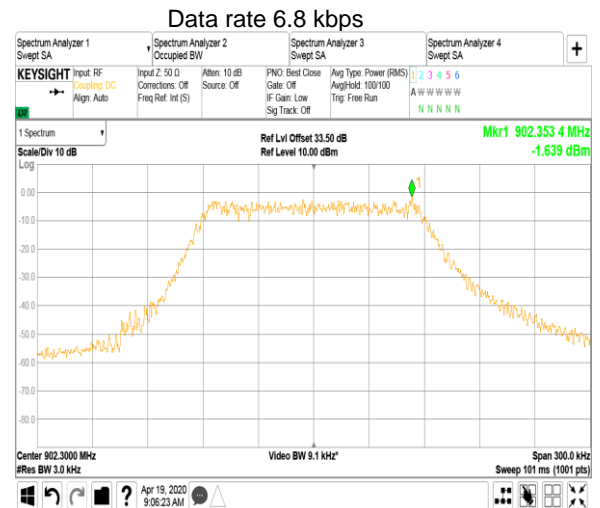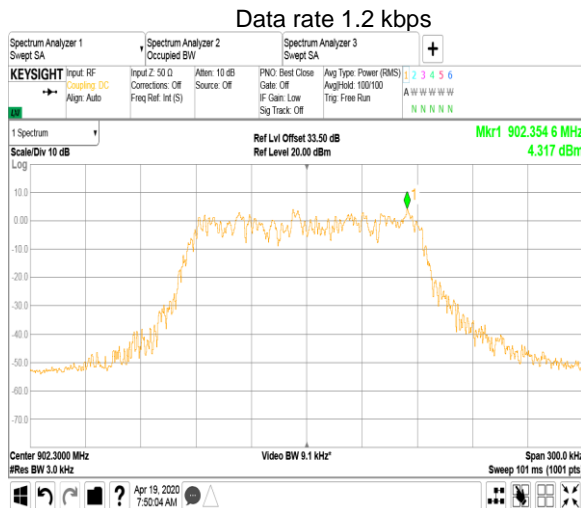

Plot 7.6.2 Peak spectral power density at mid frequency

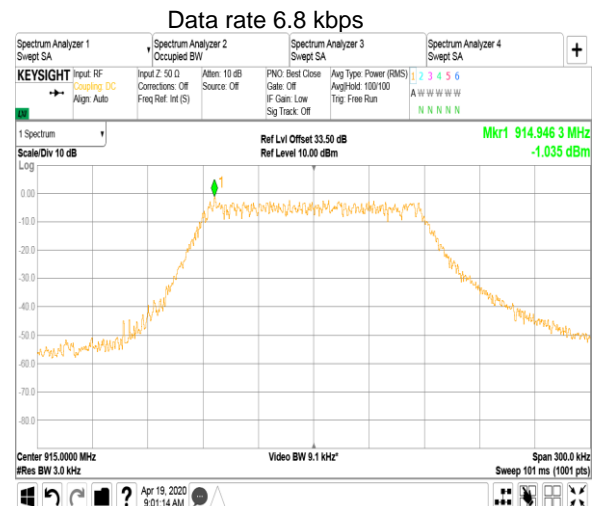
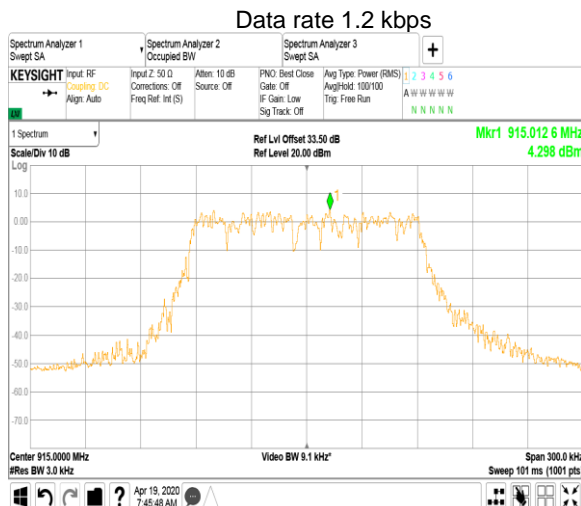






HERMON LABORATORIES

Test specification:		Section 15.247(e), RSS-247 section 5.2(b), Peak power density	
Test procedure:		ANSI C63.10, section 11.10.5	
Test mode:		Compliance	Verdict: PASS
Date(s):		29-Jan-20	
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.6.3 Peak spectral power density at high frequency

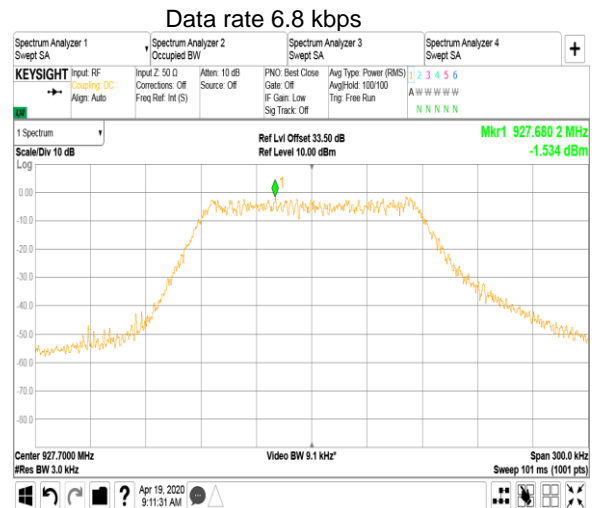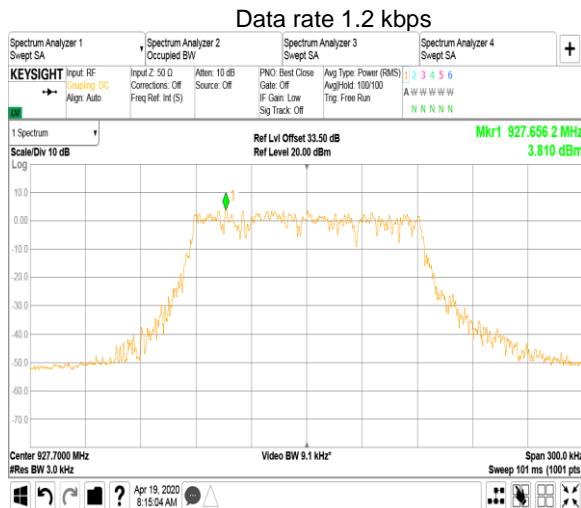

Plot 7.6.4 Transmission pulse duration and pulse period

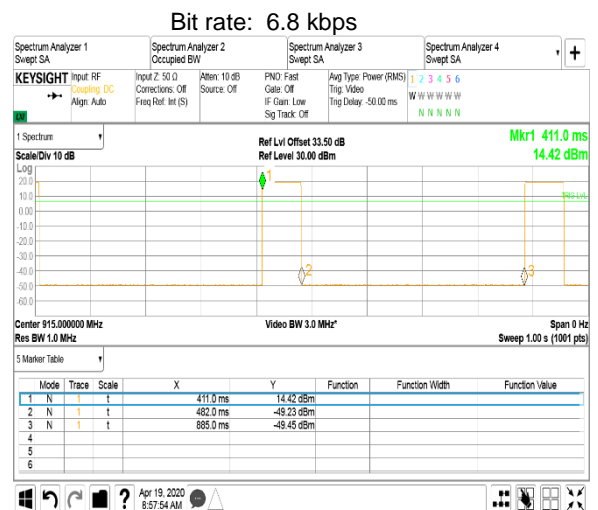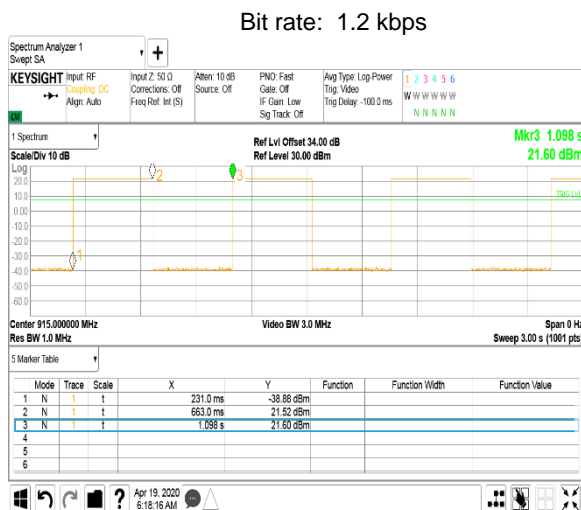



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

7.7 Field strength of spurious emissions

7.7.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.7.1

Table 7.7.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)***			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	30.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S2} = \text{Lim}_{S1} + 40 \log (S1/S2),$$

where S₁ and S₂ – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.7.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.7.2.1 The EUT was set up as shown in Figure 7.7.1, energized and the performance check was conducted.

7.7.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.7.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.7.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.7.3.1 The EUT was set up as shown in Figure 7.7.2, Figure 7.7.3, energized and the performance check was conducted.

7.7.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.7.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Figure 7.7.1 Setup for spurious emission field strength measurements below 30 MHz


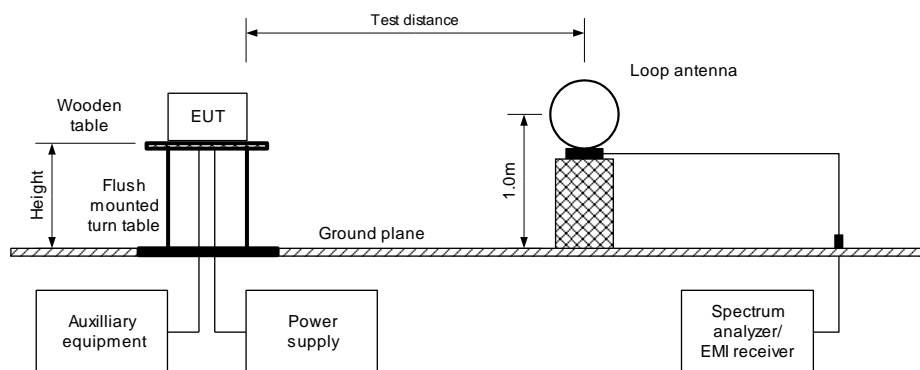



Figure 7.7.2 Setup for spurious emission field strength measurements from 30 to 1000 MHz



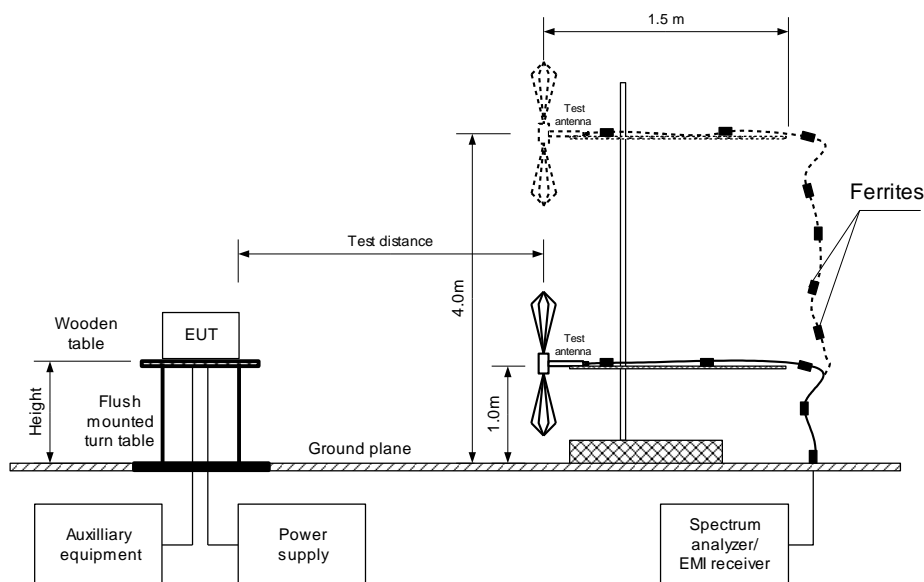

Test specification:		Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10, sections 6.5, 6.6	
Test mode:		Verdict: PASS	
Date(s):			
29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Figure 7.7.3 Setup for spurious emission field strength measurements above 1000 MHz

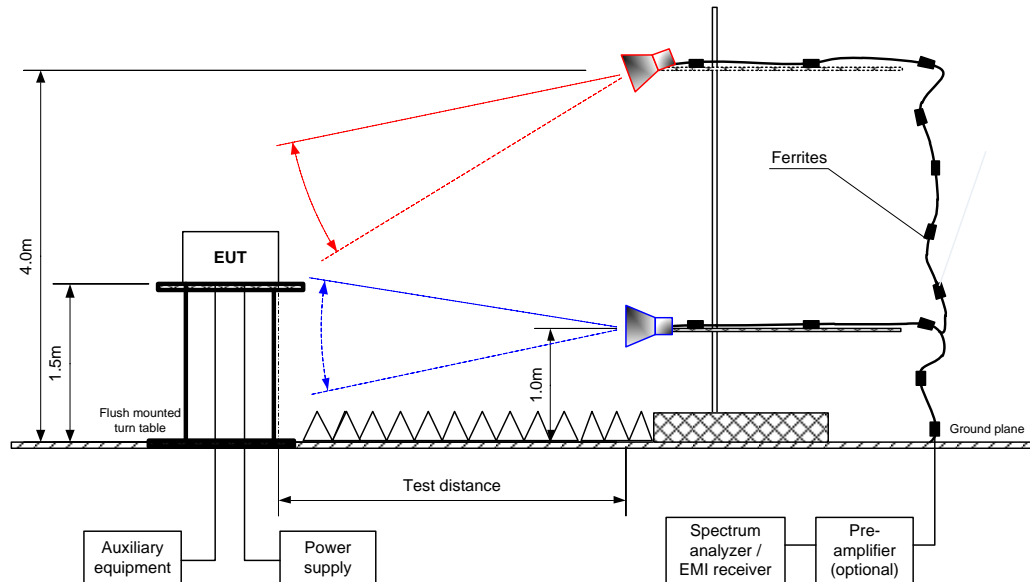



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Table 7.7.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY: 902.0 – 928.0 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 - 10000 MHz
 TEST DISTANCE: 3 m
 MODULATION: LoRa
 BIT RATE: 1200 bps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

FREQUENCY HOPPING: Disabled

Frequency Hopping					Disabled				
Frequency, MHz	Field strength of spurious, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency 902.3 MHz									
6316.49000	60.76	V	1.80	-41	118.37	57.61	30.0	27.61	Pass
7218.06983	56.28	V	2.40	-4		62.09		32.09	
Mid carrier frequency 915.0 MHz									
5489.86000	62.59	V	1.28	-25	118.13	55.54	30.0	25.54	Pass
6405.05017	57.40	H	2.32	-68		60.73		30.73	
High carrier frequency 927.3 MHz									
5565.75250	63.09	V	2.07	-35	119.00	55.91	30.0	25.91	Pass
6493.88983	58.39	V	1.28	-77		60.61		30.61	

*- EUT front panel refers to 0 degrees position of turntable.

** - Margin = Attenuation below carrier – specification limit.



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Table 7.7.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY: 902.0 – 928.0 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 – 10000 MHz
 TEST DISTANCE: 3 m
 MODULATION: LoRa
 MODULATING SIGNAL: PRBS
 BIT RATE: 1200 bps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide
 FREQUENCY HOPPING: Disabled

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength(VBW=10 Hz)				Verdict
	Polarization	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
Low carrier frequency 902.3 MHz											
2706.75983	V	1.54	-13.0	49.14	74.0	-24.86	45.37	NA	54.0	-8.63	Pass
5413.65000	V	2.07	-43.0	57.73	74.0	-16.27	49.45	NA	54.0	-4.55	
Mid carrier frequency 915.0 MHz											
2745.00483	V	1.28	19.0	47.21	74.0	-26.79	43.45	NA	54.0	-10.55	Pass
7319.76016	V	1.54	-10.0	57.86	74.0	-16.14	46.87	NA	54.0	-7.13	
High carrier frequency 927.3 MHz											
2782.99016	V	2.06	9.0	44.20	74.0	-29.80	38.73	NA	54.0	-15.27	Pass
7421.45000	V	2.41	-6.0	56.56	74.0	-17.44	45.57	NA	54.0	-8.43	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Measured field strength - specification limit.

***- Margin = Calculated field strength - specification limit,
where Calculated field strength = Measured field strength + average factor.

Table 7.7.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
105	463	NA	NA	NA	0

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Table 7.7.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY: 902.0 – 928.0 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 TEST DISTANCE: 3 m
 MODULATION: LoRa
 BIT RATE: 1200 bps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: > Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 FREQUENCY HOPPING: Disabled

Frequency hopping					Disabled			
Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
Low carrier frequency 902.3 MHz								
971.032	43.29	37.26	54.0	-16.74	Vertical	1.02	159	Pass
Mid carrier frequency 915.0 MHz								
613.762	36.56	30.52	46.0	-15.48	Vertical	1.32	60	Pass
High carrier frequency 927.3 MHz								
612.389	36.85	30.55	46.0	-15.45	Vertical	1.41	51	Pass

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.



HERMON LABORATORIES

Report ID: TELRAD_FCC.35688_Hybrid
Date of Issue: 23-Jun-20

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Table 7.7.6 Restricted bands according to FCC section 15.205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.2675 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Table 7.7.7 Restricted bands according to RSS-Gen

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.1905	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.29 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.2675 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6

Reference numbers of test equipment used

HL 0446	HL 3346	HL 3903	HL 4011	HL 4360	HL 4917	HL 4933	HL 5085
HL 5284	HL 5288	HL 5309	HL 5311	HL 5372	HL 5376	HL 5405	

Full description is given in Appendix A.



HERMON LABORATORIES


Report ID: TELRAD_FCC.35688_Hybrid

Date of Issue: 23-Jun-20

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			


Plot 7.7.1 Radiated emission measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal

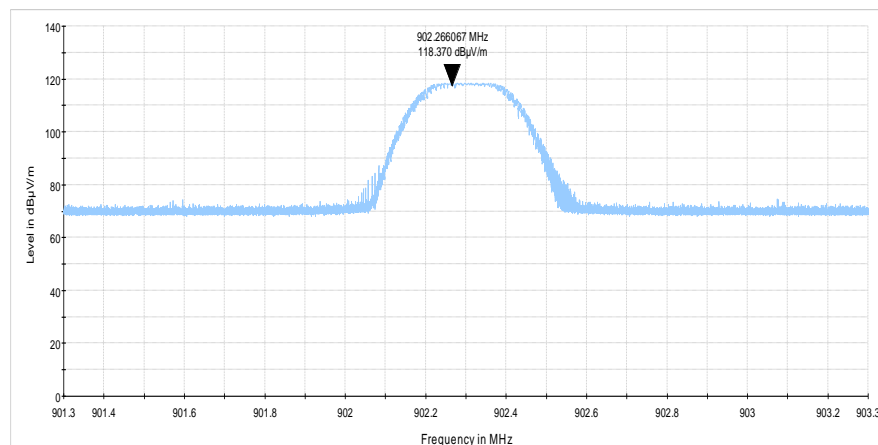

Plot 7.7.2 Radiated emission measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal

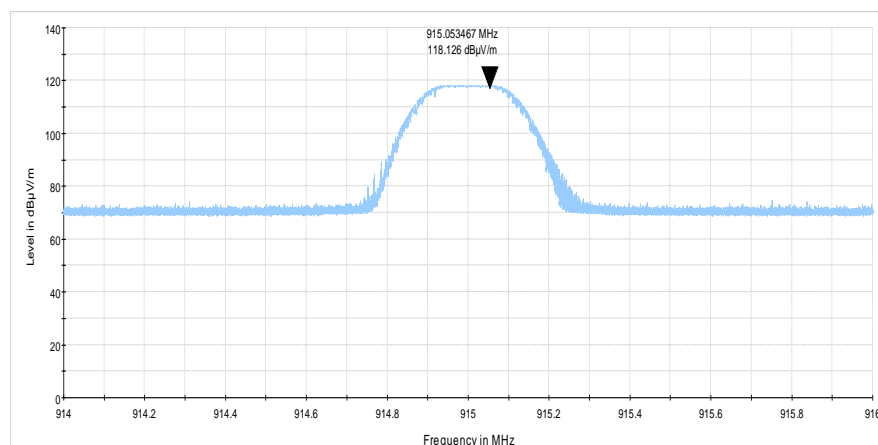



HERMON LABORATORIES


Report ID: TELRAD_FCC.35688_Hybrid

Date of Issue: 23-Jun-20

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			


Plot 7.7.3 Radiated emission measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal

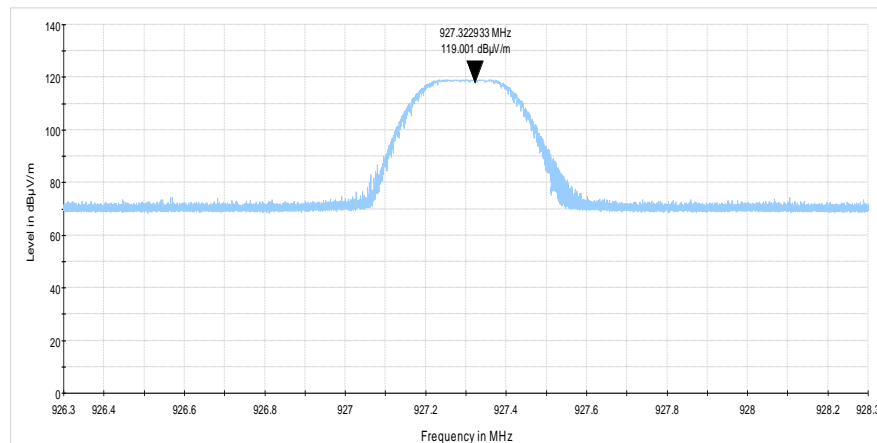

Plot 7.7.4 Radiated emission measurements from 9 kHz to 30 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

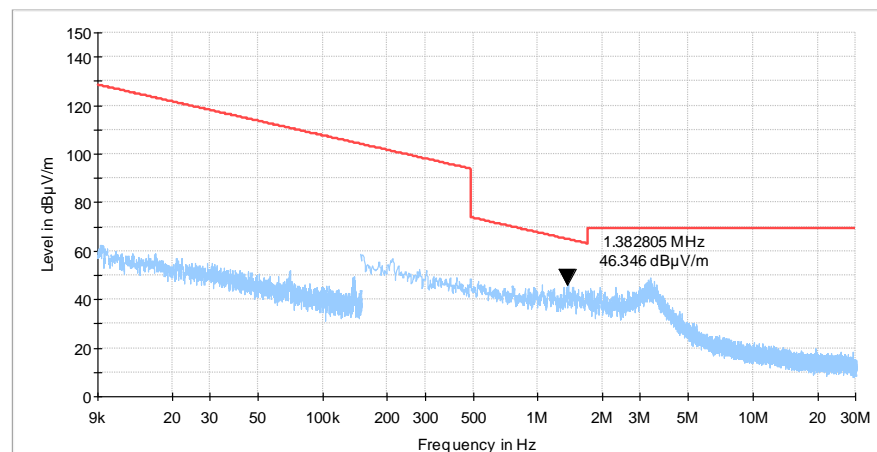



HERMON LABORATORIES


Report ID: TELRAD_FCC.35688_Hybrid

Date of Issue: 23-Jun-20

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			


Plot 7.7.5 Radiated emission measurements from 9 kHz to 30 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

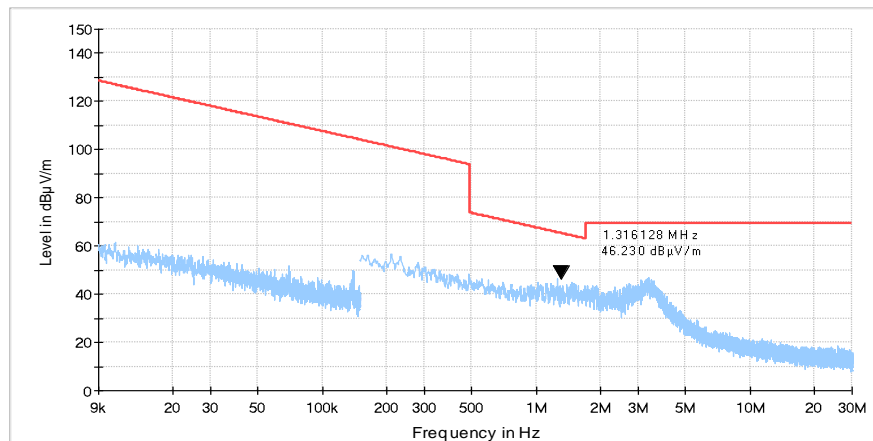

Plot 7.7.6 Radiated emission measurements from 9 kHz to 30 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

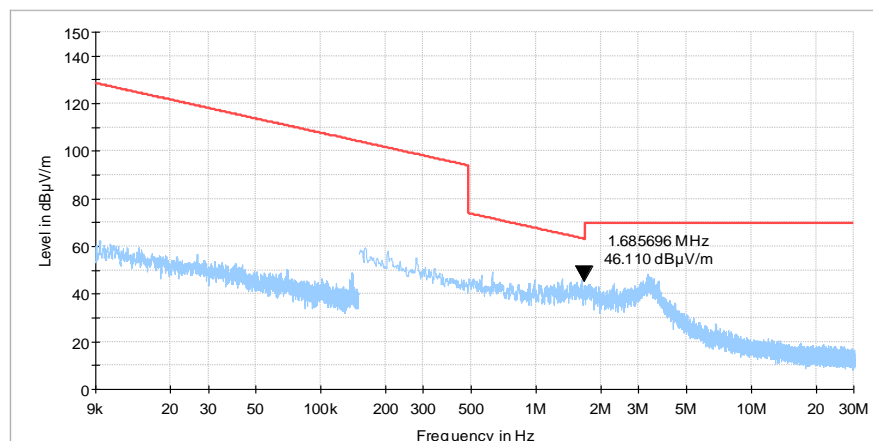



HERMON LABORATORIES


Report ID: TELRAD_FCC.35688_Hybrid

Date of Issue: 23-Jun-20

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			


Plot 7.7.7 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

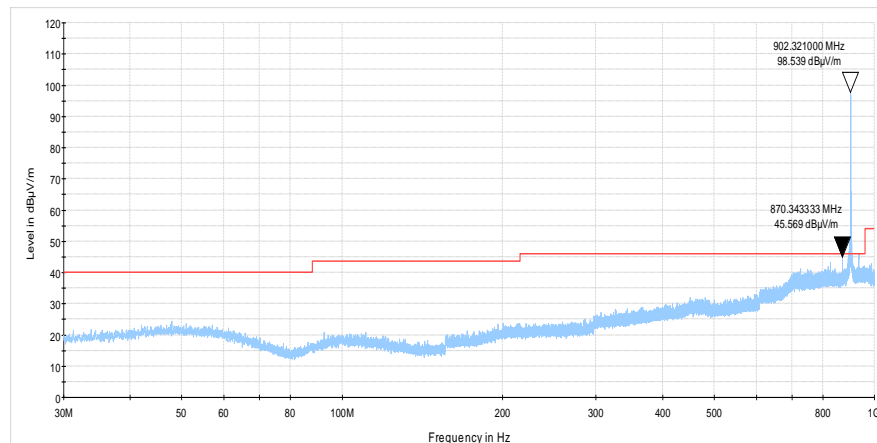

Plot 7.7.8 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

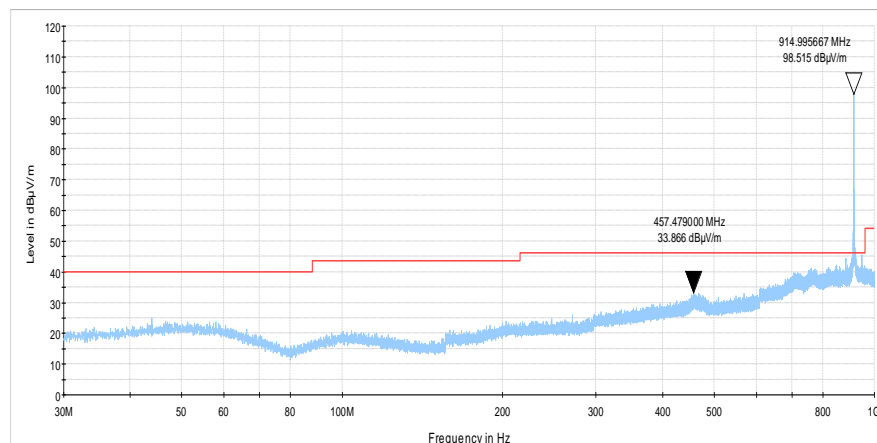



HERMON LABORATORIES


Report ID: TELRAD_FCC.35688_Hybrid

Date of Issue: 23-Jun-20

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			


Plot 7.7.9 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

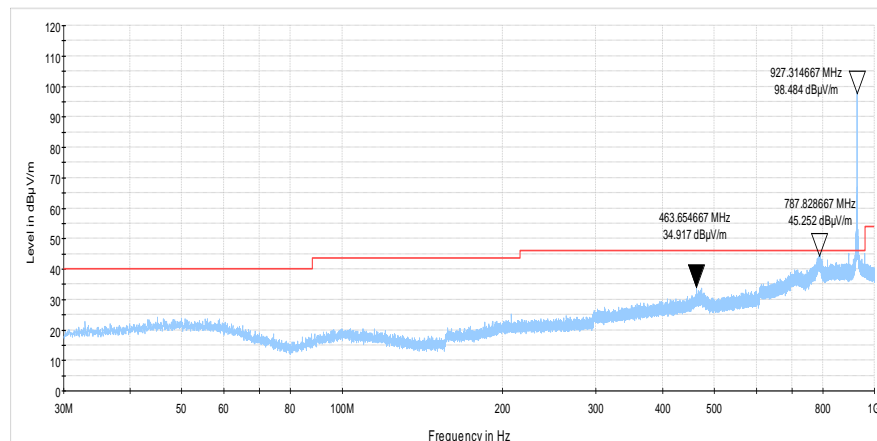

Plot 7.7.10 Radiated emission measurements from 1000 to 3000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

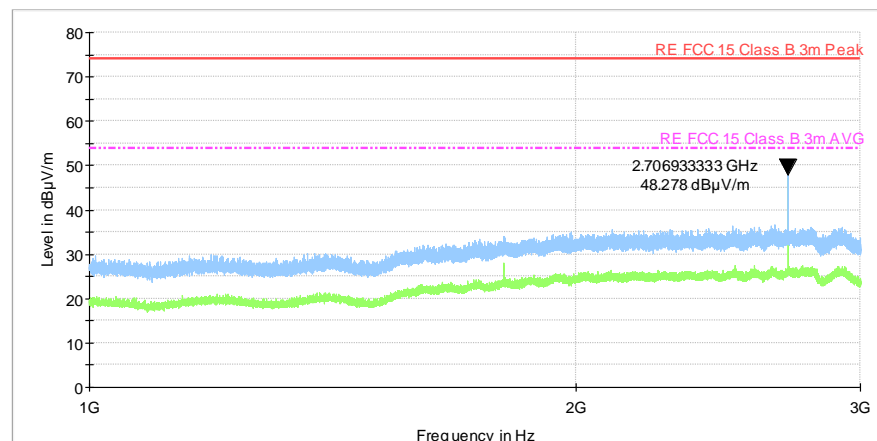





Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.7.11 Radiated emission measurements from 1000 to 3000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

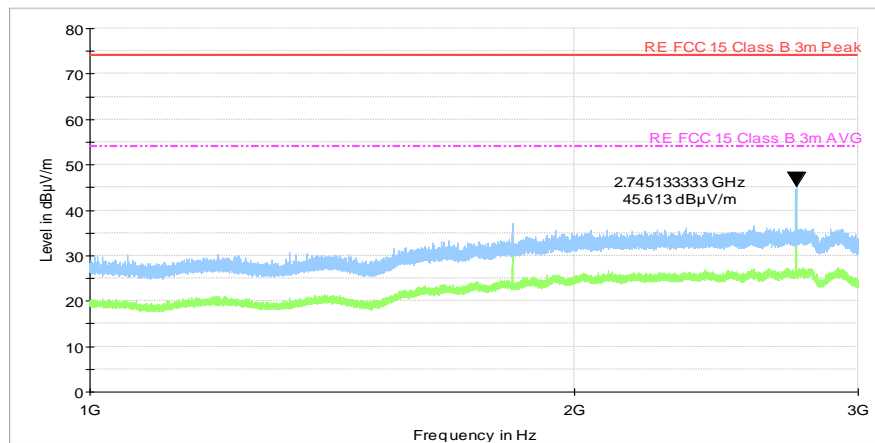**Plot 7.7.12 Radiated emission measurements from 1000 to 3000 MHz at the high carrier frequency**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

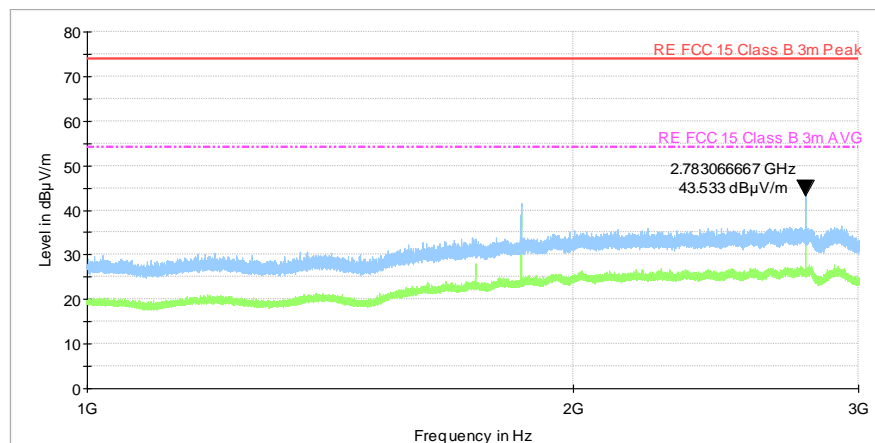




HERMON LABORATORIES

Report ID: TELRAD_FCC.35688_Hybrid
Date of Issue: 23-Jun-20

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			


Plot 7.7.13 Radiated emission measurements from 3000 to 6000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

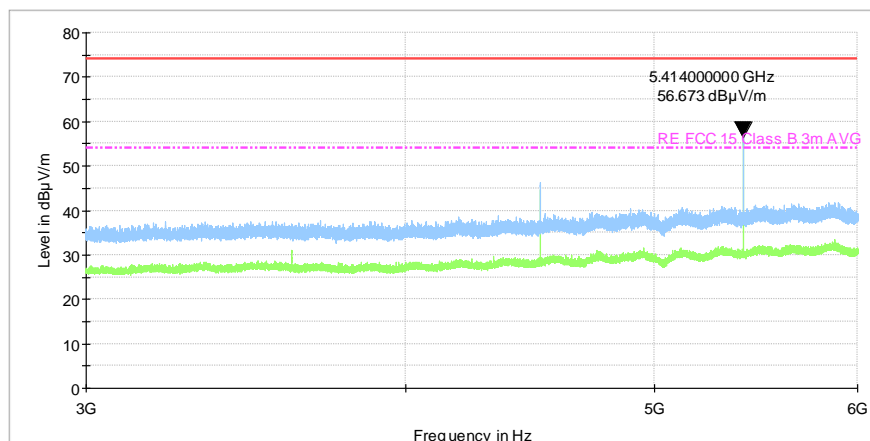

Plot 7.7.14 Radiated emission measurements from 3000 to 6000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

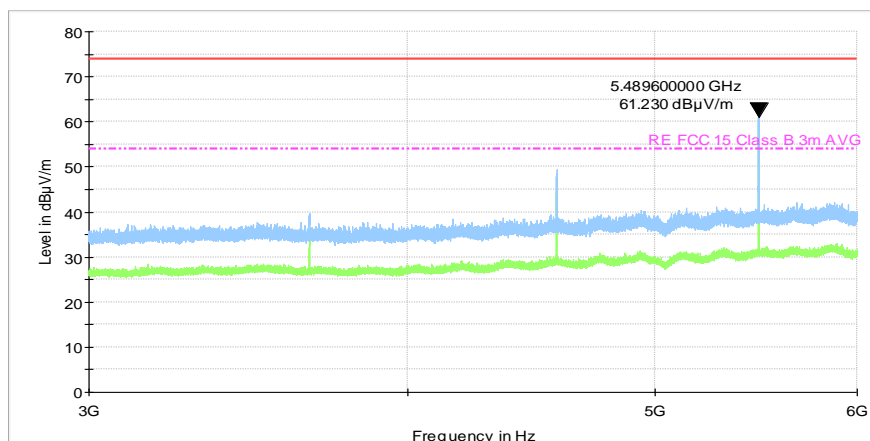



HERMON LABORATORIES


Report ID: TELRAD_FCC.35688_Hybrid

Date of Issue: 23-Jun-20

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			


Plot 7.7.15 Radiated emission measurements from 3000 to 6000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

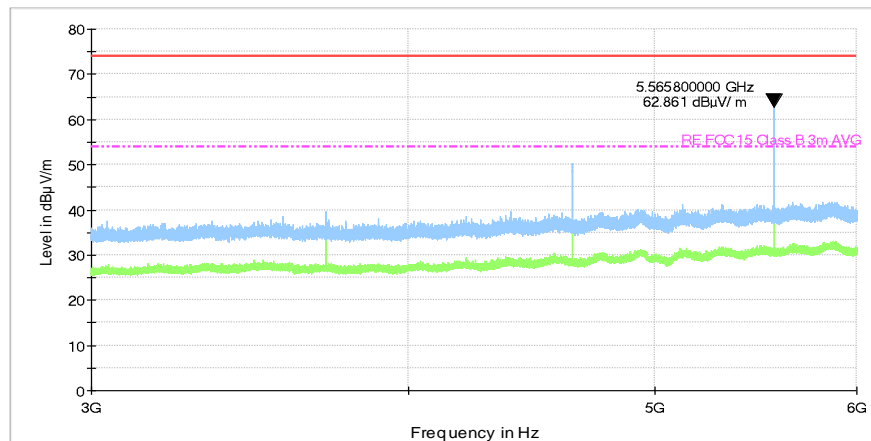

Plot 7.7.16 Radiated emission measurements from 6000 to 10000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

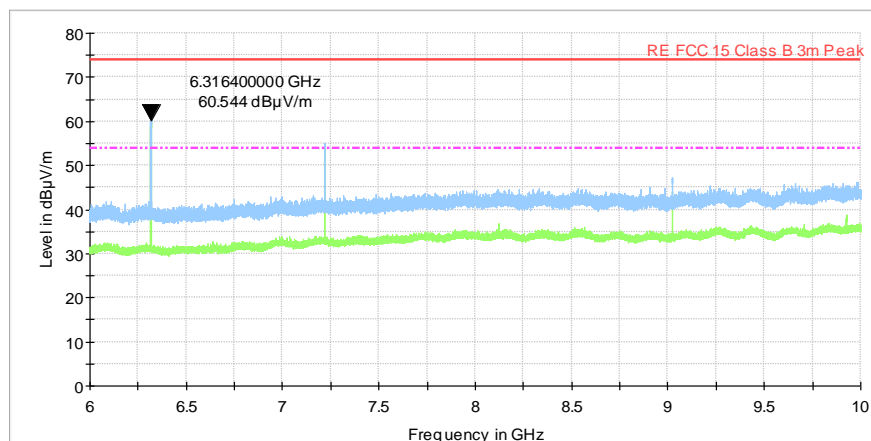





Test specification:		Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10, sections 6.5, 6.6	
Test mode:		Verdict: PASS	
Date(s):			
29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.7.17 Radiated emission measurements from 6000 to 10000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

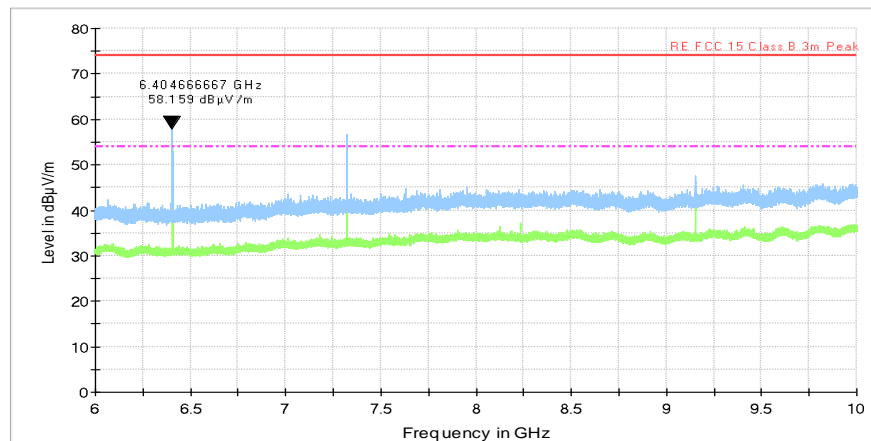**Plot 7.7.18 Radiated emission measurements from 6000 to 10000 MHz at the high carrier frequency**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

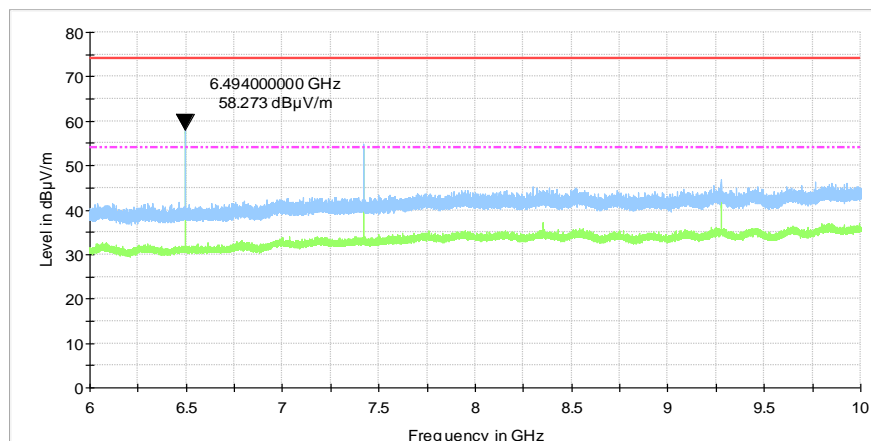




HERMON LABORATORIES

Report ID: TELRAD_FCC.35688_Hybrid


Date of Issue: 23-Jun-20

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 29-Jan-20			
Temperature: 21.2 °C	Relative Humidity: 49 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.7.19 Transmission pulse duration

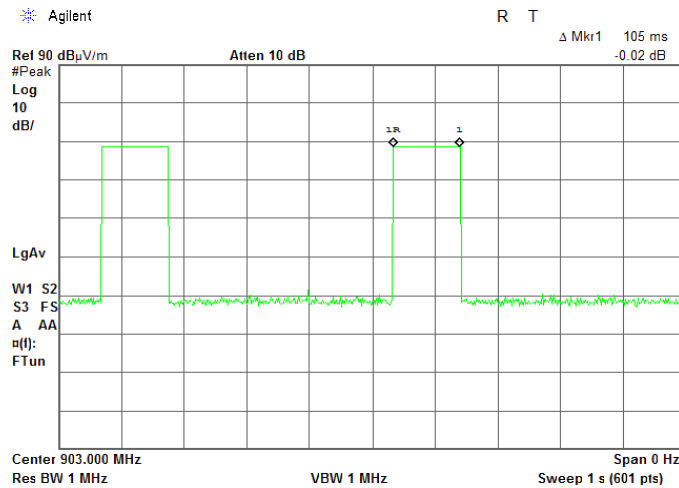

Plot 7.7.20 Transmission pulse period

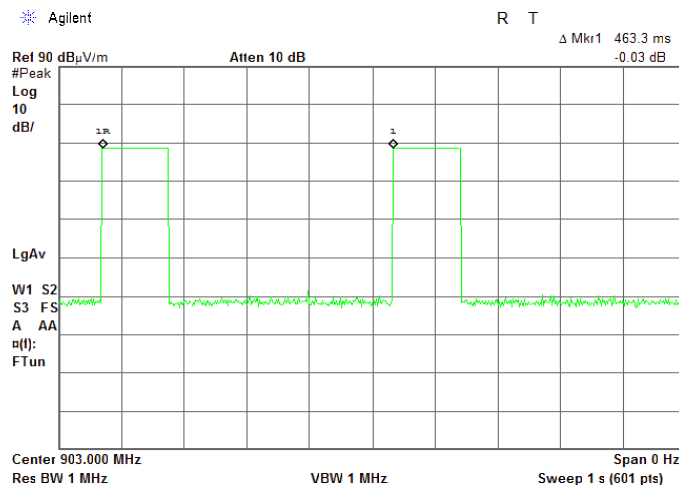



Test specification: Section 15.247(d), RSS-247 section 5.5 Emissions at band edges			
Test procedure: ANSI C63.10 section 6.10			
Test mode: Compliance		Verdict: PASS	
Date(s): 05-Mar-20			
Temperature: 23.4 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.6 VDC
Remarks:			

7.8 Band edge emissions at RF antenna connector

7.8.1 General

This test was performed to measure band edge emissions at RF antenna connector. Specification test limits are given in Table 7.8.1.

Table 7.8.1 Band edge emission limits


Assigned frequency, MHz	Attenuation below carrier*, dBc
902.0 – 928.0	30.0

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.8.2 Test procedure

- 7.8.2.1** The EUT was set up as shown in Figure 7.8.1, energized normally modulated at the maximum data rate with its hopping function disabled and its proper operation was checked.
- 7.8.2.2** The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.8.2.3** The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set to 100 kHz.
- 7.8.2.4** The spectrum analyzer was set in trace averaging mode over a minimum of 100 traces and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.8.2.5** The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.8.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.8.2.6** The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 7.8.2.7** The above procedure was repeated with the frequency hopping function enabled.

Figure 7.8.1 Band edge emission test setup





Test specification:		Section 15.247(d), RSS-247 section 5.5 Emissions at band edges	
Test procedure:		ANSI C63.10 section 6.10	
Test mode:		Verdict: PASS	
Date(s):			
05-Mar-20			
Temperature: 23.4 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.6 VDC
Remarks:			

Table 7.8.2 Band edge emission test results

ASSIGNED FREQUENCY RANGE: 902.0 – 928.0 MHz
 DETECTOR USED: Average with max hold
 MODULATION: LoRa
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz

BIT RATE: 1.2 kbps

Frequency, MHz	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
Frequency hopping disabled						
902.3	-40.72	16.28	57.00	30.0	27.00	Pass
927.7	-33.54	16.36	49.90		19.90	
Frequency hopping enabled						
902.3	-52.13	-1.91	50.22	30.0	20.22	Pass
927.7	-47.66	-1.89	45.77		15.77	

*- Margin = Attenuation below carrier – specification limit.

BIT RATE: 6.8 kbps

Frequency, MHz	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
Frequency hopping disabled						
902.3	-42.07	11.05	53.12	30.0	23.12	Pass
927.7	-38.12	10.47	48.59		18.59	
Frequency hopping enabled						
902.3	-58.03	-3.45	54.58	30.0	24.58	Pass
927.7	-52.76	-3.97	48.79		18.79	

*- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used

HL 5376	HL 5410	HL 5085					
---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Report ID: TELRAD_FCC.35688_Hybrid


Date of Issue: 23-Jun-20

Test specification: Section 15.247(d), RSS-247 section 5.5 Emissions at band edges			
Test procedure: ANSI C63.10 section 6.10			
Test mode: Compliance		Verdict: PASS	
Date(s): 05-Mar-20			
Temperature: 23.4 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.8.1 The highest band edge emission at low carrier frequency with hopping function disabled

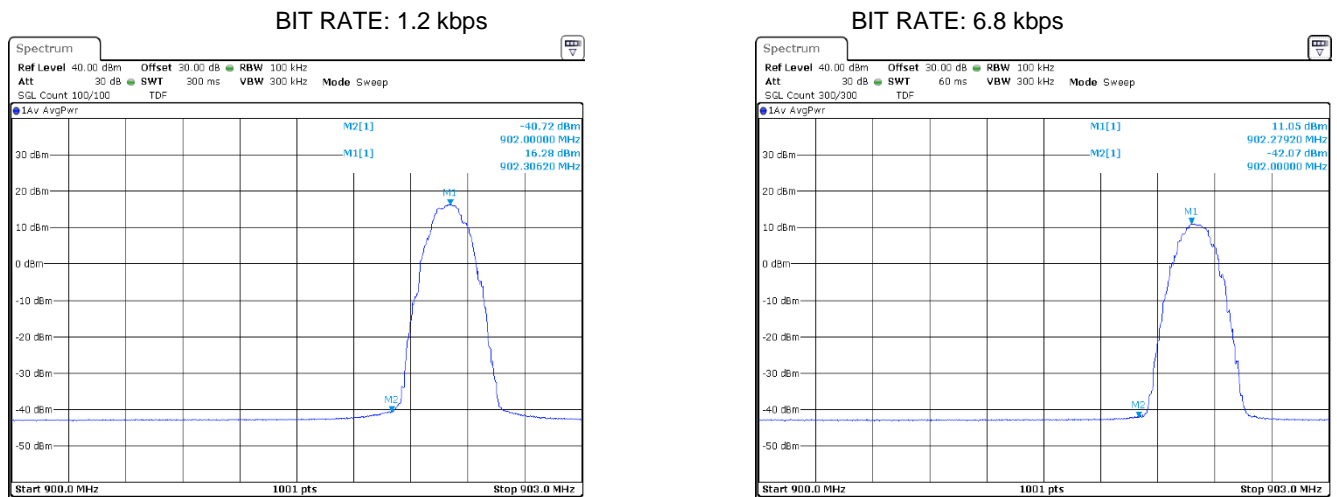

Plot 7.8.2 The highest band edge emission at high carrier frequency with hopping function disabled

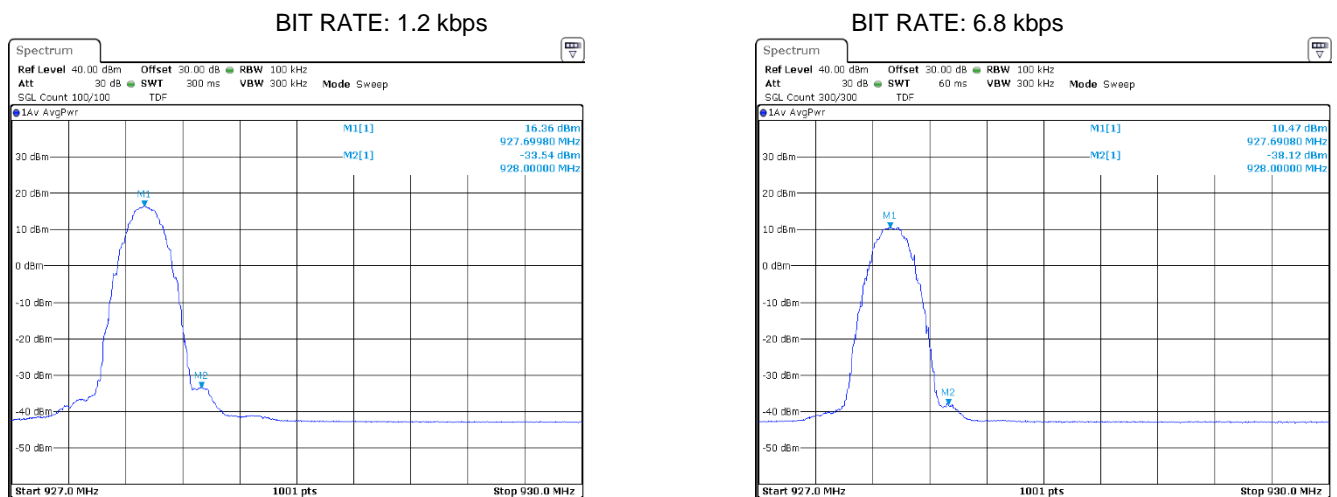




HERMON LABORATORIES

Report ID: TELRAD_FCC.35688_Hybrid


Date of Issue: 23-Jun-20

Test specification: Section 15.247(d), RSS-247 section 5.5 Emissions at band edges			
Test procedure: ANSI C63.10 section 6.10			
Test mode: Compliance		Verdict: PASS	
Date(s): 05-Mar-20			
Temperature: 23.4 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.8.3 The highest band edge emission at low carrier frequency with hopping function enabled

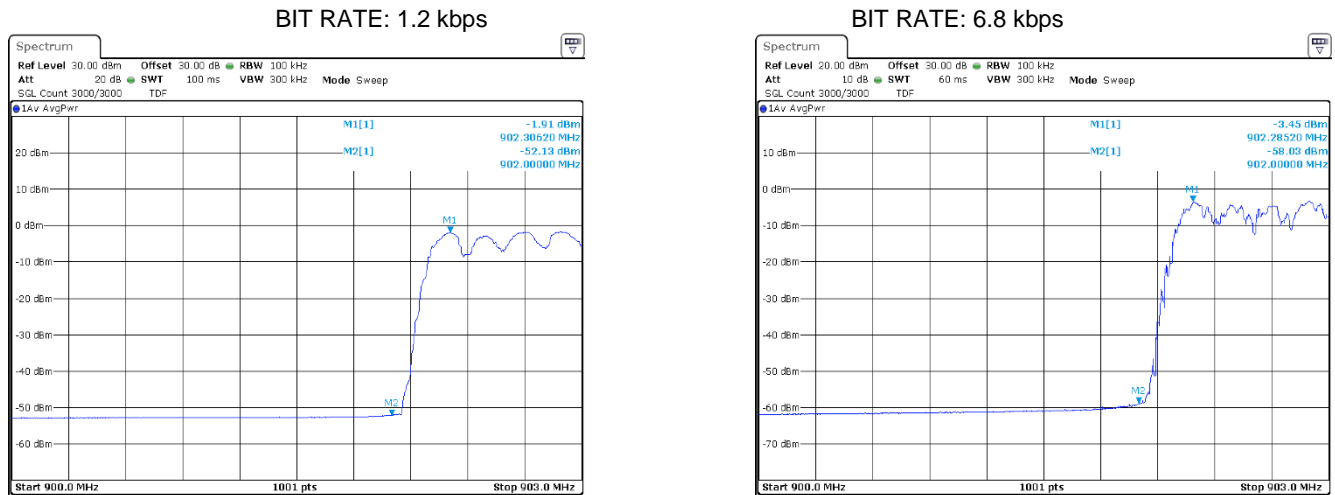

Plot 7.8.4 The highest band edge emission at high carrier frequency with hopping function enabled

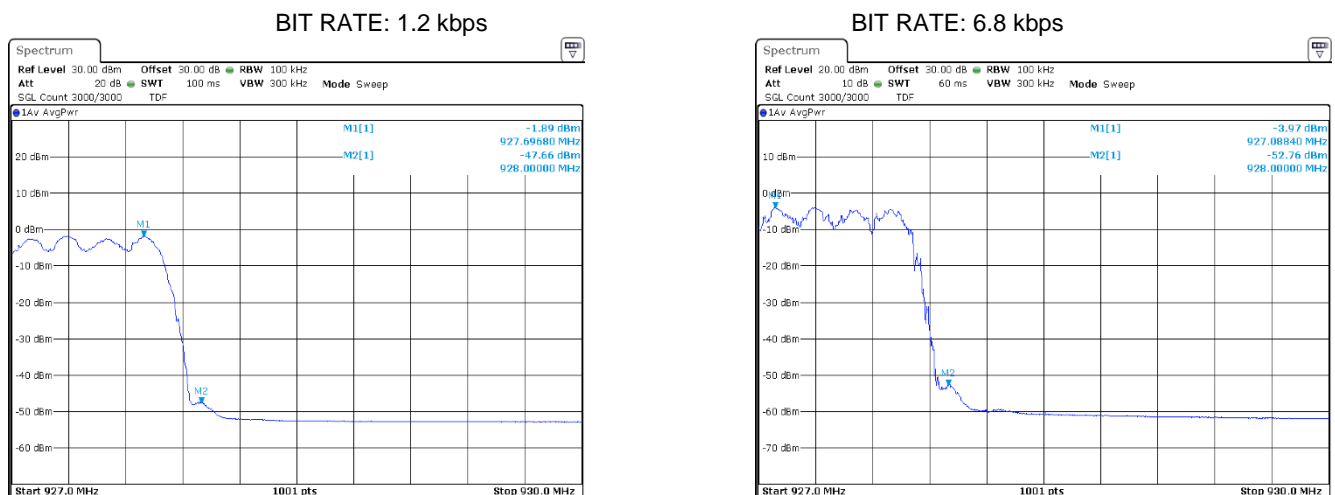



Test specification: Section 15.203 / RSS-Gen section 6.8, Antenna requirement			
Test procedure: Visual inspection			
Test mode: Compliance		Verdict: PASS	
Date(s): 09-Feb-20			
Temperature: 20.3 °C	Relative Humidity: 41 %	Air Pressure: 1022 hPa	Power: 3.6 VDC
Remarks:			

7.9 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.9.1.

Table 7.9.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 (9) kHz - 30 MHz	EMCO	6502	2857	24-Feb-20	24-Feb-21
1809	HygroThermometer, Min/Max Memory	Delta TRAK	13301	NA	11-Aug-19	11-Aug-20
3346	High Pass Filter, 50 Ohm, 5000 to 11000 MHz.	Mini-Circuits	VHF-4600+	NA	05-Jun-19	05-Jun-20
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY48250288	24-Apr-19	24-Apr-20
3901	Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA	Huber-Suhner	SUCOFL EX 102A	1225/2A	07-Apr-19	07-Apr-20
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFL EX 102A	1226/2A	07-Apr-19	07-Apr-20
4011	Temp. & Humidity Meter, (-50 - +70) deg, (20 - 99)% RH	Mad Electronics	HTC-1	NA	11-Aug-19	11-Aug-20
4071	Attenuator, SMA, 30 dB, DC to 18 GHz, 5 W	Weinschel	WA7	NA	12-Aug-19	12-Aug-20
4135	Shield Box	TESCOM CO., LTD	TC-5916A	5916A000136	24-Apr-19	24-Apr-20
4136	Shield Box	TESCOM CO., LTD	TC-5916A	5916A000137	24-Apr-19	24-Apr-20
4360	EMI Test Receiver, 20 Hz to 40 GHz.	Rohde & Schwarz	ESU40	100322	20-Jan-20	20-Jan-21
4917	High Pass Filter, 50 Ohm, 3150 to 6500 MHz, SMA-FM / SMA-M	Mini-Circuits	VHF-2700+	NA	05-Jun-19	05-Jun-20
4933	Active Horn Antenna, 1 GHz to 18 GHz	COM-POWER CORPORATION	AHA-118	701046	06-Jan-20	06-Jan-21
5085	Attenuator, 4 dB, DC - 6 GHz, 1 W	Mini-Circuits	UNAT-4+	NA	08-Feb-19	08-Feb-20
5284	Band Pass Filter, 50 Ohm, 1590 to 2770 MHz, SMA/M-SMA/F	A-INFOMW	WBLB-T-BP-2180-1180-17C	J10800000297	05-Jun-19	05-Jun-20
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX-8000E	00809	08-Feb-19	08-Feb-22
5309	Antenna Mast, 1-4 meter, Pneumatic polarization	Dolev Ltd	FMB 1-4	NA	24-Apr-19	24-Apr-20
5311	Controller	Dolev Ltd	FC-06	FC06.1-2016-024	24-Apr-19	24-Apr-20
5372	MXE EMI receiver, 3 Hz to 44 GHz	Keysight Technologies	N9038A	MY57290155	18-Jun-19	18-Jun-20
5376	EXA Signal Analyzer, 10 Hz - 32 GHz	Keysight Technologies	N9010B	MY57470404	18-Mar-20	18-Mar-21
5405	RF cable, 18 GHz, N-N, 6 m	Huber-Suhner	SF118/11 N(x2)	500023/118	11-Aug-19	11-Aug-20
5410	RF cable, 40 GHz, SMA-SMA, 5.5 m	Huber-Suhner	SF102EA/11SK/	503974/EA	11-Aug-19	11-Aug-20

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
5609	Precision Fixed Attenuator, 50 Ohm, 5 W, 10 dB, DC to 18 GHz	Mini Circuits	BW-S10W5+	NA	24-Sep-19	24-Sep-20
5611	Precision Fixed Attenuator, 50 Ohm, 5 W, 10 dB, DC to 18 GHz	Mini Circuits	BW-S10W5+	NA	24-Sep-19	24-Sep-20

9 APPENDIX B Test equipment correction factors

HL 0446: Active Loop Antenna
EMCO, model: 6502, s/n 2857

Frequency,	Measured antenna factor, dBS/m	Measurement uncertainty, dB
10	-33.4	±1.0
20	-37.8	±1.0
50	-40.5	±1.0
75	-41.0	±1.0
100	-41.2	±1.0
150	-41.2	±1.0
250	-41.1	±1.0
500	-41.2	±1.0
750	-41.3	±1.0
1000	-41.3	±1.0

Frequency,	Measured antenna factor, dBS/m	Measurement uncertainty, dB
2000	-41.4	±1.0
3000	-41.4	±1.0
4000	-41.5	±1.0
5000	-41.5	±1.0
10000	-41.7	±1.0
15000	-42.1	±1.0
20000	-42.7	±1.0
25000	-44.2	±1.0
30000	-45.8	±1.0

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

HL 4933: Active Horn Antenna
COM-POWER CORPORATION, model: AHA-118, s/n 701046

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
1000	-16.1
1500	-15.1
2000	-10.9
2500	-11.9
3000	-11.1
3500	-10.6
4000	-8.6
4500	-8.3
5000	-5.9
5500	-5.7
6000	-3.3
6500	-4.0
7000	-2.2
7500	-1.7
8000	1.1
8500	-0.8
9000	-1.5
9500	-0.2

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
10000	1.8
10500	1.0
11000	0.3
11500	-0.5
12000	3.1
12500	1.4
13000	-0.3
13500	-0.4
14000	2.5
14500	2.2
15000	1.9
15500	0.5
16000	2.1
16500	1.2
17000	0.6
17500	3.1
18000	4.2

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

HL 5288: Trilog Antenna
Frankonia, model: ALX-8000E, s/n: 00809
30-1000 MHz

Frequency, MHz	Antenna factor, dB/m
30	14.96
35	15.33
40	16.37
45	17.56
50	17.95
60	16.87
70	13.22
80	10.56
90	13.61
100	15.46
120	14.03
140	12.23

Frequency, MHz	Antenna factor, dB/m
160	12.67
180	13.34
200	15.40
250	16.42
300	17.28
400	19.98
500	21.11
600	22.90
700	24.13
800	25.25
900	26.35
1000	27.18

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.
above 1000 MHz

Frequency, MHz	Antenna factor, dB/m
1000	26.9
1100	28.1
1200	28.4
1300	29.6
1400	29.1
1500	30.4
1600	30.7
1700	31.5
1800	32.3
1900	32.6
2000	32.5
2100	32.9
2200	33.5
2300	33.2
2400	33.7
2500	34.6
2600	34.7
2700	34.6
2800	35.0
2900	35.5
3000	36.2
3100	36.8
3200	36.8
3300	37.0
3400	37.5
3500	38.2

Frequency, MHz	Antenna factor, dB/m
3600	38.9
3700	39.4
3800	39.4
3900	39.6
4000	39.7
4100	39.8
4200	40.5
4300	40.9
4400	41.1
4500	41.4
4600	41.3
4700	41.6
4800	41.9
4900	42.3
5000	42.7
5100	43.0
5200	42.9
5300	43.5
5400	43.6
5500	44.3
5600	44.7
5700	45.0
5800	45.0
5900	45.3
6000	45.9

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.



HERMON LABORATORIES

HL 5405: RF Cable
Huber-Suhner, model: SF118/11N(x2), s/n: 500023/118
Calibration date: 01-Aug-2018

Set / Applied, MHz	Measured, dB	Uncertainty, dB
0.1	0.01	±0.07
50	0.23	±0.07
100	0.32	±0.07
200	0.45	±0.08
300	0.55	±0.08
400	0.64	±0.08
500	0.71	±0.08
600	0.78	±0.08
700	0.85	±0.08
800	0.91	±0.08
900	0.97	±0.08
1000	1.02	±0.08
1100	1.07	±0.08
1200	1.12	±0.08
1300	1.16	±0.08
1400	1.21	±0.08
1500	1.25	±0.08
1600	1.30	±0.08
1700	1.34	±0.08
1800	1.38	±0.08
1900	1.42	±0.08
2000	1.47	±0.08
2500	1.64	±0.10
3000	1.81	±0.10
3500	1.97	±0.10
4000	2.11	±0.10
4500	2.25	±0.10
5000	2.38	±0.10
5500	2.48	±0.10
6000	2.59	±0.10
6500	2.72	±0.10
7000	2.84	±0.13
7500	2.97	±0.13
8000	3.08	±0.13
8500	3.21	±0.13
9000	3.31	±0.13
9500	3.42	±0.13
10000	3.52	±0.13

10 APPENDIX C Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

11 APPENDIX D Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for relevant parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; Recognized by Innovation, Science and Economic Development Canada for wireless and terminal testing (ISED), CAB identifier is IL1001, ISED# number 2186A; Certified by VCCI, Japan (the registration numbers are R-10808 for OATS, R-1082 for anechoic chamber, G-10869 for RE measurements above 1 GHz, C-10845 for conducted emissions site and T-11606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. M. Nikishin, EMC and radio group leader

12 APPENDIX E

Specification references

FCC 47CFR part 15: 2019

ANSI C63.10: 2013

RSS-247 Issue 2: 2017

RSS-Gen Issue 5: 2019

Radio Frequency Devices

American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence- Exempt Local Area Network (LE-LAN) Devices

General Requirements for Compliance of Radio Apparatus

13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT