

FCC Test Report

Product Name	TABLET PC
Model No	PM-522
FCC ID.	2ABTU-PM-522

Applicant	RuggON Corporation
Address	3F., No.129, Minquan Rd., Xindian Dist., New Taipei City 23141, Taiwan

Date of Receipt	July. 08, 2014
Issue Date	Aug. 11, 2014
Report No.	1470210R-RFUSP26V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.

Test Report

Issue Date: Aug. 11, 2014

Report No.: 1470210R-RFUSP26V00



Product Name	TABLET PC
Applicant	RuggON Corporation
Address	3F., No.129, Minquan Rd., Xindian Dist., New Taipei City 23141, Taiwan
Manufacturer	Ubiquconn Technology, Inc.
Model No.	PM-522
FCC ID.	2ABTU-PM-522
EUT Rated Voltage	AC 100-240V, 50-60Hz
EUT Test Voltage	AC 120V/60Hz
Trade Name	RuggON
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2013 ANSI C63.10: 2009, KDB 558074 D01 DTS Meas Guidance v03r02
Test Result	Complied

Documented By :



(Senior Adm. Specialist / Genie Chang)

Tested By :



(Engineer / Jerry Tsai)

Approved By :



(Director/ Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System	8
1.5. EUT Exercise Software	9
1.6. Test Facility	10
2. Conducted Emission.....	11
2.1. Test Equipment.....	11
2.2. Test Setup	11
2.3. Limits	12
2.4. Test Procedure	12
2.5. Uncertainty	12
2.6. Test Result of Conducted Emission.....	13
3. Peak Power Output	17
3.1. Test Equipment.....	17
3.2. Test Setup	17
3.3. Limits	17
3.4. Test Procedure	17
3.5. Uncertainty	17
3.6. Test Result of Peak Power Output.....	18
4. Radiated Emission.....	25
4.1. Test Equipment.....	25
4.2. Test Setup	26
4.3. Limits	27
4.4. Test Procedure	28
4.5. Uncertainty	28
4.6. Test Result of Radiated Emission.....	29
5. RF antenna conducted test.....	56
5.1. Test Equipment.....	56
5.2. Test Setup	56
5.3. Limits	56
5.4. Test Procedure	57
5.5. Uncertainty	57
5.6. Test Result of RF antenna conducted test.....	58
6. Band Edge	70
6.1. Test Equipment.....	70
6.2. Test Setup	71
6.3. Limits	71
6.4. Test Procedure	72
6.5. Uncertainty	72
6.6. Test Result of Band Edge	73

7.	Occupied Bandwidth.....	107
7.1.	Test Equipment.....	113
7.2.	Test Setup	113
7.3.	Limits	113
7.4.	Test Procedure	113
7.5.	Uncertainty	113
7.6.	Test Result of Occupied Bandwidth	114
8.	Power Density	134
8.1.	Test Equipment.....	134
8.2.	Test Setup	134
8.3.	Limits	134
8.4.	Test Procedure	134
8.5.	Uncertainty	134
8.6.	Test Result of Power Density	135
9.	EMI Reduction Method During Compliance Testing	155
Attachment 1: EUT Test Photographs		
Attachment 2: EUT Detailed Photographs		

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	TABLET PC
Trade Name	RuggON
Model No.	PM-522
FCC ID.	2ABTU-PM-522
Frequency Range	802.11b/g/n-20MHz:2412-2462MHz,802.11n-40MHz:2422-2452MHz 802.11a/n-20MHz:5745-5825MHz ,802.11n-40MHz:5755-5795MHz
Number of Channels	802.11b/g/n-20MHz: 11, n-40MHz: 7 802.11a/n-20MHz: 5, n-40MHz: 2
Data Speed	802.11b: 1-11Mbps, 802.11a/g: 6-54Mbps, 802.11n: up to 150Mbps
Channel separation	802.11b/g/n-20MHz: 5 MHz, 802.11a/n-20MHz: 20MHz 802.11n-40MHz: 40MHz
Type of Modulation	802.11b:DSSS,DBPSK, DQPSK, CCK 802.11a/g/n: OFDM,BPSK, QPSK, 16QAM, 64QAM
Antenna Type	PCB Antenna
Antenna Gain	Refer to the table “Antenna List”
Channel Control	Auto
Power Adapter	MFR: FSP, M/N: FSP065-REB Input: 100-240Vac, 50-60 Hz, 1.5A Output: 19Vdc, 3.42A Cable Out: Non-Shielded, 1.6m, with one ferrite core bonded.
Contain Module	Intel / 3160HMW

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	WIESON	GY196C098-081 (Main)	PCB Antenna	3.24 dBi in 2.4GHz
		GY196C098-082 (Aux)		2.54 dBi in 5.725~5.850GHz

Note: The antenna of EUT is conform to FCC 15.203

802.11b/g/n-20MHz Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 01:	2412 MHz	Channel 02:	2417 MHz	Channel 03:	2422 MHz	Channel 04:	2427 MHz
Channel 05:	2432 MHz	Channel 06:	2437 MHz	Channel 07:	2442 MHz	Channel 08:	2447 MHz
Channel 09:	2452 MHz	Channel 10:	2457 MHz	Channel 11:	2462 MHz		

802.11n-40MHz (2.4G Band) Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 3:	2422 MHz	Channel 4:	2427 MHz	Channel 5:	2432 MHz	Channel 6:	2437 MHz
Channel 7:	2442 MHz	Channel 8:	2447 MHz	Channel 9:	2452 MHz		

802.11a/n-20MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 149:	5745 MHz	Channel 153:	5765 MHz	Channel 157:	5785 MHz	Channel 161:	5805 MHz
Channel 165:	5825 MHz						

802.11n-40MHz (5G Band) Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency
Channel 151:	5755 MHz	Channel 159:	5795 MHz

Note:

1. This device is a TABLET PC with a built-in 2.4GHz and 5GHz WLAN transceiver.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report. (802.11b is 1Mbps 、802.11g is 6Mbps 、802.11n(20M-BW) is 7.2Mbps and 、802.11n(40M-BW) is 15Mbps).
4. These tests are conducted on a sample for the purpose of demonstrating compliance of 802.11a/b/g/n transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices.

Test Mode:	Mode 1: Transmit (802.11b 1Mbps)
	Mode 2: Transmit (802.11g 6Mbps)
	Mode 3: Transmit - 802.11a 6Mbps
	Mode 4: Transmit - 802.11n-20BW_7.2Mbps(2.4G Band)
	Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band)
	Mode 6: Transmit - 802.11n-20BW_7.2Mbps(5G Band)
	Mode 7: Transmit - 802.11n-40BW_15Mbps(5G Band)


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
(1)	Keyboard	Dell	SK-8175	MY-0W217F-71619-092-0492-A01	N/A
(2)	USB Mouse	Logitech	M-U0003	LZ024HR	N/A
(3)	Earphone	AIWA	N/A	N/A	N/A
(4)	USB to LAN	RuggON	N/A	N/A	N/A

Signal Cable Type		Signal cable Description
A	Keyboard Cable	Shielded, 1.8m
B	Mouse Cable	Shielded, 1.8m
C	Earphone Cable	Non-Shielded, 1.2m
D	LAN Cable	Non-Shielded, 1.6m

1.4. Configuration of Tested System

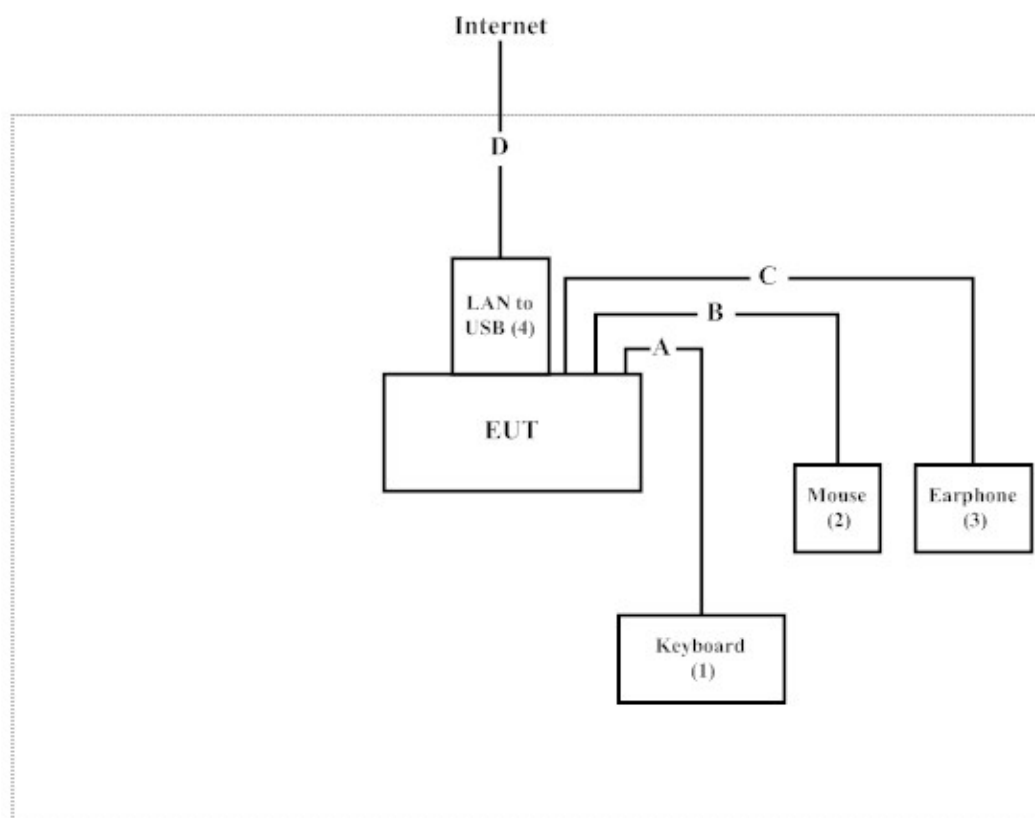

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4.
- (2) Execute software “DRTU-v1.7.3.859” on the EUT
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Press “OK” to start the continuous Transmit.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from

Quietek Corporation's Web Site : <http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web

site : <http://www.quietek.com/>

Site Description: File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 92195

Site Name: Quietek Corporation
Site Address: No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen,
Lin-Kou Shiang, Taipei,
Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Conducted Emission


2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2013	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2014	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2014	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar, 2014	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2014	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

2.2. Test Setup

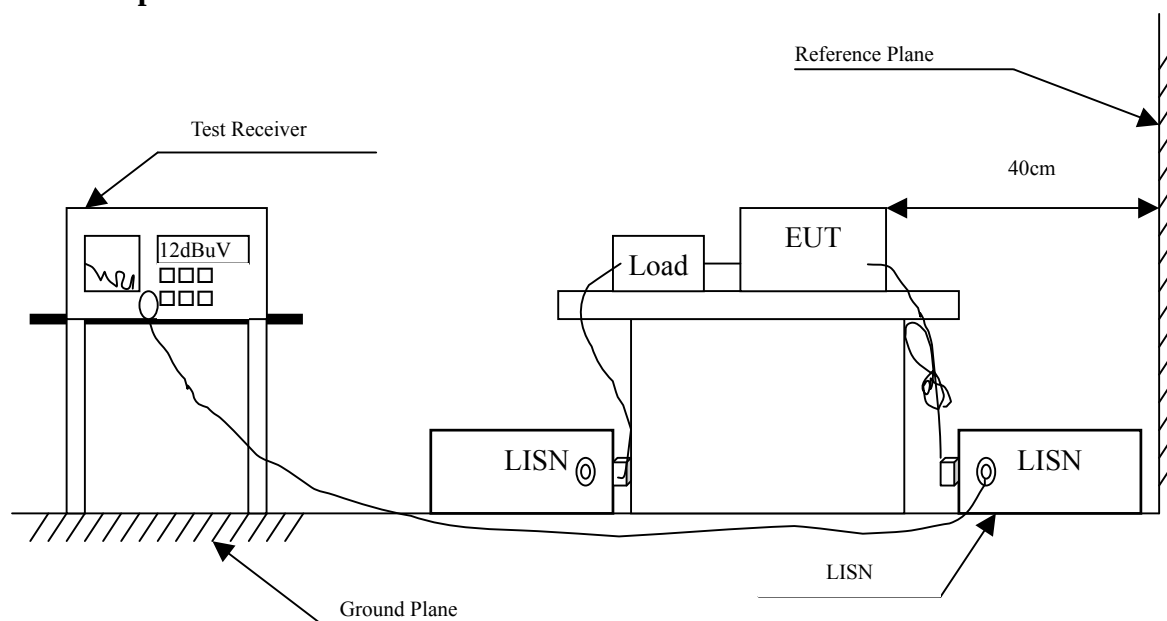

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AVG
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Product : TABLET PC
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band) (2437MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
Line 1					
Quasi-Peak					
0.201	9.650	37.990	47.640	-16.903	64.543
0.650	9.675	32.410	42.085	-13.915	56.000
1.025	9.695	26.620	36.315	-19.685	56.000
1.345	9.723	27.420	37.143	-18.857	56.000
1.873	9.762	22.760	32.522	-23.478	56.000
2.994	9.803	20.580	30.383	-25.617	56.000
Average					
0.201	9.650	28.260	37.910	-16.633	54.543
0.650	9.675	24.180	33.855	-12.145	46.000
1.025	9.695	16.440	26.135	-19.865	46.000
1.345	9.723	15.860	25.583	-20.417	46.000
1.873	9.762	12.440	22.202	-23.798	46.000
2.994	9.803	11.650	21.453	-24.547	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : TABLET PC
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band) (2437MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV	dB	dBuV
Line 2					
Quasi-Peak					
0.201	9.660	35.390	45.050	-19.493	64.543
0.279	9.665	24.350	34.015	-28.299	62.314
0.408	9.662	24.350	34.012	-24.617	58.629
0.611	9.673	33.820	43.493	-12.507	56.000
0.931	9.700	29.250	38.950	-17.050	56.000
1.962	9.767	25.580	35.347	-20.653	56.000
Average					
0.201	9.660	28.300	37.960	-16.583	54.543
0.279	9.665	13.910	23.575	-28.739	52.314
0.408	9.662	16.680	26.342	-22.287	48.629
0.611	9.673	24.680	34.353	-11.647	46.000
0.931	9.700	19.100	28.800	-17.200	46.000
1.962	9.767	16.470	26.237	-19.763	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : TABLET PC
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 7: Transmit - 802.11n-40BW_15Mbps(5G Band) (5755MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV	dB	dBuV
Line 1					
Quasi-Peak					
0.193	9.650	38.130	47.780	-16.991	64.771
0.279	9.655	24.690	34.345	-27.969	62.314
0.388	9.661	19.690	29.351	-29.849	59.200
0.654	9.675	33.740	43.415	-12.585	56.000
0.931	9.690	27.090	36.780	-19.220	56.000
1.755	9.747	24.960	34.708	-21.292	56.000
Average					
0.193	9.650	28.210	37.860	-16.911	54.771
0.279	9.655	9.910	19.565	-32.749	52.314
0.388	9.661	10.480	20.141	-29.059	49.200
0.654	9.675	25.630	35.305	-10.695	46.000
0.931	9.690	16.560	26.250	-19.750	46.000
1.755	9.747	14.430	24.178	-21.822	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " " means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : TABLET PC
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 7: Transmit - 802.11n-40BW_15Mbps(5G Band) (5755MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV	dB	dBuV
Line 2					
Quasi-Peak					
0.189	9.660	36.310	45.970	-18.916	64.886
0.306	9.657	25.240	34.897	-26.646	61.543
0.400	9.661	23.630	33.291	-25.566	58.857
0.611	9.673	33.820	43.493	-12.507	56.000
0.806	9.693	29.950	39.643	-16.357	56.000
1.349	9.723	27.860	37.583	-18.417	56.000
Average					
0.189	9.660	27.470	37.130	-17.756	54.886
0.306	9.657	17.960	27.617	-23.926	51.543
0.400	9.661	15.770	25.431	-23.426	48.857
0.611	9.673	24.770	34.443	-11.557	46.000
0.806	9.693	19.780	29.473	-16.527	46.000
1.349	9.723	16.550	26.273	-19.727	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Peak Power Output


3.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Power Meter	Anritsu	ML2495A/6K00003357	May, 2014
X	Power Sensor	Anritsu	MA2411B/0738448	Jun, 2014

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

3.2. Test Setup

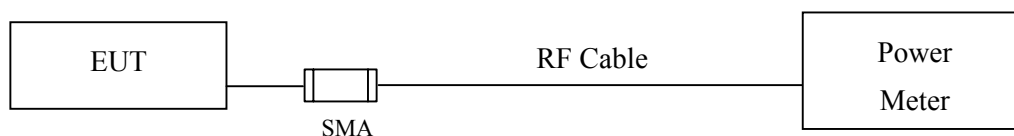

3.3. Limits

The maximum peak power shall be less 1 Watt.

3.4. Test Procedure

The EUT was tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using KDB 558074 D01 DTS Meas Guidance v03r02 section 9.1.2 PKPM1 Peak power meter method.

3.5. Uncertainty

± 1.27 dB

3.6. Test Result of Peak Power Output

Product : TABLET PC
 Test Item : Peak Power Output Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)				Peak Power	Required Limit	Result
		1	2	5.5	11	1		
		Measurement Level (dBm)						
01	2412	15.61	--	--	--	17.94	<30dBm	Pass
06	2437	15.80	15.61	15.39	15.22	18.08	<30dBm	Pass
11	2462	15.56	--	--	--	17.83	<30dBm	Pass

Note: Peak Power Output Value = Reading value on power meter + cable loss

Product : TABLET PC
 Test Item : Peak Power Output Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		6	9	12	18	24	36	48	54	6		
		Measurement Level (dBm)										
01	2412	14.36	--	--	--	--	--	--	--	19.54	<30dBm	Pass
02	2417	16.26	--	--	--	--	--	--	--	21.03	<30dBm	Pass
06	2437	16.42	16.37	16.33	16.36	16.33	16.31	16.29	16.21	21.17	<30dBm	Pass
10	2457	16.43	--	--	--	--	--	--	--	21.05	<30dBm	Pass
11	2462	14.45	--	--	--	--	--	--	--	19.56	<30dBm	Pass

Note: Peak Power Output Value = Reading value on power meter + cable loss

Product : TABLET PC
 Test Item : Peak Power Output Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		6	9	12	18	24	36	48	54			
		Measurement Level (dBm)										
149	5745	16.38	--	--	--	--	--	--	--	20.32	<30dBm	Pass
157	5785	16.27	16.09	15.81	15.66	15.43	15.37	15.18	15.07	20.26	<30dBm	Pass
165	5825	16.28	--	--	--	--	--	--	--	20.3	<30dBm	Pass

Note: Peak Power Output Value = Reading value on power meter + cable loss

Product : TABLET PC
 Test Item : Peak Power Output Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_7.2Mbps(2.4G Band)

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		7.2	14.4	21.7	28.9	43.3	57.8	65	72.2			
		Measurement Level (dBm)										
01	2412	14.49	--	--	--	--	--	--	--	19.61	<30dBm	Pass
02	2417	16.16	--	--	--	--	--	--	--	21.01	<30dBm	Pass
06	2437	16.28	16.22	16.18	16.13	16.15	16.12	16.11	16.09	21.06	<30dBm	Pass
10	2457	16.39	--	--	--	--	--	--	--	21.11	<30dBm	Pass
11	2462	14.30	--	--	--	--	--	--	--	19.45	<30dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

Product : TABLET PC
 Test Item : Peak Power Output Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band)

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		15	30	45	60	90	120	135	150			
		Measurement Level (dBm)										
03	2422	13.00	--	--	--	--	--	--	--	17.98	<30dBm	Pass
04	2427	13.68	--	--	--	--	--	--	--	18.76	<30dBm	Pass
05	2432	14.71	--	--	--	--	--	--	--	19.37	<30dBm	Pass
06	2437	16.20	16.18	16.16	16.08	15.94	15.91	15.88	15.76	20.31	<30dBm	Pass
07	2442	15.28	--	--	--	--	--	--	--	20.11	<30dBm	Pass
08	2447	14.53	--	--	--	--	--	--	--	19.38	<30dBm	Pass
09	2452	13.84	--	--	--	--	--	--	--	18.72	<30dBm	Pass

Note: Peak Power Output Value = Reading value on power meter + cable loss

Product : TABLET PC
 Test Item : Peak Power Output Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_7.2Mbps(5G Band)

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		7.2	14.4	21.7	28.9	43.3	57.8	65	72.2	7.2		
		Measurement Level (dBm)										
149	5745	16.37	--	--	--	--	--	--	--	20.3	<30dBm	Pass
157	5785	16.35	16.21	16.17	16.09	15.91	15.83	15.72	15.71	20.29	<30dBm	Pass
165	5825	16.34	--	--	--	--	--	--	--	20.32	<30dBm	Pass

1. Note: Peak Power Output Value = Reading value on power meter + cable loss

Product : TABLET PC
 Test Item : Peak Power Output Data
 Test Site : No.3 OATS
 Test Mode : Mode 7: Transmit - 802.11n-40BW_15Mbps(5G Band)

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		15	30	45	60	90	120	135	150	15		
		Measurement Level (dBm)										
151	5755	16.27	16.14	15.87	15.64	15.44	15.31	15.28	15.16	20.22	<30dBm	Pass
159	5795	16.03	--	--	--	--	--	--	--	20.11	<30dBm	Pass

Note: Peak Power Output Value = Reading value on power meter + cable loss

4. Radiated Emission

4.1. Test Equipment


The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X	Loop Antenna	Teseq	HLA6120 / 26739	Jul., 2014
	X	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2013
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2013
	X	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2014
	X	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2014
	X	Pre-Amplifier	QTK	AP-180C / CHM 0906076	Sep., 2013
	X	Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/ 925975	Mar, 2014
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2014
	X	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2013
	X	Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2014
	X	Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A


- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with "X" are used to measure the final test results.

4.2. Test Setup

Radiated Emission Below 1GHz

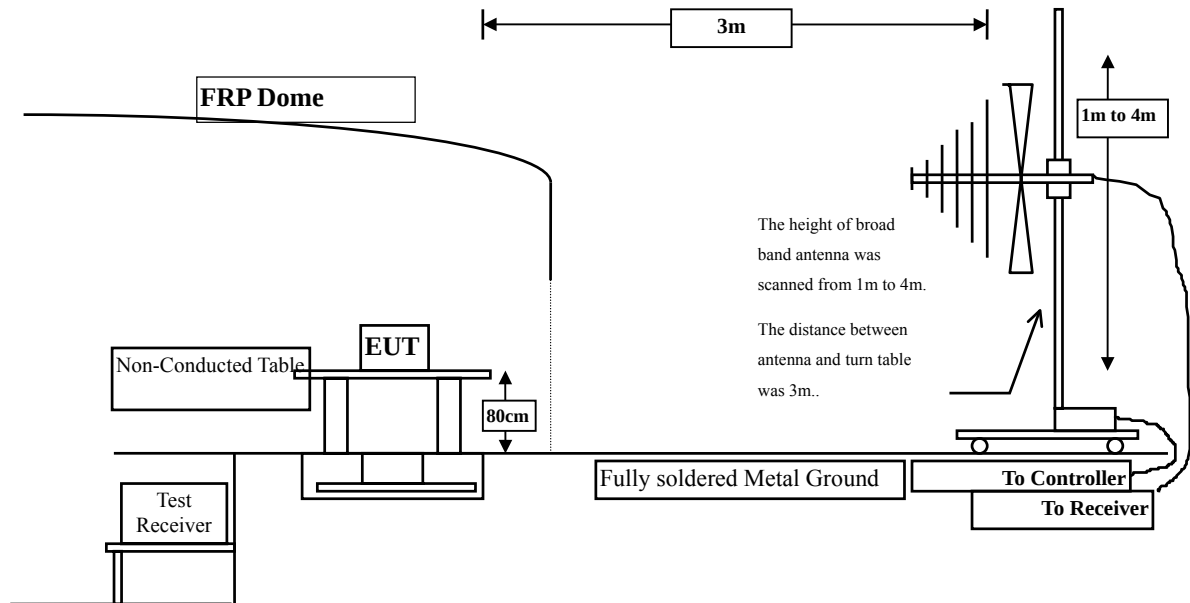

Radiated Emission Above 1GHz

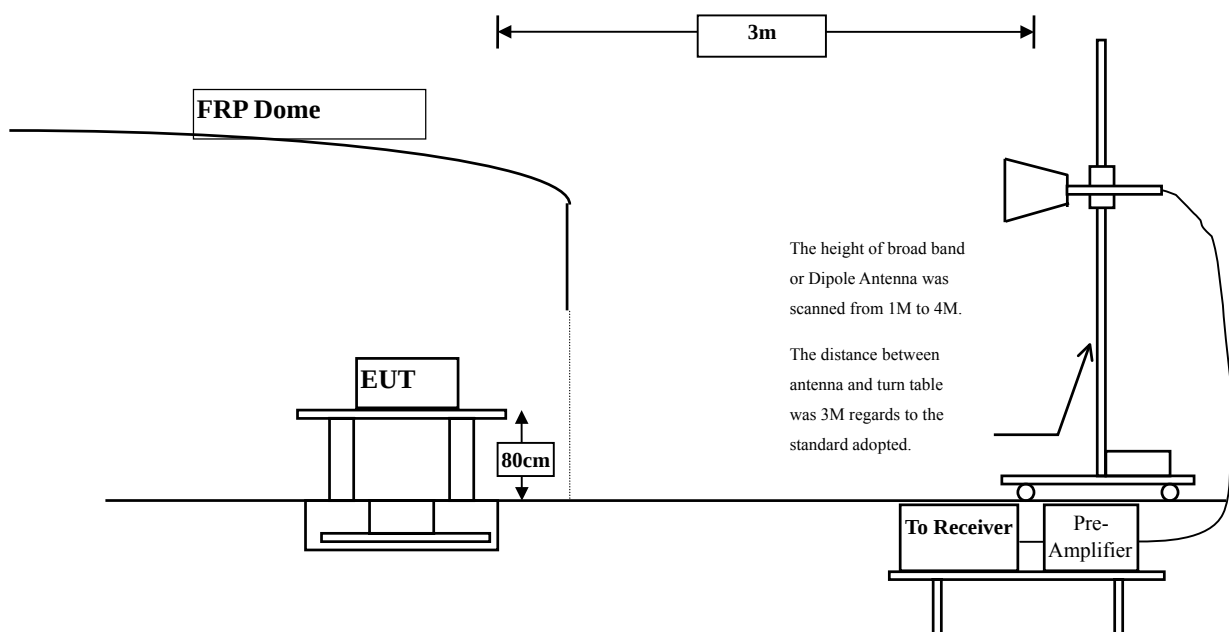

4.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBuV/m) = 20 log E field strength (uV/m)

4.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2009 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

4.6. Test Result of Radiated Emission

Product : TABLET PC
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4824.000	3.261	44.960	48.221	-25.779	74.000
7236.000	10.650	37.260	47.910	-26.090	74.000
9648.000	13.337	37.680	51.016	-22.984	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4824.000	6.421	41.260	47.681	-26.319	74.000
7236.000	11.495	38.205	49.700	-24.300	74.000
9648.000	13.807	36.150	49.956	-24.044	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
4874.000	3.038	43.260	46.297	-27.703	74.000
7311.000	11.795	37.590	49.384	-24.616	74.000
9748.000	12.635	37.260	49.895	-24.105	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4874.000	5.812	41.260	47.071	-26.929	74.000
7311.000	12.630	36.890	49.519	-24.481	74.000
9748.000	13.126	37.590	50.716	-23.284	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4874.000	5.812	41.260	47.071	-26.929	74.000
7311.000	12.630	36.890	49.519	-24.481	74.000
9748.000	13.126	37.590	50.716	-23.284	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4924.000	5.521	41.090	46.610	-27.390	74.000
7386.000	13.254	37.590	50.844	-23.156	74.000
9848.000	13.367	37.990	51.357	-22.643	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4824.000	3.261	42.290	45.551	-28.449	74.000
7236.000	10.650	37.560	48.210	-25.790	74.000
9648.000	13.337	37.290	50.626	-23.374	74.000

Average

Detector:

--

Vertical

Peak Detector:

4824.000	6.421	41.290	47.711	-26.289	74.000
7236.000	11.495	38.560	50.055	-23.945	74.000
9648.000	13.807	36.120	49.926	-24.074	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
4874.000	3.038	42.950	45.987	-28.013	74.000
7311.000	11.795	38.250	50.044	-23.956	74.000
9748.000	12.635	37.260	49.895	-24.105	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4874.000	5.812	42.570	48.381	-25.619	74.000
7311.000	12.630	38.150	50.779	-23.221	74.000
9748.000	13.126	37.590	50.716	-23.284	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
4924.000	2.858	42.590	45.447	-28.553	74.000
7386.000	12.127	37.980	50.108	-23.892	74.000
9848.000	12.852	38.560	51.413	-22.587	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4924.000	5.521	40.690	46.210	-27.790	74.000
7386.000	13.254	37.510	50.764	-23.236	74.000
9848.000	13.367	38.510	51.877	-22.123	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps (5745 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
11490.000	17.106	36.150	53.257	-20.743	74.000

Average

Detector:

--

Vertical

Peak Detector:

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
11490.000	18.034	35.230	53.265	-20.735	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps (5785 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
11570.000	16.809	36.290	53.099	-20.901	74.000

Average

Detector:

--

Vertical

Peak Detector:

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
11570.000	17.698	36.190	53.888	-20.112	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps (5825 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
11650.000	16.158	36.120	52.278	-21.722	74.000

Average

Detector:

--

Vertical

Peak Detector:

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
11650.000	17.274	36.120	53.395	-20.605	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_7.2Mbps(2.4G Band) (2412MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4824.000	3.261	45.620	48.881	-25.119	74.000
7236.000	10.650	38.150	48.800	-25.200	74.000
9648.000	13.337	38.250	51.586	-22.414	74.000

Average

Detector:

--

Vertical

Peak Detector:

4824.000	6.421	43.260	49.681	-24.319	74.000
7236.000	11.495	38.260	49.755	-24.245	74.000
9648.000	13.807	38.290	52.096	-21.904	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_7.2Mbps(2.4G Band) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
4874.000	3.038	43.150	46.187	-27.813	74.000
7311.000	11.795	38.260	50.054	-23.946	74.000
9748.000	12.635	36.120	48.755	-25.245	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4874.000	5.812	42.560	48.371	-25.629	74.000
7311.000	12.630	37.590	50.219	-23.781	74.000
9748.000	13.126	37.590	50.716	-23.284	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_7.2Mbps(2.4G Band) (2462 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4924.000	2.858	42.290	45.147	-28.853	74.000
7386.000	12.127	38.150	50.278	-23.722	74.000
9848.000	12.852	38.140	50.993	-23.007	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4824.000	6.421	42.150	48.571	-25.429	74.000
7386.000	13.254	36.150	49.404	-24.596	74.000
9848.000	13.367	38.290	51.657	-22.343	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band) (2422MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4844.000	3.171	43.260	46.431	-27.569	74.000
7266.000	11.162	37.260	48.422	-25.578	74.000
9688.000	12.964	38.150	51.115	-22.885	74.000

Average

Detector:

--

Vertical

Peak Detector:

4844.000	6.178	42.060	48.238	-25.762	74.000
7266.000	11.982	37.150	49.132	-24.868	74.000
9688.000	13.507	38.050	51.558	-22.442	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
4874.000	3.038	42.590	45.627	-28.373	74.000
7311.000	11.795	37.590	49.384	-24.616	74.000
9748.000	12.635	38.050	50.685	-23.315	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4874.000	5.812	42.150	47.961	-26.039	74.000
7311.000	12.630	37.050	49.679	-24.321	74.000
9748.000	13.126	38.590	51.716	-22.284	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band) (2452 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4904.000	2.914	42.560	45.475	-28.525	74.000
7356.000	11.995	37.590	49.584	-24.416	74.000
9808.000	12.475	37.480	49.955	-24.045	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4904.000	5.530	42.890	48.421	-25.579	74.000
7356.000	13.005	37.560	50.564	-23.436	74.000
9808.000	12.901	38.010	50.911	-23.089	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_7.2Mbps(5G Band) (5745MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
11490.000	17.106	36.780	53.887	-20.113	74.000

Average

Detector:

--

Vertical

Peak Detector:

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
11490.000	18.034	35.820	53.855	-20.145	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_7.2Mbps(5G Band) (5785 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
11570.000	16.809	36.320	53.129	-20.871	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
11570.000	17.698	36.140	53.838	-20.162	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_7.2Mbps(5G Band) (5825 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
11650.000	16.158	36.260	52.418	-21.582	74.000

Average

Detector:

--

Vertical

Peak Detector:

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
11650.000	17.274	36.450	53.725	-20.275	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 7: Transmit - 802.11n-40BW_15Mbps(5G Band) (5755MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
11510.000	17.124	36.540	53.664	-20.336	74.000

Average

Detector:

--

Vertical

Peak Detector:

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
11510.000	18.081	35.830	53.911	-20.089	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 7: Transmit - 802.11n-40BW_15Mbps(5G Band) (5795 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
11590.000	16.701	36.150	52.850	-21.150	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
11590.000	17.567	36.120	53.686	-20.314	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
107.600	-7.597	34.490	26.893	-16.607	43.500
225.940	-9.647	44.883	35.236	-10.764	46.000
365.620	0.382	33.763	34.145	-11.855	46.000
600.360	3.472	26.384	29.856	-16.144	46.000
800.180	6.417	24.940	31.357	-14.643	46.000
951.500	6.993	24.981	31.974	-14.026	46.000
Vertical					
43.580	-10.919	41.976	31.057	-8.943	40.000
262.800	-4.944	33.778	28.834	-17.166	46.000
511.120	0.783	23.826	24.609	-21.391	46.000
689.600	2.302	22.662	24.964	-21.036	46.000
817.640	2.966	23.702	26.668	-19.332	46.000
920.460	3.272	23.924	27.196	-18.804	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : TABLET PC
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
119.240	-7.291	35.094	27.804	-15.696	43.500
225.940	-9.647	42.339	32.692	-13.308	46.000
365.620	0.382	34.781	35.163	-10.837	46.000
526.640	3.112	26.350	29.462	-16.538	46.000
701.240	2.759	27.530	30.289	-15.711	46.000
879.720	6.618	23.824	30.442	-15.558	46.000
Vertical					
43.580	-10.919	42.949	32.030	-7.970	40.000
177.440	-1.248	28.006	26.758	-16.742	43.500
373.380	0.043	25.261	25.304	-20.696	46.000
538.280	1.996	24.180	26.176	-19.824	46.000
782.720	2.757	26.346	29.103	-16.897	46.000
930.160	3.830	23.777	27.607	-18.393	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : TABLET PC
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps (5785MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
105.660	-7.676	33.563	25.886	-17.614	43.500
225.940	-9.647	40.094	30.447	-15.553	46.000
365.620	0.382	32.804	33.186	-12.814	46.000
522.760	3.176	27.220	30.396	-15.604	46.000
701.240	2.759	27.635	30.394	-15.606	46.000
854.500	7.380	24.879	32.259	-13.741	46.000
Vertical					
105.660	-4.576	32.787	28.210	-15.290	43.500
260.860	-4.870	36.198	31.328	-14.672	46.000
373.380	0.043	24.971	25.014	-20.986	46.000
612.000	1.943	24.694	26.636	-19.364	46.000
786.600	2.724	25.111	27.836	-18.164	46.000
930.160	3.830	23.470	27.300	-18.700	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : TABLET PC
Test Item : General Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 4: Transmit - 802.11n-20BW_7.2Mbps(2.4G Band) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
107.600	-7.597	33.823	26.226	-17.274	43.500
225.940	-9.647	42.540	32.893	-13.107	46.000
373.380	0.873	30.741	31.614	-14.386	46.000
575.140	3.025	25.616	28.641	-17.359	46.000
701.240	2.759	28.049	30.808	-15.192	46.000
897.180	5.487	23.367	28.854	-17.146	46.000
Vertical					
43.580	-10.919	41.447	30.528	-9.472	40.000
175.500	-1.842	28.100	26.258	-17.242	43.500
363.680	0.079	24.772	24.851	-21.149	46.000
536.340	1.609	25.519	27.128	-18.872	46.000
771.080	2.766	24.031	26.798	-19.202	46.000
930.160	3.830	23.422	27.252	-18.748	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : TABLET PC
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
159.980	-10.030	39.087	29.056	-14.444	43.500
264.740	-5.501	34.376	28.876	-17.124	46.000
433.520	0.841	26.825	27.666	-18.334	46.000
633.340	1.530	28.323	29.853	-16.147	46.000
800.180	6.417	26.726	33.143	-12.857	46.000
930.160	7.530	23.045	30.575	-15.425	46.000
Vertical					
43.580	-10.919	42.493	31.574	-8.426	40.000
192.960	-5.655	31.358	25.703	-17.797	43.500
379.200	0.881	24.831	25.712	-20.288	46.000
596.480	0.907	23.416	24.323	-21.677	46.000
757.500	2.487	23.961	26.448	-19.552	46.000
901.060	1.858	22.760	24.618	-21.382	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : TABLET PC
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_7.2Mbps(5G Band) (5785 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
105.660	-7.676	33.970	26.293	-17.207	43.500
192.960	-10.095	41.051	30.956	-12.544	43.500
365.620	0.382	35.135	35.517	-10.483	46.000
513.060	3.186	24.344	27.530	-18.470	46.000
676.020	2.841	25.256	28.098	-17.902	46.000
831.220	7.121	23.660	30.781	-15.219	46.000
Vertical					
43.580	-10.919	43.045	32.126	-7.874	40.000
159.980	-5.120	30.629	25.508	-17.992	43.500
365.620	0.282	26.938	27.220	-18.780	46.000
538.280	1.996	23.254	25.250	-20.750	46.000
753.620	2.730	23.340	26.070	-19.930	46.000
901.060	1.858	23.634	25.492	-20.508	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : TABLET PC
Test Item : General Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 7: Transmit - 802.11n-40BW_15Mbps(5G Band) (5755MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
119.240	-7.291	33.557	26.267	-17.233	43.500
225.940	-9.647	40.120	30.473	-15.527	46.000
365.620	0.382	34.742	35.124	-10.876	46.000
551.860	3.390	26.610	30.000	-16.000	46.000
800.180	6.417	25.506	31.923	-14.077	46.000
941.800	6.790	24.068	30.858	-15.142	46.000
Vertical					
43.580	-10.919	42.686	31.767	-8.233	40.000
173.560	-2.713	27.407	24.694	-18.806	43.500
371.440	-0.310	25.291	24.981	-21.019	46.000
606.180	2.246	23.370	25.616	-20.384	46.000
782.720	2.757	22.928	25.685	-20.315	46.000
930.160	3.830	23.042	26.872	-19.128	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

5. RF antenna conducted test


5.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with "X" are used to measure the final test results.

5.2. Test Setup

RF antenna Conducted Measurement:

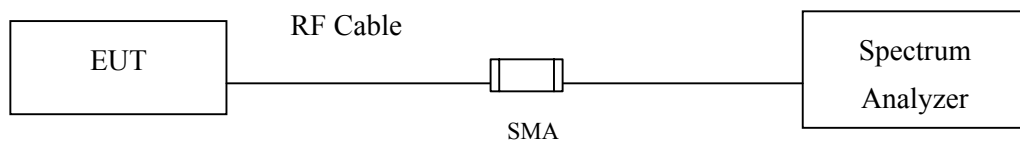

5.3. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.4. Test Procedure

The EUT was tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

5.5. Uncertainty


The measurement uncertainty

Conducted is defined as $\pm 1.27\text{dB}$


5.6. Test Result of RF antenna conducted test

Product : TABLET PC
 Test Item : RF antenna conducted test
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)


Channel 01 (2412MHz) 30MHz-25GHz

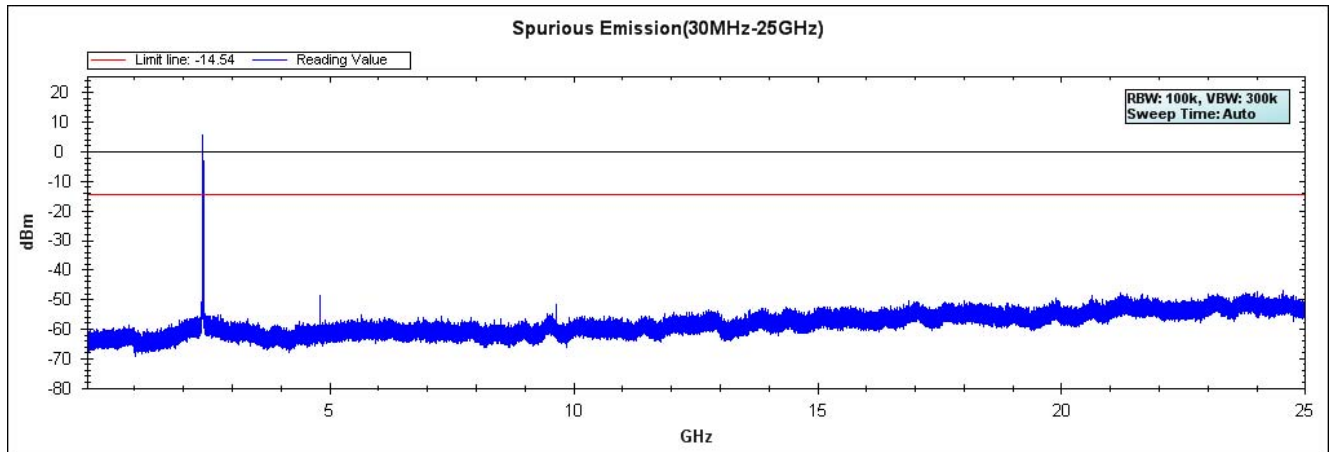

Channel 06 (2437MHz) 30MHz-25GHz

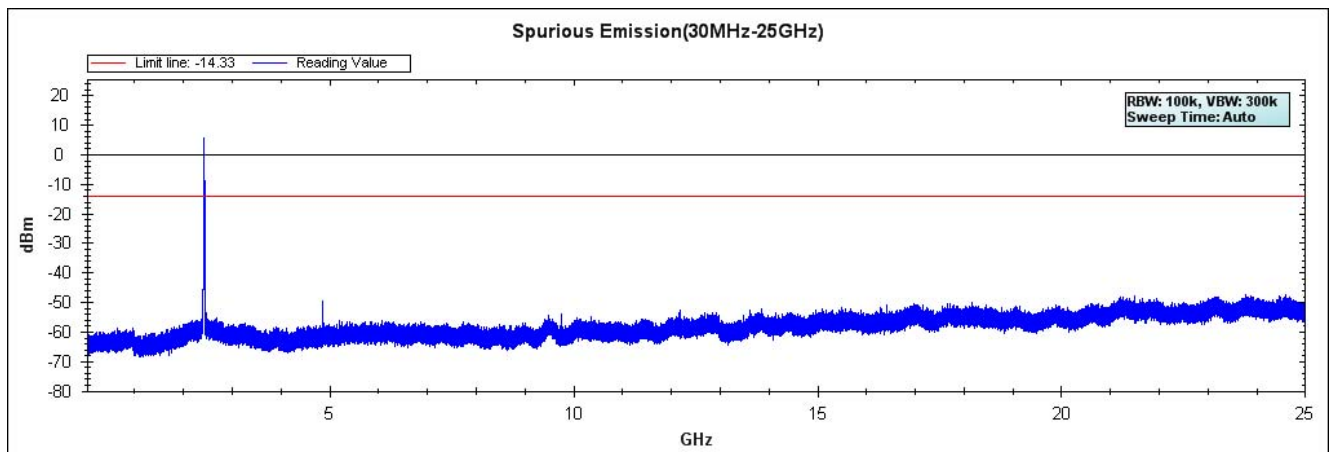


Channel 11 (2462MHz) 30MHz-25GHz

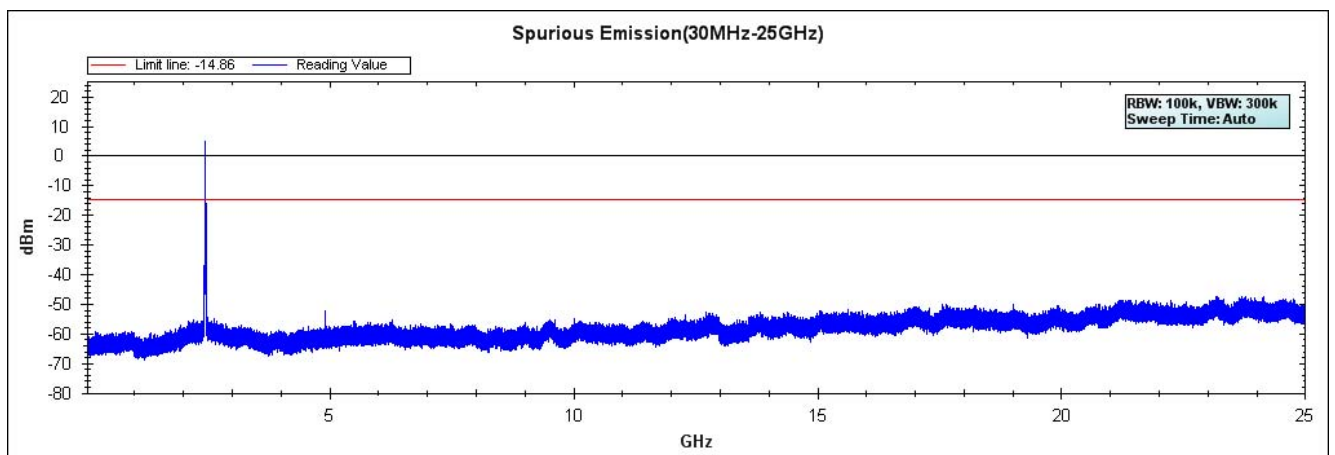


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : TABLET PC
 Test Item : RF Antenna Conducted Spurious
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)


Channel 01 (2412MHz) 30MHz-25GHz

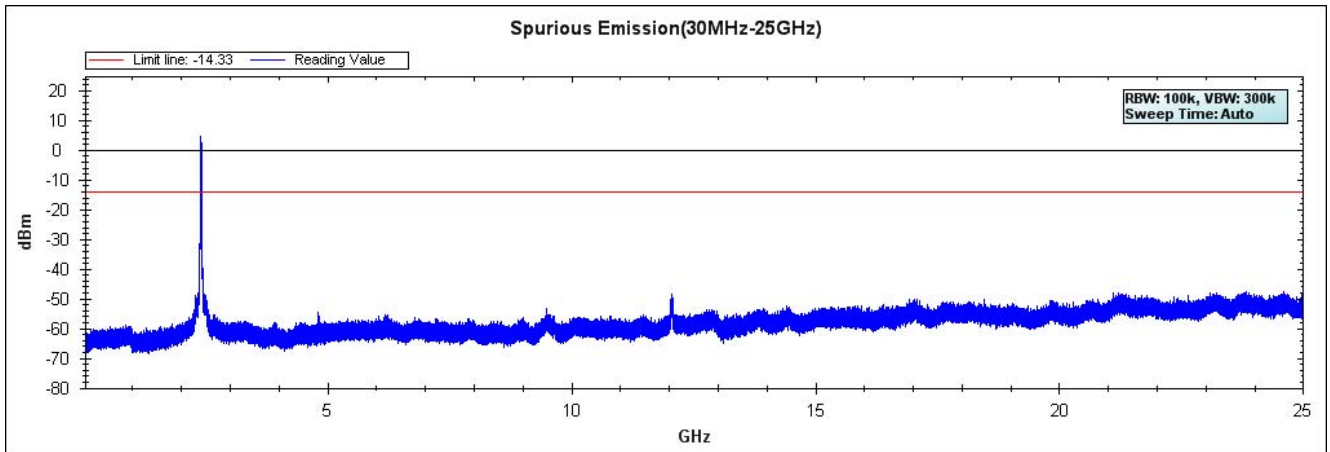

Channel 06 (2437MHz) 30MHz-25GHz

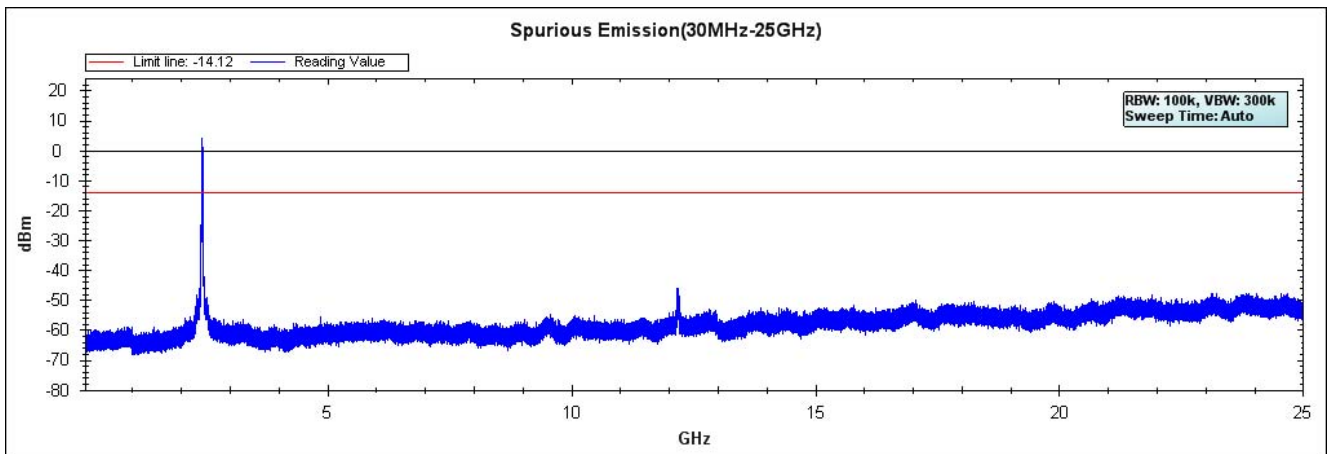



Channel 11 (2462MHz) 30MHz-25GHz

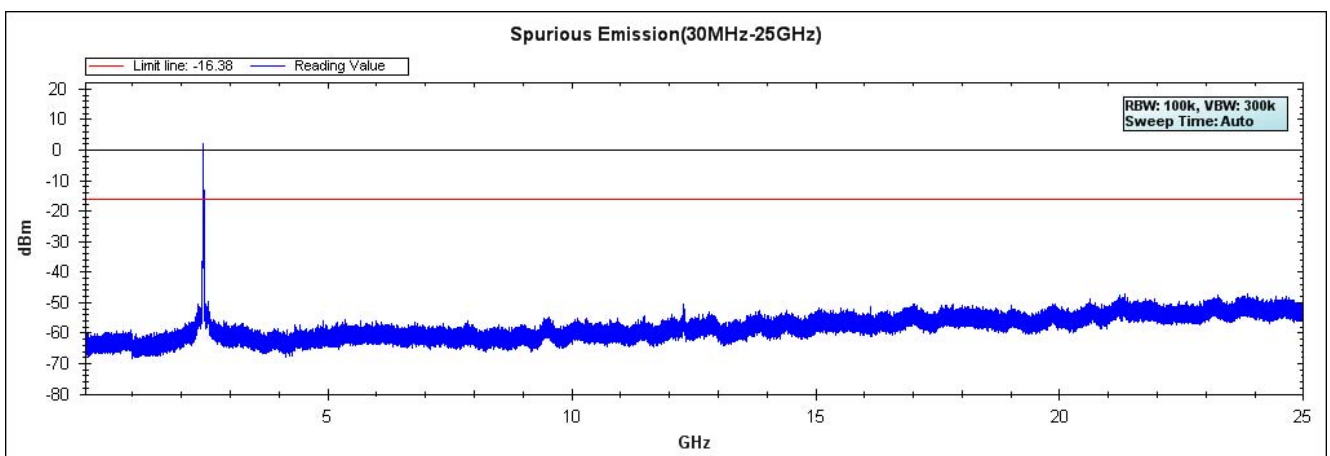

Note: The above test pattern is synthesized by multiple of the frequency range.



Product : TABLET PC
 Test Item : RF Antenna Conducted Spurious
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps

Channel 149 (5745MHz) 30MHz-40GHz

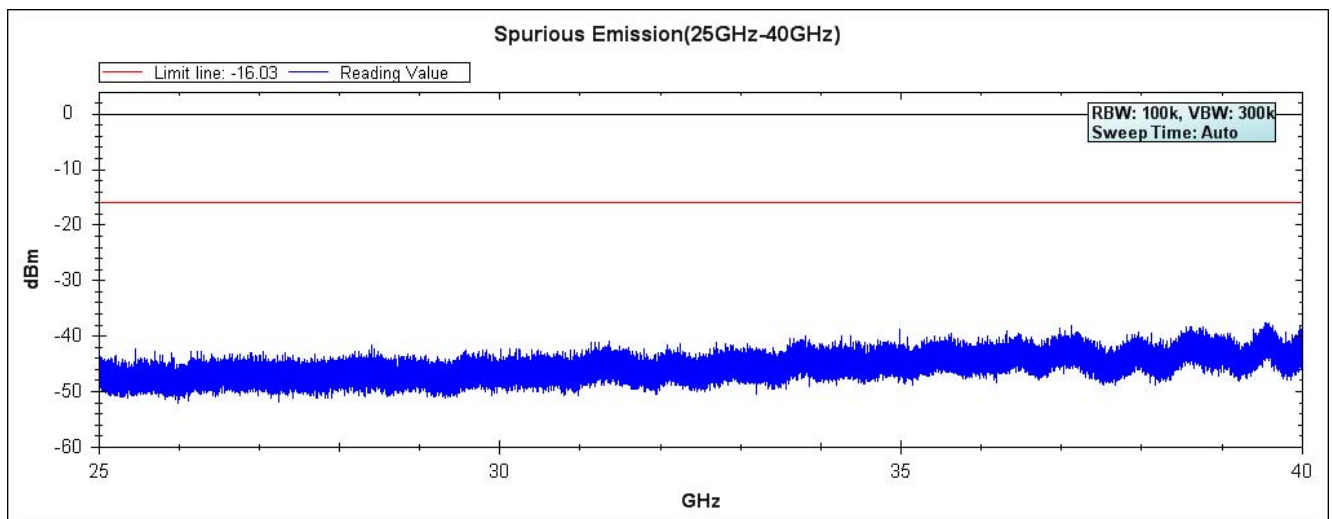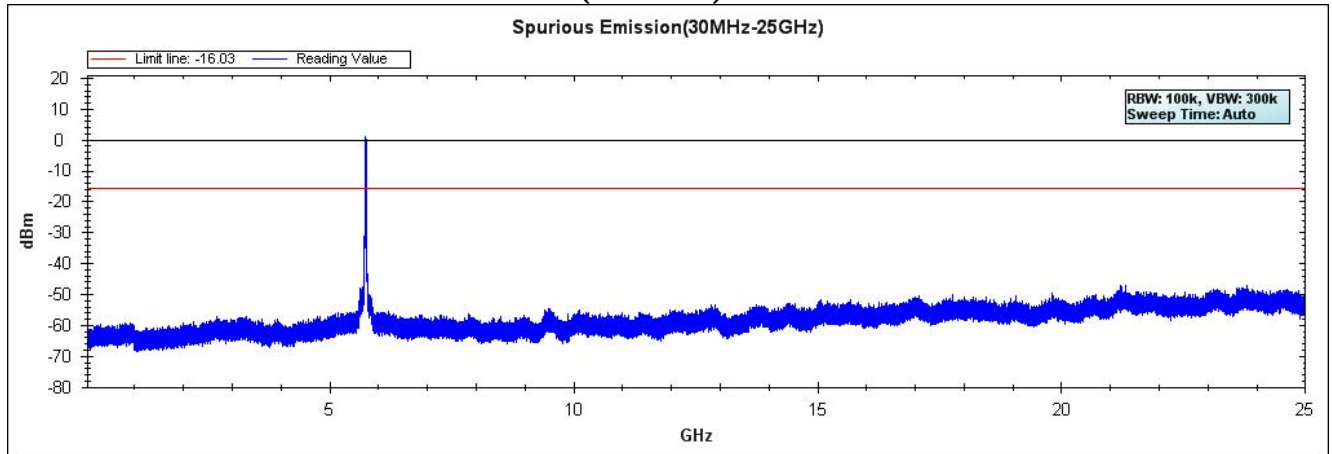



Note: The above test pattern is synthesized by multiple of the frequency range.

Channel 157 (5785MHz) 30MHz-40GHz

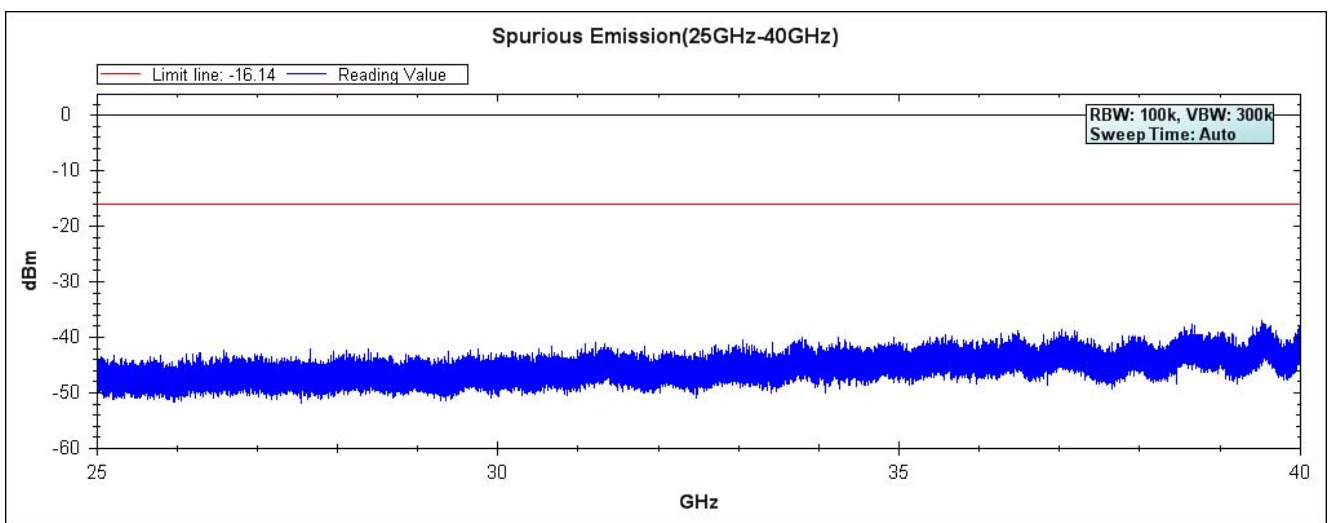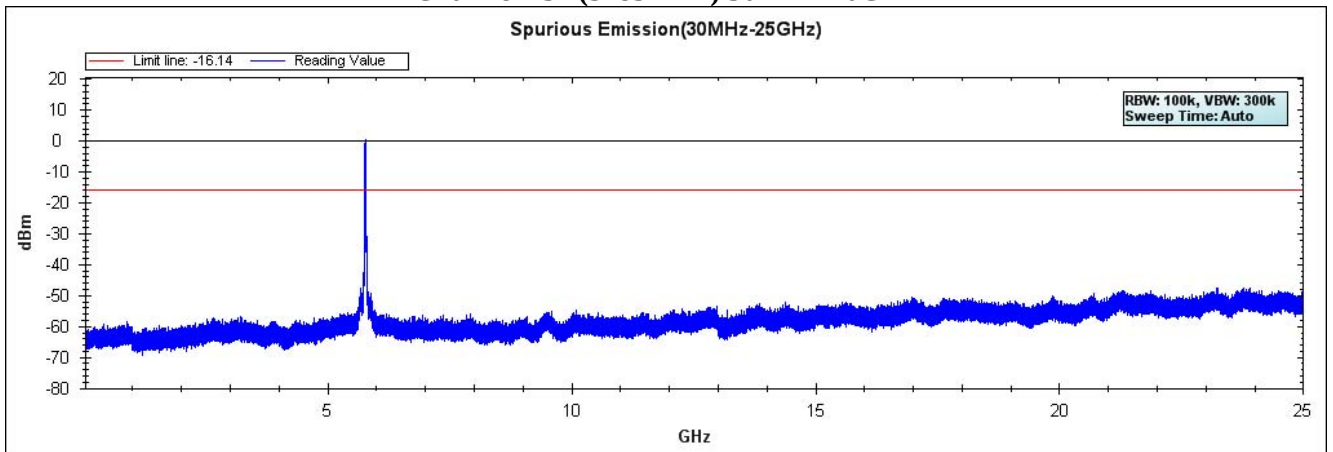

Note: The above test pattern is synthesized by multiple of the frequency range.


Channel 165 (5825MHz) 30MHz-40GHz

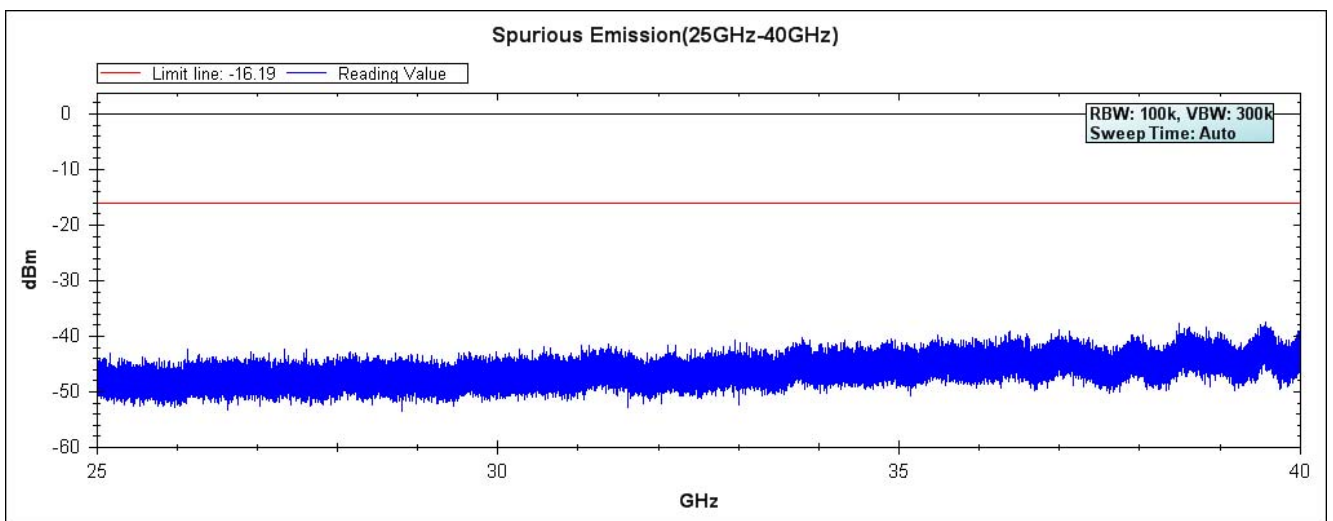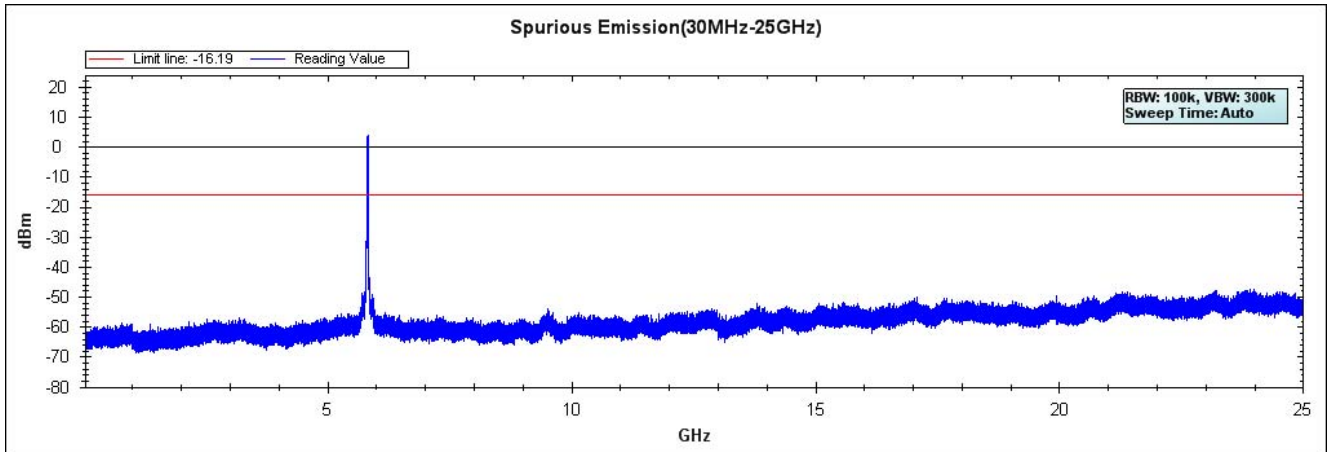


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : TABLET PC
 Test Item : RF Antenna Conducted Spurious
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_7.2Mbps(2.4G Band)


Channel 01 (2412MHz) 30MHz -25GHz

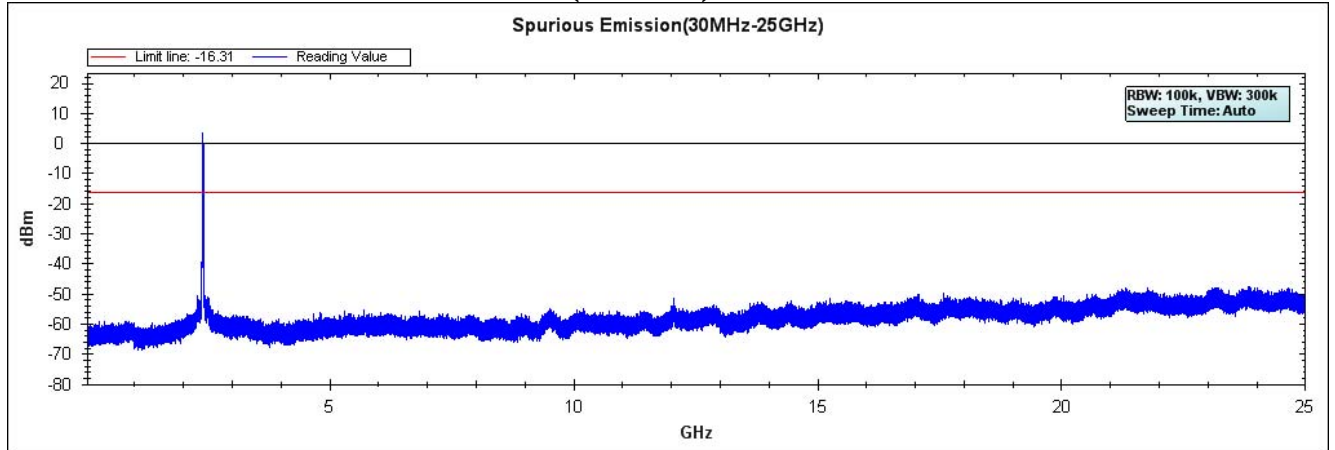

Channel 06 (2437MHz) 30MHz -25GHz

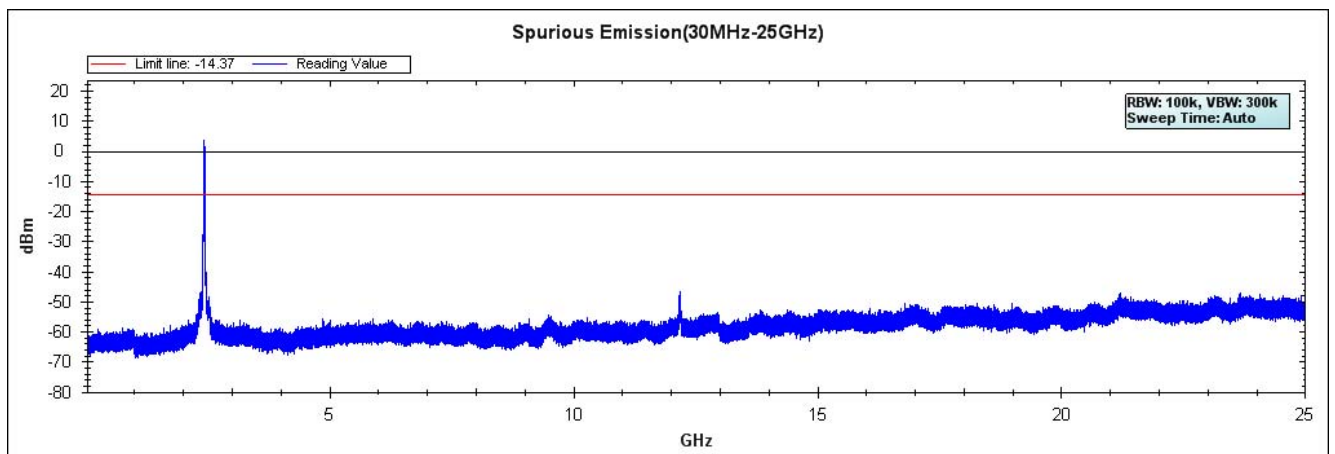


Channel 11 (2462MHz) 30MHz -25GHz

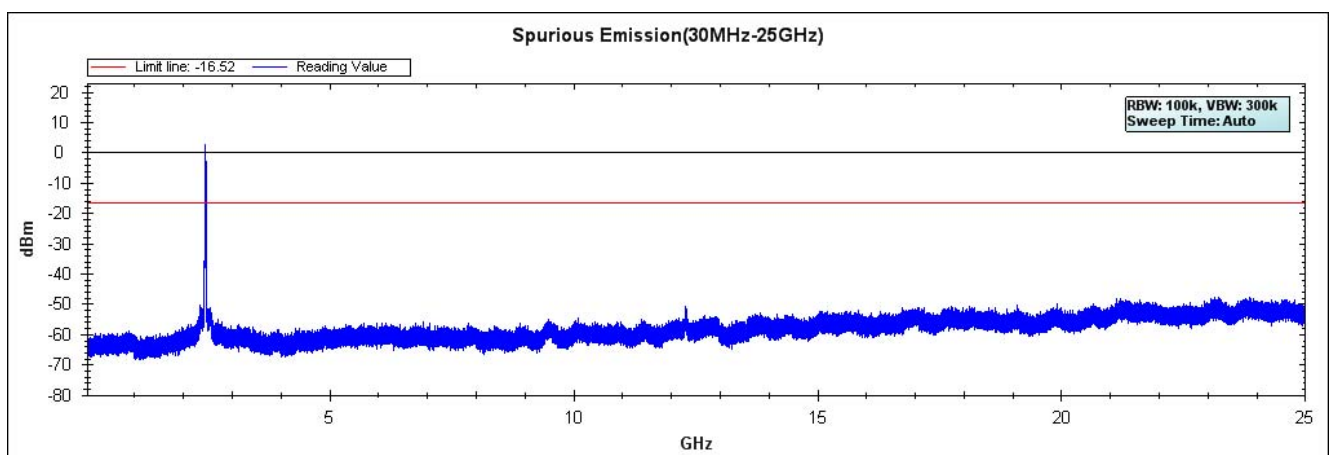


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : TABLET PC
 Test Item : RF Antenna Conducted Spurious
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band)


Channel 03 (2422MHz) 30MHz -25GHz

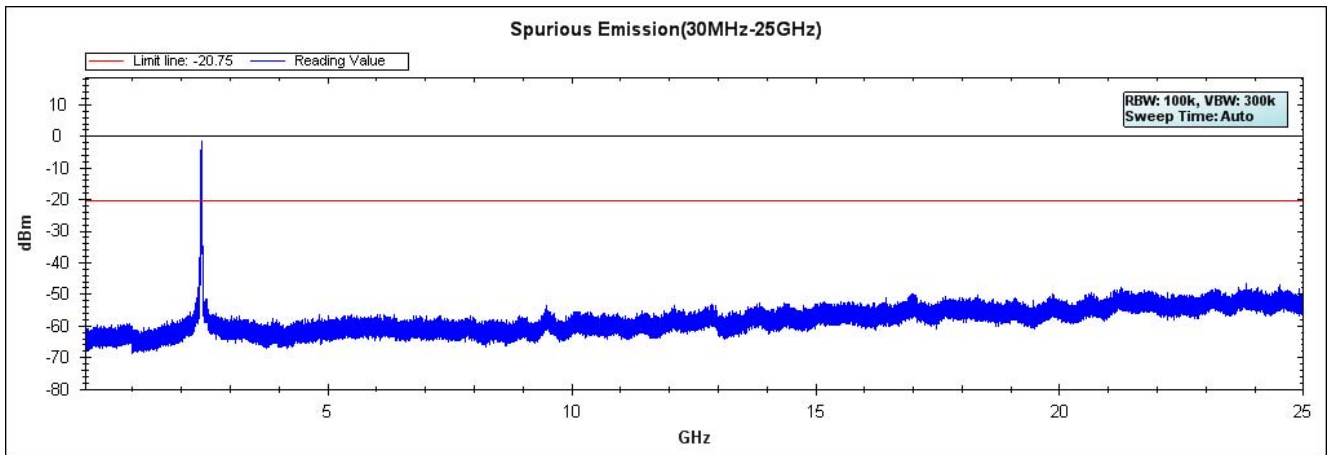

Channel 06 (2437MHz) 30MHz -25GHz

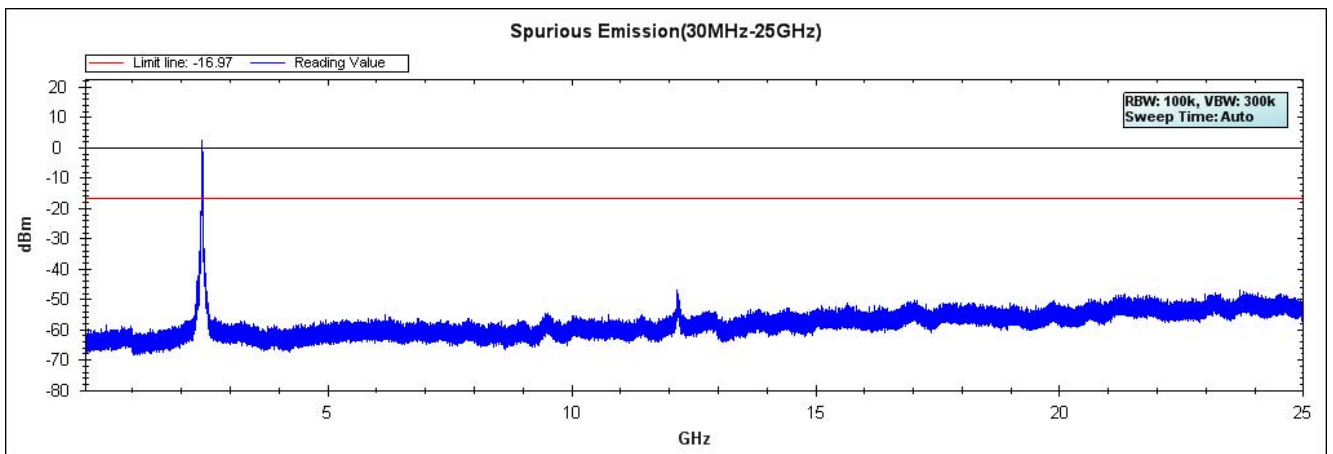



Channel 09 (2452MHz) 30MHz -25GHz

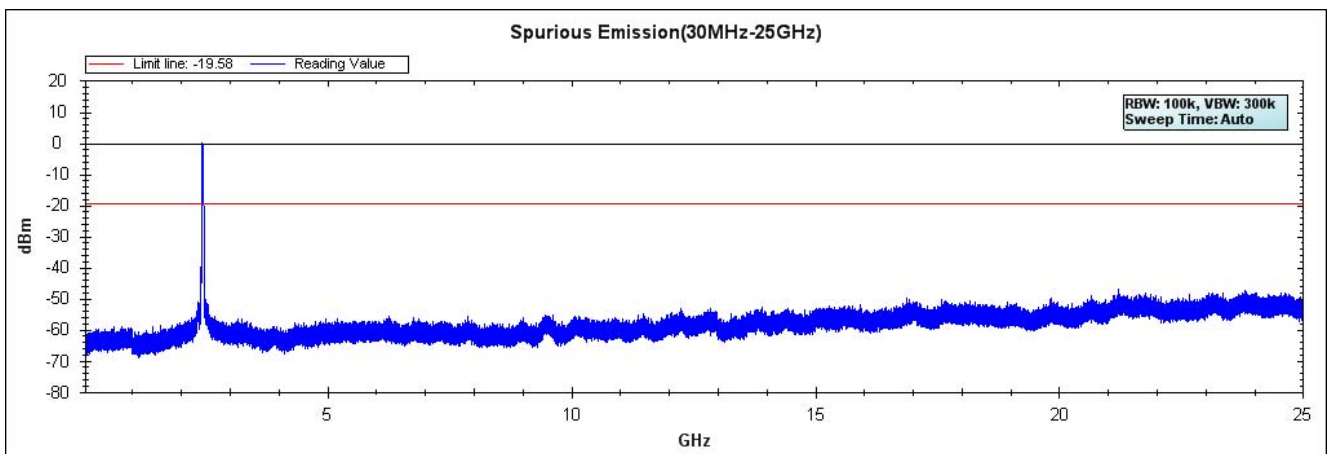

Note: The above test pattern is synthesized by multiple of the frequency range.



Product : TABLET PC
 Test Item : RF Antenna Conducted Spurious
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_7.2Mbps(5G Band)

Channel 149 (5745MHz) 30MHz -40GHz

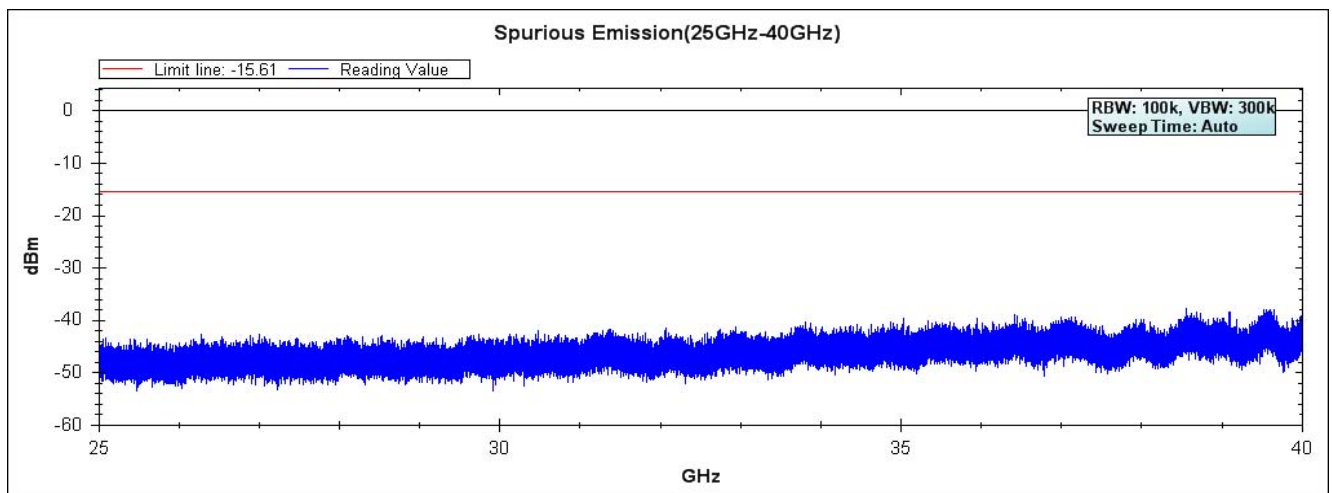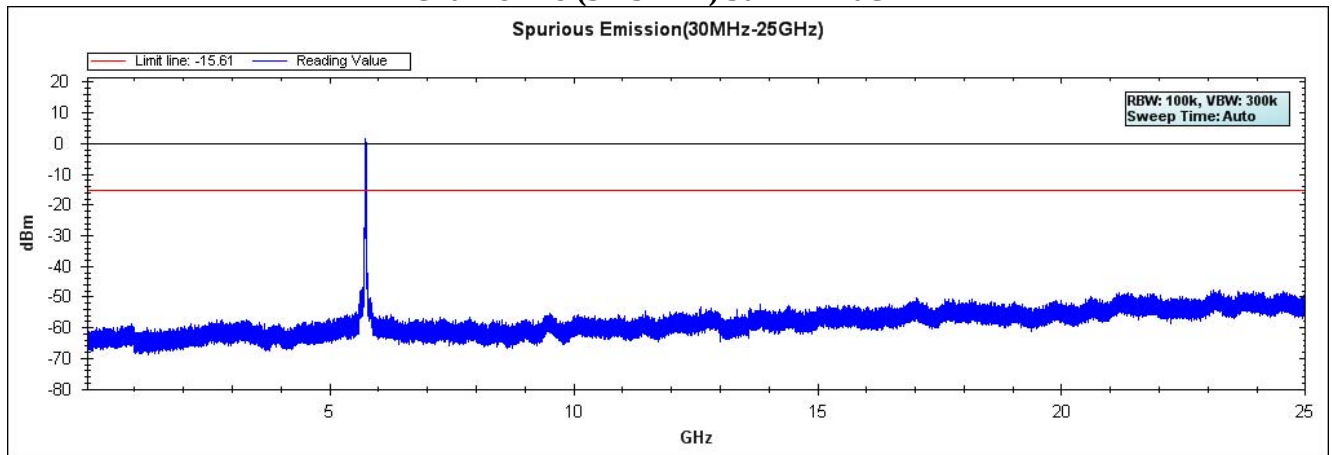



Note: The above test pattern is synthesized by multiple of the frequency range.

Channel 157 (5785MHz) 30MHz -40GHz

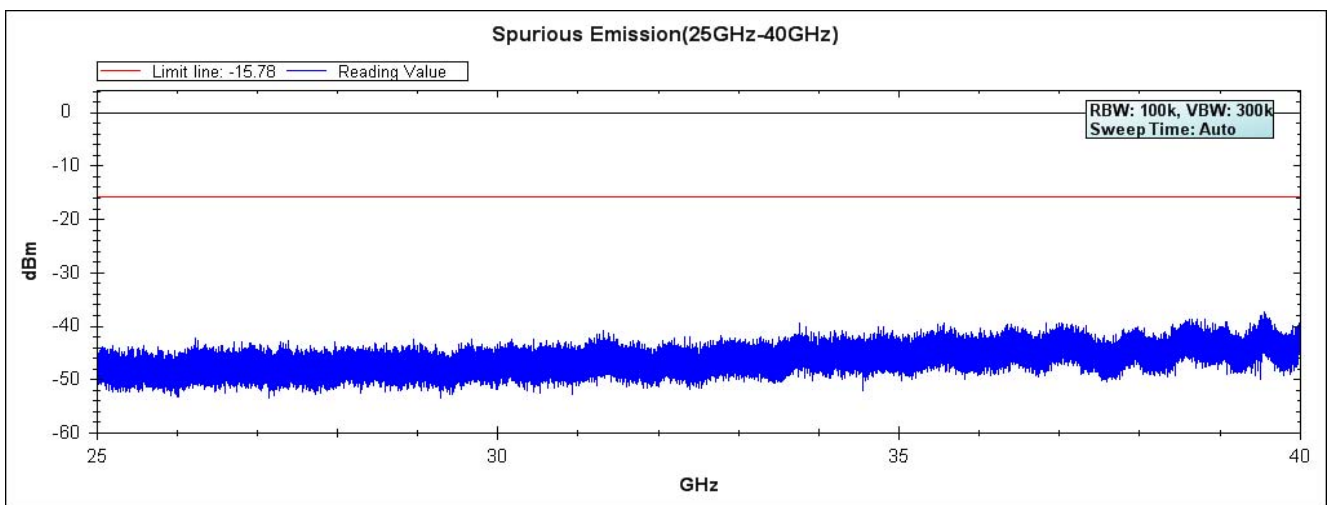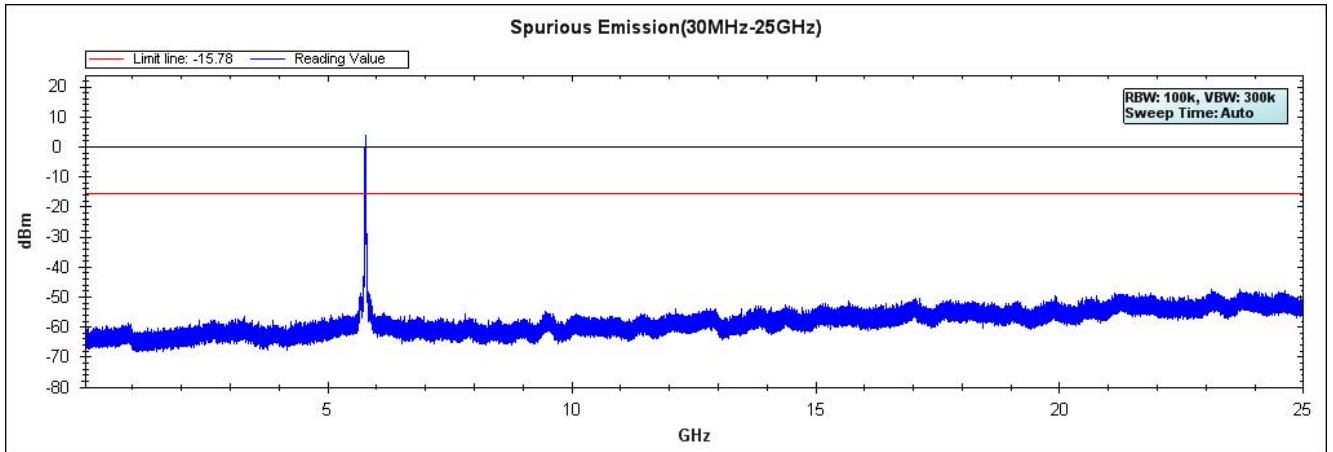

Note: The above test pattern is synthesized by multiple of the frequency range.



Channel 165 (5825MHz) 30MHz -40GHz

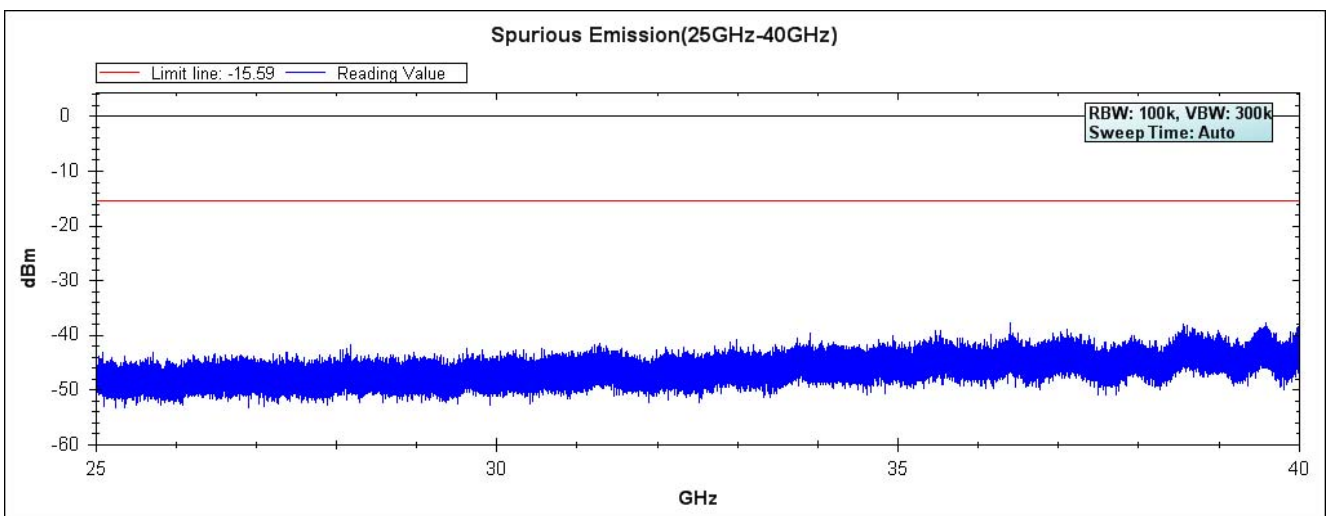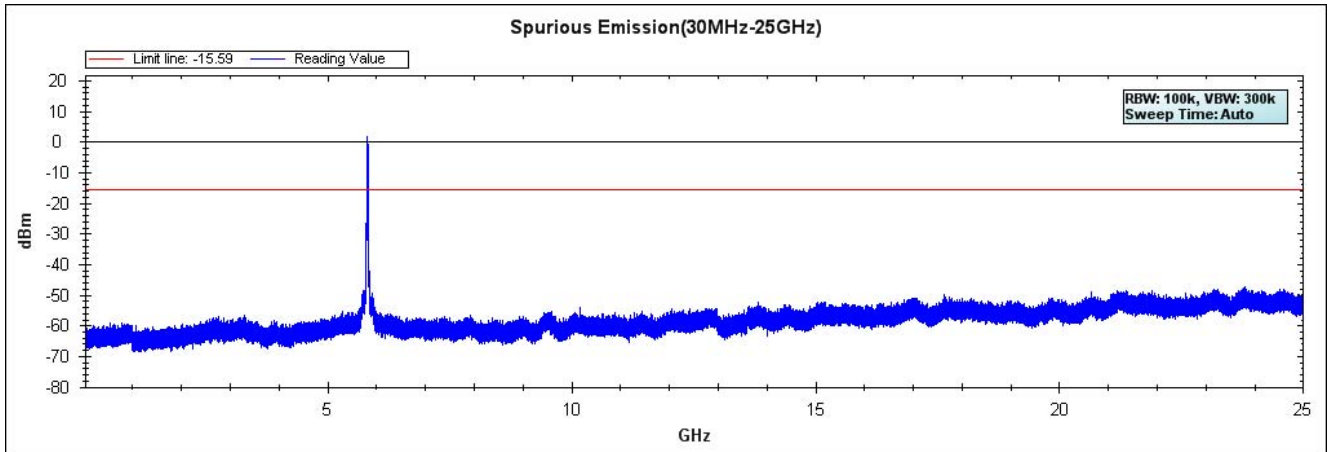

Note: The above test pattern is synthesized by multiple of the frequency range.



Product : TABLET PC
 Test Item : RF Antenna Conducted Spurious
 Test Site : No.3 OATS
 Test Mode : Mode 7: Transmit - 802.11n-40BW_15Mbps(5G Band)

Channel 151 (5755MHz) 30MHz -40GHz

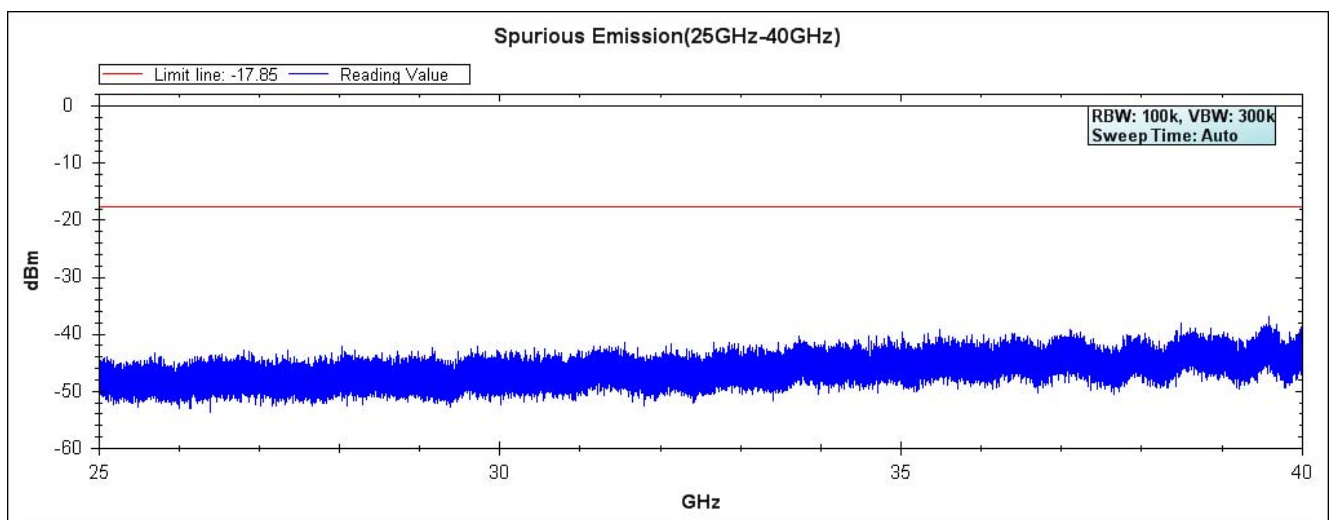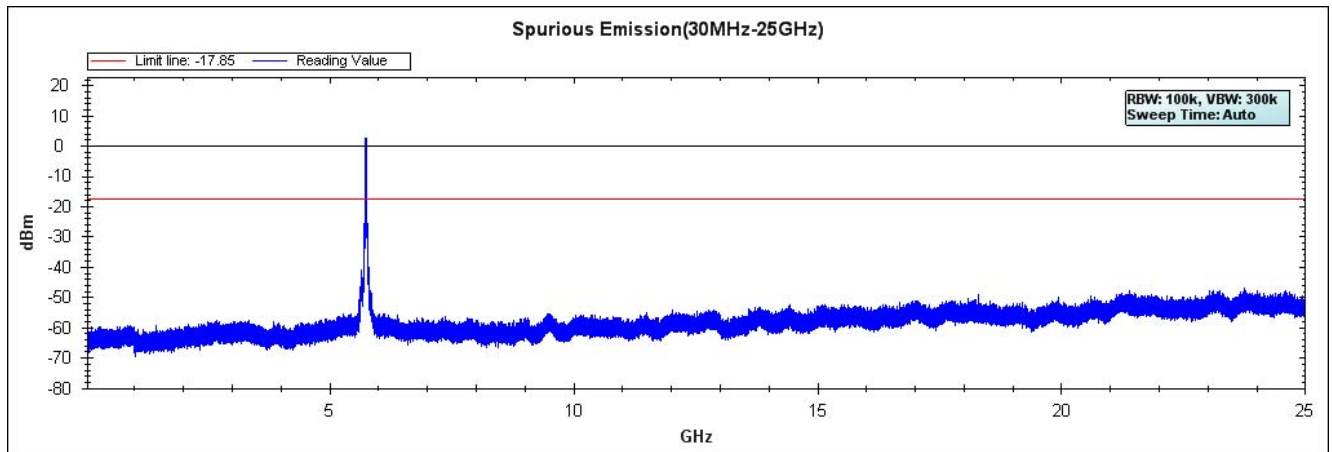

Note: The above test pattern is synthesized by multiple of the frequency range.

Channel 159 (5795MHz) 30MHz -40GHz

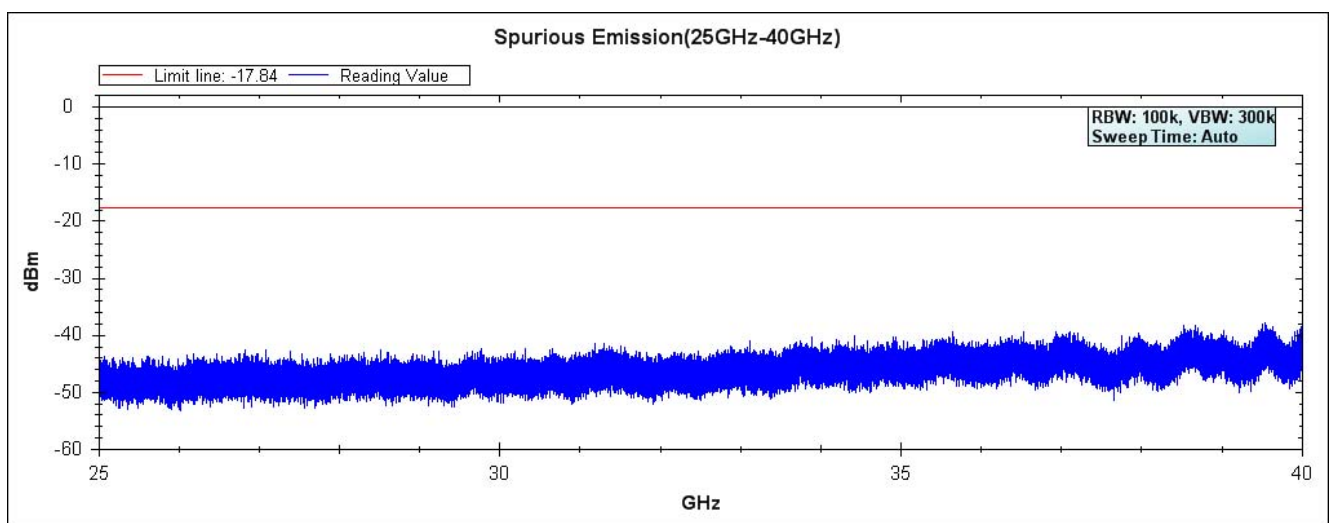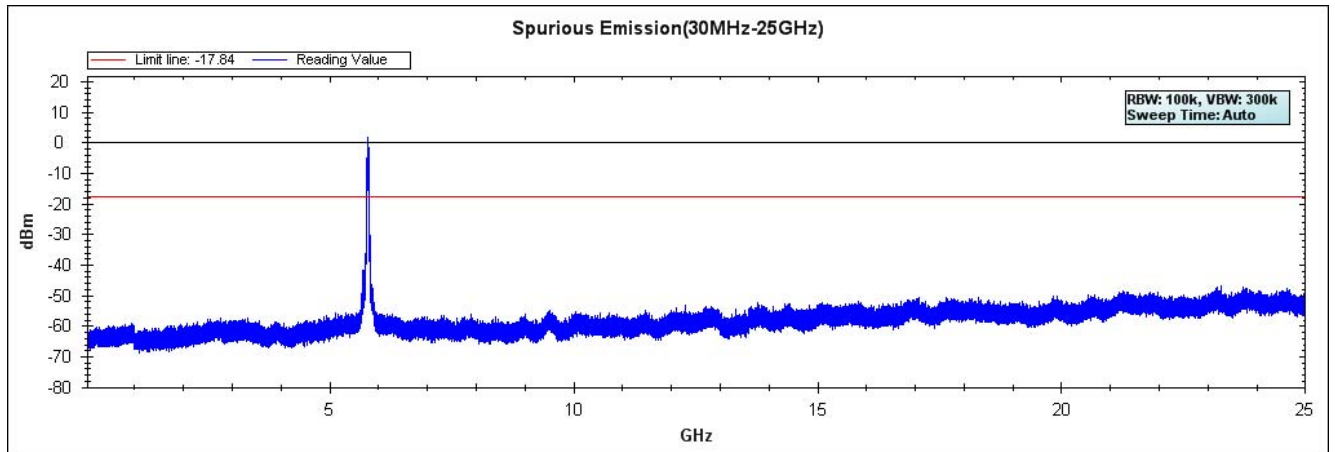

Note: The above test pattern is synthesized by multiple of the frequency range.

6. Band Edge

6.1. Test Equipment

RF Conducted Measurement

The following test equipments are used during the band edge tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014
X	8-WAY Power Divider	JFW	50PD-647 / 526770 0916	Apr., 2014

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

RF Radiated Measurement:


The following test equipments are used during the band edge tests:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 3		Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2013
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2013
		Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2014
		Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2014
	X	Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2013
		Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/ 925975	Mar, 2014
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2014
		Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2013
	X	Coaxial Cable	Quietek	QTK-CABLE/ CAB5	Feb., 2014
	X	Controller	Quietek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A


- Note:
1. All instruments are calibrated every one year.
 2. The test instruments marked by “X” are used to measure the final test results.

6.2. Test Setup

RF Conducted Measurement

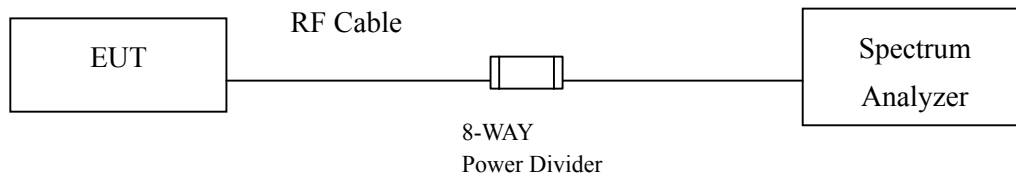

RF Radiated Measurement:

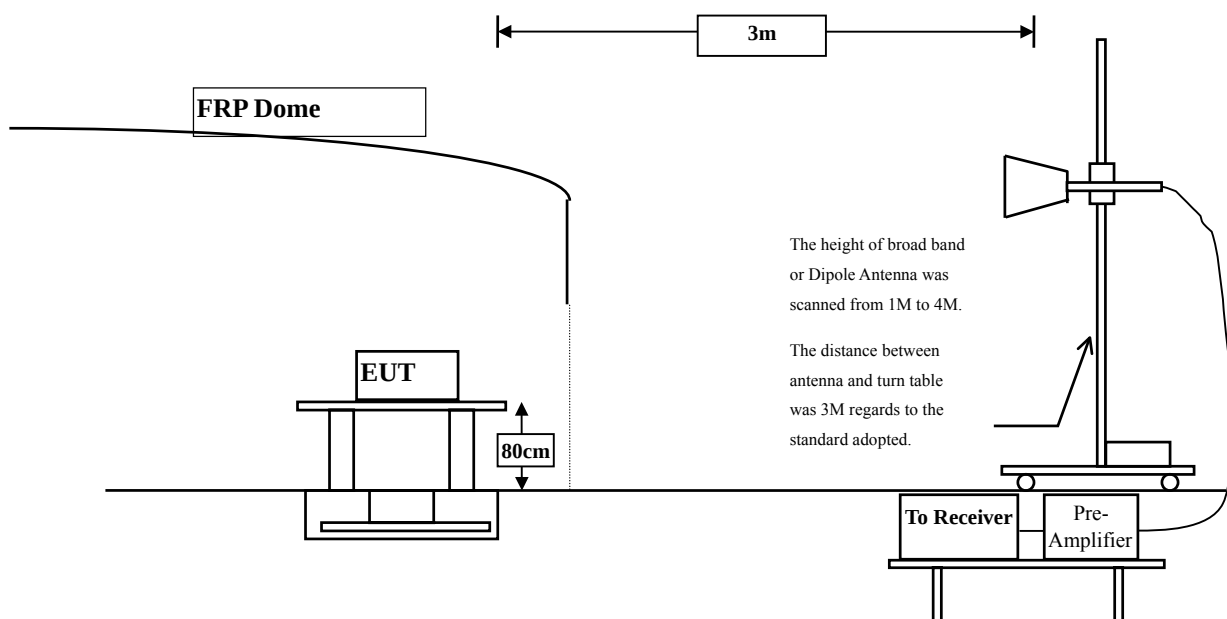

6.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

6.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2009. on radiated measurement.

6.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

6.6. Test Result of Band Edge

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2386.600	31.496	26.264	57.760	74.00	54.00	Pass
01 (Peak)	2390.000	31.509	24.541	56.050	74.00	54.00	Pass
01 (Peak)	2396.800	31.541	39.917	71.459	74.00	54.00	Pass
01 (Peak)	2400.000	31.561	35.356	66.917	--	--	--
01 (Peak)	2413.400	31.649	71.751	103.400	--	--	--
01 (Average)	2385.800	31.493	16.076	47.569	74.00	54.00	Pass
01 (Average)	2390.000	31.509	14.392	45.901	74.00	54.00	Pass
01 (Average)	2397.800	31.548	34.813	66.361	74.00	54.00	Pass
01 (Average)	2400.000	31.561	30.373	61.934	--	--	--
01 (Average)	2414.800	31.660	67.461	99.121	--	--	--

Figure Channel 01:

Horizontal (Peak)


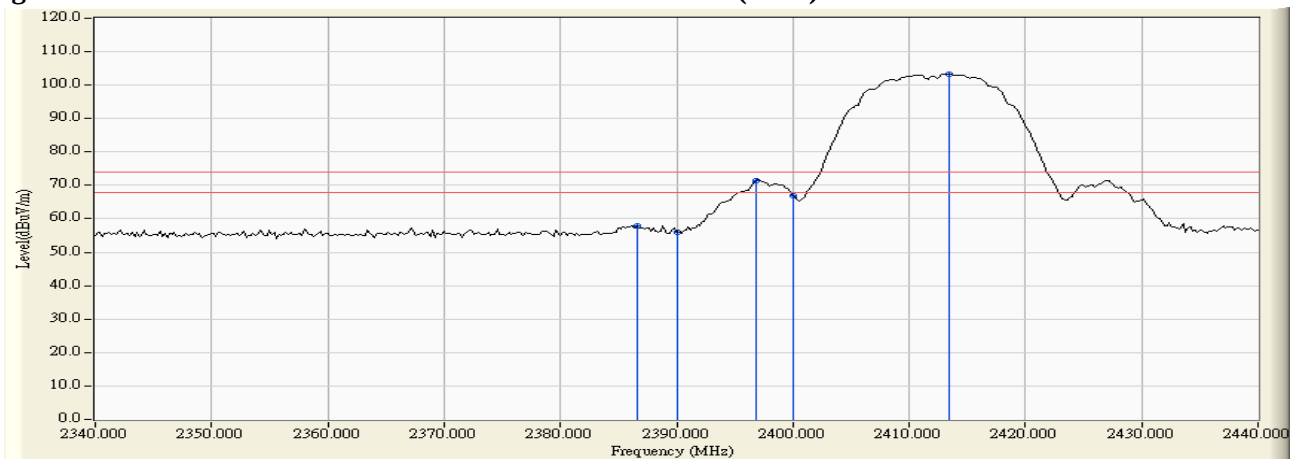


Figure Channel 01:

Horizontal (Average)

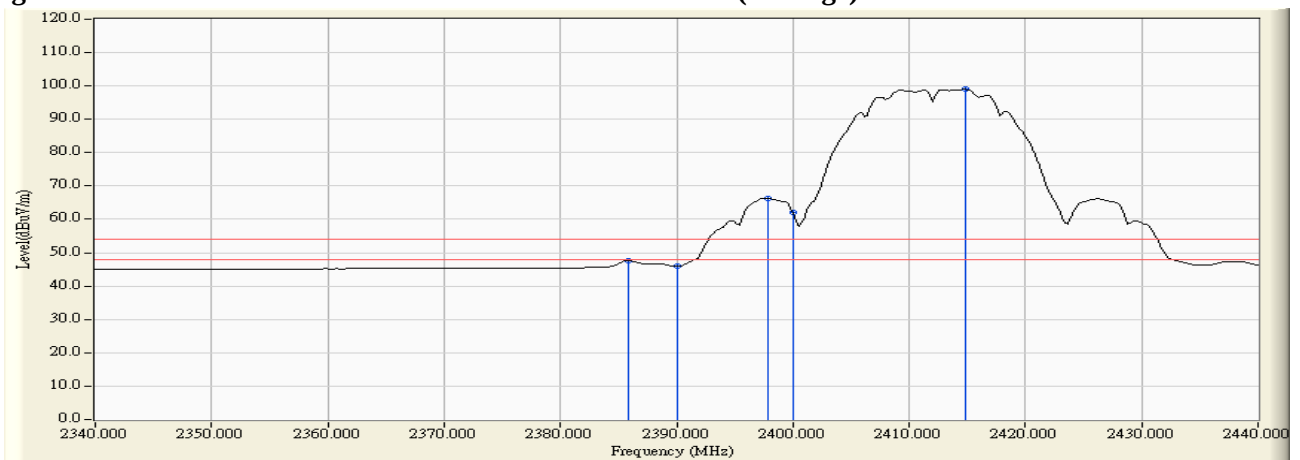

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2376.400	30.978	25.054	56.032	74.00	54.00	Pass
01 (Peak)	2390.000	30.915	24.010	54.925	74.00	54.00	Pass
01 (Peak)	2396.800	30.904	36.232	67.136	74.00	54.00	Pass
01 (Peak)	2400.000	30.912	31.880	62.792	--	--	--
01 (Peak)	2413.400	30.959	67.858	98.817	--	--	--
01 (Average)	2386.000	30.934	14.608	45.542	74.00	54.00	Pass
01 (Average)	2390.000	30.915	13.891	44.806	74.00	54.00	Pass
01 (Average)	2397.800	30.907	30.512	61.419	74.00	54.00	Pass
01 (Average)	2400.000	30.912	26.432	57.344	--	--	--
01 (Average)	2414.800	30.968	63.574	94.542	--	--	--

Figure Channel 01:

Vertical (Peak)


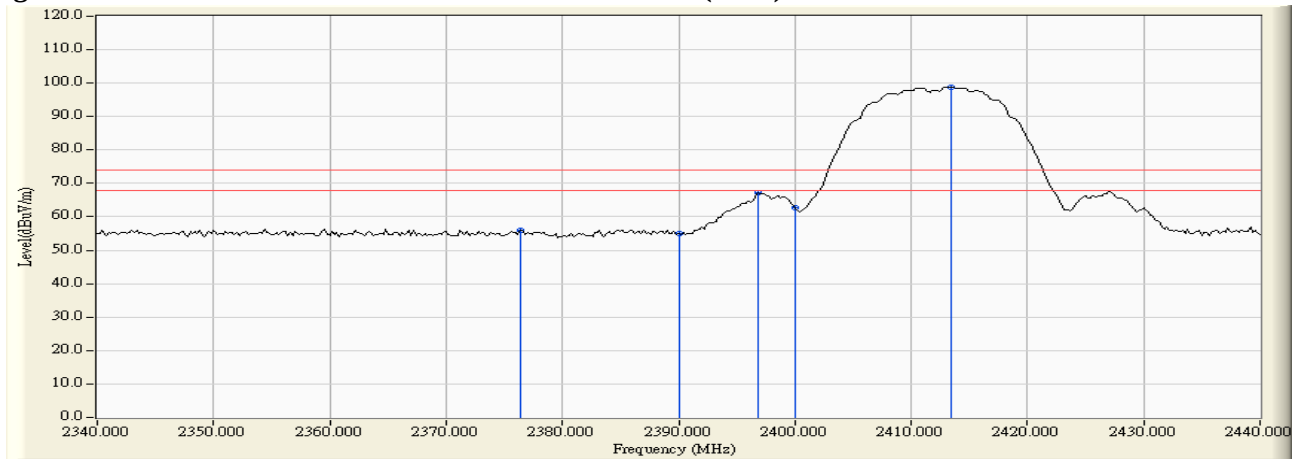


Figure Channel 01:

Vertical (Average)

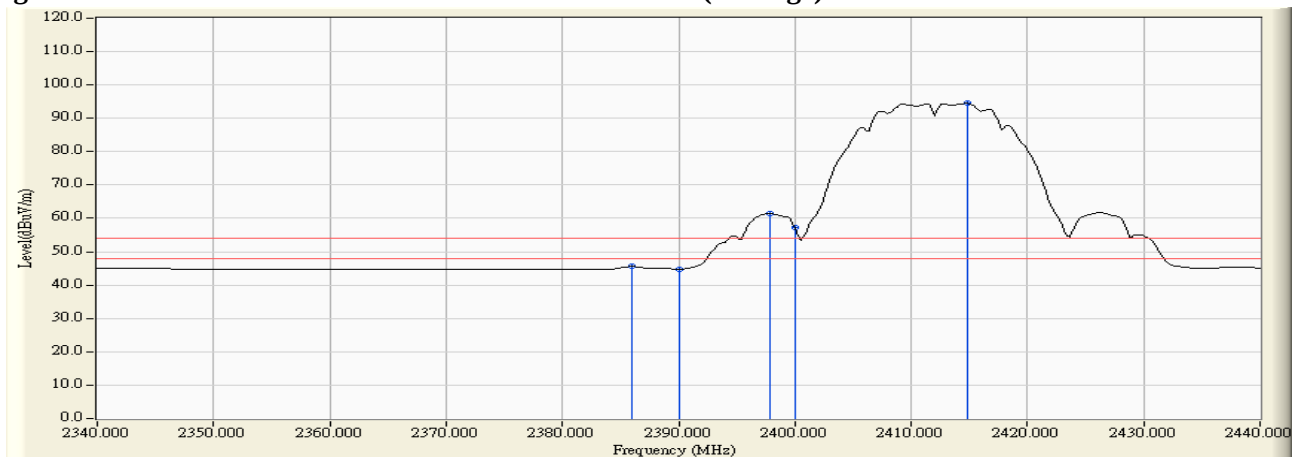

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2463.300	32.029	73.671	105.700	--	--	--
11 (Peak)	2483.500	32.182	27.311	59.493	74.00	54.00	Pass
11 (Peak)	2487.900	32.216	28.139	60.354	74.00	54.00	Pass
11 (Average)	2459.300	31.999	69.370	101.369	--	--	--
11 (Average)	2483.500	32.182	16.840	49.022	74.00	54.00	Pass
11 (Average)	2488.300	32.218	17.576	49.794	74.00	54.00	Pass

Figure Channel 11: Horizontal (Peak)


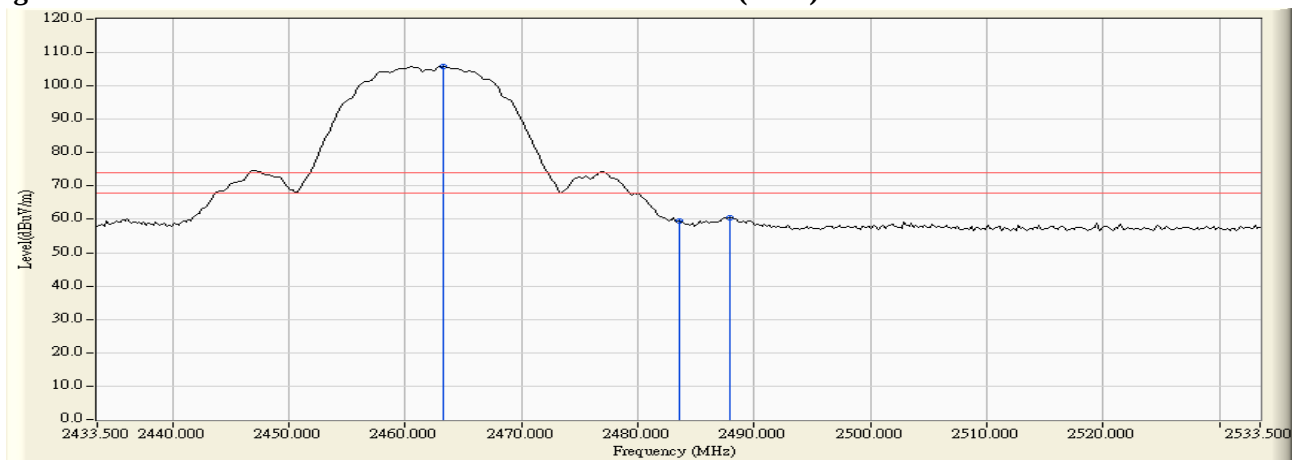


Figure Channel 11: Horizontal (Average)

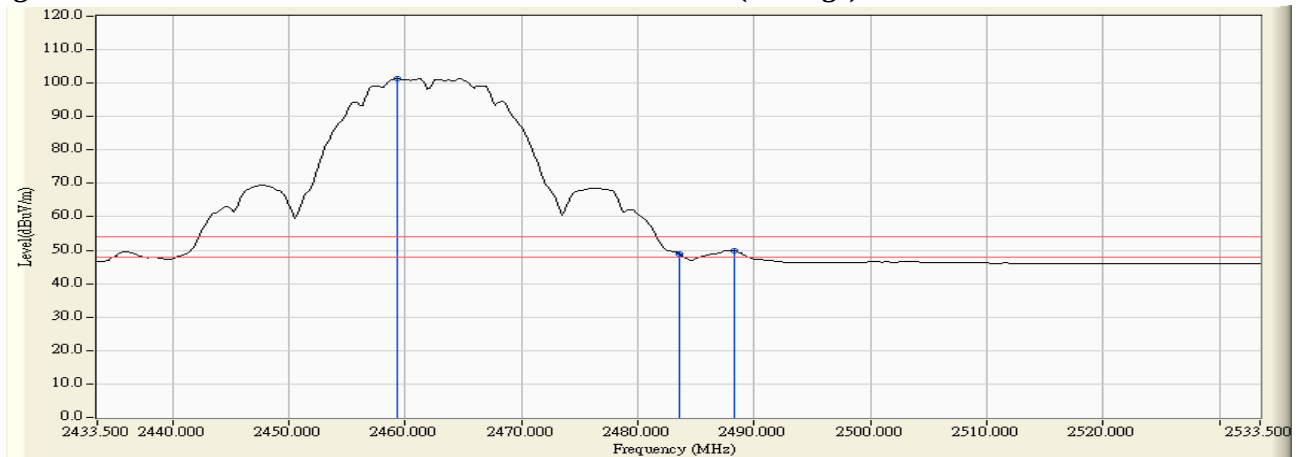

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2463.300	31.299	69.045	100.344	--	--	--
11 (Peak)	2483.500	31.435	25.367	56.802	74.00	54.00	Pass
11 (Peak)	2487.700	31.463	25.978	57.442	74.00	54.00	Pass
11 (Average)	2464.500	31.307	64.810	96.117	--	--	--
11 (Average)	2483.500	31.435	15.291	46.726	74.00	54.00	Pass
11 (Average)	2487.900	31.465	15.943	47.408	74.00	54.00	Pass

Figure Channel 11: Vertical (Peak)


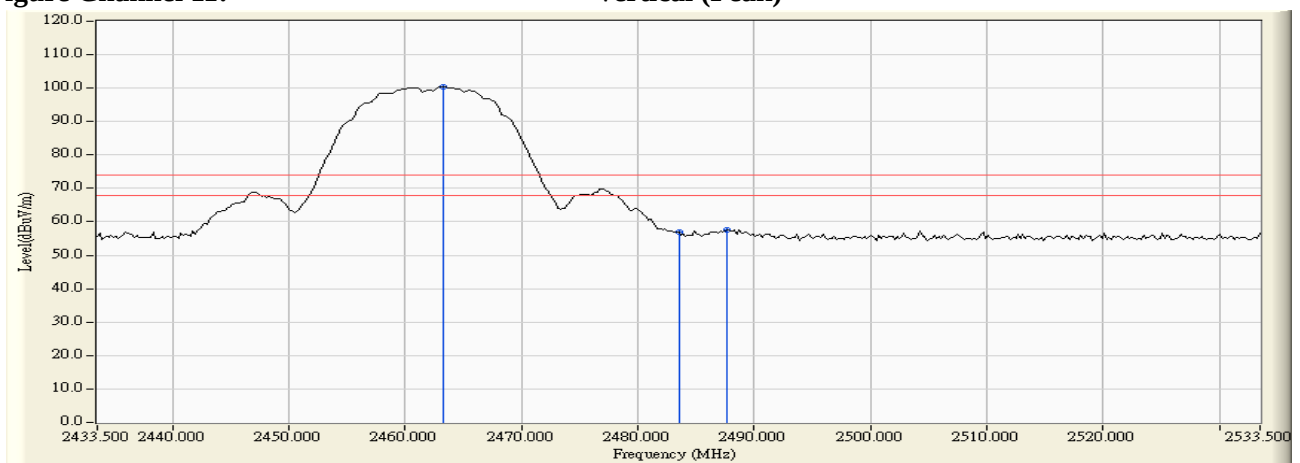


Figure Channel 11: Vertical (Average)

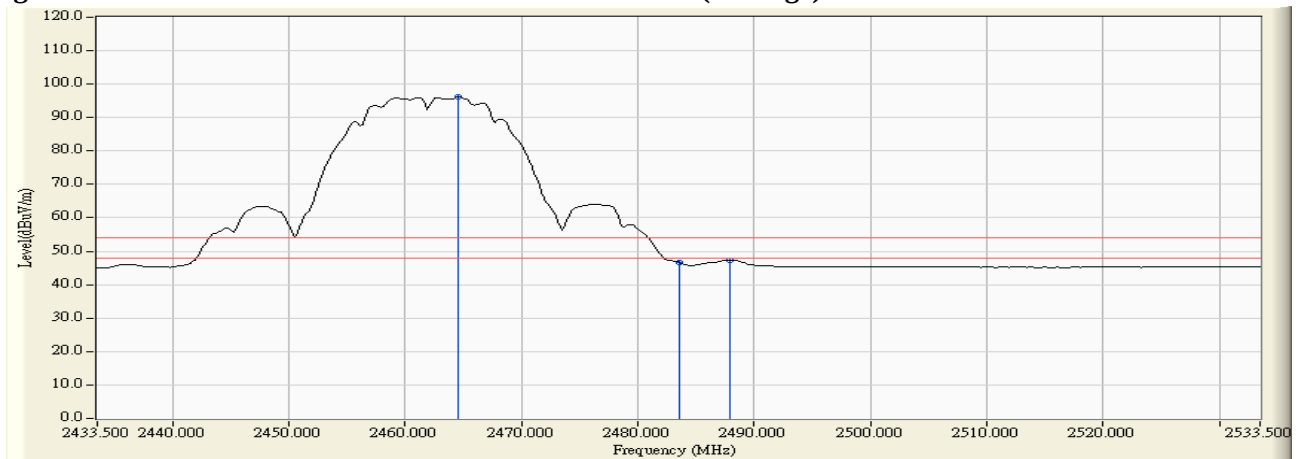

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	31.509	35.493	67.002	74.00	54.00	Pass
01 (Peak)	2400.000	31.561	51.347	82.908	--	--	--
01 (Peak)	2415.523	31.665	72.968	104.633	--	--	--
01(Average)	2390.000	31.509	18.606	50.115	74.00	54.00	Pass
01(Average)	2400.000	31.561	31.958	63.519	--	--	--
01(Average)	2415.921	31.668	62.465	94.133	--	--	--

Figure Channel 01: Horizontal (Peak)


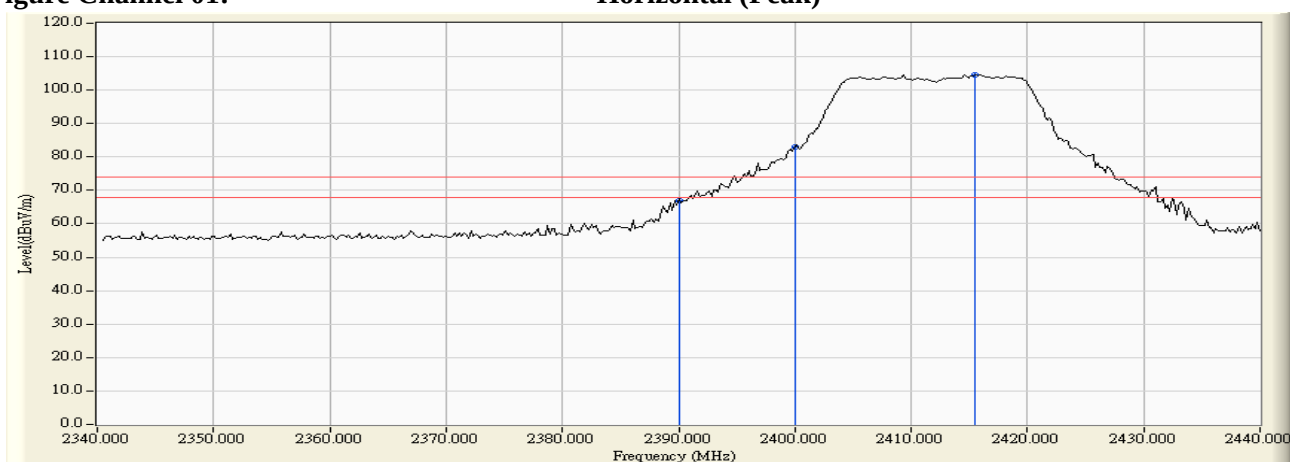


Figure Channel 01: Horizontal (Average)

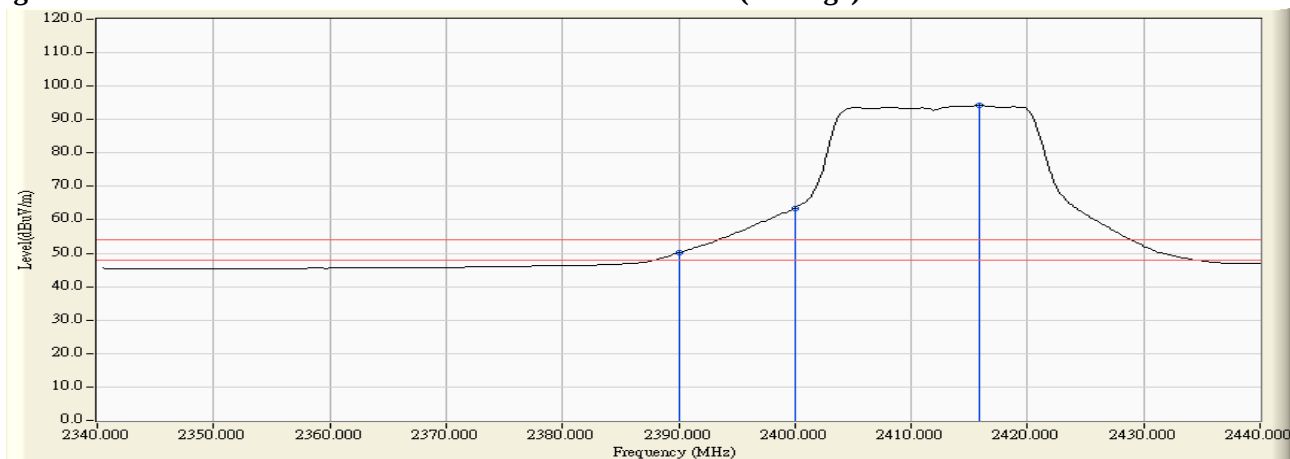

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	30.915	32.743	63.658	74.00	54.00	Pass
01 (Peak)	2400.000	30.912	46.395	77.307	--	--	--
01 (Peak)	2416.319	30.979	69.418	100.397	--	--	--
01 (Average)	2390.000	30.915	16.248	47.163	74.00	54.00	Pass
01 (Average)	2400.000	30.912	28.536	59.448	--	--	--
01 (Average)	2415.921	30.976	59.015	89.991	--	--	--

Figure Channel 01: Vertical (Peak)


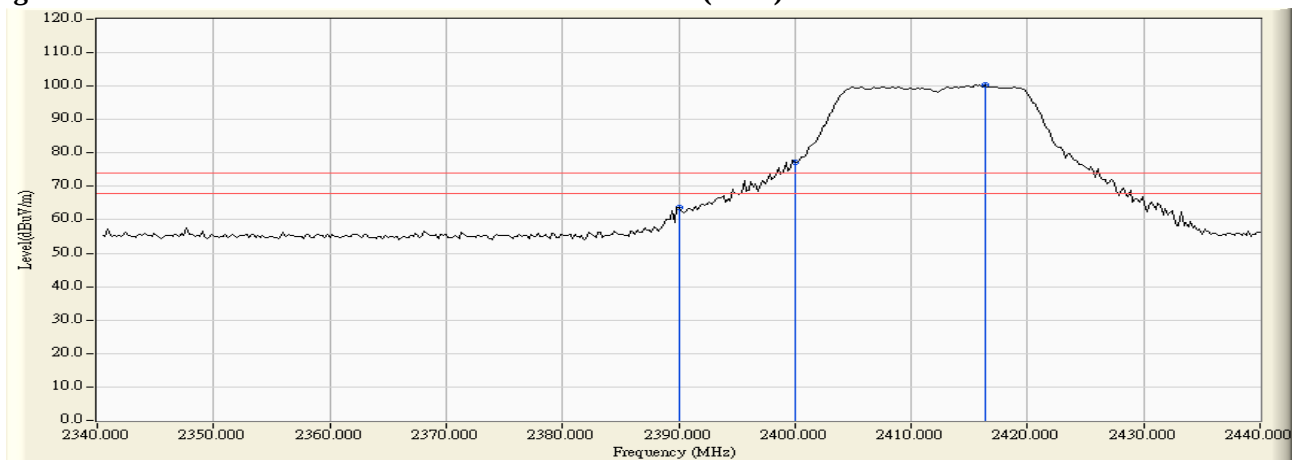


Figure Channel 01: Vertical (Average)

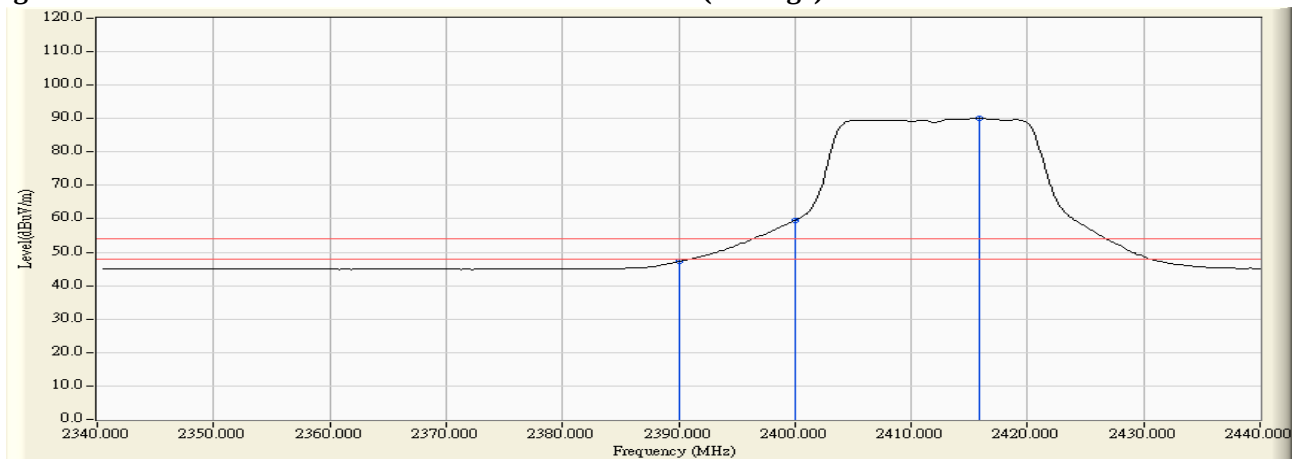

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
02 (Peak)	2387.900	31.501	32.572	64.073	74.00	54.00	Pass
02 (Peak)	2390.000	31.509	31.339	62.848	--	--	--
02 (Peak)	2400.000	31.561	50.200	81.761	--	--	--
02 (Peak)	2419.100	31.692	75.544	107.237	74.00	54.00	Pass
02 (Average)	2390.000	31.509	17.301	48.810	74.00	54.00	Pass
02 (Average)	2400.000	31.561	31.355	62.916	--	--	--
02 (Average)	2423.900	31.729	64.685	96.414	--	--	--

Figure Channel 02: Horizontal (Peak)


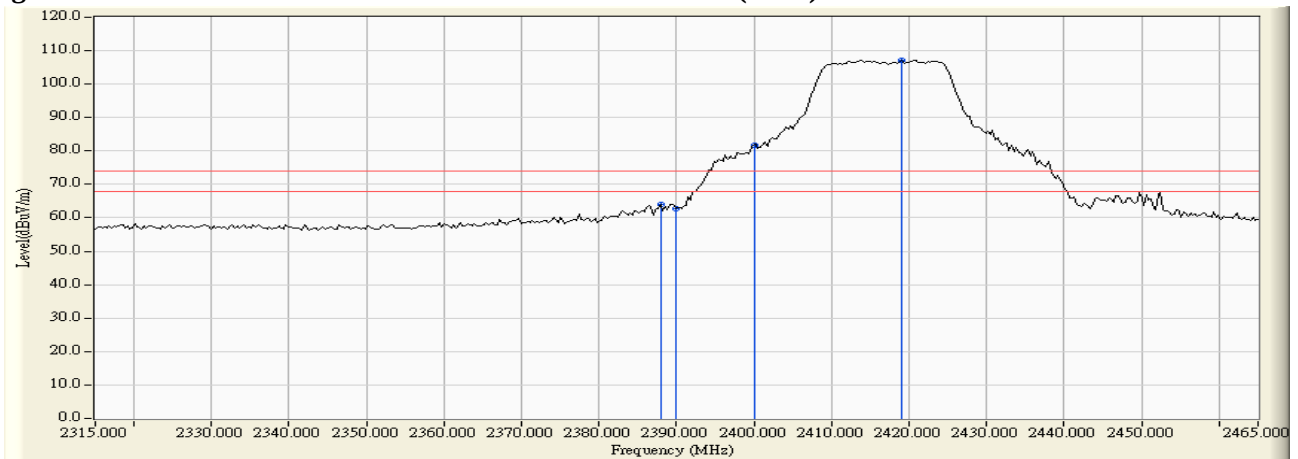


Figure Channel 02: Horizontal (Average)

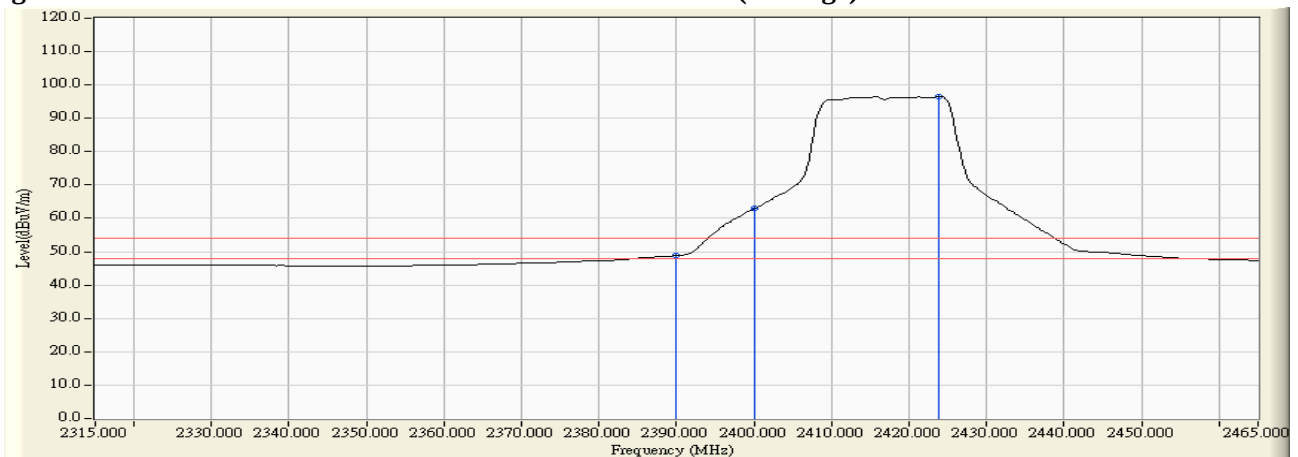

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
02 (Peak)	2387.900	30.925	28.901	59.826	74.00	54.00	Pass
02 (Peak)	2390.000	30.915	28.540	59.455	74.00	54.00	Pass
02 (Peak)	2398.400	30.909	43.492	74.400	74.00	54.00	Pass
02 (Peak)	2400.000	30.912	42.941	73.853	--	--	--
02 (Peak)	2414.000	30.963	71.925	102.888	--	--	--
02 (Average)	2390.000	30.915	15.372	46.287	74.00	54.00	Pass
02 (Average)	2400.000	30.912	27.485	58.397	--	--	--
02 (Average)	2423.900	31.030	60.992	92.022	--	--	--

Figure Channel 02: Vertical (Peak)


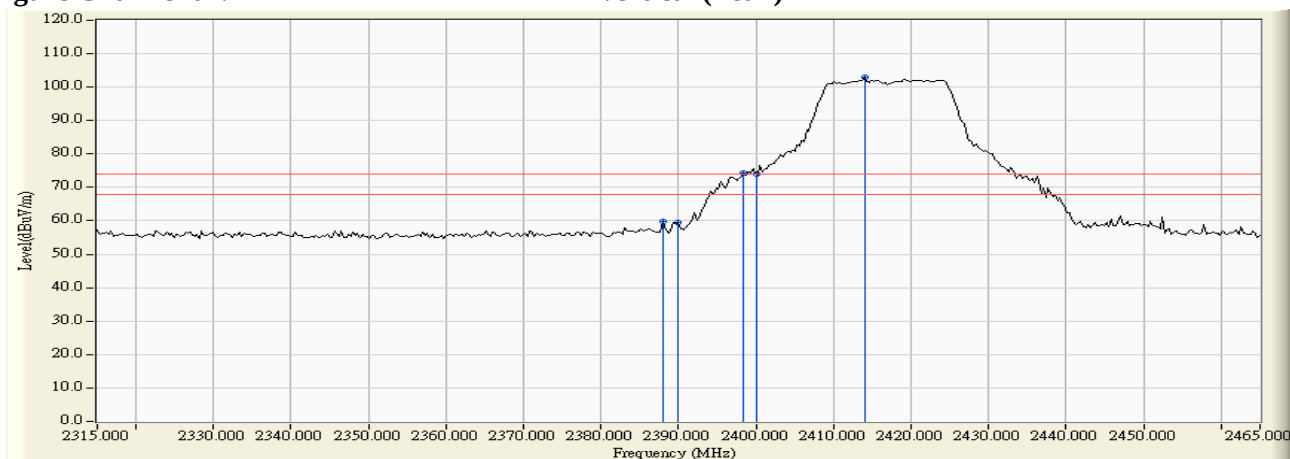


Figure Channel 02: Vertical (Average)

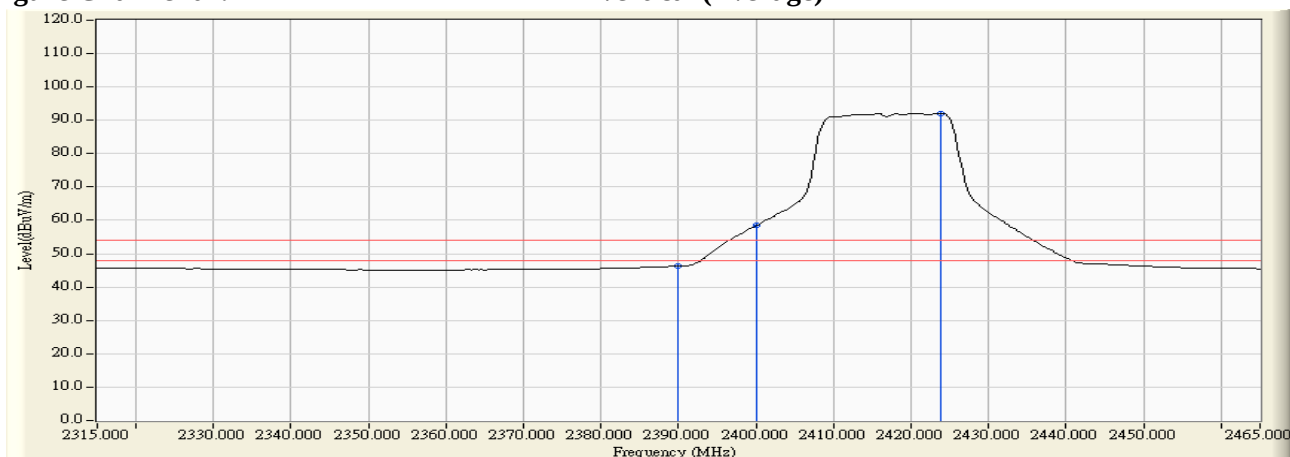

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
 4. “ * ”, means this data is the worst emission level.
 5. Measurement Level = Reading Level + Correct Factor.
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
10 (Peak)	2461.300	32.014	77.426	109.440	--	--	--
10 (Peak)	2483.500	32.182	32.686	64.868	74.00	54.00	Pass
10 (Peak)	2489.500	32.228	33.555	65.782	74.00	54.00	Pass
10 (Average)	2460.700	32.010	66.601	98.611	--	--	--
10 (Average)	2483.500	32.182	19.338	51.520	74.00	54.00	Pass

Figure Channel 10: Horizontal (Peak)


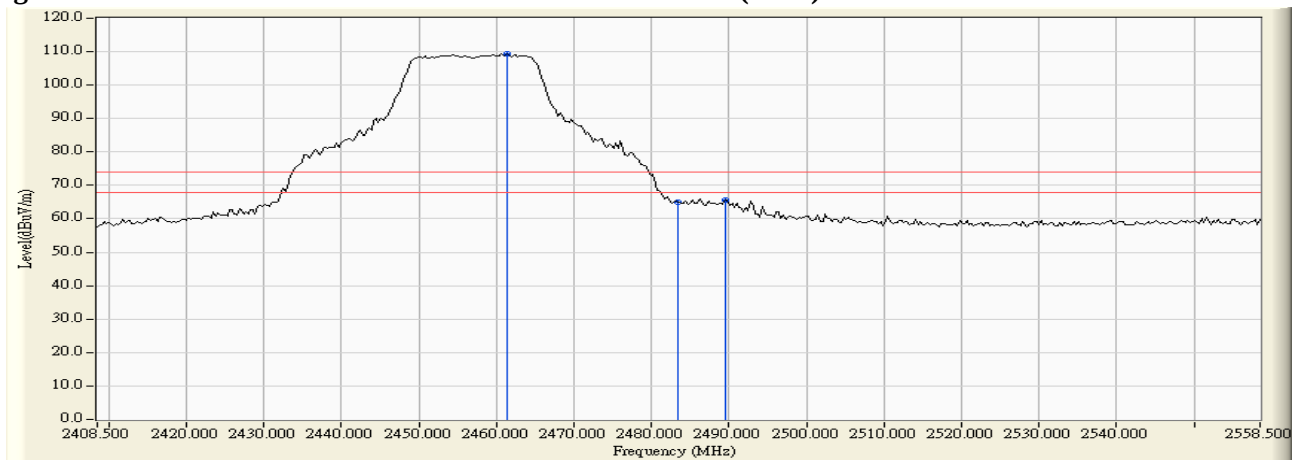


Figure Channel 10: Horizontal (Average)

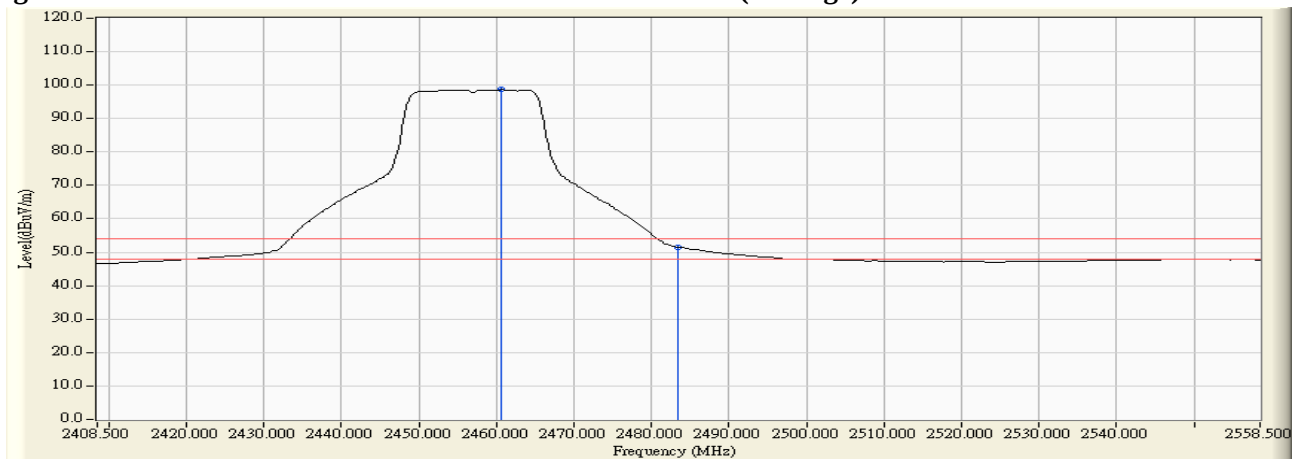

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
10 (Peak)	2460.400	31.279	72.904	104.183	--	--	--
10 (Peak)	2483.500	31.435	30.006	61.441	74.00	54.00	Pass
10 (Peak)	2488.000	31.466	31.070	62.536	74.00	54.00	Pass
10 (Average)	2460.700	31.281	62.475	93.756	--	--	--
10 (Average)	2483.500	31.435	17.221	48.656	74.00	54.00	Pass

Figure Channel 10: Vertical (Peak)


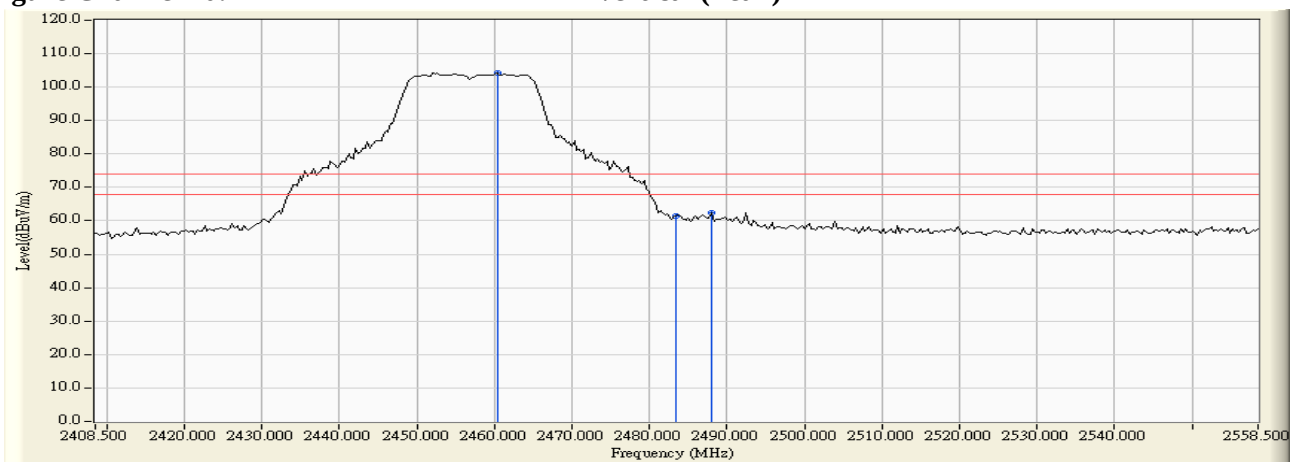


Figure Channel 10: Vertical (Average)

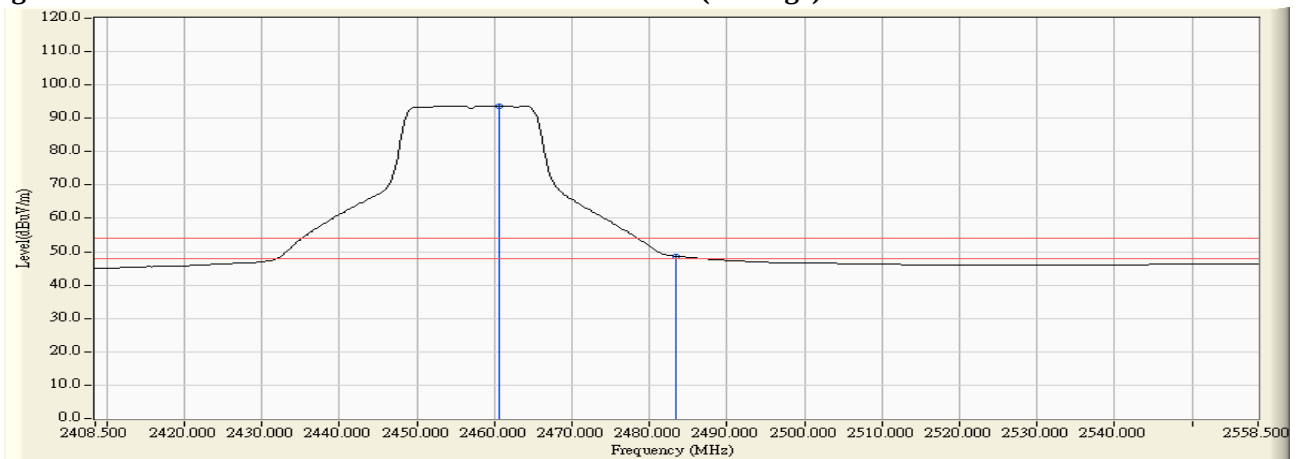

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2465.500	32.046	74.154	106.200	--	--	--
11 (Peak)	2483.500	32.182	37.952	70.134	74.00	54.00	Pass
11 (Average)	2465.900	32.049	63.448	95.497	--	--	--
11 (Average)	2483.500	32.182	18.858	51.040	74.00	54.00	Pass

Figure Channel 11: Horizontal (Peak)


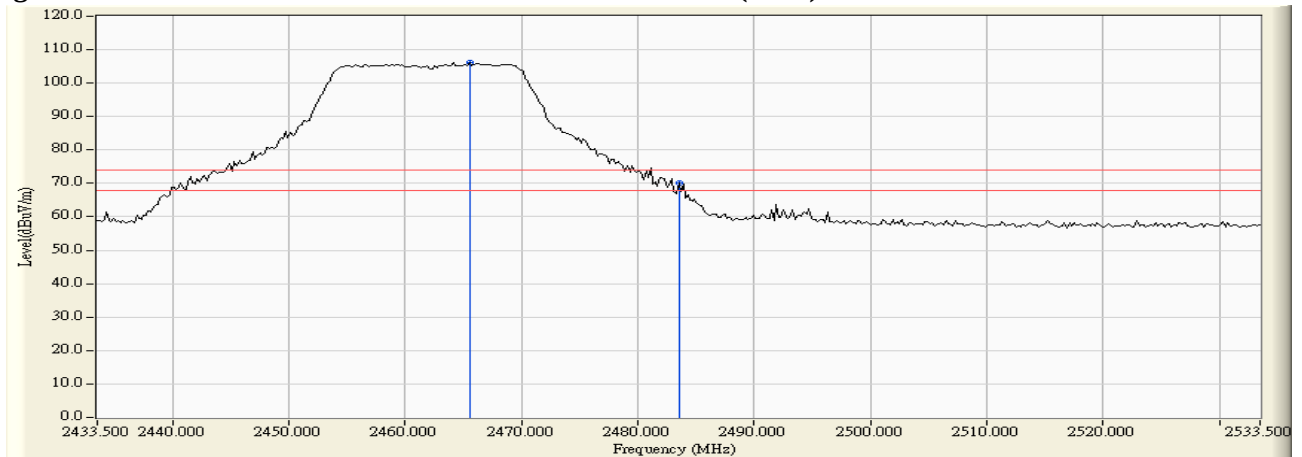


Figure Channel 11: Horizontal (Average)

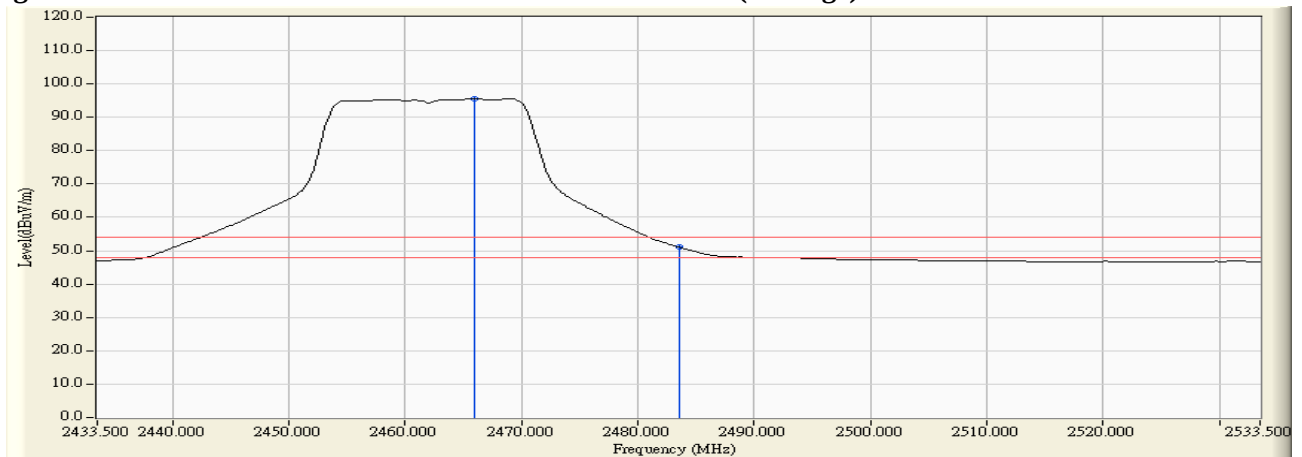

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2464.900	31.310	71.154	102.464	--	--	--
11 (Peak)	2483.500	31.435	31.672	63.107	74.00	54.00	Pass
11 (Peak)	2484.500	31.442	32.527	63.969	74.00	54.00	Pass
11 (Average)	2469.100	31.338	60.886	92.224	--	--	--
11 (Average)	2483.500	31.435	17.139	48.574	74.00	54.00	Pass

Figure Channel 11: Vertical (Peak)


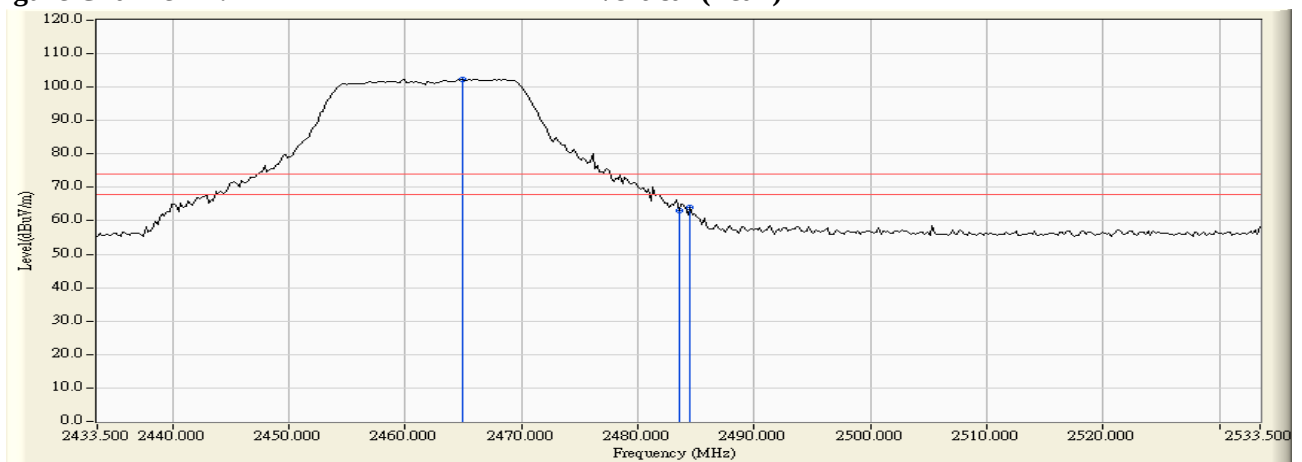


Figure Channel 11: Vertical (Average)

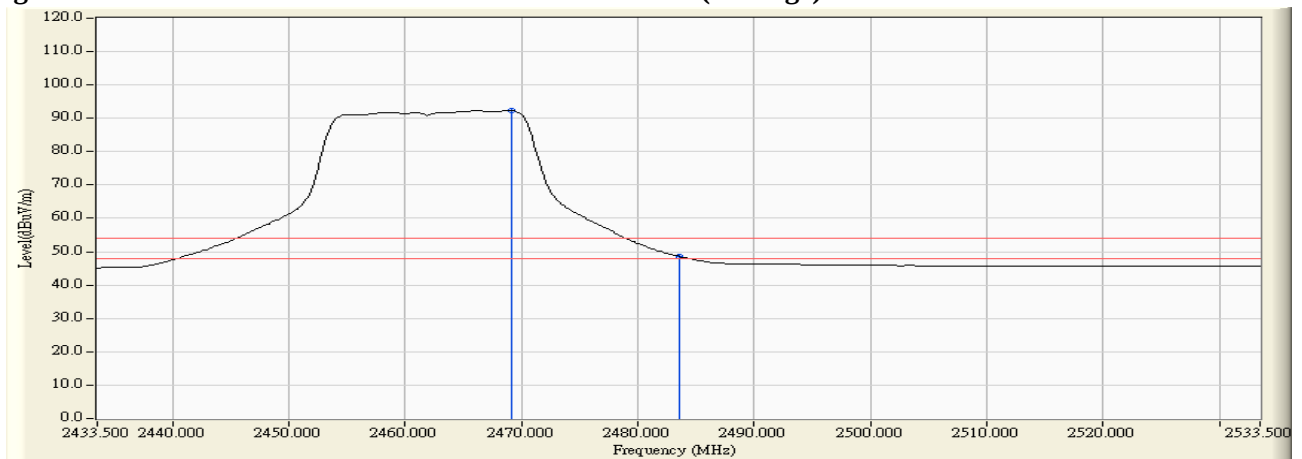

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_7.2Mbps(2.4G Band)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2389.600	31.508	40.135	71.643	74.00	54.00	Pass
01 (Peak)	2390.000	31.509	38.148	69.657	74.00	54.00	Pass
01 (Peak)	2400.000	31.561	52.423	83.984	--	--	--
01 (Peak)	2415.200	31.662	73.678	105.341	--	--	--
01 (Average)	2390.000	31.509	21.349	52.858	74.00	54.00	Pass
01 (Average)	2400.000	31.561	34.192	65.753	--	--	--
01 (Average)	2416.200	31.671	63.452	95.122	--	--	--

Figure Channel 01: Horizontal (Peak)


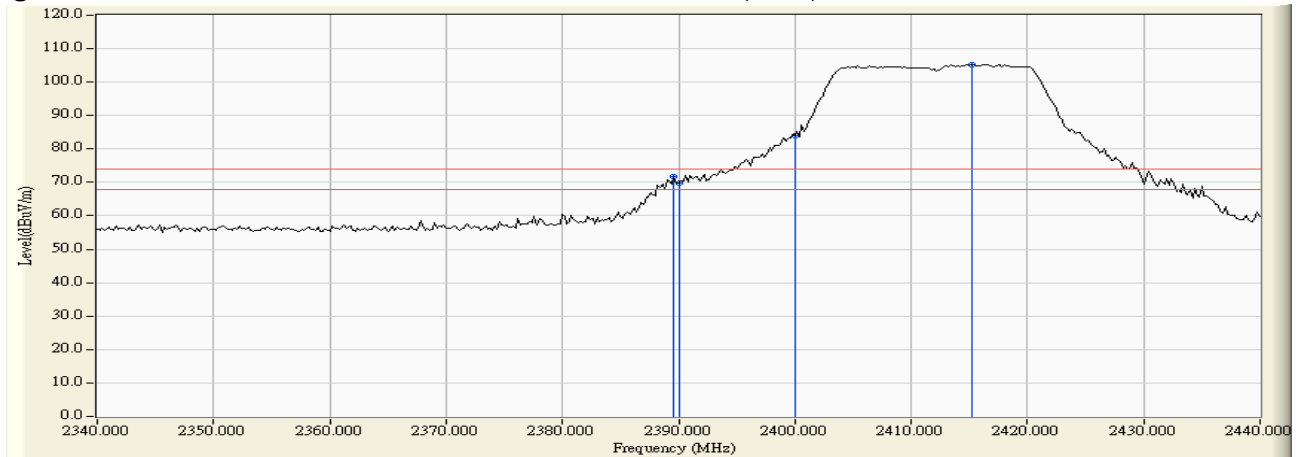


Figure Channel 01: Horizontal (Average)

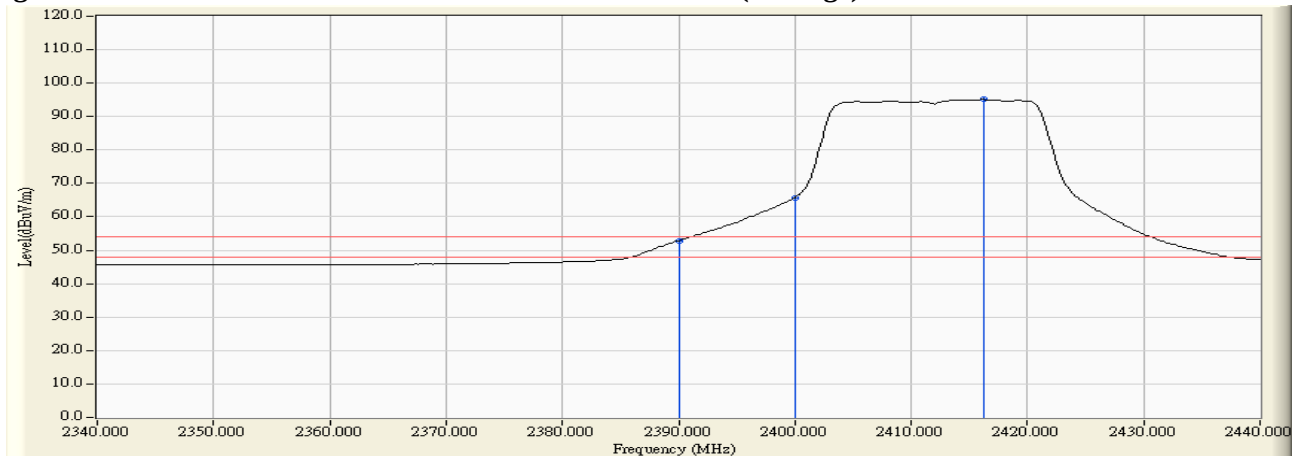

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_7.2Mbps(2.4G Band)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2389.600	30.917	35.523	66.440	74.00	54.00	Pass
01 (Peak)	2390.000	30.915	34.755	65.670	74.00	54.00	Pass
01 (Peak)	2399.400	30.911	48.601	79.512	74.00	54.00	Pass
01 (Peak)	2400.000	30.912	46.904	77.816	--	--	--
01 (Peak)	2415.400	30.972	69.207	100.179	--	--	--
01 (Average)	2390.000	30.915	18.147	49.062	74.00	54.00	Pass
01 (Average)	2400.000	30.912	29.314	60.226	--	--	--
01 (Average)	2416.200	30.978	58.854	89.832	--	--	--

Figure Channel 01: Vertical (Peak)


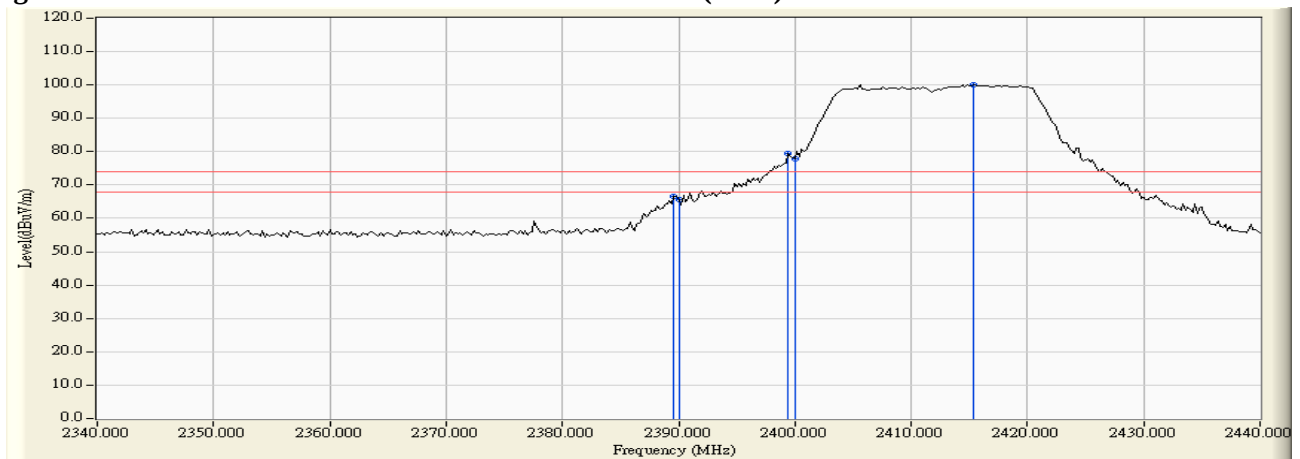


Figure Channel 01: Vertical (Average)

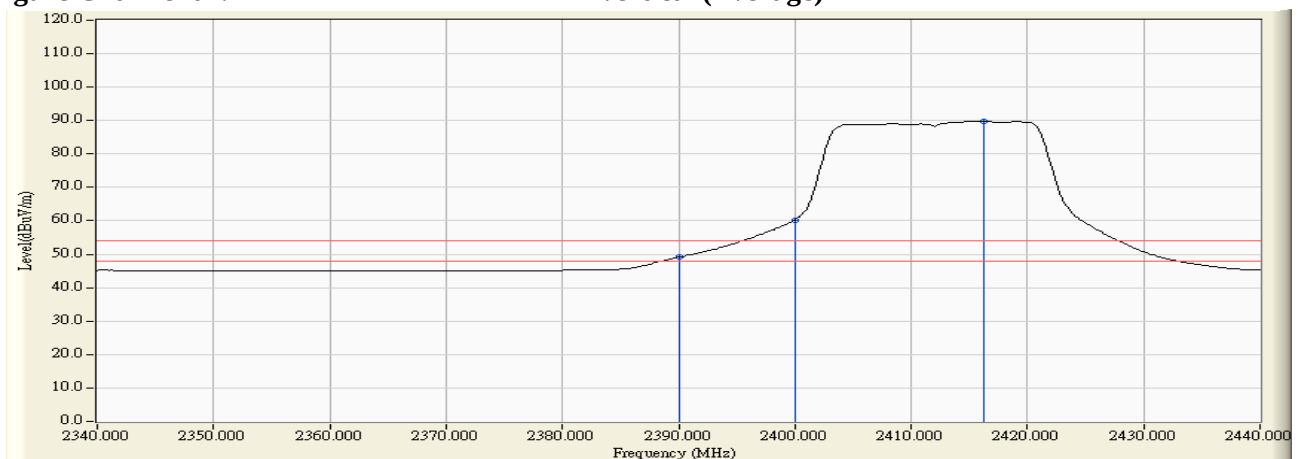

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
 4. “ * ”, means this data is the worst emission level.
 5. Measurement Level = Reading Level + Correct Factor.
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_7.2Mbps(2.4G Band)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
02 (Peak)	2388.950	31.505	32.351	63.856	74.00	54.00	Pass
02 (Peak)	2390.000	31.509	31.774	63.283	74.00	54.00	Pass
02 (Peak)	2397.650	31.547	48.889	80.436	74.00	54.00	Pass
02 (Peak)	2400.000	31.561	47.900	79.461	--	--	--
02 (Peak)	2415.340	31.663	76.543	108.207	--	--	--
02 (Average)	2390.000	31.509	17.280	48.789	74.00	54.00	Pass
02 (Average)	2400.000	31.561	32.152	63.713	--	--	--
02 (Average)	2424.330	31.733	65.154	96.887	--	--	--

Figure Channel 02: Horizontal (Peak)


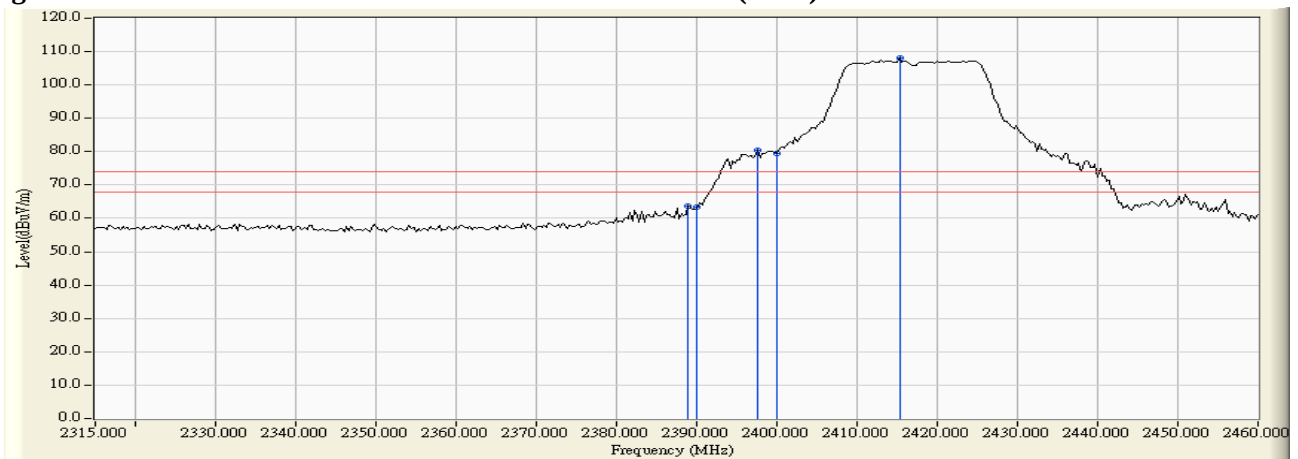


Figure Channel 02: Horizontal (Average)

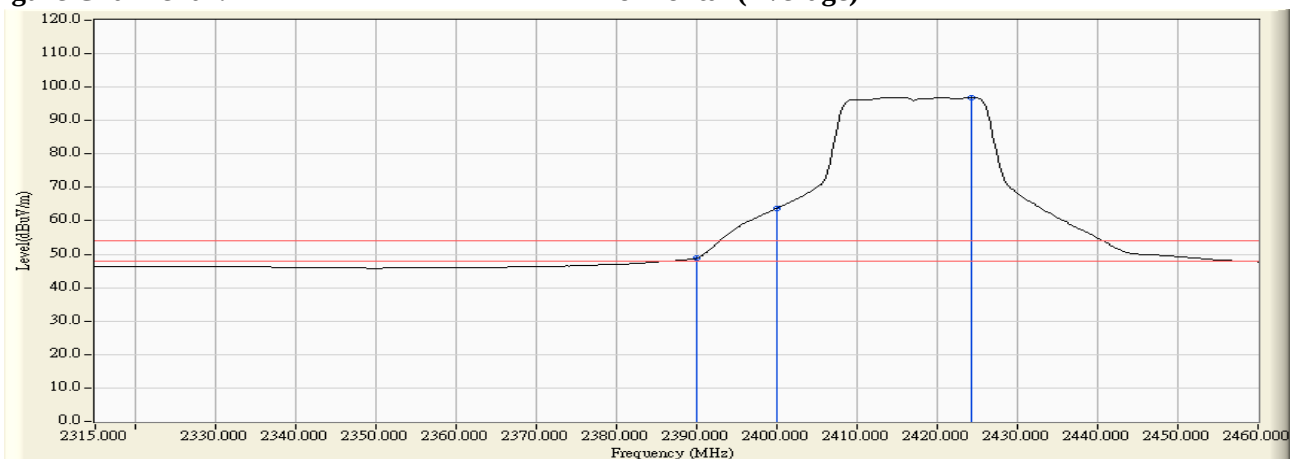

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
 4. “ * ”, means this data is the worst emission level.
 5. Measurement Level = Reading Level + Correct Factor.
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_7.2Mbps(2.4G Band)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
02 (Peak)	2387.500	30.927	28.992	59.919	74.00	54.00	Pass
02 (Peak)	2390.000	30.915	27.613	58.528	74.00	54.00	Pass
02 (Peak)	2398.230	30.908	43.878	74.786	74.00	54.00	Pass
02 (Peak)	2400.000	30.912	43.298	74.210	--	--	--
02 (Peak)	2424.330	31.033	71.069	102.102	--	--	--
02 (Average)	2390.000	30.915	15.593	46.508	74.00	54.00	Pass
02 (Average)	2400.000	30.912	27.775	58.687	--	--	--
02 (Average)	2424.040	31.031	60.792	91.823	--	--	--

Figure Channel 02: Vertical (Peak)


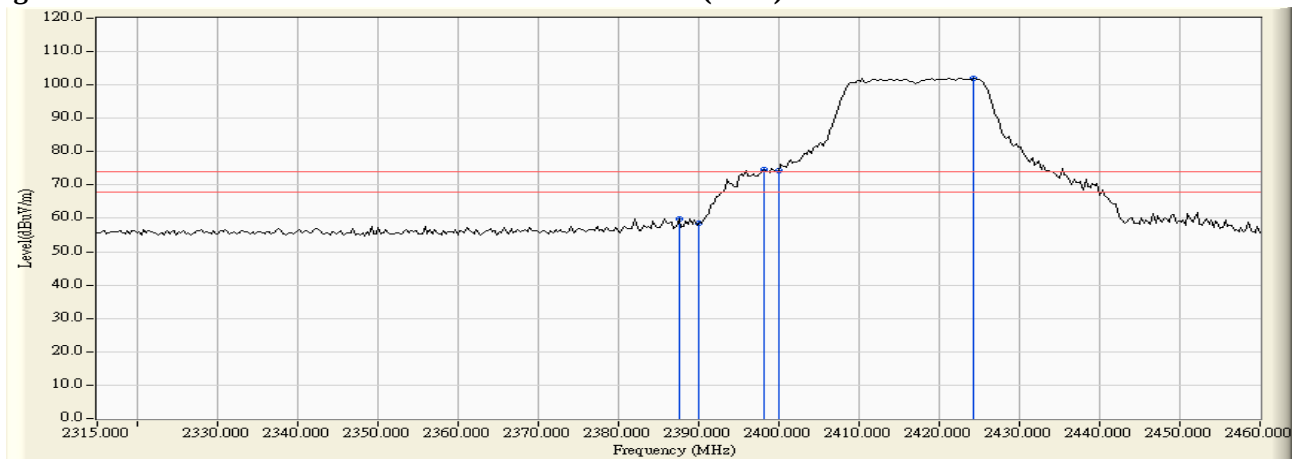


Figure Channel 02: Vertical (Average)

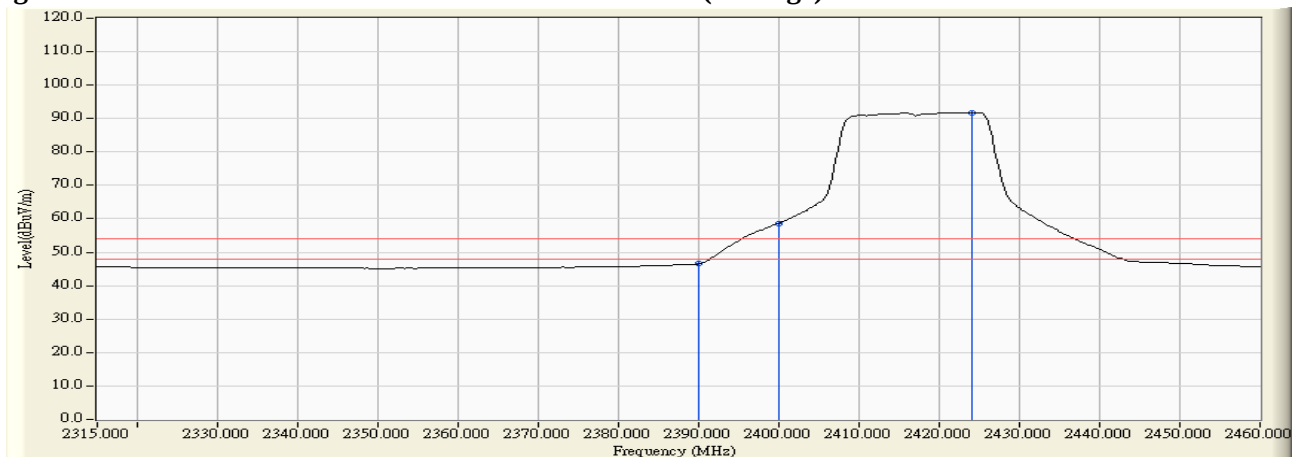

- Note:1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
 4. “ * ”, means this data is the worst emission level.
 5. Measurement Level = Reading Level + Correct Factor.
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_7.2Mbps(2.4G Band)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
10 (Peak)	2464.600	32.039	76.476	108.515	--	--	--
10 (Peak)	2483.500	32.182	34.164	66.346	74.00	54.00	Pass
10 (Average)	2455.600	31.971	66.062	98.033	--	--	--
10 (Average)	2483.500	32.182	19.982	52.164	74.00	54.00	Pass

Figure Channel 10: Horizontal (Peak)


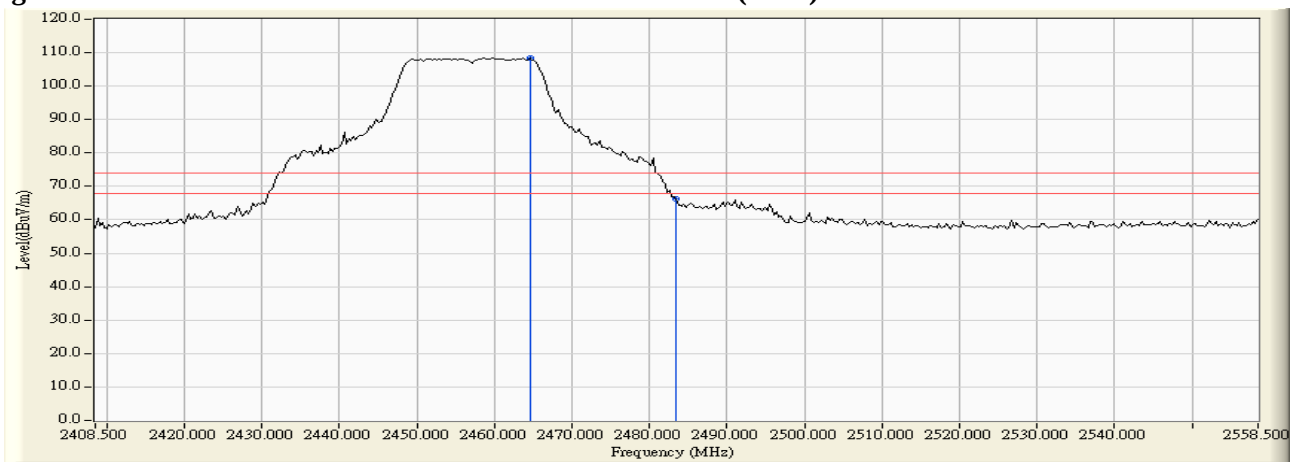


Figure Channel 10: Horizontal (Average)

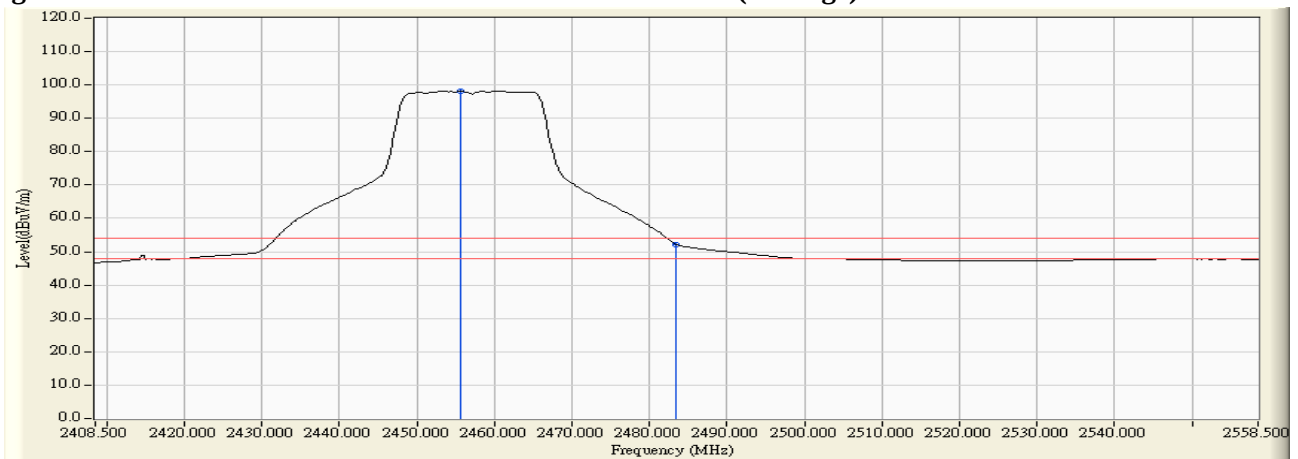

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_7.2Mbps(2.4G Band)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
10 (Peak)	2451.700	31.219	72.008	103.228	--	--	--
10 (Peak)	2483.500	31.435	28.591	60.026	74.00	54.00	Pass
10 (Average)	2453.500	31.232	61.279	92.511	--	--	--
10 (Average)	2483.500	31.435	17.044	48.479	74.00	54.00	Pass

Figure Channel 10: Vertical (Peak)


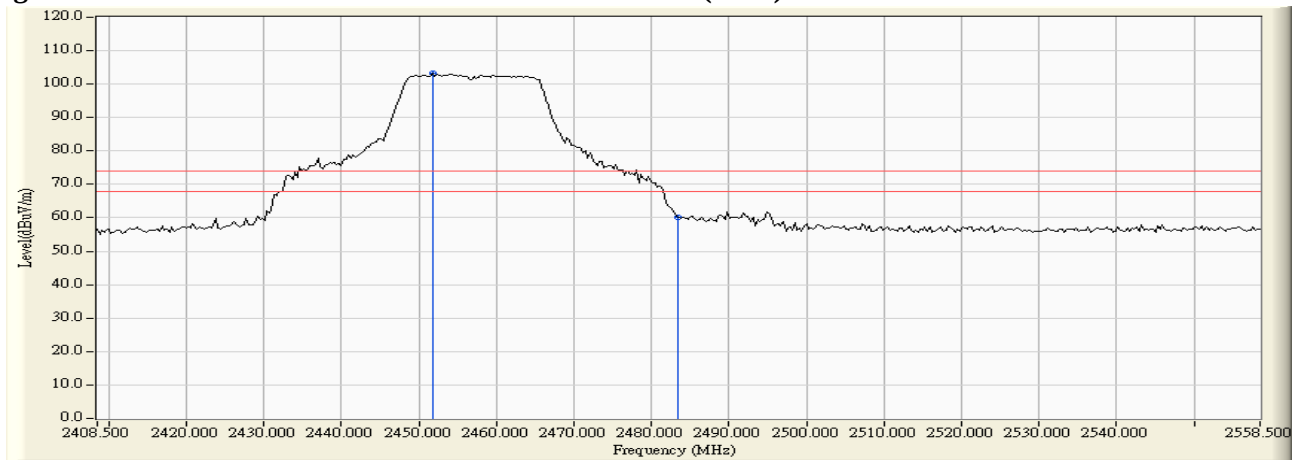


Figure Channel 10: Vertical (Average)

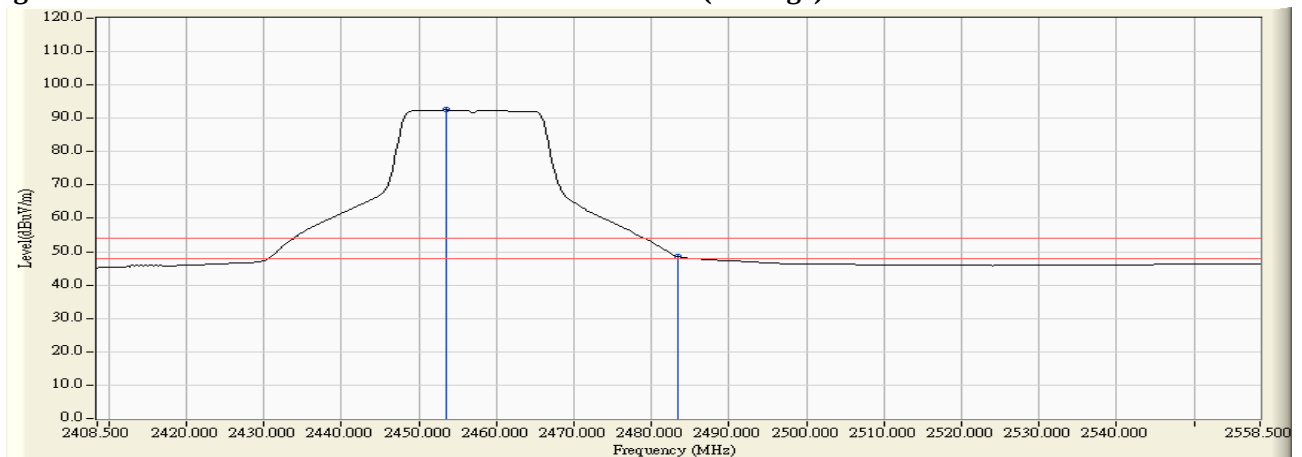

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_7.2Mbps(2.4G Band)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2466.900	32.057	74.407	106.463	--	--	--
11 (Peak)	2483.500	32.182	38.671	70.853	74.00	54.00	Pass
11 (Peak)	2484.300	32.187	39.707	71.895	74.00	54.00	Pass
11 (Average)	2469.100	32.073	63.253	95.326	--	--	--
11 (Average)	2483.500	32.182	20.168	52.350	74.00	54.00	Pass

Figure Channel 11: Horizontal (Peak)


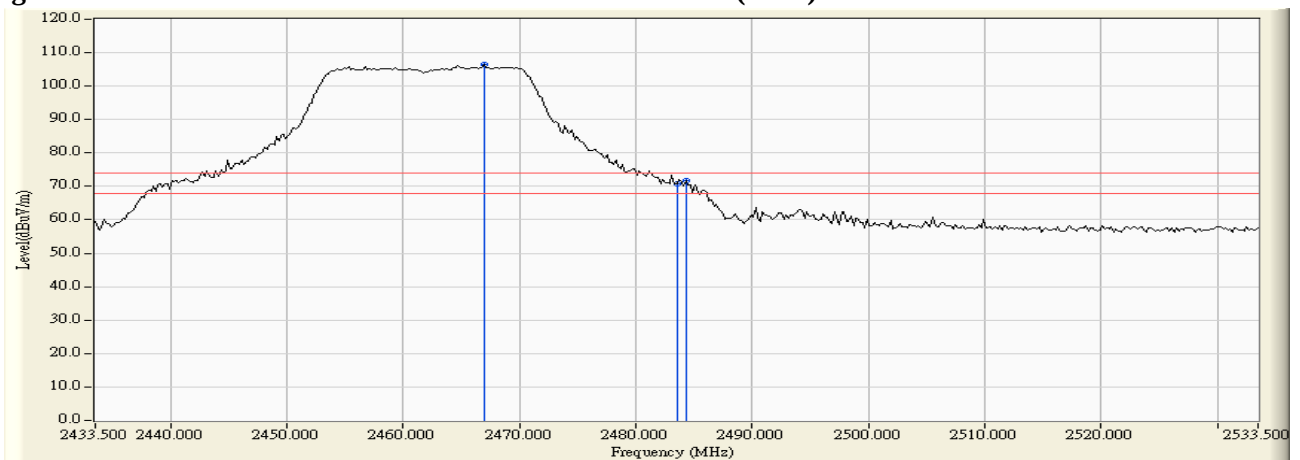


Figure Channel 11: Horizontal (Average)

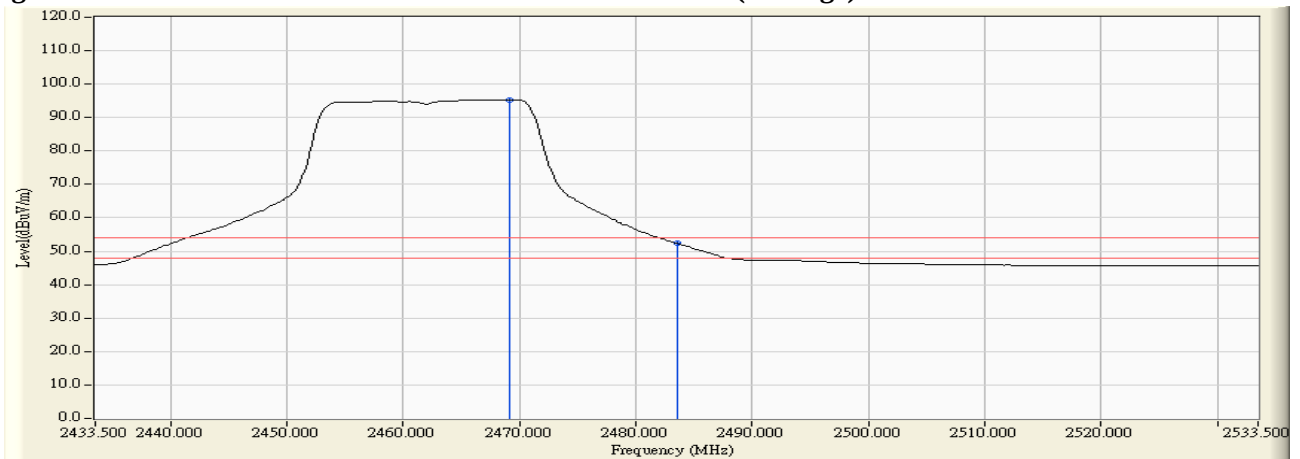

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_7.2Mbps(2.4G Band)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2458.700	31.268	70.263	101.531	--	--	--
11 (Peak)	2483.500	31.435	35.151	66.586	74.00	54.00	Pass
11 (Average)	2466.100	31.318	59.505	90.823	--	--	--
11 (Average)	2483.500	31.435	17.243	48.678	74.00	54.00	Pass

Figure Channel 11: Vertical (Peak)


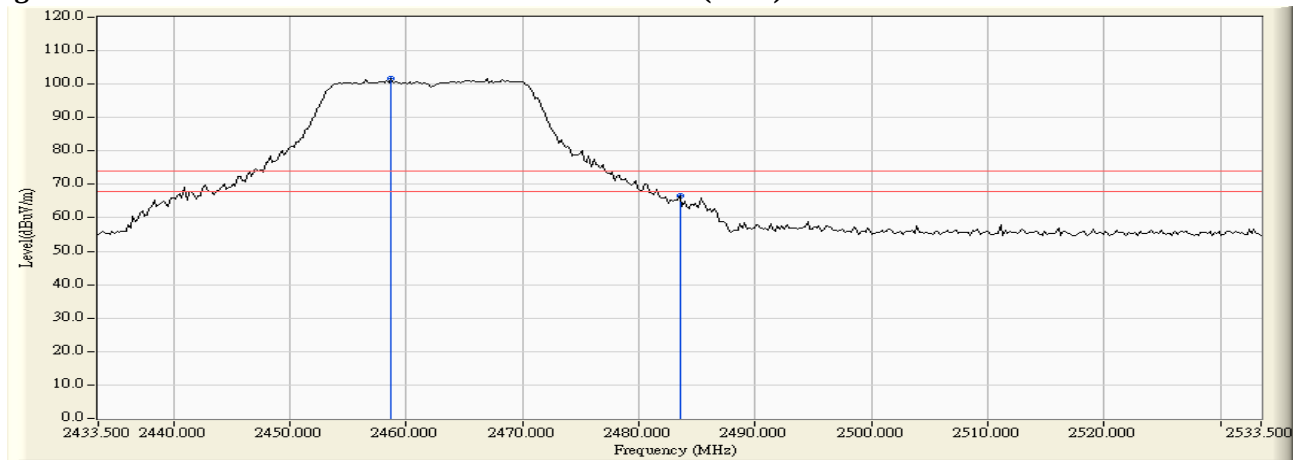


Figure Channel 11: Vertical (Average)

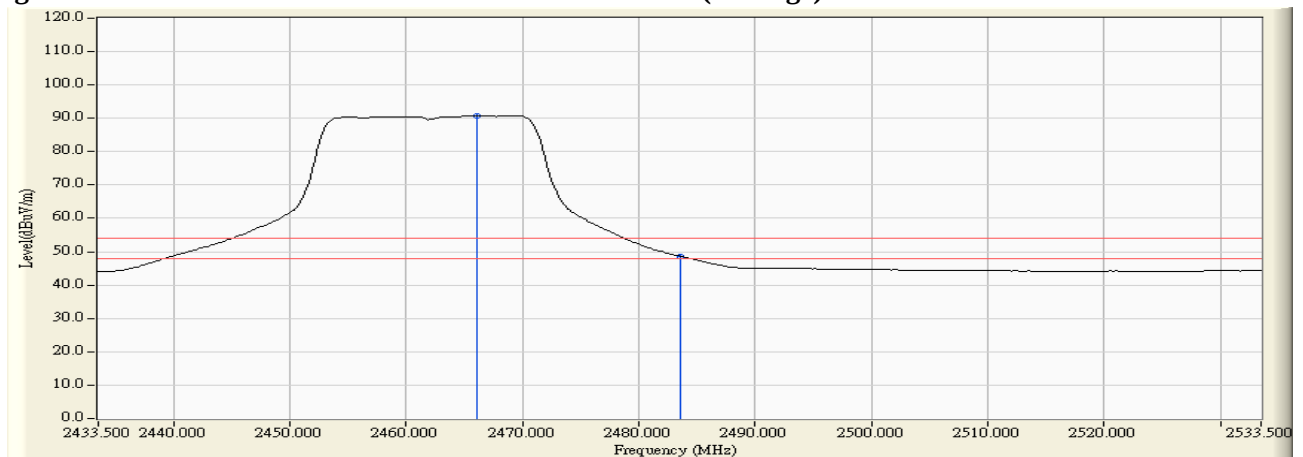

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
03 (Peak)	2388.200	31.502	34.775	66.277	74.00	54.00	Pass
03 (Peak)	2390.000	31.509	34.048	65.557	74.00	54.00	Pass
03 (Peak)	2400.000	31.561	45.744	77.305	--	--	--
03 (Peak)	2424.800	31.736	71.246	102.982	--	--	--
03 (Average)	2390.000	31.509	21.013	52.522	74.00	54.00	Pass
03 (Average)	2400.000	31.561	30.260	61.821	--	--	--
03 (Average)	2415.400	31.664	59.877	91.541	--	--	--

Figure Channel 03: Horizontal (Peak)


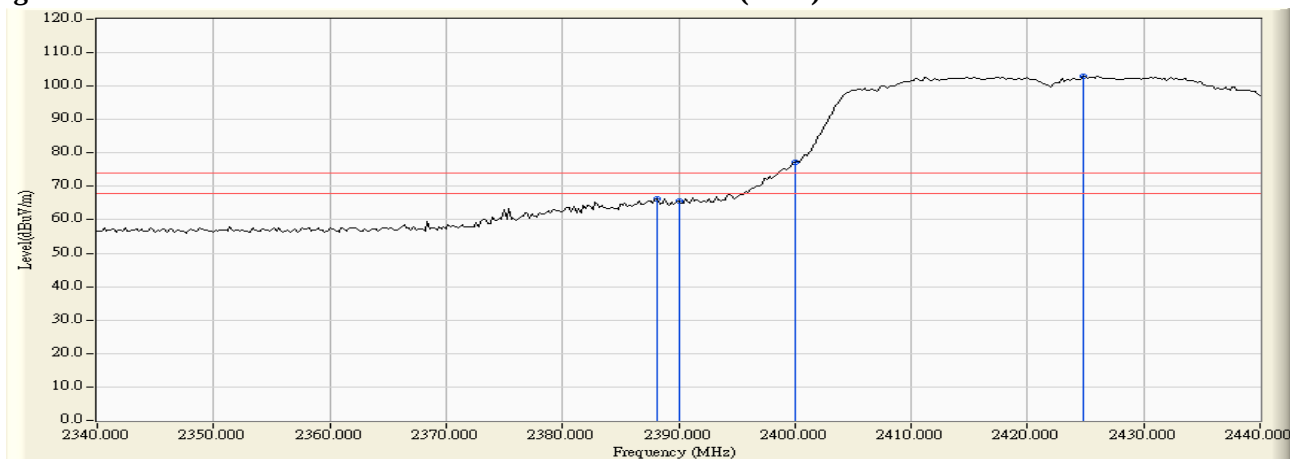


Figure Channel 03: Horizontal (Average)

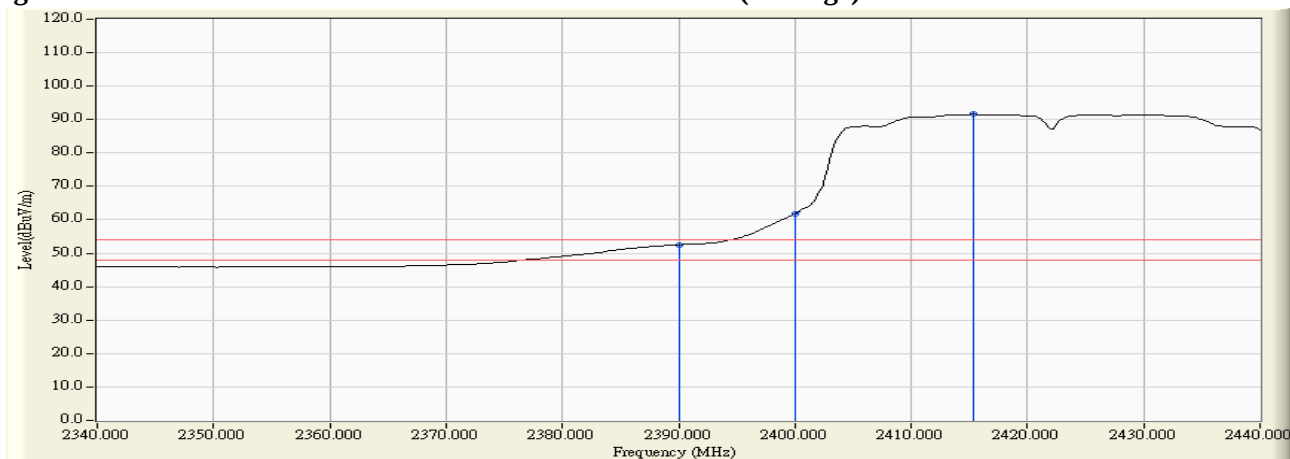

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
03 (Peak)	2386.000	30.934	29.411	60.345	74.00	54.00	Pass
03 (Peak)	2390.000	30.915	27.658	58.573	74.00	54.00	Pass
03 (Peak)	2400.000	30.912	39.723	70.635	--	--	--
03 (Peak)	2425.600	31.041	65.254	96.296	--	--	--
03 (Average)	2390.000	30.915	16.918	47.833	74.00	54.00	Pass
03 (Average)	2400.000	30.912	24.937	55.849	--	--	--
03 (Average)	2415.400	30.972	54.207	85.179	--	--	--

Figure Channel 03: Vertical (Peak)


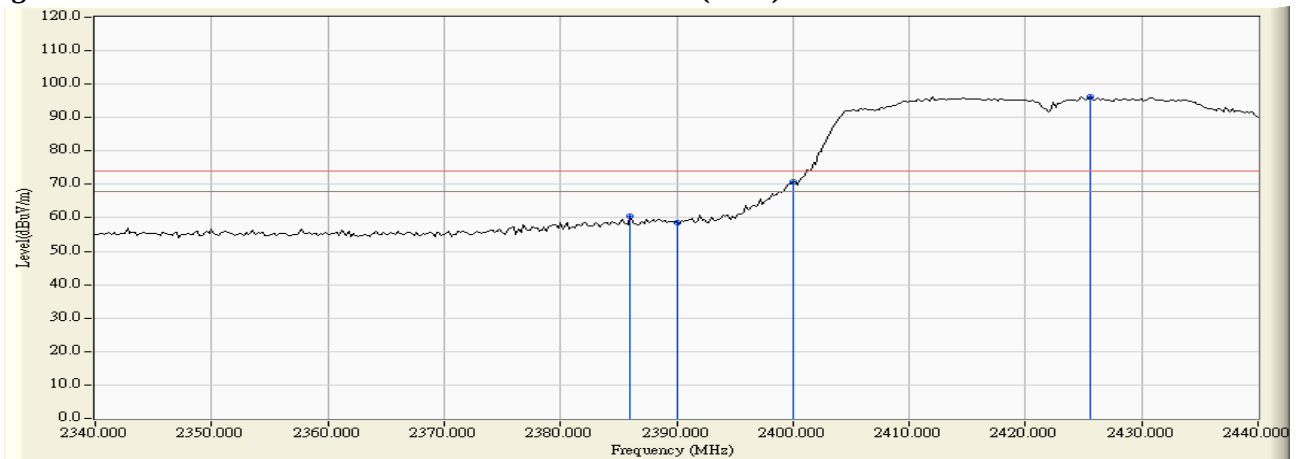


Figure Channel 03: Vertical (Average)

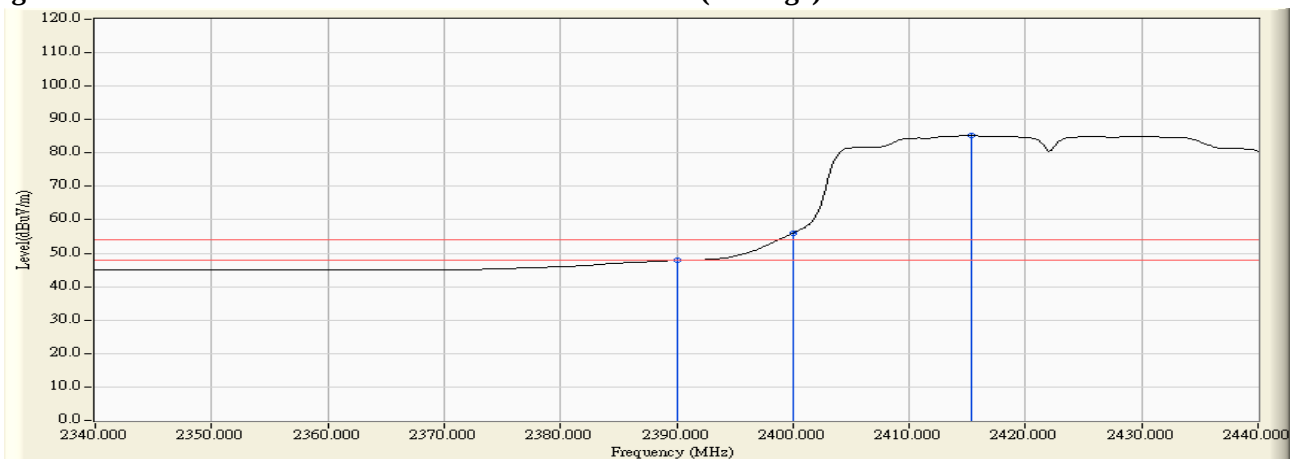

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
04 (Peak)	2390.000	31.509	33.966	65.475	74.00	54.00	Pass
04 (Peak)	2400.000	31.561	36.834	68.395	--	--	--
04 (Peak)	2430.800	31.782	72.195	103.977	--	--	--
04 (Average)	2390.000	30.415	21.080	52.589	74.00	54.00	Pass
04 (Average)	2400.000	30.468	24.249	55.810	--	--	--
04 (Average)	2423.300	30.623	60.598	92.323	--	--	--

Figure Channel 04: Horizontal (Peak)


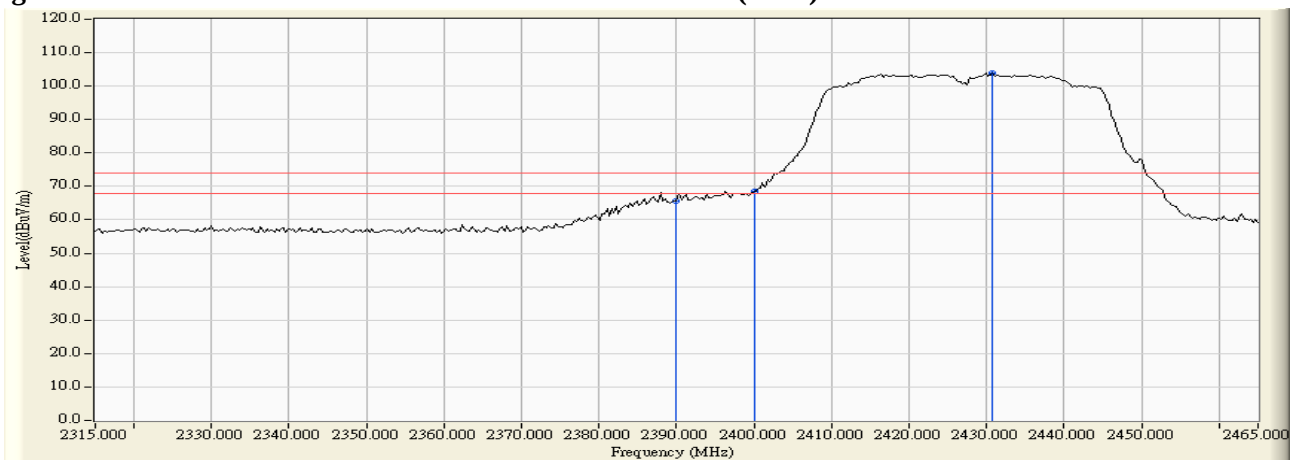


Figure Channel 04: Horizontal (Average)

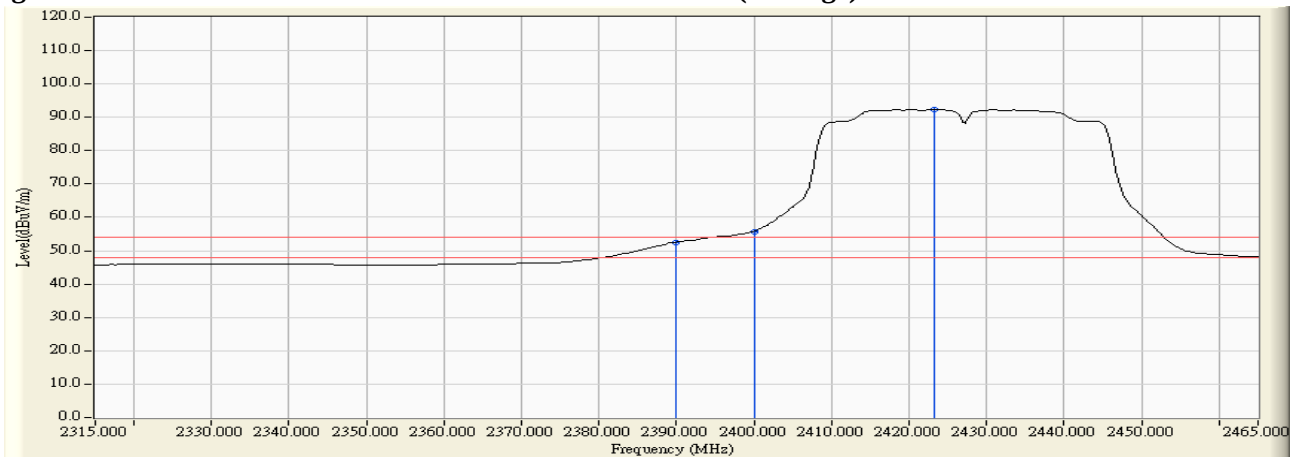

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
04 (Peak)	2388.500	30.922	30.621	61.543	74.00	54.00	Pass
04 (Peak)	2390.000	30.915	29.094	60.009	74.00	54.00	Pass
04 (Peak)	2399.000	30.910	32.002	62.912	74.00	54.00	Pass
04 (Peak)	2400.000	30.912	31.028	61.940	--	--	--
04 (Peak)	2422.400	31.019	64.818	95.838	--	--	--
04 (Average)	2390.000	30.915	16.938	47.853	74.00	54.00	Pass
04 (Average)	2400.000	30.912	19.181	50.093	--	--	--
04 (Average)	2418.500	30.993	53.854	84.847	--	--	--

Figure Channel 04: Vertical (Peak)


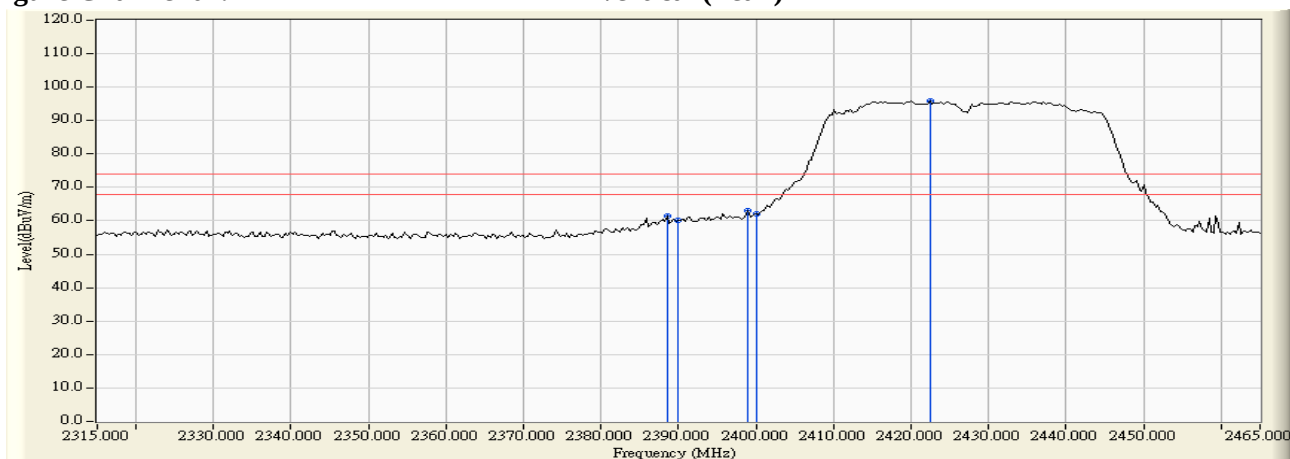


Figure Channel 04: Vertical (Average)

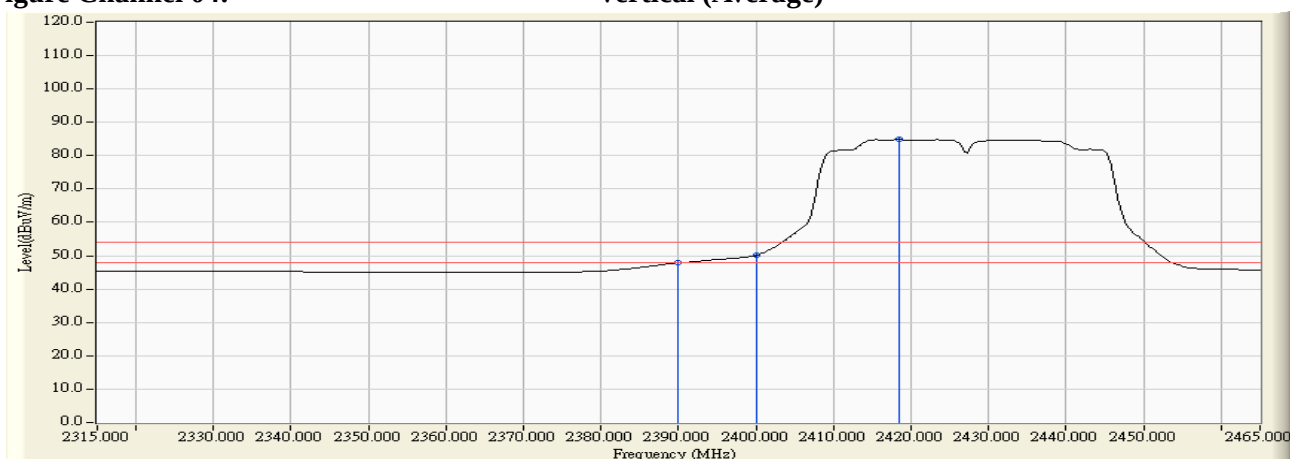

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
 4. “ * ”, means this data is the worst emission level.
 5. Measurement Level = Reading Level + Correct Factor.
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
05 (Peak)	2388.800	31.505	36.035	67.539	74.00	54.00	Pass
05 (Peak)	2390.000	31.509	35.398	66.907	74.00	54.00	Pass
05 (Peak)	2395.700	31.535	40.514	72.049	74.00	54.00	Pass
05 (Peak)	2400.000	31.561	38.306	69.867	--	--	--
05 (Peak)	2427.500	31.758	72.538	104.295	--	--	--
05 (Average)	2390.000	31.509	20.933	52.442	74.00	54.00	Pass
05 (Average)	2400.000	31.561	25.462	57.023	--	--	--
05 (Average)	2424.800	31.736	60.949	92.685	--	--	--

Figure Channel 05: Horizontal (Peak)


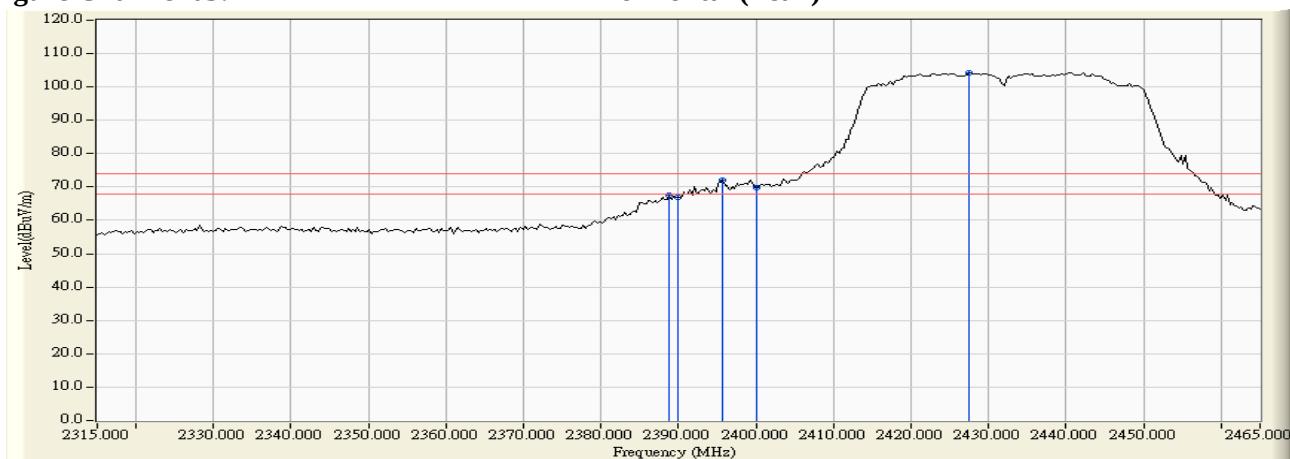


Figure Channel 05: Horizontal (Average)

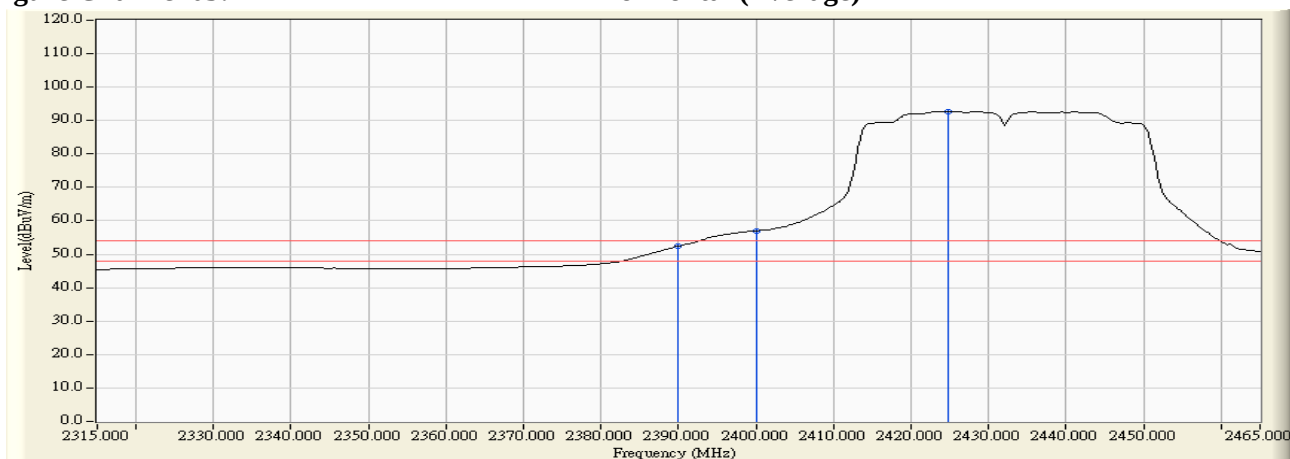

- Note:1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
 4. “ * ”, means this data is the worst emission level.
 5. Measurement Level = Reading Level + Correct Factor.
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
05 (Peak)	2390.000	30.915	32.181	63.096	74.00	54.00	Pass
05 (Peak)	2399.000	30.910	34.517	65.427	74.00	54.00	Pass
05 (Peak)	2400.000	30.912	33.663	64.575	--	--	--
05 (Peak)	2442.500	31.157	66.057	97.213	--	--	--
05 (Average)	2390.000	30.915	16.820	47.735	74.00	54.00	Pass
05 (Average)	2400.000	30.912	20.316	51.228	--	--	--
05 (Average)	2441.300	31.148	54.536	85.684	--	--	--

Figure Channel 05: Vertical (Peak)


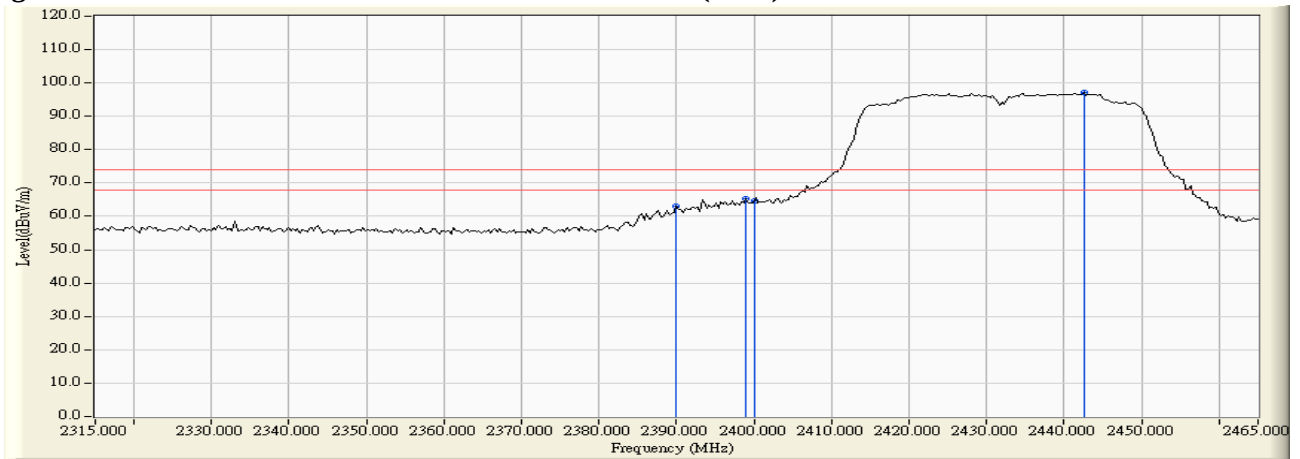


Figure Channel 05: Vertical (Average)

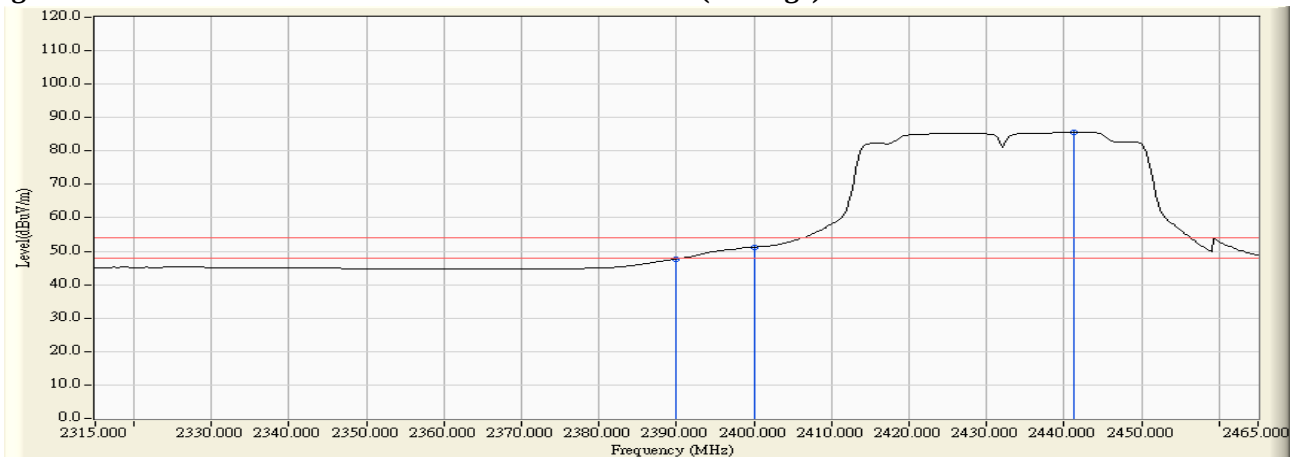

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
07 (Peak)	2434.300	31.809	74.447	106.256	--	--	--
07 (Peak)	2483.500	32.182	32.810	64.992	74.00	54.00	Pass
07 (Average)	2433.100	31.800	62.504	94.304	--	--	--
07 (Average)	2483.500	32.182	18.831	51.013	74.00	54.00	Pass

Figure Channel 07: Horizontal (Peak)


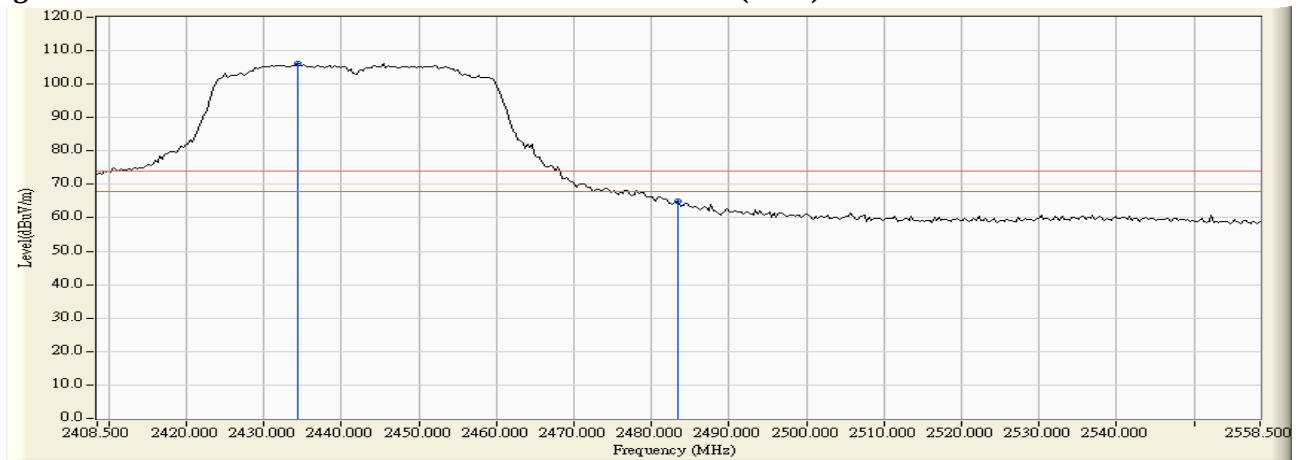


Figure Channel 07 Horizontal (Average)

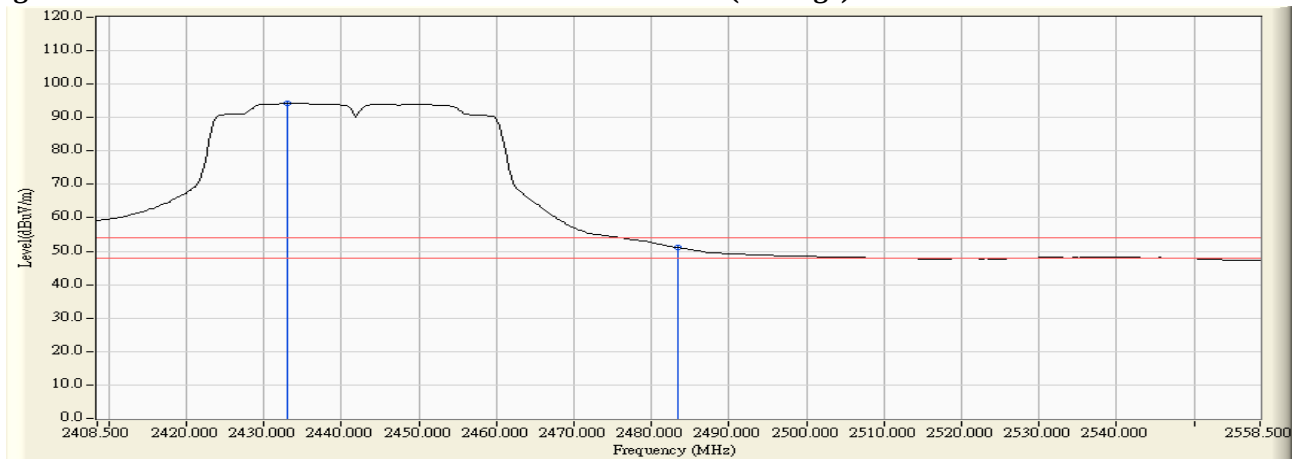

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
07 (Peak)	2445.400	31.176	65.461	96.637	--	--	--
07 (Peak)	2483.500	31.435	25.533	56.968	74.00	54.00	Pass
07 (Average)	2450.500	31.212	53.616	84.827	--	--	--
07 (Average)	2483.500	31.435	14.042	45.477	74.00	54.00	Pass

Figure Channel 07: Vertical (Peak)

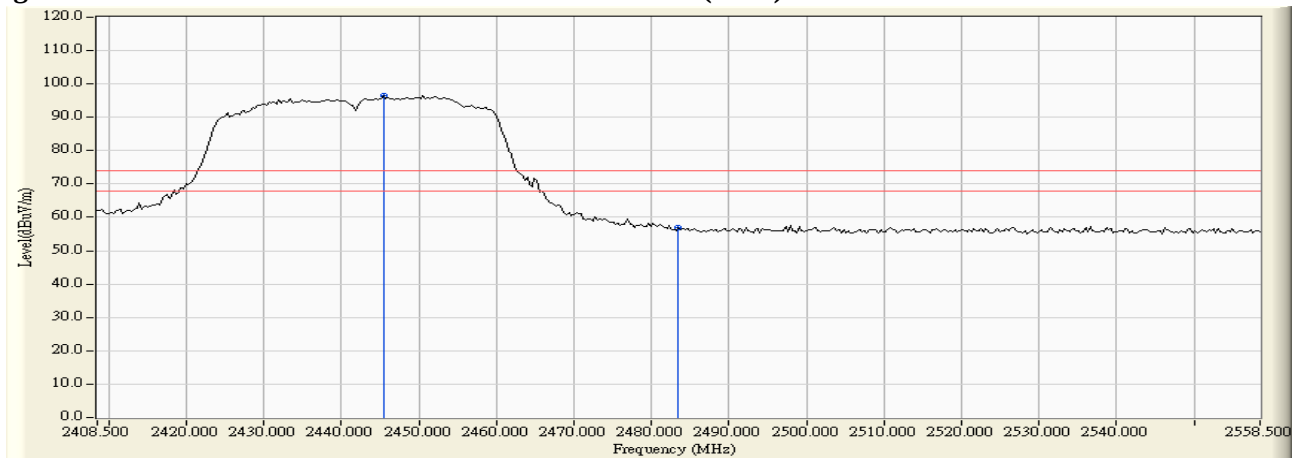


Figure Channel 07: Vertical (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
08 (Peak)	2450.500	31.933	72.028	103.960	--	--	--
08 (Peak)	2483.500	32.182	28.715	60.897	74.00	54.00	Pass
08 (Average)	2454.100	31.959	60.180	92.140	--	--	--
08 (Average)	2483.500	32.182	16.701	48.883	74.00	54.00	Pass

Figure Channel 08:

Horizontal (Peak)


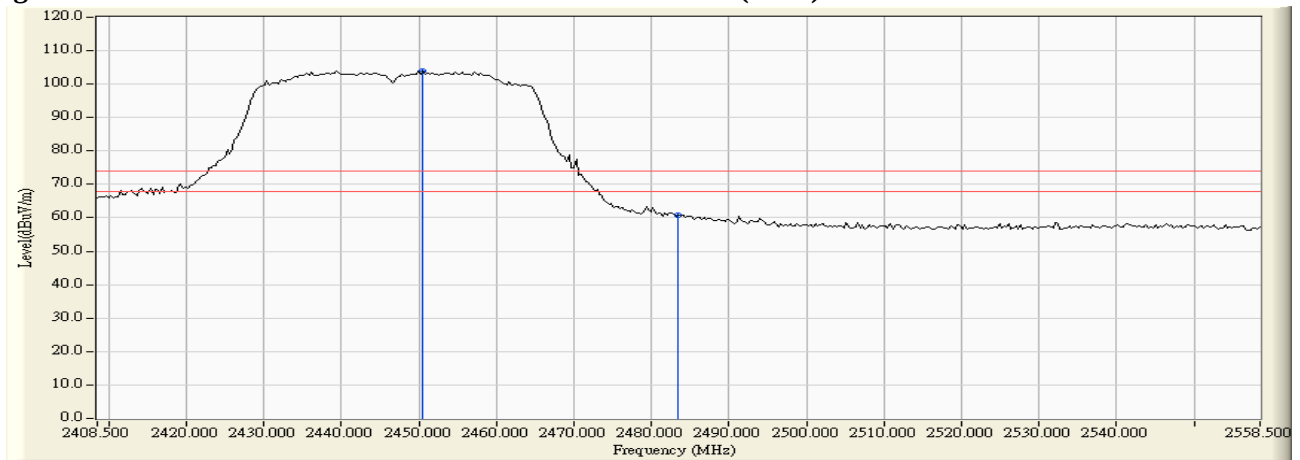


Figure Channel 08:

Horizontal (Average)

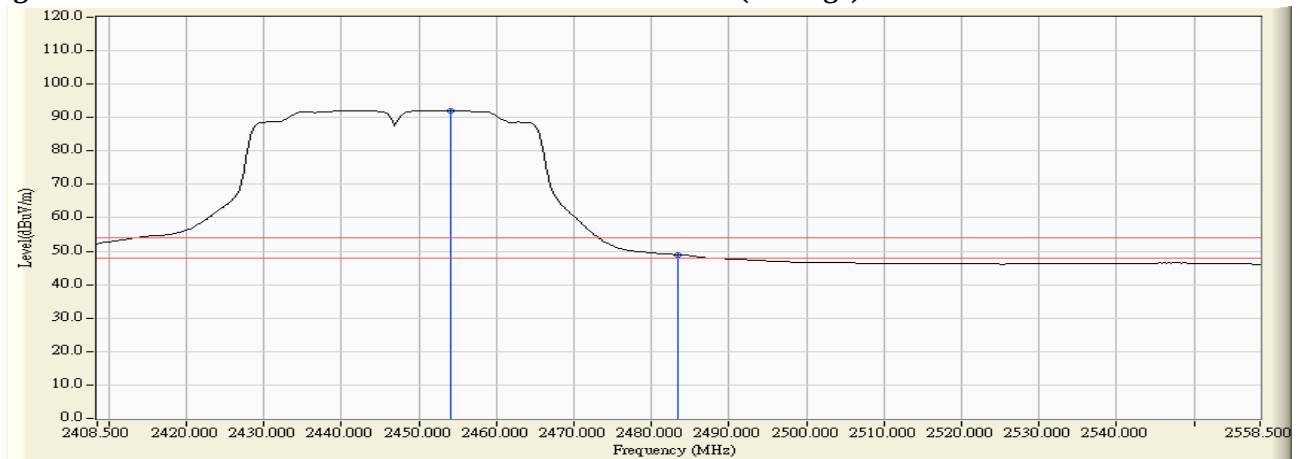

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
08 (Peak)	2451.100	31.216	66.394	97.609	--	--	--
08 (Peak)	2483.500	31.435	25.040	56.475	74.00	54.00	Pass
08 (Peak)	2485.900	31.451	25.841	57.293	74.00	54.00	Pass
08 (Average)	2454.400	31.238	55.224	86.462	--	--	--
08 (Average)	2483.500	31.435	14.653	46.088	74.00	54.00	Pass

Figure Channel 08: Vertical (Peak)


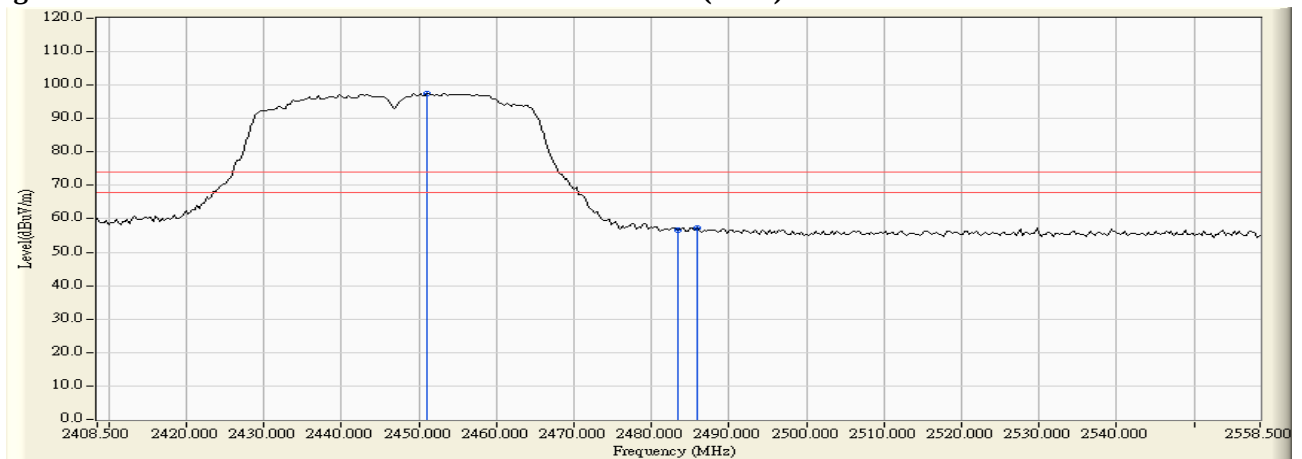


Figure Channel 08: Vertical (Average)

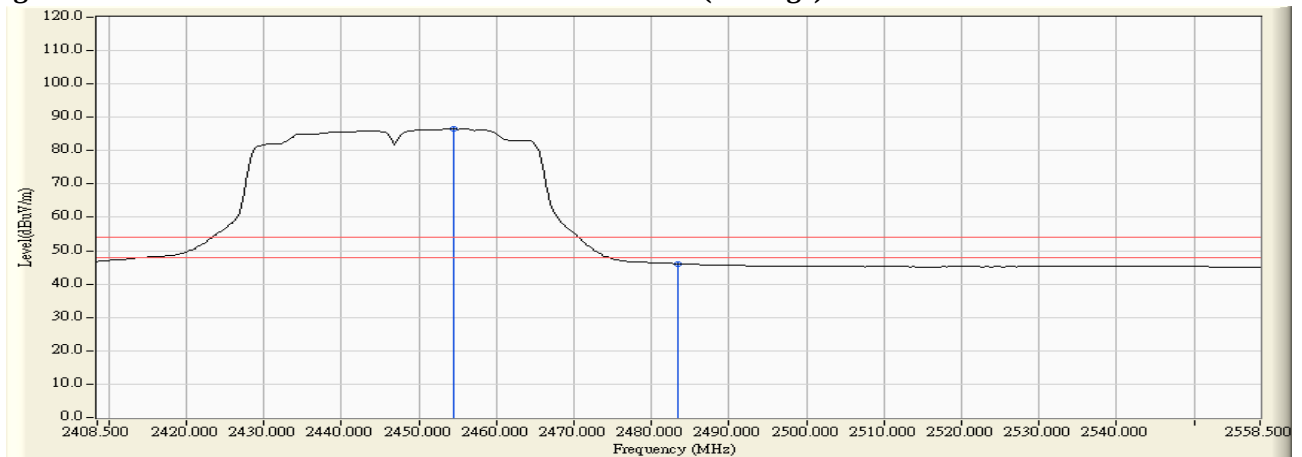

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
09 (Peak)	2455.700	31.972	72.500	104.472	--	--	--
09 (Peak)	2483.500	32.182	30.566	62.748	74.00	54.00	Pass
09 (Peak)	2484.300	32.187	31.222	63.410	74.00	54.00	Pass
09 (Average)	2458.300	31.991	60.352	92.343	--	--	--
09 (Average)	2483.500	32.182	18.418	50.600	74.00	54.00	Pass

Figure Channel 09: Horizontal (Peak)


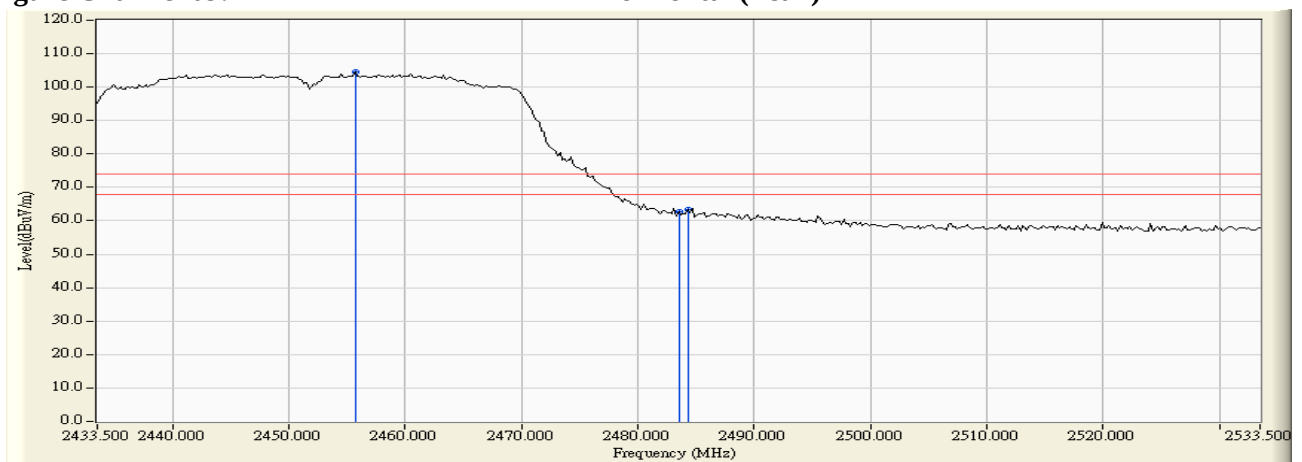


Figure Channel 09: Horizontal (Average)

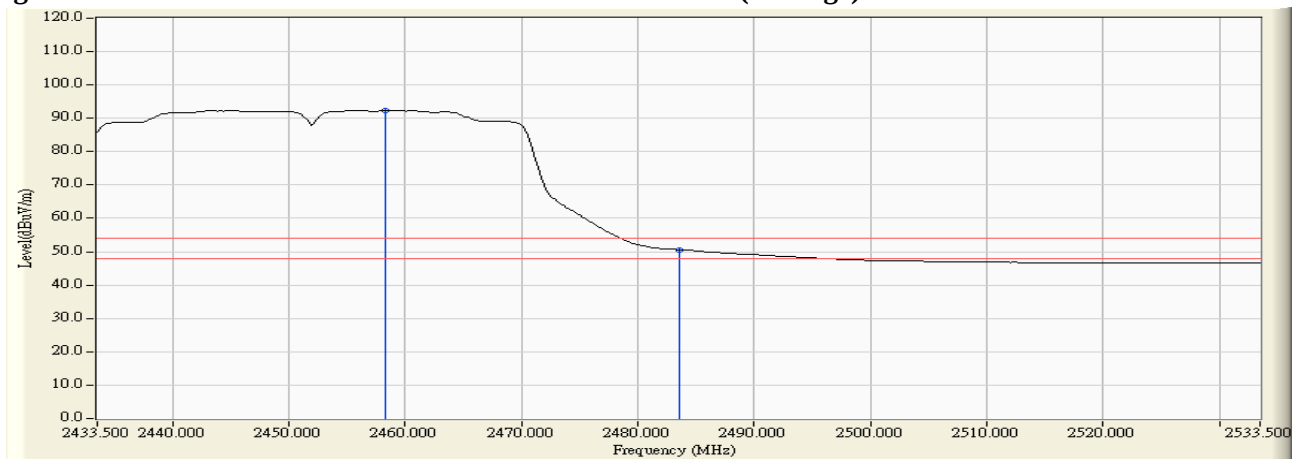

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_15Mbps(2.4G Band)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
09 (Peak)	2454.700	31.240	66.071	97.311	--	--	--
09 (Peak)	2483.500	31.435	27.259	58.694	74.00	54.00	Pass
09 (Average)	2443.100	31.160	54.684	85.844	--	--	--
09 (Average)	2483.500	31.435	15.798	47.233	74.00	54.00	Pass

Figure Channel 09: Vertical (Peak)


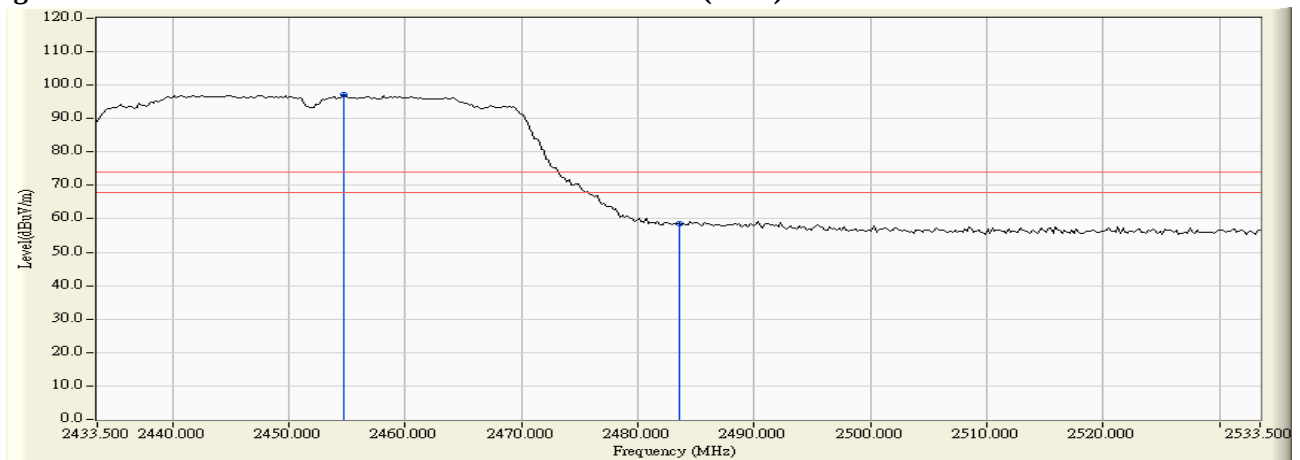


Figure Channel 09: Vertical (Average)

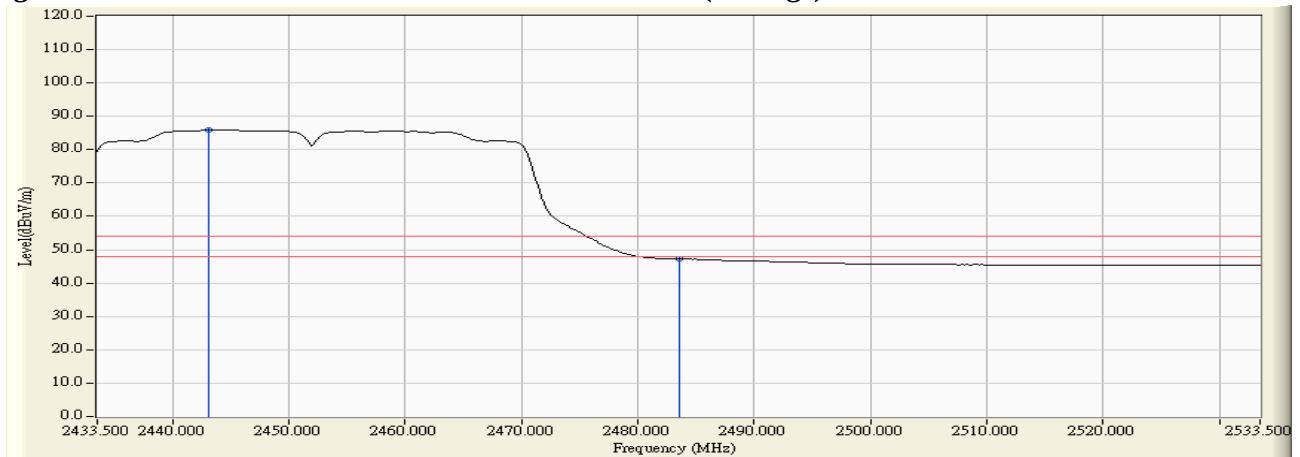


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps

Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
5745	32.23	>20	PASS

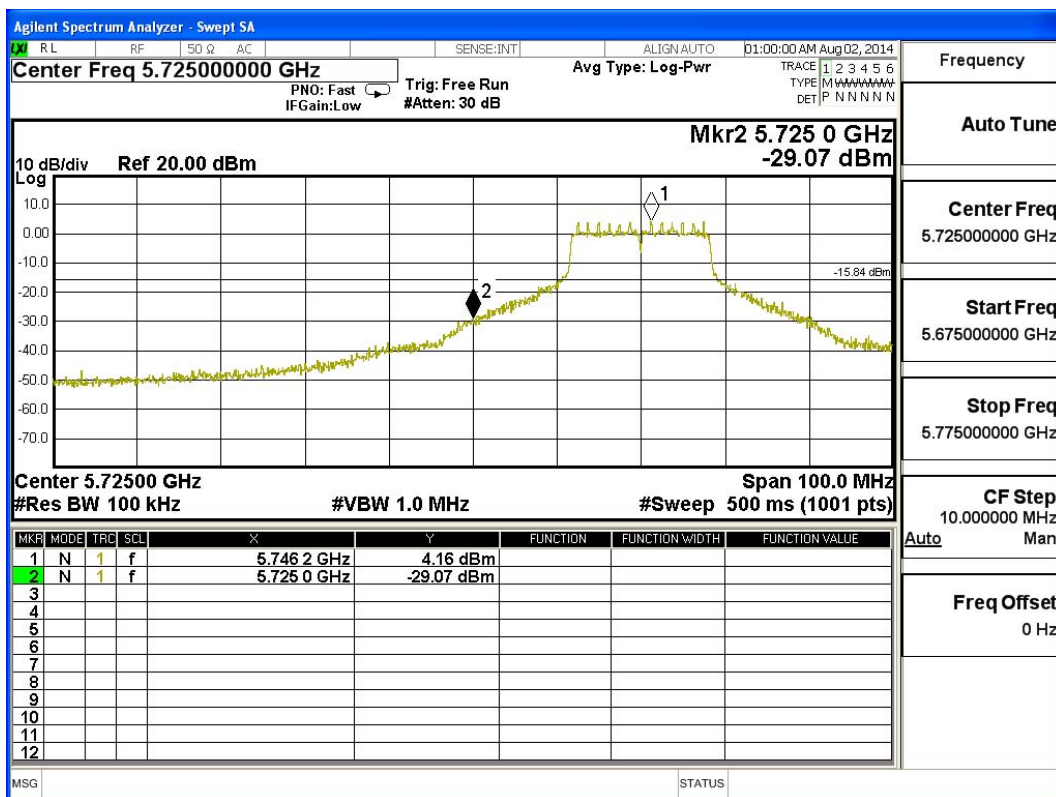

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps

Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
5825	43.24	>20	PASS




Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_7.2Mbps(5G Band)

Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
5745	29.52	>20	PASS




Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_7.2Mbps(5G Band)

Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
5825	39.57	>20	PASS

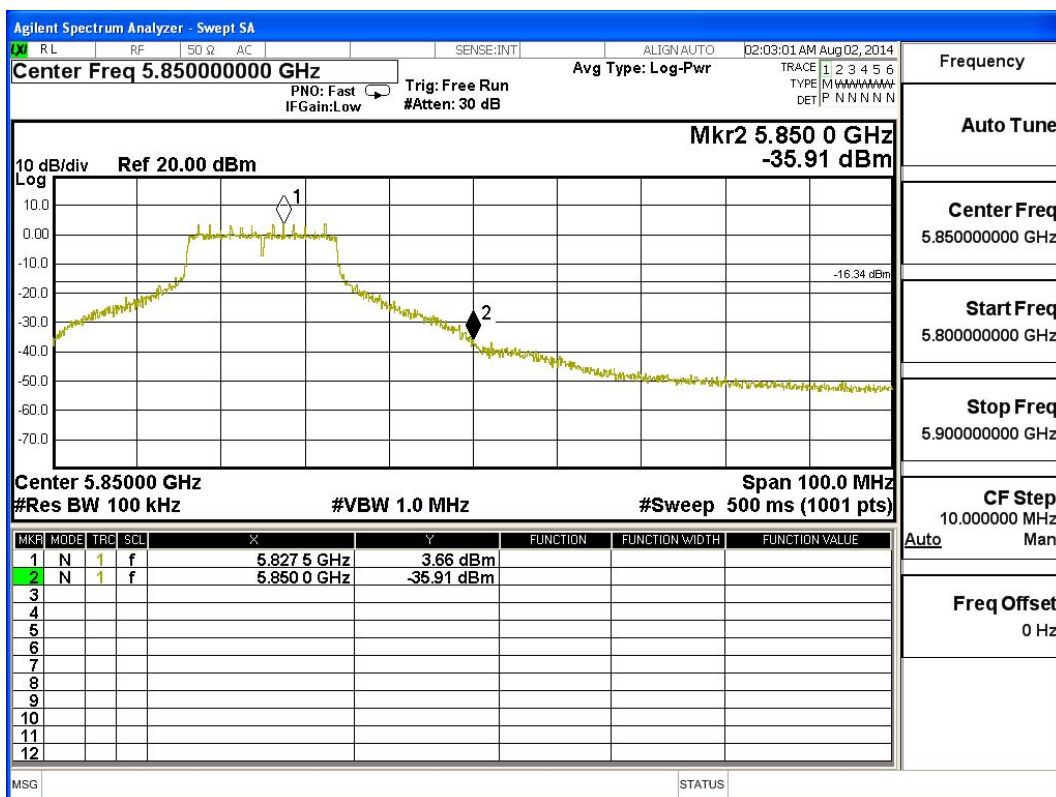


Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 7: Transmit - 802.11n-40BW_15Mbps(5G Band)

Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
5755	29.68	>20	PASS

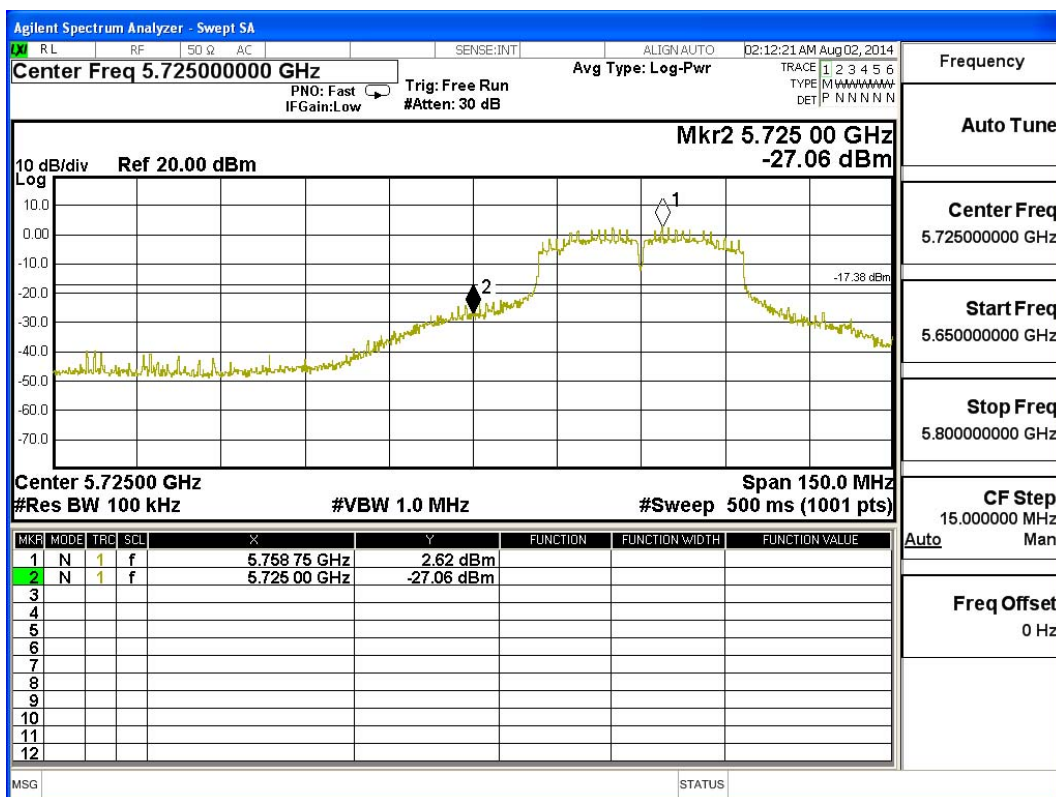

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 7: Transmit - 802.11n-40BW_15Mbps(5G Band)

Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
5795	45.46	>20	PASS

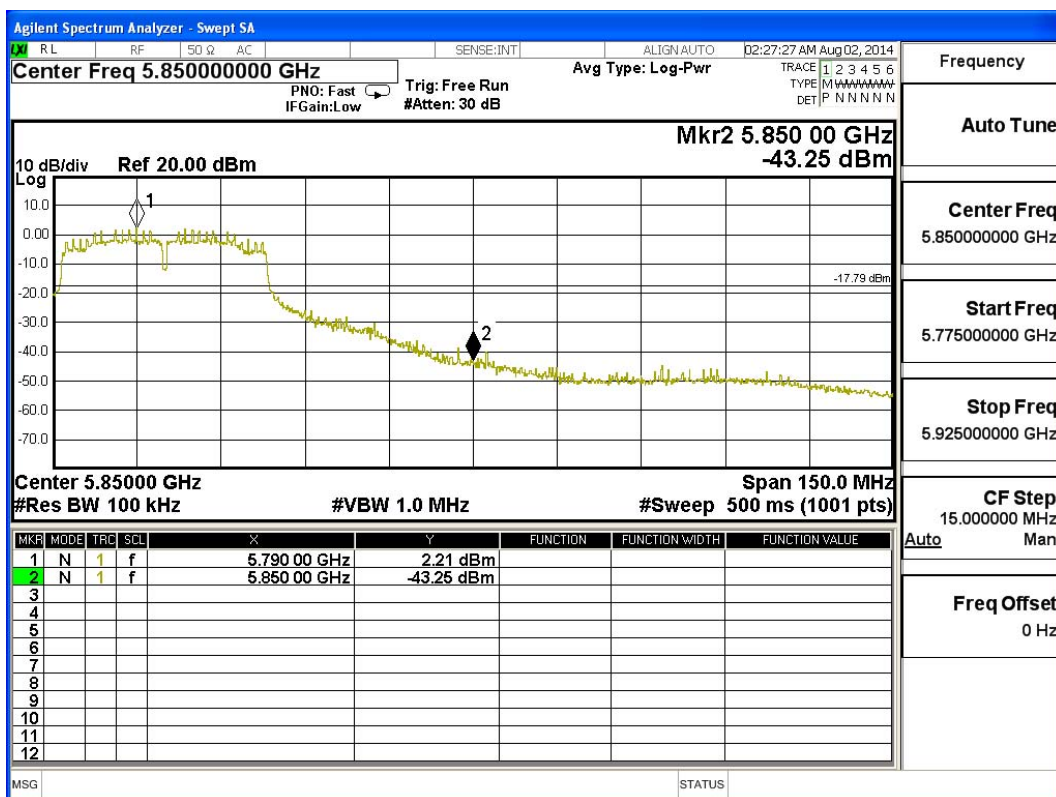

7. Occupied Bandwidth


7.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

7.2. Test Setup

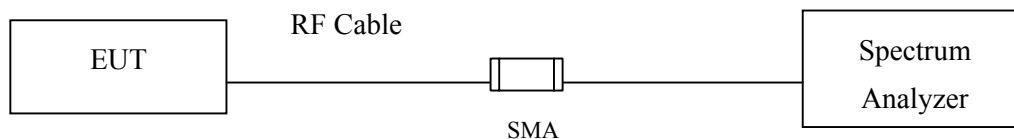

7.3. Limits

The minimum bandwidth shall be at least 500 kHz.

7.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009; tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

7.5. Uncertainty


$\pm 150\text{Hz}$

7.6. Test Result of Occupied Bandwidth

Product : TABLET PC
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	12100	>500	Pass


Figure Channel 1:

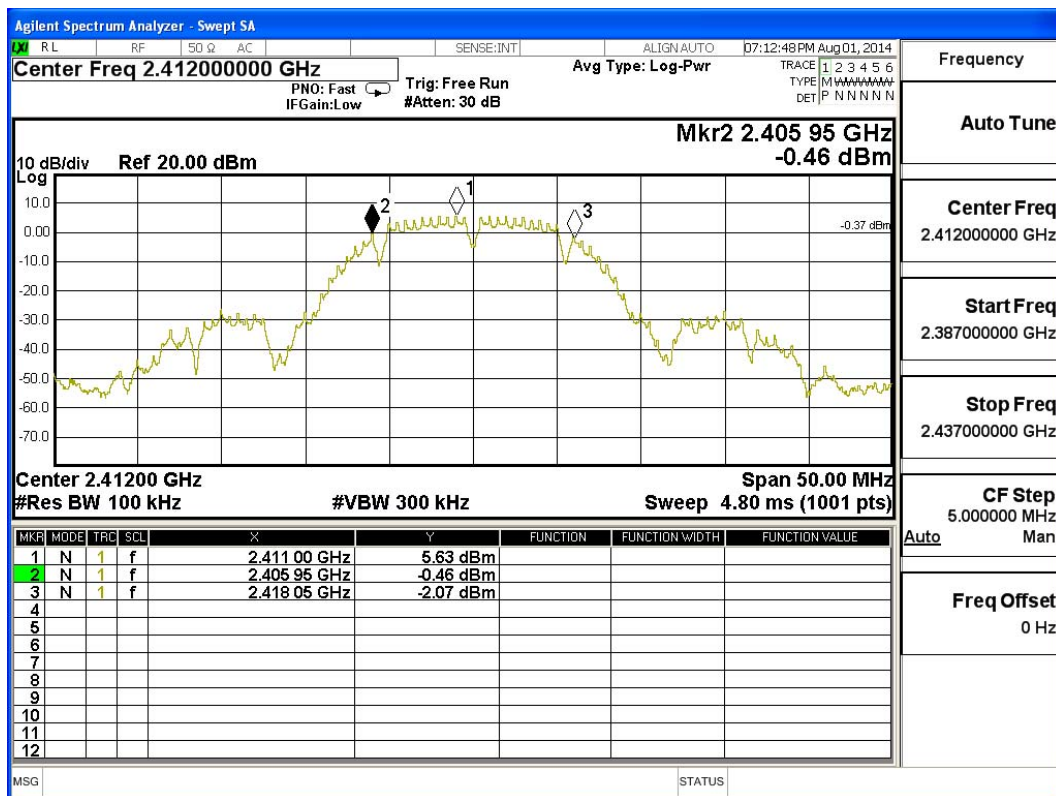

Product : TABLET PC
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	12100	>500	Pass


Figure Channel 6:

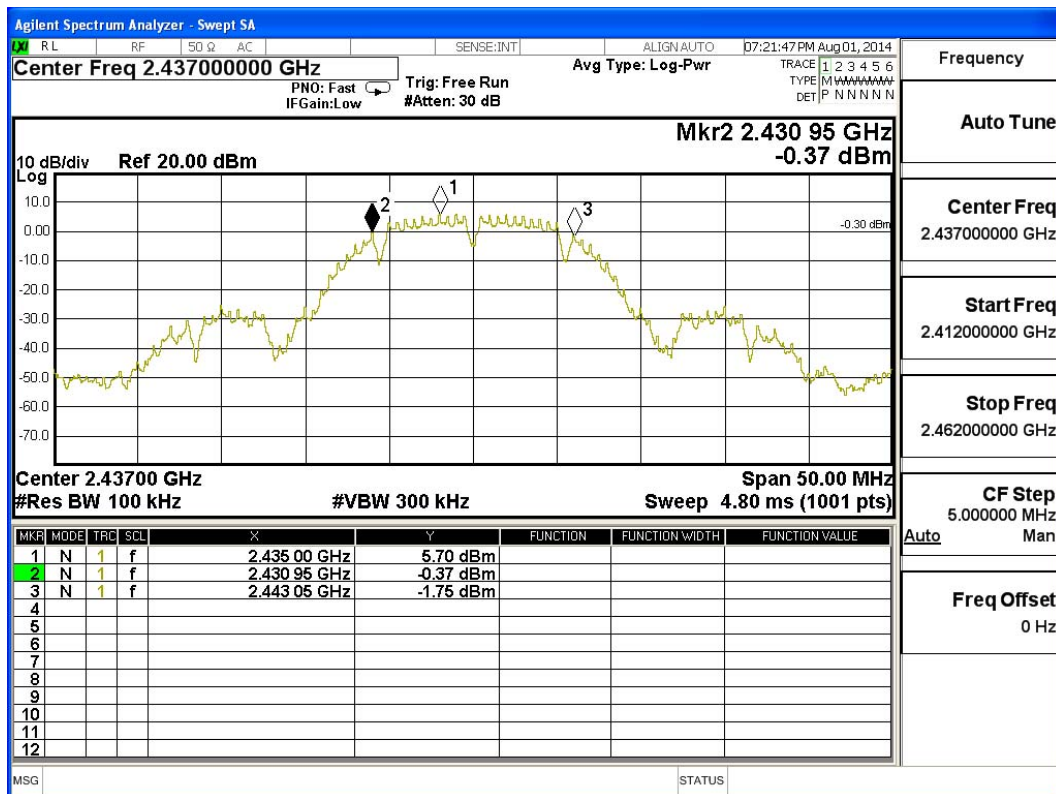

Product : TABLET PC
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	11200	>500	Pass


Figure Channel 11:

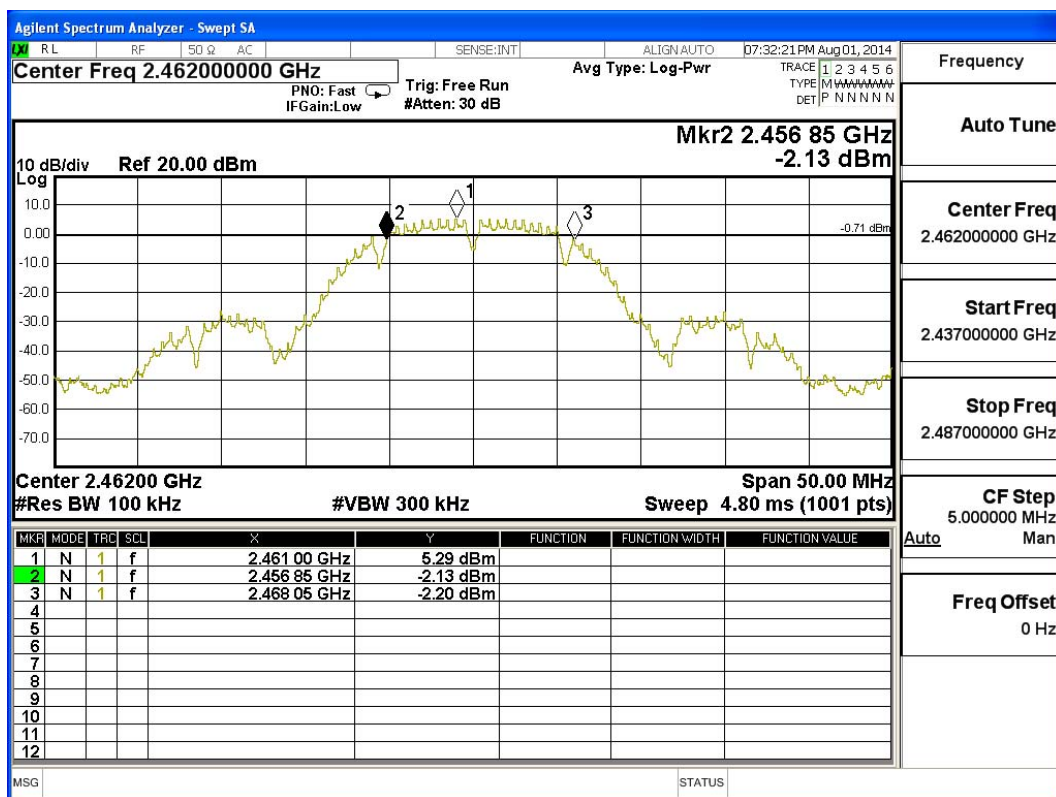

Product : TABLET PC
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	16450	>500	Pass


Figure Channel 1:

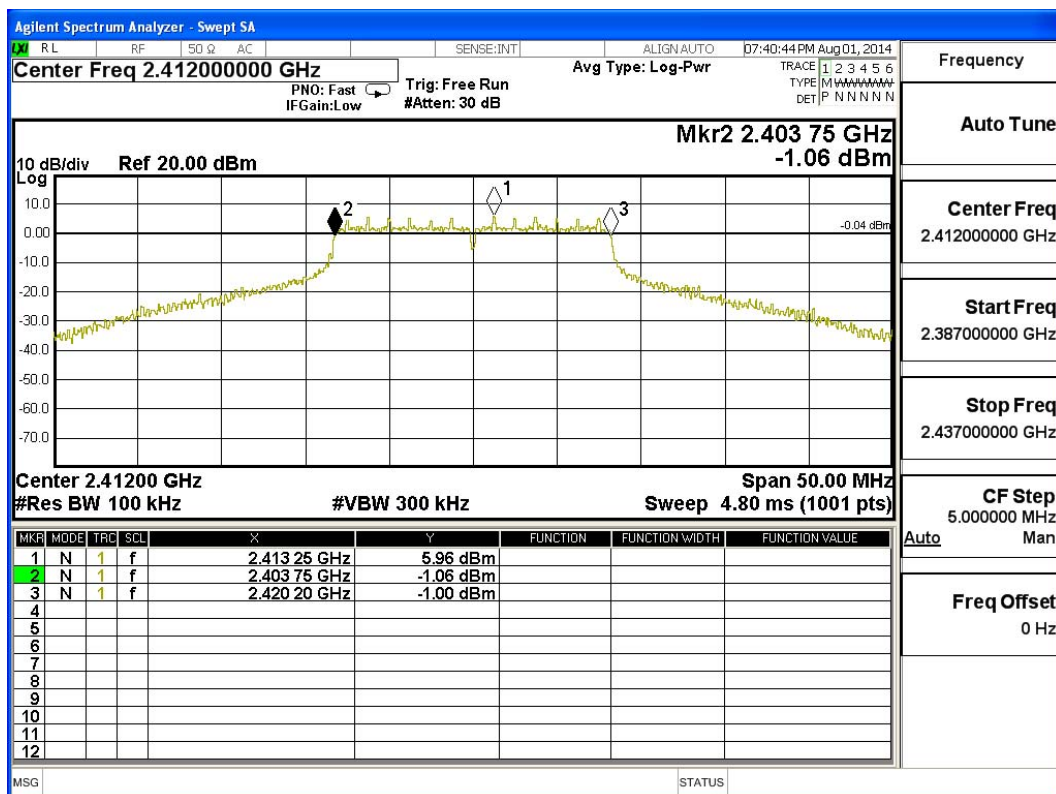

Product : TABLET PC
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	16450	>500	Pass


Figure Channel 6:

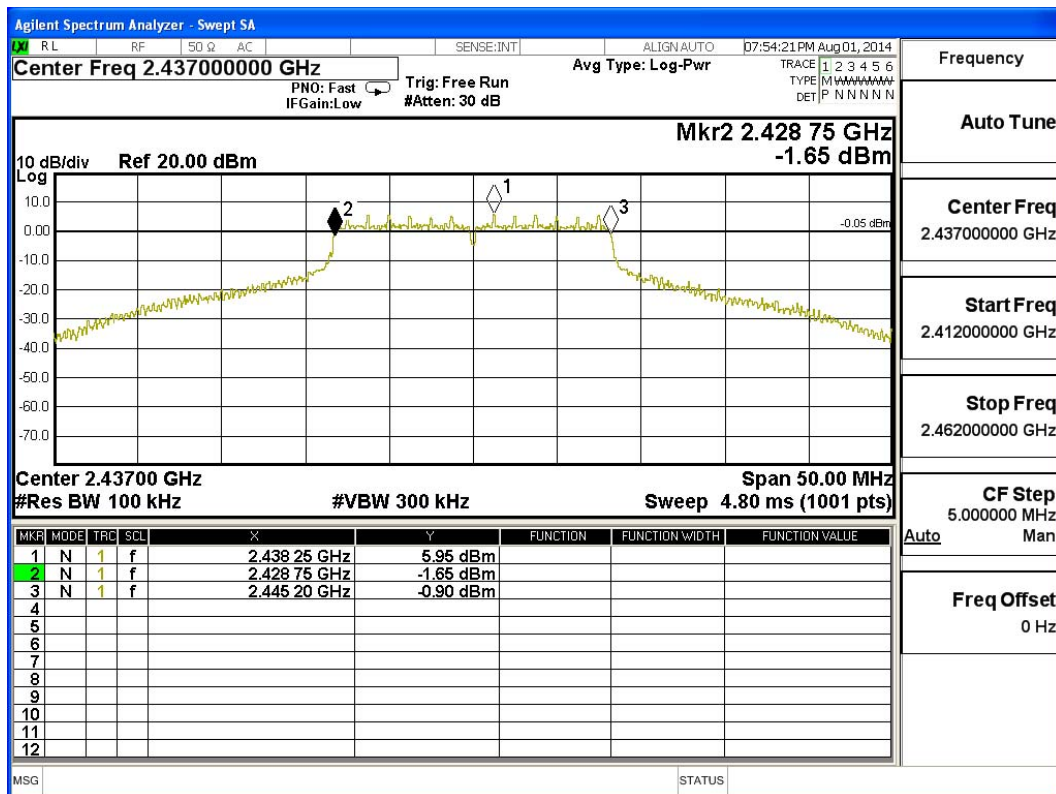

Product : TABLET PC
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	16450	>500	Pass


Figure Channel 11:

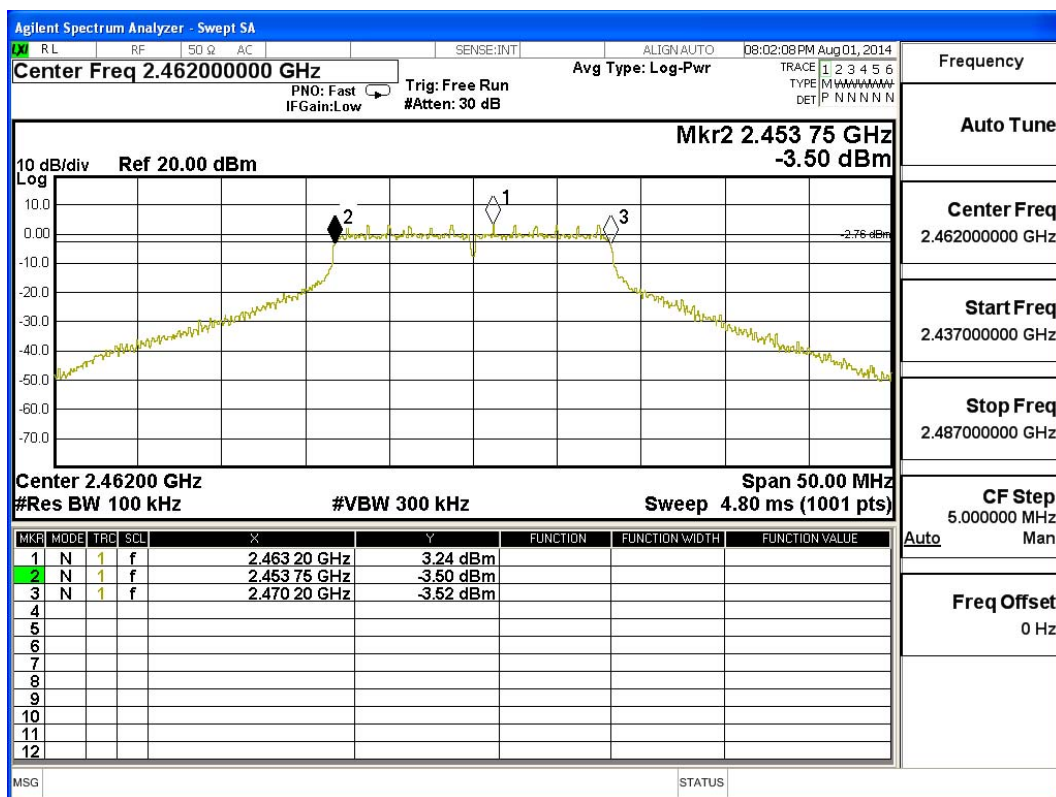

Product : TABLET PC
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps (5745MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
149	5745.00	16450	>500	Pass

Figure Channel 149:

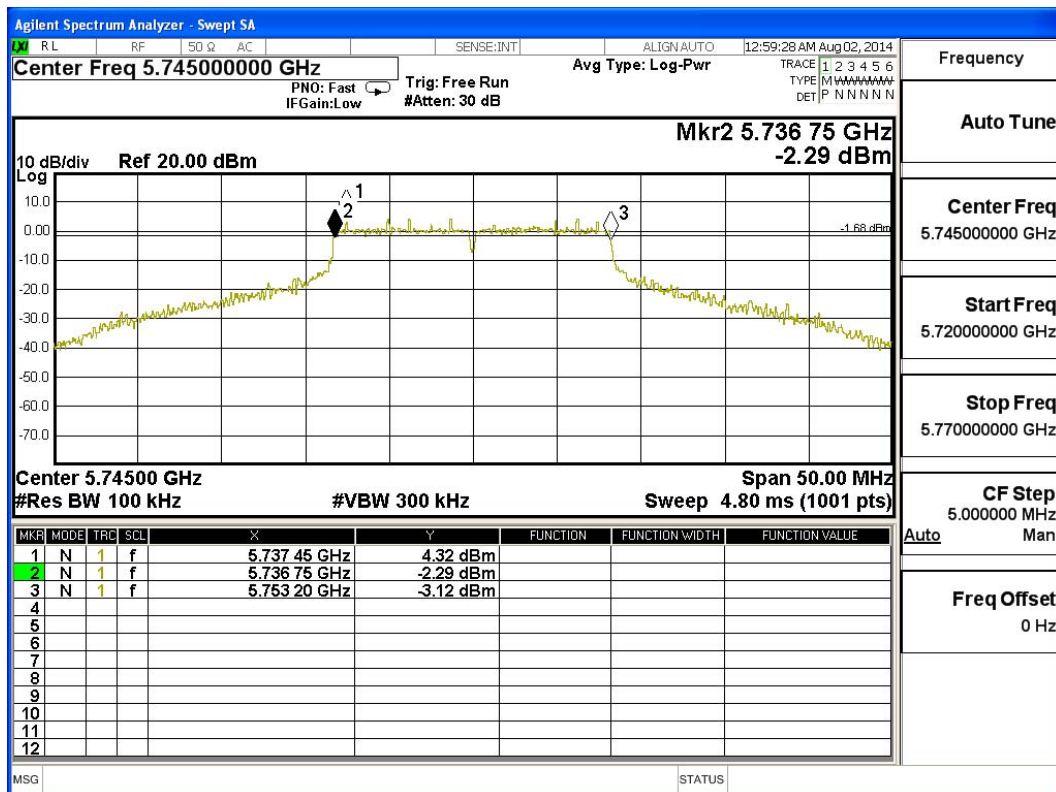

Product : TABLET PC
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps (5785MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
157	5785.00	16400	>500	Pass

Figure Channel 157:

