

MEASUREMENT REPORT

FCC PART 15.247 / RSS-247 ZigBee 802.15.4

FCC ID: 2AGN8-E12N1X

IC: 20888-E12N1X

APPLICANT: Sengled Co., Ltd.

Application Type: Certification

Product: element classic

Model No.: E12-N13, E12-N14, E12-N15

Trademark: sengled

FCC Classification: Digital Transmission System (DTS)


FCC Rule Part(s): Part 15.247

IC Rule(s): RSS-247 Issue 1

Test Procedure(s): ANSI C63.10-2013, KDB 558074 D01v03r05

Test Date: November 17 ~ December 08, 2016

Reviewed By
Manager

: 
(Robin Wu)

Approved By
CEO

: 
(Marlin Chen)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01v03r05. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1611RSU03501	Rev. 01	Initial report	12-08-2016	Valid

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description.....	7
2.2. Product Specification Subjective to this Report.....	7
2.3. Operation Frequency / Channel List	7
2.4. Test Mode	7
2.5. Test Software	7
2.6. Device Capabilities	8
2.7. Test Configuration	8
2.8. EMI Suppression Device(s)/Modifications.....	8
2.9. Labeling Requirements.....	8
3. DESCRIPTION OF TEST	9
3.1. Evaluation Procedure	9
3.2. AC Line Conducted Emissions	9
3.3. Radiated Emissions	10
4. ANTENNA REQUIREMENTS.....	11
5. TEST EQUIPMENT CALIBRATION DATE	12
6. MEASUREMENT UNCERTAINTY	14
7. TEST RESULT	15
7.1. Summary	15
7.2. 6dB Bandwidth Measurement.....	16
7.2.1. Test Limit	16
7.2.2. Test Procedure used.....	16
7.2.3. Test Setting.....	16
7.2.4. Test Setup.....	16
7.2.5. Test Result.....	17
7.3. Output Power Measurement	19
7.3.1. Test Limit	19
7.3.2. Test Procedure Used	19
7.3.3. Test Setting.....	19

7.3.4.	Test Setup.....	19
7.3.5.	Test Result of Peak Output Power	20
7.4.	Power Spectral Density Measurement	21
7.4.1.	Test Limit	21
7.4.2.	Test Procedure Used	21
7.4.3.	Test Setting.....	21
7.4.4.	Test Setup.....	21
7.4.5.	Test Result of Power Spectral Density	22
7.5.	Conducted Band Edge and Out-of-Band Emissions.....	24
7.5.1.	Test Limit	24
7.5.2.	Test Procedure Used	24
7.5.3.	Test Setting.....	24
7.5.4.	Test Setup.....	25
7.5.5.	Test Result.....	26
7.6.	Radiated Spurious Emission Measurement	30
7.6.1.	Test Limit	30
7.6.2.	Test Procedure Used	30
7.6.3.	Test Setting.....	30
7.6.4.	Test Setup.....	32
7.6.5.	Test Result.....	34
7.7.	Radiated Restricted Band Edge Measurement	46
7.7.1.	Test Result.....	46
7.8.	AC Conducted Emissions Measurement.....	58
7.8.1.	Test Limit	58
7.8.2.	Test Setup.....	58
7.8.3.	Test Result.....	59
8.	CONCLUSION.....	61

§2.1033 General Information

Applicant:	Sengled Co., Ltd.
Applicant Address:	Room 201/15, Building 1, No. 498, Guoshoujing Road, Pilot Free Trade Zone, Shanghai, China
Manufacturer:	Sengled Co., Ltd.
Manufacturer Address:	Room 201/15, Building 1, No. 498, Guoshoujing Road, Pilot Free Trade Zone, Shanghai, China
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
MRT FCC Registration No.:	809388
MRT IC Registration No.:	11384A
FCC Rule Part(s):	Part 15.247
IC Rule:	RSS-247 Issue 1
Model No.:	E12-N13, E12-N14, E12-N15
FCC ID:	2AGN8-E12N1X
IC:	20888-E12N1X
Test Device Serial No.:	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	element classic
Model No.	E12-N13, E12-N14, E12-N15
ZigBee Specification	802.15.4

Note 1: E12-N13 and E12-N15 are the same besides correlated color temperature (CCT) is different, E12-N13 is yellow CCT and E12-N15 is white CCT.

Note 2: E12-N13 and E12-N14 are the same besides color rendering index (CRI) is different.

2.2. Product Specification Subjective to this Report

Frequency Range	2405 ~ 2480 MHz
Maximum Peak Output Power	7.56dBm
Type of Modulation	O-QPSK
Antenna Type	PCB Antenna
Antenna Gain	3.7dBi

Note: For other features of this EUT, test report will be issued separately.

2.3. Operation Frequency / Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency
11	2405 MHz	12	2410 MHz	13	2415 MHz
14	2420 MHz	15	2425 MHz	16	2430 MHz
17	2435 MHz	18	2440 MHz	19	2445 MHz
20	2450 MHz	21	2455 MHz	22	2460 MHz
23	2465 MHz	24	2470 MHz	25	2475 MHz
26	2480 MHz	--	--	--	--

2.4. Test Mode

Test Mode	Mode 1: Transmit by 802.15.4
-----------	------------------------------


2.5. Test Software

The test utility software used during testing was "sscom32.exe".

2.6. Device Capabilities

This device contains the following capabilities: 2.4GHz ZigBee (DTS)

Note: 2.4GHz ZigBee (DTS) operation is possible in 5MHz channel bandwidth. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

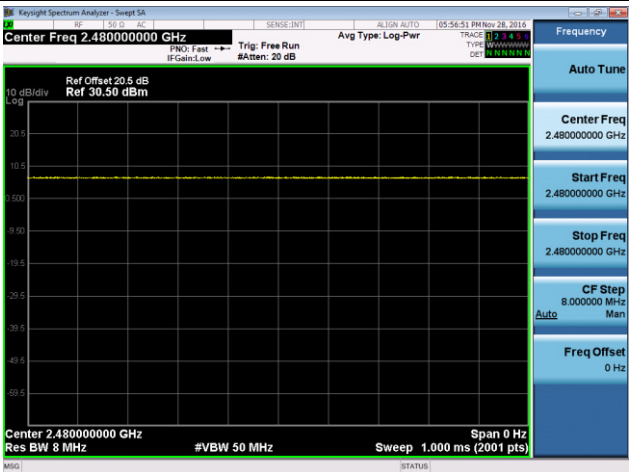Test Mode	Duty Cycle
802.15.4	100%
	

□

2.7. Test Configuration

The **element classic FCC ID: 2AGN8-E12N1X** was tested per the guidance of KDB 558074 D01v03r05. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.8. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.9. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v03r05 were used in the measurement of the **element classic FCC ID: 2AGN8-E12N1X**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.8.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-25GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **element classic** is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **element classic FCC ID: 2AGN8-E12N1X** unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	101209	1 year	2017/06/21
Two-Line V-Network	R&S	ENV216	101683	1 year	2017/06/21
Two-Line V-Network	R&S	ENV216	101684	1 year	2017/06/21
Temperature/Humidity Meter	Yuhuaze	HTC-2	N/A	1 year	2016/12/20
Shielding Anechoic Chamber	Mikebang	Chamber-SR2	N/A	1 year	2017/05/10

Radiated Emissions - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9010A	MY56070124	1 year	2017/06/23
Preamplifier	Agilent	83017A	MY53270040	1 year	2017/03/29
Loop Antenna	Schwarzbeck	FMZB1519	1519-041	1 year	2016/12/14
Bilog Period Antenna	Schwarzbeck	VULB9168	662	1 year	2016/12/10
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1167	1 year	2017/10/22
Broadband Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170549	1 year	2017/01/04
Temperature/Humidity Meter	Yuhuaze	HTC-2	N/A	1 year	2016/12/20
RF Cable	HUBER+SUHNER	Cable 01	N/A	1 year	2017/03/29
RF Cable	HUBER+SUHNER	Cable 02	N/A	1 year	2017/03/29
Anechoic Chamber	TDK	Chamber-AC1	N/A	1 year	2017/05/10

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2017/05/08
USB Wideband Power Sensor	Boonton	55006	MRTSUE06109	1 year	2017/05/08
RF Cable	HUBER+SUHNER	Cable 03	MRTSUE06055-3	1 year	2017/03/29
Attenuator	Woken	WATT-218FS-15	MRTSUE06220	1 year	2017/03/29
DC Block	Woken	00900A1A2A101A	MRTSUE06221	1 year	2017/03/29
Temperature/Humidity Meter	Yuhuaize	HTC-2	MRTSUE06180	1 year	2016/12/20

Software	Version	Function
e3	V8.3.5	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement - AC1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB
Spurious Emissions, Conducted - TR3
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.78dB
Output Power - TR3
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.13dB
Power Spectrum Density - TR3
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.15dB
Occupied Bandwidth - TR3
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.28%

7. TEST RESULT

7.1. Summary

Company Name: Sengled Co., Ltd.
FCC ID: 2AGN8-E12N1X
IC: 20888-E12N1X
FCC Classification: Digital Transmission System (DTS)
Data Rate(s) Tested: 250kbps

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	RSS-247 [5.4(4)]	Output Power	$\leq 1\text{Watt}$ & $\text{EIRP} \leq 4\text{Watt}$		Pass	Section 7.3
15.247(e)	RSS-247 [5.2]	Power Spectral Density	$\leq 8\text{dBm} / 3\text{kHz}$		Pass	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	$\geq 20\text{dBc(Peak)}$		Pass	Section 7.5
15.205 15.209	RSS-247 [5.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6&7.7
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.2.2. Test Procedure used

KDB 558074 D01v03r05 - Section 8.2 Option 2

7.2.3. Test Setting


1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize


7.2.4. Test Setup

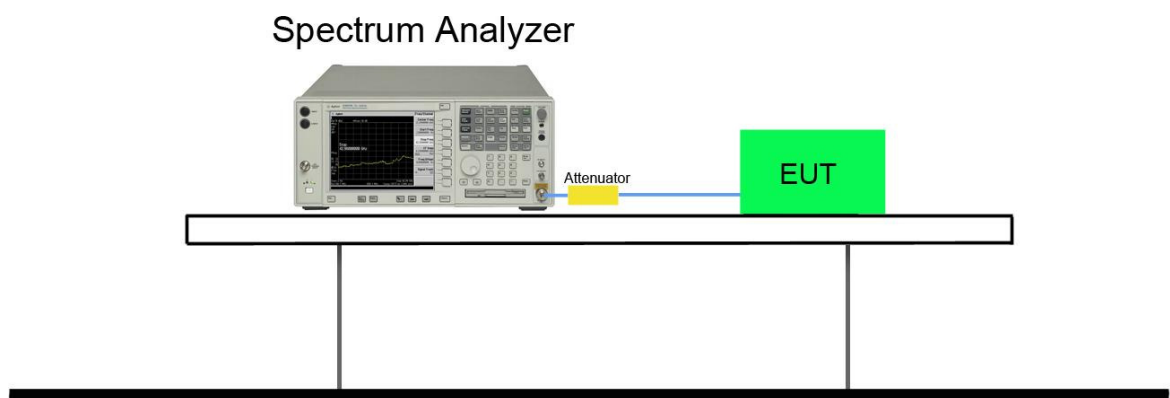

7.2.5. Test Result

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	99% Bandwidth (MHz)	Result
802.15.4	O-QPSK	11	2405	1.60	≥ 0.5	2.42	Pass
802.15.4	O-QPSK	15	2425	1.62	≥ 0.5	2.47	Pass
802.15.4	O-QPSK	19	2445	1.66	≥ 0.5	2.49	Pass
802.15.4	O-QPSK	20	2450	1.61	≥ 0.5	2.44	Pass
802.15.4	O-QPSK	25	2475	1.66	≥ 0.5	2.49	Pass
802.15.4	O-QPSK	26	2480	1.64	≥ 0.5	2.49	Pass

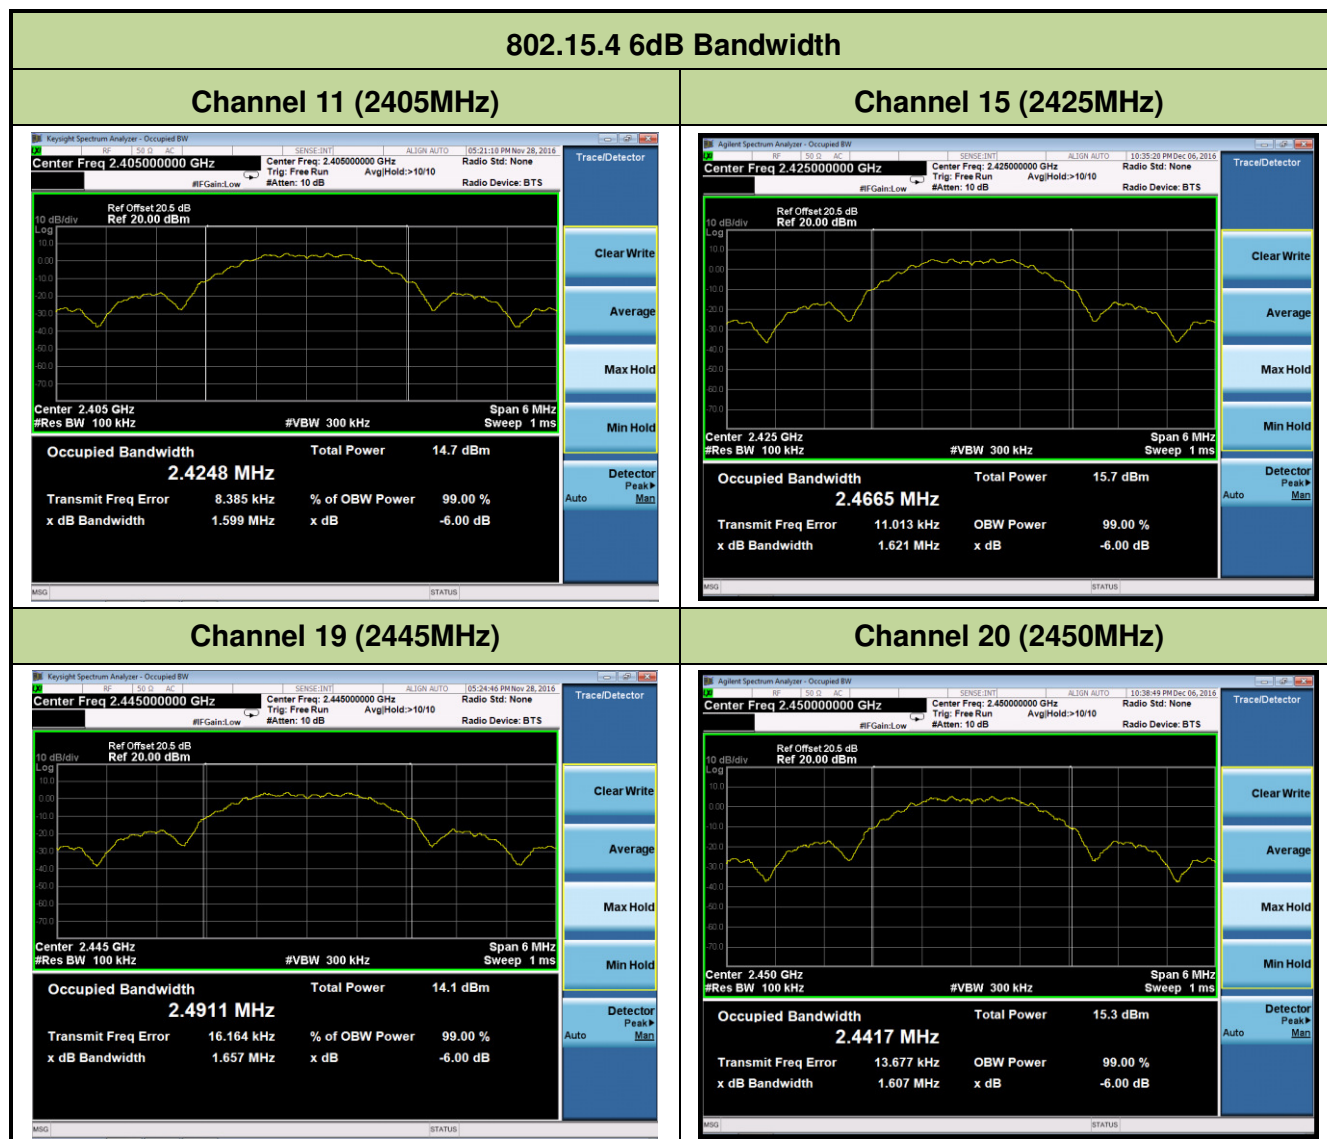

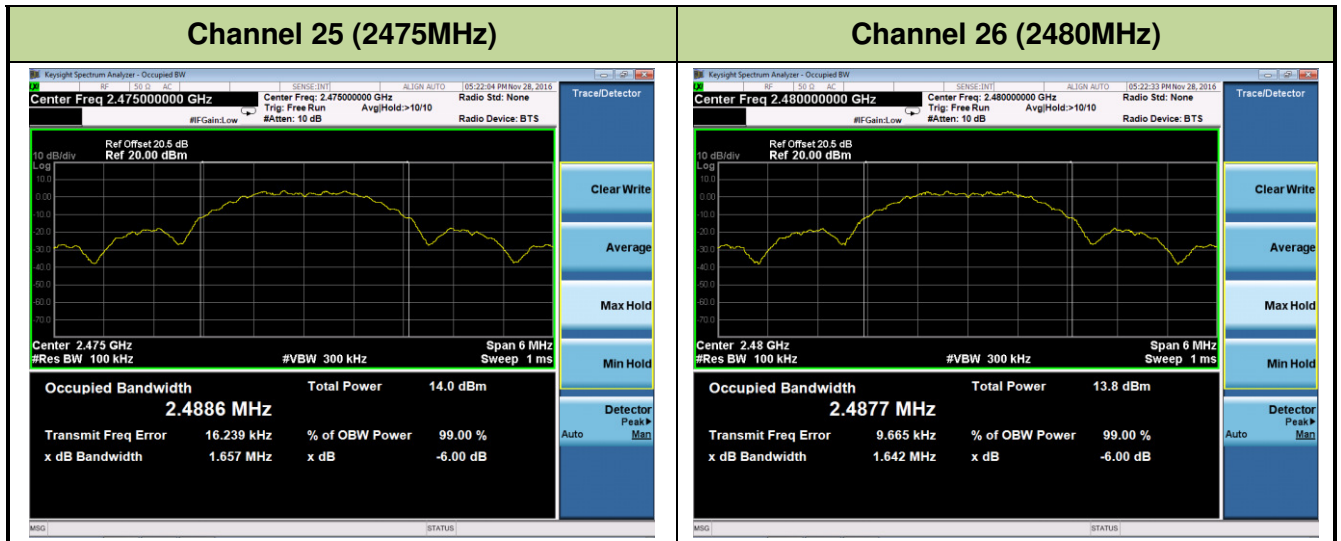

7.3. Output Power Measurement

7.3.1. Test Limit

For FCC

The maximum output power shall be less 1 Watt (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For IC

The maximum conducted output power shall be exceed 1 Watt (30dBm) and the E.I.R.P shall not exceed 4 Watt (36dBm).

7.3.2. Test Procedure Used


KDB 558074 D01v03r05 - Section 9.1.2 PKPM1 Peak Power Method (for signals with BW \leq 50MHz)

7.3.3. Test Setting

Method PKPM1 (Peak Power Measurement of Signals with DTS BW \leq 50MHz)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

7.3.4. Test Setup

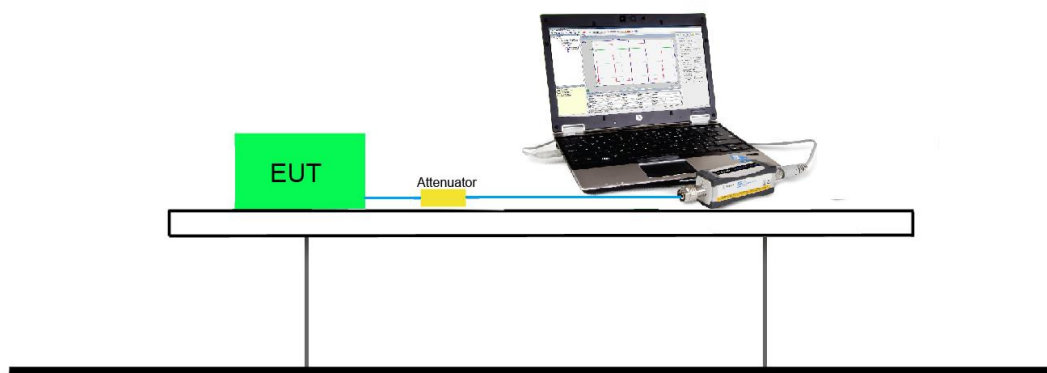

7.3.5. Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)	E.I.R.P (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	7.56	≤ 30	11.26	≤ 36	Pass
802.15.4	O-QPSK	15	2425	7.38	≤ 30	11.08	≤ 36	Pass
802.15.4	O-QPSK	19	2445	7.26	≤ 30	10.96	≤ 36	Pass
802.15.4	O-QPSK	20	2450	7.15	≤ 30	10.85	≤ 36	Pass
802.15.4	O-QPSK	25	2475	7.04	≤ 30	10.74	≤ 36	Pass
802.15.4	O-QPSK	26	2480	-2.99	≤ 30	0.71	≤ 36	Pass

Note: E.I.R.P. (dBm) = Peak Output Power (dBm) + Antenna Gain (dBi).

Test Result of Average Output Power for Report Only

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)	E.I.R.P (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	7.24	≤ 30	10.94	≤ 36	Pass
802.15.4	O-QPSK	15	2425	7.06	≤ 30	10.76	≤ 36	Pass
802.15.4	O-QPSK	19	2445	6.94	≤ 30	10.64	≤ 36	Pass
802.15.4	O-QPSK	20	2450	6.79	≤ 30	10.49	≤ 36	Pass
802.15.4	O-QPSK	25	2475	6.68	≤ 30	10.38	≤ 36	Pass
802.15.4	O-QPSK	26	2480	-3.63	≤ 30	0.07	≤ 36	Pass

Note: E.I.R.P. (dBm) = Average Output Power (dBm) + Antenna Gain (dBi).

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


7.4.2. Test Procedure Used

KDB 558074 D01v03r05 - Section 10.2 Method PKPSD

7.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

7.4.4. Test Setup

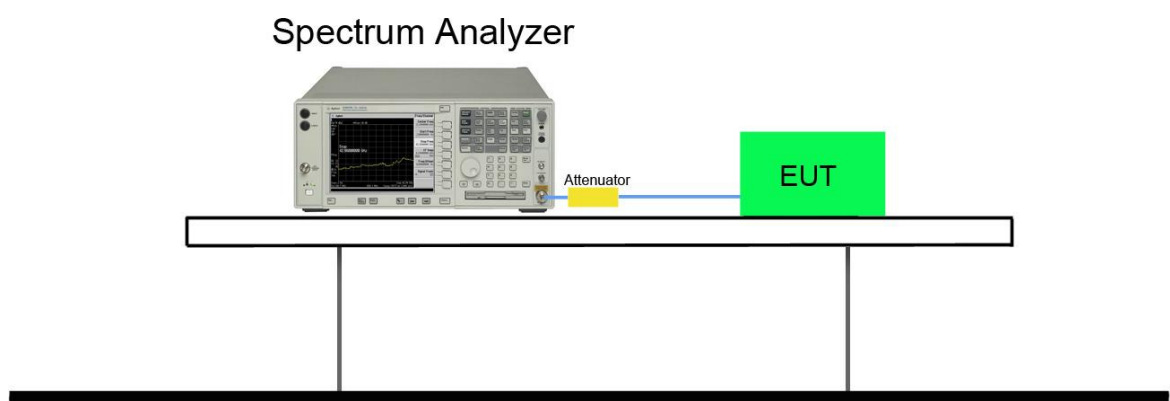

7.4.5. Test Result of Power Spectral Density

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.15.4	O-QPSK	11	2405	-7.05	≤ 8	Pass
802.15.4	O-QPSK	15	2425	-5.88	≤ 8	Pass
802.15.4	O-QPSK	19	2445	-7.00	≤ 8	Pass
802.15.4	O-QPSK	20	2450	-6.19	≤ 8	Pass
802.15.4	O-QPSK	25	2475	-7.58	≤ 8	Pass
802.15.4	O-QPSK	26	2480	-20.06	≤ 8	Pass

802.15.4 Power Density

Channel 11 (2405MHz)



Channel 15 (2425MHz)




Channel 19 (2445MHz)



Channel 20 (2450MHz)



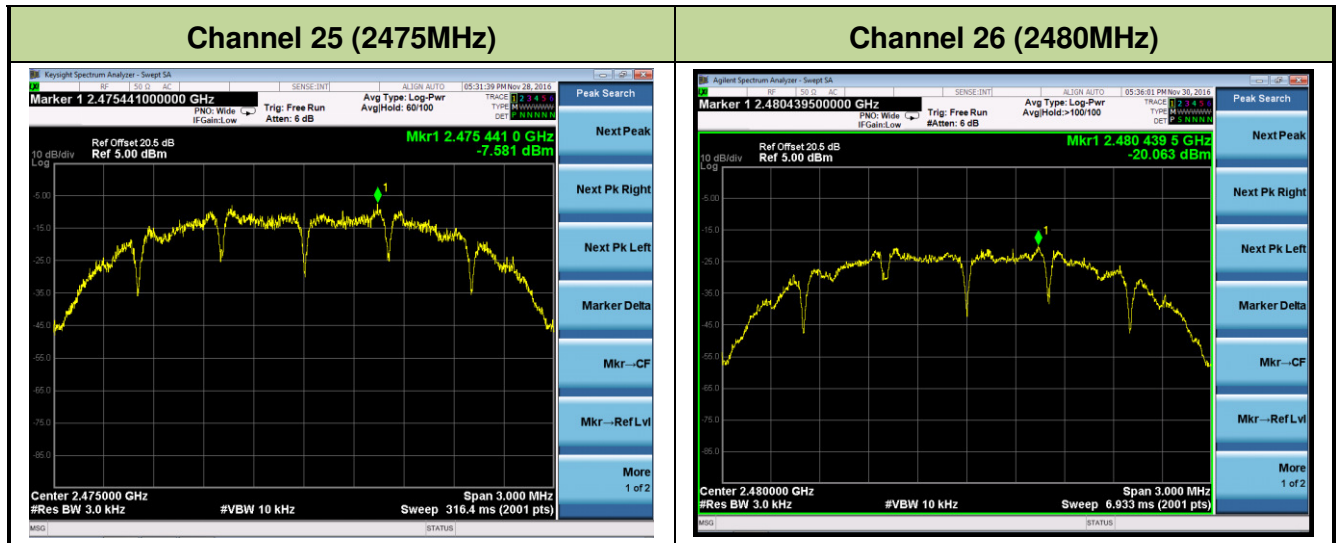

7.5. Conducted Band Edge and Out-of-Band Emissions

7.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

7.5.2. Test Procedure Used

KDB 558074 D01v03r05 - Section 11.2 & Section 11.3

7.5.3. Test Setting


1. Reference level measurement

- (a) Set instrument center frequency to DTS channel center frequency
- (b) Set the span to ≥ 1.5 times the DTS bandwidth
- (c) Set the RBW = 100 kHz
- (d) Set the VBW $\geq 3 \times$ RBW
- (e) Detector = peak
- (f) Sweep time = auto couple
- (g) Trace mode = max hold
- (h) Allow trace to fully stabilize

2. Emission level measurement

- (a) Set the center frequency and span to encompass frequency range to be measured
- (b) RBW = 100kHz
- (c) VBW $\geq 3 \times$ RBW
- (d) Detector = Peak
- (e) Trace mode = max hold
- (f) Sweep time = auto couple
- (g) The trace was allowed to stabilize

7.5.4. Test Setup

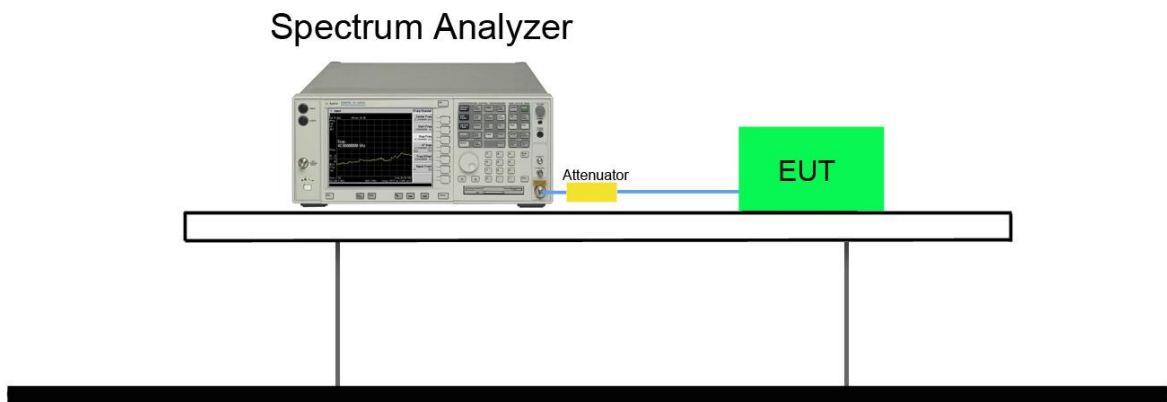


7.5.5. Test Result

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	Limit	Result
802.15.4	O-QPSK	11	2405	$\leq 20\text{dBc}$	Pass
802.15.4	O-QPSK	15	2425	$\leq 20\text{dBc}$	Pass
802.15.4	O-QPSK	19	2445	$\leq 20\text{dBc}$	Pass
802.15.4	O-QPSK	20	2450	$\leq 20\text{dBc}$	Pass
802.15.4	O-QPSK	25	2475	$\leq 20\text{dBc}$	Pass
802.15.4	O-QPSK	26	2480	$\leq 20\text{dBc}$	Pass


802.15.4 Out-of-Band Emissions

Channel 11 (2405MHz)


100kHz PSD Reference Level

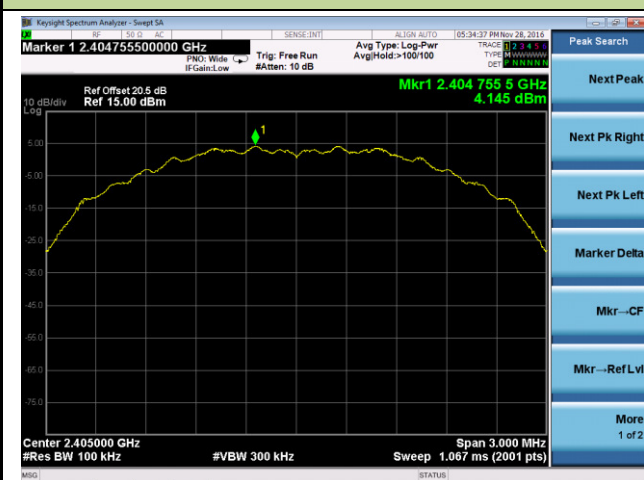

Low Band Edge

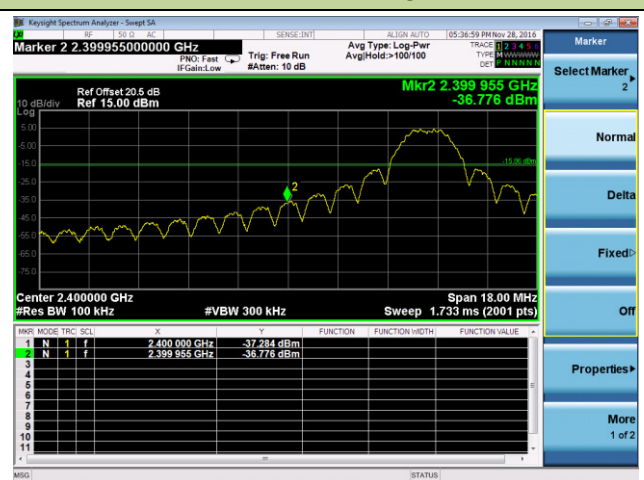

Spurious Emission

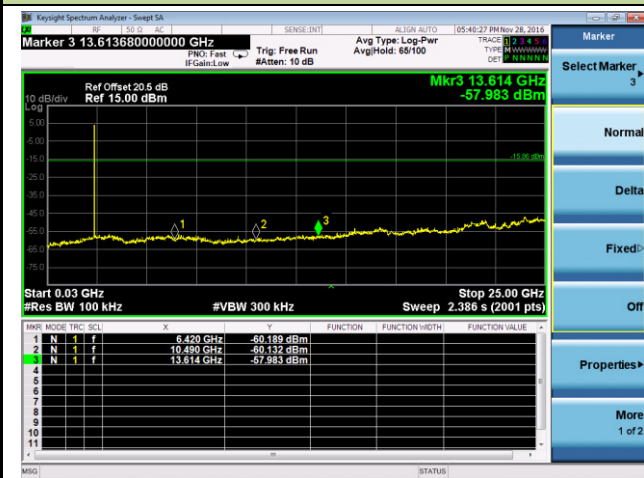


Channel 15 (2425MHz)

100kHz PSD Reference Level



Spurious Emission

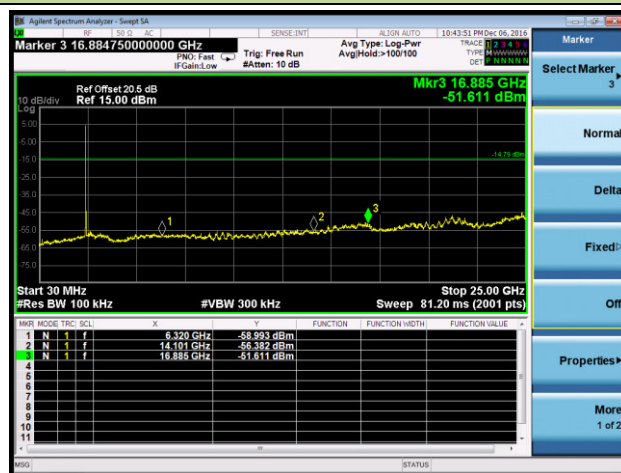


Channel 19 (2445MHz)

100kHz PSD Reference Level




Spurious Emission

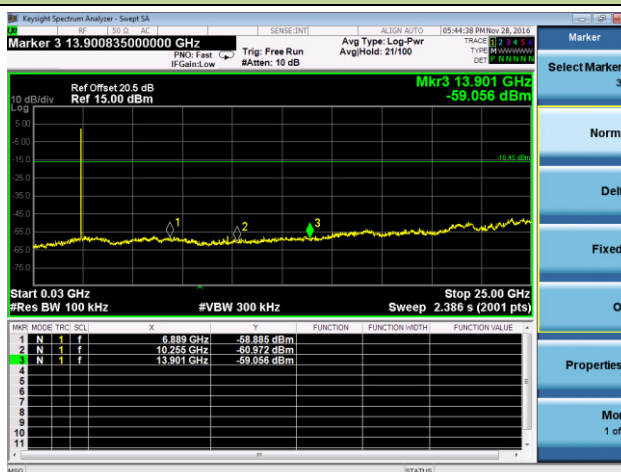


Channel 20 (2450MHz)

100kHz PSD Reference Level

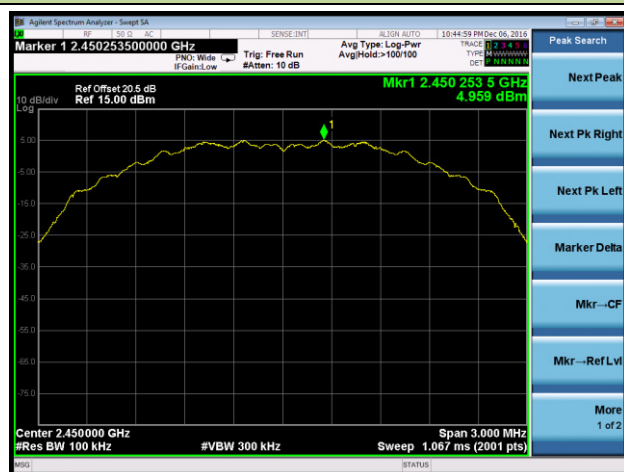


Spurious Emission

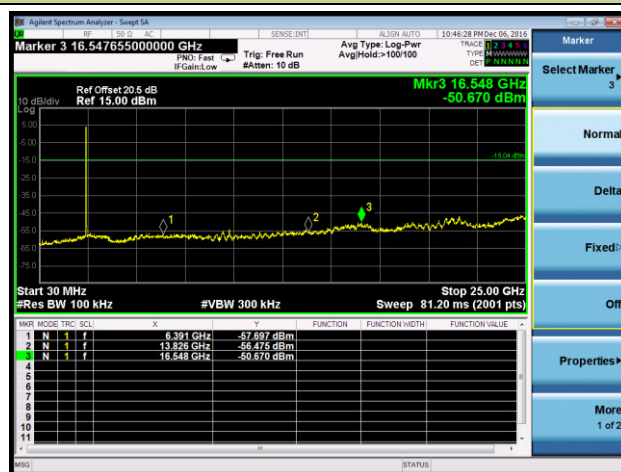


Channel 25 (2475MHz)


100kHz PSD Reference Level

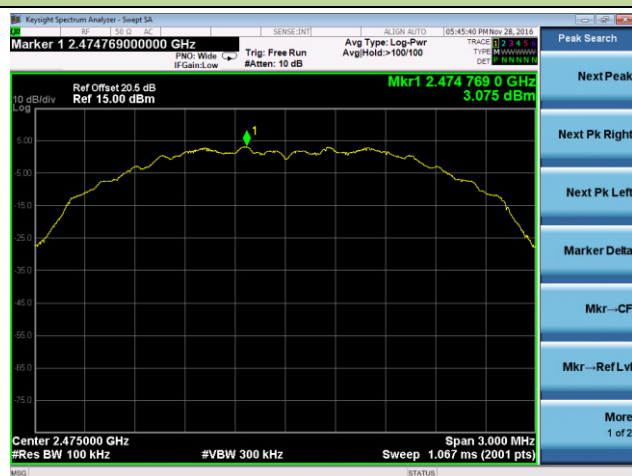

High Band Edge

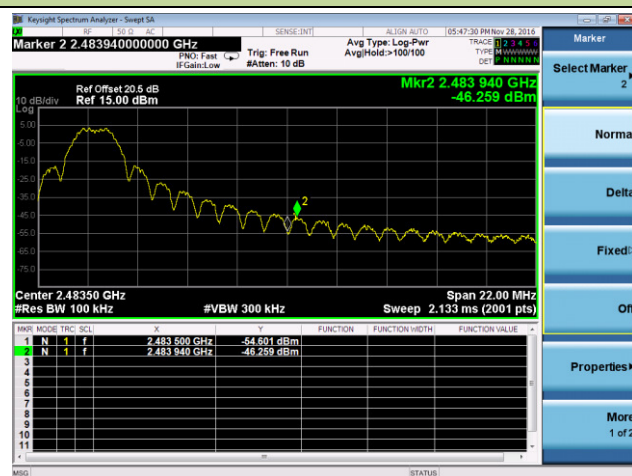


Spurious Emission

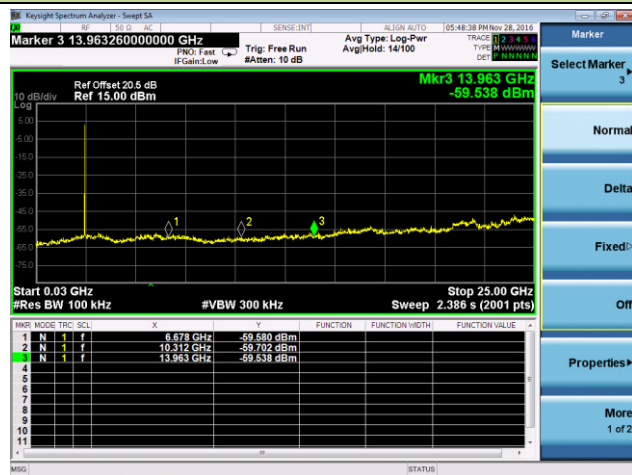


Channel 26 (2480MHz)


100kHz PSD Reference Level

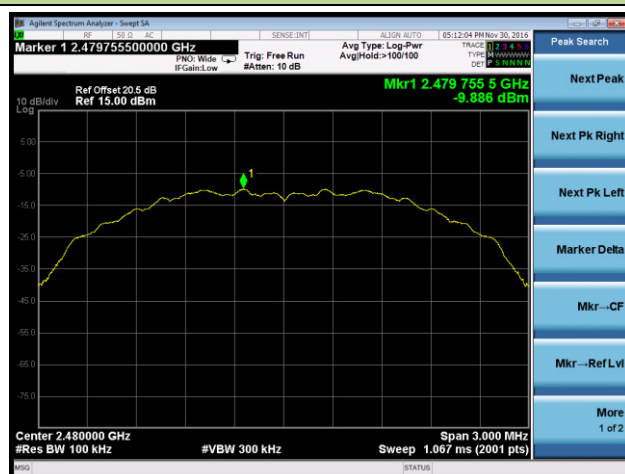

High Band Edge

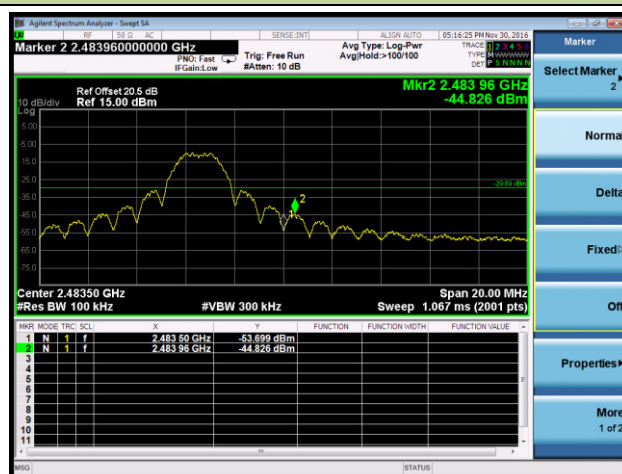

Spurious Emission

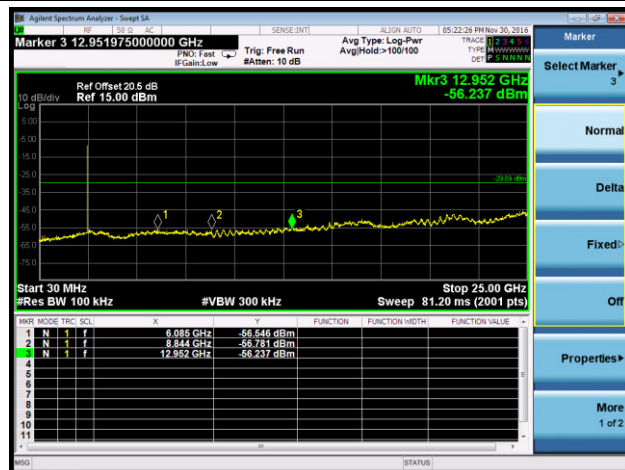

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

KDB 558074 D01v03r05 - Section 12.2.3 (quasi-peak measurements)

KDB 558074 D01v03r05 - Section 12.2.4 (peak power measurements)

KDB 558074 D01v03r05 - Section 12.2.5 (average power measurements)

7.6.3. Test Setting

Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 D01v03r05

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple

6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements per Section 12.2.5.3 of KDB 558074 D01v03r05


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.6.4. Test Setup


9kHz ~ 30MHz Test Setup:

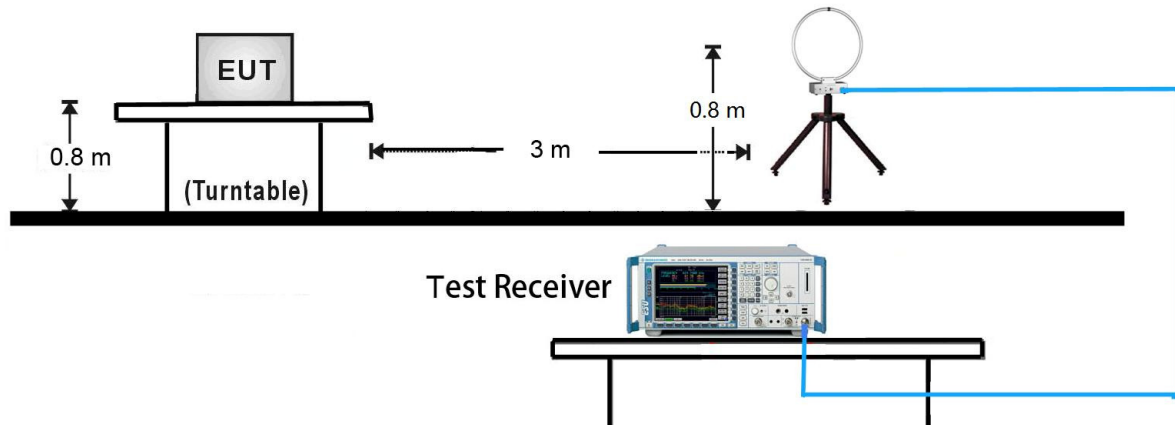


30MHz ~ 1GHz Test Setup:

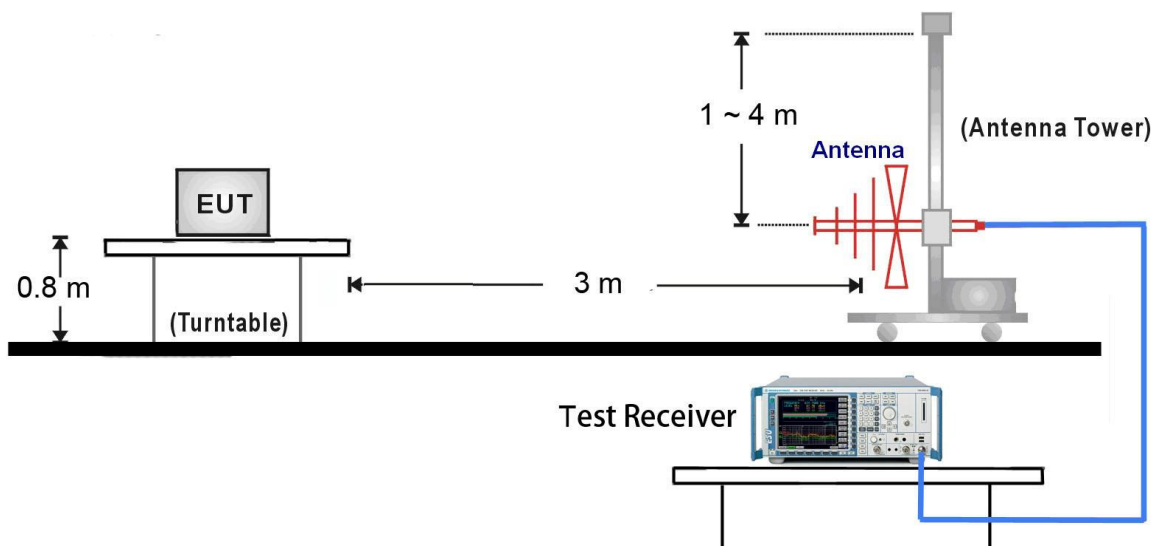

1GHz ~ 18GHz Test Setup:

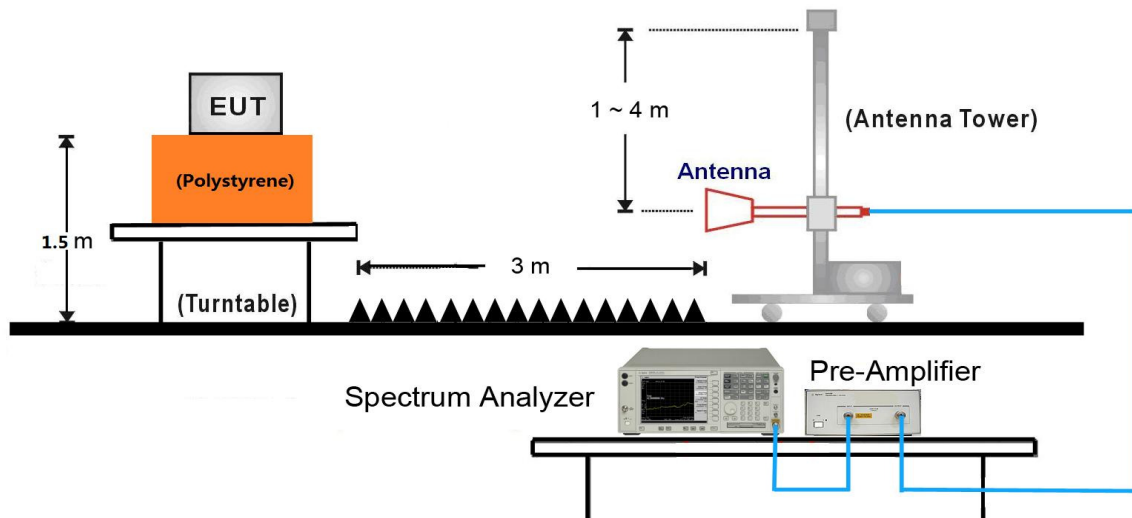

18GHz ~ 25GHz Test Setup:

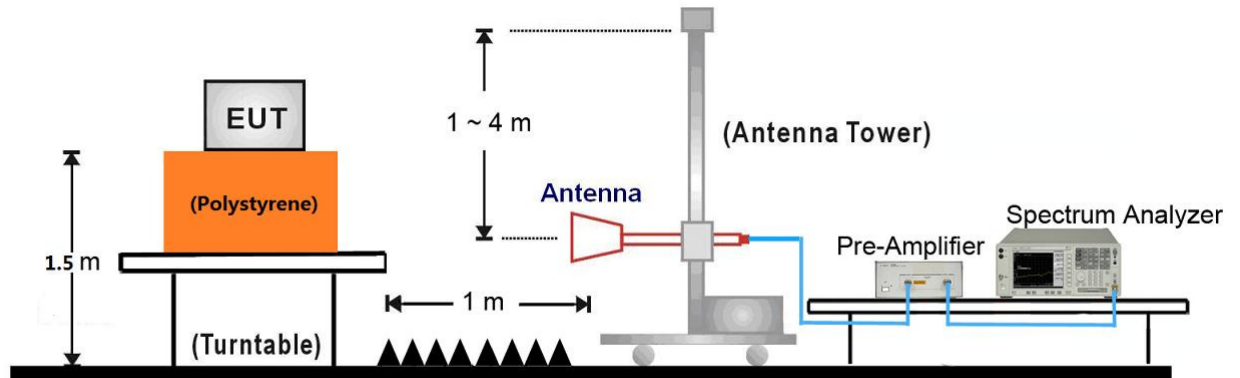

7.6.5. Test Result

Test Mode:	802.15.4	Test Site:	AC1
Test Channel:	11	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7264.5	36.0	7.9	43.9	74.0	-30.1	Peak	Horizontal
	8114.5	35.7	8.6	44.3	74.0	-29.7	Peak	Horizontal
*	10384.0	35.0	12.3	47.3	79.1	-31.8	Peak	Horizontal
*	13427.0	35.4	13.6	49.0	79.1	-30.1	Peak	Horizontal
	7545.0	36.2	8.3	44.5	74.0	-29.5	Peak	Vertical
	10630.5	36.1	12.4	48.5	74.0	-25.5	Peak	Vertical
*	13078.5	34.9	12.4	47.3	79.1	-31.8	Peak	Vertical
*	16351.0	35.8	12.9	48.7	79.1	-30.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (99.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-Amplifier Gain (dB)

Test Mode:	802.15.4	Test Site:	AC1
Test Channel:	15	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7273.0	37.9	8.0	45.9	74.0	-28.1	Peak	Horizontal
	8233.5	35.4	8.2	43.6	74.0	-30.4	Peak	Horizontal
*	9780.5	34.1	11.4	45.5	79.2	-33.7	Peak	Horizontal
*	14217.5	34.5	15.4	49.9	79.2	-29.3	Peak	Horizontal
	3847.5	36.2	0.0	36.2	74.0	-37.8	Peak	Vertical
	4791.0	35.9	2.7	38.6	74.0	-35.4	Peak	Vertical
*	7774.5	35.6	8.2	43.8	79.2	-35.4	Peak	Vertical
*	9653.0	34.5	11.0	45.5	79.2	-33.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (99.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-Amplifier Gain (dB)

Test Mode:	802.15.4	Test Site:	AC1
Test Channel:	19	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7485.5	36.1	8.2	44.3	74.0	-29.7	Peak	Horizontal
	11030.0	35.2	13.0	48.2	74.0	-25.8	Peak	Horizontal
*	12732.3	34.5	11.7	46.2	75.4	-29.2	Peak	Horizontal
*	16382.2	36.4	13.0	49.4	75.4	-26.0	Peak	Horizontal
	9457.5	35.7	10.5	46.2	74.0	-27.8	Peak	Vertical
	11030.0	35.2	13.0	48.2	74.0	-25.8	Peak	Vertical
*	12733.4	34.7	11.7	46.4	75.4	-29.0	Peak	Vertical
*	16372.3	36.2	12.9	49.1	75.4	-26.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (95.4dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-Amplifier Gain (dB)

Test Mode:	802.15.4	Test Site:	AC1
Test Channel:	20	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	34.9	2.7	37.6	74.0	-36.4	Peak	Horizontal
	7332.5	36.4	8.0	44.4	74.0	-29.6	Peak	Horizontal
*	8692.5	35.2	9.0	44.2	76.9	-32.7	Peak	Horizontal
*	9780.5	33.6	11.4	45.0	76.9	-31.9	Peak	Horizontal
	4901.5	35.7	2.7	38.4	74.0	-35.6	Peak	Vertical
	7485.5	35.9	8.2	44.1	74.0	-29.9	Peak	Vertical
*	8641.5	35.2	8.8	44.0	76.9	-32.9	Peak	Vertical
*	9653.0	34.9	11.0	45.9	76.9	-31.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (96.9dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-Amplifier Gain (dB)

Test Mode:	802.15.4	Test Site:	AC1
Test Channel:	25	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7579.0	36.4	8.2	44.6	74.0	-29.4	Peak	Horizontal
	9466.0	35.1	10.5	45.6	74.0	-28.4	Peak	Horizontal
*	13129.3	34.7	12.5	47.2	74.0	-26.8	Peak	Horizontal
*	16823.5	36.2	15.0	51.2	74.0	-22.8	Peak	Horizontal
	9127.4	34.4	9.7	44.1	74.0	-29.9	Peak	Vertical
	10979.0	34.6	13.0	47.6	74.0	-26.4	Peak	Vertical
*	13428.4	34.3	13.6	47.9	74.0	-26.1	Peak	Vertical
*	16532.4	37.7	13.5	51.2	74.0	-22.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (93.4dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-Amplifier Gain (dB)

Test Mode:	802.15.4	Test Site:	AC1
Test Channel:	26	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	9313.0	36.1	10.4	46.5	74.0	-27.5	Peak	Horizontal
	11004.5	35.9	13.0	48.9	74.0	-25.1	Peak	Horizontal
*	12883.0	35.3	12.0	47.3	74.0	-26.7	Peak	Horizontal
*	15305.5	35.1	13.0	48.1	74.0	-25.9	Peak	Horizontal
	7621.5	37.3	8.0	45.3	74.0	-28.7	Peak	Vertical
	9372.5	36.4	10.5	46.9	74.0	-27.1	Peak	Vertical
*	10299.0	33.9	12.0	45.9	74.0	-28.1	Peak	Vertical
*	13410.0	37.2	13.7	50.9	74.0	-23.1	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (89.9dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-Amplifier Gain (dB)

The worst case of Radiated Emission below 1GHz:

Site: AC1	Time: 2016/11/26 - 21:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Vince Yu
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: element classic	Power: AC 120V/60Hz
Worse Case Mode: Transmit at channel 2405MHz	

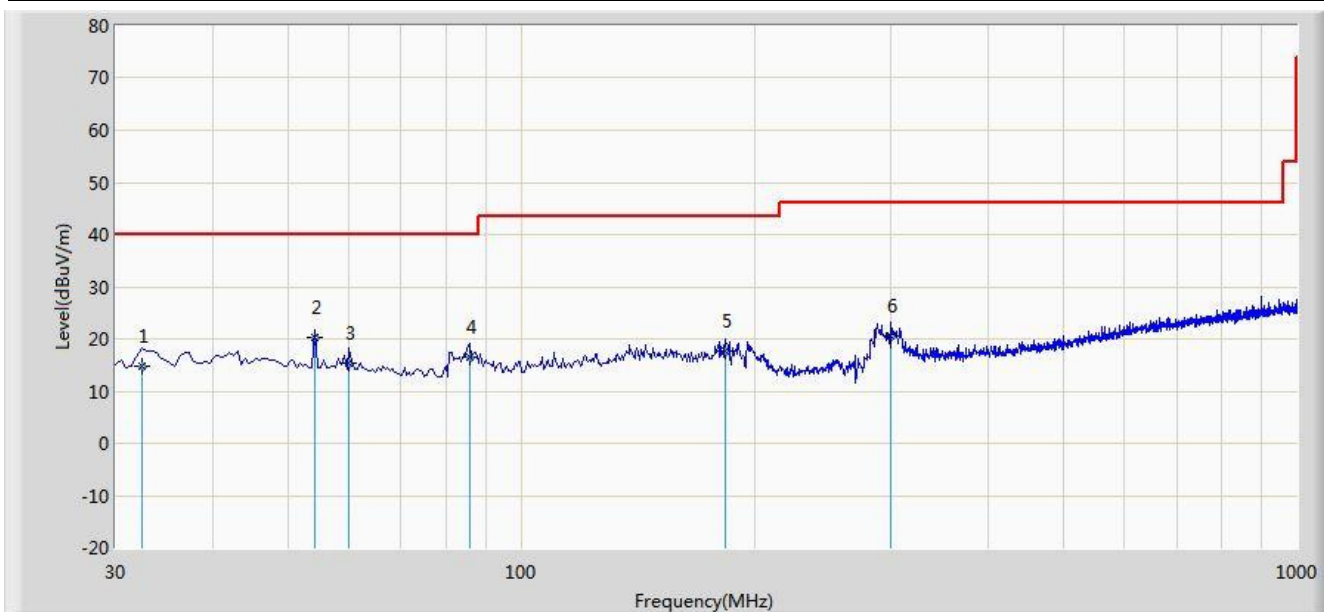


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			32.425	14.917	1.209	-25.083	40.000	13.708	QP
2		*	54.250	20.161	6.398	-19.839	40.000	13.763	QP
3			60.070	15.421	2.109	-24.579	40.000	13.312	QP
4			85.775	16.531	6.398	-23.469	40.000	10.133	QP
5			183.260	17.723	5.303	-25.777	43.500	12.420	QP
6			300.145	20.687	6.383	-25.313	46.000	14.304	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/11/26 - 21:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Vince Yu
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: element classic	Power: AC 120V/60Hz
Worse Case Mode: Transmit at channel 2405MHz	

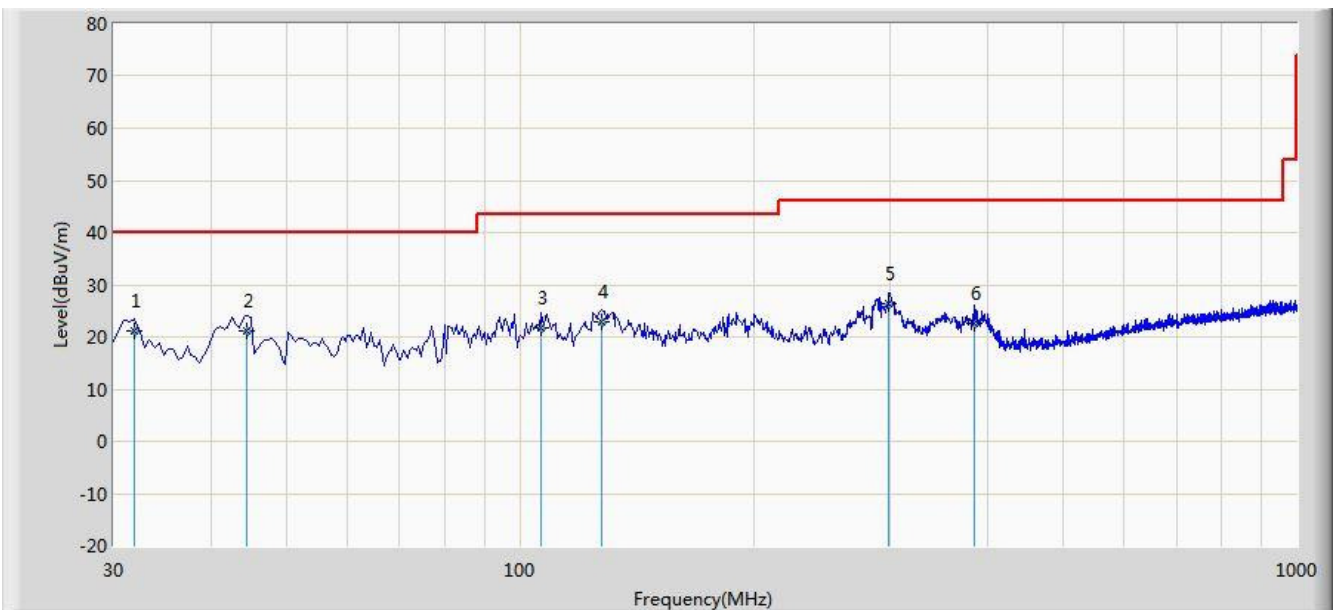


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	31.940	21.183	7.493	-18.817	40.000	13.690	QP
2			44.550	21.140	6.922	-18.860	40.000	14.218	QP
3			106.630	21.672	10.028	-21.828	43.500	11.644	QP
4			127.485	22.779	9.203	-20.721	43.500	13.576	QP
5			298.690	26.468	12.203	-19.532	46.000	14.265	QP
6			384.050	22.485	6.308	-23.515	46.000	16.177	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/11/19 - 18:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Jone Zhang
Probe: FMZB1519_0.009-30MHz	Polarity: Face On
EUT: element classic	Power: AC 120V/60Hz
Note: There is the ambient noise within frequency range 9kHz~30MHz.	

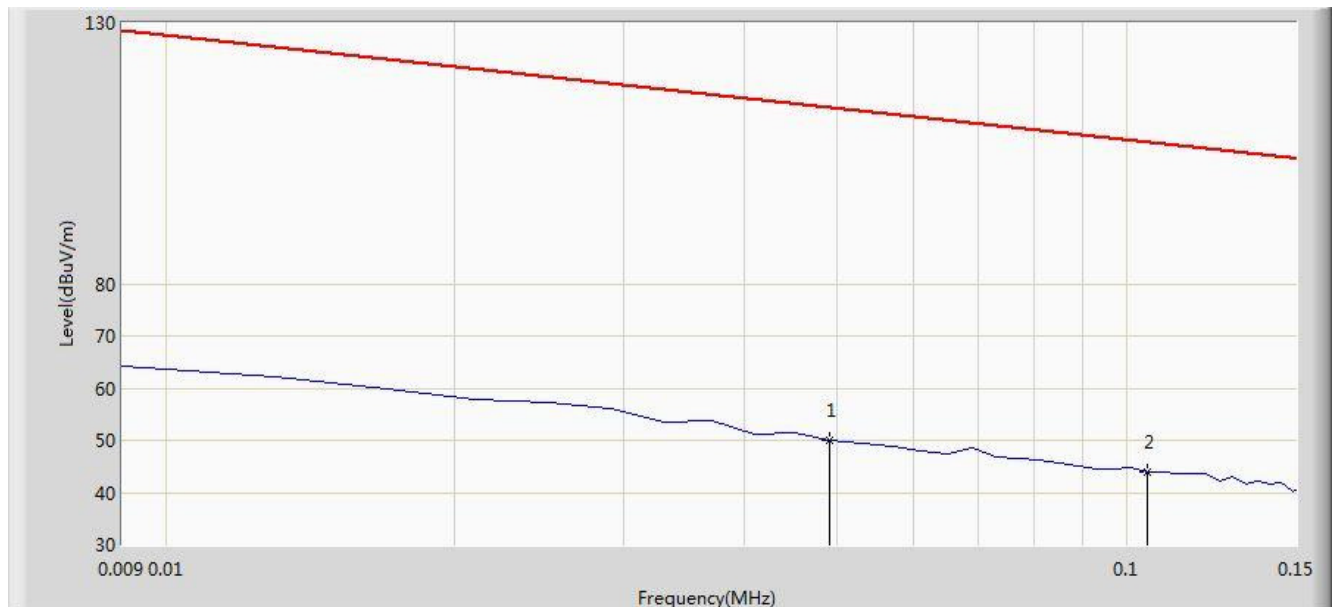


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			0.049	50.112	29.552	-63.677	113.789	20.560	AV
2		*	0.105	44.043	23.845	-63.130	107.173	20.198	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/11/19 - 18:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Jone Zhang
Probe: FMZB1519_0.009-30MHz	Polarity: Face On
EUT: element classic	Power: AC 120V/60Hz
Note: There is the ambient noise within frequency range 9kHz~30MHz.	

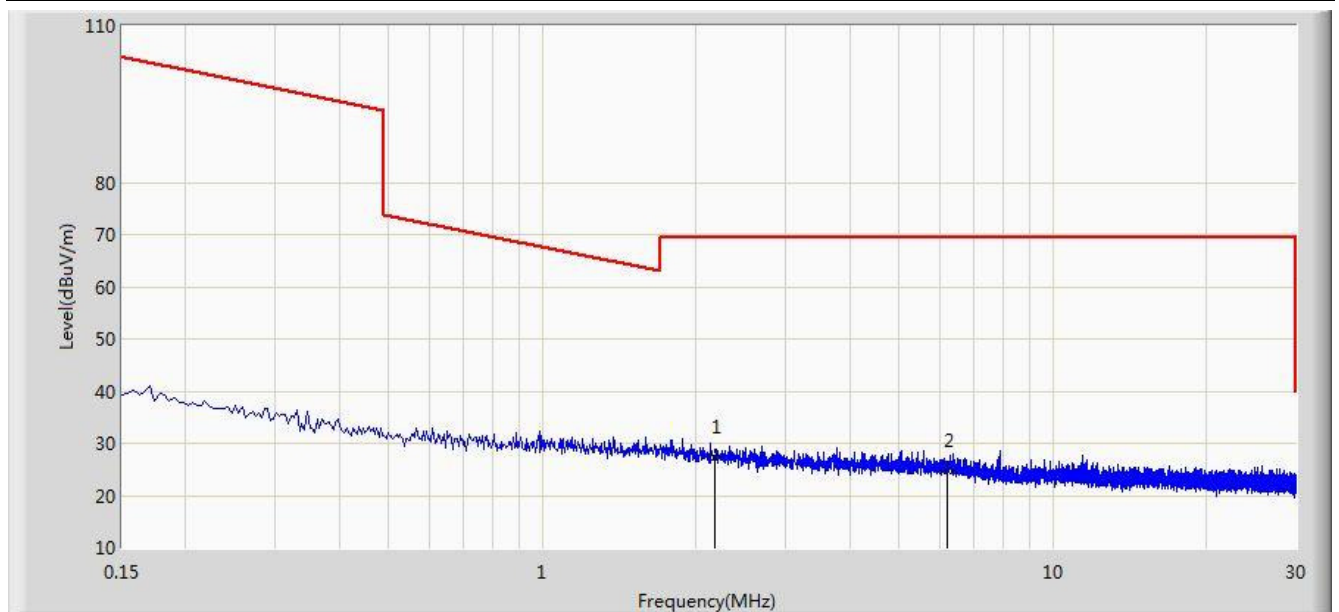


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2.175	27.371	6.960	-42.129	69.500	20.412	QP
2			6.216	24.786	4.701	-44.714	69.500	20.085	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/11/19 - 20:25
Limit: FCC_Part15.209_RE(1m)	Engineer: Jone Zhang
Probe: BBHA9170_18-40GHz	Polarity: Horizontal
EUT: element classic	Power: AC 120V/60Hz
Note: There is the ambient noise within frequency range 18GHz~25GHz.	

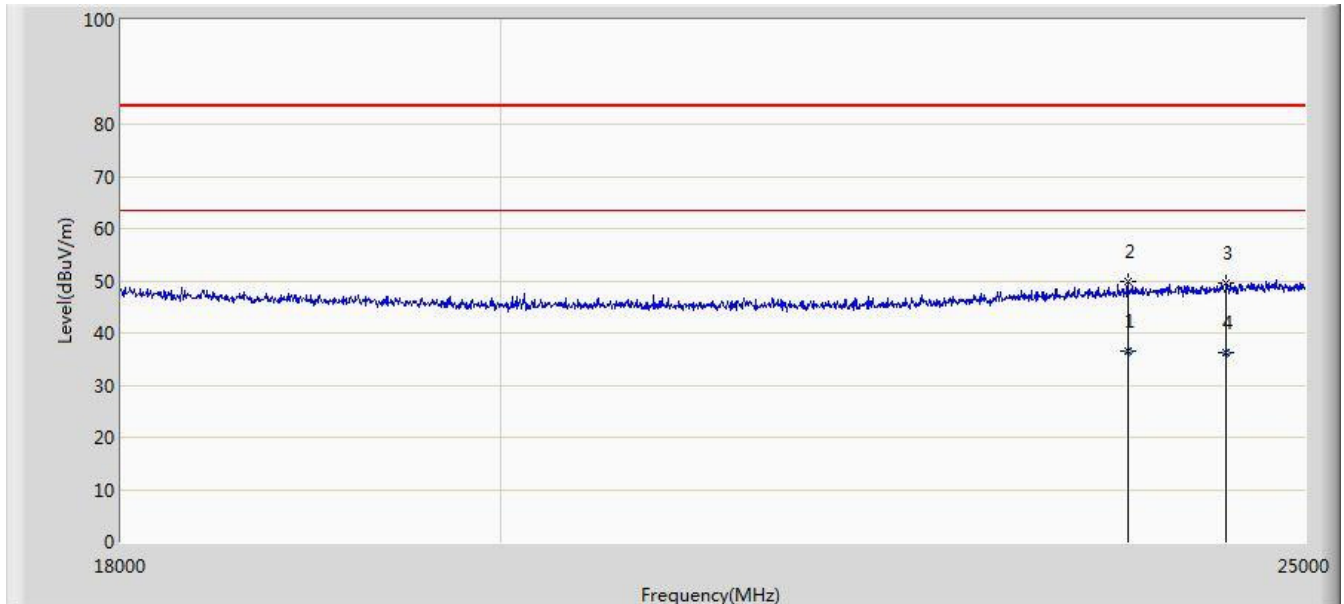


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	23801.230	36.485	26.440	-27.015	63.500	10.046	AV
2			23801.250	49.739	39.694	-33.761	83.500	10.046	PK
3			24464.250	49.669	38.787	-33.831	83.500	10.882	PK
4			24464.353	36.266	25.384	-27.234	63.500	10.882	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Limit@1m = 20*Log(500uV/m) + 20*Log(3m/1m) = 63.5dBμV/m (Average detector), and 83.5dBμV/m (Peak detector).

Site: AC1	Time: 2016/11/19 - 20:31
Limit: FCC_Part15.209_RE(1m)	Engineer: Jone Zhang
Probe: BBHA9170_18-40GHz	Polarity: Vertical
EUT: element classic	Power: AC 120V/60Hz
Note: There is the ambient noise within frequency range 18GHz~25GHz.	

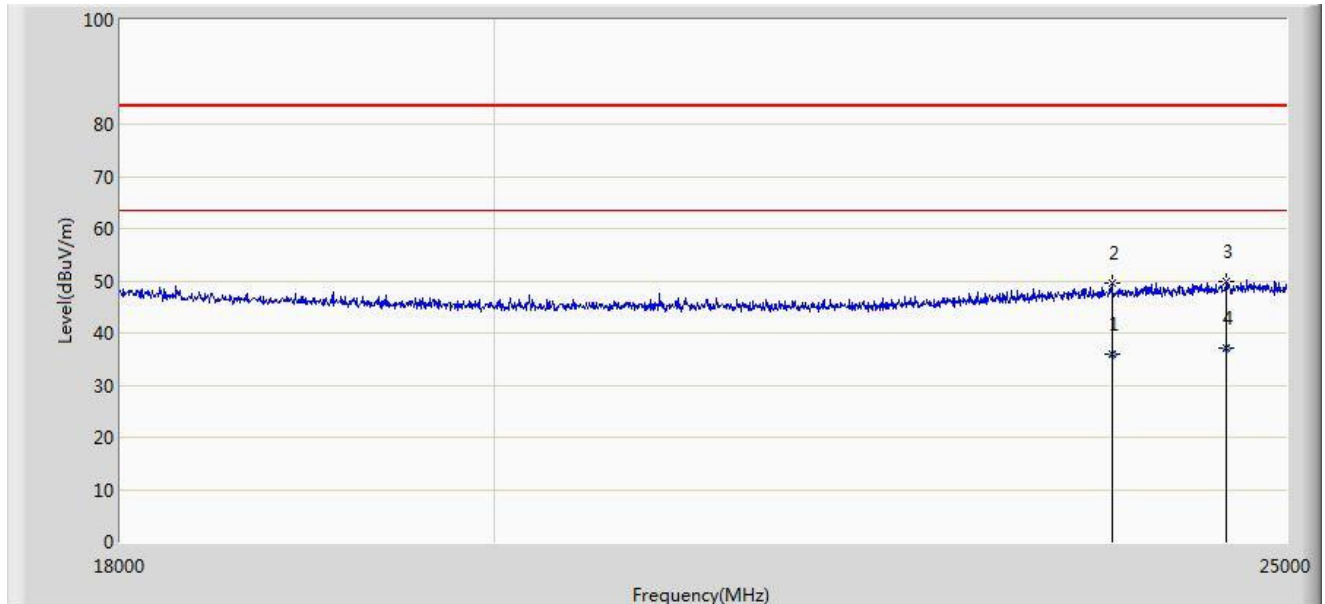

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			23801.000	35.826	25.780	-27.674	63.500	10.046	AV
2			23801.250	49.459	39.414	-34.041	83.500	10.046	PK
3			24583.250	49.919	39.005	-33.581	83.500	10.915	PK
4		*	24583.537	37.218	26.303	-26.282	63.500	10.916	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Limit@1m = 20*Log(500uV/m) + 20*Log(3m/1m) = 63.5dBμV/m (Average detector), and 83.5dBμV/m (Peak detector).

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Result

Site: AC1	Time: 2016/11/18 - 14:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Vince Yu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: element classic	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2405MHz	

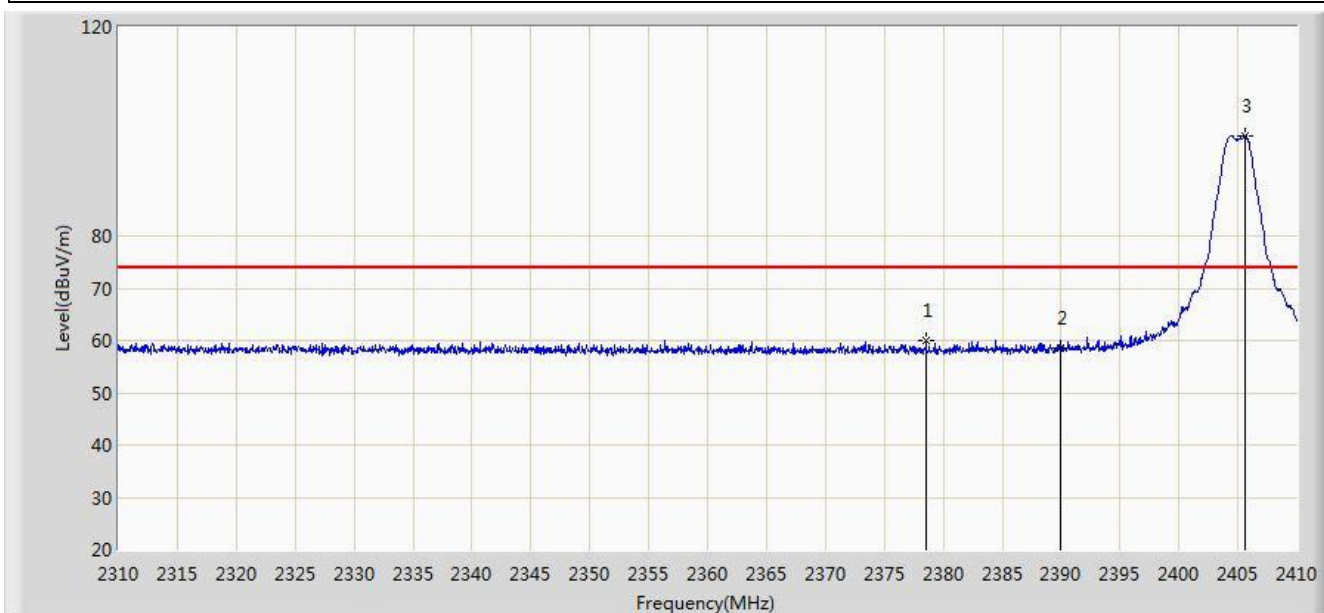


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2378.550	60.049	28.825	-13.951	74.000	31.224	PK
2			2390.000	58.528	27.325	-15.472	74.000	31.203	PK
3		*	2405.650	99.131	67.952	N/A	N/A	31.179	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/11/18 - 14:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Vince Yu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: element classic	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2405MHz	

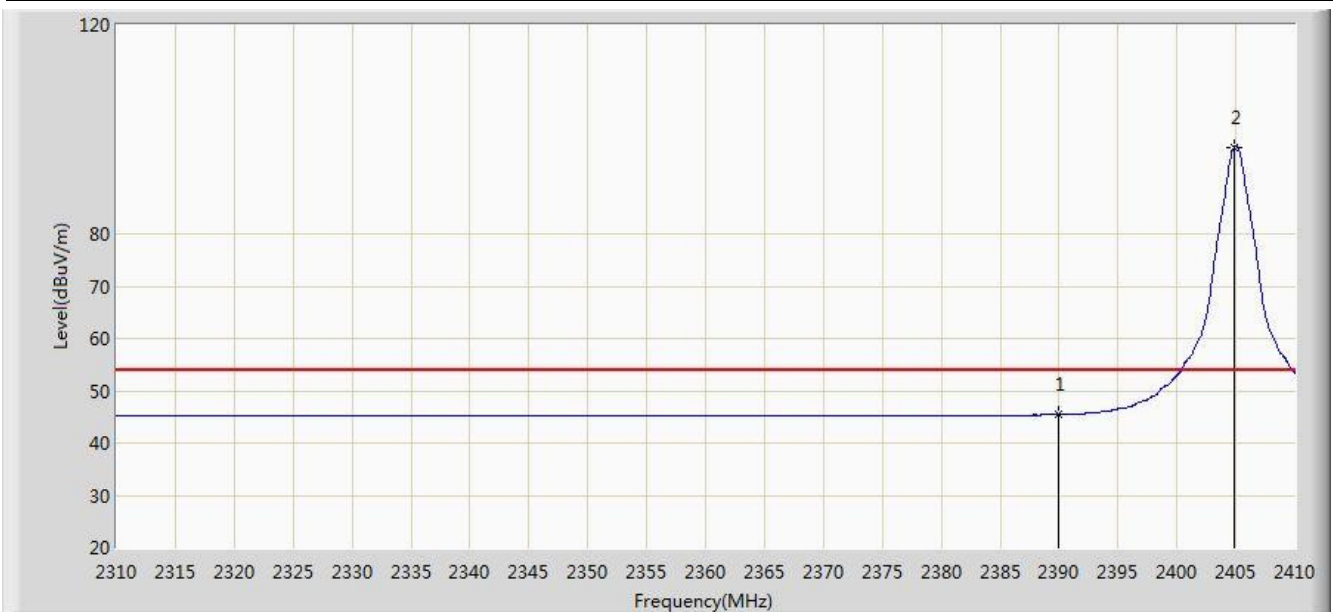


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.428	14.225	-8.572	54.000	31.203	AV
2		*	2404.850	96.624	65.444	N/A	N/A	31.180	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/11/18 - 14:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Vince Yu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: element classic	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2405MHz	

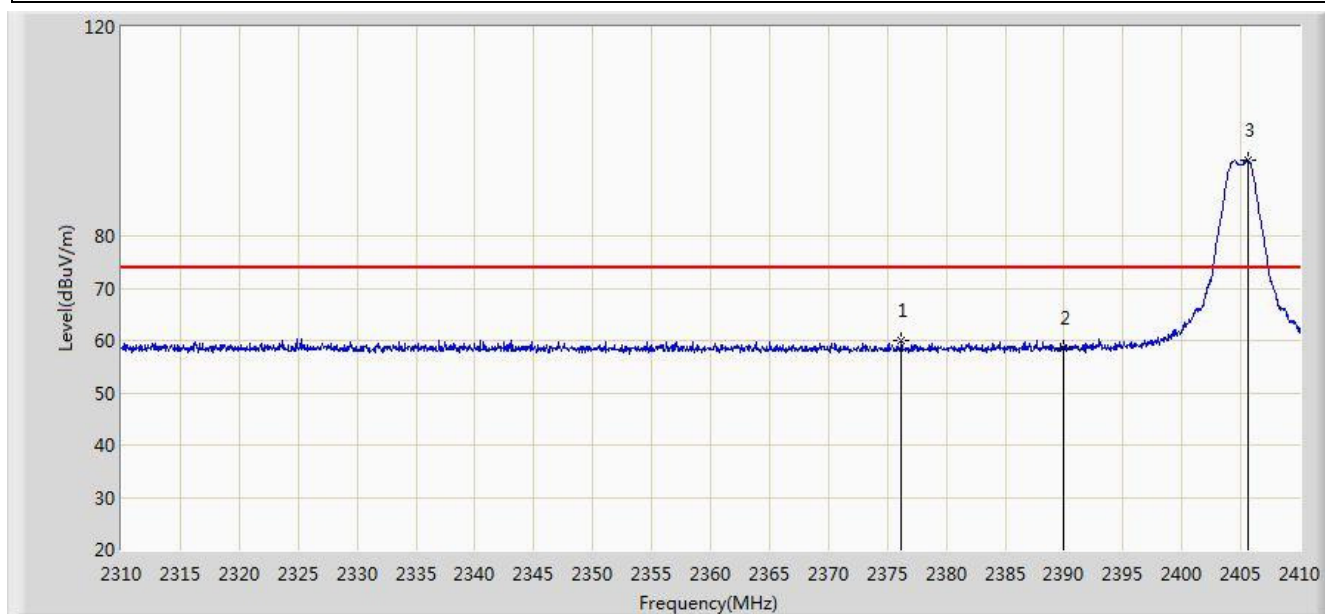


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2376.200	59.955	28.727	-14.045	74.000	31.228	PK
2			2390.000	58.573	27.370	-15.427	74.000	31.203	PK
3		*	2405.650	94.383	63.204	N/A	N/A	31.179	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/11/18 - 14:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Vince Yu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: element classic	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2405MHz	

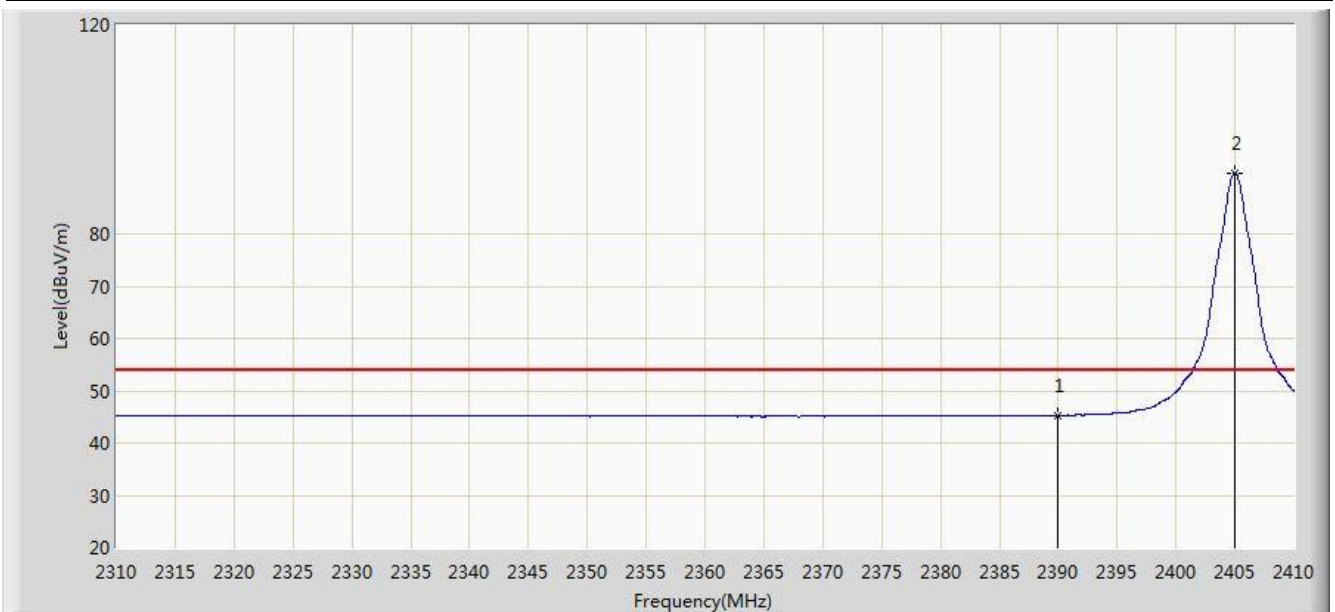


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	45.330	14.127	-8.670	54.000	31.203	AV
2		*	2405.000	91.585	60.405	N/A	N/A	31.180	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/11/18 - 14:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Vince Yu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: element classic	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2475MHz	

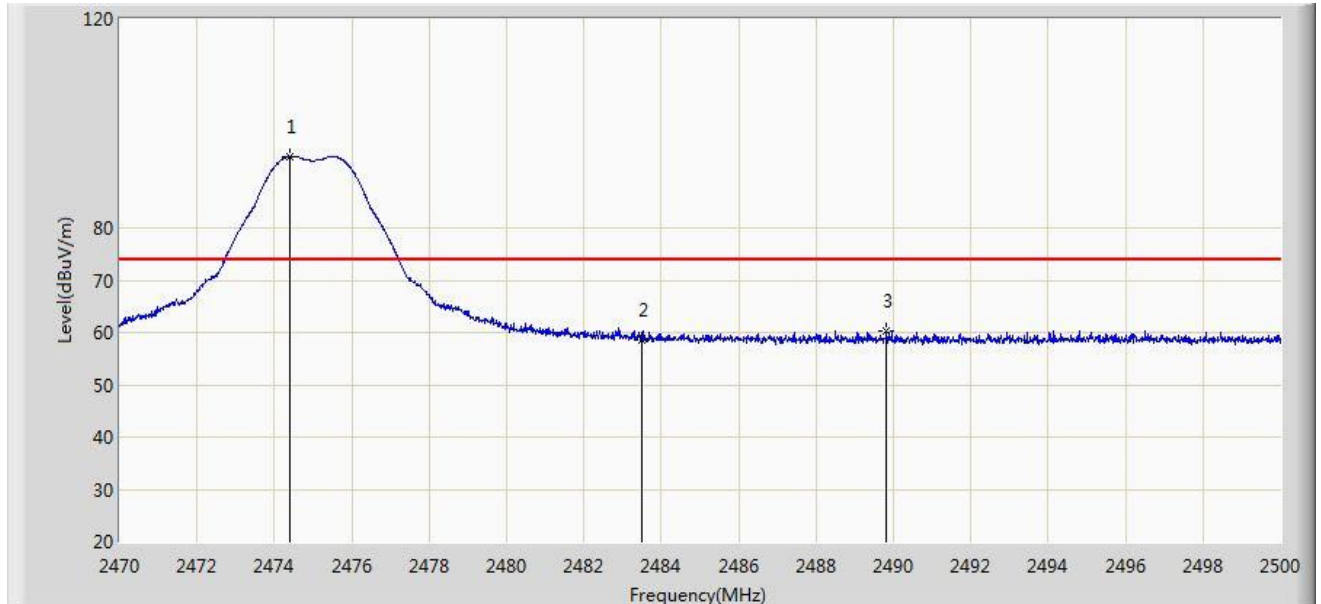


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2474.395	93.688	62.519	N/A	N/A	31.168	PK
2			2483.500	58.588	27.395	-15.412	74.000	31.194	PK
3			2489.830	60.434	29.224	-13.566	74.000	31.210	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/11/18 - 14:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Vince Yu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: element classic	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2475MHz	

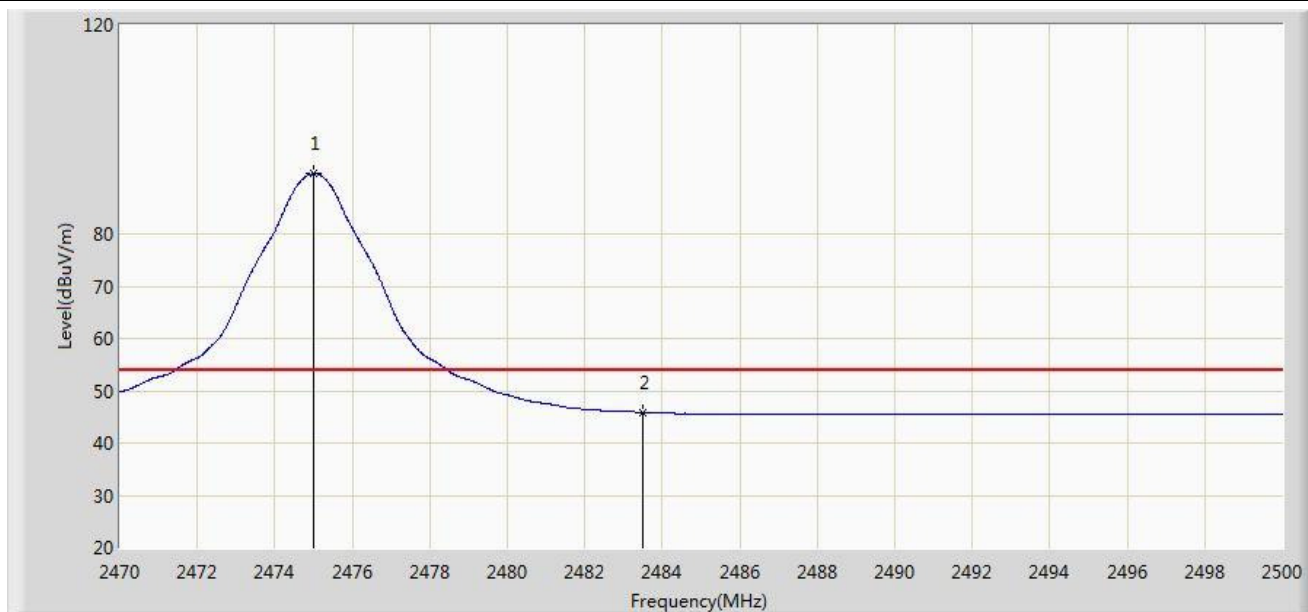


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2474.995	91.503	60.333	N/A	N/A	31.170	AV
2			2483.500	45.820	14.627	-8.180	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/11/18 - 14:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Vince Yu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: element classic	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2475MHz	

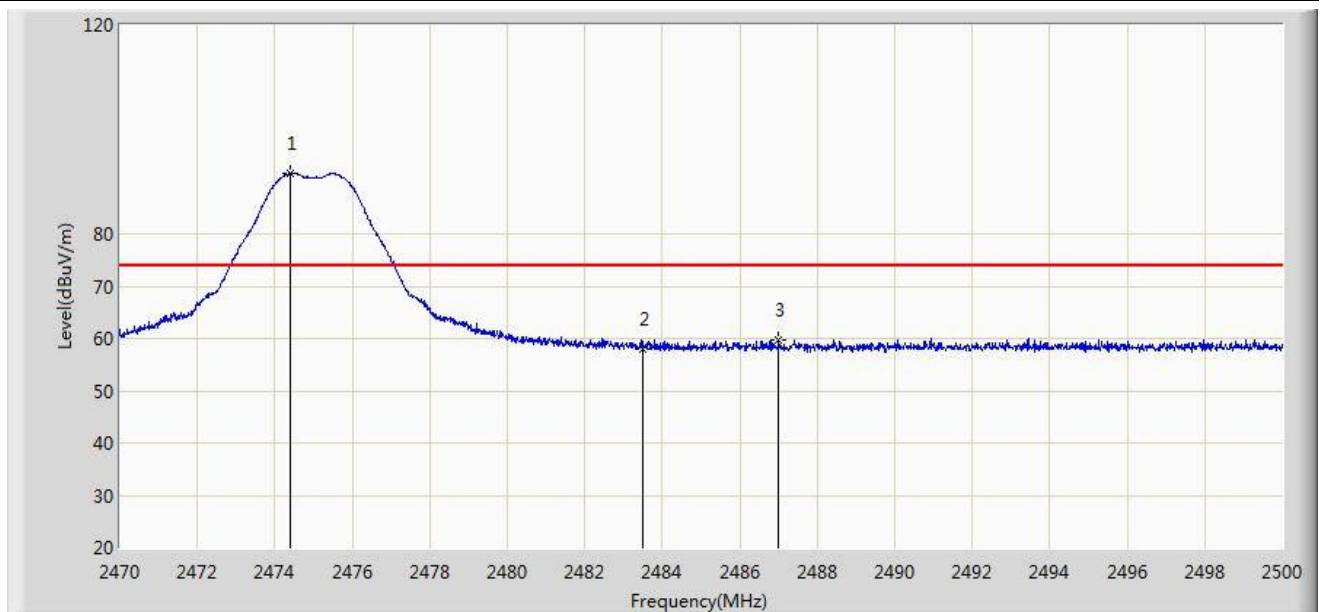


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2474.395	91.601	60.432	N/A	N/A	31.168	PK
2			2483.500	58.047	26.854	-15.953	74.000	31.194	PK
3			2487.010	59.806	28.603	-14.194	74.000	31.203	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/11/18 - 14:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Vince Yu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: element classic	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2475MHz	

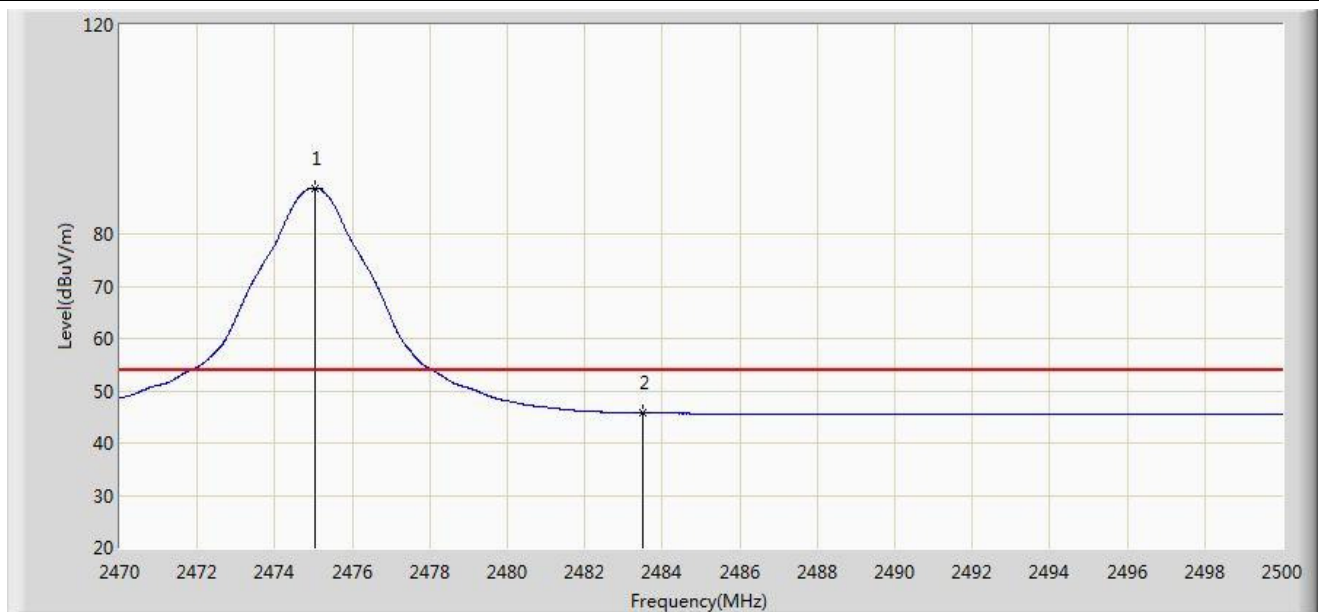


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2475.040	88.808	57.638	N/A	N/A	31.170	AV
2			2483.500	45.746	14.553	-8.254	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/11/22 - 18:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Vince Yu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: element classic	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2480MHz	

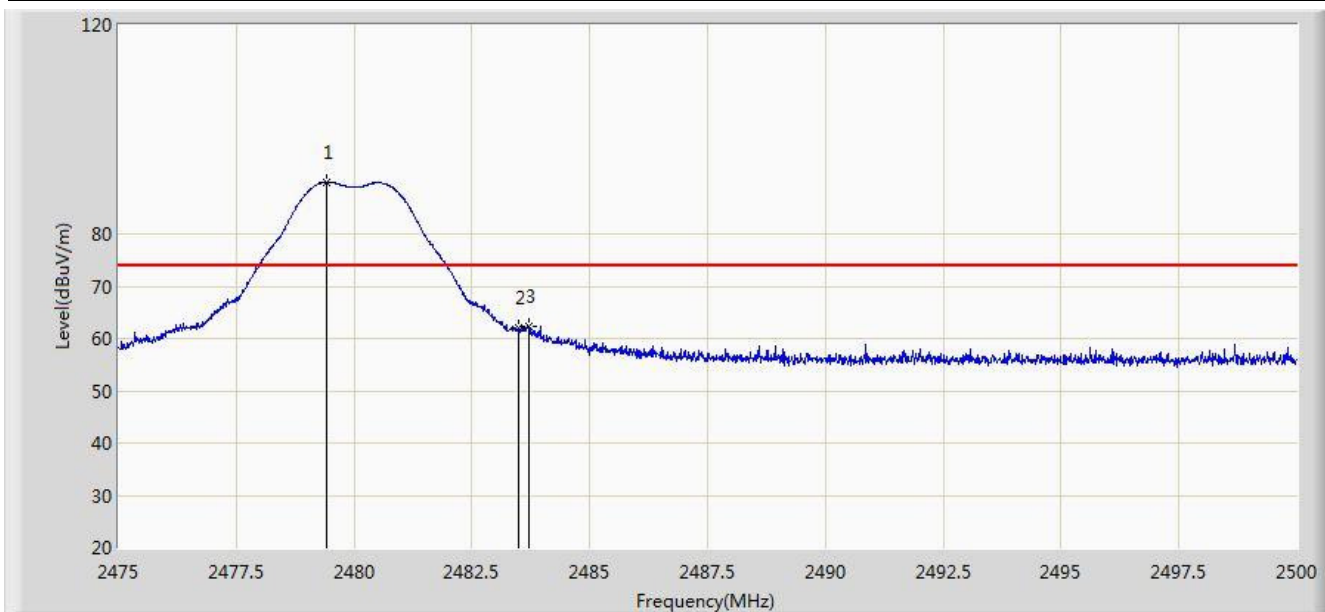


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.425	89.894	58.711	N/A	N/A	31.182	PK
2			2483.500	61.984	30.791	-12.016	74.000	31.194	PK
3			2483.712	62.397	31.203	-11.603	74.000	31.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/11/22 - 18:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Vince Yu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: element classic	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2480MHz	

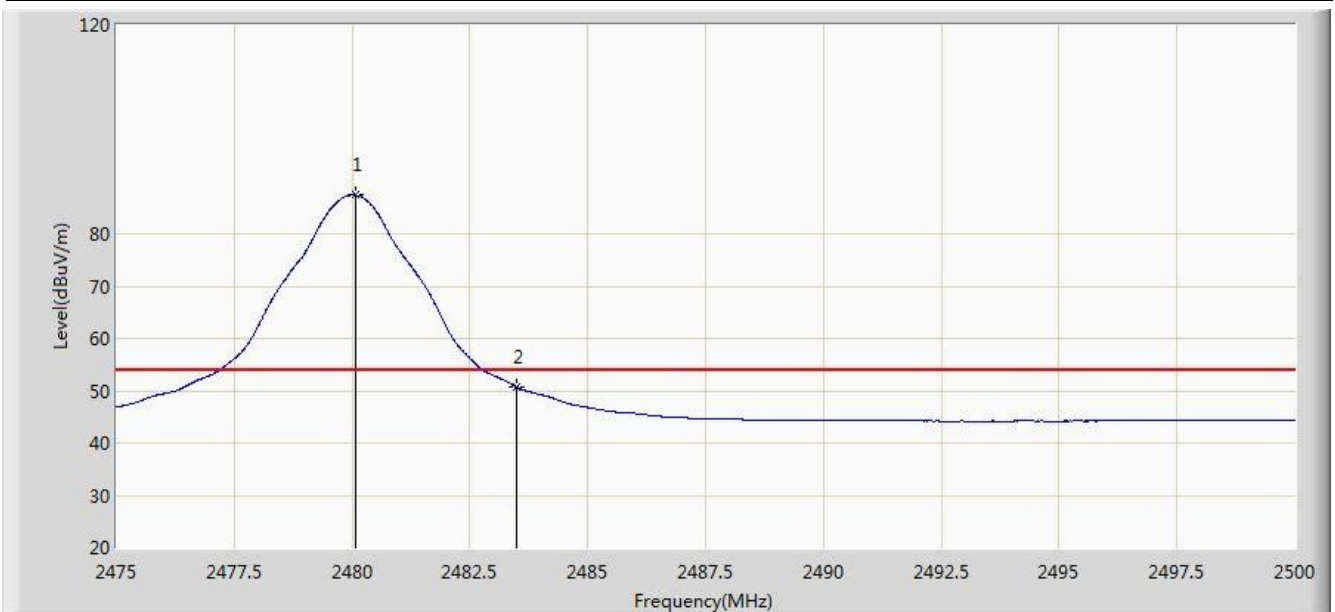


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.075	87.415	56.231	N/A	N/A	31.184	AV
2			2483.500	50.662	19.469	-3.338	54.000	31.194	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/11/22 - 19:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Vince Yu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: element classic	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2480MHz	

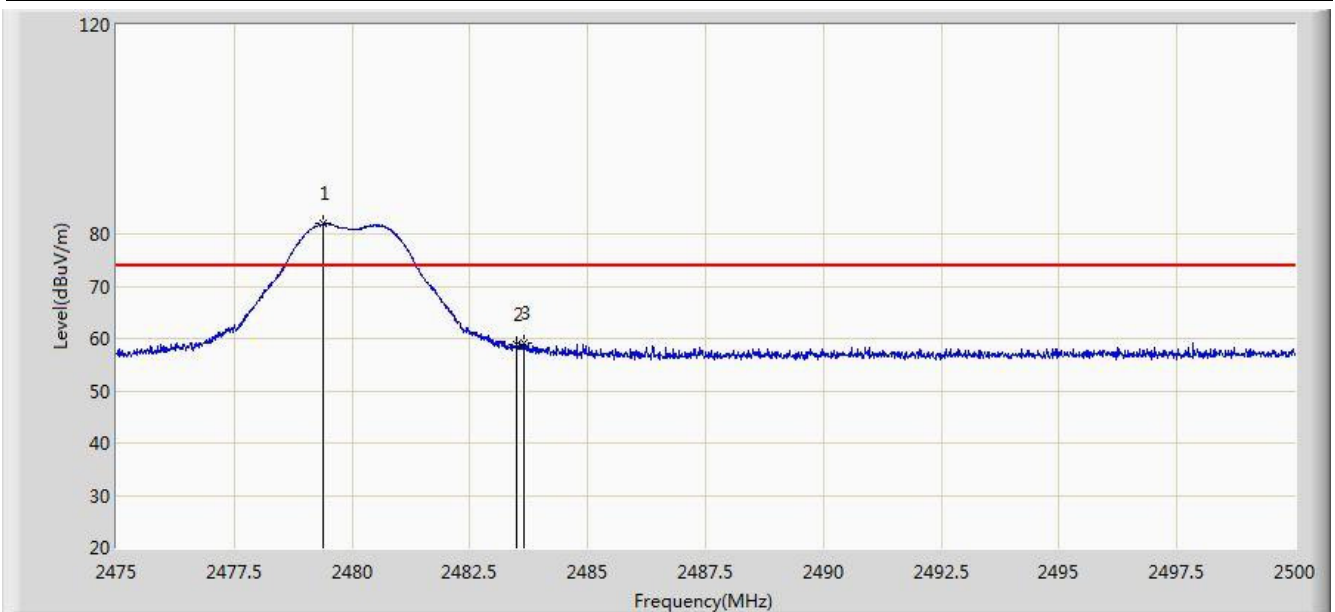


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.400	81.961	50.778	N/A	N/A	31.182	PK
2			2483.500	58.770	27.577	-15.230	74.000	31.194	PK
3			2483.637	59.089	27.895	-14.911	74.000	31.194	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/11/22 - 19:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Vince Yu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: element classic	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2480MHz	

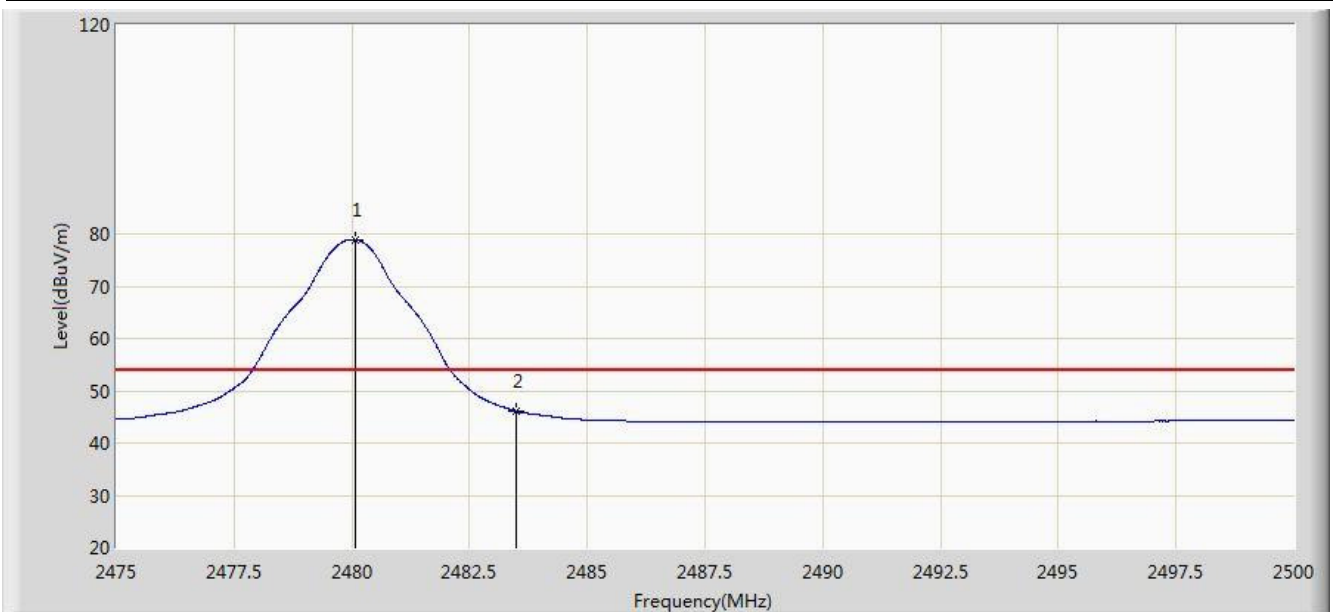

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.075	78.934	47.750	N/A	N/A	31.184	AV
2			2483.500	46.068	14.875	-7.932	54.000	31.194	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

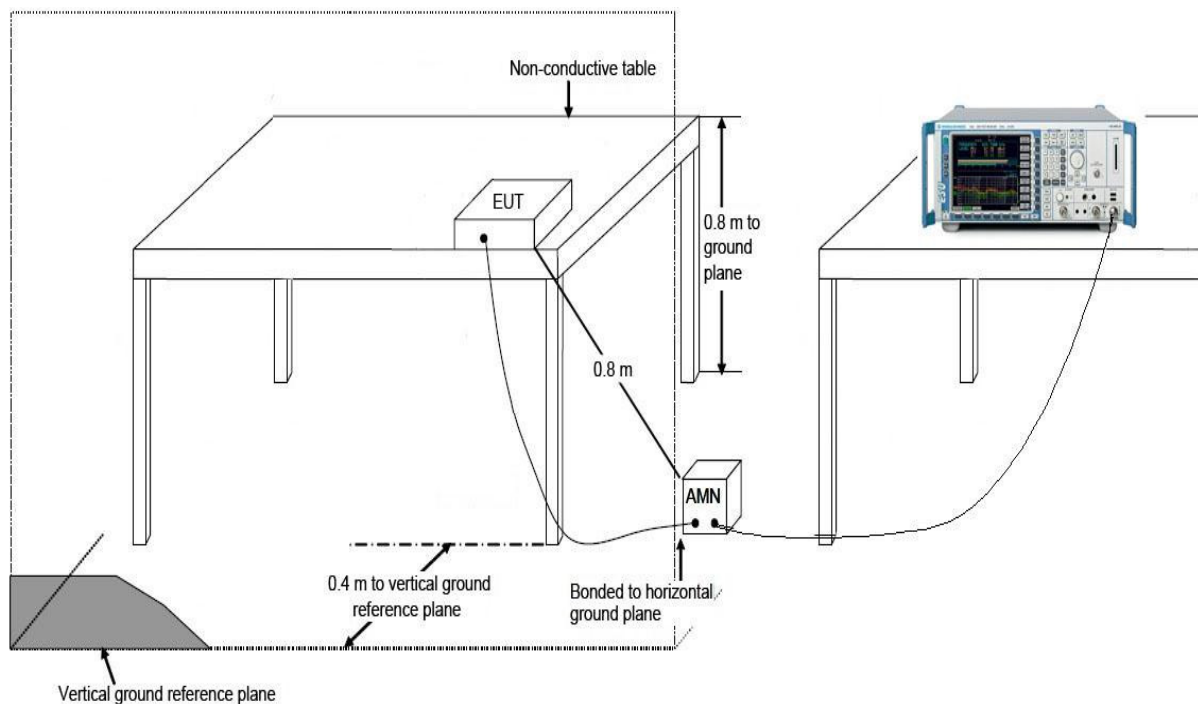

7.8.3. Test Result

Site: SR2	Time: 2016/11/29 - 14:05
Limit: FCC_Part15.207_CE_AC Power	Engineer: Roy Cheng
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: element classic	Power: AC 120V/60Hz
Note: Mode 1	

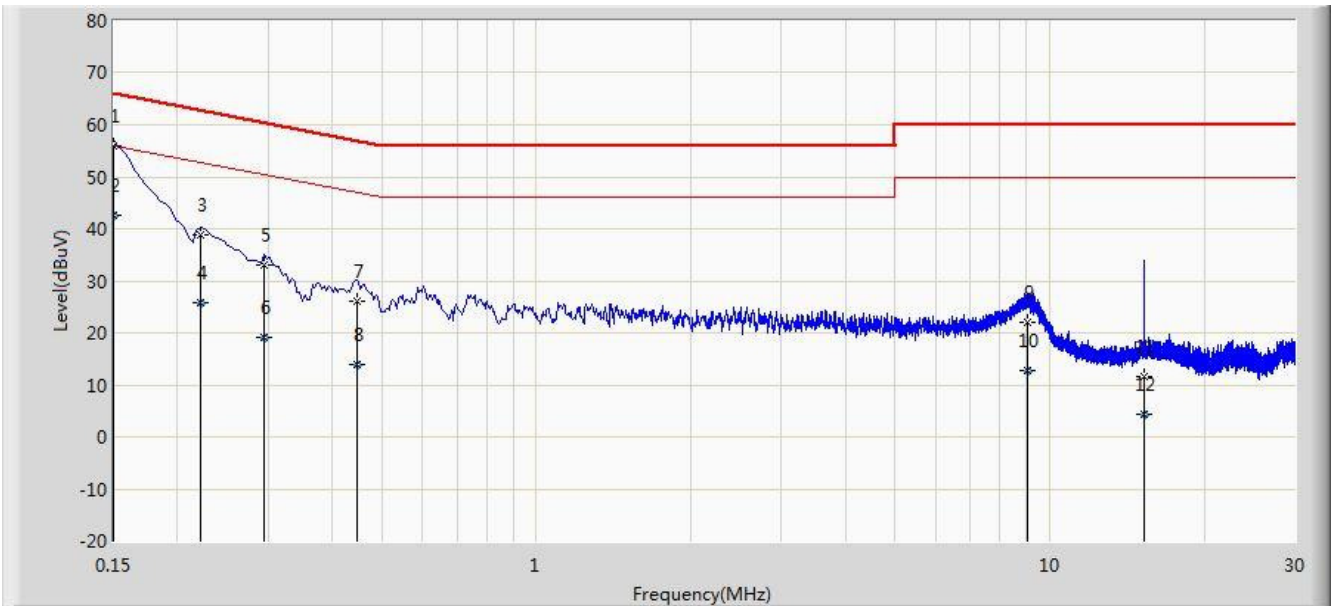


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.150	55.934	44.766	-10.066	66.000	11.168	QP
2			0.150	42.582	31.414	-13.418	56.000	11.168	AV
3			0.222	38.869	28.929	-23.874	62.744	9.941	QP
4			0.222	25.892	15.951	-26.852	52.744	9.941	AV
5			0.294	33.045	23.045	-27.366	60.411	9.999	QP
6			0.294	19.228	9.229	-31.182	50.411	9.999	AV
7			0.446	25.962	15.839	-30.987	56.949	10.123	QP
8			0.446	14.017	3.894	-32.933	46.949	10.123	AV
9			9.066	22.144	11.985	-37.856	60.000	10.159	QP
10			9.066	12.682	2.524	-37.318	50.000	10.159	AV
11			15.242	11.648	1.582	-48.352	60.000	10.066	QP
12			15.242	4.405	-5.661	-45.595	50.000	10.066	AV

Note: Measure Level (dBuV) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2016/11/29 - 14:13
Limit: FCC_Part15.207_CE_AC Power	Engineer: Roy Cheng
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: element classic	Power: AC 120V/60Hz
Note: Mode 1	

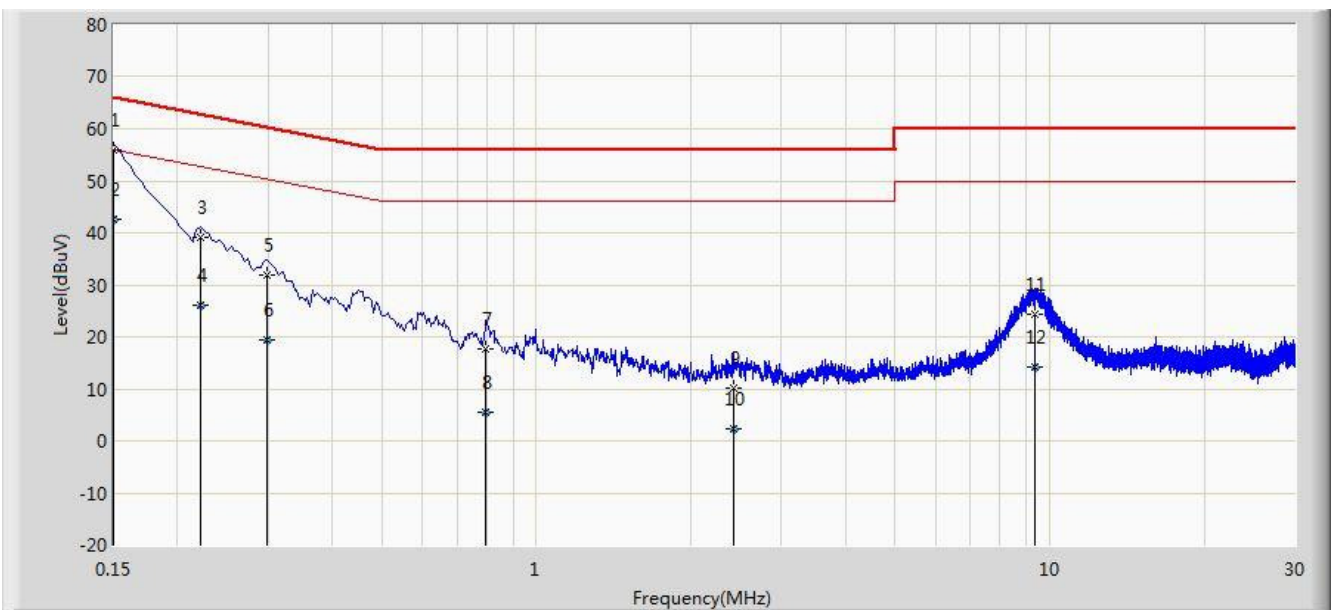

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.150	55.913	44.771	-10.087	66.000	11.142	QP
2			0.150	42.570	31.428	-13.430	56.000	11.142	AV
3			0.222	39.256	29.277	-23.487	62.744	9.980	QP
4			0.222	26.007	16.027	-26.737	52.744	9.980	AV
5			0.298	32.013	21.977	-28.285	60.298	10.036	QP
6			0.298	19.390	9.354	-30.909	50.298	10.036	AV
7			0.798	17.801	7.780	-38.199	56.000	10.020	QP
8			0.798	5.562	-4.458	-40.438	46.000	10.020	AV
9			2.422	10.039	0.176	-45.961	56.000	9.863	QP
10			2.422	2.250	-7.613	-43.750	46.000	9.863	AV
11			9.346	24.411	14.241	-35.589	60.000	10.170	QP
12			9.346	14.162	3.992	-35.838	50.000	10.170	AV

Note: Measure Level (dBuV) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **element classic FCC ID:**

2AGN8-E12N1X is in compliance with Part 15C of the FCC Rules and RSS-247 rules.

The End