

RFA-04-T118H1-70B150

Specifications



Frequency (MHz)	430-470 MHz
Peak gain	1.29 dBi
Average gain	-2.86 dBi
Efficiency	52.32 %
VSWR	3.0 : 1 Max.
Polarization	Linear, vertical
Impedance	50 Ω
Connector	IPEX
Cable / Length	$\varnothing$ 1.13 / L=150mm

Environment & Mechanical Characteristics

Temperature	- 10°C to +55°C
Humidity	95% @ 25°C




VSWR

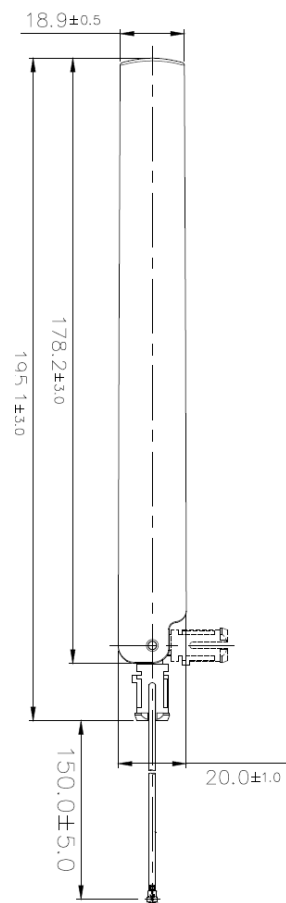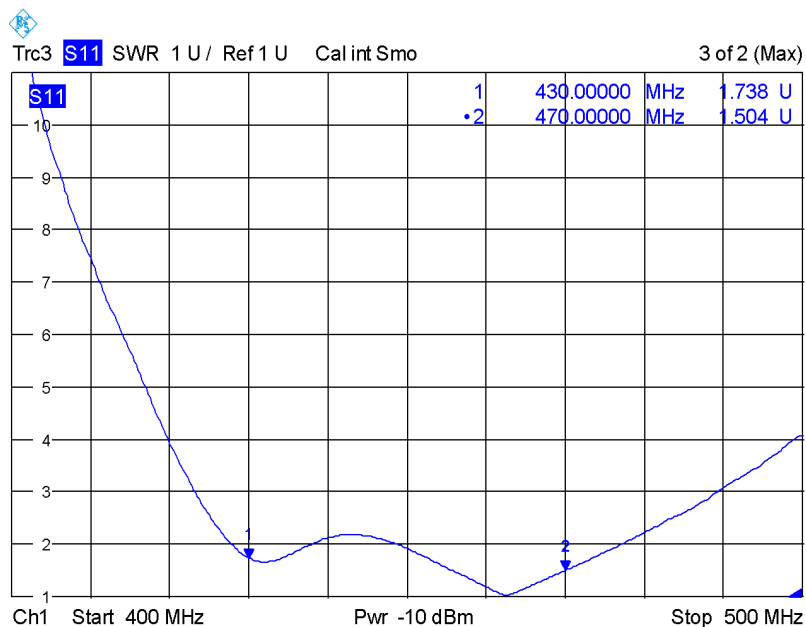


Radiation Pattern

XY

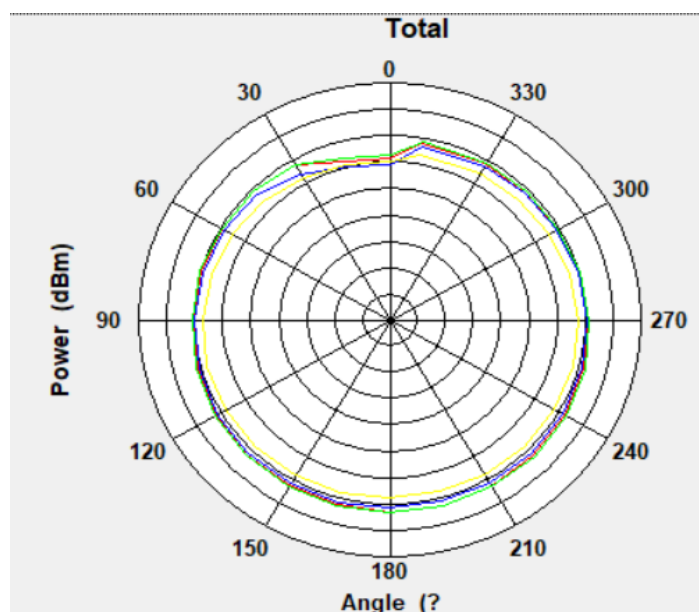

YZ

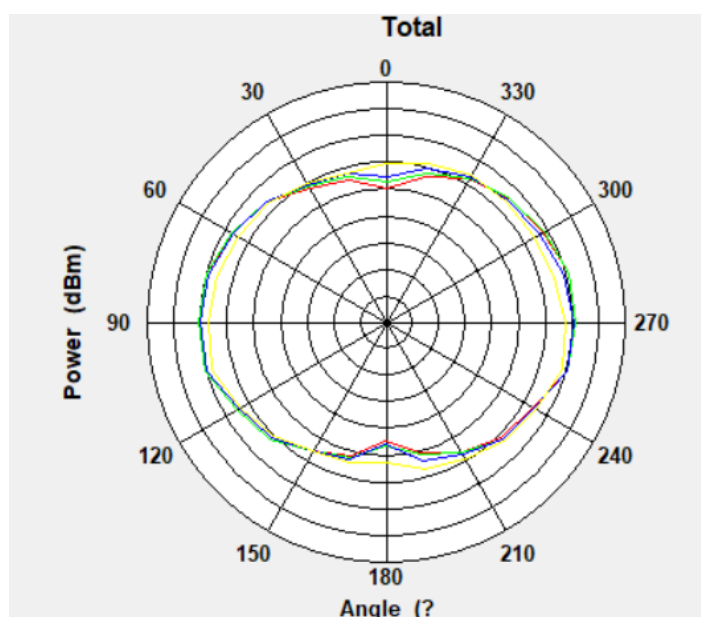

XZ

