

ELECTROMAGNETIC EMISSIONS **COMPLIANCE REPORT**



Applicant: Product Name:	Quanta Computer Inc. No. 188, Wenhua 2nd Road, Guishan District, Taoyuan City 33377, Taiwan Clover Mini
Brand Name:	clover
Model No.:	C302U
HVIN:	C302W
Model Difference:	N/A
Report Number:	E2/2021/60026
FCC ID	HFS-C302W
IC:	1787B-C302W
Issue Date:	August 6, 2021
Date of Test:	June 22, 2021 \sim July 8, 2021
Date of EUT Received:	June 10, 2021

Approved By ALW HSieh

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Central RF Lab The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT comply with FCC rule part §15.247, ISED RSS-247.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemniinformation contained by a subject to terms and contained in the contained area of the contained area of this document is advised that information contained here on reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Revision History						
Report Number	Revision	Description	Issue Date	Revised By		
E2/2021/60026	00	Original	August 6, 2021	Susan Lin		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	9
4	DESCRIPTION OF TEST MODES	10
5	MEASUREMENT UNCERTAINTY	12
6	CONDUCTED EMISSION TEST	13
7	PEAK OUTPUT POWER MEASUREMENT	17
8	EMISSION BANDWIDTH MEASUREMENT	20
9	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	26
10	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	32
11	FREQUENCY SEPARATION	69
12	NUMBER OF HOPPING FREQUENCY	71
13	TIME OF OCCUPANCY (DWELL TIME)	73
14	ANTENNA REQUIREMENT	79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



GENERAL INFORMATION 1

1.1 **Product Description**

Product Name:	Clover Mini
Brand Name:	clover
Model No.:	C302U
HVIN:	C302W
Model Difference:	N/A
Hardware Version:	C302W
Firmware Version:	N/A
EUT Series No.:	PJ216092003
Power Supply:	12V from AC/DC Adapter

1.2 **RF Specification**

Radio Technology:	BT BR+EDR
Channel number:	79 channels
Modulation type:	GFSK + π/4DQPSK + 8DPSK
Transmit Power:	2.25 dBm
Frequency Range:	2.402GHz – 2.480GHz
Dwell Time:	\leq 0.4s

1.3 Antenna Designation

Antenna Type	Supplier	Antenna Part No.	Freq. (MHz)	Peak Antenna Gain (dBi)	Worst Antenna Gain
PIFA	SAA	GD9321-15-001-R	2402~2480	-0.20	
	Luxshare-ICT	LA81FP018-1H	2402~2480	0.9	V

Note:

1. Pre-scanned was done on the above antennas, measurements were demonstrated by using the antenna with the highest gain as the worst case scenarios.

2. Antenna information is provided by the applicant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



1.4 **Test Methodology of Applied Standards**

FCC Part 15, Subpart C §15.247 FCC KDB 558074 D01 15.247 Meas. Guidance v05r02 RSS-247 issue 2 Feb. 2017 RSS-Gen. issue 5 ANSI C63.10:2013

1.5 Test Facility

Laboratory	Test Site Address	Test Site Name	FCC Designa- tion number	IC CAB identifier
		SAC 1		
		SAC 3		
		Conduction 1		
	No.134, Wu Kung Road, New Taipei	Conducted 1		
	Industrial Park, Wuku District, New	Conducted 2	TW0027	TW3702
	Taipei City, Taiwan.	Conducted 3		
		Conducted 4	-	
		Conducted 5		
CCP Taiwan Ltd		Conducted 6		
SGS Taiwan Ltd. Central RF Lab.		Conduction A	- 	
(TAF code 3702)		SAC C		
$(1AI \ COUE \ 5702)$		SAC D		
		SAC G		
	No.2, Keji 1st Rd., Guishan District,	Conducted A		
	Taoyuan City, Taiwan 333	Conducted B		
	labydan City, Talwan 555	Conducted C		
		Conducted D		
		Conducted E		
		Conducted F		
		Conducted G		

Note: Test site name is remarked on the equipment list in each section of this report as an indication where measurements occurred in specific test site and address.

1.6 **Special Accessories**

There is no special accessory used while test was conducted.

1.7 **Equipment Modifications**

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemniincluding to the second of the second devices of the second device



2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Conducted Test (RF)

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

2.3.3 Radiated Emissions

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



2.4 Measurement Results Explanation Example

2.4.1 Radiated Emission Test Sites For Measurements From 9 kHz To 30 MHz

Radiated emission below 30MHz is measured in a 9m*9m*6m semi-ane choic chamber, the measurements correspond to those obtained at an open-field test site.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

2.4.2 For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: E2/2021/60026 Page: 8 of 79

2.5 **Configuration of Tested System** Fig. 2-1 Conduction (AC Power Line) & **Radiated Emission**




Fig. 2-2 Conducted (Antenna Port) Configuration



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2.	Notebook	Lenovo	T420	S0012599	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



SUMMARY OF TEST RESULTS 3

FCC Rules	IC Rules	s Description Of Test	
§15.207(a)	RSS-Gen §8.8	AC Power Line Conducted Emission	Compliant
§15.247(b)(1)	RSS-247 §5.4 b	Peak Output Power	Compliant
§15.247(a)(1)	RSS-247 §5.1 b RSS-Gen §6.7	Emission Bandwidth	Compliant
§15.205 §15.209 §15.247(d)	RSS-247 §5.5 RSS-Gen §8.9 RSS-Gen §8.10	Conducted & Radiated Band Edge and Spurious Emission	Compliant
§15.247(a)(1)	RSS-247 §5.1 b	Frequency Separation	Compliant
§15.247(a)(1)(iii)	RSS-247 §5.1 d	Number of hopping frequency Time of Occupancy	Compliant
§15.203	N/A	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



DESCRIPTION OF TEST MODES 4

4.1 Operated in 2400 ~ 2483.5MHz Band

79 channels are provided for Bluetooth

ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY
1	2402 MHz	21	2422 MHz	41	2442 MHz	71	2462 MHz
2	2403 MHz	22	2423 MHz	42	2443 MHz	72	2463 MHz
3	2404 MHz	23	2424 MHz	43	2444 MHz	73	2464 MHz
4	2405 MHz	24	2425 MHz	44	2445 MHz	74	2465 MHz
5	2406 MHz	25	2426 MHz	45	2446 MHz	75	2466 MHz
6	2407 MHz	26	2427 MHz	46	2447 MHz	76	2467 MHz
7	2408 MHz	27	2428 MHz	47	2448 MHz	77	2468 MHz
8	2409 MHz	28	2429 MHz	48	2449 MHz	78	2469 MHz
9	2410 MHz	29	2430 MHz	49	2450 MHz	79	2470 MHz
10	2411 MHz	30	2431 MHz	50	2451 MHz	70	2471 MHz
11	2412 MHz	31	2432 MHz	51	2452 MHz	71	2472 MHz
12	2413 MHz	32	2433 MHz	52	2453 MHz	72	2473 MHz
13	2414 MHz	33	2434 MHz	53	2454 MHz	73	2474 MHz
14	2415 MHz	34	2435 MHz	54	2455 MHz	74	2475 MHz
15	2416 MHz	35	2436 MHz	55	2456 MHz	75	2476 MHz
16	2417 MHz	36	2437 MHz	56	2457 MHz	76	2477 MHz
17	2418 MHz	37	2438 MHz	57	2458 MHz	77	2478 MHz
18	2419 MHz	38	2439 MHz	58	2459 MHz	78	2479 MHz
19	2420 MHz	39	2440 MHz	59	2460 MHz	79	2480 MHz
20	2421 MHz	40	2441 MHz	60	2461 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



4.2 The Worst Test Modes and Channel Details

- 1 The EUT has been tested under operating condition.
- Test program used to control the EUT for staying in continuous transmitting and receiving 2 mode is programmed.
- Investigation has been done on all the possible configurations for searching the worst case. 3

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE		
	RADIATED EMISSION TEST (BELOW 1 GHz)					
Bluetooth	0 to 78	39	GFSK/8-DPSK	DH5/3DH5		
	RADIATED EMISSION TEST (ABOVE 1 GHz)					
Bluetooth	0 to 78	0,39,78	GFSK/8-DPSK	DH5/3DH5		

Note: The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for channel Low, Mid and High, the worst case position was reported.

ANTNNA PORT CONDUCTED TEST							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE			
	Peak Output Power, 20dB Band Width						
	0 to 78	0,39,78	GFSK	DH5			
Bluetooth	0 to 78	0,39,78	π/4-DQPSK	2DH5			
	0 to 78	0,39,78	8-DPSK	3DH5			
	Band Edge						
Bluetooth	0 to 78	0,78	GFSK/8-DPSK	DH5/3DH5			
		Frequency Separation					
Bluetooth	0 to 78	0,1,2,38,39,40,76,77,78	GFSK/8-DPSK	DH5/3DH5			
	Ν	lumber of hopping freque	ncy				
Bluetooth	0 to 78	0 to 78	GFSK/8-DPSK	DH5/3DH5			
	Time of Occupancy(Dwell time)						
			GFSK	DH1/DH3/DH5			
Bluetooth	ooth 0 to 78 0,39,78	0,39,78	π/4-DQPSK	2DH1/2DH3/2DH5			
			8-DPSK	3DH1/3DH3/3DH5			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



MEASUREMENT UNCERTAINTY 5

Test Items	ι	Incertair	nty
AC Power Line Conducted Emission	+/-	2.34	dB
Peak Output Power	+/-	1	dB
Emission Bandwidth	+/-	1.53	Hz
100 kHz Bandwidth Of Frequency Band Edges	+/-	1.69	dB
Frequency Separation	+/-	1.53	Hz
Number of hopping frequency	+/-	1.53	Hz
Time of Occupancy	+/-	1.53	Hz
Temperature	+/-	0.4	°C
Humidity		3.5	%
DC / AC Power Source	+/-	1	%

Radiated Spurious Emission Measurement Uncertainty					
	+/-	2.64	dB	9kHz~30MHz	
Polarization: Vertical	+/-	4.93	dB	30MHz - 1000MHz	
	+/-	4.81	dB	1GHz - 18GHz	
	+/-	4.52	dB	18GHz - 40GHz	
	+/-	2.64	dB	9kHz~30MHz	
Polarization: Horizontal	+/-	4.45	dB	30MHz - 1000MHz	
	+/-	4.81	dB	1GHz - 18GHz	
	+/-	4.52	dB	18GHz - 40GHz	

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



CONDUCTED EMISSION TEST 6

6.1 **Standard Applicable**

Frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

_	Limits				
Frequency range	dB(uV)				
MHz	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60 50				

Note

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

6.2 **Measurement Equipment Used**

Radiated Emission Test Site: Conduction A						
EQUIPMENT TYPE			SERIAL NUMBER	LAST CAL.	CAL DUE.	
Test Software	audix	e3	Ver. 6.11- 20180419c	N.C.R	N.C.R	
LISN	SCHWARZBECK Mess-Elektronik	NSLK8127	973	03/25/2021	03/24/2022	
EMI Test Receiver	R&S	ESCI	101342	04/27/2021	04/26/2022	
Coaxial Cable	EC Lab	RF-HY-CAB-250	RF-HY-CAB- 250-01	03/27/2021	03/26/2022	
Pulse Limiter	EC Lab	VTSD 9561F-N	485	03/27/2021	03/26/2022	

EUT Setup 6.3


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnielectronic format documents, subject to 1 terms and Conditions for Electronic Documents at http://www.sgs.com.tw/1 erms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



6.4 Test SET-UP (Block Diagram of Configuration)

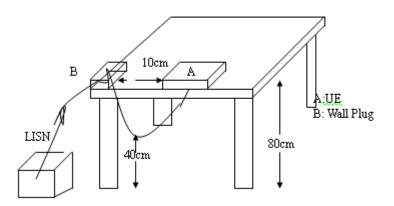

6.5 **Measurement Procedure**

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

6.6 **Measurement Result**

Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemniincluding to the second of the second devices of the second device



AC POWER LINE CONDUCTED EMISSION TEST DATA

Report Number	:E2-2021-60026	Test Site	:Conduction Room C
Test Mode	:BT	Test Date	:2021-06-28
Power	:120V/60Hz	Temp./Humi.	:25.4/52
Probe	:L1	Engineer	:Jack Tseng
Note:	: Adapter:FSP040-RHBN2		

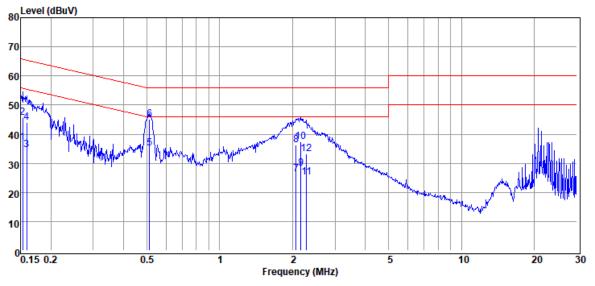


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV	dBµV	dB
0.15	Average	26.78	10.22	37.00	55.82	-18.82
0.15	QP	35.46	10.22	45.68	65.82	-20.14
0.16	Average	24.33	10.22	34.55	55.52	-20.97
0.16	QP	33.78	10.22	44.00	65.52	-21.52
0.51	Average	24.79	10.31	35.10	46.00	-10.90
0.51	QP	34.70	10.31	45.01	56.00	-10.99
2.07	Average	15.78	10.45	26.23	46.00	-19.77
2.07	QP	25.87	10.45	36.32	56.00	-19.68
2.17	Average	17.89	10.45	28.34	46.00	-17.66
2.17	QP	26.87	10.45	37.32	56.00	-18.68
2.29	Average	14.80	10.46	25.26	46.00	-20.74
2.29	QP	22.78	10.46	33.24	56.00	-22.76

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report Number	:E2-2021-60026	Test Site	:Conduction Room C
Test Mode	:BT	Test Date	:2021-06-28
Power	:120V/60Hz	Temp./Humi.	:25.4/52
Probe	:N	Engineer	:Jack Tseng
Note:	: Adapter:FSP040-RHBN2		

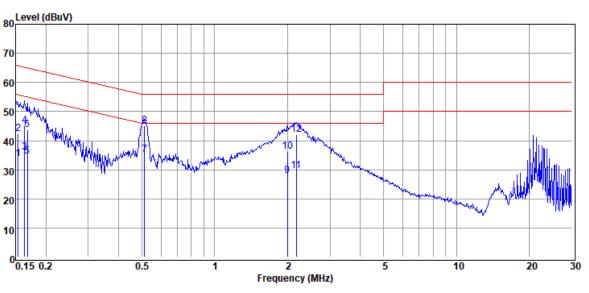

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV	dBµV	dB
0.15	Average	23.46	10.21	33.67	55.78	-22.11
0.15	QP	32.13	10.21	42.34	65.78	-23.44
0.16	Average	25.88	10.21	36.09	55.30	-19.21
0.16	QP	34.85	10.21	45.06	65.30	-20.24
0.17	Average	24.41	10.21	34.62	55.08	-20.46
0.17	QP	33.64	10.21	43.85	65.08	-21.23
0.51	Average	24.83	10.32	35.15	46.00	-10.85
0.51	QP	34.89	10.32	45.21	56.00	-10.79
2.00	Average	17.46	10.45	27.91	46.00	-18.09
2.00	QP	25.88	10.45	36.33	56.00	-19.67
2.17	Average	18.53	11.13	29.66	46.00	-16.34
2.17	QP	30.90	11.13	42.03	56.00	-13.97

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



7 PEAK OUTPUT POWER MEASUREMENT

7.1 Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: The Limit: 0.125 Watts. The power limit for 1Mbps is 1watt, and 2Mbps, 3Mbps and AFH mode are 0.125 watts. The e i r p, shall not exceed 4 W

The e.i.r.p.	shall	not e	exceed	4	W
--------------	-------	-------	--------	---	---

Conducted Emission Test Site: Conducted G						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
Spectrum Analyzer	KEYSIGHT	N9010B	MY59071570	06/01/2021	05/31/2022	
Attenuator	Marvelous	WATT-218FS- 10	RF16	11/19/2020	11/18/2021	
DC Block	PASTERNACK	PE8210	RF154	11/19/2020	11/18/2021	
Power Meter	Anritsu	ML2496A	1326001	08/05/2020	08/04/2021	
Power Sensor	Anritsu	MA2411B	1315048	08/05/2020	08/04/2021	
Power Sensor	Anritsu	MA2411B	1315049	08/05/2020	08/04/2021	
Attenuator	Marvelous	MVE2213-10	RF12	11/19/2020	11/18/2021	
Attenuator	Marvelous	WATT-218FS- 10	RF18	11/19/2020	11/18/2021	

7.2 Measurement Equipment Used

7.3 Test Set-up:

EUT	enuator Power Sensor	Power Meter
-----	----------------------	-------------

7.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >=20dB band-width)
- 4. Record the max. reading.
- 5. Repeat above procedures until all default test channel is completed.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7.5 Peak & Average Power Measurement Result

СН	Freq. (MHz)	Power set	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	8	7.16	5.200	1000
Mid	2441	8	6.57	4.539	1000
High	2480	8	7.56	5.702	1000

2M EDR mode (Peak):

СН	Freq. (MHz)	Power set	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	8	6.34	4.305	125
Mid	2441	8	5.68	3.698	125
High	2480	8	6.75	4.732	125

3M EDR mode (Peak):

СН	Freq. (MHz)	Power set	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	8	6.72	4.699	125
Mid	2441	8	6.10	4.074	125
High	2480	8	7.10	5.129	125

1M BR mode (Average): Max. Avg.Output include Output Freq. Power Limit СН tune up Power (MHz) set (mW) tolerance (mW) Power (dBm) 6.86 Low 2402 8 4.847 1000 2441 6.54 Mid 8 4.503 1000 2480 High 8 6.89 4.881 1000

2M EDR mode (Average):

СН	Freq. (MHz)	Power set	Max. Avg.Output include tune up tolerance Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	8	3.48	2.227	125
Mid	2441	8	2.81	1.908	125
High	2480	8	4.39	2.746	125

3M EDR mode (Average):

Sin EBR mode (Average).					
СН	Freq. (MHz)	Power set	Max. Avg.Output include tune up tolerance Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	8	3.98	2.498	125
Mid	2441	8	3.24	2.106	125
High	2480	8	4.41	2.757	125

NOTE: cable loss as 11.1dB that offsets in the spectrum

*Note: Max. Output include tune up tolerance Power measured by using average detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



7.6 **EIRP Measurement Result**

1M BR mode EIRP

Channel	Frequency (MHz)	Power set	Max. Avg.Output include tune up tolerance Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
Low	2402	8	6.86	0.90	5.964	4000
Mid	2441	8	6.54	0.90	5.540	4000
High	2480	8	6.89	0.90	6.005	4000

2M EDR mode EIRP

Channel	Frequency (MHz)	Power set	Max. Avg.Output include tune up tolerance Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
Low	2402	8	3.48	0.90	2.739	4000
Mid	2441	8	2.81	0.90	2.348	4000
High	2480	8	4.39	0.90	3.378	4000

3M EDR mode EIRP

Channel	Frequency (MHz)	Power set	Max. Avg.Output include tune up tolerance	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
			Power (dBm)			
Low	2402	8	3.98	0.90	3.073	4000
Mid	2441	8	3.24	0.90	2.591	4000
High	2480	8	4.41	0.90	3.392	4000

* Note: EIRP = Average Power + Gain

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



8 EMISSION BANDWIDTH MEASUREMENT


8.1 Standard Applicable

For frequency hopping systems operating in the 2400 MHz-2483.5 MHz no limit for 20dB bandwidth.

8.2 Measurement Equipment Used

Conducted Emission Test Site: Conducted G							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
Spectrum Analyzer	KEYSIGHT	N9010B	MY59071570	06/01/2021	05/31/2022		
Attenuator	Marvelous	WATT-218FS- 10	RF16	11/19/2020	11/18/2021		
DC Block	PASTERNACK	PE8210	RF154	11/19/2020	11/18/2021		

8.3 Test Set-up



8.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set the spectrum analyzer as RBW= 1 % to 5% of OBW , VBW = 3 X RBW, Span= 2 to 5 times of the OBW, Sweep=auto, Detector = Peak, and Max hold for 20dB Bandwidth test.
- 5. Mark the peak frequency and -20dB (upper and lower) frequency
- 6. Set the spectrum analyzer as RBW= 1 % to 5% of 99% Bandwidth , VBW ≥ 3 X RBW, Span= large enough to capture all products of the modulation process, Sweep=auto, Detector = Peak, and Max hold for 99% Bandwidth test.
 7. Mark the neak frequency and 00% dB (upper and lower) frequency.
- 7. Mark the peak frequency and 99%dB (upper and lower) frequency
- 8. Repeat above procedures until all test default channel is completed

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新th歪果菌區五工路 134 號



8.5 20dB Bandwidth

GFSK

СН	20 dB BW (MHz)	2/3 BW (MHz)
Low	0.9365	0.62
Mid	0.9386	0.63
High	0.938	0.63

π/4-DQPSK

СН	20 dB BW (MHz)	2/3 BW (MHz)
Low	1.282	0.85
Mid	1.280	0.85
High	1.280	0.85

8-DPSK

СН	20 dB BW	2/3 BW
СП	(MHz)	(MHz)
Low	1.293	0.86
Mid	1.292	0.86
High	1.292	0.86


8.6 99% Bandwidth

GESK

0151						
СН	99% BW					
	(MHz)					
Low	0.84828					
Mid	0.84561					
High	0.84668					
π/4-DQPSK						
СН	99% BW					
СП						
	(MHz)					
Low	(INITIZ) 1.1714					
Low Mid	. ,					
	1.1714					
Mid	1.1714 1.1704					


99% BW				
(MHz)				
1.1747				
1.1743				
1.1749				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。






OBW 20dB_GFSK_1M_DH5_2402MHz




OBW 20dB_GFSK_1M_DH5_2441MHz




OBW 20dB GFSK 1M DH5 2480MHz




OBW 20dB_4DQPSK_2M_DH5_2402MHz



OBW 20dB_4DQPSK_2M_DH5_2441MHz



OBW 20dB 4DQPSK 2M DH5 2480MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



OBW 20dB_8DPSK_3M_DH5_2402MHz



OBW 20dB_8DPSK_3M_DH5_2441MHz



OBW 20dB 8DPSK 3M DH5 2480MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


Report No.: E2/2021/60026 Page: 24 of 79




IC OBW 99%_GFSK_1M_DH5_2402MHz




IC OBW 99%_GFSK_1M_DH5_2441MHz




IC OBW 99% GFSK_1M_DH5_2480MHz






IC OBW 99%_4DQPSK_2M_DH5_2441MHz



IC OBW 99% 4DQPSK 2M DH5 2480MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



IC OBW 99%_8DPSK_3M_DH5_2402MHz



IC OBW 99%_8DPSK_3M_DH5_2441MHz



IC OBW 99%_8DPSK_3M_DH5_2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



9 CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT


9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) & RSS-Gen §8.10, must also comply with the radiated emission limits specified in §15.209(a) & RSS-Gen §8.9.

9.2 Measurement Equipment Used

Conducted Emission Test Site: Conducted G											
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.						
Spectrum Analyzer	KEYSIGHT	N9010B	MY59071570	06/01/2021	05/31/2022						
Attenuator	Marvelous	WATT-218FS- 10	RF16	11/19/2020	11/18/2021						
DC Block	PASTERNACK	PE8210	RF154	11/19/2020	11/18/2021						

9.3 Test SET-UP



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



9.4 Measurement Procedure

9.4.1 Conducted Band Edge:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Sweep = auto
- 6. Mark Peak, 2.3999GHz and 2.4836GHz and record the max. level.
- 7. Repeat above procedures until all frequency measured were complete.

9.4.2 Conducted Spurious Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows ANSI C63.10:2013.
- 3. Set RBW = 100 kHz & VBW = 300 kHz, Detector =Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

9.5 Measurement Result

See next page for test plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


Report No.: E2/2021/60026 Page: 28 of 79




Band Edge_GFSK_1M_DH5_2402MHz




Band Edge_GFSK_1M_DH5_2480MHz



Band Edge_8DPSK_3M_DH5_2402MHz



Band Edge_8DPSK_3M_DH5_2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No.: E2/2021/60026 Page: 29 of 79



Hopping Band Edge_GFSK_1M_DH5_2402MHz

KEY R N	SIGHT .≁·	Input: F Couplin Align: /	g: DC	Input Z: 50 Ω Corrections: Off Freq Ref: Int (S)	#Atten: 30 dB	PNO: Fast Gate: Off IF Gain: Low Sig Track: O			123456 MWWWWW PNNNNN	2.3650	Frequency 00000 GHz	Setting
	ctrum		•		ef Lvi Offset 11.		Mkr		6 13 GHz		0000 MHz	
Scale Log 20.0	/Div 10 d	В		R	ef Level 30.00 d	Bm		-4	7.68 dBm	Sw Ze	vept Span ro Span	
10.0									AT DANAADAAN	F	ull Span	
10.0 20.0		-	_			_		1994	ANTAN IN	Start Fr 2.3100	eq 00000 GHz	
30.0 40.0 50.0							•3	2		Stop Fr 2.4200	eq 00000 GHz	
60.0										AL	TOTUNE	
Res	er 2.3650 BW 100 I				#Video BW 300	kHz	Swe		an 110.0 MHz ms (1001 pts)	CF Step	000 MHz	
i Mar	ker Table		<u>'</u>							- Au	to	
		Trace	Scale	Х	Y	Function	Function Width	Func	tion Value	Ma Ma	n	
1 2	N	1	f	2.410 98 GHz 2.400 00 GHz	6.782 dBm -50.26 dBm			-		Freq Of	fset	
2	N	+	1	2.400 00 GHz 2.396 13 GHz	-50.20 dBm					0 Hz		
4				2.000 10 0112								
5								1		X Axis		
6								1			g	
	(x = 1)	-		Jun 22, 2021	Α		H			Signal '		
1												


Hopping Band Edge_GFSK_1M_DH5_2480MHz



Spectrum Analyzer 1 Swept SA Ö Frequency - 12 Avg Type: Log-F Trig: Free Pure KEYSIGHT Input: R Input Z: 50 Ω Corrections: Off Freq Ref: Int (S) PNO: Fast Gate: Off IF Gain: Lo Center Frequ ettings -Alian: Aut 2.365000000 GH PNNNN Mkr3 2.353 78 GHz Ref Lvi Offset 11.10 dB Ref Level 30.00 dBm 110.000000 MHz Scale/Div 10 di -47.96 dBi Swept Span Zero Span Full Spar Start Freq 2.31000000 GHz Stop Freq 2.420000000 GHz AUTO TUNE Span 110.0 Mi p 10.5 ms (1004 Center 2.36500 GH #Res BW 100 kHz CF Step (1001 pts Marker Table Auto Man Function Width Function Value Mode Trace Function X 2.420 00 GHz 2.400 00 GHz 2.353 78 GHz 3.348 dBr Freq Offse 0 Hz X Axis Scale Log Lin 📲 🥱 🍋 🔳 🅐 Jun 22, 2021 🗩 .# 💽 🕂 🗶

Hopping Band Edge_8DPSK_3M_DH5_2402MHz

Hopping Band Edge_8DPSK_3M_DH5_2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Report No.: E2/2021/60026 Page: 30 of 79



Spurious Emission_GFSK_1M_DH5_2402MHz


EYSIGH	F Input: F Couplin Align: A	ng: DC	Input Z: 50 Ω Corrections: Off Freq Ref: Int (S)	#Atten: 30 dB	PNO: Fast Gate: Off IF Gain: Lo	Avg Type: Log Trig: Free Run W	M	23456 ****	Center Free 13.015000		Setting
Spectrum	-	,	R	ef Lvi Offset 11	Sig Track: (P 1 25.897	0 GHz	Span 25.970000	0 GHz	
ale/Div 10	dB		R	ef Level 30.00 c	dBm		-40.9)3 dBm	Swept Zero S		
0.0	Ŷ								Fulls	Span	
0.0							OL	1 13 61 dBm	Start Freq 30.000000	MHz	
0.0		Q ²	. () ³					4	Stop Freq 26.000000	000 GHz	
nter 13.02	GH7			#Video BW 300) kHz		Span	25.97 GHz	AUTO	TUNE	1
es BW 100	kHz					Swee	p~2.49 s (3		CF Step 2.5970000	00.011-	
Marker Table		<u>'</u>							2.5970000	UU GHZ	
Mode	Trace	Scale	Х	Y	Function	Function Width	Function	Value	Man		
1 N	1	f	2.401 9 GHz	6.392 dBm					Freq Offset		
2 N	1	f	4.804 0 GHz	-50.51 dBm					0 Hz		
3 N 4 N	1	f	7.206 0 GHz	-49.96 dBm					U TZ		
4 N 5	1	T	25.897 0 GHz	-40.93 dBm					X Axis Scal	B	
6									Log		
						1			Lin		1

Spurious Emission_GFSK_1M_DH5_2441MHz



Spurious Emission GFSK 1M DH5 2480MHz





Spurious Emission_4DQPSK_2M_DH5_2441MHz





Spurious Emission 4DQPSK 2M DH5 2480MHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnielectronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/1erms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

	SGS	Taiwan Ltd.	No.134,Wu Ki	ung Road, New Taipei Industrial Park, Wuku District, New Taipei City,	Taiwan/新北市五股區新北產業園區五工路 134 號
台灣檢驗科技股份有限	公 <mark>司</mark>	t (886-2)	2299-3279	f (886-2) 2298-0488	www.sgs.com.tw
-					Member of SGS Group



Spurious Emission_8DPSK_3M_DH5_2402MHz

000 000 001 001 001 001 001 001	Avg Type: Log-Power 1 2 3 4 5 6 Center Frequency Settings Tng: Free Run M WW WWW 13.015000000 GHz Settings	Off	PNO: F Gate: O IF Gair Sig Tra	#Atten: 30 dB	Input Z: 50 Q Corrections: Off Freq Ref: Int (S)		Input: F Couplir Align: A	ight	(EYS
-00 -00 -00 -00 -00 -00 -00 -00	Mkr4 25.687 5 GHz 25.9700000 GHz					•	R		
100 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Swept Span			T T			-		.og 🗆
100 0 0.11953 mm 300 0 0.2 0.3 0.0 MHz 300 0 0.2 0.3 0.0 MHz 300 0 0.2 0.3 0.0 MHz 300 0 0.0 MHz 300 0.0 MHz 3	Full Span						() ¹		10.0
400 0 02 03 000 Freq 2000 042 03 00 kHz Sweep -2.49 s (3000 Freq 2000 042 250000000 GHz AUTO TUNE CF Step 2.50000000 GHz 2.50000000 GHz 2.5000000 GHz 2.50000000 GHz 2.5000000 GHz 2.5000000 GHz 2.5000000 GHz 2.5000000 GHz 2.5000000 GHz 2.5000000 GHz 2.5000000 GHz 2.50000000 GHz 2.5000000 GHz 2.50000000 GHz 2.5000000 GHz 2.50000000 GHz 2.50000000 GHz 2.50000000 GHz 2.50000000 GHz 2.50000000 GHz 2.500000000 GHz 2.500000000 GHz 2.500000000 GHz 2.50000000 GHz 2.500000000 GHz 2.50000000 GHz 2.50000000 GHZ 2.500000000 GHZ 2.50000000 GHZ 2.50000000 GHZ 2.50000000 GHZ 2.50000000 GHZ 2.500000000 GHZ 2.5000000000000 GHZ 2.5000000000000000000000000000000000000									10.0 20.0
Perfer 13.02 OHz #Video BW 300 KHz Span 25.97 GHz AUTO TUNE Res BW 100 KHz Sweep ~2.49 s (30001 pts) CF Step 259700000 GHz S Marker Table Auto Auto					() ³	Q2			40.0
Res BW 100 kHz Sweep ~2.49 s (30001 pts) CF Step Marker Table - 2.59700000 GHz 2.440			klia	Widee DW 200				42.02.0	
Auto	Sweep ~2.49 s (30001 pts) CF Step		KH2	#VIGEO BW 300		-		W 100	Res E
Mode Trace Scale X Y Function Function Width Function Value	Auto					<u> </u>		e table	o mario
	ction Width Function Value Man	on Fu	Function				Trace		
1 N 1 f 2.402 8 GHz 0.4732 dBm	Free Offset					f	1		
2 N 1 4.004 0 GHZ -46.81 UDIII						T A	1		
3 N 1 f 7.206 0 GHz 449.94 dBm 4 N 1 f 25.687 5 GHz 40.62 dBm	0 Hz	_				T F	-		
4 N I I 25.007 5 GHZ -40.02 dBill 5 X Axis Scale	X Axis Scale			-40.02 (IDIII	20.007 0 GHZ		-	19	
								_	

Spurious Emission_8DPSK_3M_DH5_2441MHz



Spurious Emission 8DPSK 3M DH5 2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 and RSS-Gen §8.9 Table 5 and 6 limit as below.

And according to §15.33(a) (1) & RSS-Gen §6.13.2.a, for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



10.2 **Measurement Equipment Used**

	Radiated Emission Test Site: SAC G											
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.							
Broadband Antenna	SCHWAZBECK	VULB 9168	1206	02/22/2021	02/21/2022							
Horn Antenna	Schwarzbeck	DRH18-E	210105A18E	04/09/2021	04/08/2022							
Horn Antenna	Schwarzbeck	BBHA9170	185	07/30/2020	07/29/2021							
Loop Antenna	ETS.LINDGREN	6502	143303	05/07/2021	05/06/2022							
3m Site NSA	SGS	966 chamber G	N/A	03/30/2021	03/29/2022							
Spectrum Analyzer	KEYSIGHT	N9010A	MY57120290	04/06/2021	04/05/2022							
Pre-Amplifier	EMC Instruments	EMC0011830	980199	11/19/2020	11/18/2021							
Pre-Amplifier	EMC Instruments	EMC330N	980781	03/15/2021	03/14/2022							
Pre-Amplifier	EMC Instruments	EMC118A45SE	980815	03/15/2021	03/14/2022							
Attenuator	Marvelous	MVE2213-30	RF04	11/19/2020	11/18/2021							
High Pass Filter	R&S	F13 HPF 3GHz	RF175	11/19/2020	11/18/2021							
Lowpass Filter	Woken	EWT-56-0019	RF173	11/19/2020	11/18/2021							
High Pass Filter	R&S	HPF7.0	RF176	11/19/2020	11/18/2021							
Notch Filter	Woken	EWT-54-0037	RF204	11/19/2020	11/18/2021							
Coaxial Cable	Huber+Suhner	RG 214/U	W21.01	11/19/2020	11/18/2021							
			210219、									
Coaxial Cable	EMC Instruments	EMC104-SM-SM- 8000-5000-5000	210220、 210221	03/15/2021	03/14/2022							
Test Software	audix	e3	20923 sgs Ver.9	N.C.R	N.C.R							


NOTE: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




10.3 **Test SET-UP**


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz.

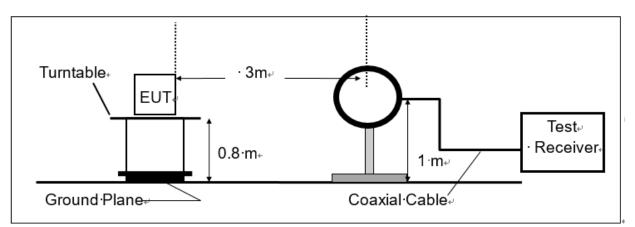

(B) Radiated Emission Test Set-Up, Frequency From 30MHz to 1000MHz

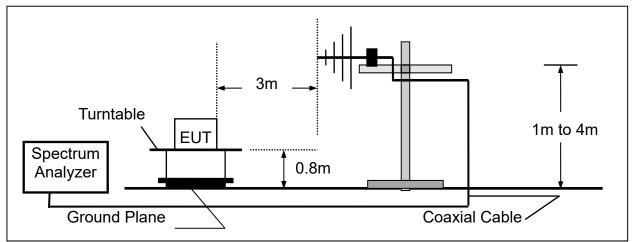

(C) Radiated Emission Test Set-Up, Frequency Above 1 GHz

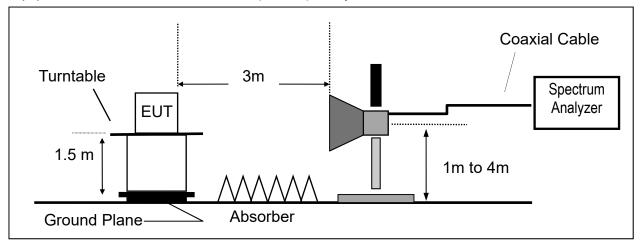

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnielectronic format documents, subject to 1 terms and Conditions for Electronic Documents at http://www.sgs.com.tw/1 erms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law.



10.4 Measurement Procedure

10.4.1 Radiated Emission

- 1. The testing follows the Measurement Procedure of ANSI C63.10:2013.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=100 kHz and VBW=300 kHz for Peak Detector (PK) at frequency between 30MHz and 1 GHz.
- 6. Use receiver mode as RBW=120 kHz for Quasi-peak (QP) at frequency between 30MHz and 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 11. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

iwan I td

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.5 **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where FS = Field Strength RA = Reading Amplitude AF = Antenna Factor

CL = Cable Attenuation Factor (Cable Loss) AG = Amplifier Gain

The limit of the emission level is expressed in dBuV/m, which converts $20^{*}\log(uV/m)$

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB) Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) & RSS-GEN §6.13.2 was not reported.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




10.7 **Measurement Result:**

10.7.1 Radi	10.7.1 Radiated Bandedge Result (Hopping Mode)						
Report Number	:E2/2021/60026	Test Site	:966 Chamber G				
Operation Mode	:BT BR HOPPING	Test Date	:2021-06-23				
Test Frequency	:2402 MHz	Temp./Humi.	:19.5/70				
Test Mode	:BE CH LOW	Antenna Pol.	:Vertical				
EUT Pol	:H Plane	Engineer	:Jack Tseng				

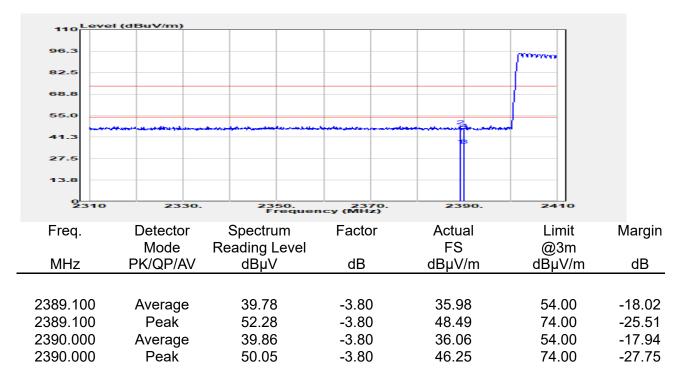


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。





Report Number	:E2/2021/60026
Operation Mode	:BT BR HOPPING
Test Frequency	:2402 MHz
Test Mode	:BE CH LOW
EUT Pol	:H Plane

Test Site	:966 Chamber G
Test Date	:2021-06-23
Temp./Humi.	:19.5/70
Antenna Pol.	:Horizontal
Engineer	:Jack Tseng

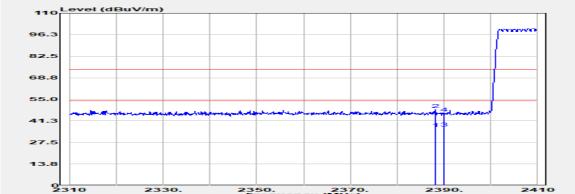


	Frequency (MHz)						
	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	2388.100	Average	40.17	-3.79	36.38	54.00	-17.62
	2388.100	Peak	52.41	-3.79	48.62	74.00	-25.38
	2390.000	Average	40.50	-3.80	36.70	54.00	-17.30
	2390.000	Peak	49.99	-3.80	46.19	74.00	-27.81



st S
st [
mp
nter
ngin
1

Test Site	:966 Chamber G
Test Date	:2021-06-23
Temp./Humi.	:19.5/70
Antenna Pol.	:Vertical
Engineer	:Jack Tseng

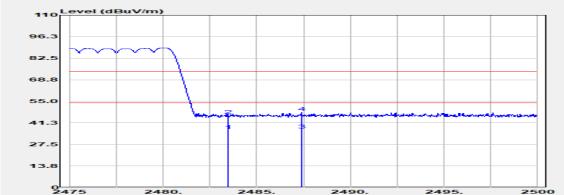

			Frequen	icy (MHz)			
	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	2483.500	Average	40.42	-3.92	36.50	54.00	-17.50
	2483.500	Peak	49.95	-3.92	46.03	74.00	-27.97
	2487.375	Average	40.47	-3.90	36.57	54.00	-17.43
	2487.375	Peak	51.83	-3.90	47.94	74.00	-26.06




96.3 82.5 68.8 55.0 41.3 27.5

Report Number	:E2/2021/60026	Test Site	:966 Chamber G
Operation Mode	:BT BR HOPPING	Test Date	:2021-06-23
Test Frequency	:2480 MHz	Temp./Humi.	:19.5/70
Test Mode	:BE CH HIGH	Antenna Pol.	:Horizontal
EUT Pol	:H Plane	Engineer	:Jack Tseng
110 Level (d	BuV/m)		

13.8						
2475	2480.	2485. Frequen	2490. icy (MHz)	2495.	2500	
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.500	Average	41.41	-3.92	37.49	54.00	-16.51
2483.500	Peak	50.75	-3.92	46.83	74.00	-27.17
2489.900	Average	40.40	-3.88	36.52	54.00	-17.48
2489.900	Peak	52.16	-3.88	48.28	74.00	-25.72


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。






Report Number	:E2/2021/60026	Tes
Operation Mode	:BT EDR HOPPING	Tes
Test Frequency	:2402 MHz	Ter
Test Mode	:BE CH LOW	Ant
EUT Pol	:H Plane	Eng

Test Site	:966 Chamber G
Test Date	:2021-06-23
Temp./Humi.	:19.5/70
Antenna Pol.	:Vertical
Engineer	:Jack Tseng

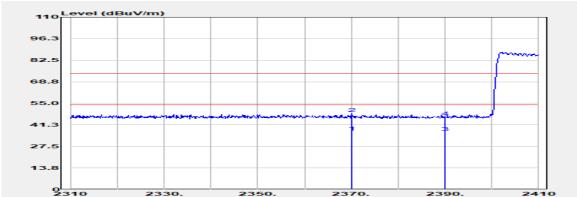


			Frequen	icy (MHz)			
	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	2370.100	Average	40.23	-3.68	36.54	54.00	-17.46
	2370.100	Peak	52.18	-3.68	48.50	74.00	-25.50
	2390.000	Average	40.25	-3.80	36.45	54.00	-17.55
	2390.000	Peak	50.02	-3.80	46.22	74.00	-27.78






Report Number	:E2/2021/60026
Operation Mode	:BT EDR HOPPING
Test Frequency	:2402 MHz
Test Mode	:BE CH LOW
EUT Pol	:H Plane

Test Site	:966 Chamber G
Test Date	:2021-06-23
Temp./Humi.	:19.5/70
Antenna Pol.	:Horizontal
Engineer	:Jack Tseng

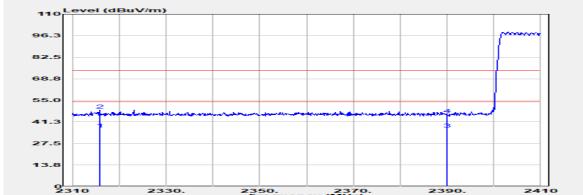


Frequency (MHz)						
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2315.800	Average	40.23	-3.68	36.55	54.00	-17.45
2315.800	Peak	52.40	-3.68	48.72	74.00	-25.28
2390.000	Average	40.55	-3.80	36.75	54.00	-17.25
2390.000	Peak	49.72	-3.80	45.92	74.00	-28.08






Report Number	:E2/2021/60026
Operation Mode	:BT EDR HOPPING
Test Frequency	:2480 MHz
Test Mode	:BE CH HIGH
EUT Pol	:H Plane

Test Site	:966 Chamber G
Test Date	:2021-06-23
Temp./Humi.	:19.5/70
Antenna Pol.	:Vertical
Engineer	:Jack Tseng

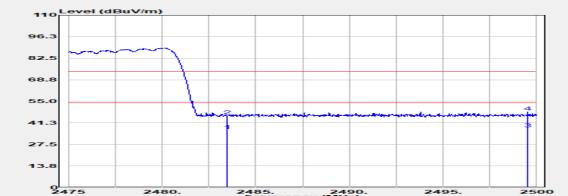


	Frequency (MHz)						
	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	_
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
-							
	2483.500	Average	40.44	-3.92	36.52	54.00	-17.48
	2483.500	Peak	49.68	-3.92	45.76	74.00	-28.24
	2499.525	Average	41.31	-3.85	37.46	54.00	-16.54
	2499.525	Peak	51.99	-3.85	48.14	74.00	-25.86





Report Number	:E2/2021/60026
Operation Mode	:BT EDR HOPPING
Test Frequency	:2480 MHz
Test Mode	:BE CH HIGH
EUT Pol	:H Plane

Test Site	:966 Chamber G
Test Date	:2021-06-23
Temp./Humi.	:19.5/70
Antenna Pol.	:Horizontal
Engineer	:Jack Tseng

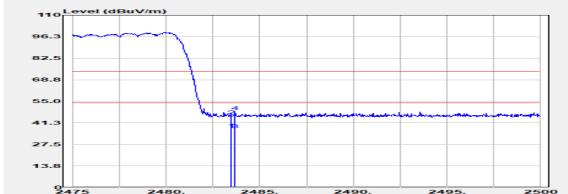


	2413	2400.	Frequen	icy (MHz)	2455.	2000	
	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
_							
	2483.500	Average	41.09	-3.92	37.17	54.00	-16.83
	2483.500	Peak	49.78	-3.92	45.86	74.00	-28.14
	2483.700	Average	40.82	-3.92	36.91	54.00	-17.09
	2483.700	Peak	52.45	-3.92	48.54	74.00	-25.46



10.7.2 Radiated Bandedge Result (Non-Hopping Mode)

Report Number	:E2/2021/60026	Test Site	:966 Chamber G
Operation Mode	:BT BR	Test Date	:2021-06-22
Test Frequency	:2402 MHz	Temp./Humi.	:19.4/67
Test Mode	:BE CH LOW	Antenna Pol.	:Vertical
EUT Pol	:H Plane	Engineer	:Jack Tseng

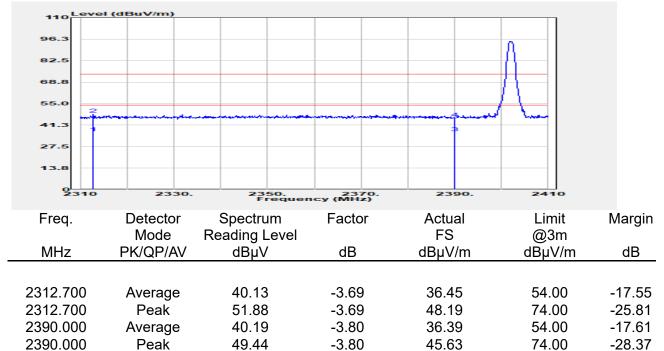

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions Attention is drawn to the limitation of liability, indemnielectronic format documents, subject to 1 terms and Conditions for Electronic Documents at http://www.sgs.com.tw/1 erms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law.



2390.000

Peak

Report Number Operation Mode Test Frequency Test Mode EUT Pol	:E2/2021/60026 :BT BR :2402 MHz :BE CH LOW :H Plane		Test Site Test Date Temp./Humi. Antenna Pol. Engineer	:966 Chamber G :2021-06-22 :19.4/67 :Horizontal :Jack Tseng	
Level (iBuV/m)				
110				0	
96.3					
82.5					
68.8					
55.0				-	
41.3	secondariador a francisco de porteres.	an a	-townhater and the me	and have	
27.5					
13.8					
2310	2330. 23	350. 2370 requency (MHz)	. 2390.	2410	
Freq.	Detector Spectr	rum Factor	Actual	Limit	Margin
	Mode Reading		FS	@3m	
MHz	PK/QP/AV dBµ'	V dB	dBµV/m	dBµV/m	dB
2372.800	Average 40.3		36.59	54.00	-17.41
2372.800	Peak 51.8		48.15	74.00	-25.85
2390.000	Average 40.3	8 -3.80	36.58	54.00	-17.42

-3.80

46.37

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

50.17

(W) ポラプ目がの 「山根古宅未留到海政之体的見見「同時山後和国味田智巧」、報告本語中な可冒面町可、小口回的投設。 This document is issued by the Company subject to is General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to the reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

74.00

-27.63



Report Number Operation Mode Test Frequency Test Mode EUT Pol	:E2/2021/0 :BT BR :2480 MH: :BE CH H :H Plane	z	Te Te An	st Site st Date mp./Humi. ntenna Pol. ngineer	:966 Chamber G :2021-06-22 :19.4/67 :Vertical :Jack Tseng	3
110 Level (dBuV/m)					
96.3						
82.5						
68.8						
55.0						
41.3		Maria and a maria	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	38-1-1-2-1-1-2-1-	managenta	
27.5						
13.8						
2475	2480.	2485. Frequen	2490. icy (MHz)	2495	. 2500	
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
N 41 I	Mode	Reading Level		FS	@3m	15
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
0400 500	•	40.00	0.00	00.00	54.00	47.00
2483.500 2483.500	Average Peak	40.90 53.17	-3.92 -3.92	36.98 49.25	54.00 74.00	-17.02 -24.75
2403.000	reak	55.17	-3.92	49.20	74.00	-24.13



Report Number Operation Mode Test Frequency Test Mode EUT Pol	:E2/2021/6 :BT BR :2480 MHz :BE CH HI0 :H Plane		т Т А	ēst Site ēst Date ēmp./Humi. antenna Pol. Engineer	:966 Chamber G :2021-06-22 :19.4/67 :Horizontal :Jack Tseng	ì
110 Level (dBuV/m)				_ _	
96.3						
82.5	+/1					
68.8	+/+					
55.0						
- All and a second s		he maintener			a company and	
41.3						
27.5						
13.8						
2475	2480.	2485. Frequer	2490. icy (MHz)	2495	. 2500	
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.500	Average	42.26	-3.92	38.34	54.00	-15.66
2483.500	Peak	56.17	-3.92	52.25	74.00	-21.75



2390.000

Peak

Report Number Operation Mode Test Frequency Test Mode EUT Pol	:E2/2021/60 :BT EDR :2402 MHz :BE CH LO :H Plane		Te Te A	est Site est Date emp./Humi. .ntenna Pol. ngineer	:966 Chamber G :2021-06-22 :19.4/67 :Vertical :Jack Tseng	
110 Level (dBuV/m)					
96.3					Λ	
82.5						
68.8						
55.0	2					
41.3		hater and the second second	~~~~~	- and the second second	sand been	
27.5						
13.8						
2310	2330.	2350. Frequen	2370. cy (MHz)	2390	. 2410	
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
•	Mode	Reading Level		FS	@3m	Ũ
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2327.200	Average	29.98	-3.70	26.27	54.00	-27.73
2327.200	Peak	52.78	-3.70	49.08	74.00	-24.92
2390.000	Average	30.09	-3.80	26.29	54.00	-27.71

-3.80

45.96

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

49.76

(W) ポラプ目がの 「山根古宅未留到海政之体的見見「同時山後和国味田智巧」、報告本語中な可冒面町可、小口回的投設。 This document is issued by the Company subject to is General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to the reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

74.00

-28.04



Report Number	:E2/2021/6	60026		Test Site	:966 Chamber	G
Operation Mode	:BT EDR			Test Date	:2021-06-22	
Test Frequency	:2402 MHz	<u>Z</u>		Temp./Humi.	:19.4/67	
Test Mode	:BE CH LO	W		Antenna Pol.	:Horizontal	
EUT Pol	:H Plane			Engineer	:Jack Tseng	
110 Level (d	BuV/m)					
96.3						
82.5					-H	
68.8						
55.0		2				
41.3						
27.5						
13.8						
2310	2330.	2350. Frequen	2370 icy (MHz)	. 2390	. 2410	
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz I	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
		GDPV	GD			
2346.600	Average	30.44	-3.66	26.78	54.00	-27.22
2346.600	Peak	51.55	-3.66	47.89	74.00	-26.11
2390.000 2390.000	Average Peak	30.41 49.39	-3.80 -3.80	26.61 45.59	54.00 74.00	-27.39 -28.41
2390.000	reak	49.39	-3.00	45.59	74.00	-20.41



Report Number Operation Mode Test Frequency Test Mode EUT Pol	:E2/2021// :BT EDR :2480 MH :BE CH H :H Plane	Z	T T A	⁻ est Date ⁻ emp./Humi. Antenna Pol.	:966 Chamber G :2021-06-22 :19.4/67 :Vertical :Jack Tseng	
110 Level (96.3 82.5 68.8 55.0 41.3 27.5 13.8 9 2475	dBuV/m)	2485.	2490. 2490.	4	2500	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.500	Average	40.40	-3.92	36.49	54.00	-17.51
2483.500	Peak	51.69	-3.92	47.77	74.00	-26.23
2492.700	Average	40.35	-3.87	36.48	54.00	-17.52
2492.700	Peak	52.27	-3.87	48.40	74.00	-25.60



Report Number Operation Mode Test Frequency Test Mode EUT Pol	:E2/2021/60 :BT EDR :2480 MHz :BE CH HIG :H Plane		ד ד 4	ēst Site ēst Date ēmp./Humi. Antenna Pol. Engineer	:966 Chamber G :2021-06-22 :19.4/67 :Horizontal :Jack Tseng	
110 Level (0 96.3 82.5 68.8 55.0 41.3 27.5 13.8 2475	1BuV/m)	2485. Frequen	2490. CY (MHZ)	2495.	2509	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.500 2483.500 2484.500 2484.500	Average Peak Average Peak	41.76 53.94 41.22 53.89	-3.92 -3.92 -3.91 -3.91	37.84 50.02 37.31 49.97	54.00 74.00 54.00 74.00	-16.16 -23.98 -16.69 -24.03

Margin

dB

-8.86

-24.60

-25.62

-20.43 -17.76

-23.20

40.00

43.50

46.00

46.00

46.00

54.00



56.190

200.720

275.410

559.620

795.330

966.050

Peak

Peak

Peak

Peak

Peak

Peak

10.7.3 Radiated Spurious Emission form 30MHz to 1000MHz:

Report Number Operation Mode Test Frequency Test Mode	:E2/2021/600 :BT BR :2441 MHz :TX CH MID)26		Test Site Test Date Temp./Humi. Antenna Pol.	: Vertical
EUT Pol	:H Plane			Engineer	:Jack Tseng
100 Level (d 87.5 75.0 62.5 50.0 37.5 1 25.0 12.5 0 30	BuV/m)	418. Frequen	4 612. Cy (MHz)	5	6
Freq. MHz I	Detector Mode R PK/QP/AV	Spectrum eading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m

-13.32

-16.24

-13.05

-6.43

-2.40

0.43

31.14

18.90

20.38

25.57

28.24

30.80

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

44.46

35.14

33.43

32.00

30.65

30.37

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions Attention is drawn to the limitation of liability, indemnielectronic format documents, subject to 1 terms and Conditions for Electronic Documents at http://www.sgs.com.tw/1 erms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law.



Report Number	:E2/2021/	60026		Test Site	:966 Chamber G	ì
Operation Mode	:BT BR			Test Date	:2021-06-25	
Test Frequency	:2441 MH	Z		Temp./Humi.	:19.1/71	
Test Mode	:TX CH M	ID		Antenna Pol.	: Horizontal	
EUT Pol	:H Plane			Engineer	:Jack Tseng	
	dBuV/m)		1 1	- 1 - 1		
87.5						
75.0						
62.5						
50.0						
37.5					6	
25.0	2	3	4			
12.5						
0 30	224.	418. Frequer	612. icy (MHz)	806.	1000	
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
		ασμν	uВ	αвμν/п	ασμν/π	ub
58.130	Peak	34.23	-13.44	20.79	40.00	-19.21
153.190	Peak	30.72	-13.15	17.57	43.50	-25.93
379.200	Peak	31.02	-10.37	20.65	46.00	-25.35
579.020	Peak	31.68	-5.64	26.03	46.00	-19.97
795.330	Peak	30.26	-2.40	27.86	46.00	-18.14
963.140	Peak	29.37	0.50	29.87	54.00	-24.13



Report Number	:E2/2021/60	0026		Test Site	:966 Chamber G	
Operation Mode	:BT EDR			Test Date	:2021-06-25	
Test Frequency	:2441 MHz			Temp./Humi.	:19.1/71	
Test Mode	:TX CH MIE	C		Antenna Pol.	:Vertical	
EUT Pol	:H Plane			Engineer	:Jack Tseng	
100 Level (di	BuV/m)					
87.5						
75.0						
62.5						
50.0						
37.5					6	
25.0	2	3	4	5		
12.5						
0 30	224.	418. Frequen	612. cy (MHz)	806.	1000	
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz P	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
		dDµv	uD	ασμνιπ	dbµv/m	<u>ub</u>
57.160	Peak	43.99	-13.41	30.58	40.00	-9.42
201.690	Peak	35.22	-16.25	18.98	43.50	-24.52
398.600	Peak	30.48	-10.03	20.45	46.00	-25.55
582.900 772.050	Peak	30.67 30.49	-5.66 -2.88	25.01 27.60	46.00 46.00	-20.99 -18.40
	Peak	30.49	_/ XX	27 60	4h UU	-18 40

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

(W) ポラプ目がの 「山根古宅未留到海政之体的見見「同時山後和国味田智巧」、報告本語中な可冒面町可、小口回的投設。 This document is issued by the Company subject to is General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to the reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



929.190

Peak

Report Number	:E2/2021/60	026		Test Site	:966 Chamber	G
Operation Mode	:BT EDR			Test Date	:2021-06-25	
Test Frequency	:2441 MHz			Temp./Humi.	:19.1/71	
Test Mode	:TX CH MID)		Antenna Pol.	:Horizontal	
EUT Pol	:H Plane			Engineer	:Jack Tseng	
	Bull(m)					
100						
87.5						
75.0						
62.5						
50.0						
37.5					6	
25.0	2	3	4	5	— <u> </u>	
12.5						
0 30	224.	418. Frequen	612. icy (MHz)	. 806.	1000	
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode F	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	i dBµV/m	dB
58.130	Peak	42.14	-13.44	28.70	40.00	-11.30
149.310	Peak	31.30	-13.20	18.11	43.50	-25.39
404.420	Peak	30.73	-9.78	20.95	46.00	-25.05
589.690	Peak	31.40	-5.73	25.67	46.00	-20.33
731.310	Peak	30.75	-2.88	27.87	46.00	-18.13

-0.35

29.81

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

30.16

(W) ポラプ目がの 「山根古宅未留到海政之体的見見「同時山後和国味田智巧」、報告本語中な可冒面町可、小口回的投設。 This document is issued by the Company subject to is General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to the reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


46.00

-16.19



10.7.4 Radiated Spurious Emission above 1 GHz:

Report Number	:E2/2021/60026	Test Site	:966 Chamber G
Operation Mode	:BT BR	Test Date	:2021-06-22
Test Frequency	:2402 MHz	Temp./Humi.	:19.4/67
Test Mode	:TX CH LOW	Antenna Pol.	:Vertical
EUT Pol	:H Plane	Engineer	:Jack Tseng

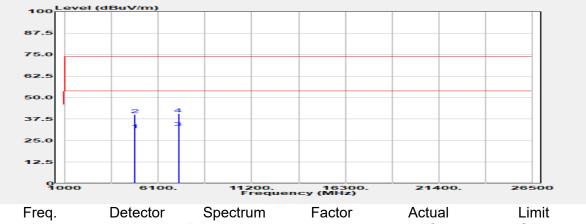

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4804.000	Average	28.19	3.14	31.33	54.00	-22.67
4804.000	Peak	36.93	3.14	40.07	74.00	-33.93
7206.000	Average	25.46	7.22	32.68	54.00	-21.32
7206.000	Peak	33.26	7.22	40.48	74.00	-33.52

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report Number	:E2/2021/60026
Operation Mode	:BT BR
Test Frequency	:2402 MHz
Test Mode	:TX CH LOW
EUT Pol	:H Plane

Test Site	:966 Chamber G
Test Date	:2021-06-22
Temp./Humi.	:19.4/67
Antenna Pol.	:Horizontal
Engineer	:Jack Tseng



			Frequen	icy (MHz)			
	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	4804.000	Average	28.00	3.14	31.14	54.00	-22.86
	4804.000	Peak	36.47	3.14	39.61	74.00	-34.39
	7206.000	Average	25.27	7.22	32.49	54.00	-21.51
	7206.000	Peak	33.75	7.22	40.96	74.00	-33.04



Report Number	:E2/2021/60026
Operation Mode	:BT BR
Test Frequency	:2441 MHz
Test Mode	:TX CH MID
EUT Pol	:H Plane

Test Site	:966 Chamber G
Test Date	:2021-06-22
Temp./Humi.	:19.4/67
Antenna Pol.	:Vertical
Engineer	:Jack Tseng




Frequency (MHz)							
	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	-
	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	4882.000	Average	28.31	3.31	31.63	54.00	-22.37
	4882.000	Peak	36.36	3.31	39.67	74.00	-34.33
	7323.000	Average	25.74	7.67	33.41	54.00	-20.59
	7323.000	Peak	33.58	7.67	41.25	74.00	-32.75



Report Number	:E2/2021/60026
Operation Mode	:BT BR
Test Frequency	:2441 MHz
Test Mode	:TX CH MID
EUT Pol	:H Plane

Test Site	:966 Chamber G
Test Date	:2021-06-22
Temp./Humi.	:19.4/67
Antenna Pol.	:Horizontal
Engineer	:Jack Tseng

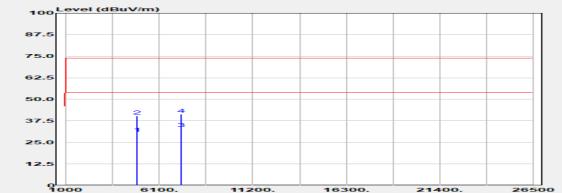

			Frequen	icy (MHz)			
	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	4882.000	Average	26.94	3.31	30.26	54.00	-23.74
	4882.000	Peak	37.09	3.31	40.41	74.00	-33.59
	7323.000	Average	25.32	7.67	32.99	54.00	-21.01
	7323.000	Peak	33.60	7.67	41.27	74.00	-32.73



7440.000

7440.000

Report Number Operation Mode Test Frequency Test Mode EUT Pol	:E2/2021/6 :BT BR :2480 MH: :TX CH HI :H Plane	Z		Test Tem Ante	: Site Date p./Humi. enna Pol. ineer	:20 :19 :Ve	6 Cham 21-06-2 .4/67 rtical ck Tseng	2	
100 Level (dBuV/m)							-	
87.5									
75.0									
62.5									
50.0									
37.5	2	4 							
25.0									
12.5									
9000	6100.	11200. Frequen	1630		2140	00.	265	00	
Freq.	Detector	Spectrum	Factor		Actua	1	Lir	nit	Margin
ricq.	Mode	Reading Level	1 00101		FS	•	@3		Margin
MHz	PK/QP/AV	dBµV	dB		dBµV/r	n	dBµ		dB
4960.000	Average	28.30	3.42		31.72		54.		-22.28
4960.000	Peak	36.22	3.42		39.64		74.	00	-34.36

8.11

8.11

33.37

41.10

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

25.26

32.99

Average

Peak

(W) ポラプ目がの 「山根古宅未留到海政之体的見見「同時山後和国味田智巧」、報告本語中な可冒面町可、小口回的投設。 This document is issued by the Company subject to is General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to the reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

54.00

74.00

-20.63

-32.90



4960.000

7440.000

7440.000

-35.48

-20.79

-32.55

74.00

54.00

74.00

Report Number Operation Mode Test Frequency Test Mode EUT Pol	:E2/2021/60 :BT BR :2480 MHz :TX CH HIG :H Plane			Test Tem Ante	: Site Date p./Humi. enna Pol ineer	:20 :19 : :Hc	6 Chamb 21-06-22 .4/67 orizontal ck Tseng		
100 Level (dBuV/m)								
87.5									
75.0									
62.5									
50.0	4								
37.5									
25.0									
12.5									
0									
1000	6100.	11200. Frequen	163 ICY (MHz	00. 2)	2140	00.	2650	0	
Freq.	Detector	Spectrum	Facto	r	Actua	l	Lim		Margin
		Reading Level			FS		@3r		
MHz	PK/QP/AV	dBµV	dB		dBµV/ı	m	dBµV	/m	dB
4960.000	Average	26.76	3.42		30.18	}	54.0	0	-23.82

3.42

8.11

8.11

38.52

33.21

41.45

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

35.10

25.10

33.34

Peak

Average

Peak



Report Number	:E2/2021/60026
Operation Mode	:BT EDR
Test Frequency	:2402 MHz
Test Mode	:TX CH LOW
EUT Pol	:H Plane

Test Site	:966 Chamber G
Test Date	:2021-06-22
Temp./Humi.	:19.4/67
Antenna Pol.	:Vertical
Engineer	:Jack Tseng



			Frequen	icy (MHz)			
	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	4804.000	Average	28.05	3.14	31.18	54.00	-22.82
	4804.000	Peak	37.03	3.14	40.17	74.00	-33.83
	7206.000	Average	25.25	7.22	32.47	54.00	-21.53
	7206.000	Peak	34.78	7.22	42.00	74.00	-32.00



Report Number	:E2/2021/60026
Operation Mode	:BT EDR
Test Frequency	:2402 MHz
Test Mode	:TX CH LOW
EUT Pol	:H Plane

Test Site	:966 Chamber G
Test Date	:2021-06-22
Temp./Humi.	:19.4/67
Antenna Pol.	:Horizontal
Engineer	:Jack Tseng



			Frequen	icy (MHz)			
	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
_							
	4804.000	Average	27.66	3.14	30.79	54.00	-23.21
	4804.000	Peak	36.54	3.14	39.68	74.00	-34.32
	7206.000	Average	25.51	7.22	32.72	54.00	-21.28
	7206.000	Peak	33.93	7.22	41.15	74.00	-32.85



Report Number	:E2/2021/60026
Operation Mode	:BT EDR
Test Frequency	:2441 MHz
Test Mode	:TX CH MID
EUT Pol	:H Plane

Test Site	:966 Chamber G
Test Date	:2021-06-22
Temp./Humi.	:19.4/67
Antenna Pol.	:Vertical
Engineer	:Jack Tseng



		0.00.	Frequen	icy (MHz)	21400.	20500	
	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
_							
	4882.000	Average	26.74	3.31	30.06	54.00	-23.94
	4882.000	Peak	38.14	3.31	41.45	74.00	-32.55
	7323.000	Average	25.48	7.67	33.14	54.00	-20.86
	7323.000	Peak	33.43	7.67	41.10	74.00	-32.90



Report Number	:E2/2021/60026
Operation Mode	:BT EDR
Test Frequency	:2441 MHz
Test Mode	:TX CH MID
EUT Pol	:H Plane

Test Site	:966 Chamber G
Test Date	:2021-06-22
Temp./Humi.	:19.4/67
Antenna Pol.	:Horizontal
Engineer	:Jack Tseng



			Frequen	cy (MHz)		20000	
	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	4882.000	Average	27.00	3.31	30.31	54.00	-23.69
	4882.000	Peak	35.95	3.31	39.26	74.00	-34.74
	7323.000	Average	25.50	7.67	33.17	54.00	-20.83
	7323.000	Peak	34.76	7.67	42.43	74.00	-31.57



4960.000

4960.000

7440.000

7440.000

Average

Peak

Average

Peak

-23.65

-33.86

-20.65

-32.41

54.00

74.00

54.00

74.00

Report Number Operation Mode Test Frequency Test Mode EUT Pol	:E2/2021/ :BT EDR :2480 MH :TX CH H :H Plane	Z	Tes Ter Ant	t Site t Date np./Humi. enna Pol. gineer	:966 Chamb :2021-06-22 :19.4/67 :Vertical :Jack Tseng	
100 Level (dBuV/m)					
87.5						
75.0						
62.5						
50.0						
37.5	2	3				
25.0						
12.5						
1000	6100.	11200. Frequer	16300. icy (MHz)	21400). <u>265</u> 0	10
Freq.	Detector	Spectrum	Factor	Actual	Lim	it Margin
	Mode	Reading Level		FS	@3i	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV	//m dB

3.42

3.42

8.11

8.11

30.36

40.14

33.35

41.59

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

26.94

36.72

25.24

33.48



Margin

Report Number:E2/2021/60026Test Site:966 ChOperation Mode:BT EDRTest Date:2021-00Test Frequency:2480 MHzTemp./Humi.:19.4/67Test Mode:TX CH HIGHAntenna Pol.:HorizonEUT Pol:H PlaneEngineer:Jack Ts	ital
100 Level (dBuV/m)	
87.5	
75.0	
62.5	
50.0	
37.5	
25.0	_
12.5	
0 1000 6100. 11200. <u>16300</u> . 21400. 2	
1000 6100. 11200. 16300. 21400. 2 Frequency (MHz)	26500
Freq. Detector Spectrum Factor Actual	Limit
Mode Reading Level FS	@3m

MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.000	Average	26.93	3.42	30.35	54.00	-23.65
4960.000	Peak	35.35	3.42	38.77	74.00	-35.23
7440.000	Average	25.33	8.11	33.44	54.00	-20.56
7440.000	Peak	34.25	8.11	42.36	74.00	-31.64



11 FREQUENCY SEPARATION


11.1 Standard Applicable

Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

11.2 Measurement Equipment Used

Conducted Emission Test Site: Conducted G						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
Spectrum Analyzer	KEYSIGHT	N9010B	MY59071570	06/01/2021	05/31/2022	
Attenuator	Marvelous	WATT-218FS- 10	RF16	11/19/2020	11/18/2021	
DC Block	PASTERNACK	PE8210	RF154	11/19/2020	11/18/2021	

11.3 Test Set-up



11.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = middle of hopping channel.
- 5. Set the spectrum analyzer as RBW, VBW=300 kHz, Adjust Span to 5MHz, Sweep = auto.
- 6. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

11.5 Measurement Result

Channel separation (MHz)	Limit	Result
1	≧25 kHz or 2/3 times 20dB bandwidth	PASS


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




11.6 **Frequency Separation Test Plots**

GFSK 1M DH5 CH0CH1CH2




GFSK_1M_DH5_CH38CH39CH40




GFSK_1M_DH5_CH76CH77CH78





8DPSK 3M DH5 CH38CH39CH40



8DPSK 3M DH5 CH76CH77CH78



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnielectronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/1erms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

	SGS	Taiwan Ltd.	No.134,Wu Kunç	g Road, New Taipei Industrial Park, Wuku District, New Taipei City, 1	"aiwan/新北市五股區新北產業園區五工路 134 號
台灣檢驗科技股份有限	公 <mark>司</mark>	t (886-2) 2	2299-3279	f (886-2) 2298-0488	www.sgs.com.tw
_					Member of SGS Group



12 NUMBER OF HOPPING FREQUENCY


12.1 Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

12.2 Measurement Equipment Used

Conducted Emission Test Site: Conducted G						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
Spectrum Analyzer	KEYSIGHT	N9010B	MY59071570	06/01/2021	05/31/2022	
Attenuator	Marvelous	WATT-218FS- 10	RF16	11/19/2020	11/18/2021	
DC Block	PASTERNACK	PE8210	RF154	11/19/2020	11/18/2021	

12.3 Test Set-up



12.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 5. Set the spectrum analyzer as RBW=430kHz, VBW=1.5MHz., Detector = Peak
- 6. Max hold, view and count how many channel in the band.

12.5 Measurement Result

Tabular Data of Total Channel Number

	Channel Number	Limit
2.4 GHz – 2.441 GHz	40	
2.441 GHz – 2.4835 GHz	39	>15
2.4 GHz ~2.4835 GHz	(40+39) = 79	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




12.6 Channel Number Test Plots

GFSK_1M_DH5_2400-2441



GFSK_1M_DH5_2441-2480





8DPSK 3M DH5 2441-2480



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



13 TIME OF OCCUPANCY (DWELL TIME)

13.1 **Standard Applicable**

Frequency hopping systems operating in the 2400MHz-2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

Measurement Equipment Used 13.2

Conducted Emission Test Site: Conducted G						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
Spectrum Analyzer	KEYSIGHT	N9010B	MY59071570	06/01/2021	05/31/2022	
Attenuator	Marvelous	WATT-218FS- 10	RF16	11/19/2020	11/18/2021	
DC Block	PASTERNACK	PE8210	RF154	11/19/2020	11/18/2021	

13.3 **Test Set-up**



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemniincluding to the second of the second terms and conductive to the full second terms at the second terms at terms at the second terms at terms



13.4 **Measurement Procedure**

1. Place the EUT on the table and set it in transmitting mode.

- 2. The testing follows ANSI C6310:2015.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.

5. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz, Detector = Peak, Adjust Sweep = $2 \sim 8 \text{ms}$.

6. Repeat above procedures until all frequency of the interest measured were complete.

Formula Deduced: time occupancy of one time slot X Hopping rate / total slot in one channel / total channel that hops X period of working channels.

Where, standard hopping rate is 1600 hops/s, slot in one channel for DH1, DH3, and DH5 is 2, 4, and 6, respectively.

DH1 consists of single time slot of the uplink, and one slot of the downlink Total Slot: 2 DH3 consists of three time slot of the uplink, and one slot of the downlink. Total Slot: 4 DH5 consists of five time slot of the uplink, and one slot of the downlink. Total Slot: 6

In AFH mode, hopping rate is 800 hop/s with 6 slots in 20 hopping channels with channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 * 20) (S), Hop Over Occupancy Time comes to (800 / 6 / 20)*(0.4 *20) =53.33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

aiwan I td

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



13.5 **Tabular Result of the Measurement**

GFSK (1Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)
	DH1	123.20	400ms
Mid	DH3	262.40	400ms
	DH5	308.80	400ms

π/4 DQPSK (2Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)
	2DH1	124.80	400ms
Mid	2DH3	262.40	400ms
	2DH5	307.20	400ms

8-DPSK (3Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)
	3DH1	124.80	400ms
Mid	3DH3	260.80	400ms
	3DH5	308.80	400ms

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



GFSK (1Mbps):

CH Mid	DH1 time slot =	0.385 *	(1600/2/79) *	31.6 =	123.20 (ms)
	DH3 time slot =	1.640 *	(1600/4/79) *	31.6 =	262.40 (ms)
	DH5 time slot =	2.895 *	(1600/6/79) *	31.6 =	308.80 (ms)

$\pi/4$ -DQPSK (2Mbps):

CH Mid	2DH1 time slot=	0.390 *	(1600/2/79) *	31.6 =	124.80 (ms)
	2DH3 time slot=	1.640 *	(1600/4/79) *	31.6 =	262.40 (ms)
	2DH5 time slot=	2.880 *	(1600/6/79) *	31.6 =	307.20 (ms)

8-DPSK (3Mbps):

CH Mid	3DH1 time slot=	0.390 *	(1600/2/79) *	31.6 =	124.80 (ms)
	3DH3 time slot=	1.630 *	(1600/4/79) *	31.6 =	260.80 (ms)
	3DH5 time slot=	2.895 *	(1600/6/79) *	31.6 =	308.80 (ms)

A period time = 0.4 (s) * 79 = 31.6 (s)

13.6 **Measurement Result**


Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


Report No.: E2/2021/60026 Page: 77 of 79




Dwell Time_GFSK_1M_DH1_2441MHz




Dwell Time_GFSK_1M_DH3_2441MHz




Dwell Time_GFSK_1M_DH5_2441MHz



Dwell Time_4DQPSK_2M_DH1_2441MHz



Dwell Time_4DQPSK_2M_DH3_2441MHz



Spectrum Analyzer 1 Swept SA · + Ö Frequency v Avg Type: Log-Power Trig: Free Run KEYSIGHT Input R Input Z: 50 Q Corrections: Off Freq Ref: Int (S) PNO: Fast Gate: Off en: 30 dB Center Frequency 2.441000000 GHz Settings + Gate: Off IF Gain: Low Sig Track: Off Align: Auto PNNNN Da pan ΔMkr3 3.750 ms 1 Spectru Ref Lvi Offset 11.10 dB Ref Level 30.00 dBm 0.00000000 Hz Scale/Div 10 dB -0.01 dB Swept Span Zero Span <u>∆1∆2</u>; Full Span Start Freq 2.441000000 GHz Stop Freq 40.0 50.0 2 441000000 GHz AUTO TUNE Center 2.44 Res BW 1.0 M Span o Hz weep 15.0 ms (1001 pts) 5 Markor Table Auto Man Mode Trace Scale Δ2 1 t (Δ) Function Function Width Fur 2.880 ms (Δ) 0.5093 dB 1.410 ms 9.814 dBm Freq Offse 0 Hz 3.750 ms (Δ)-0.01470 d 1.410 ms 9.814 dBr 3 <u>∆</u>4 (Δ) X Axis Sc Log Lin ■ つ C ■ ? Jun 16, 2021 X # 😽 Signal Trac

Dwell Time 4DQPSK 2M DH5 2441MHz


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

(新売与方前就) 「山椒古高米健利潤減(人体加度員)「同時山体加度加量が高少な少和電子板型など可音面計可) 「不可面防度段。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to the reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw




Dwell Time_8DPSK_3M_DH1_2441MHz



Dwell Time_8DPSK_3M_DH3_2441MHz



Dwell Time 8DPSK 3M DH5 2441MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



14 ANTENNA REQUIREMENT

14.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

14.2 Antenna Connected Construction

The antenna is designed with unique RF connector and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.